



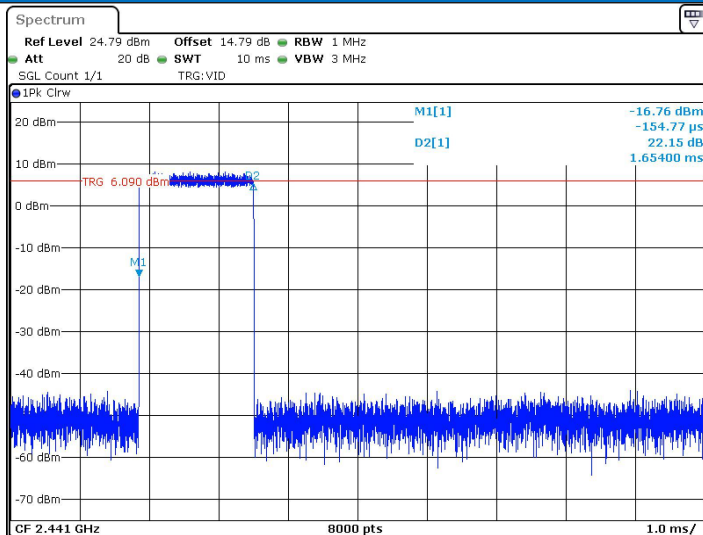


Date: 4 NOV 2024 09:46:21

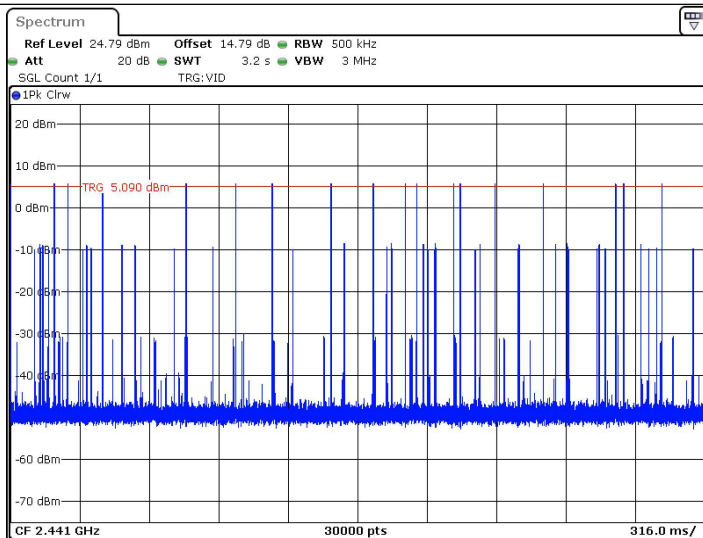


Date: 4 NOV 2024 09:46:33

### 3DH5\_Ant1\_Hop

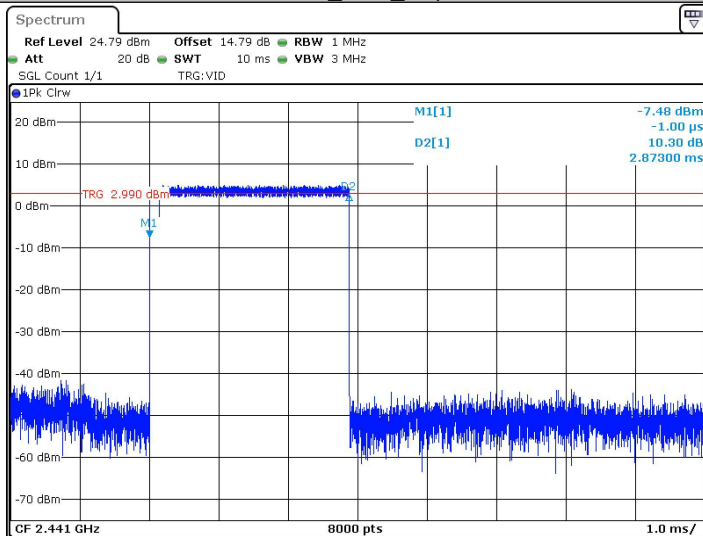


Date: 24 SEP 2024 16:21:39

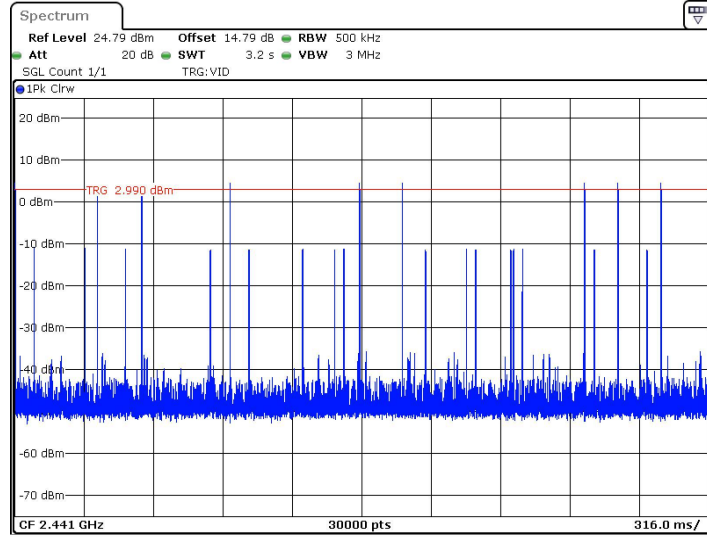

Date: 24 SEP.2024 16:21:45


## 5.8 Band-edge for RF Conducted Emissions

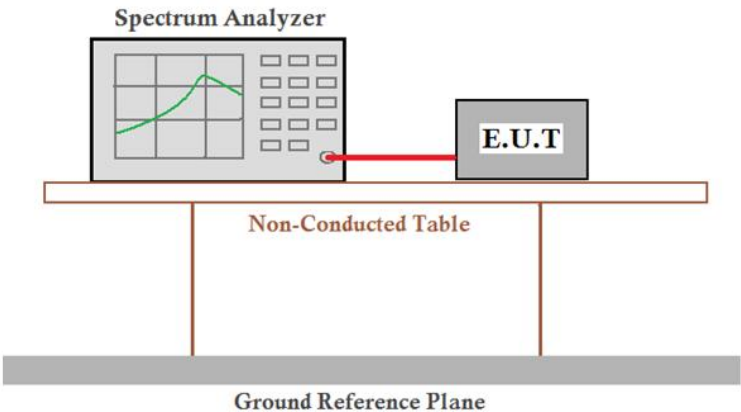
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                        |
| Test Setup:            |  <p>Remark: <math>\text{Offset} = \text{cable loss} + \text{attenuation factor}</math>.</p>                                                                                                                                                                                                           |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Exploratory Test Mode: | Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type                                                                                                                                                                                                                                                                                              |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                                                                                                                          |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

**Measurement Data**

| TestMode | ChName | Freq(MHz) | RefLevel<br>[dBm] | Result<br>[dBm] | Limit<br>[dBm] | Verdict |
|----------|--------|-----------|-------------------|-----------------|----------------|---------|
| DH5      | Low    | 2402      | 4.40              | -48.07          | $\leq -15.6$   | PASS    |
|          | High   | 2480      | 5.17              | -47.43          | $\leq -14.83$  | PASS    |
|          | Low    | Hop_2402  | 3.79              | -50.1           | $\leq -16.21$  | PASS    |
|          | High   | Hop_2480  | 5.24              | -50.75          | $\leq -14.76$  | PASS    |
| 2DH5     | Low    | 2402      | 4.31              | -48.9           | $\leq -15.69$  | PASS    |
|          | High   | 2480      | 5.05              | -46.93          | $\leq -14.95$  | PASS    |
|          | Low    | Hop_2402  | 2.64              | -49.8           | $\leq -17.36$  | PASS    |
|          | High   | Hop_2480  | 3.98              | -50.16          | $\leq -16.02$  | PASS    |
| 3DH5     | Low    | 2402      | 4.46              | -48.38          | $\leq -15.54$  | PASS    |
|          | High   | 2480      | 5.51              | -48.1           | $\leq -14.49$  | PASS    |
|          | Low    | Hop_2402  | 2.73              | -49.21          | $\leq -17.27$  | PASS    |
|          | High   | Hop_2480  | 5.80              | -50.8           | $\leq -14.2$   | PASS    |


Test plot as follows:

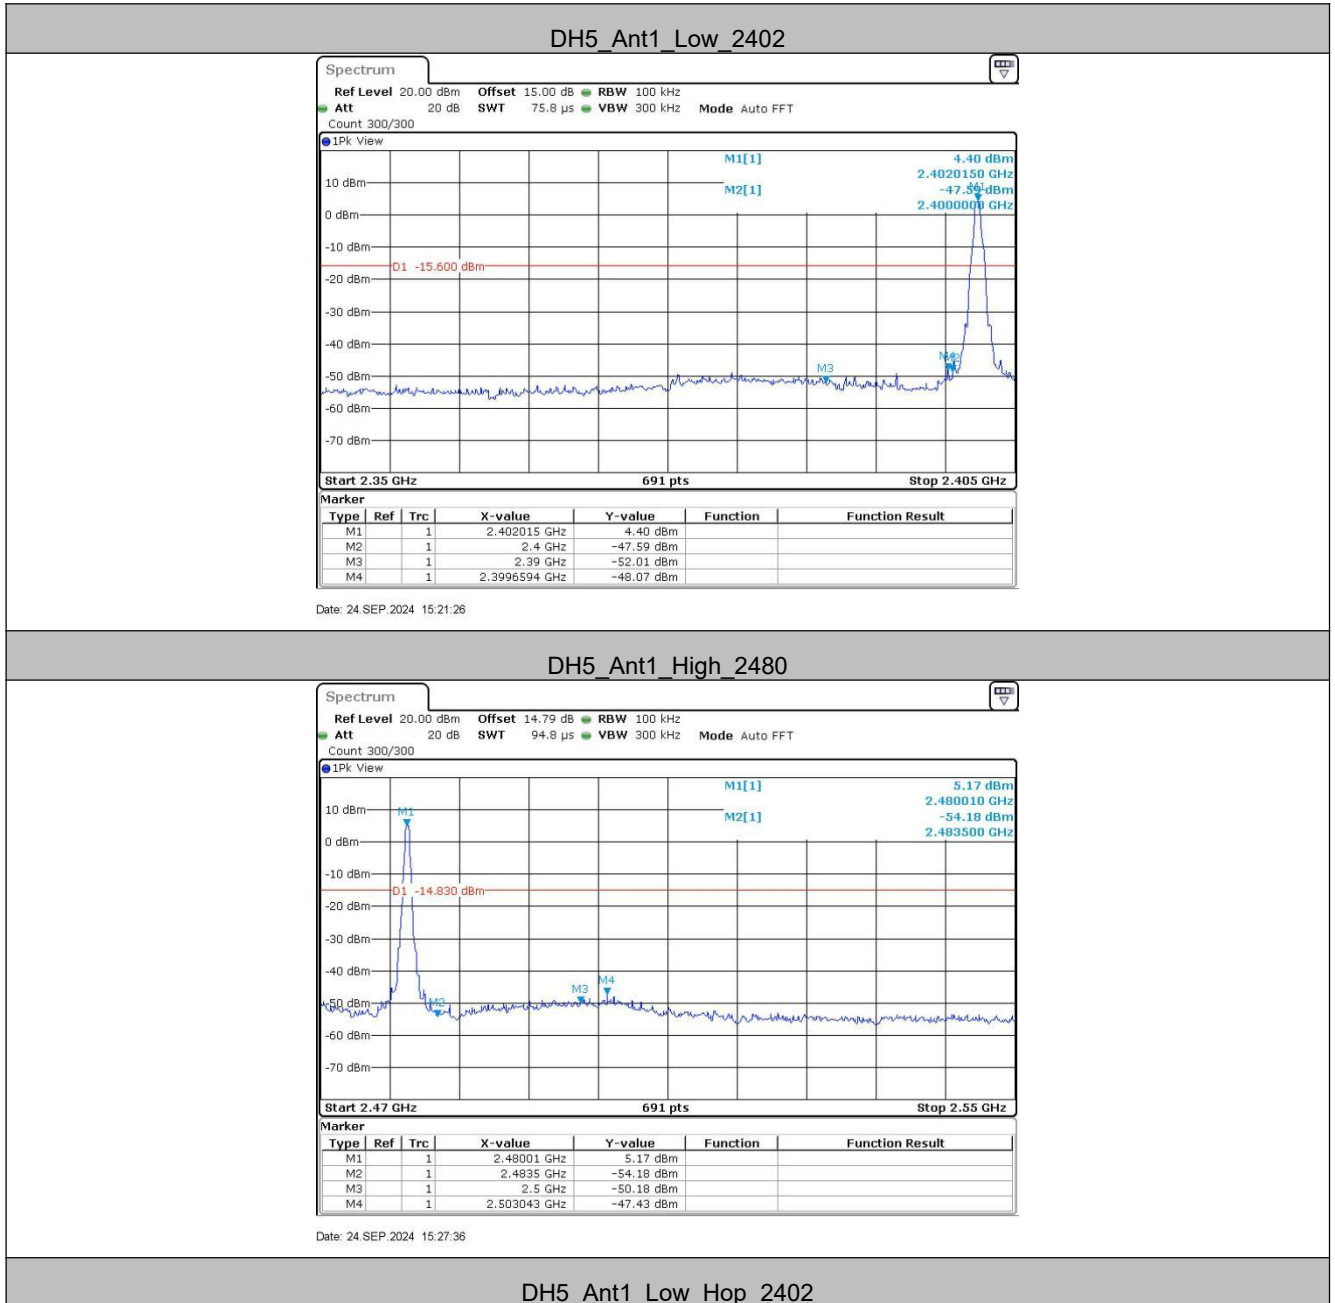

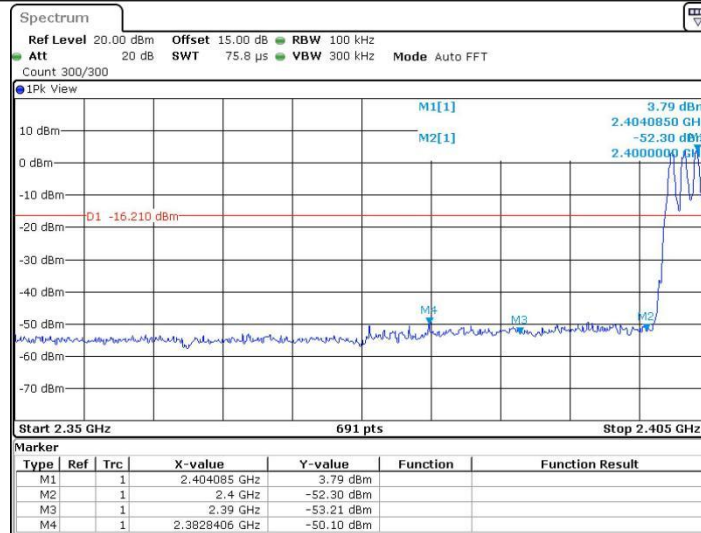


Date: 24 SEP 2024 15:44:43

### DH5\_Ant1\_High\_Hop\_2480

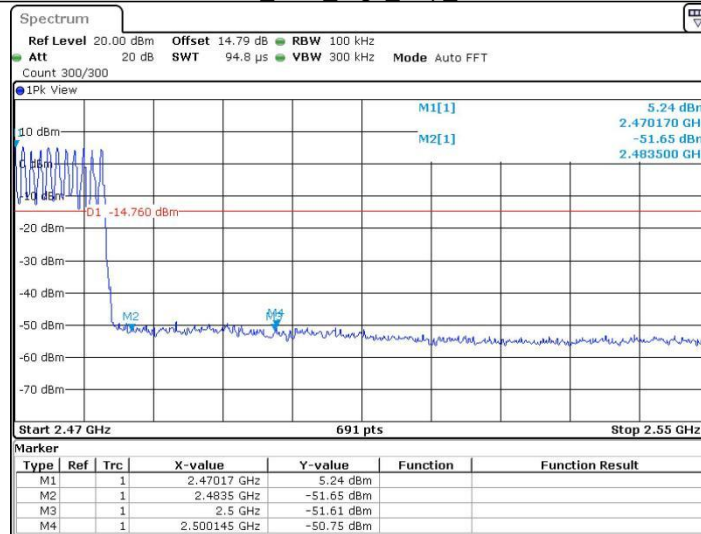


Date: 24 SEP 2024 15:51:21

### 2DH5\_Ant1\_Low\_2402

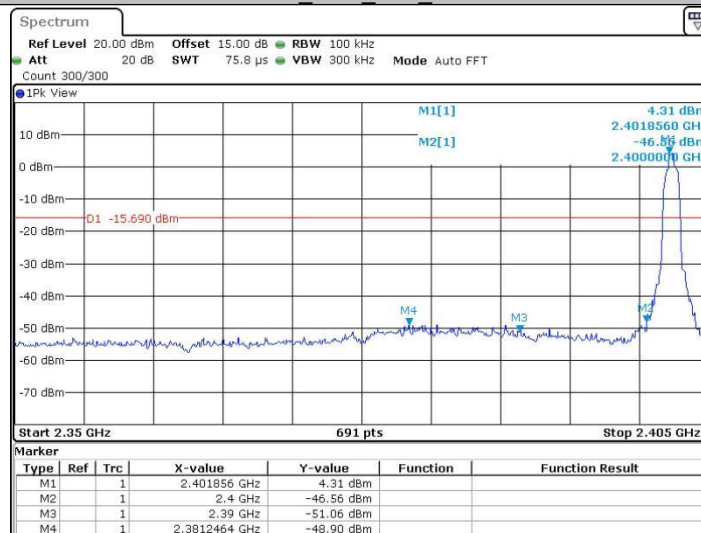


Date: 24 SEP 2024 15:30:19

### 2DH5\_Ant1\_High\_2480

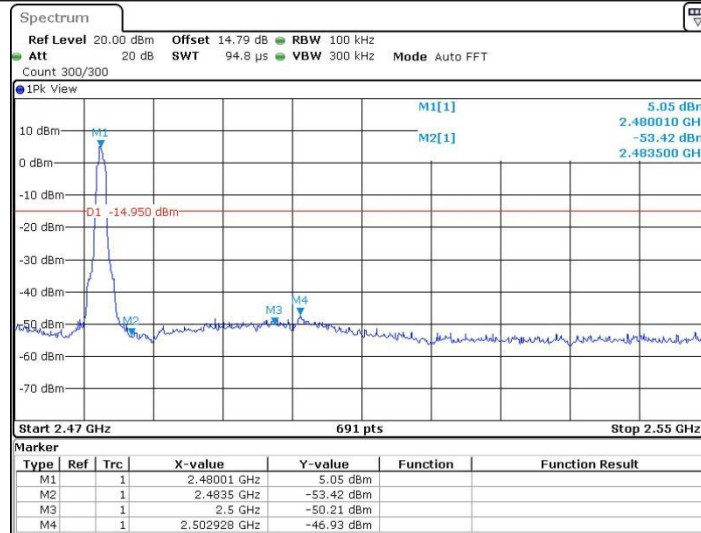


Date: 24 SEP 2024 15:34:03

### 2DH5\_Ant1\_Low\_Hop\_2402

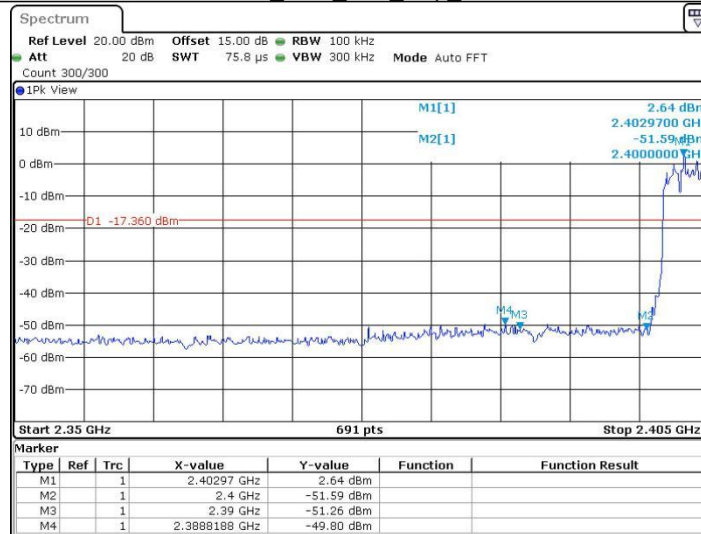


Date: 24 SEP 2024 16:06:56

### 2DH5\_Ant1\_High\_Hop\_2480

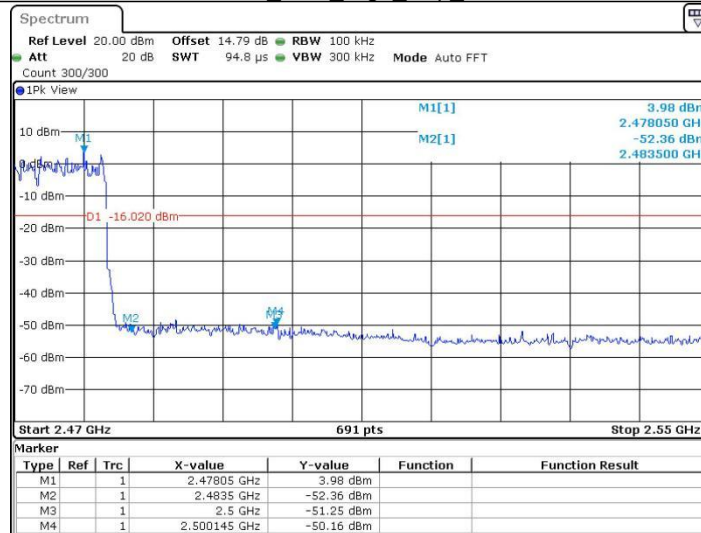


Date: 24 SEP 2024 16:13:52

### 3DH5\_Ant1\_Low\_2402

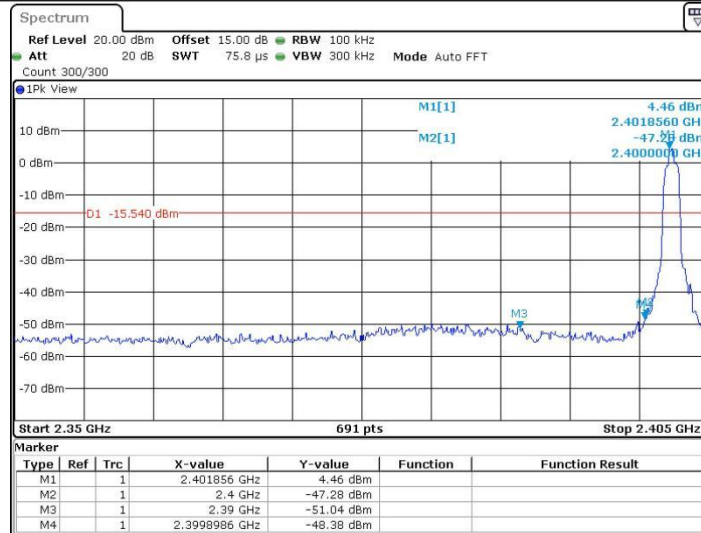


Date: 24 SEP.2024 15:37:05

### 3DH5\_Ant1\_High\_2480

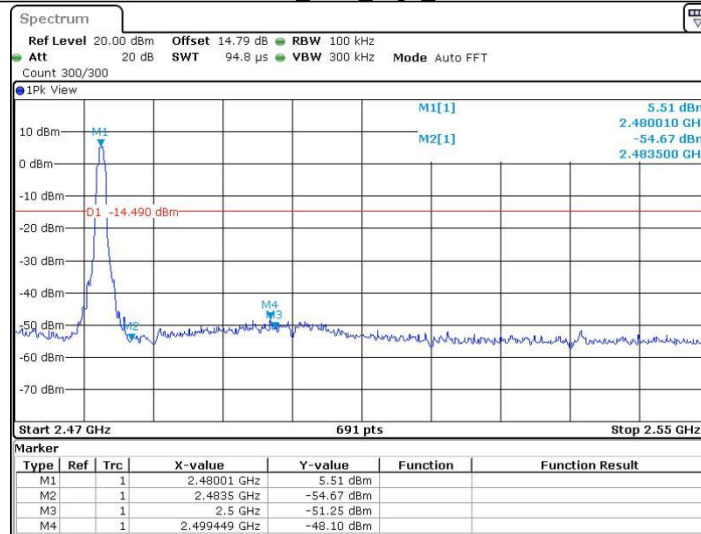


Date: 24 SEP.2024 15:41:47

### 3DH5\_Ant1\_Low\_Hop\_2402

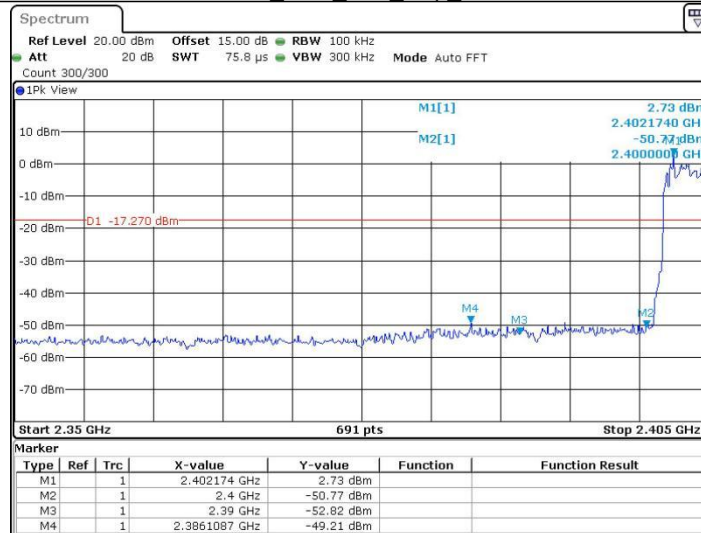


Date: 24 SEP.2024 16:15:25

### 3DH5\_Ant1\_High\_Hop\_2480

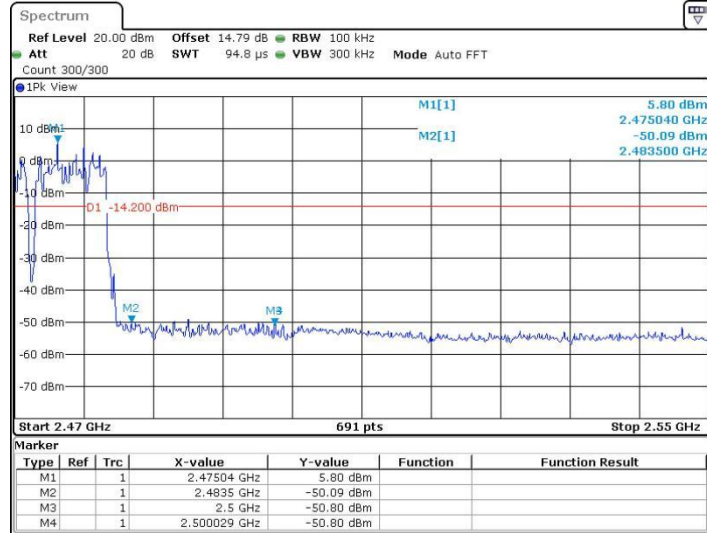

Date: 24 SEP 2024 16:24:47

## 5.9 Spurious RF Conducted Emissions

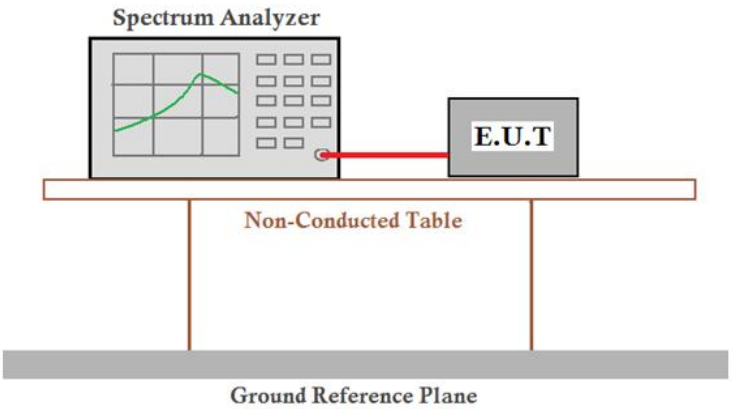
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                        |
| Test Setup:            |  <p>Remark: Offset=cable loss+ attenuation factor.</p>                                                                                                                                                                                                                                                |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type                                                                                                                                                                                                                                                                                                          |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.                                                                                                                                                            |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

DH5\_Ant1\_2402\_0~Reference




Date: 24 SEP.2024 15:23:05

DH5\_Ant1\_2402\_30~1000

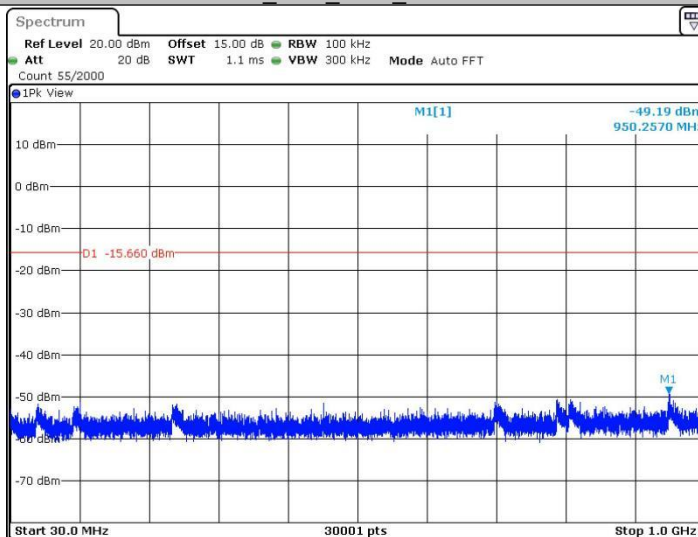

Date: 24 SEP.2024 15:23:12


DH5\_Ant1\_2402\_1000~26500

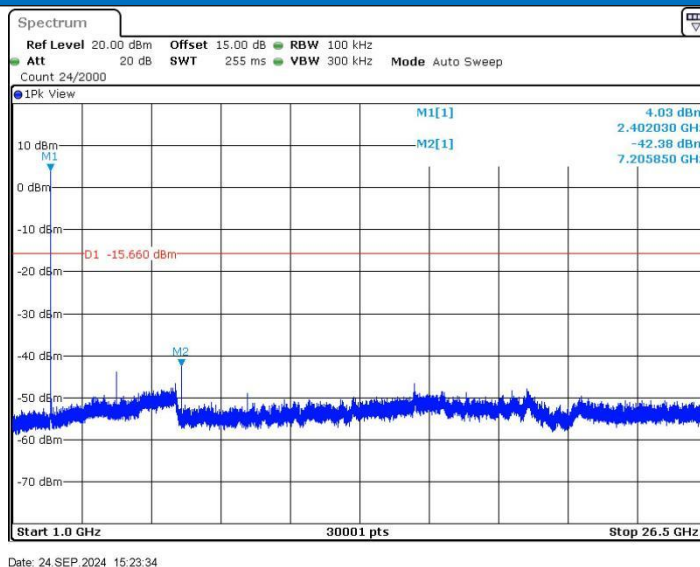


DH5\_Ant1\_2441\_0~Reference



DH5\_Ant1\_2441\_30~1000

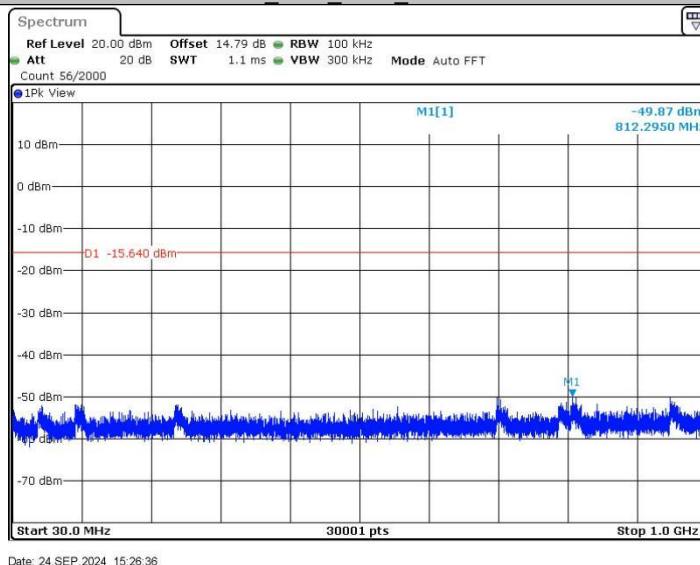


DH5\_Ant1\_2441\_1000~26500

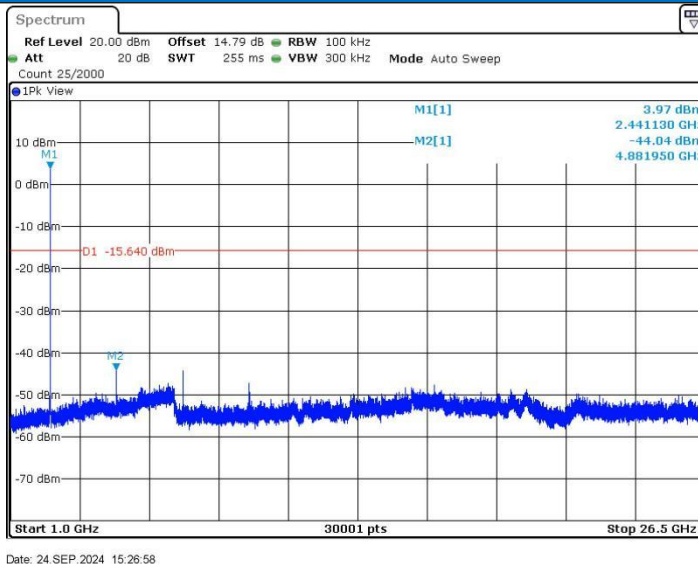


DH5\_Ant1\_2480\_0~Reference




DH5\_Ant1\_2480\_30~1000

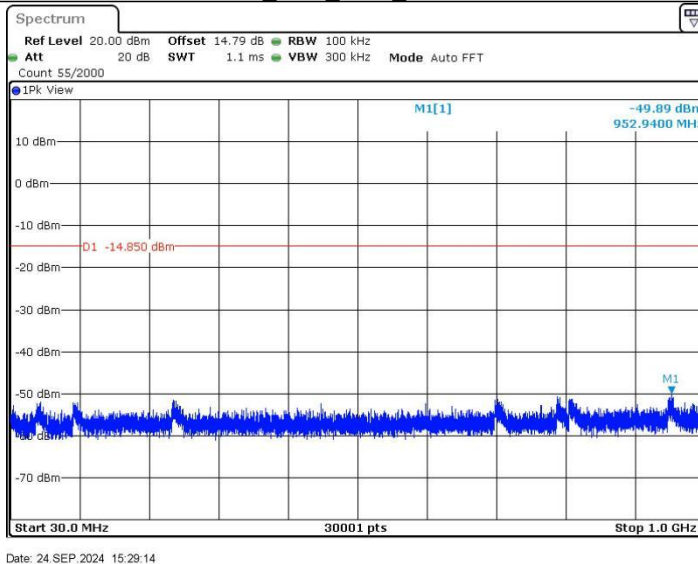


DH5\_Ant1\_2480\_1000~26500

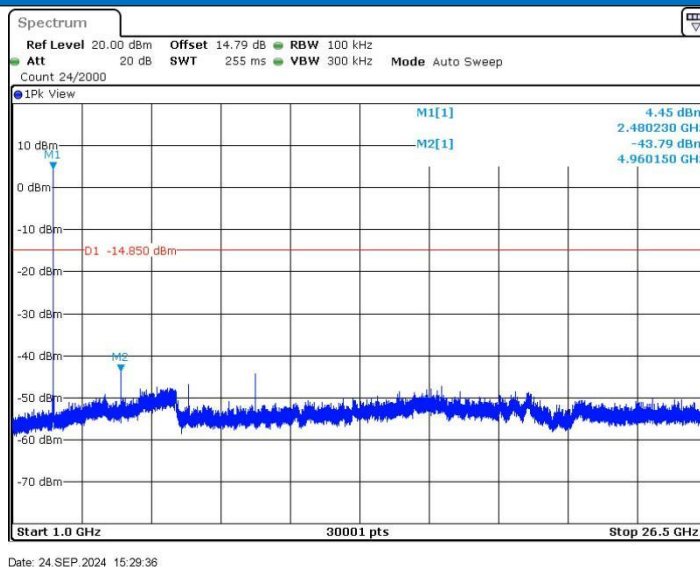


2DH5\_Ant1\_2402\_0~Reference

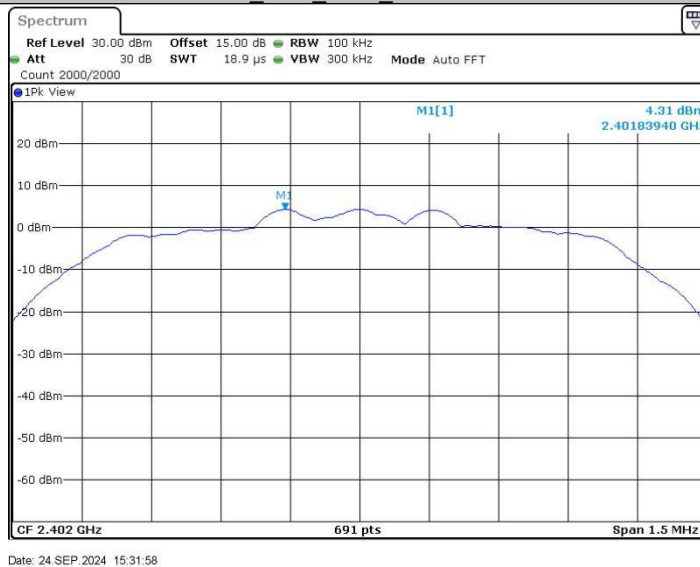


2DH5\_Ant1\_2402\_30~1000

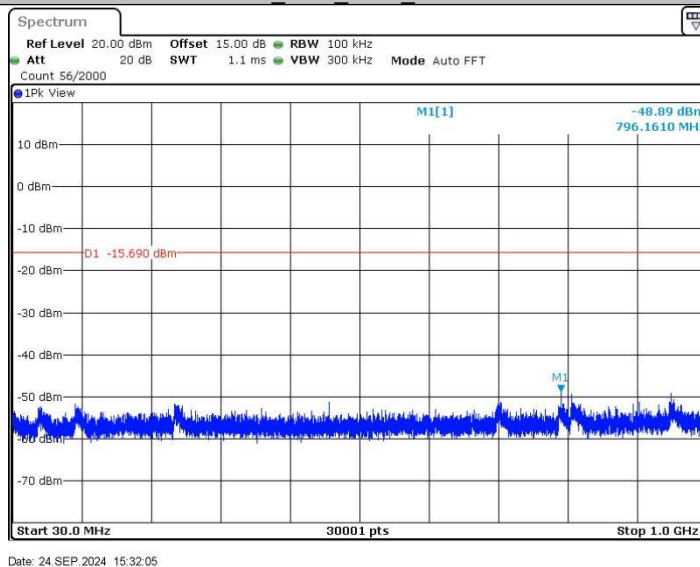


2DH5\_Ant1\_2402\_1000~26500

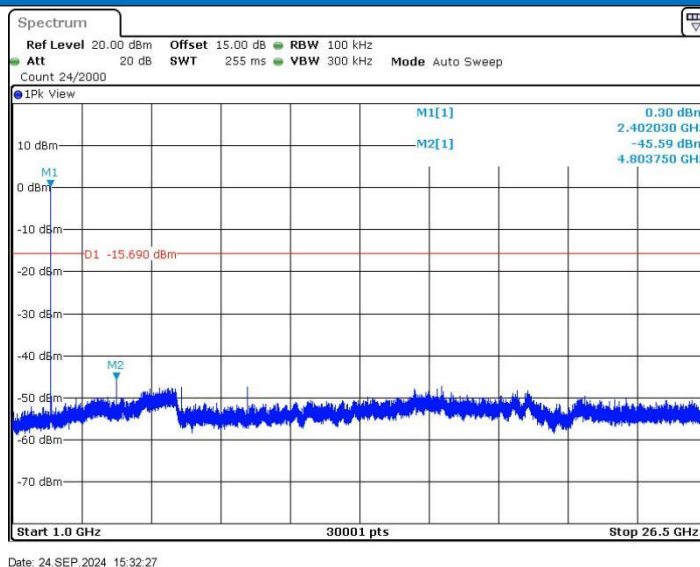


2DH5\_Ant1\_2441\_0~Reference

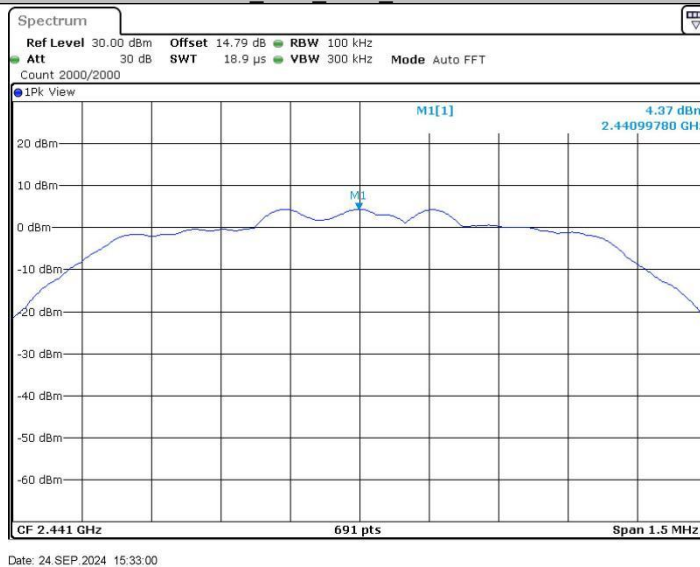

2DH5\_Ant1\_2441\_30~1000

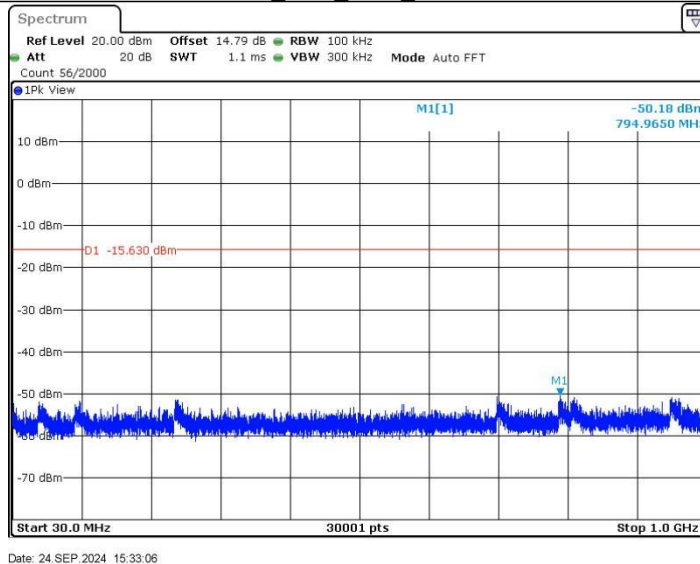


2DH5\_Ant1\_2441\_1000~26500

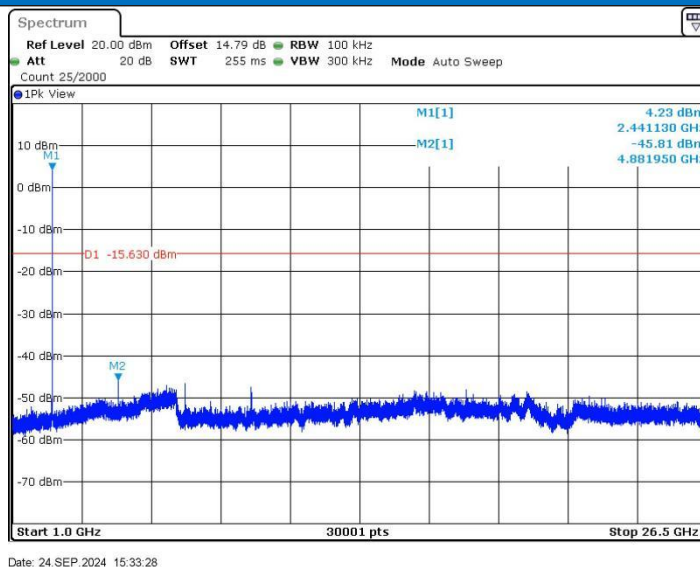


2DH5\_Ant1\_2480\_0~Reference



2DH5\_Ant1\_2480\_30~1000

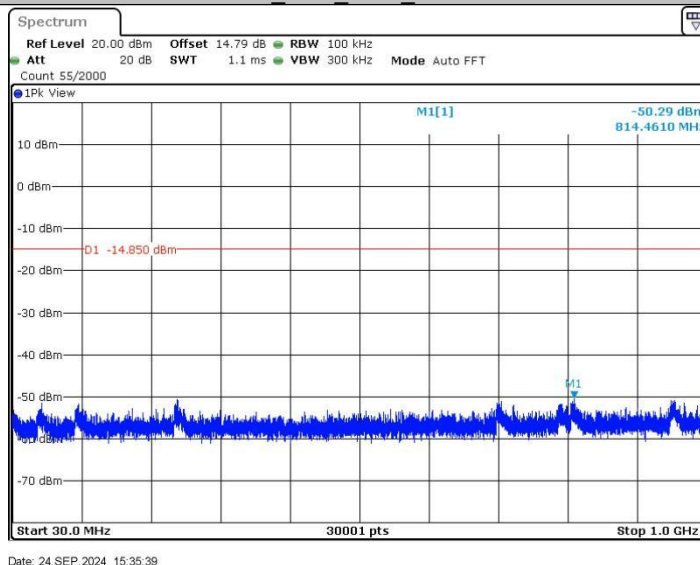


2DH5\_Ant1\_2480\_1000~26500

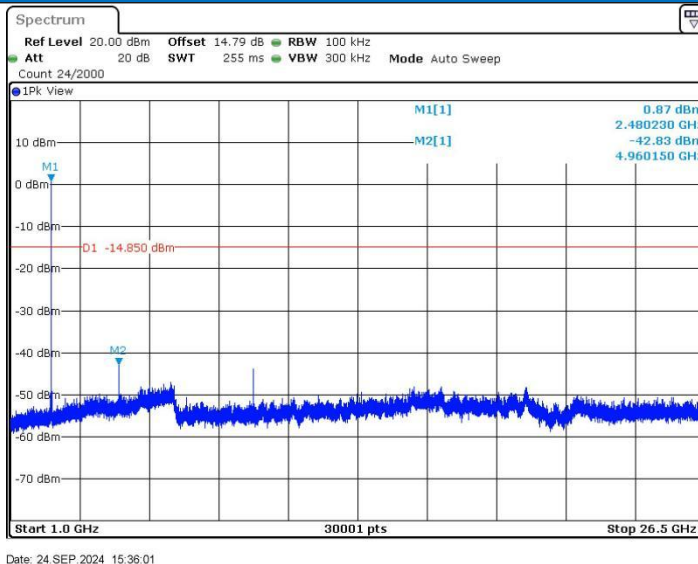


3DH5\_Ant1\_2402\_0~Reference



3DH5\_Ant1\_2402\_30~1000

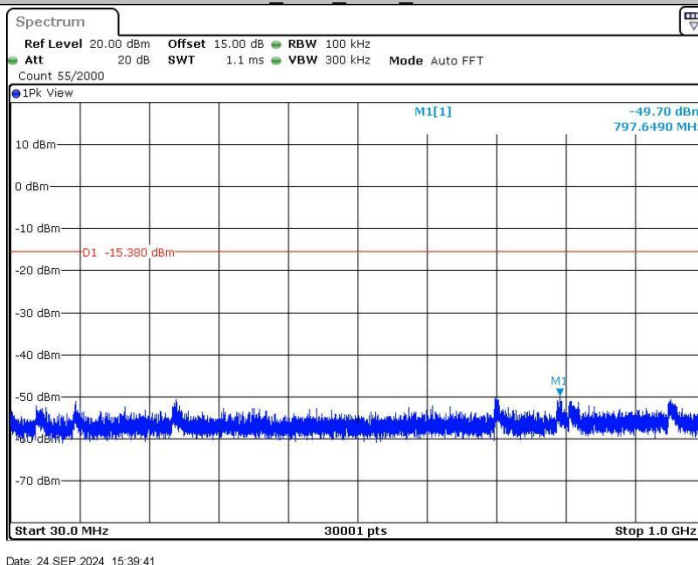


3DH5\_Ant1\_2402\_1000~26500

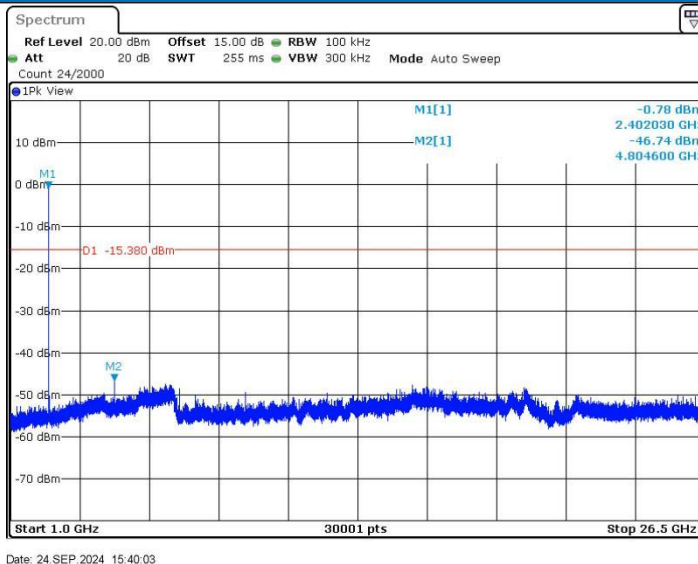


3DH5\_Ant1\_2441\_0~Reference



3DH5\_Ant1\_2441\_30~1000

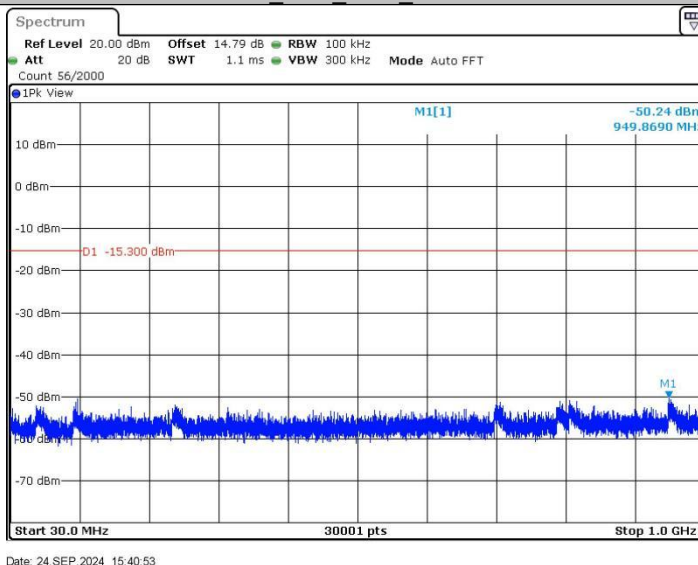


3DH5\_Ant1\_2441\_1000~26500

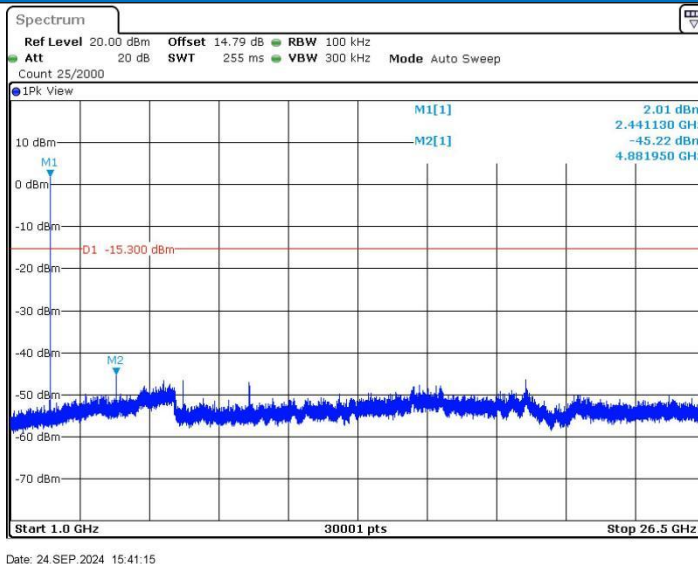


3DH5\_Ant1\_2480\_0~Reference



3DH5\_Ant1\_2480\_30~1000

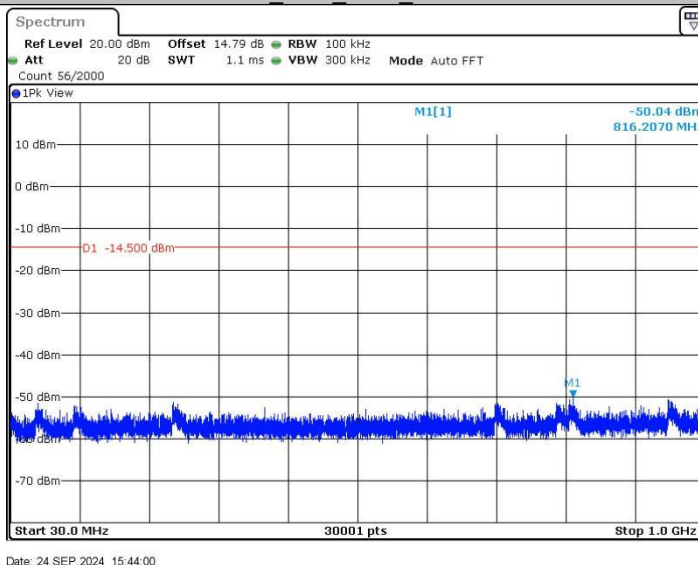

3DH5\_Ant1\_2480\_1000~26500

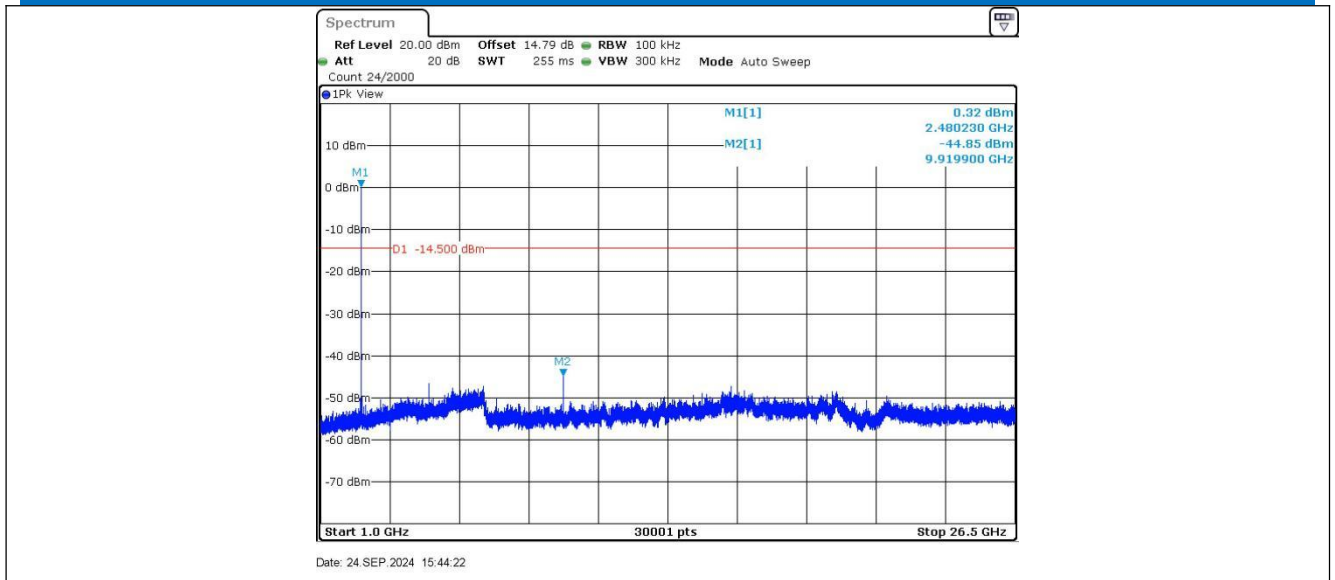

**Remark:**

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 5.10 Other requirements Frequency Hopping Spread Spectrum System

| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | <p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> <p>Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.</p> <p>The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.</p> |
|                   | <p><b>Compliance for section 15.247(a)(1)</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                   | <p>According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="301 1373 1353 1520" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="276 1621 1262 1767" data-label="Diagram"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.</p>                                                                                                                                                                                                                                                                                                                |
|                   | <p><b>Compliance for section 15.247(g)</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                   | <p>According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**Compliance for section 15.247(h)**

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 5.11 Radiated Spurious Emission & Restricted bands

|                                                                                                                                                                                                                                                                             |                                                  |                                     |                   |            |                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement:                                                                                                                                                                                                                                                           | 47 CFR Part 15C Section 15.209 and 15.205        |                                     |                   |            |                             |
| Test Method:                                                                                                                                                                                                                                                                | ANSI C63.10: 2013                                |                                     |                   |            |                             |
| Test Site:                                                                                                                                                                                                                                                                  | Measurement Distance: 3m (Semi-Anechoic Chamber) |                                     |                   |            |                             |
| Receiver Setup:                                                                                                                                                                                                                                                             | Frequency                                        | Detector                            | RBW               | VBW        | Remark                      |
|                                                                                                                                                                                                                                                                             | 0.009MHz-0.090MHz                                | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                                                                                                                                                                                                                                                                             | 0.009MHz-0.090MHz                                | Average                             | 10kHz             | 30kHz      | Average                     |
|                                                                                                                                                                                                                                                                             | 0.090MHz-0.110MHz                                | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                                                                                                                                                                                                                                                                             | 0.110MHz-0.490MHz                                | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                                                                                                                                                                                                                                                                             | 0.110MHz-0.490MHz                                | Average                             | 10kHz             | 30kHz      | Average                     |
|                                                                                                                                                                                                                                                                             | 0.490MHz -30MHz                                  | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                                                                                                                                                                                                                                                                             | 30MHz-1GHz                                       | Peak                                | 120 kHz           | 300kHz     | Peak                        |
|                                                                                                                                                                                                                                                                             | Above 1GHz                                       | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                                                                                                                                                                                                                                                                             |                                                  | Peak                                | 1MHz              | 10Hz       | Average                     |
| Limit:                                                                                                                                                                                                                                                                      | Frequency                                        | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                                                                                                                                                                                                                                                                             | 0.009MHz-0.490MHz                                | 2400/F(kHz)                         | -                 | -          | 300                         |
|                                                                                                                                                                                                                                                                             | 0.490MHz-1.705MHz                                | 24000/F(kHz)                        | -                 | -          | 30                          |
|                                                                                                                                                                                                                                                                             | 1.705MHz-30MHz                                   | 30                                  | -                 | -          | 30                          |
|                                                                                                                                                                                                                                                                             | 30MHz-88MHz                                      | 100                                 | 40.0              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | 88MHz-216MHz                                     | 150                                 | 43.5              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | 216MHz-960MHz                                    | 200                                 | 46.0              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | 960MHz-1GHz                                      | 500                                 | 54.0              | Quasi-peak | 3                           |
|                                                                                                                                                                                                                                                                             | Above 1GHz                                       | 500                                 | 54.0              | Average    | 3                           |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                                  |                                     |                   |            |                             |

Test Setup:

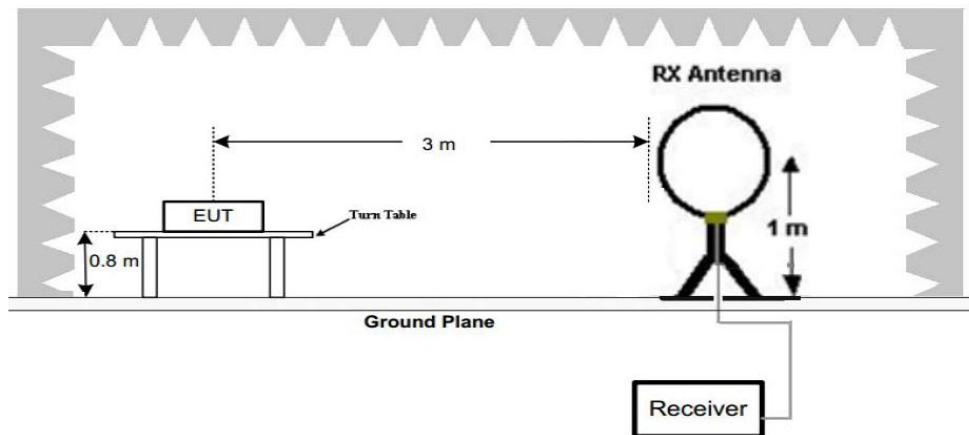


Figure 1. Below 30MHz

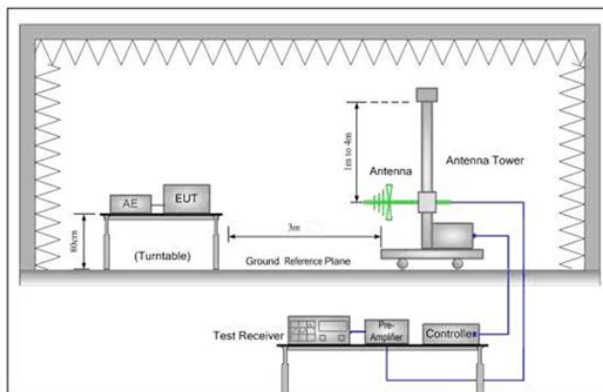


Figure 2. 30MHz to 1GHz

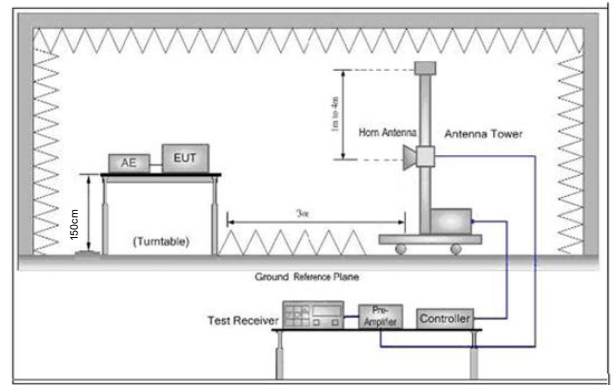


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type<br>Transmitting mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 5.11.1 Radiated Emission below 1GHz

30MHz~1GHz

SMS-00180300-S38

|            |              |          |
|------------|--------------|----------|
| Test mode: | Transmitting | Vertical |
|------------|--------------|----------|

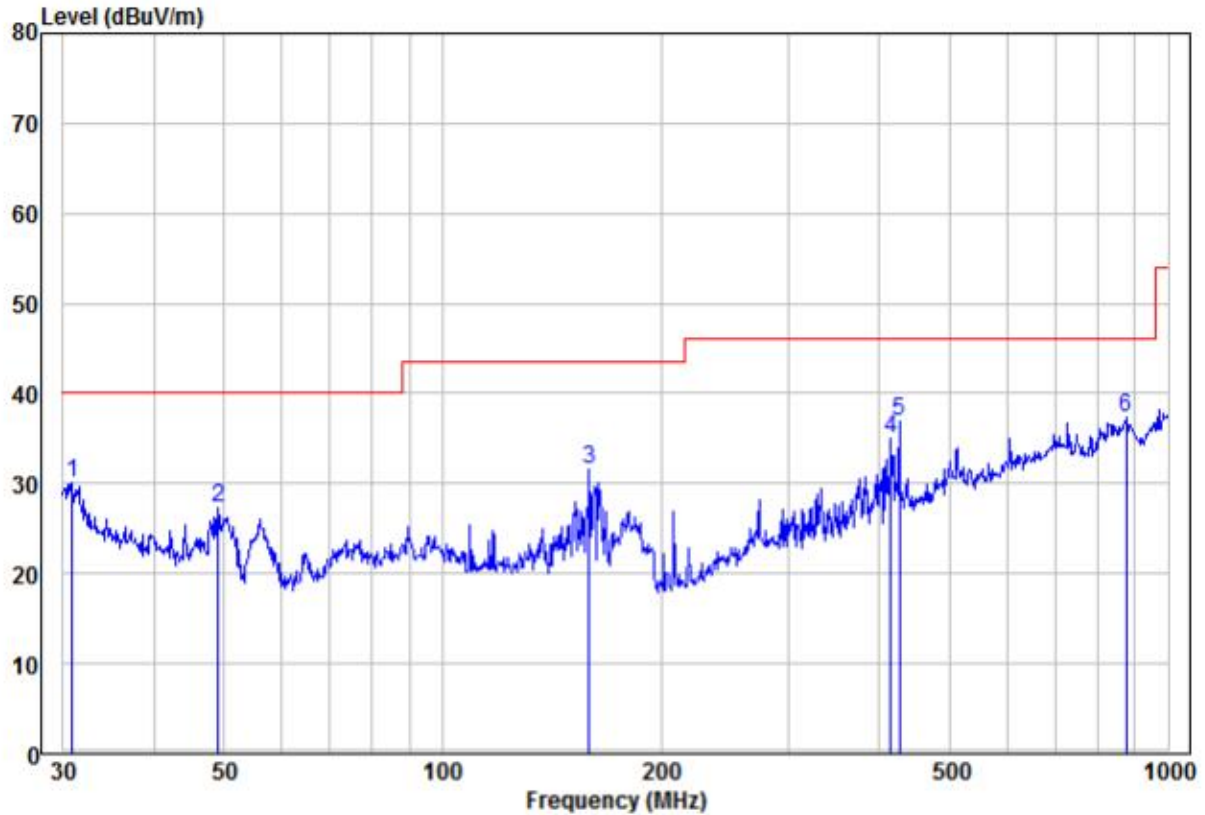

|      | Read Freq | Level | Factor | Level  | Limit Line | Over Limit | Remark | Pol/Phase |
|------|-----------|-------|--------|--------|------------|------------|--------|-----------|
|      | MHz       | dBuV  | dB/m   | dBuV/m | dBuV/m     | dB         |        |           |
| 1    | 30.85     | 14.27 | 15.90  | 30.17  | 40.00      | -9.83      | Peak   | VERTICAL  |
| 2    | 49.01     | 17.98 | 9.25   | 27.23  | 40.00      | -12.77     | Peak   | VERTICAL  |
| 3    | 159.23    | 22.45 | 9.20   | 31.65  | 43.50      | -11.85     | Peak   | VERTICAL  |
| 4    | 414.72    | 17.69 | 17.38  | 35.07  | 46.00      | -10.93     | Peak   | VERTICAL  |
| 5    | 426.52    | 19.17 | 17.78  | 36.95  | 46.00      | -9.05      | Peak   | VERTICAL  |
| 6 pp | 875.25    | 10.52 | 26.77  | 37.29  | 46.00      | -8.71      | Peak   | VERTICAL  |

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

|            |              |            |
|------------|--------------|------------|
| Test mode: | Transmitting | Horizontal |
|------------|--------------|------------|

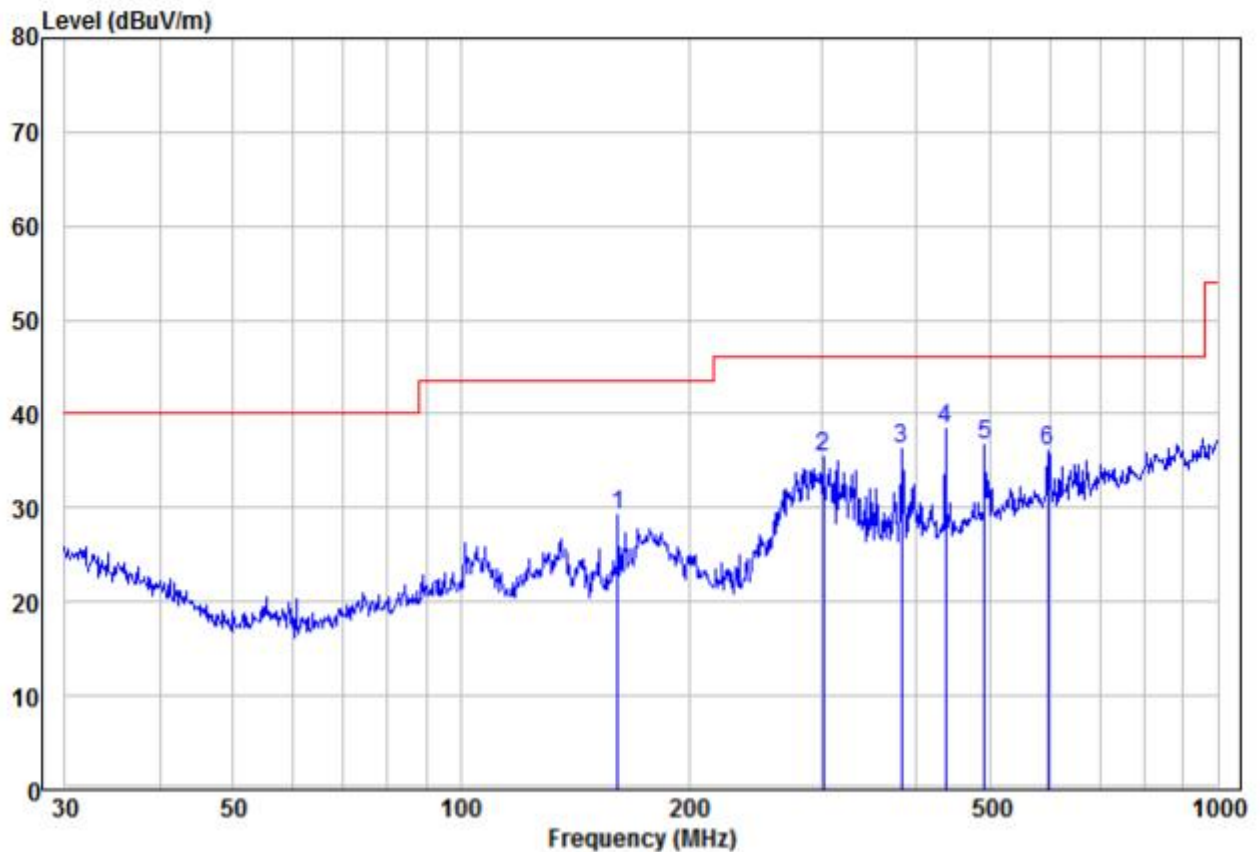

|      | Freq   | Read Level | Factor | Level  | Limit Line | Over Limit | Remark | Pol/Phase  |
|------|--------|------------|--------|--------|------------|------------|--------|------------|
|      | MHz    | dBuV       | dB/m   | dBuV/m | dBuV/m     | dB         |        |            |
| 1    | 161.47 | 20.00      | 9.13   | 29.13  | 43.50      | -14.37     | Peak   | HORIZONTAL |
| 2    | 301.42 | 20.08      | 15.35  | 35.43  | 46.00      | -10.57     | Peak   | HORIZONTAL |
| 3    | 382.59 | 19.94      | 16.43  | 36.37  | 46.00      | -9.63      | Peak   | HORIZONTAL |
| 4 pp | 437.12 | 20.34      | 18.14  | 38.48  | 46.00      | -7.52      | Peak   | HORIZONTAL |
| 5    | 492.47 | 16.57      | 20.04  | 36.61  | 46.00      | -9.39      | Peak   | HORIZONTAL |
| 6    | 597.22 | 15.02      | 21.01  | 36.03  | 46.00      | -9.97      | Peak   | HORIZONTAL |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

FX48U-180300C

|            |              |          |
|------------|--------------|----------|
| Test mode: | Transmitting | Vertical |
|------------|--------------|----------|

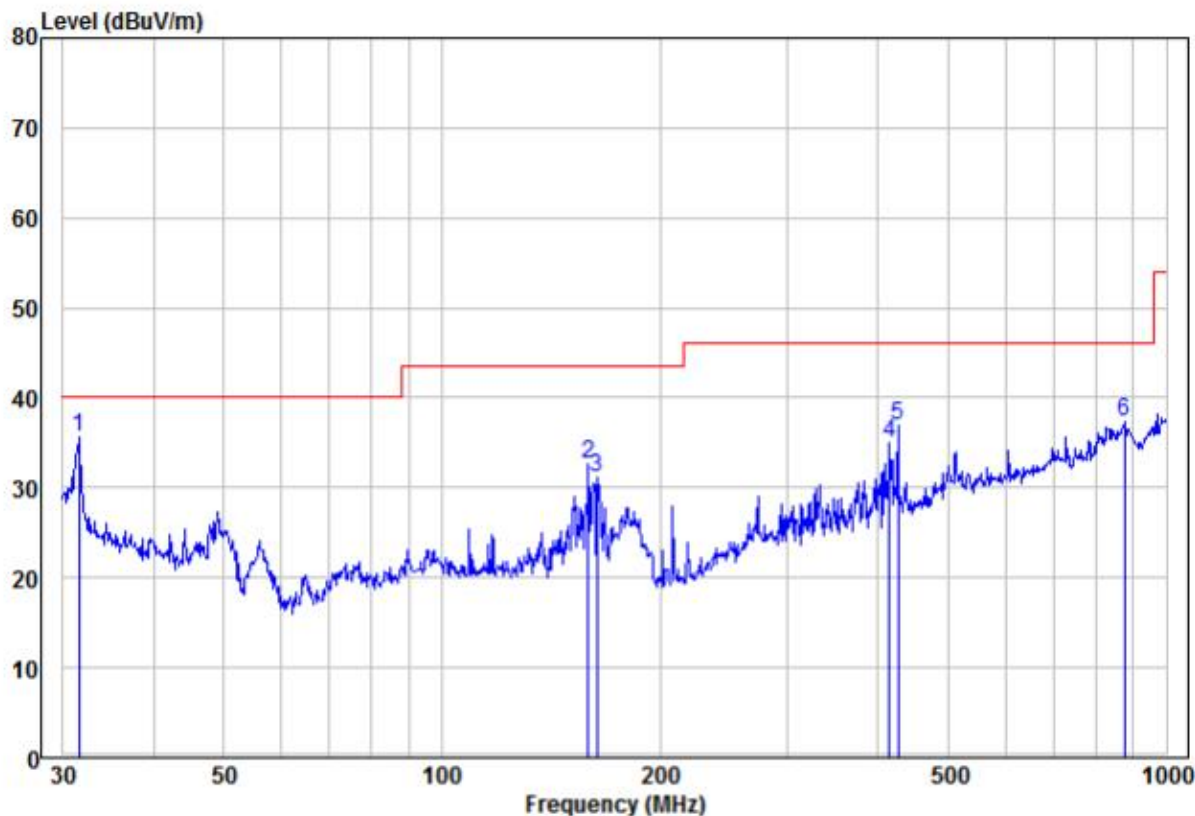

|   | Freq | Read   | Factor | Level  | Limit  | Over  | Remark      | Pol/Phase |
|---|------|--------|--------|--------|--------|-------|-------------|-----------|
|   | MHz  | dBuV   | dB/m   | dBuV/m | dBuV/m | dB    |             |           |
| 1 | pp   | 31.51  | 19.81  | 15.76  | 35.57  | 40.00 | -4.43 Peak  | VERTICAL  |
| 2 |      | 159.23 | 23.45  | 9.20   | 32.65  | 43.50 | -10.85 Peak | VERTICAL  |
| 3 |      | 163.76 | 22.02  | 9.10   | 31.12  | 43.50 | -12.38 Peak | VERTICAL  |
| 4 |      | 414.72 | 17.69  | 17.38  | 35.07  | 46.00 | -10.93 Peak | VERTICAL  |
| 5 |      | 426.52 | 19.17  | 17.78  | 36.95  | 46.00 | -9.05 Peak  | VERTICAL  |
| 6 |      | 875.25 | 10.52  | 26.77  | 37.29  | 46.00 | -8.71 Peak  | VERTICAL  |

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

|            |              |            |
|------------|--------------|------------|
| Test mode: | Transmitting | Horizontal |
|------------|--------------|------------|

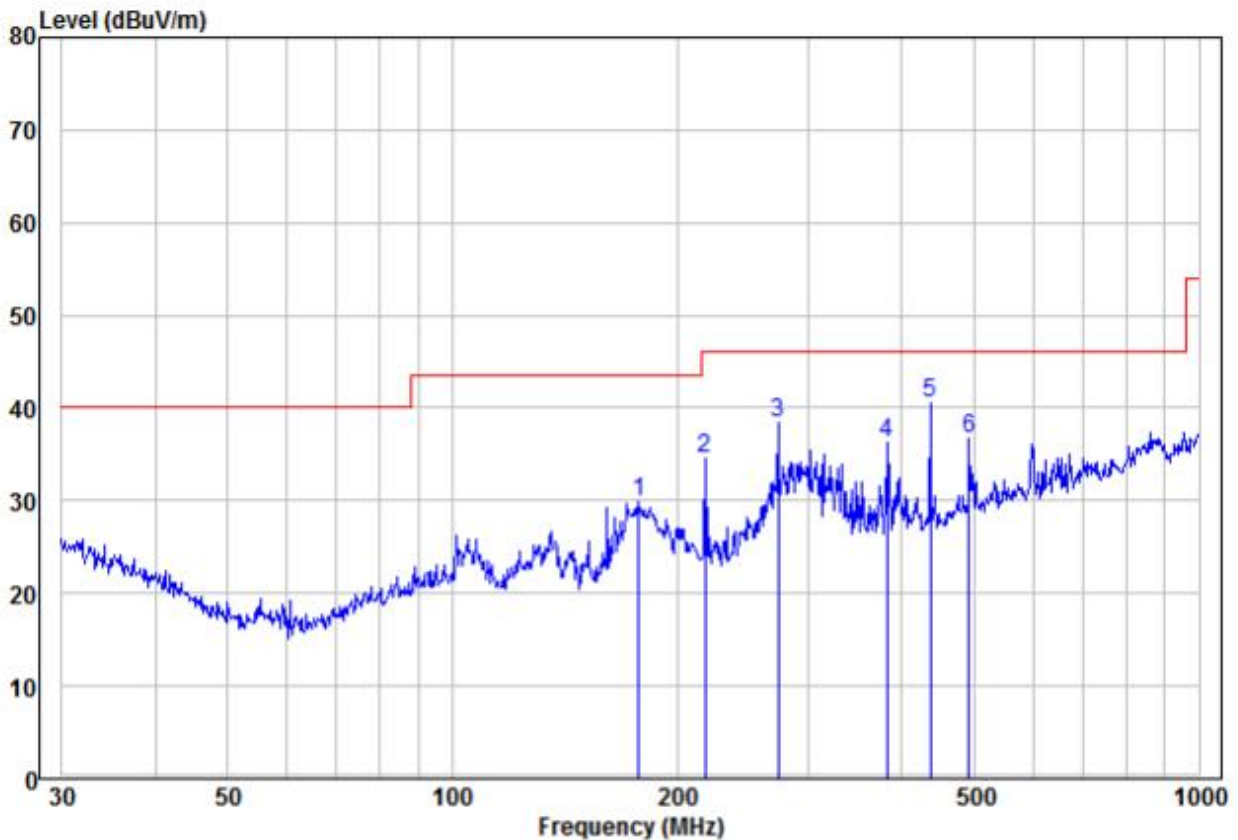

|      | Read   |        |        | Limit  | Over  |             |            |
|------|--------|--------|--------|--------|-------|-------------|------------|
| Freq | Level  | Factor | Level  | Line   | Limit | Remark      | Pol/Phase  |
| MHz  | dBuV   | dB/m   | dBuV/m | dBuV/m | dB    |             |            |
| 1    | 177.51 | 20.22  | 9.59   | 29.81  | 43.50 | -13.69 Peak | HORIZONTAL |
| 2    | 218.31 | 23.96  | 10.60  | 34.56  | 46.00 | -11.44 Peak | HORIZONTAL |
| 3    | 273.23 | 23.94  | 14.41  | 38.35  | 46.00 | -7.65 Peak  | HORIZONTAL |
| 4    | 382.59 | 19.94  | 16.43  | 36.37  | 46.00 | -9.63 Peak  | HORIZONTAL |
| 5 pp | 437.12 | 22.34  | 18.14  | 40.48  | 46.00 | -5.52 Peak  | HORIZONTAL |
| 6    | 492.47 | 16.57  | 20.04  | 36.61  | 46.00 | -9.39 Peak  | HORIZONTAL |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

### 5.11.2 Transmitter Emission above 1GHz

| Worse case mode: |               | GFSK(DH5) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|-----------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor    | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)      | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390             | 53.97         | -9.2      | 44.77          | 74            | -29.23 | Peak          | H         |
| 2400             | 54.89         | -9.39     | 45.50          | 74            | -28.50 | Peak          | H         |
| 4804             | 53.86         | -4.33     | 49.53          | 74            | -24.47 | Peak          | H         |
| 7206             | 48.71         | 1.01      | 49.72          | 74            | -24.28 | Peak          | H         |
| 2390             | 55.13         | -9.2      | 45.93          | 74            | -28.07 | Peak          | V         |
| 2400             | 55.65         | -9.39     | 46.26          | 74            | -27.74 | Peak          | V         |
| 4804             | 53.65         | -4.33     | 49.32          | 74            | -24.68 | Peak          | V         |
| 7206             | 50.82         | 1.01      | 51.83          | 74            | -22.17 | Peak          | V         |

| Worse case mode: |               | GFSK(DH5) |                | Test channel: |        | Middle        |           |
|------------------|---------------|-----------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor    | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)      | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4882             | 51.51         | -4.11     | 47.40          | 74            | -26.60 | peak          | H         |
| 7323             | 51.08         | 1.51      | 52.59          | 74            | -21.41 | peak          | H         |
| 4882             | 53.89         | -4.11     | 49.78          | 74            | -24.22 | peak          | V         |
| 7323             | 48.68         | 1.51      | 50.19          | 74            | -23.81 | peak          | V         |

| Worse case mode: |               | GFSK(DH5) |                | Test channel: |        | Highest       |           |
|------------------|---------------|-----------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor    | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)      | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.5           | 54.67         | -9.29     | 45.38          | 74            | -28.62 | Peak          | H         |
| 4960             | 53.01         | -4.04     | 48.97          | 74            | -25.03 | Peak          | H         |
| 7440             | 49.96         | 1.57      | 51.53          | 74            | -22.47 | Peak          | H         |
| 2483.5           | 55.01         | -9.29     | 45.72          | 74            | -28.28 | Peak          | V         |
| 4960             | 48.73         | -4.04     | 44.69          | 74            | -29.31 | Peak          | V         |
| 7440             | 50.23         | 1.57      | 51.80          | 74            | -22.20 | Peak          | V         |

| Worse case mode: |               | $\pi$ /4DQPSK (2DH5) |                | Test channel:  |        | Lowest        |           |
|------------------|---------------|----------------------|----------------|----------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor               | Emission Level | Limits         | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dB $\mu$ V)  | (dB)                 | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               | H/V       |
| 2390             | 54.36         | -9.2                 | 45.16          | 74             | -28.84 | Peak          | H         |
| 2400             | 55.09         | -9.39                | 45.70          | 74             | -28.30 | Peak          | H         |
| 4804             | 51.38         | -4.33                | 47.05          | 74             | -26.95 | Peak          | H         |
| 7206             | 48.26         | 1.01                 | 49.27          | 74             | -24.73 | Peak          | H         |
| 2390             | 55.06         | -9.2                 | 45.86          | 74             | -28.14 | Peak          | V         |
| 2400             | 55.49         | -9.39                | 46.10          | 74             | -27.90 | Peak          | V         |
| 4804             | 55.14         | -4.33                | 50.81          | 74             | -23.19 | Peak          | V         |
| 7206             | 48.69         | 1.01                 | 49.70          | 74             | -24.30 | Peak          | V         |

| Worse case mode: |               | $\pi$ /4DQPSK (2DH5) |                | Test channel:  |        | Middle        |           |
|------------------|---------------|----------------------|----------------|----------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor               | Emission Level | Limits         | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dB $\mu$ V)  | (dB)                 | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               | H/V       |
| 4882             | 52.59         | -4.11                | 48.48          | 74             | -25.52 | peak          | H         |
| 7323             | 51.23         | 1.51                 | 52.74          | 74             | -21.26 | peak          | H         |
| 4882             | 53.96         | -4.11                | 49.85          | 74             | -24.15 | peak          | V         |
| 7323             | 50.28         | 1.51                 | 51.79          | 74             | -22.21 | peak          | V         |

| Worse case mode: |               | $\pi$ /4DQPSK (2DH5) |                | Test channel:  |        | Highest       |           |
|------------------|---------------|----------------------|----------------|----------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor               | Emission Level | Limits         | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dB $\mu$ V)  | (dB)                 | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               | H/V       |
| 2483.5           | 54.26         | -9.29                | 44.97          | 74             | -29.03 | Peak          | H         |
| 4960             | 51.35         | -4.04                | 47.31          | 74             | -26.69 | Peak          | H         |
| 7440             | 50.14         | 1.57                 | 51.71          | 74             | -22.29 | Peak          | H         |
| 2483.5           | 53.52         | -9.29                | 44.23          | 74             | -29.77 | Peak          | V         |
| 4960             | 49.21         | -4.04                | 45.17          | 74             | -28.83 | Peak          | V         |
| 7440             | 50.47         | 1.57                 | 52.04          | 74             | -21.96 | Peak          | V         |

| Worse case mode: |               | 8DPSK (3DH5) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|--------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor       | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)         | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390             | 54.68         | -9.2         | 45.48          | 74            | -28.52 | Peak          | H         |
| 2400             | 57.17         | -9.39        | 47.78          | 74            | -26.22 | Peak          | H         |
| 4804             | 51.59         | -4.33        | 47.26          | 74            | -26.74 | Peak          | H         |
| 7206             | 50.80         | 1.01         | 51.81          | 74            | -22.19 | Peak          | H         |
| 2390             | 54.23         | -9.2         | 45.03          | 74            | -28.97 | Peak          | V         |
| 2400             | 55.62         | -9.39        | 46.23          | 74            | -27.77 | Peak          | V         |
| 4804             | 52.88         | -4.33        | 48.55          | 74            | -25.45 | Peak          | V         |
| 7206             | 48.26         | 1.01         | 49.27          | 74            | -24.73 | Peak          | V         |

| Worse case mode: |               | 8DPSK (3DH5) |                | Test channel: |        | Middle        |           |
|------------------|---------------|--------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor       | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)         | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4882             | 53.17         | -4.11        | 49.06          | 74            | -24.94 | peak          | H         |
| 7323             | 49.31         | 1.51         | 50.82          | 74            | -23.18 | peak          | H         |
| 4882             | 52.09         | -4.11        | 47.98          | 74            | -26.02 | peak          | V         |
| 7323             | 49.83         | 1.51         | 51.34          | 74            | -22.66 | peak          | V         |

| Worse case mode: |               | 8DPSK (3DH5) |                | Test channel: |        | Highest       |           |
|------------------|---------------|--------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor       | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)         | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.5           | 55.57         | -9.29        | 46.28          | 74            | -27.72 | Peak          | H         |
| 4960             | 52.56         | -4.04        | 48.52          | 74            | -25.48 | Peak          | H         |
| 7440             | 49.59         | 1.57         | 51.16          | 74            | -22.84 | Peak          | H         |
| 2483.5           | 53.75         | -9.29        | 44.46          | 74            | -29.54 | Peak          | V         |
| 4960             | 50.43         | -4.04        | 46.39          | 74            | -27.61 | Peak          | V         |
| 7440             | 50.77         | 1.57         | 52.34          | 74            | -21.66 | Peak          | V         |

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 6 Photographs - EUT Test Setup

### 6.1 Radiated Emission

9KHz~30MHz:



30MHz~1GHz:

