



JQA Application No. : KL80050088
Model No. : 903SH
FCC ID : APYHRO00041

Regulation : CFR 47 FCC Rules Part 24
Issue Date : May 25, 2005

Page 1 of 7


Attachment A
Occupied Bandwidth Measurement
PCS1900

Test Date: May 21, 2005
Temp.: 20 °C ; Humi.: 58 %

CH No.	Transmitting Frequency(MHz)	26dB Bandwidth	99% Bandwidth	Data Page
512	1850.200	306.0 kHz	243.4 kHz	Page 2
661	1880.000	316.8 kHz	254.2 kHz	Page 3
810	1909.800	307.0 kHz	242.4 kHz	Page 4


Note) The point shown on "_____" is the Maximum Margin Point.

Tester : Shigeru Kinoshita




Occupied Bandwidth Measurement

Transmitting Frequency : 1880.000MHz (661 ch)

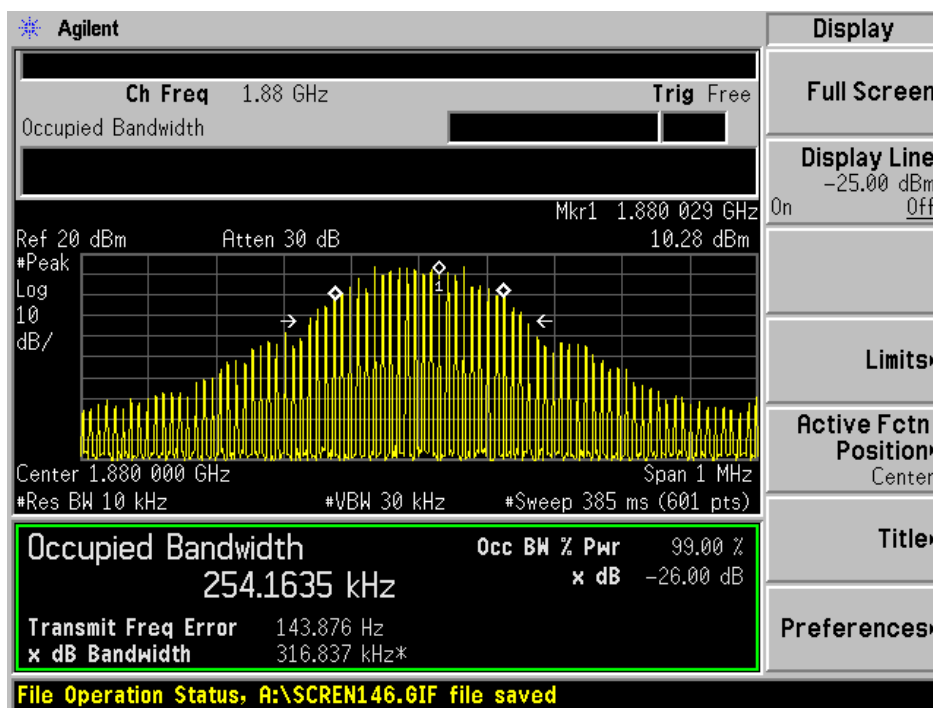

Occupied Bandwidth Measurement

Transmitting Frequency : 1909.800MHz (810 ch)

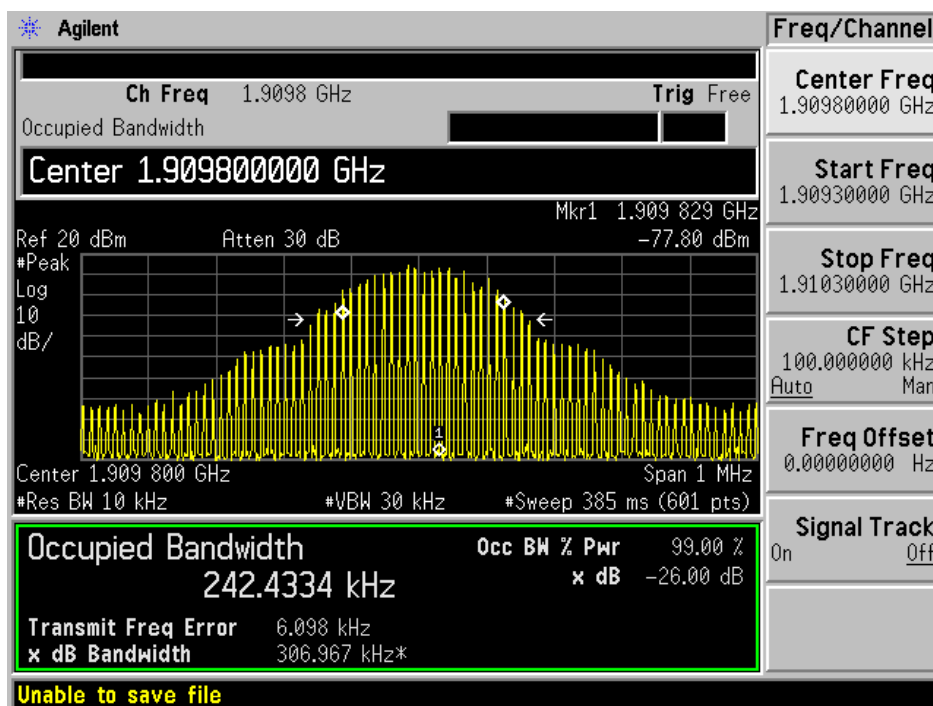

Band-Edge Emission Measurement PCS1900

Test Date: May 21, 2005
 Temp.: 20 °C ; Humi.: 58 %

1) Low Band-Edge Measurement

CH	Transmitting Frequency(MHz)	Band-Edge Frequency(MHz)	Band-Edge Level[dBc]	Data Page
512	1850.200	1850.000	-36.0	Page 6

2) High Band-Edge Measurement

CH	Transmitting Frequency(MHz)	Band-Edge Frequency(MHz)	Band-Edge Level[dBc]	Data Page
810	1909.800	1910.000	-42.0	Page 7


Note) The point shown on " _____ " is the Maximum Point.

Tester : Shigeru Kinoshita

Band-Edge Emission Measurement

Transmitting Frequency : 1850.200MHz (512 ch)

Band-Edge Frequency : 1850.000 MHz

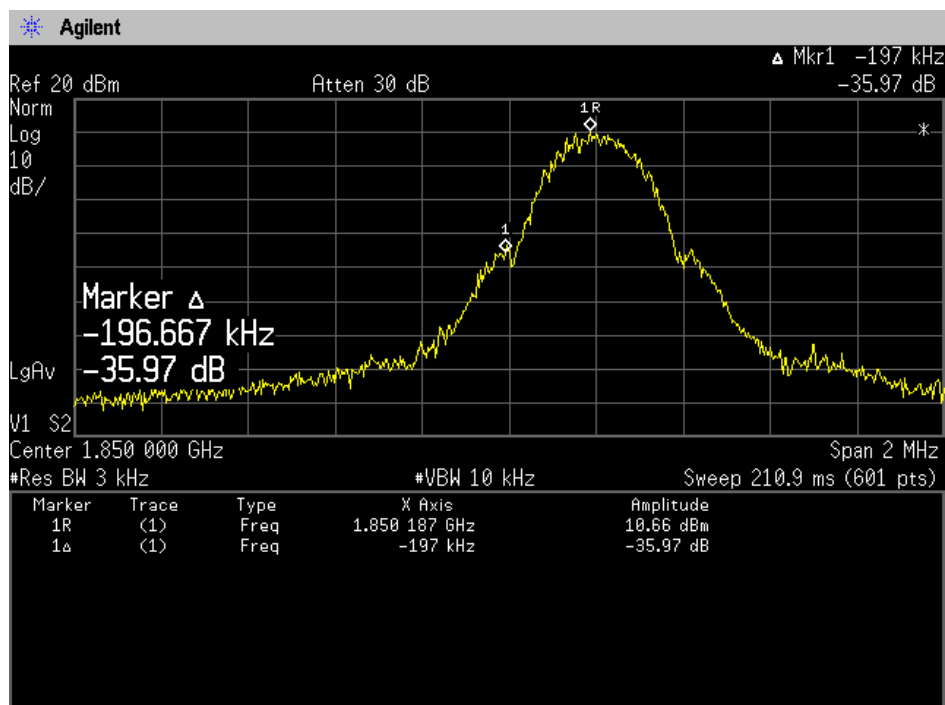

Band-Edge Emission Measurement

Transmitting Frequency : 1909.800MHz (810 ch)

Band-Edge Frequency : 1910.000 MHz

