



TEST REPORT

Product Name : Wireless Router

Model Number : WIC128

Embedded RF Module Number : WL531M

FCC ID : PBLWL531M

Applicant : Advance Multimedia Internet Technology Inc.

Address : NO. 32, Hwan-Gong Rd. Yung Kang City,
Tainan Hsien, Taiwan

Received Date : June 10, 2004

Tested Date : June 10 ~ August 20, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 2 of 60

Test Report Certification

Product Name : Wireless Router

Model Number : WIC128

Embedded RF Module Number : WL531M

FCC ID : PBLWL531M

Applicant : Advance Multimedia Internet Technology Inc.

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2003)
ANSI C63.4 (2001)

Tested By :

Chris Huang
(Chris Huang)

Date

August 20, 2004

Approved By :

Chieh-De Tsai
(Chieh-De Tsai, Manager)

Date

August 20, 2004



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 3 of 60

TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Peripherals	6
1.4 EUT & Peripherals Setup Diagram	6
1.5 EUT Operating Procedure	7
1.6 Description of Laboratory	8
1.7 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	9
2.1 Test Equipments	9
2.2 Test Setup	9
2.3 Conducted Power Line Emission Limit	10
2.4 Test Procedure	10
2.5 Uncertainty of Conducted Emission	10
2.6 Conducted RF Voltage Measurement	11-14
2.7 Photos of Conduction Test	15-16
3. RADIATED EMISSION TEST	17
3.1 Test Equipments	17
3.2 Test Setup	17
3.3 Radiation Limit	18
3.4 Test Procedures	19
3.5 Uncertainty of Radiated Emission	19
3.6 Radiated RF Noise Measurement	20-38
3.7 Photos of Open Site	39-41
4. 6dB BANDWIDTH MEASUREMENT	42
4.1 Test Equipments	42
4.2 Test Setup	42
4.3 Limits of 6dB Bandwidth Measurement	42
4.4 Test Procedure	42
4.5 Uncertainty of Conducted Emission	42
4.6 Test Results	43
4.7 Photo of 6db Bandwidth Measurement	44-46



TABLE OF CONTENTS

TITLE	PAGE NO.
5. MAXIMUM PEAK OUTPUT POWER	46
5.1 Test Equipments	46
5.2 Test Setup	46
5.3 Limits of Maximum Peak Output Power	46
5.4 Test Procedure	47
5.5 Uncertainty of Conducted Emission	47
5.6 Test Results	47
6. POWER SPECTRAL DENSITY MEASUREMENT	48
6.1 Test Equipments	48
6.2 Test Setup	48
6.3 Limits of Power Spectral Density Measurement	48
6.4 Test Procedure	49
6.5 Uncertainty of Conducted Emission	49
6.6 Test Results	49
6.7 Photo of Power Spectral Density Measurement	50-51
7. BAND EDGE MEASUREMENT	52
7.1 Test Equipments	52
7.2 Test Setup	52
7.3 Limits of Band Edge Emissions Measurement	52
7.4 Test Procedure	52
7.5 Uncertainty of Conducted Emission	52
7.6 Test Results	53
7.7 Photo of Band edge Measurement	54-57
8. ANTENNA REQUIREMENT	58
8.1 Standard Applicable	58
8.2 Antenna Connected Construction	58
9. RF EXPOSURE EVALUATION	59
9.1 Friis Formula	59
9.2 EUT Operating Condition	59
9.3 Test Result of RF Exposure Evaluationa	60
9.3.1 Antenna Gain	60
9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance	60

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 5 of 60

1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

Product Name	Wireless Router
Model Number	WIC128
Embedded RF Module Number	WL531M
Frequency Range	2400MHz to 2483.5MHz
Frequency Channel	2412MHz + 5×n (MHz), n=0, 1, 2,.....10
Channel Number	11
Channel Spacing	5MHz
Air Data Rate	54Mbps (802.11g Mode), 11Mbps(802.11b Mode)
Type of Modulation	802.11b : DSSS(CCK, DQPSK, DBPSK) 802.11g : OFDM(64QAM, 16AQM, QPSK, BPSK)
Frequency Selection	by software / firmware
EUT Description	2.4GHz (Direct Sequence Spread Spectrum and Orthogonal Frequency Division Multiplex) Data Transceiver for WLAN application. The EUT with and without a metal shielding case are evaluated during the test. This test results are for EUT with a plastic case. The EUT with AC power module and DC power module are evaluated during the test. This test results are for EUT with AC power module.
Antenna Type	Soldered on PCB Dipole Antenna, Antenna Gain : 1.5dBi.
Power Source	5VDC or 9VAC (From Adapter)

Power Adapter :

No.	Manufacturer	Model No.	Input Power	Output Power
1	POTRANS	UWP01031050U	100-240VAC	5VDC, 2A
2	SINO-AMERICAN	A40915C	120VAC	9VAC, 1.2A



1.3 Description of Peripherals

(1) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202412
FCC : DOC

(2) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202415
FCC : DOC

(3) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : VECTRA VEI8DT
SERIAL NUMBER : SG1202416
FCC : DOC


(4) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y3EKSQZD1TJ
FCC : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(5) CABLE

	Type	Connector	shielded	Length
(A)	Cat5 twisted-pair	RJ-45, Plastic	NO	15m

1.4 EUT & Peripherals Setup Diagram

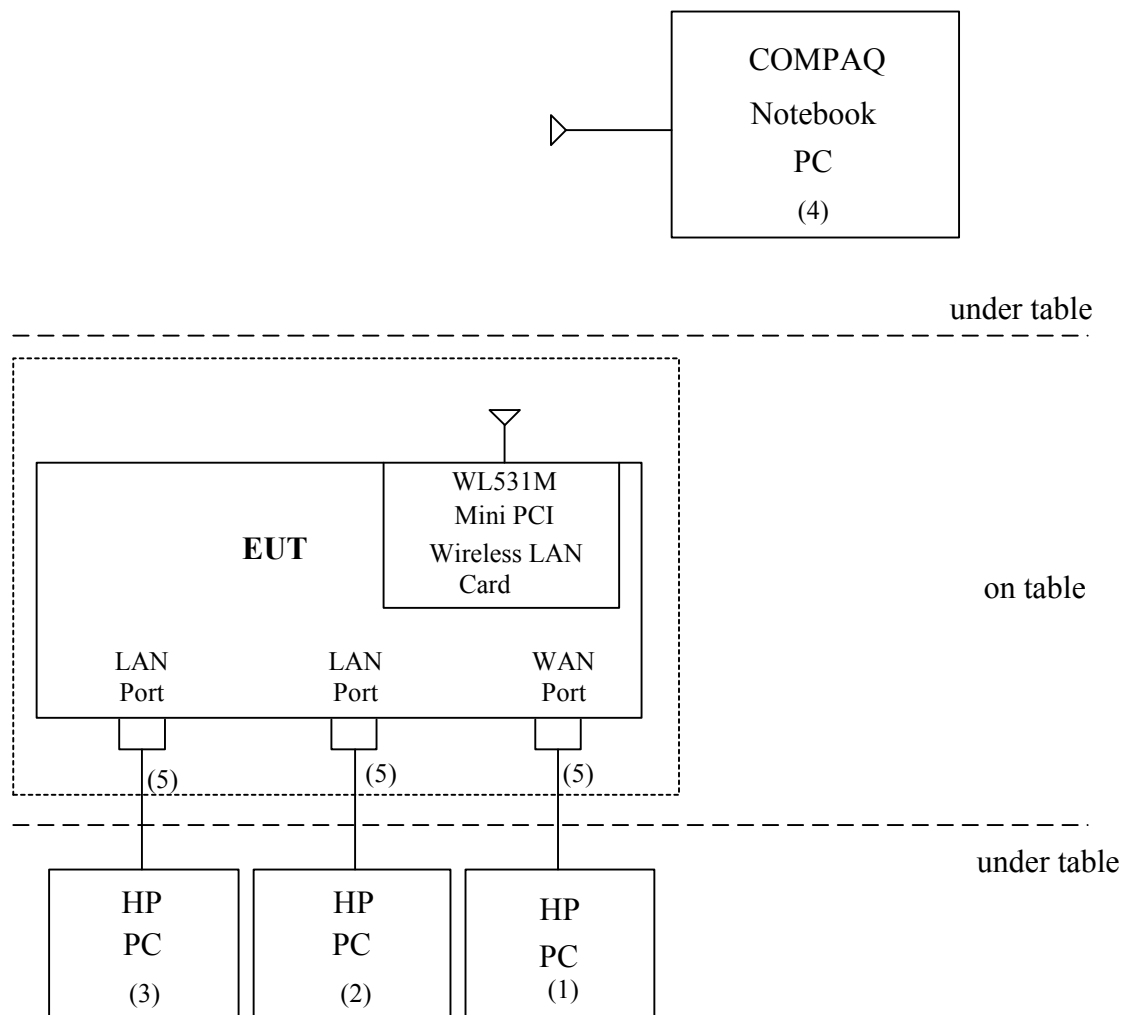

The indicated numbers (1)(2)....., please refer to item 1.3

1.5 EUT Operating Procedure

- (1) Set up all computers like the setup diagram.
- (2) Set PC (1) IP as 192.168.1.100
- (3) PC (2) ping 192.168.1.101 to PC (3).
- (4) PC (3) ping 192.168.1.100 to PC (1).
- PC (3) ping 192.168.1.102 to Notebook PC (4).
- (5) Notebook (4) ping 192.168.1.100 to PC (1).
- (6) All of the function are under run.
- (7) Start test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 8 of 60

1.6 Description of Laboratory

SITE DESCRIPTION

FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab Code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1189, C-1250
TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Ecom Sertech Corp. Hsin-Chu Lab.
(Spin-off from ITRI / ERSO on Apr. 01, 2003)
SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

1.7 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C

Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : Sec 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit:20dB less than peak value of fundamental frequency Restricted band Limit:Table 15.209	PASS	Meet the requirement of limit



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 9 of 60


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8594E	3801A05627	April 26, 2004	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance May 18, 2004 For Insertion loss	1 Year	FINAL
R & S TEST RECEIVER	ESHS 30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2004	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2004	1 Year	FINAL

2.2 Test Setup

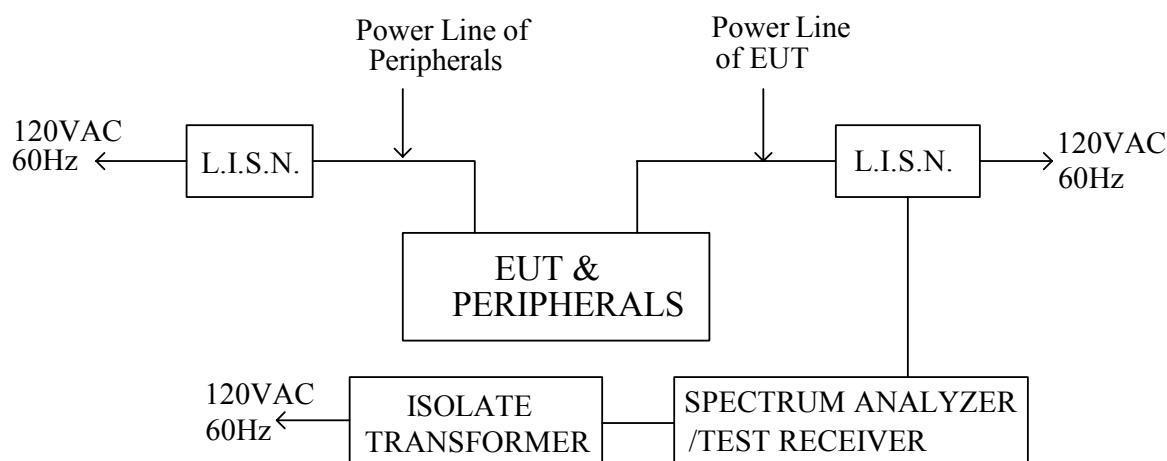

2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission


The uncertainty of conducted emission is ± 1.36 dB.

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/14
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25°C, 60%

LINE

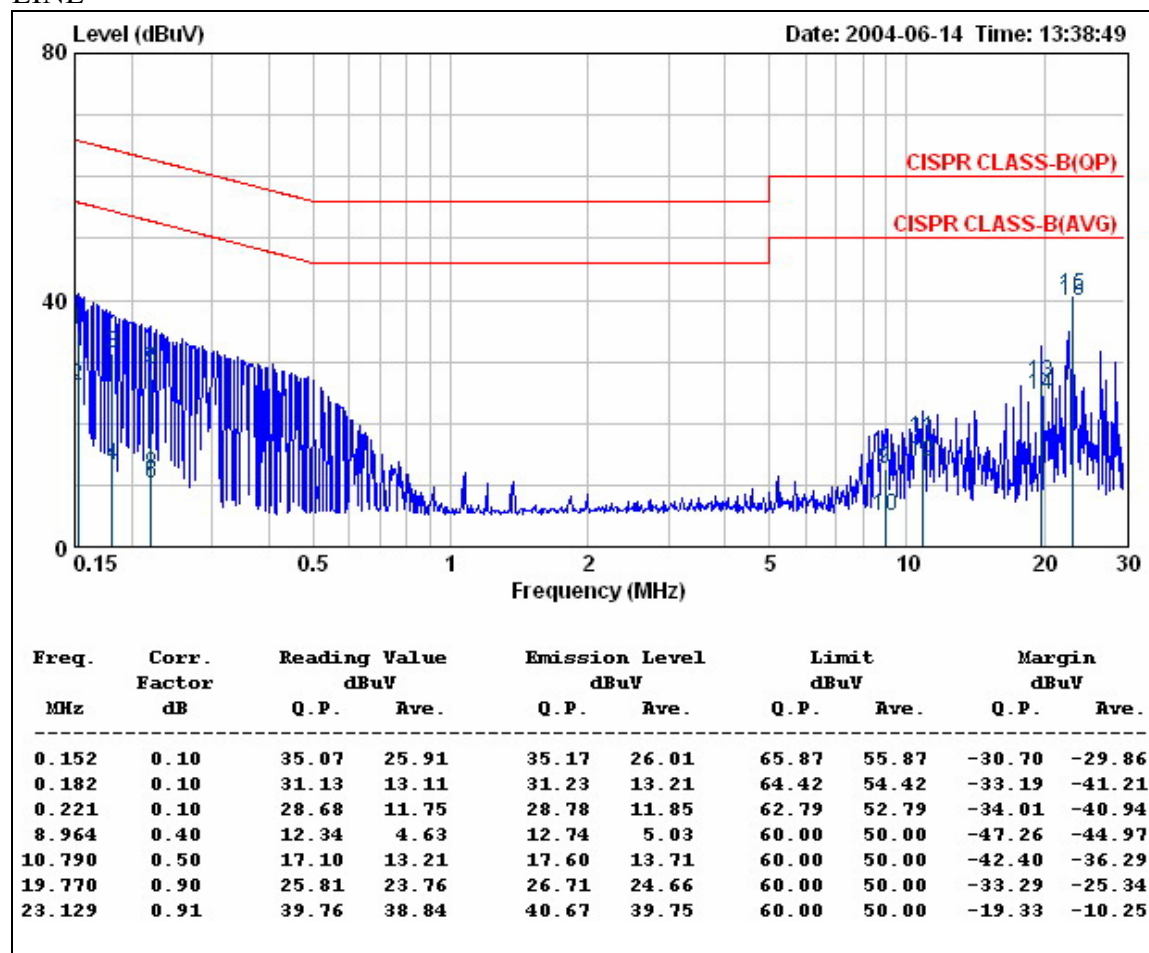

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For Adapter (1)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 12 of 60

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/14
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25°C, 60%

NEUTRAL

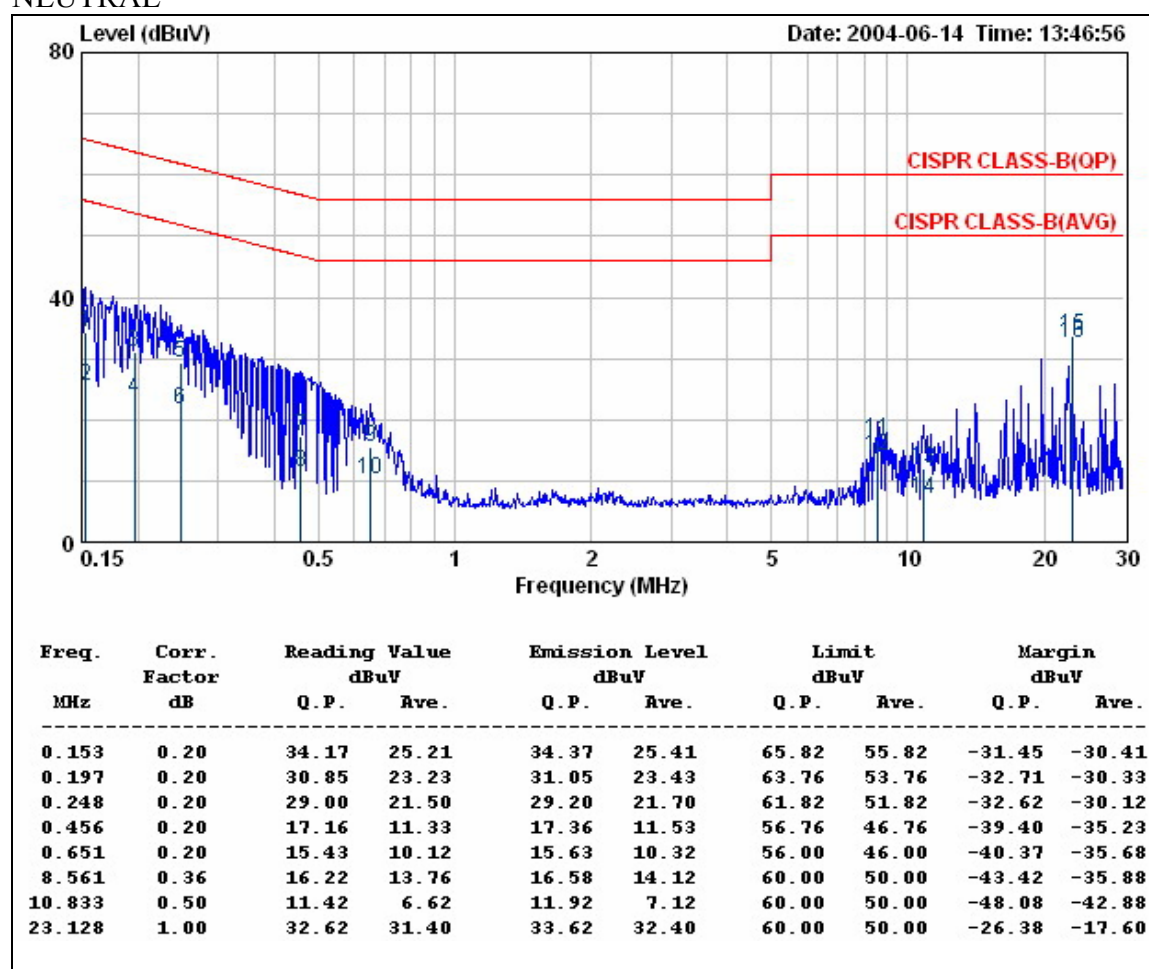

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value
3. For Adapter (1)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 13 of 60

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/08/20
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25°C, 60%

LINE

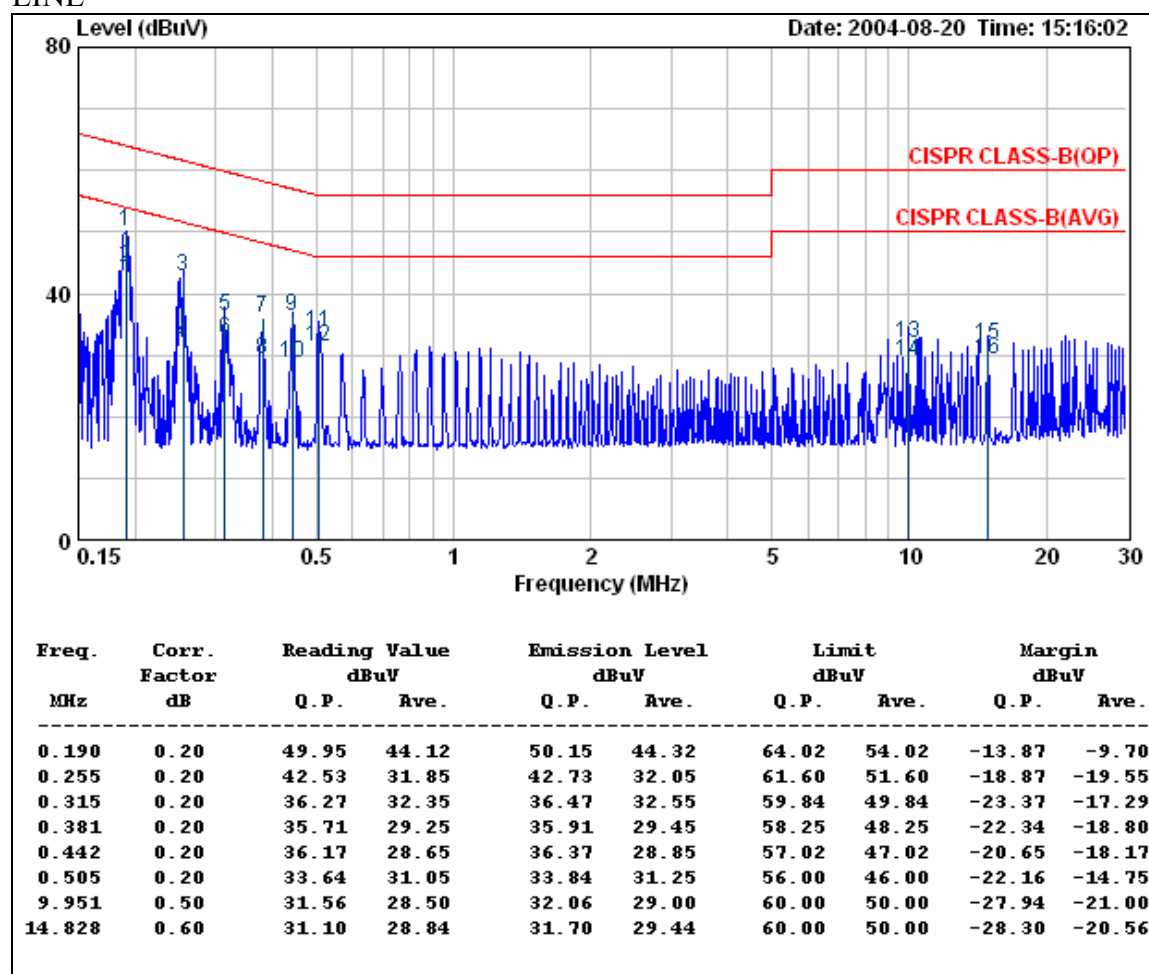

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value
3. For Adapter (2)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 14 of 60

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/08/20
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25°C, 60%

NEUTRAL

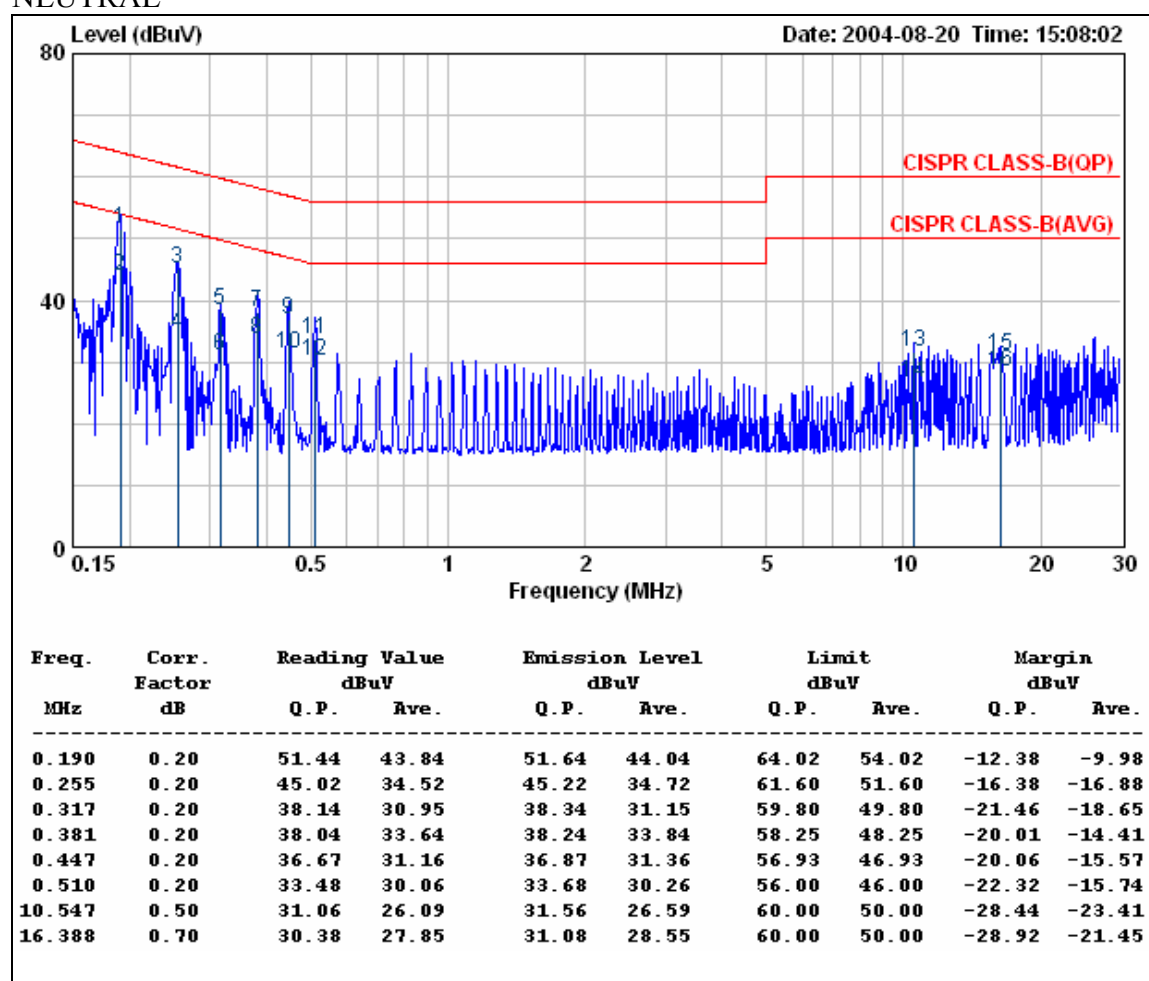

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value
3. For Adapter (2)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.

2.7 Photos of Conduction Test





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 16 of 60



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.


Manufacturer or Type	Model No	Serial No	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	May 07, 2004	1 Year	FINAL
R/S SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	July 13, 2004	1 Year	FINAL
Horn Antenna	AH-118	10089	February 25, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	October 11, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	CAL. ON USE	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL

3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

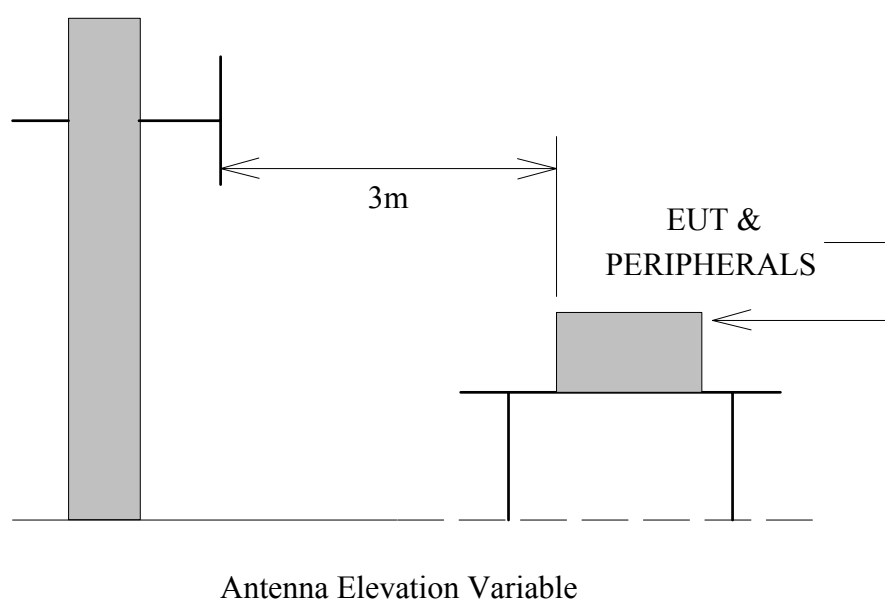

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

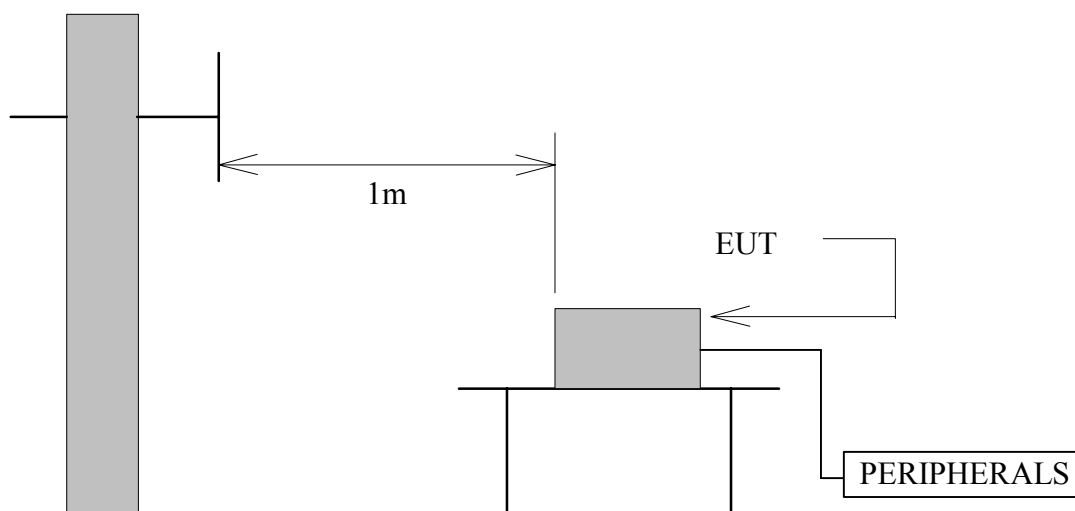

Antenna Elevation Variable

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/M)	Radiated (μ V/M)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(c), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radiofrequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.



3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is ± 2.72 dB.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 20 of 60

3.6 Radiated RF Noise Measurement

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/08/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	34.9°C, 40%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
239.99	12.55	3.12	10.50	21.00	46.00	26.17	36.67
249.99	13.09	3.20	20.50	18.10	46.00	36.79	34.39
299.98	13.50	3.60	19.20	17.30	46.00	36.30	34.40
374.99	16.31	4.05	10.20	10.80	46.00	30.56	31.16
399.98	17.24	4.20	16.30	11.70	46.00	37.74	33.14
599.97	19.54	5.40	10.60	10.80	46.00	35.54	35.74
799.99	20.53	6.40	7.00	10.30	46.00	33.93	37.23
899.99	21.04	6.60	7.40	10.10	46.00	35.04	37.74
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS :

1. * Undetectable
2. Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 21 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH1 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2037.95	51.02	32.16	3.42	35.30	9.50	0.00	41.80	74	-32.20	P	1.0
2037.95	46.68	32.16	3.42	35.30	9.50	0.00	37.46	54	-16.54	A	1.0
4076.00	49.25	32.55	4.84	34.90	9.50	0.00	42.25	74	-31.75	P	1.0
4076.00	44.95	32.55	4.84	34.90	9.50	0.00	37.95	54	-16.05	A	1.0
8152.05	43.06	39.45	7.37	35.94	9.50	0.00	44.44	74	-29.56	P	1.0
8152.05	31.96	39.45	7.37	35.94	9.50	0.00	33.34	54	-20.66	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 22 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH1 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2037.91	51.82	32.16	3.42	35.30	9.50	0.00	42.60	74	-31.40	P	1.0
2037.91	48.57	32.16	3.42	35.30	9.50	0.00	39.35	54	-14.65	A	1.0
4075.93	48.32	32.55	4.84	34.90	9.50	0.00	41.32	74	-32.68	P	1.0
4075.93	43.00	32.55	4.84	34.90	9.50	0.00	36.00	54	-18.00	A	1.0
8152.02	44.61	39.45	7.37	35.94	9.50	0.00	45.98	74	-28.02	P	1.0
8152.02	32.58	39.45	7.37	35.94	9.50	0.00	33.95	54	-20.05	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 23 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH6 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2062.97	51.36	32.14	3.43	35.30	9.50	0.00	42.12	74	-31.88	P	1.0
2062.97	47.25	32.14	3.43	35.30	9.50	0.00	38.01	54	-15.99	A	1.0
4125.91	50.02	32.52	4.86	34.90	9.50	0.00	43.00	74	-31.00	P	1.0
4125.91	46.07	32.52	4.86	34.90	9.50	0.00	39.05	54	-14.95	A	1.0
8252.20	44.71	39.35	7.45	35.18	9.50	0.00	46.83	74	-27.17	P	1.0
8252.20	32.16	39.35	7.45	35.18	9.50	0.00	34.28	54	-19.72	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 24 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH6 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2062.93	51.42	32.14	3.43	35.30	9.50	0.00	42.18	74	-31.82	P	1.0
2062.93	47.24	32.14	3.43	35.30	9.50	0.00	38.00	54	-16.00	A	1.0
4125.96	48.60	32.52	4.86	34.90	9.50	0.00	41.58	74	-32.42	P	1.0
4125.96	43.76	32.52	4.86	34.90	9.50	0.00	36.74	54	-17.26	A	1.0
8252.00	45.02	39.35	7.45	35.18	9.50	0.00	47.13	74	-26.87	P	1.0
8252.00	34.11	39.35	7.45	35.18	9.50	0.00	36.22	54	-17.78	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 25 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH11 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2087.98	51.30	32.11	3.44	35.30	9.50	0.00	42.05	74	-31.95	P	1.0
2087.98	47.90	32.11	3.44	35.30	9.50	0.00	38.65	54	-15.35	A	1.0
4175.93	50.71	32.49	4.88	34.90	9.50	0.00	43.68	74	-30.32	P	1.0
4175.93	45.71	32.49	4.88	34.90	9.50	0.00	38.68	54	-15.32	A	1.0
8352.04	44.38	39.25	7.53	34.42	9.50	0.00	47.24	74	-26.76	P	1.0
8352.04	31.68	39.25	7.53	34.42	9.50	0.00	34.54	54	-19.46	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 26 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH11 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2087.93	52.25	32.11	3.44	35.30	9.50	0.00	43.00	74	-31.00	P	1.0
2087.93	48.33	32.11	3.44	35.30	9.50	0.00	39.08	54	-14.92	A	1.0
4175.89	50.14	32.49	4.88	34.90	9.50	0.00	43.11	74	-30.89	P	1.0
4175.89	45.93	32.49	4.88	34.90	9.50	0.00	38.90	54	-15.10	A	1.0
8352.06	44.29	39.25	7.53	34.42	9.50	0.00	47.15	74	-26.85	P	1.0
8352.06	33.67	39.25	7.53	34.42	9.50	0.00	36.53	54	-17.47	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 27 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.17	27.72	31.81	3.57	0.00	9.50	0.00	53.60	74	-20.40	P	1.00
* 2389.17	15.41	31.81	3.57	0.00	9.50	0.00	41.29	54	-12.71	A	1.00
2410.97	69.13	31.79	3.58	0.00	9.50	0.00	95.00	Fundamental Frequency		P	1.00
2410.97	66.17	31.79	3.58	0.00	9.50	0.00	92.04			A	1.00
* 2786.05	47.27	31.70	3.75	35.64	9.50	0.00	37.57	74	-36.43	P	1.00
* 2786.05	36.88	31.70	3.75	35.64	9.50	0.00	27.18	54	-26.82	A	1.00
* 4823.86	45.68	34.44	5.08	35.16	9.50	2.00	42.55	74	-31.45	P	1.00
* 4823.86	34.52	34.44	5.08	35.16	9.50	2.00	31.39	54	-22.61	A	1.00
7236.00	46.37	39.81	6.74	35.65	9.50	2.00	49.76	74	-24.24	P	1.00
7236.00	35.28	39.81	6.74	35.65	9.50	2.00	38.67	54	-15.33	A	1.00
9648.00	44.57	38.54	8.29	36.44	9.50	0.61	46.07	74	-27.93	P	1.00
9648.00	34.01	38.54	8.29	36.44	9.50	0.61	35.51	54	-18.49	A	1.00
* 12054.85	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14465.82	-----	-----	-----	-----	9.50	0.66	-----	-----	-----	-----	1.00
16876.79	-----	-----	-----	-----	9.50	0.43	-----	-----	-----	-----	1.00
* 19287.76	-----	-----	-----	-----	9.50	1.95	-----	-----	-----	-----	1.00
21698.73	-----	-----	-----	-----	9.50	0.82	-----	-----	-----	-----	1.00
24109.70	-----	-----	-----	-----	9.50	2.92	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 28 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	24.02	31.81	3.57	0.00	9.50	0.00	49.90	74	-24.10	P	1.00
* 2389.90	12.43	31.81	3.57	0.00	9.50	0.00	38.31	54	-15.69	A	1.00
2412.83	75.82	31.79	3.58	0.00	9.50	0.00	101.69	Fundamental Frequency		P	1.00
2412.83	72.29	31.79	3.58	0.00	9.50	0.00	98.16			A	1.00
* 2786.00	59.51	31.70	3.75	35.64	9.50	0.00	49.81	74	-24.19	P	1.00
* 2786.00	57.46	31.70	3.75	35.64	9.50	0.00	47.76	54	-6.24	A	1.00
* 4823.82	53.01	34.44	5.08	35.16	9.50	2.00	49.88	74	-24.12	P	1.00
* 4823.82	49.66	34.44	5.08	35.16	9.50	2.00	46.53	54	-7.47	A	1.00
7236.00	45.34	39.81	6.74	35.65	9.50	2.00	48.73	74	-25.27	P	1.00
7236.00	33.49	39.81	6.74	35.65	9.50	2.00	36.88	54	-17.12	A	1.00
9648.01	45.78	38.54	8.29	36.44	9.50	0.61	47.28	74	-26.72	P	1.00
9648.01	32.58	38.54	8.29	36.44	9.50	0.61	34.08	54	-19.92	A	1.00
* 12064.15	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14476.98	-----	-----	-----	-----	9.50	0.67	-----	-----	-----	-----	1.00
16889.81	-----	-----	-----	-----	9.50	0.43	-----	-----	-----	-----	1.00
* 19302.64	-----	-----	-----	-----	9.50	1.96	-----	-----	-----	-----	1.00
21715.47	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24128.30	-----	-----	-----	-----	9.50	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 29 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2434.49	70.18	31.77	3.59	0.00	9.50	0.00	96.04	Fundamental Frequency		P	1.00
2434.49	67.40	31.77	3.59	0.00	9.50	0.00	93.26			A	1.00
* 2811.00	47.28	31.70	3.76	35.67	9.50	0.00	37.56	74	-36.44	P	1.00
* 2811.00	36.82	31.70	3.76	35.67	9.50	0.00	27.10	54	-26.90	A	1.00
* 4873.87	50.14	34.77	5.10	35.20	9.50	1.80	47.11	74	-26.89	P	1.00
* 4873.87	45.04	34.77	5.10	35.20	9.50	1.80	42.01	54	-11.99	A	1.00
* 7311.05	45.83	39.78	6.79	35.64	9.50	2.00	49.26	74	-24.74	P	1.00
* 7311.05	35.48	39.78	6.79	35.64	9.50	2.00	38.91	54	-15.09	A	1.00
9747.89	45.38	38.53	8.33	36.60	9.50	0.55	46.69	74	-27.31	P	1.00
9747.89	33.57	38.53	8.33	36.60	9.50	0.55	34.88	54	-19.12	A	1.00
* 12172.45	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14606.94	-----	-----	-----	-----	9.50	0.61	-----	-----	-----	-----	1.00
17041.43	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
* 19475.92	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21910.41	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24344.90	-----	-----	-----	-----	9.50	2.55	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 30 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2434.33	76.57	31.77	3.59	0.00	9.50	0.00	102.43	Fundamental Frequency		P	1.00
2434.33	72.86	31.77	3.59	0.00	9.50	0.00	98.72			A	1.00
* 2810.90	55.98	31.70	3.76	35.67	9.50	0.00	46.26	74	-27.74	P	1.00
* 2810.90	53.55	31.70	3.76	35.67	9.50	0.00	43.83	54	-10.17	A	1.00
* 4873.85	55.07	34.77	5.10	35.20	9.50	1.80	52.04	74	-21.96	P	1.00
* 4873.85	52.15	34.77	5.10	35.20	9.50	1.80	49.12	54	-4.88	A	1.00
* 7311.05	45.67	39.78	6.79	35.64	9.50	2.00	49.10	74	-24.90	P	1.00
* 7311.05	35.14	39.78	6.79	35.64	9.50	2.00	38.57	54	-15.43	A	1.00
9748.06	45.87	38.53	8.33	36.60	9.50	0.55	47.18	74	-26.82	P	1.00
9748.06	34.02	38.53	8.33	36.60	9.50	0.55	35.33	54	-18.67	A	1.00
* 12171.65	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14605.98	-----	-----	-----	-----	9.50	0.62	-----	-----	-----	-----	1.00
17040.31	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
* 19474.64	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21908.97	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24343.30	-----	-----	-----	-----	9.50	2.55	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 31 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2462.88	63.91	31.74	3.60	0.00	9.50	0.00	89.75	Fundamental Frequency		P	1.00
2462.88	59.97	31.74	3.60	0.00	9.50	0.00	85.81			A	1.00
* 2483.60	21.99	31.72	3.61	0.00	9.50	0.00	47.82	74	-26.18	P	1.00
* 2483.60	10.99	31.72	3.61	0.00	9.50	0.00	36.82	54	-17.18	A	1.00
* 2835.91	50.40	31.70	3.77	35.70	9.50	0.00	40.66	74	-33.34	P	1.00
* 2835.91	45.72	31.70	3.77	35.70	9.50	0.00	35.98	54	-18.02	A	1.00
* 4923.83	47.96	35.10	5.12	35.24	9.50	1.60	45.04	74	-28.96	P	1.00
* 4923.83	39.55	35.10	5.12	35.24	9.50	1.60	36.63	54	-17.37	A	1.00
* 7385.69	45.77	39.75	6.84	35.62	9.50	2.00	49.24	74	-24.76	P	1.00
* 7385.69	35.02	39.75	6.84	35.62	9.50	2.00	38.49	54	-15.51	A	1.00
9847.55	46.32	38.52	8.37	36.76	9.50	0.49	47.44	74	-26.56	P	1.00
9847.55	34.21	38.52	8.37	36.76	9.50	0.49	35.33	54	-18.67	A	1.00
* 12314.40	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14777.28	-----	-----	-----	-----	9.50	0.48	-----	-----	-----	-----	1.00
17240.16	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19703.04	-----	-----	-----	-----	9.50	2.40	-----	-----	-----	-----	1.00
* 22165.92	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24628.80	-----	-----	-----	-----	9.50	2.12	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 32 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/07/12
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2459.33	76.18	31.74	3.60	0.00	9.50	0.00	102.02	Fundamental Frequency		P	1.00
2459.33	72.39	31.74	3.60	0.00	9.50	0.00	98.23			A	1.00
* 2483.60	24.12	31.72	3.61	0.00	9.50	0.00	49.95	74	-24.05	P	1.00
* 2483.60	12.84	31.72	3.61	0.00	9.50	0.00	38.67	54	-15.33	A	1.00
* 2835.88	56.97	31.70	3.77	35.70	9.50	0.00	47.23	74	-26.77	P	1.00
* 2835.88	54.82	31.70	3.77	35.70	9.50	0.00	45.08	54	-8.92	A	1.00
* 4923.79	54.05	35.10	5.12	35.24	9.50	1.60	51.13	74	-22.87	P	1.00
* 4923.79	50.52	35.10	5.12	35.24	9.50	1.60	47.60	54	-6.40	A	1.00
* 7388.92	45.21	39.74	6.84	35.62	9.50	2.00	48.68	74	-25.32	P	1.00
* 7388.92	35.12	39.74	6.84	35.62	9.50	2.00	38.59	54	-15.41	A	1.00
9847.85	44.96	38.52	8.37	36.76	9.50	0.49	46.08	74	-27.92	P	1.00
9847.85	33.78	38.52	8.37	36.76	9.50	0.49	34.90	54	-19.10	A	1.00
* 12296.65	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14755.98	-----	-----	-----	-----	9.50	0.50	-----	-----	-----	-----	1.00
17215.31	-----	-----	-----	-----	9.50	0.59	-----	-----	-----	-----	1.00
* 19674.64	-----	-----	-----	-----	9.50	2.37	-----	-----	-----	-----	1.00
* 22133.97	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24593.30	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 33 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/15
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.89	28.04	31.81	3.57	0.00	9.50	0.00	53.92	74	-20.08	P	1.00
* 2389.89	15.41	31.81	3.57	0.00	9.50	0.00	41.29	54	-12.71	A	1.00
2413.79	68.88	31.79	3.58	0.00	9.50	0.00	94.75	Fundamental Frequency		P	1.00
2413.79	59.45	31.79	3.58	0.00	9.50	0.00	85.32			A	1.00
* 4823.23	45.15	34.43	5.08	35.16	9.50	2.01	42.02	74	-31.98	P	1.00
* 4823.23	34.04	34.43	5.08	35.16	9.50	2.01	30.91	54	-23.09	A	1.00
7235.66	44.93	39.81	6.74	35.65	9.50	2.00	48.32	74	-25.68	P	1.00
7235.66	34.06	39.81	6.74	35.65	9.50	2.00	37.45	54	-16.55	A	1.00
9648.18	45.37	38.54	8.29	36.44	9.50	0.61	46.87	74	-27.13	P	1.00
9648.18	34.20	38.54	8.29	36.44	9.50	0.61	35.70	54	-18.30	A	1.00
* 12068.95	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14482.74	-----	-----	-----	-----	9.50	0.68	-----	-----	-----	-----	1.00
16896.53	-----	-----	-----	-----	9.50	0.44	-----	-----	-----	-----	1.00
* 19310.32	-----	-----	-----	-----	9.50	1.97	-----	-----	-----	-----	1.00
21724.11	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24137.90	-----	-----	-----	-----	9.50	2.88	-----	-----	-----	-----	1.00
21724.11	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24137.90	-----	-----	-----	-----	9.50	2.88	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 34 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/15
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	24.45	31.81	3.57	0.00	9.50	0.00	50.33	74	-23.67	P	1.00
* 2389.90	12.71	31.81	3.57	0.00	9.50	0.00	38.59	54	-15.41	A	1.00
2412.83	75.25	31.79	3.58	0.00	9.50	0.00	101.12	Fundamental Frequency		P	1.00
2412.83	65.93	31.79	3.58	0.00	9.50	0.00	91.80			A	1.00
* 2786.30	50.13	31.70	3.75	35.64	9.50	0.00	40.43	74	-33.57	P	1.00
* 2786.30	38.06	31.70	3.75	35.64	9.50	0.00	28.36	54	-25.64	A	1.00
* 4823.55	45.25	34.44	5.08	35.16	9.50	2.01	42.12	74	-31.88	P	1.00
* 4823.55	33.05	34.44	5.08	35.16	9.50	2.01	29.92	54	-24.08	A	1.00
7235.70	44.56	39.81	6.74	35.65	9.50	2.00	47.95	74	-26.05	P	1.00
7235.70	32.32	39.81	6.74	35.65	9.50	2.00	35.71	54	-18.29	A	1.00
9647.85	44.91	38.54	8.29	36.44	9.50	0.61	46.41	74	-27.59	P	1.00
9647.85	32.95	38.54	8.29	36.44	9.50	0.61	34.45	54	-19.55	A	1.00
* 12064.15	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14476.98	-----	-----	-----	-----	9.50	0.67	-----	-----	-----	-----	1.00
16889.81	-----	-----	-----	-----	9.50	0.43	-----	-----	-----	-----	1.00
* 19302.64	-----	-----	-----	-----	9.50	1.96	-----	-----	-----	-----	1.00
21715.47	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24128.30	-----	-----	-----	-----	9.50	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 35 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/15
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2438.80	69.44	31.76	3.59	0.00	9.50	0.00	95.29	Fundamental Frequency		P	1.00
2438.80	60.30	31.76	3.59	0.00	9.50	0.00	86.15			A	1.00
* 4874.96	44.98	34.77	5.10	35.20	9.50	1.80	41.95	74	-32.05	P	1.00
* 4874.96	34.08	34.77	5.10	35.20	9.50	1.80	31.05	54	-22.95	A	1.00
* 7311.42	45.49	39.78	6.79	35.64	9.50	2.00	48.92	74	-25.08	P	1.00
* 7311.42	34.22	39.78	6.79	35.64	9.50	2.00	37.65	54	-16.35	A	1.00
9747.82	45.43	38.53	8.33	36.60	9.50	0.55	46.74	74	-27.26	P	1.00
9747.82	33.70	38.53	8.33	36.60	9.50	0.55	35.01	54	-18.99	A	1.00
* 12194.00	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14632.80	-----	-----	-----	-----	9.50	0.59	-----	-----	-----	-----	1.00
17071.60	-----	-----	-----	-----	9.50	0.53	-----	-----	-----	-----	1.00
* 19510.40	-----	-----	-----	-----	9.50	2.21	-----	-----	-----	-----	1.00
21949.20	-----	-----	-----	-----	9.50	0.72	-----	-----	-----	-----	1.00
24388.00	-----	-----	-----	-----	9.50	2.48	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 36 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/15
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2433.38	77.50	31.77	3.59	0.00	9.50	0.00	103.36	Fundamental Frequency		P	1.00
2433.38	67.15	31.77	3.59	0.00	9.50	0.00	93.01			A	1.00
* 2809.83	49.52	31.70	3.76	35.67	9.50	0.00	39.80	74	-34.20	P	74
* 2809.83	37.04	31.70	3.76	35.67	9.50	0.00	27.32	54	-26.68	A	54
* 4876.83	47.95	34.79	5.10	35.20	9.50	1.79	44.93	74	-29.07	P	74
* 4876.83	35.14	34.79	5.10	35.20	9.50	1.79	32.12	54	-21.88	A	54
* 7311.01	45.19	39.78	6.79	35.64	9.50	2.00	48.62	74	-25.38	P	74
* 7311.01	32.93	39.78	6.79	35.64	9.50	2.00	36.36	54	-17.64	A	54
9748.01	45.01	38.53	8.33	36.60	9.50	0.55	46.32	74	-27.68	P	74
9748.01	32.83	38.53	8.33	36.60	9.50	0.55	34.14	54	-19.86	A	54
* 12166.90	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	-----
14600.28	-----	-----	-----	-----	9.50	0.62	-----	-----	-----	-----	-----
17033.66	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	-----
* 19467.04	-----	-----	-----	-----	9.50	2.16	-----	-----	-----	-----	-----
21900.42	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	-----
24333.80	-----	-----	-----	-----	9.50	2.57	-----	-----	-----	-----	-----

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 37 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/15
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2463.85	69.42	31.74	3.60	0.00	9.50	0.00	95.26	Fundamental Frequency		P	1.00
2463.85	59.69	31.74	3.60	0.00	9.50	0.00	85.53			A	1.00
* 2483.87	27.43	31.72	3.61	0.00	9.50	0.00	53.26	74	-20.74	P	1.00
* 2483.87	15.41	31.72	3.61	0.00	9.50	0.00	41.24	54	-12.76	A	1.00
* 4924.11	45.67	35.10	5.12	35.24	9.50	1.60	42.75	74	-31.25	P	1.00
* 4924.11	34.52	35.10	5.12	35.24	9.50	1.60	31.60	54	-22.40	A	1.00
* 7385.85	45.37	39.75	6.84	35.62	9.50	2.00	48.84	74	-25.16	P	1.00
* 7385.85	34.09	39.75	6.84	35.62	9.50	2.00	37.56	54	-16.44	A	1.00
9847.61	45.34	38.52	8.37	36.76	9.50	0.49	46.46	74	-27.54	P	1.00
9847.61	34.33	38.52	8.37	36.76	9.50	0.49	35.45	54	-18.55	A	1.00
* 12319.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14783.10	-----	-----	-----	-----	9.50	0.47	-----	-----	-----	-----	1.00
17246.95	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19710.80	-----	-----	-----	-----	9.50	2.41	-----	-----	-----	-----	1.00
* 22174.65	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24638.50	-----	-----	-----	-----	9.50	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 38 of 60

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.



Company	Advance Multimedia Internet Technology Inc.	Test Date	2004/06/15
Product Name	Wireless Router	Test By	Chris Huang
Model Name	WIC128	TEMP & Humidity	25.9°C , 48%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2454.24	77.12	31.75	3.60	0.00	9.50	0.00	102.97	Fundamental Frequency		P	1.00
2454.24	67.60	31.75	3.60	0.00	9.50	0.00	93.45			A	1.00
* 2483.60	25.53	31.72	3.61	0.00	9.50	0.00	51.36	74	-22.64	P	1.00
* 2483.60	13.02	31.72	3.61	0.00	9.50	0.00	38.85	54	-15.15	A	1.00
* 2835.22	47.45	31.70	3.77	35.70	9.50	0.00	37.72	74	-36.28	P	1.00
* 2835.22	35.52	31.70	3.77	35.70	9.50	0.00	25.79	54	-28.21	A	1.00
* 4924.55	53.78	35.10	5.12	35.24	9.50	1.60	50.86	74	-23.14	P	1.00
* 4924.55	41.28	35.10	5.12	35.24	9.50	1.60	38.36	54	-15.64	A	1.00
* 7386.27	46.78	39.75	6.84	35.62	9.50	2.00	50.25	74	-23.75	P	1.00
* 7386.27	33.53	39.75	6.84	35.62	9.50	2.00	37.00	54	-17.00	A	1.00
9848.10	45.39	38.52	8.37	36.76	9.50	0.49	46.50	74	-27.50	P	1.00
9848.10	33.41	38.52	8.37	36.76	9.50	0.49	34.52	54	-19.48	A	1.00
* 12271.20	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14725.44	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
17179.68	-----	-----	-----	-----	9.50	0.57	-----	-----	-----	-----	1.00
* 19633.92	-----	-----	-----	-----	9.50	2.33	-----	-----	-----	-----	1.00
* 22088.16	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24542.40	-----	-----	-----	-----	9.50	2.24	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps.

3.7 Photos of Open Site

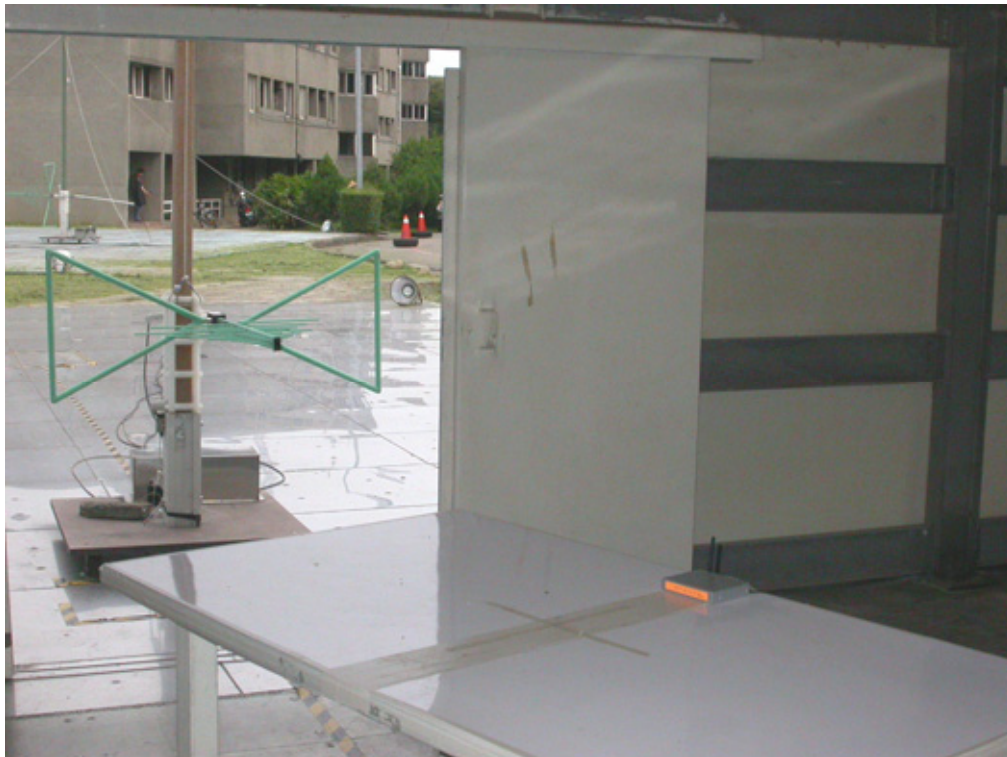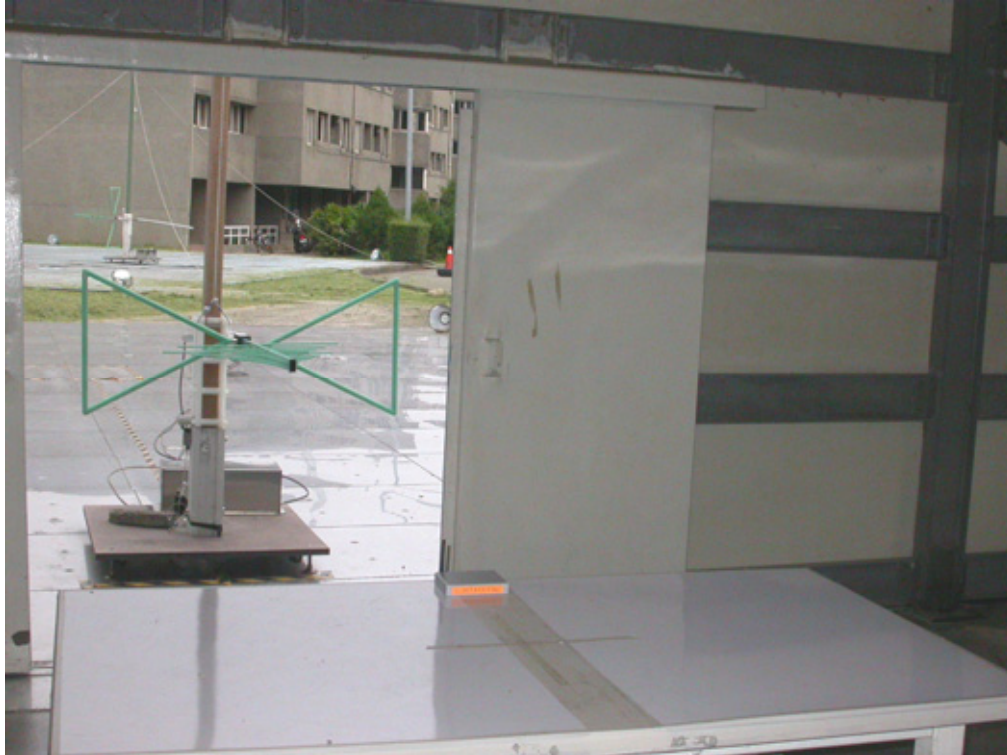





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 40 of 60

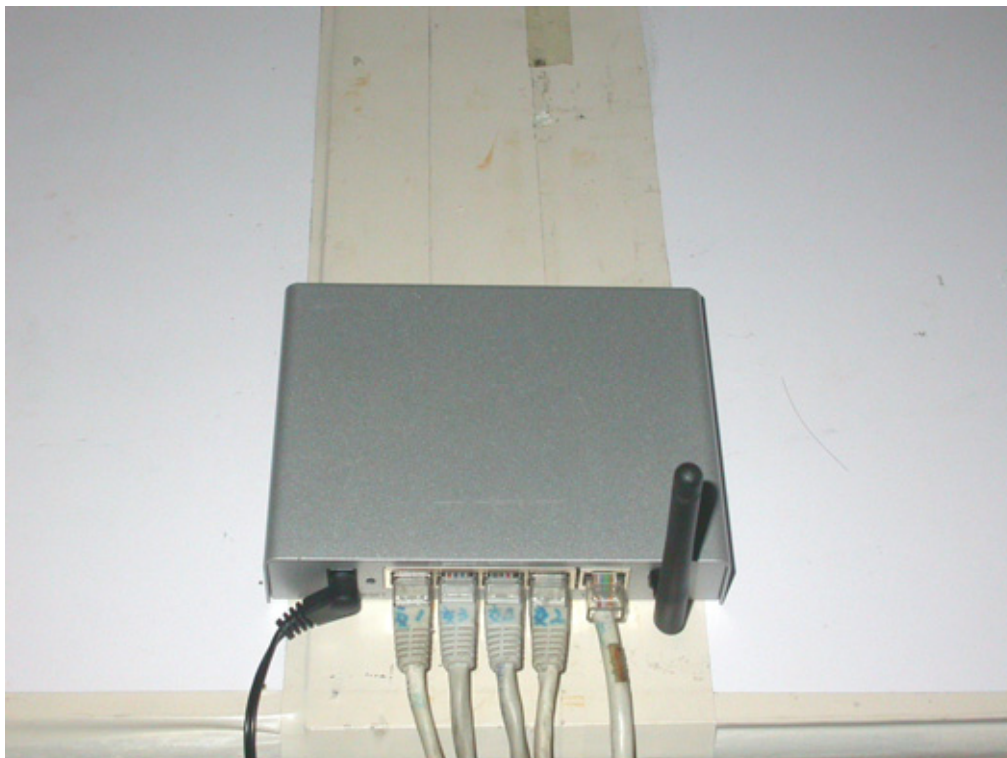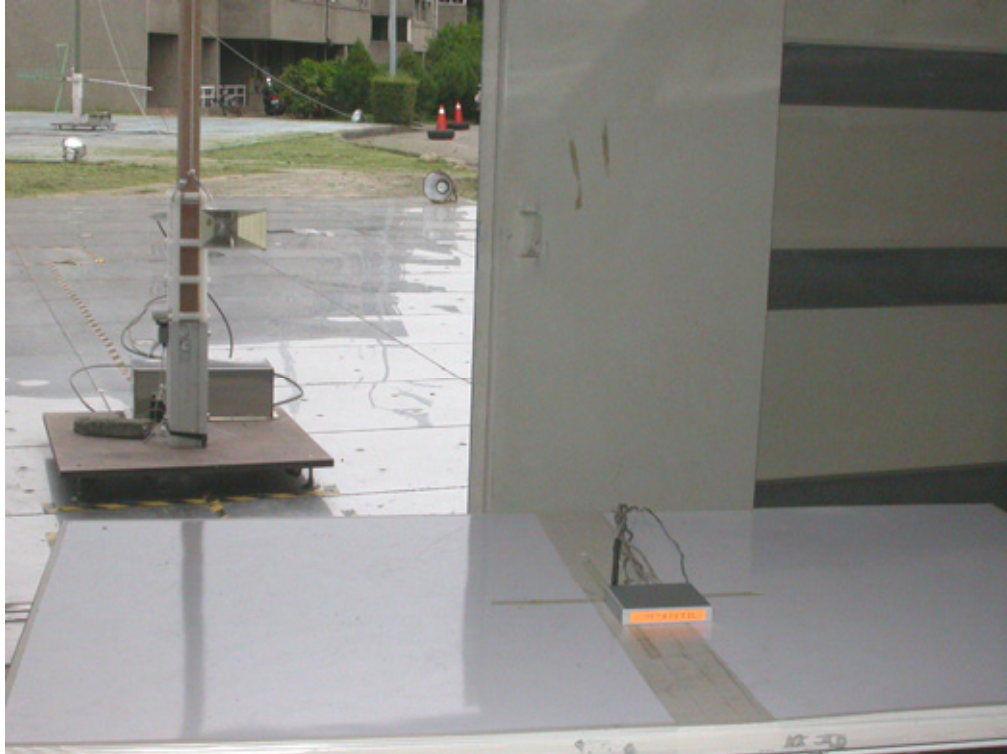




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 41 of 60

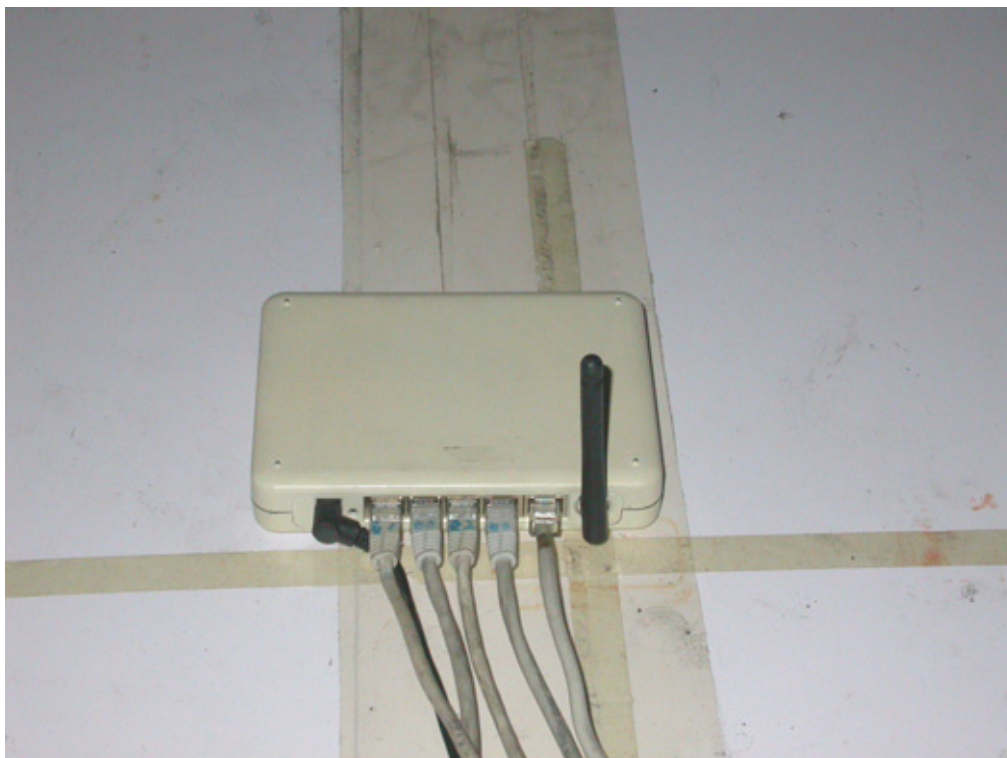



4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2003

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 10MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 200 KHz.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 43 of 60

4.6 Test Results

Input Power (System)	9VAC (From Adapter)	Environmental Conditions	16°C, 84%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	12.34	0.5	PASS
6	2437	12.58	0.5	PASS
11	2462	12.70	0.5	PASS

Note :

For 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.63	0.5	PASS
6	2437	16.59	0.5	PASS
11	2462	16.59	0.5	PASS

Note :

For 802.11g Mode



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 44 of 60


4.7 Photo of 6db Bandwidth Measurement

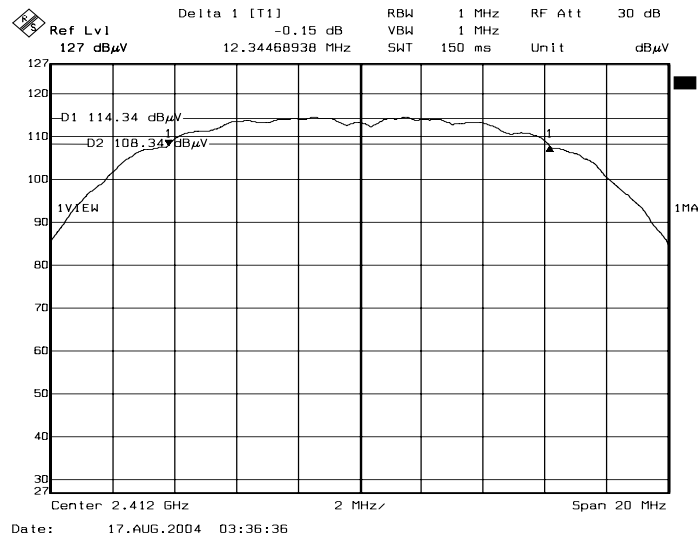

Channel 1

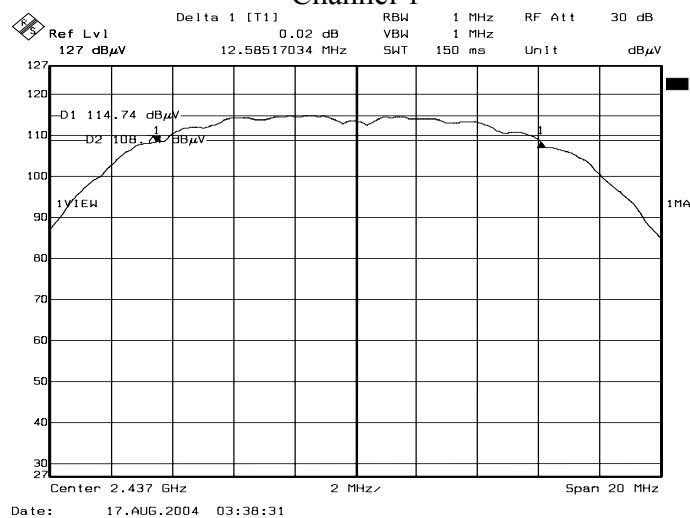

Channel 6

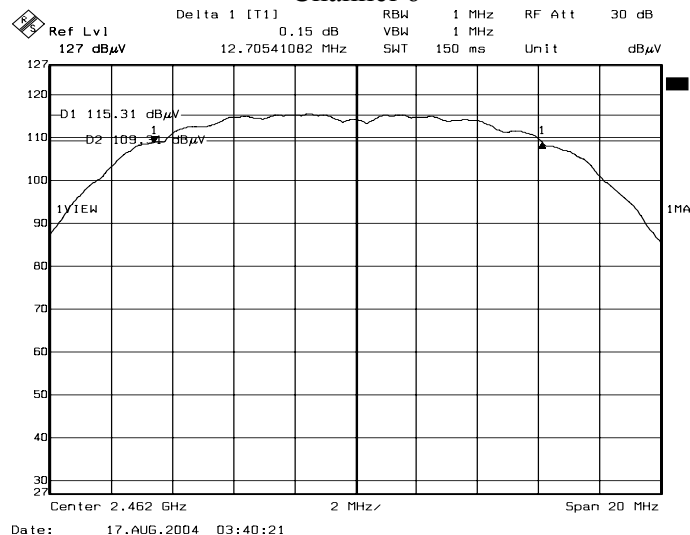

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : PBLWL531M

Report No. : ER04-06-031FRF


Page 45 of 60

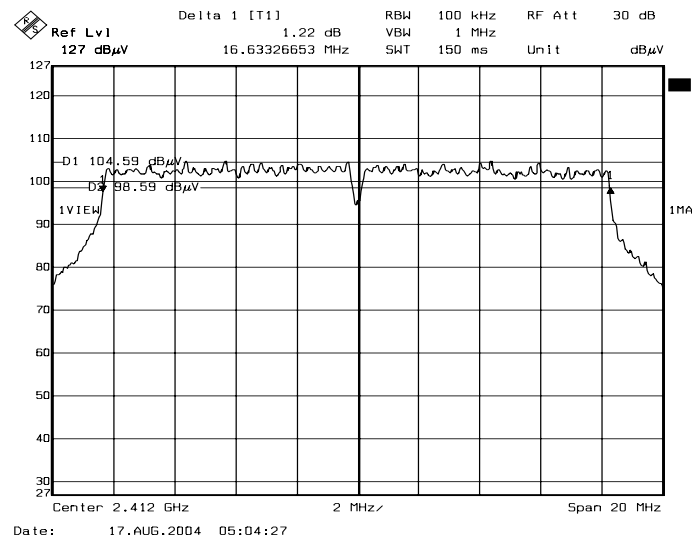

Channel 1

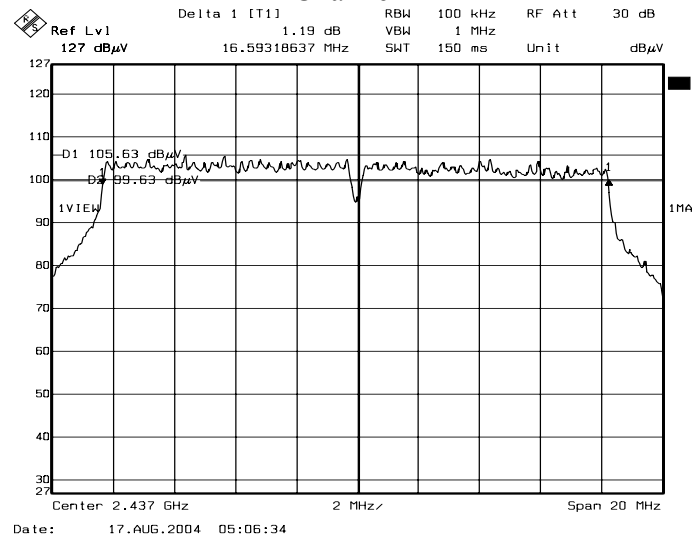

Channel 6

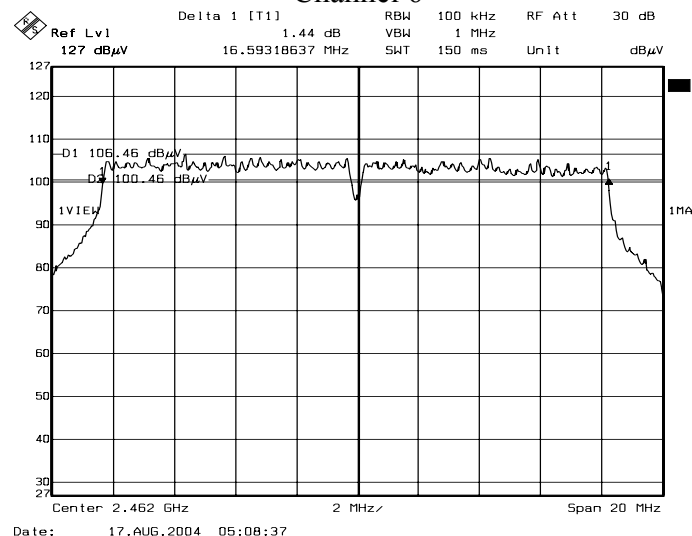

Channel 11

Note: For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 46 of 60

5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004
Agilent ATTENUATOR	8491B	57321	CAL. ON USE
GIGASTRONICS POWER METER	8542	1828329	September 19, 2003

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 47 of 60

5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 Test Results

Input Power (System)	9VAC (From Adapter)	Environmental Conditions	25.9°C, 48%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	13.02	15.45	30	PASS
6	2437	12.34	14.84	30	PASS
11	2462	11.53	14.08	30	PASS

Note :

1. For 802.11b mode.
2. At final test to get the worst-case emission at 11Mbps.
3. Cable loss = 0.5dB, Attenuator = 10dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	9.91	16.42	30	PASS
6	2437	9.39	15.07	30	PASS
11	2462	8.59	14.28	30	PASS

Note :

1. For 802.11g mode.
2. At final test to get the worst-case emission at 6Mbps.
3. Cable loss = 0.5dB, Attenuator = 10dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 48 of 60

6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 49 of 60

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Input Power (System)	9VAC (From Adapter)	Environmental Conditions	25.9°C, 48%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-16.26	8	PASS
6	2437	-15.89	8	PASS
11	2462	-15.43	8	PASS

Note :

For 11Mbps (802.11b mode) at final test to get the worst-case emission at 11Mbps.

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-16.47	8	PASS
6	2437	-16.34	8	PASS
11	2462	-15.45	8	PASS

Note :

For 54Mbps (802.11g mode) at final test to get the worst-case emission at 6Mbps.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 50 of 60


6.7 Photo of Power Spectral Density Measurement

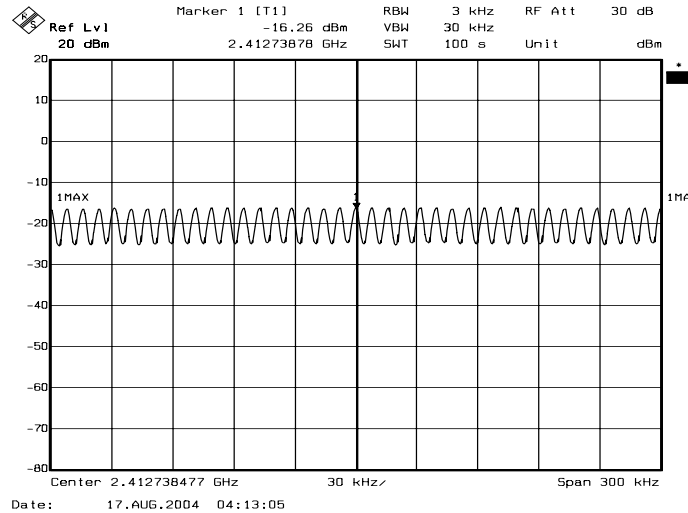

Channel 1

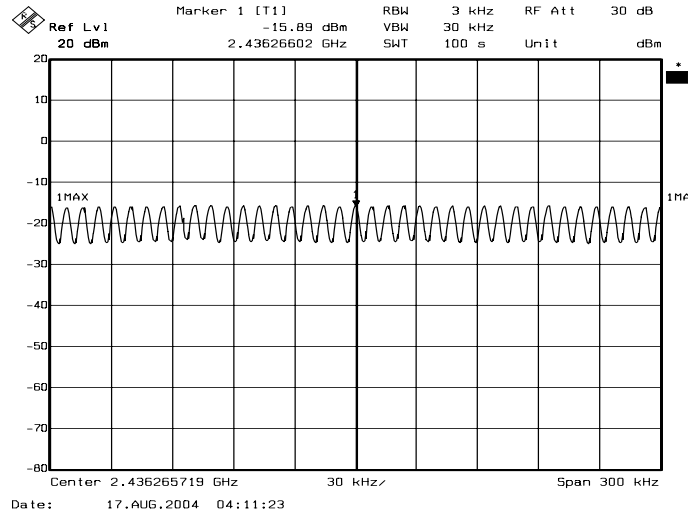

Channel 6

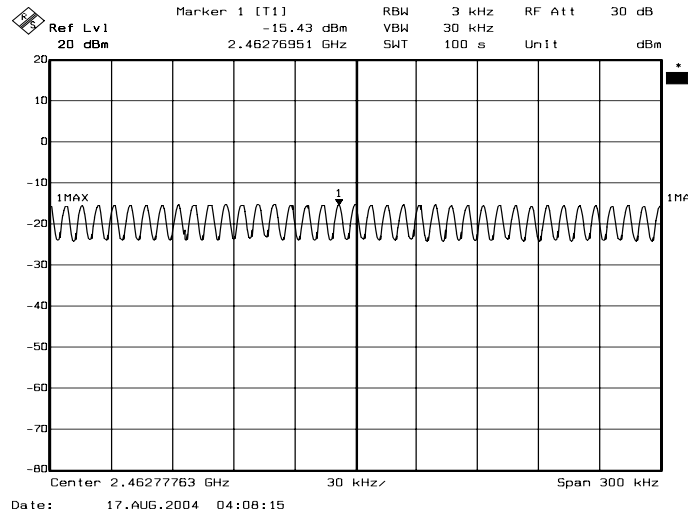

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : PBLWL531M

Report No. : ER04-06-031FRF


Page 51 of 60

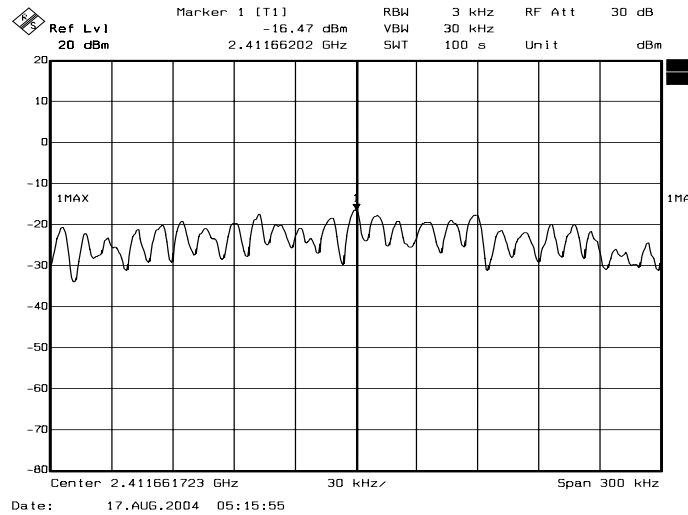

Channel 1

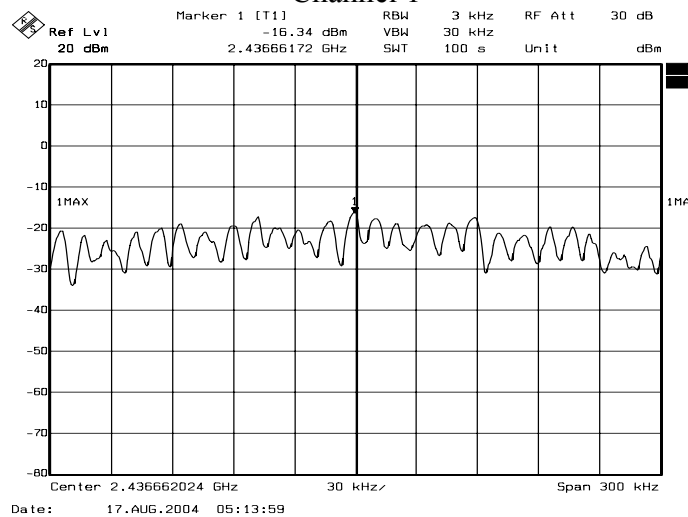

Channel 6

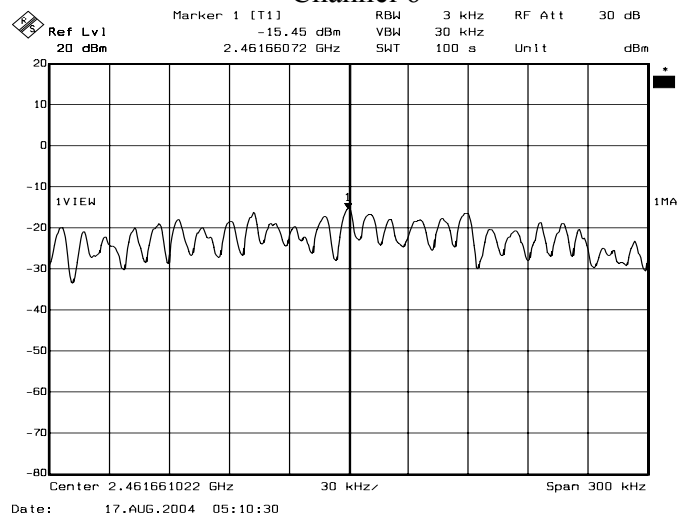

Channel 11

Note: For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 52 of 60

7. BAND EDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Band Edge Emissions Measurement

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including 100KHz bandwidth from band edge. The band edges were measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

Input Power (System)	9VAC (From Adapter)	Environmental Conditions	25.9°C, 48%RH
Tested By	Chris Huang		

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	55.54	56.55	75.00	81.69	PASS
	AV	45.38	50.63	72.04	78.16	
2483.50	PK	47.88	50.50	74.00	74.00	PASS
	AV	36.79	38.70	54.00	54.00	

For 802.11g mode


Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	57.92	59.30	74.75	81.12	PASS
	AV	44.22	47.35	65.32	71.80	
2483.50	PK	53.28	51.45	74.00	74.00	PASS
	AV	41.24	39.35	54.00	54.00	

Note :


Radiated band edge field strength is measured with measurement procedure ANSI C63.4-2001.

7.7 Photo of Band edge Measurement

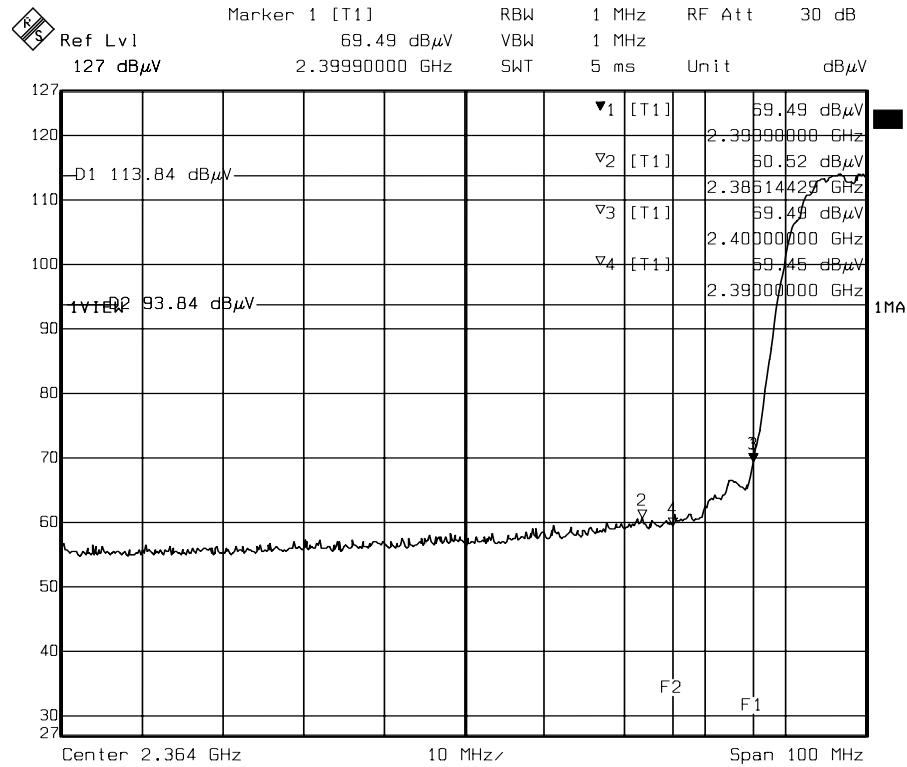

Date: 17.AUG.2004 04:17:27

Lower Band edge (Peak)

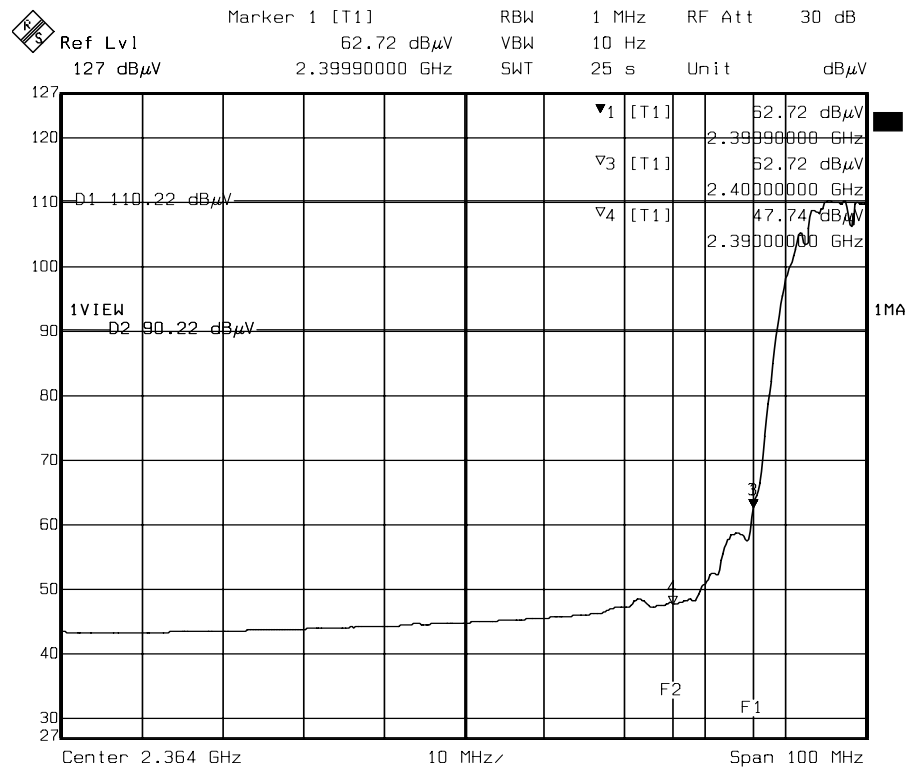

Date: 17.AUG.2004 04:21:01

Lower Band edge (Average)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 55 of 60

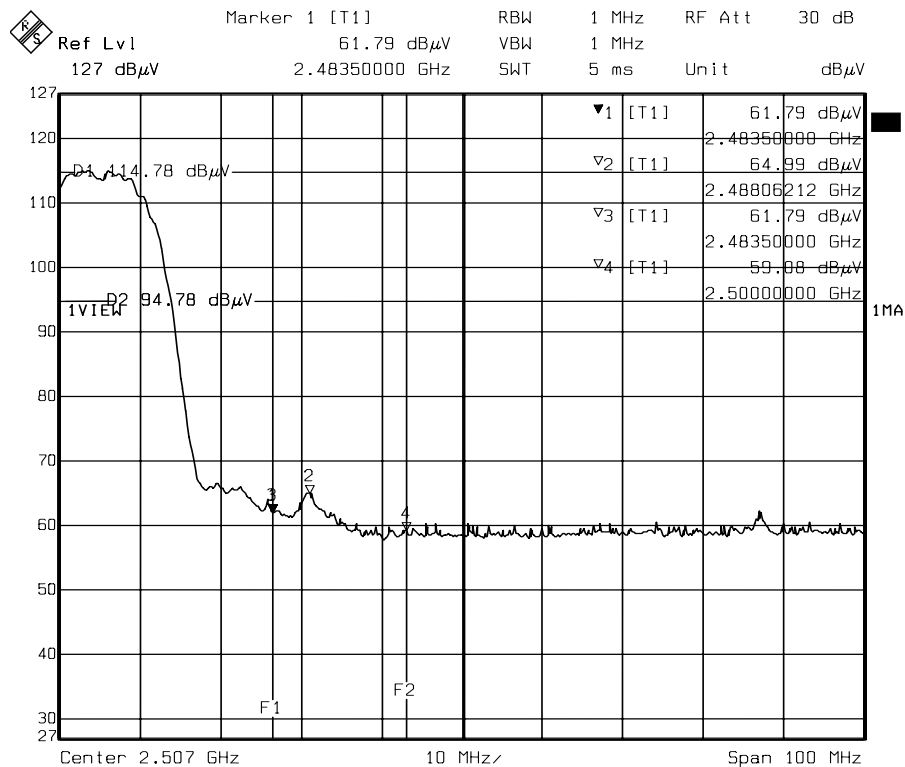

Date: 17.AUG.2004 04:26:38

Higher Band edge (Peak)

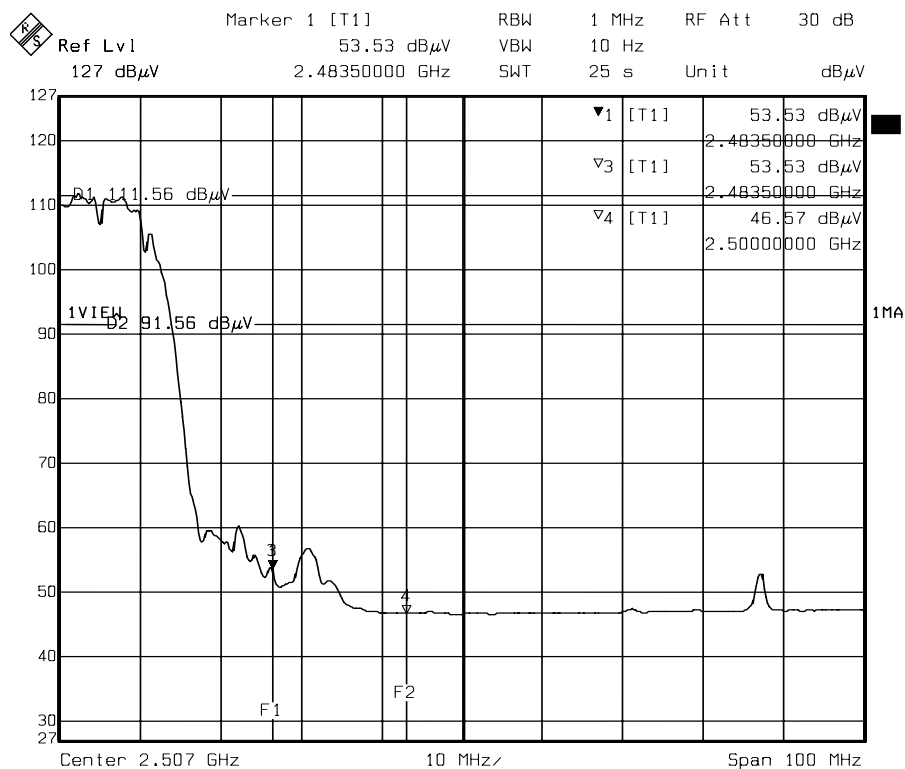

Date: 17.AUG.2004 04:23:35

Higher Band edge (Average)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 56 of 60

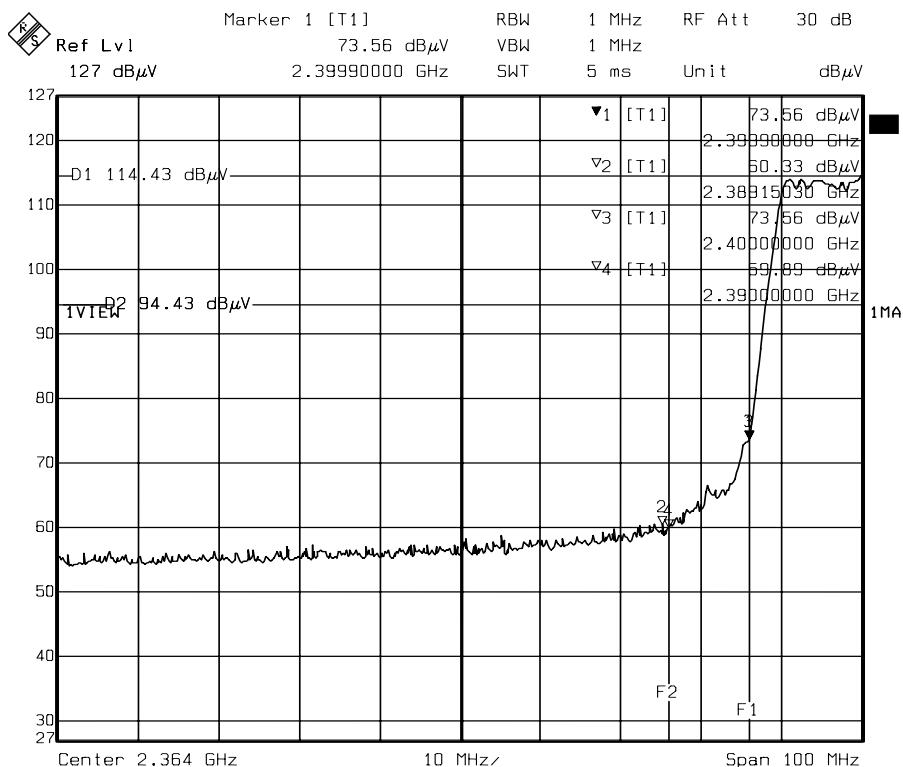

Date: 17.AUG.2004 05:02:27

Lower Band edge (Peak)

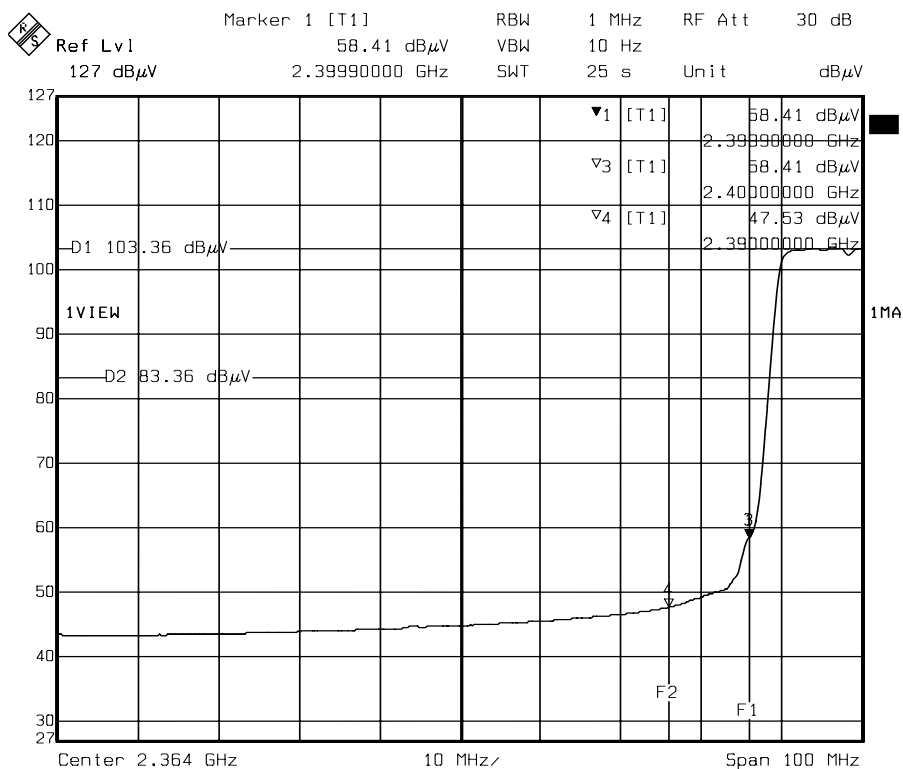

Date: 17.AUG.2004 05:00:50

Lower Band edge (Average)

Note: For 802.11g Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M


Report No. : ER04-06-031FRF

Page 57 of 60

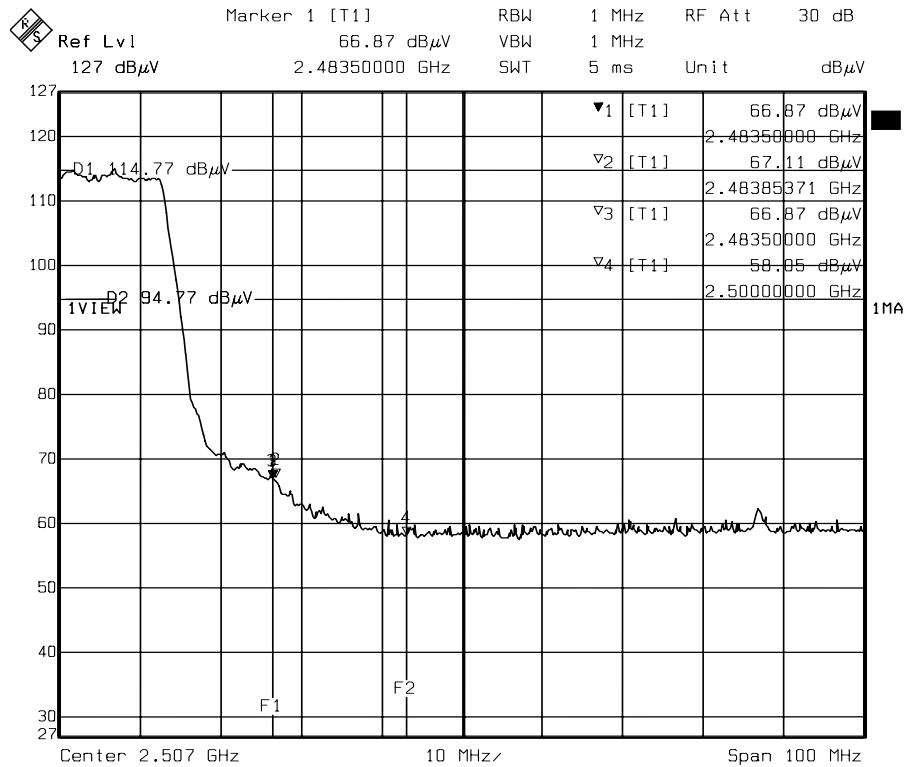

Date: 17.AUG.2004 04:34:27

Higher Band edge (Peak)

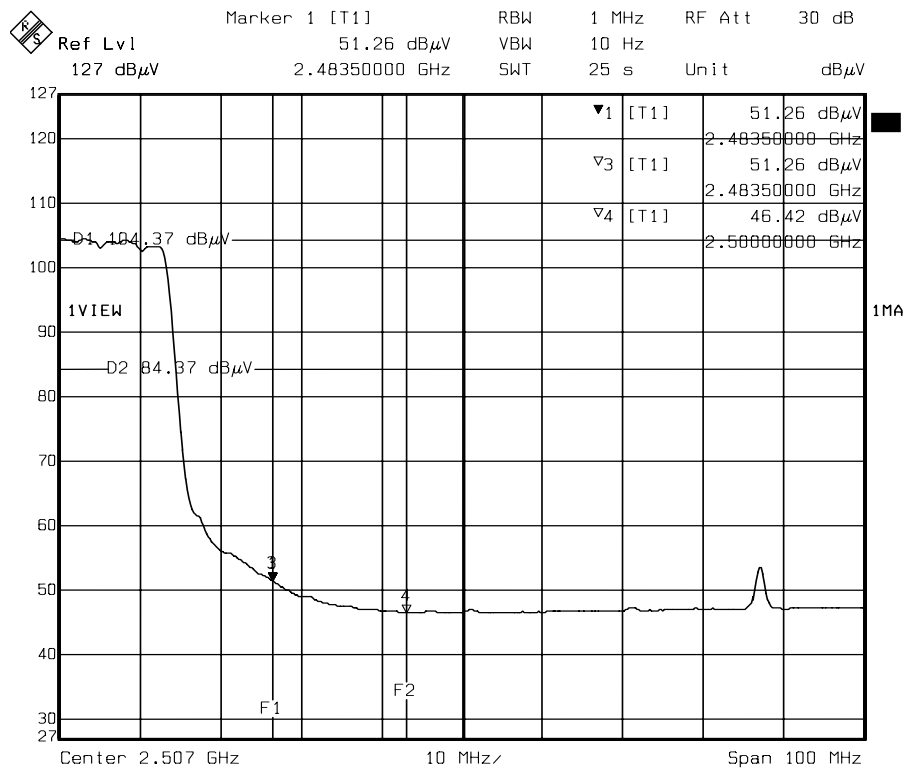

Date: 17.AUG.2004 04:58:35

Higher Band edge (Average) Note: For 802.11g Mode



8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used in this product is Soldered on PCB Dipole antenna. The maximum Gain of this antenna is only 1.5dBi.



9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

9.1 Friis Formula

Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : PBLWL531M

Report No. : ER04-06-031FRF

Page 60 of 60

9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 1.5dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dBm)	Antenna Gain	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	14.52	1.5	0.005633	1
CH6	2437.00	13.84	1.5	0.004816	1
CH11	2462.00	13.03	1.5	0.003997	1

Note :

1. For 802.11b mode (11Mbps).
2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.

Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dBm)	Antenna Gain	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	11.41	1.5	0.002753	1
CH6	2437.00	10.89	1.5	0.002442	1
CH11	2462.00	10.09	1.5	0.002031	1

Note :

1. For 802.11g mode (6Mbps).
2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.