



Inter**Lab**[®]

FCC Measurement/Technical Report on
WLAN transceiver
Harman/Becker Audi MIB 2

FCC ID: T8GA270
IC: 6434A-A270

Report Reference: MDE_HARMAN_1403_FCCb

Test Laboratory:

Borsigstrasse 11
Germany
7Layers AG
40880 Ratingen



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H.-J. Meckelburg
Dr. H. Ansorge

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385



Table of Contents

0	Applied Standards and Test Summary	3
0.1	Technical Report Summary	3
0.2	FCC and IC Correlation Table	4
0.3	Measurement Summary	5
1	Administrative Data	7
1.1	Testing Laboratory	7
1.2	Project Data	7
1.3	Applicant Data	7
1.4	Manufacturer Data	7
2	Test object Data	8
2.1	General EUT Description	8
2.2	EUT Main components	9
2.3	Ancillary Equipment	9
2.4	Auxiliary Equipment	10
2.5	EUT Setups	10
2.6	Operating Modes	11
2.7	Special software used for testing	11
2.8	Product labelling	11
3	Test Results	12
3.1	Occupied bandwidth	12
3.2	Peak power output	15
3.3	Spurious RF conducted emissions	18
3.4	Spurious radiated emissions	21
3.5	Band edge compliance	26
3.6	Power density	33
4	Test Equipment	36
	Photo Report	42
5	Setup Drawings	42



0 Applied Standards and Test Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-13 Edition) and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz
and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC measurement guide line "Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005"

Instead of applying ANSI C63.4–1992 which is referenced in the FCC Public Note, the newer ANSI C63.4–2009 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in 0.3 Measurement Summary.

0.2 FCC and IC Correlation Table

Correlation of measurement requirements for DTS devices (e.g. WLAN 2.5/5 GHz) equipment

The following tables show the correlation of measurement requirements for DTS (e.g. WLAN) equipment and Information Technology Equipment (ITE) from FCC and IC standards.

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Occupied bandwidth	§ 15.247 (a) (2)	RSS-210 Issue 8: A8.2 (a)
Peak power output	§ 15.247 (b) (3), (4)	RSS-210 Issue 8: A8.4 (4)
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Power density	§ 15.247 (e)	RSS-210 Issue 8: A8.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3 RSS Gen Issue 3: 6 *)

*) Receivers which are part of Transceivers are exempted with respect to Notice 2012-DRS0126.

Information Technology Equipment (ITE)

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.107	ICES-003 Issue 5: 6.1
Spurious Radiated Emissions	§ 15.109	ICES-003 Issue 5: 6.2



0.3 Measurement Summary

FCC Part 15, Subpart C		§ 15.207	
Conducted emissions (AC power line)			
The measurement was performed according to ANSI C63.4			2009
OP-Mode	Setup	Port	Final Result
op-mode 2a	Setup_03	AC port	N/A
FCC Part 15, Subpart C		§ 15.247 (a) (1)	
Occupied bandwidth			
The measurement was performed according to FCC § 15.31			10-1-13 Edition
OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 2b	Setup_01	Temp.ant.connector	Passed
op-mode 2g	Setup_01	Temp.ant.connector	Passed
op-mode 2n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed
FCC Part 15, Subpart C		§ 15.247 (b) (1)	
Peak power output			
The measurement was performed according to FCC § 15.31			10-1-13 Edition
OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 2b	Setup_01	Temp.ant.connector	Passed
op-mode 2g	Setup_01	Temp.ant.connector	Passed
op-mode 2n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed
FCC Part 15, Subpart C		§ 15.247 (d), § 15.35 (b), § 15.207	
Spurious conducted emissions			
The measurement was performed according to ANSI C63.4			2009
OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 2b	Setup_01	Temp.ant.connector	Passed
op-mode 2g	Setup_01	Temp.ant.connector	Passed
op-mode 2n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed

FCC Part 15, Subpart C
§ 15.247 (d), § 15.35 (b), § 15.209

Spurious radiated emissions

The measurement was performed according to ANSI C63.4

2009

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Enclosure	Passed
op-mode 2b	Setup_02	Enclosure	Passed
op-mode 3b	Setup_02	Enclosure	Passed
op-mode 1g	Setup_02	Enclosure	Passed
op-mode 2g	Setup_02	Enclosure	Passed
op-mode 3g	Setup_02	Enclosure	Passed
op-mode 1n	Setup_02	Enclosure	Passed
op-mode 2n	Setup_02	Enclosure	Passed
op-mode 3n	Setup_02	Enclosure	Passed

FCC Part 15, Subpart C
§ 15.247 (d)

Band edge compliance

The measurement was performed according to FCC § 15.31 / ANSI C63.4

10-1-13 Edition / 2009

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Enclosure	Passed
op-mode 3g	Setup_01	Enclosure	Passed
op-mode 3n	Setup_01	Enclosure	Passed

FCC Part 15, Subpart C
§ 15.247 (e)

Power density

The measurement was performed according to FCC § 15.31

10-1-13 Edition

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 2b	Setup_01	Temp.ant.connector	Passed
op-mode 2g	Setup_01	Temp.ant.connector	Passed
op-mode 2n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed

N/A not applicable (the EUT is powered by DC)

N/P not performed



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2132 749 0

Responsible for
Accreditation Scope:

B. Roth

Responsible
for Test Report:

H. Kullik



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG

Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-04-10

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Marco Kullik

Date of Test(s): 2014-05-09 to 2014-07-21
Date of Report: 2014-07-24

1.3 Applicant Data

Company Name: Harman Becker Automotive Systems GmbH

Address: Becker-Görling-Str. 16
76307 Karlsbad
Germany

Contact Person: Mr. Stefan Blaschek

1.4 Manufacturer Data

Company Name: Please see applicant data

Address:

Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test:	IEEE 802.11b/g/n WLAN transceiver
Type Designation:	Harman/Becker Audi MIB 2
Kind of Device: (optional)	Main Unit of Modular Infotainment Kit
Voltage Type:	DC
Voltage Level:	12.0 V
Tested Modulation Type:	DBPSK; OFDM:BPSK; OFDM:64-QAM

Product description for the EUT:

The EUT is a main unit of a modular infotainment kit for cars with a GSM/UMTS module as well as a WLAN (802.11 b/g/n, 2.4 GHz) and Bluetooth module with separate integral antennas for WLAN and Bluetooth. In IEEE 802.11n mode it supports 20 MHz bandwidth channels (MCS7), providing 72.2 Mbit/s transfer data rate.

The object of this test report is the WLAN transceiver, consequently switched on the IEEE 802.11 b/g/n modes, working in the 2.4 GHz bands.

The EUT provides the following ports:

Ports

- Temporary antenna connector
- Enclosure
- DC Port
- Cable Harness
- Antenna phone
- Antenna DAB
- Antenna GPS
- Antenna FM (diversity dual port)
- LVDS Input
- LVDS Output
- Most Bus
- USB

The main components of the EUT are listed and described in Chapter 2.2

2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: DE1009001aa01)	WLAN transceiver	Harman/Becker Audi MIB 2	A278BV0 E750250 3	H34; EC:008	R0512	-
Remark: EUT A is equipped with a temporary antenna connector						
EUT B (Code: DE1009001ae02)	WLAN transceiver	Harman/Becker Audi MIB 2	A263GS0 EB00001 8	H40; EC:995	R0512	-

NOTE: The short description used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment, which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
ANC1	Control Unit	Bedienteil MMI ALS	-	-	AL125.05.1 300010096	-



2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment, which is used temporarily to enable operational and control features especially used for the tests of the EUT, which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AUX1	LVDS to DVI converter	LVDS2DVI/Converter	B100787	-	-	-

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_01	EUT A	setup for conducted measurements
Setup_02	EUT B + AUX1 + ANC1	setup for radiated measurements



2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

2.6.1 Test Channels

2.4 GHz ISM 2400 - 2483.5 MHz		
Bottom	Middle	Top
1	6	11
2412	2437	2462

2.6.2 Datarates

SISO:

WLAN b-Mode; 20 MHz; 1 Mbit/s
WLAN g-Mode; 20 MHz; 6 Mbit/s
WLAN n-Mode; 20 MHz; 72.2 Mbit/s

2.7 Special software used for testing

For testing purposes a special "BIOS Mode" of the software was used to directly control the WLAN module.

2.8 Product labelling

Please refer to the documentation of the applicant.

2.8.1 FCC ID label

Please refer to the documentation of the applicant.

2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



3 Test Results

3.1 Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.1.1 Test Description

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 MHz

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = $10 \log (\text{Output power (W)} / 1\text{mW})$

3.1.3 Test Protocol


Temperature: 23.5 °C
Air Pressure: 1010 hPa
Humidity: 38.5 %

WLAN b-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	8.357	0.5	7.9
	6	2437	8.297	0.5	7.8
	11	2462	8.297	0.5	7.8

WLAN g-Mode; 20 MHz; 11 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.473	0.5	16.0
	6	2437	16.293	0.5	15.8
	11	2462	16.473	0.5	16.0

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.473	0.5	16.0
	6	2437	16.293	0.5	15.8
	11	2462	16.293	0.5	15.8

3.1.4 Measurement Plot (showing the highest value, "worst case")

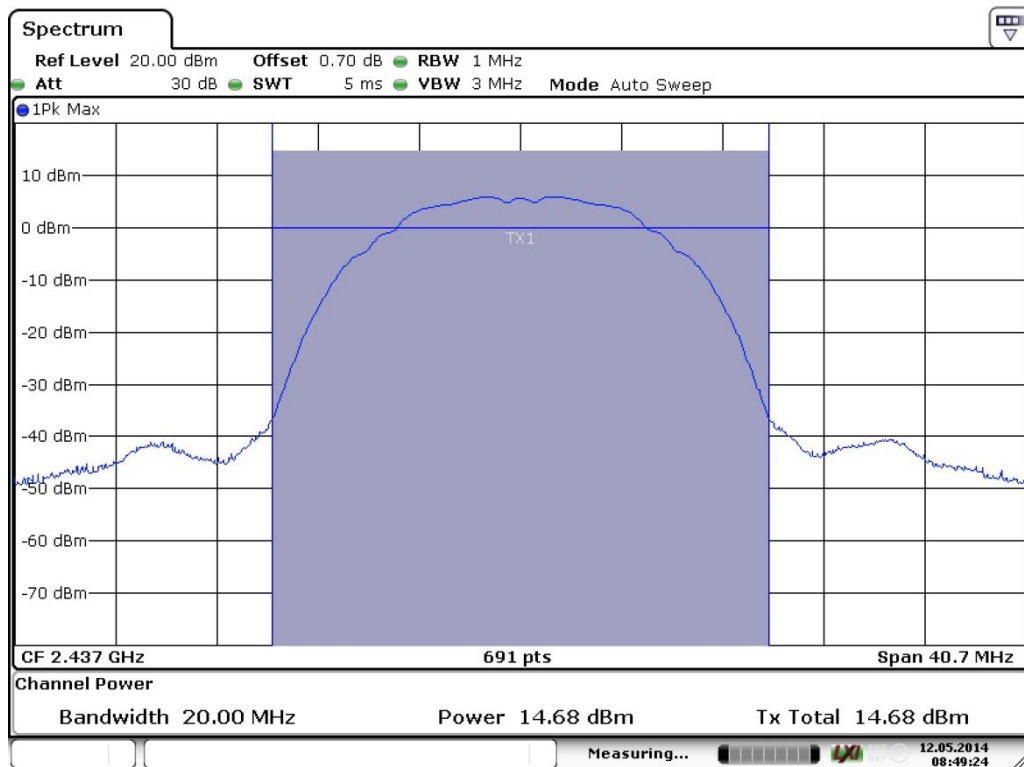

Date: 12.MAY.2014 08:49:24

WLAN b-Mode; 20 MHz; 6 Mbit/s, Ch. 6



3.2 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: RMS

3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: $\text{Limit (dBm)} = 10 \log (\text{Limit (W)}/1\text{mW})$

3.2.3 Test Protocol

Temperature: 23.5 °C
Air Pressure: 1010 hPa
Humidity: 38.5 %


The antenna gain is excluded in the table.

WLAN b-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	13.9	30.0	16.1
	6	2437	14.7	30.0	15.3
	11	2462	14.5	30.0	15.5

WLAN g-Mode; 20 MHz; 11 Mbit/s					
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	19.6	30.0	10.4
	6	2437	19.8	30.0	10.2
	11	2462	19.6	30.0	10.4

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	19.5	30.0	10.5
	6	2437	19.7	30.0	10.3
	11	2462	19.6	30.0	10.5

3.2.4 Measurement Plot (showing the highest value, "worst case")

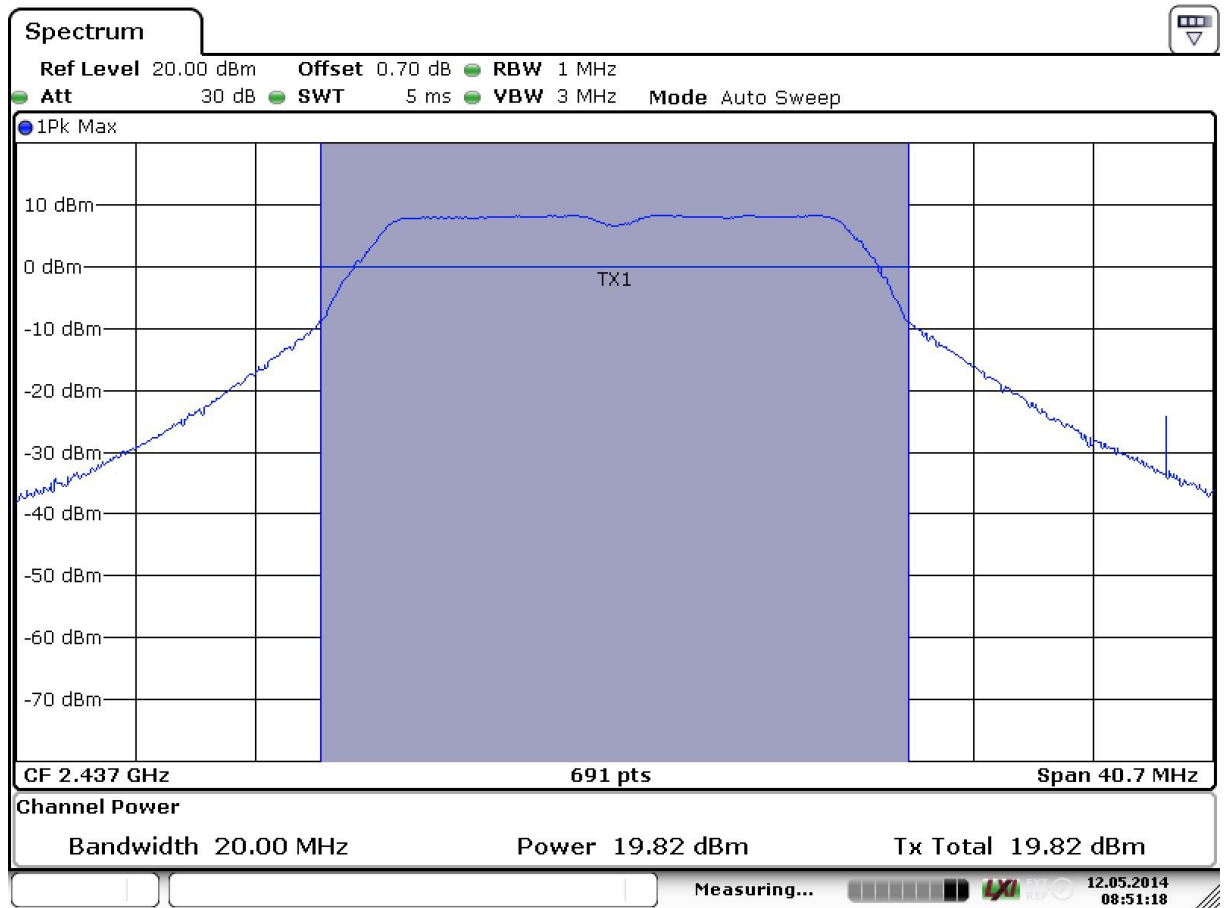

Date: 12.MAY.2014 08:51:18

3.3 Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.3.1 Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 40000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 3.4). This value is used to calculate the 20 dBc limit.

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.3.3 Test Protocol

Temperature: 23.5 °C
Air Pressure: 1010 hPa
Humidity: 38.5 %

WLAN b-Mode; 20 MHz; 6 Mbit/s

Ch. No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	0.4	-19.7	-
6	2437	-	-	PEAK	100	0.9	-19.1	-
11	2462	-	-	PEAK	100	1.4	-18.7	-


WLAN g-Mode; 20 MHz; 11 Mbit/s

Ch. No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	0.5	-19.6	-
6	2437	-	-	PEAK	100	0.3	-19.7	-
11	2462	-	-	PEAK	100	0.7	-19.5	-

WLAN n-Mode; 20 MHz; 72.2 Mbit/s

Ch. No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	-0.1	-20.4	-
6	2437	-	-	PEAK	100	-1.2	-21.1	-
11	2462	-	-	PEAK	100	-0.1	-20.5	-

3.3.4 Measurement Plot (showing the highest value, "worst case")

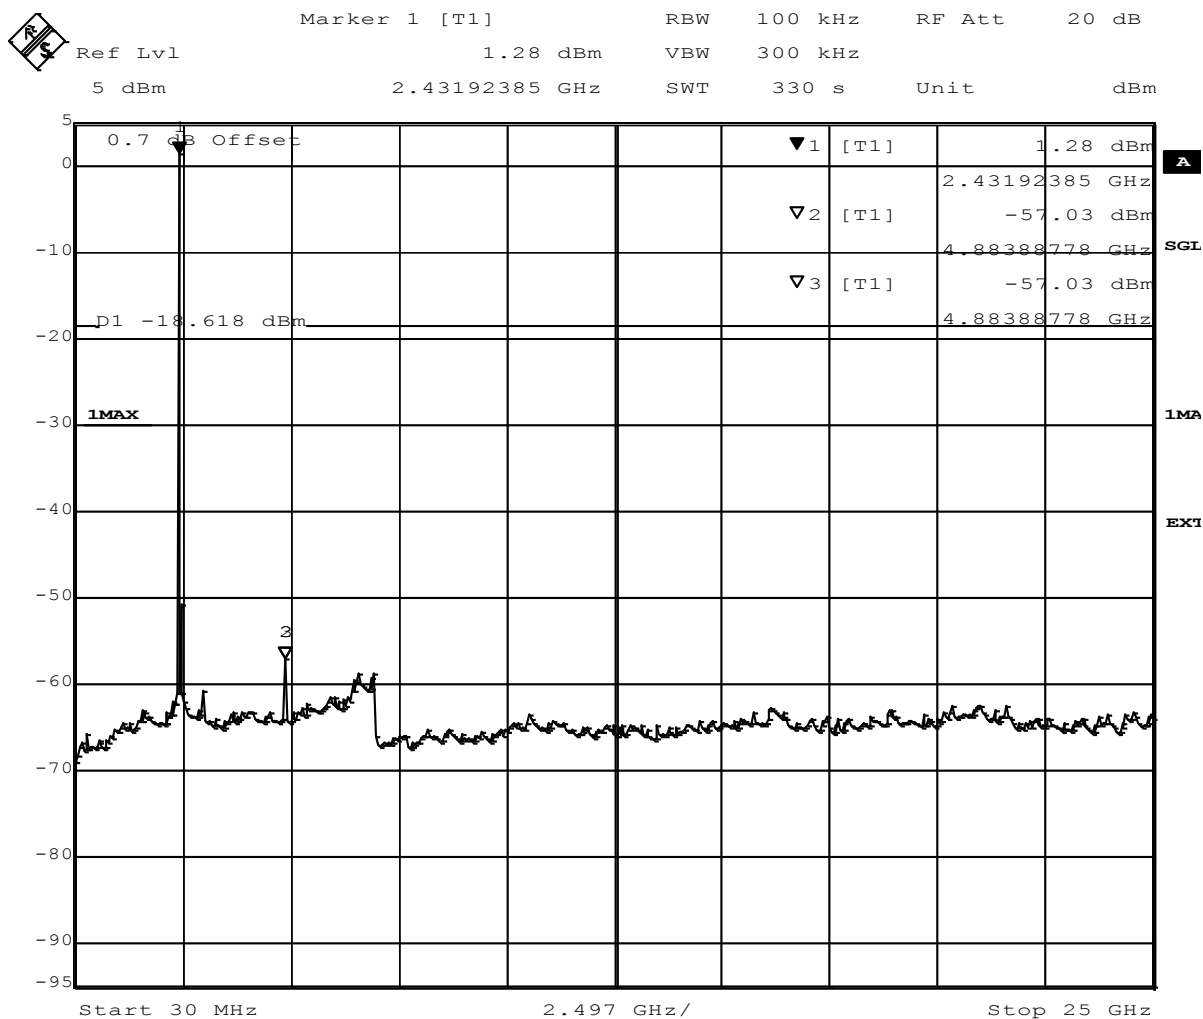

Title: spurious emissions
 Comment A: CH T: 2462 MHz
 Date: 9.MAY.2014 14:54:02

3.4 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4

3.4.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step, the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 22.5^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 25 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 22.5^{\circ}$ around the determined value
- Height variation range: ± 25 cm around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact, that in this frequency range a double-ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the modes b and g. Please refer to the results for the used frequency range.

3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

3.4.3 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Calculated Limits(dBμV/m @10m)	Limits(dBμV/m @10m)
0.009 – 0.49	2400/F(kHz)	300 59.1 dB	(48.5 – 13.8) + 30 dB	78.5 – 43.8
0.49 – 1.705	24000/F(kHz)	30 19.1 dB	(48.9 – 23.0) + 10 dB	58.9 – 33.0
1.705 – 30	30	30 19.1 dB	29.5 + 10 dB	39.5

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit (dBμV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

3.4.4 Test Protocol

Temperature: 23 °C
Air Pressure: 1019 hPa
Humidity: 42 %

WLAN b-Mode; 20 MHz; 6 Mbit/s								
Ch. No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
1	2412	7440.0	47.5	PEAK	1000	74.0	26.5	RB
		7440.0	34.9	AV	1000	54.0	19.1	RB
		12401.0	50.0	PEAK	1000	74.0	24.0	RB
		12401.0	35.9	AV	1000	54.0	18.2	RB

WLAN g-Mode; 20 MHz; 11 Mbit/s								
Ch. No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
1	2412	7440.0	47.7	PEAK	1000	74.0	26.3	RB
		7440.0	34.8	AV	1000	54.0	19.2	RB

Note: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement for g-Mode was performed from 1 GHz up to 8 GHz because at pre-measurements no significant spurious emissions have been found outside this frequency range.

3.5 Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4-2009, FCC §15.31

3.5.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower and higher band edge by a conducted measurement . For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room.

For the lower band edge the EUT is set to transmit as follows:

For WLAN transmitter working in 2.4 GHz band:

- lowest channel - ch. 1 = 2412 MHz with channel bandwidth of 20 MHz.

For WLAN transmitter working in 5 GHz band:

- lowest U-NII-3 sub-band channel - ch. 149 = 5745 MHz with channel bandwidth of 20 MHz,

- lowest U-NII-3 sub-band channel - ch. 151 – 5755 MHz with channel bandwidth of 40 MHz.

The lower band edge is 2400 MHz for 2.4 GHz band transmitter and 5725 MHz for 5 GHz band transmitter.

For the higher band edge the EUT is set to transmit as follows:

For the WLAN transmitter working in 2.4 GHz band:

- highest channel - ch. 11 = 2462 MHz with channel bandwidth of 20 MHz.

For the WLAN transmitter working in 5 GHz,

- highest U-NII-3 sub-band channel - ch. 165 = 5825 MHz with channel bandwidth of 20 MHz,

- highest U-NII-3 sub-band channel - ch. 159 = 5795 MHz with channel bandwidth of 40 MHz.

The higher band edge is 2483.5 MHz for 2.4 GHz band transmitter and 5850 MHz for 5 GHz band transmitter.

Analyzer settings for conducted measurement:

- Detector: Peak

- RBW / VBW = 100 / 300 kHz

2. Showing compliance of the higher band edge falls in to restricted bands by a radiated measurement.

The radiated emissions measurements are performed in a typical installation

configuration inside the fully anechoic chamber using a horn antenna at 1 m distance.

EMI receiver settings for radiated measurement:

- Detector: Peak, Average

- IF Bandwidth = 1 MHz

3.5.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...



If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the radiated measurement of the higher band edge connected to a restricted band the limit is "specified in Section 15.209(a)".

3.5.3 Test Protocol

3.5.3.1 Lower band edge

Conducted measurement

Temperature: 23.5 °C
 Air Pressure: 1010 hPa
 Humidity: 38.5 %

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBμV/m]	Margin to Limit [dB]
1	2412	2400.0	-56.3	PEAK	100	0.4	-19.6	36.7

WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBμV/m]	Margin to Limit [dB]
1	2412	2400.0	-34.8	PEAK	100	0.5	-19.5	15.3

WLAN n-Mode; 20 MHz; 72.2 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBμV/m]	Margin to Limit [dB]
1	2412	2400.0	-36.6	PEAK	100	-0.1	-20.1	16.5

3.5.3.3 Higher band edge

Conducted measurement

Temperature: 23.5 °C
 Air Pressure: 1010 hPa
 Humidity: 38.5 %

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBμV/m]	Margin to Limit [dB]
11	2462	2483.5	-62.2	PEAK	100	1.4	-18.6	43.6

WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBμV/m]	Margin to Limit [dB]
11	2462	2483.5	-57.04	PEAK	100	0.7	-19.3	37.7

WLAN n-Mode; 20 MHz; 72.2 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
11	2462	2483.5	-56.6	PEAK	100	-0.1	-20.1	36.5

Radiated measurement


Temperature: 23 °C
 Air Pressure: 1019 hPa
 Humidity: 42 %

WLAN b-Mode; 20 MHz; 1 Mbit/s							
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
11	2462	2483.5	49.8	PEAK	1000	74.0	24.2
11	2462	2483.5	37.1	AV	1000	54.0	16.9


WLAN g-Mode; 20 MHz; 6 Mbit/s							
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
11	2462	2483.5	50.5	PEAK	1000	74.0	23.5
11	2462	2483.5	39.1	AV	1000	54.0	15.0

WLAN n-Mode; 20 MHz; 72 Mbit/s							
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
11	2462	2483.5	51.6	PEAK	1000	74.0	22.4
11	2462	2483.5	39.3	AV	1000	54.0	14.8

3.5.4 Measurement Plot (showing the highest value, "worst case")

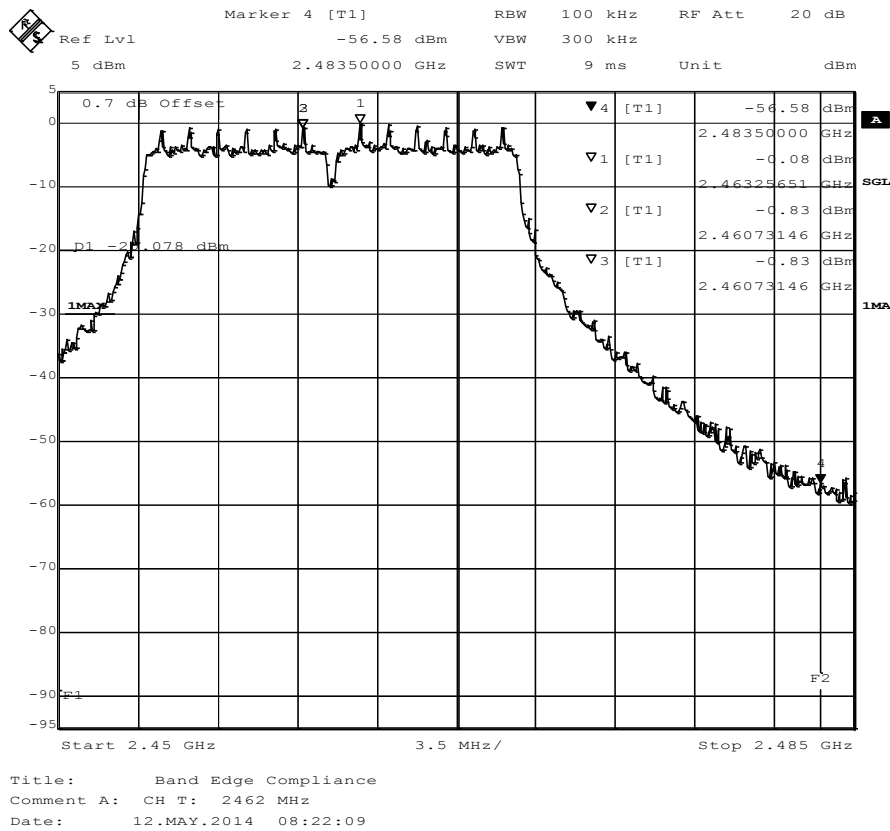

WLAN n-Mode; 20 MHz; 72.2 Mbit/s, Ch. 11 (conducted)

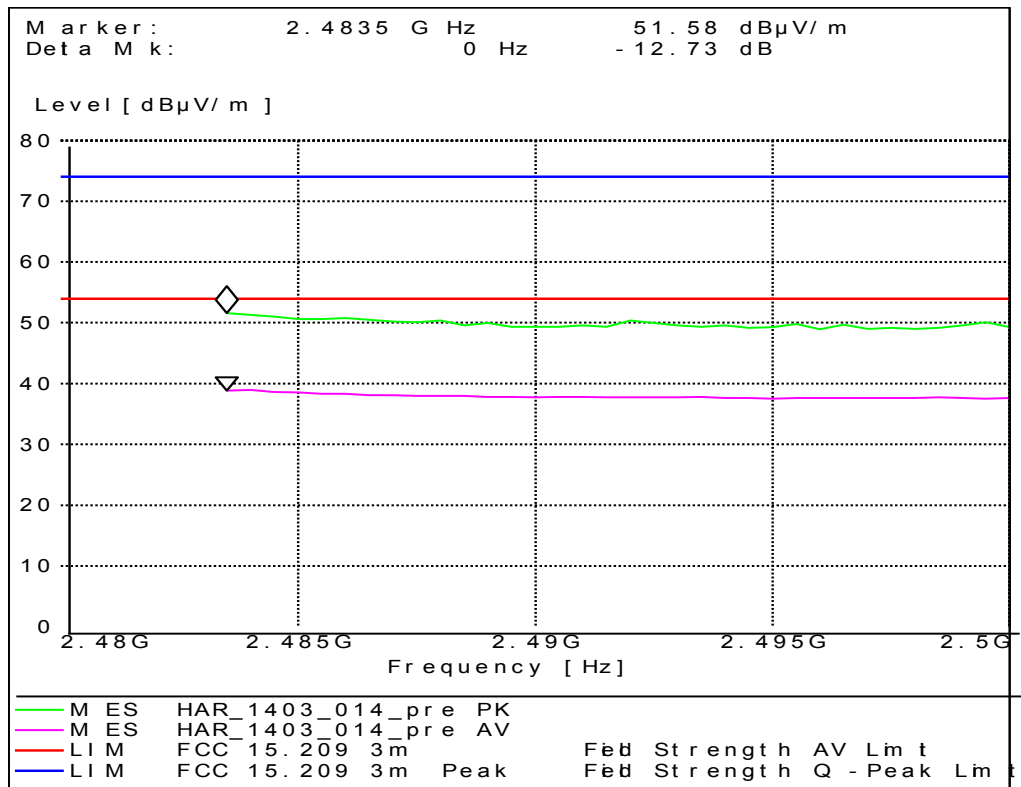

WLAN n-Mode; 20 MHz; 72.2 Mbit/s, Ch. 11 (radiated)



3.6 Power density

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.6.1 Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.
Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

3.6.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Protocol


Temperature: 23.5 °C
 Air Pressure: 1010 hPa
 Humidity: 38.5 %

WLAN b-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-17.9	8.0	25.9
	6	2437	-17.5	8.0	25.5
	11	2462	-17.0	8.0	25.0

WLAN g-Mode; 20 MHz; 11 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-14.7	8.0	22.7
	6	2437	-14.6	8.0	22.6
	11	2462	-14.4	8.0	22.4

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-14.8	8.0	22.8
	6	2437	-14.8	8.0	22.8
	11	2462	-15.0	8.0	23.0

3.6.3 Measurement Plot (showing the highest value, "worst case")

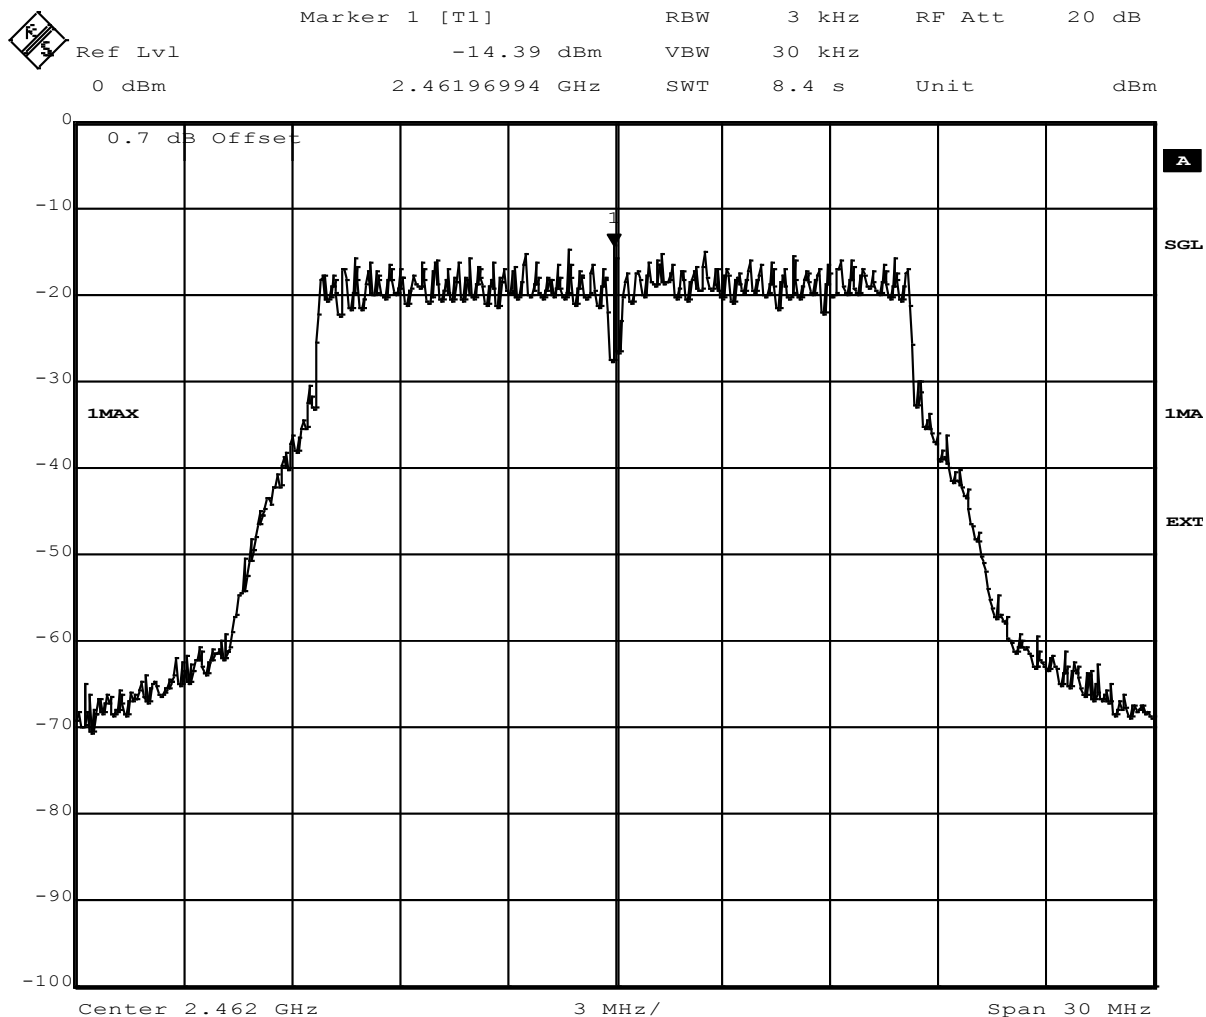

Title: Power Density
 Comment A: CH B: 2412 MHz;
 Date: 9.MAY.2014 13:40:02
 WLAN g-Mode; 20 MHz; 11 Mbit/s, Ch. 11

4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 3	
Manufacturer:	Frankonia	
Description:	Anechoic Chamber for radiated testing	
Type:	10.58x6.38x6.00 m ³	
	<i>Calibration Details</i>	<i>Last Execution</i>
	NSA (FCC)	2014/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i>
	FCC listing 96716 3m Part15/18		2014/01/09
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 3
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
	Calibration Details		Last Execution
	Standard Calibration		2009/06/04
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	Calibration Details		Last Execution
	Standard Calibration		2012/01/18
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard Calibration		2012/05/18
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard Calibration		2012/06/26
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard Calibration		2012/12/18
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
Pyramidal Horn Antenna 26,5 GHz	Standard calibration 3160-09	00083069	2011/10/27

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Pyramidal Horn Antenna 3160-10 40 GHz		00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 3, Lab 4
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider1506A / 93459 N (Aux)		LM390	Weinschel Associates
Broadband Power DividerWA1515 SMA		A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i>
	Customized calibration		2013/12/04
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard		2014/02/10
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard		2012/06/13
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard calibration		2013/07/29
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID:

Lab 1, Lab 3, Lab 4

Description:

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard calibration		2011/11/24
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard calibration		2014/01/27
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard calibration		2011/11/28
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	HW/SW Status		Date of Start Date of End
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard calibration		2011/12/07
	HW/SW Status		Date of Start Date of End
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	



Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 3
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution
	Standard calibration		2013/05/03
	Standard calibration		2014/05/13
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution
	Standard calibration		2013/04/30
	Standard calibration		2014/05/13
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	standard calibration		2011/05/12
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution
	Standard Calibration		2014/01/07
	HW/SW Status		Date of Start Date of End
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

Test Equipment Multimeter 12

Lab ID: Lab 5, Lab 6
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	Calibration Details		Last Execution
	Customized calibration		2013/12/04



Test Equipment Radio Lab Test Equipment

Lab ID: Lab 4
Description: Radio Lab Test Equipment


Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power DividerWA1515 SMA		A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard calibration		2013/05/03
	Standard calibration		2014/05/13
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard calibration		2013/06/24
	Standard calibration		2014/07/03
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard calibration		2013/04/30
	Standard calibration		2014/05/13
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard calibration		2011/11/25
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard calibration		2013/05/06
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i>
	Standard Calibration		2013/02/12

Photo Report

Please refer to external report.

5 Setup Drawings

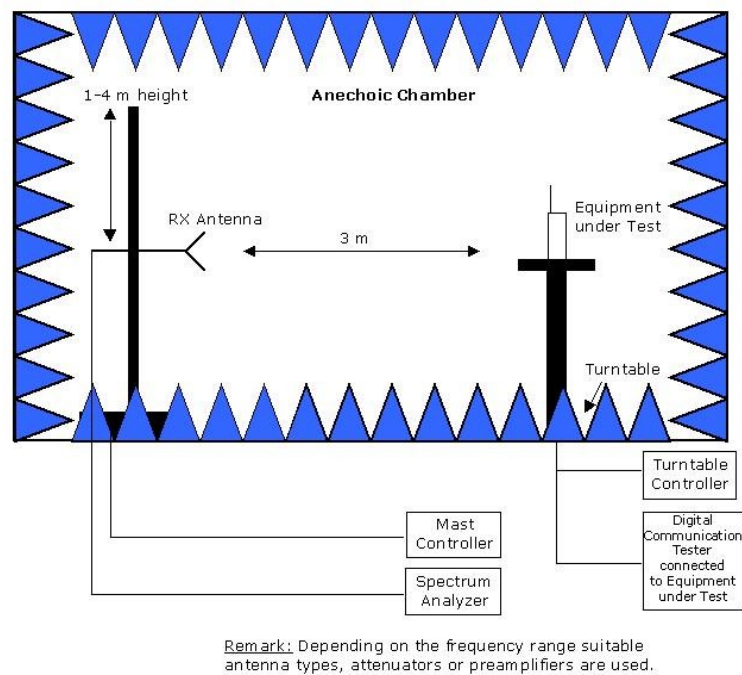

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.