

TEST REPORT

Application No.: KSCR2412002639AT
FCC ID: 2AL8S-0235C9S4
Applicant: Zhejiang Uniview Technologies Co., Ltd.
Address of Applicant: No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China
Manufacturer: Zhejiang Uniview Technologies Co., Ltd.
Address of Manufacturer: No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China
Factory: Zhejiang Uniview Systems Technology Co., Ltd.
Address of Factory: No.1277 South Qingfeng South Road, Tongxiang City, Jiaxing City, Zhejiang Province, China
Equipment Under Test (EUT):
EUT Name: IP Camera
Model No.: IPC2122LB-AF28WK-WF,IPC2122LB-xxxxxxx-yyy-yyyyy-zzzz-mmmm("x" "y" "z" "m" can be 0-9, A-Z,a-z or blank,denoting target regional; "-"may be blank) ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2024-12-24
Date of Test: 2024-12-26 to 2025-01-13
Date of Issue: 2025-01-17

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2025-01-17	/

Authorized for issue by:				
Tested By		Maker Qi		
		Maker_Qi/Project Engineer		
Approved By		Terry Hou		
		Terry Hou /Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Average Output Power		ANSI C63.10 (2013) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

Model No.: IPC2122LB-AF28WK-WF,IPC2122LB-xxxxxxx-yyyyyyyyy-zzzz-
mmmm("x" "y" "z" "m" can be 0-9, A-Z,a-z or blank,denoting target regional; "-"may be blank)

Only the model IPC2122LB-AF28WK-WF was tested.

There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model IPC2122LB-AF28WK-WF was tested since their differences were the model number and appearance.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Power level setting using in test.....	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	9
6.1 Antenna Requirement	9
7 Radio Spectrum Matter Test Results	10
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	10
7.2 Radiated Emissions which fall in the restricted bands	14
7.3 Radiated Spurious Emissions Below 1GHz	53
7.4 Radiated Spurious Emissions Above 1GHz.....	57
7.5 Conducted Peak Output Power.....	89
7.6 Minimum 6dB Bandwidth.....	91
7.7 Power Spectrum Density	92
7.8 Conducted Band Edges Measurement	93
7.9 Conducted Spurious Emissions	94
8 Test Setup Photo	95
9 EUT Constructional Details (EUT Photos).....	95
10 Appendix.....	96

4 General Information

4.1 Details of E.U.T.

Power supply:	AC/DC Adapter: Model: ADS-12BP-12Y 12012EPCU Input: 100~240V~,50-60Hz,0.3A Max Output: 12V/1A
Operation Frequency:	802.11b/g/n(HT20)/ax(HE20):2412MHz to 2462MHz; 802.11n(HT40)/ax(HE40):2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK), 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK), 802.11ax(Full RU0): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Number of Channels:	802.11b/g/n(HT20)/ax(HE20):11;802.11n(HT40)/ax(HE40):7
Channel Spacing:	5MHz
Antenna Type:	Dipole Antenna
Antenna Gain:	4.79dBi (Provided by the manufacturer)

4.2 Power level setting using in test

Channel	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
	Ant 1	Ant 1	Ant 1	Ant 1
L	18	16	16	15
M	19	17	17	16
H	19	17	17	16

Channel	802.11AX(HE20)	802.11AX(HE40)
	Ant 1	Ant 1
L	16	16
M	16	16
H	16	16

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301101	01/15/2024	01/14/2025
2	LISN	R&S	ENV216	KS301197	01/15/2024	01/14/2025
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2024	01/14/2025
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/15/2024	01/14/2025
5	CE test Cable	Thermax	/	CZ301102	01/15/2024	01/14/2025
6	Test Software	ESE	E3_V 6.111221a	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/14/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/12/2024	08/11/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/14/2025
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111- CZ301120	01/15/2024	01/14/2025
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
15	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	08/22/2026
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/14/2025
11	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/12/2024	08/11/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/21/2024	03/20/2025
14	Software	Faratronic	EZ EMC-v 3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Dipole Antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.79dBi.

Antenna location: Refer to External photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

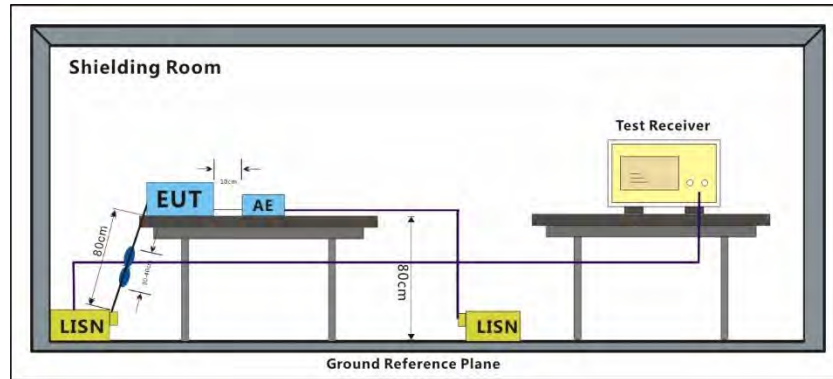


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$

Test Mode: 01; Line: Live line


Test Data :

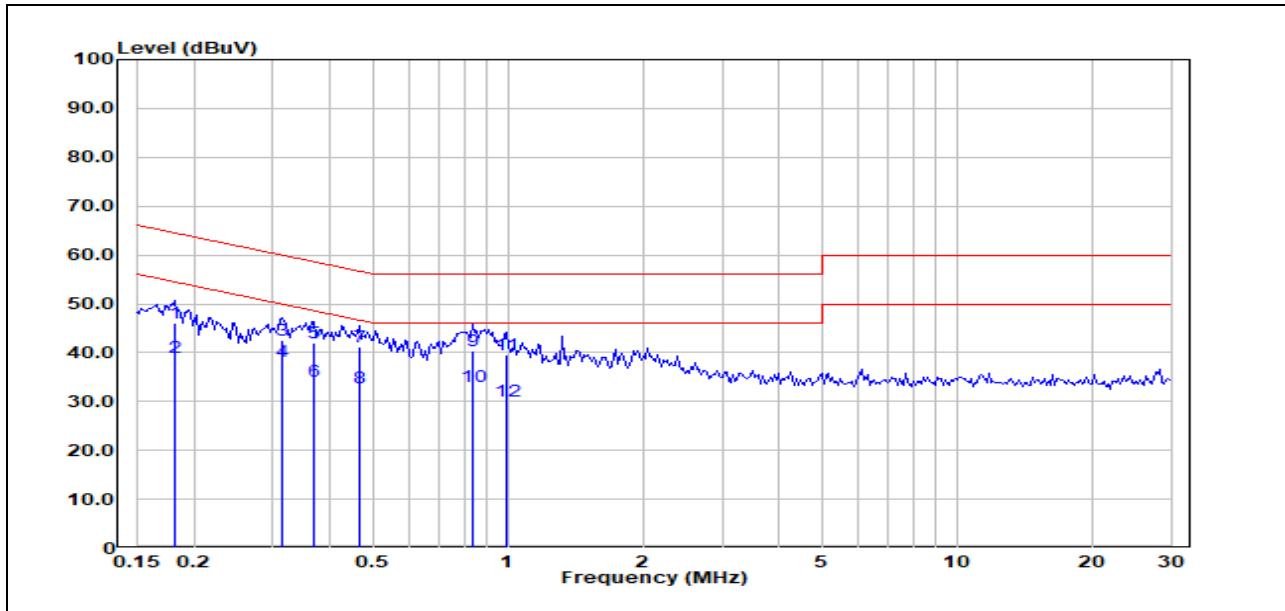

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1815	18.89	20.12	39.01	54.42	-15.41	Average
2	0.1815	25.82	20.12	45.94	64.42	-18.48	QP
3	0.3150	18.23	20.08	38.31	49.84	-11.53	Average
4	0.3150	22.47	20.08	42.55	59.84	-17.29	QP
5	0.3692	13.96	20.07	34.03	48.52	-14.49	Average
6	0.3692	21.81	20.07	41.88	58.52	-16.64	QP
7	0.4661	12.65	20.04	32.69	46.58	-13.89	Average
8	0.4661	21.08	20.04	41.12	56.58	-15.46	QP
9	0.8349	13.17	19.8	32.97	46	-13.03	Average
10	0.8349	20.59	19.8	40.39	56	-15.61	QP
11	0.9891	10.26	19.85	30.11	46	-15.89	Average
12	0.9891	19.67	19.85	39.52	56	-16.48	QP

Test Mode: 01; Line: Neutral Line

Test Data :

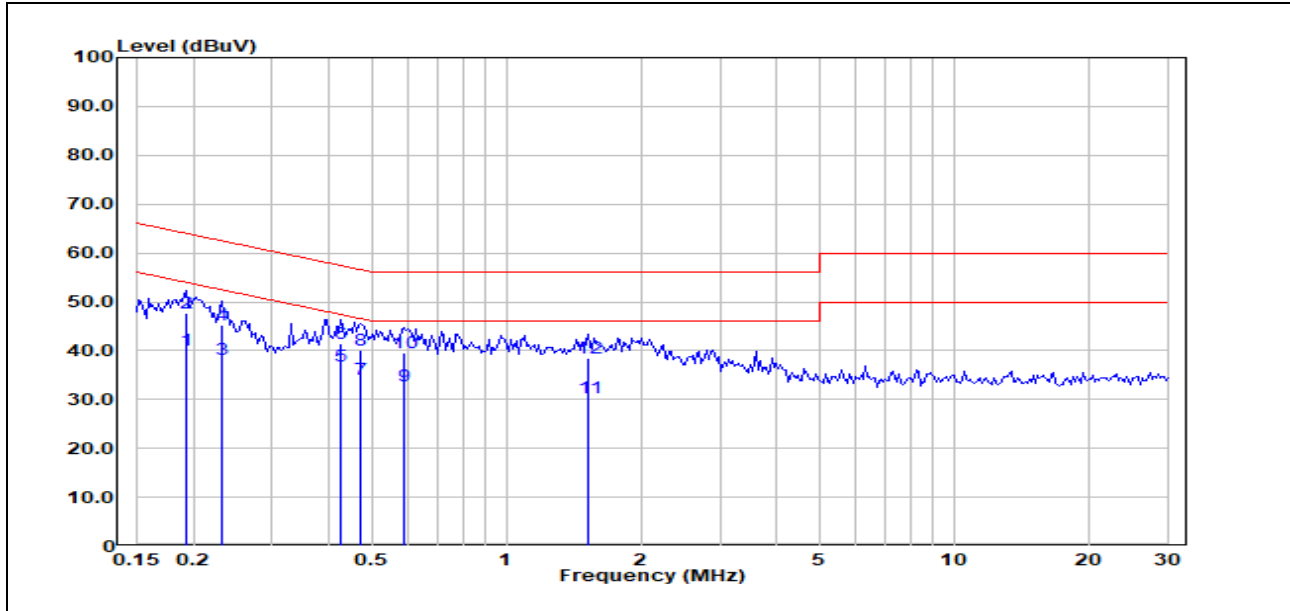

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
1	0.1934	19.99	20.12	40.11	53.89	-13.78	Average
2	0.1934	27.57	20.12	47.69	63.89	-16.20	QP
3	0.2316	18.02	20.10	38.12	52.39	-14.27	Average
4	0.2316	25.29	20.10	45.39	62.39	-17.00	QP
5	0.4283	16.92	20.06	36.98	47.29	-10.31	Average
6	0.4283	21.48	20.06	41.54	57.29	-15.75	QP
7	0.4711	14.14	19.98	34.12	46.49	-12.37	Average
8	0.4711	20.05	19.98	40.03	56.49	-16.46	QP
9	0.5885	12.91	19.88	32.79	46.00	-13.21	Average
10	0.5885	19.78	19.88	39.66	56.00	-16.34	QP
11	1.5270	10.48	19.90	30.38	46.00	-15.62	Average
12	1.5270	18.56	19.90	38.46	56.00	-17.54	QP

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 49.8 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

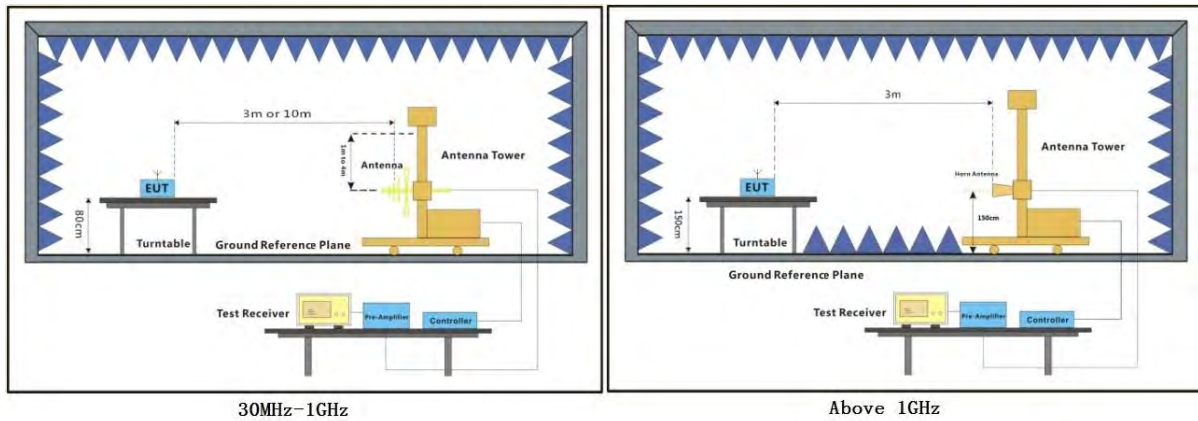

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

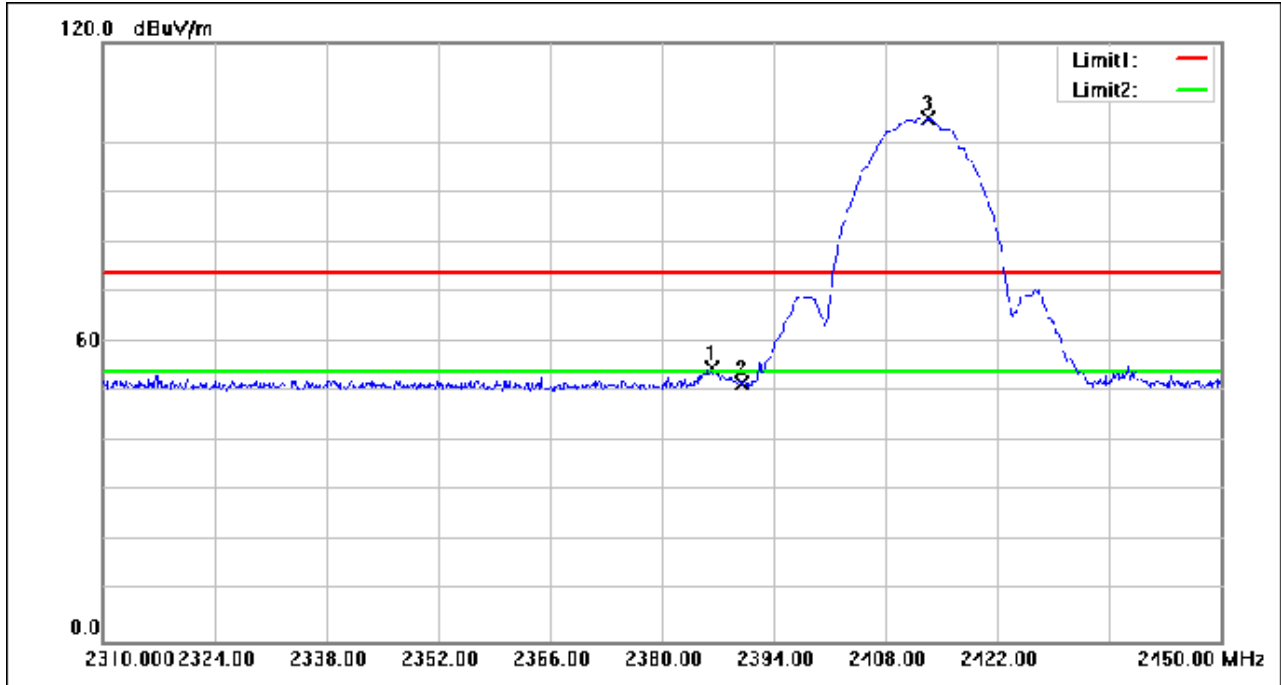


Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

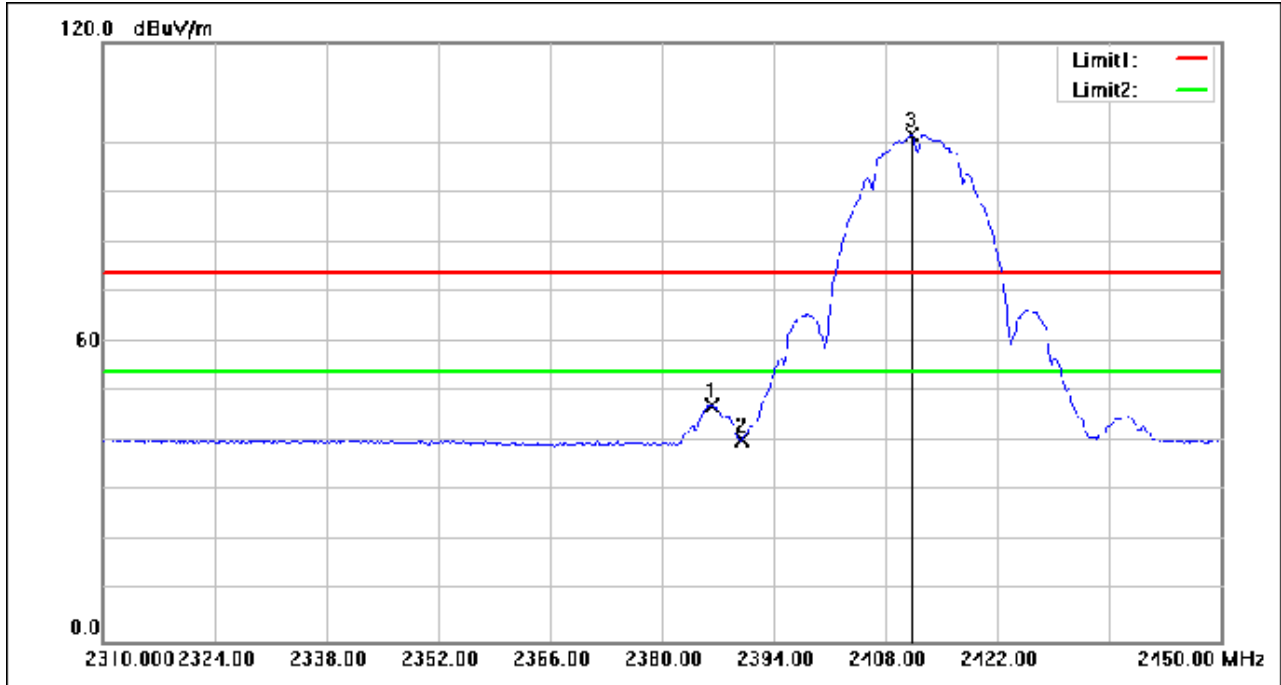


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.160	72.09	-24.72	47.37	54.00	-6.63	AVG
2	2390.000	65.00	-24.71	40.29	54.00	-13.71	AVG
3	2411.220	126.17	-24.60	101.57	54.00	47.57	AVG

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

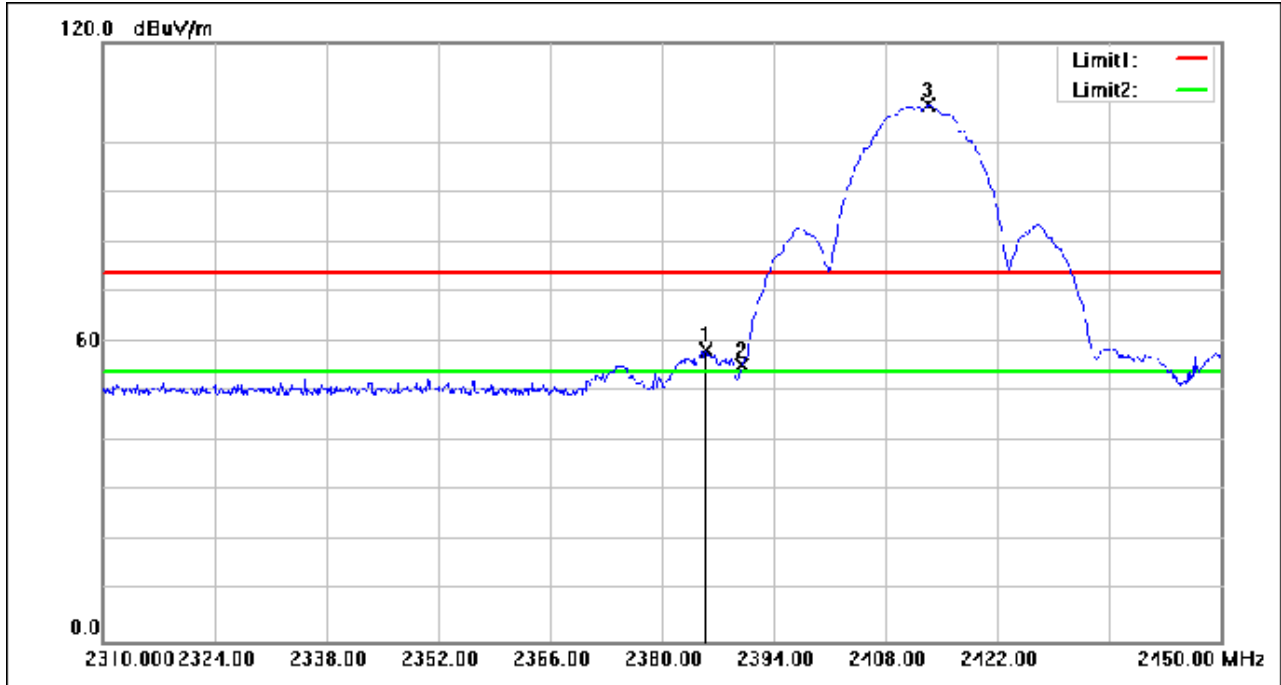

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

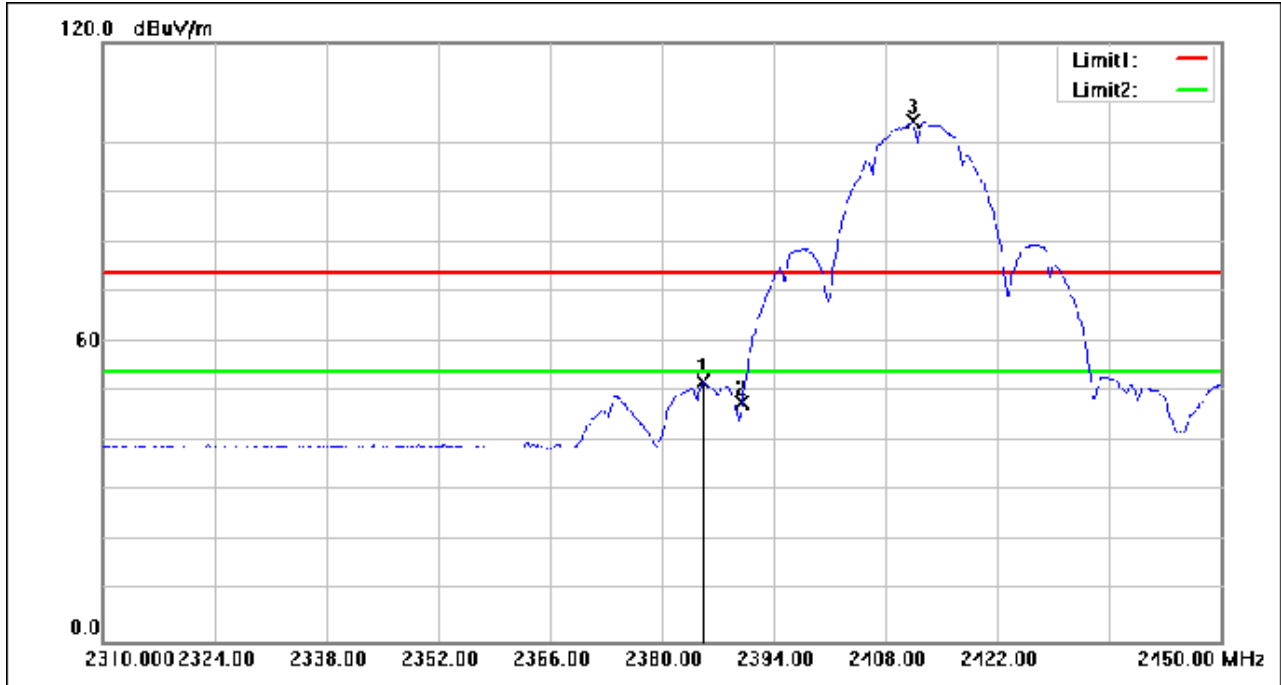

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.180	76.70	-24.73	51.97	54.00	-2.03	AVG
2	2390.000	72.44	-24.71	47.73	54.00	-6.27	AVG
3	2411.360	128.78	-24.60	104.18	54.00	50.18	AVG

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High




No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.200	128.15	-24.37	103.78	74.00	29.78	peak
2	2483.500	76.09	-24.27	51.82	74.00	-22.18	peak
3	2490.050	77.39	-24.24	53.15	74.00	-20.85	peak
4	2500.000	76.77	-24.19	52.58	74.00	-21.42	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High




No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.200	131.85	-24.37	107.48	74.00	33.48	peak
2	2483.500	82.73	-24.27	58.46	74.00	-15.54	peak
3	2486.450	84.12	-24.25	59.87	74.00	-14.13	peak
4	2500.000	81.52	-24.19	57.33	74.00	-16.67	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

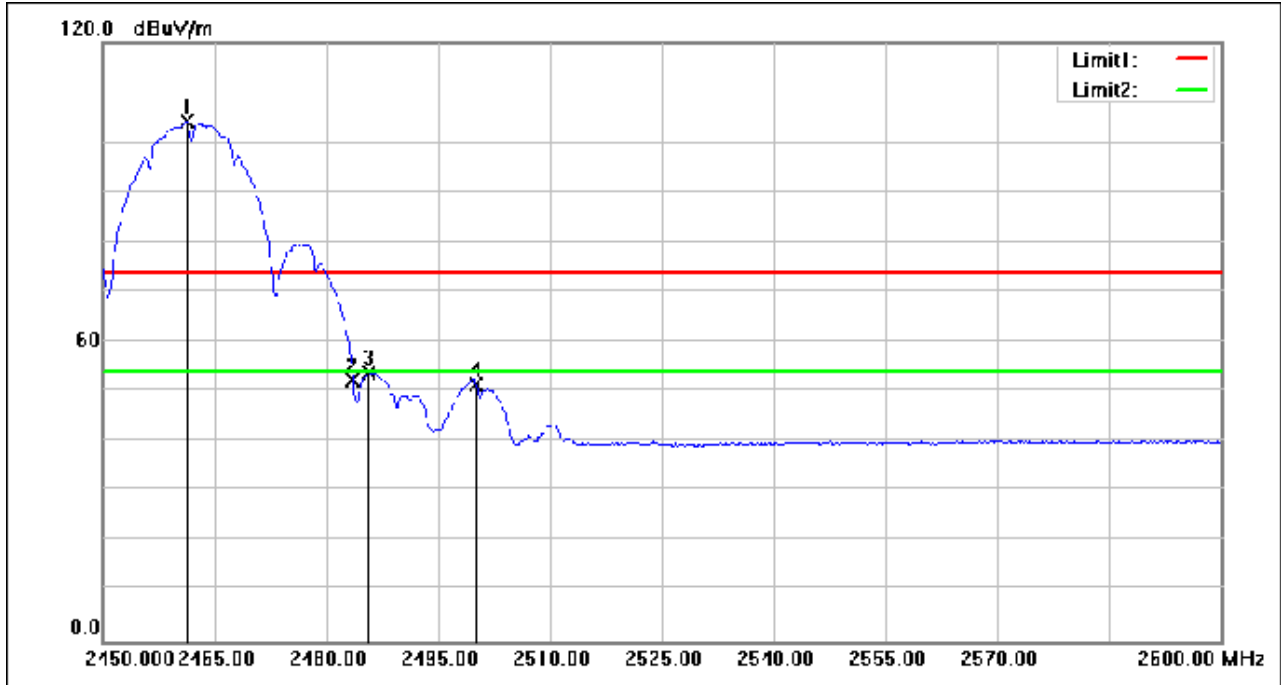


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	128.58	-24.37	104.21	54.00	50.21	AVG
2	2483.500	76.75	-24.27	52.48	54.00	-1.52	AVG
3	2485.700	78.11	-24.26	53.85	54.00	-0.15	AVG
4	2500.000	75.54	-24.19	51.35	54.00	-2.65	AVG

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

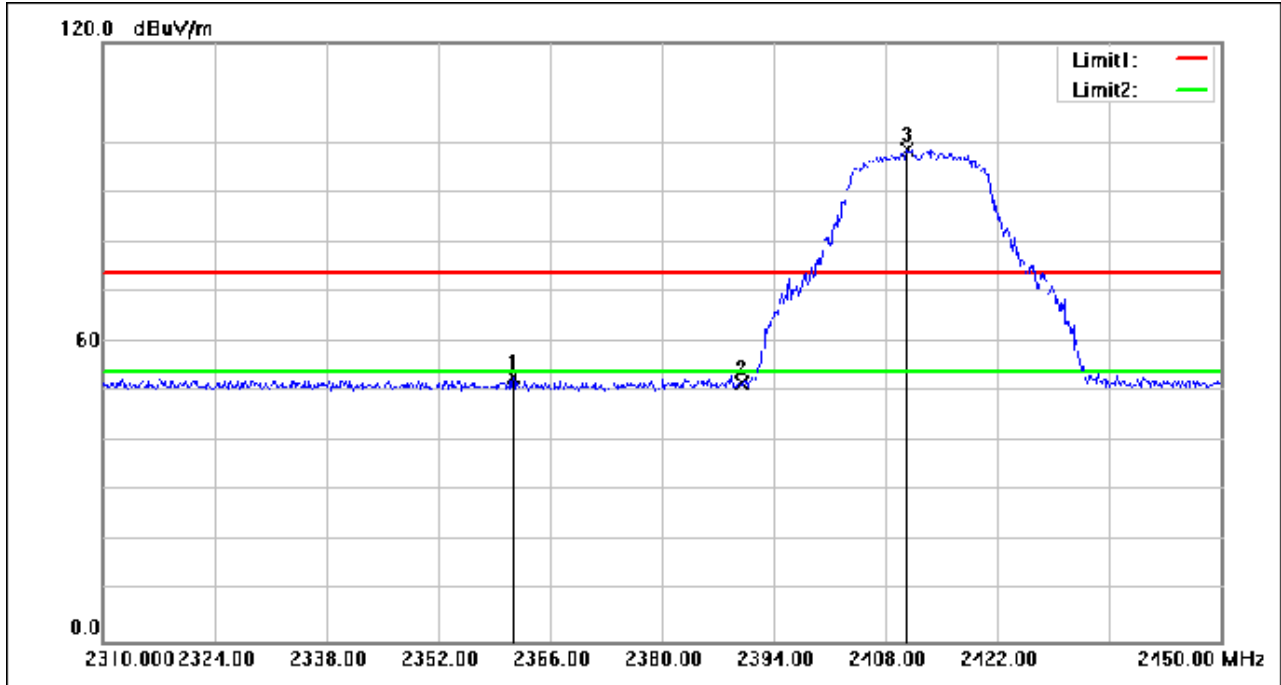


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.380	77.85	-24.84	53.01	74.00	-20.99	peak
2	2390.000	76.36	-24.71	51.65	74.00	-22.35	peak
3	2410.660	123.08	-24.61	98.47	74.00	24.47	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

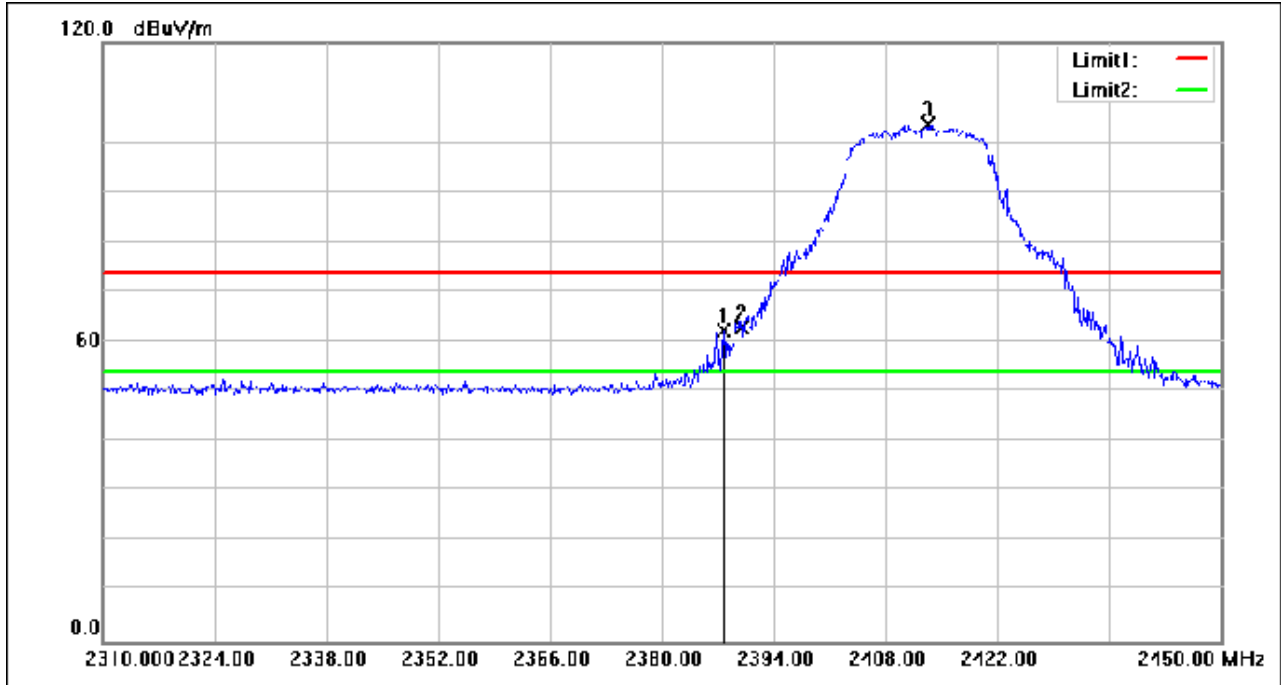


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.700	86.89	-24.72	62.17	74.00	-11.83	peak
2	2390.000	87.49	-24.71	62.78	74.00	-11.22	peak
3	2413.320	128.13	-24.60	103.53	74.00	29.53	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

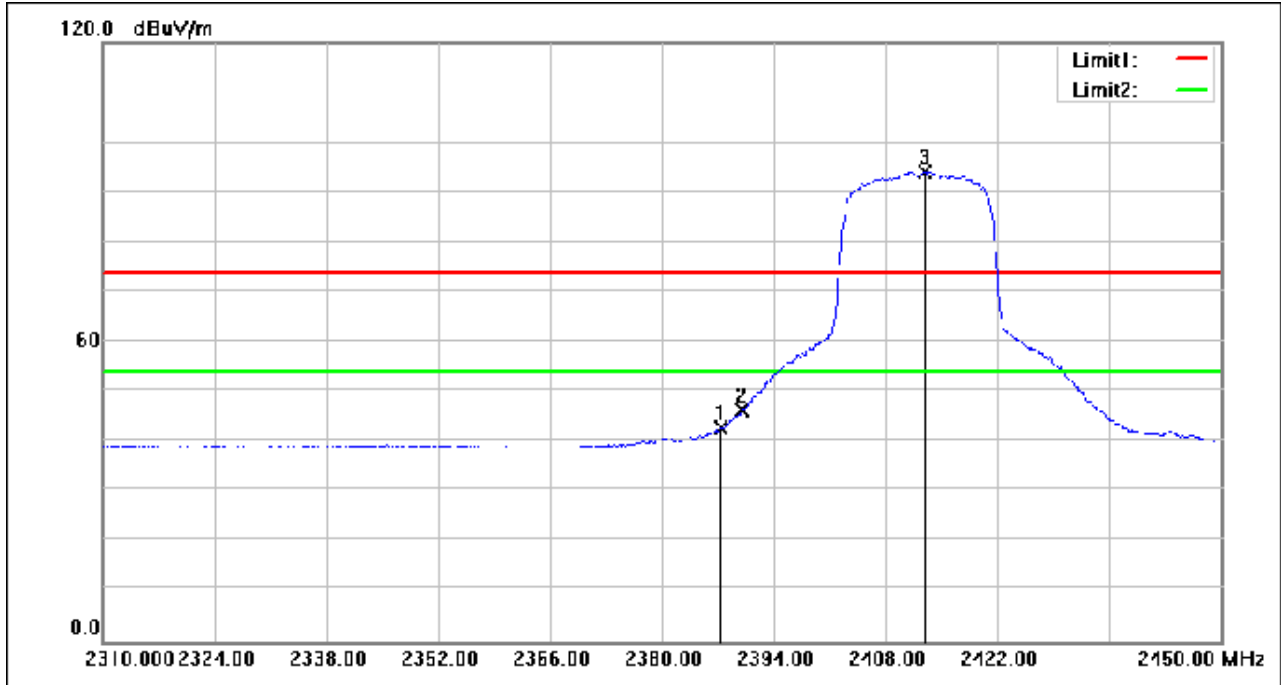


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.420	67.53	-24.72	42.81	54.00	-11.19	AVG
2	2390.000	71.07	-24.71	46.36	54.00	-7.64	AVG
3	2412.900	118.73	-24.60	94.13	54.00	40.13	AVG

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

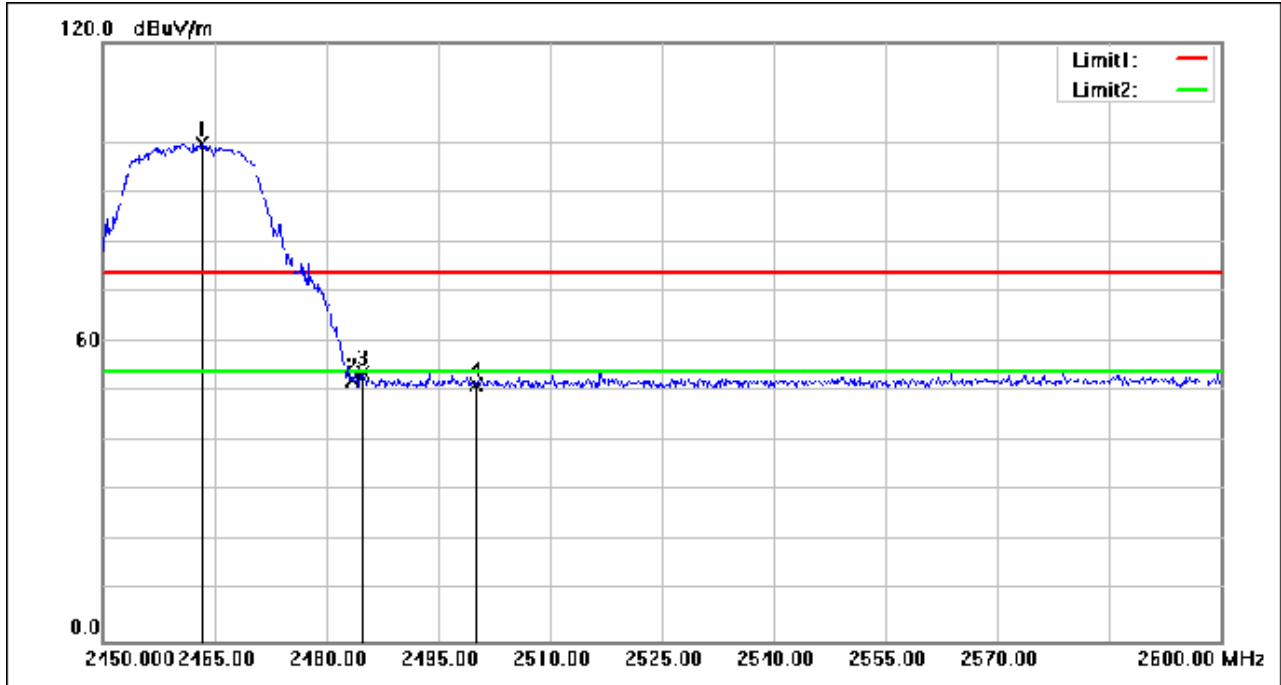


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.350	124.13	-24.37	99.76	74.00	25.76	peak
2	2483.500	76.71	-24.27	52.44	74.00	-21.56	peak
3	2484.800	78.23	-24.26	53.97	74.00	-20.03	peak
4	2500.000	75.51	-24.19	51.32	74.00	-22.68	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

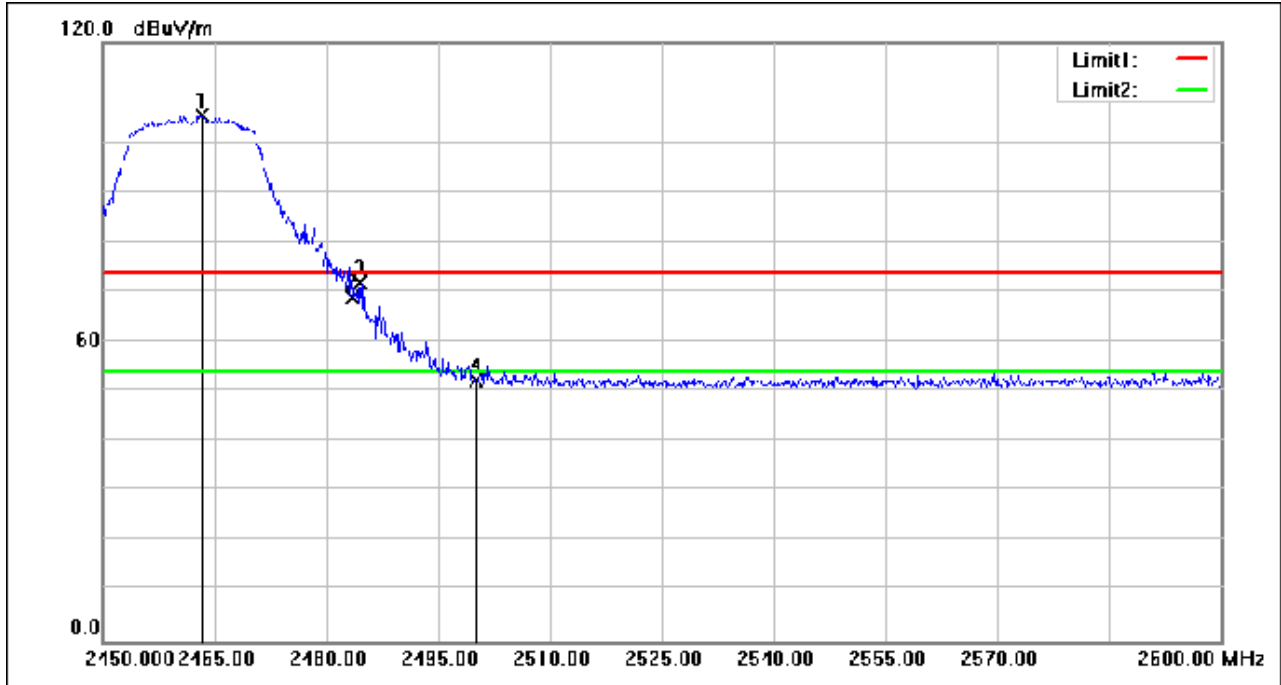


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.350	129.95	-24.37	105.58	74.00	31.58	peak
2	2483.500	93.01	-24.27	68.74	74.00	-5.26	peak
3	2484.500	96.05	-24.26	71.79	74.00	-2.21	peak
4	2500.000	76.46	-24.19	52.27	74.00	-21.73	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

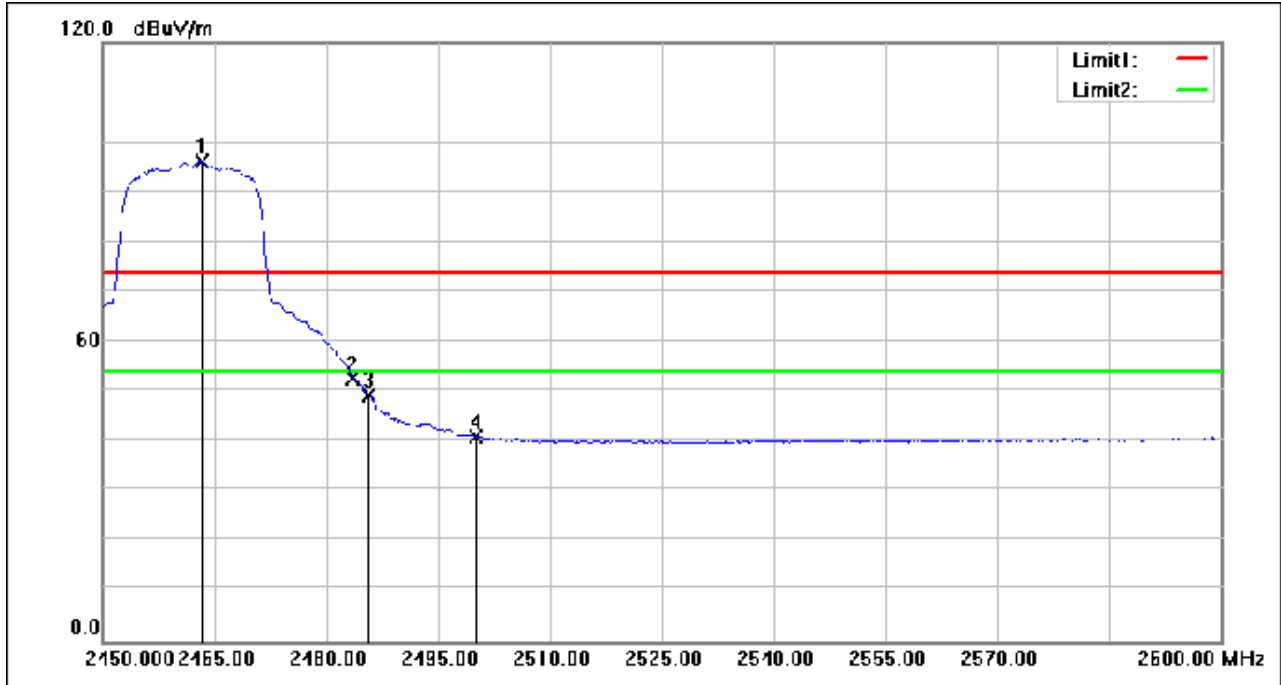


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.200	120.49	-24.37	96.12	54.00	42.12	AVG
2	2483.500	77.04	-24.27	52.77	54.00	-1.23	AVG
3	2485.700	73.67	-24.26	49.41	54.00	-4.59	AVG
4	2500.000	65.03	-24.19	40.84	54.00	-13.16	AVG

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

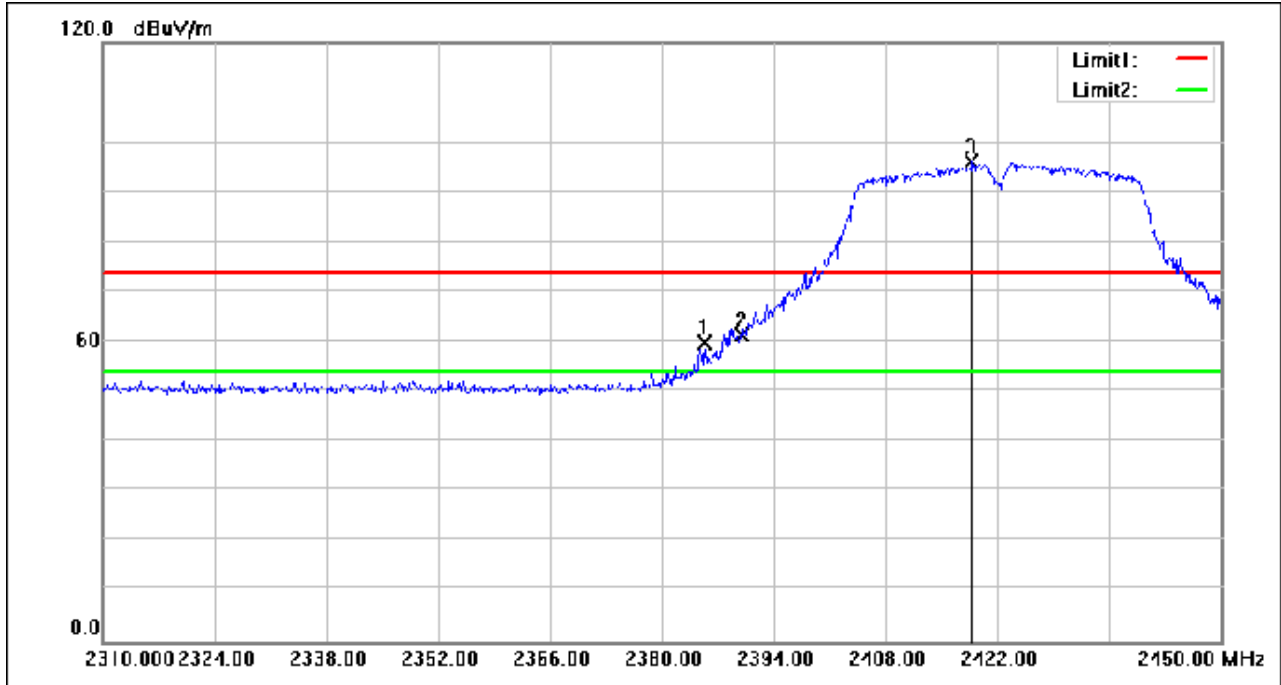


Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

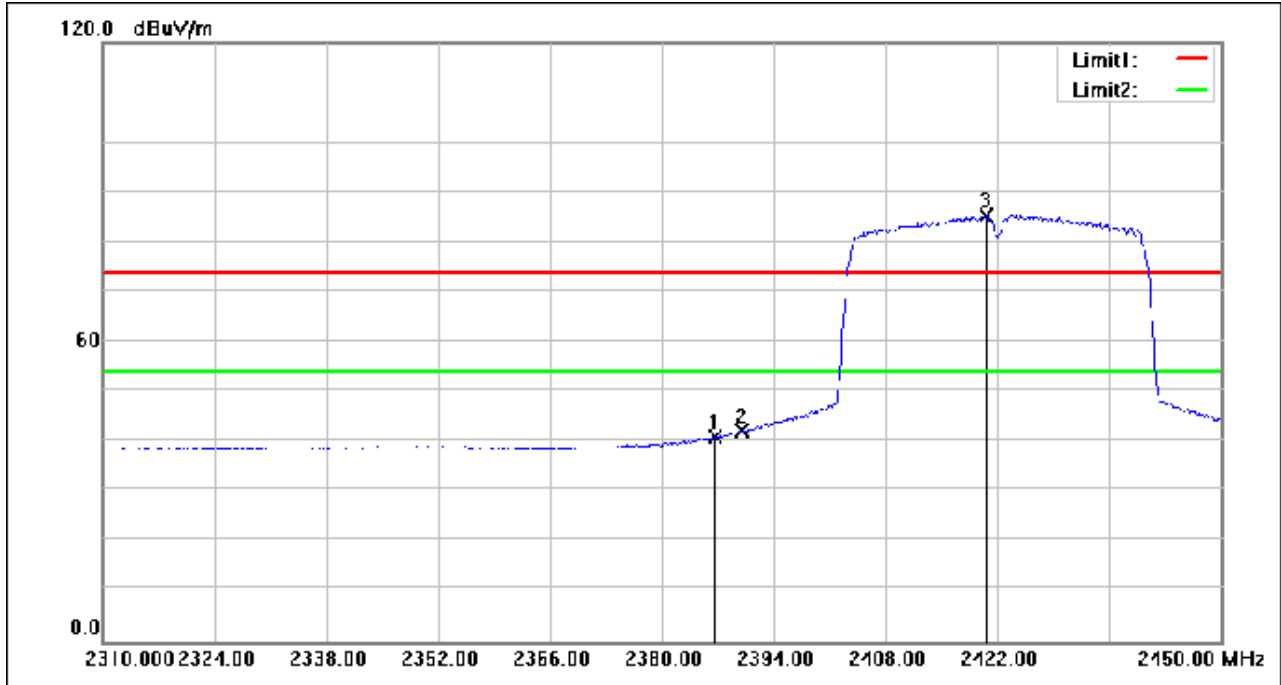


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.580	65.72	-24.72	41.00	54.00	-13.00	AVG
2	2390.000	66.94	-24.71	42.23	54.00	-11.77	AVG
3	2420.600	109.96	-24.57	85.39	54.00	31.39	AVG

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

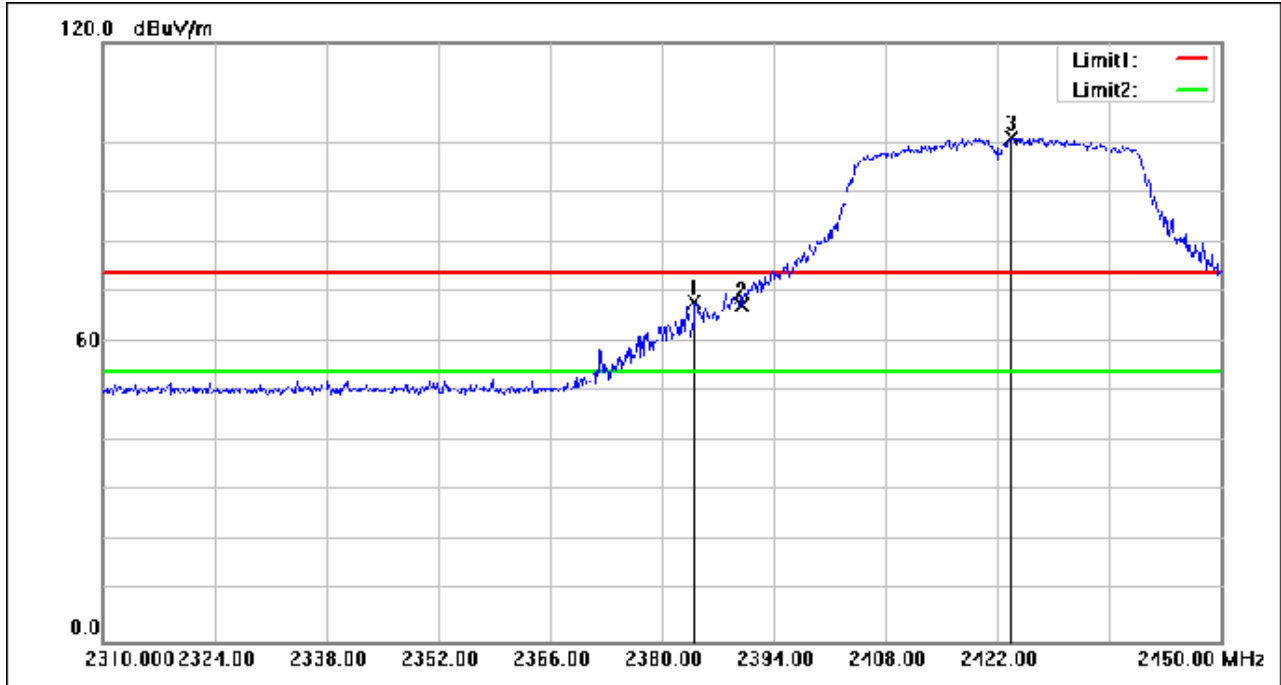


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.060	92.54	-24.73	67.81	74.00	-6.19	peak
2	2390.000	92.06	-24.71	67.35	74.00	-6.65	peak
3	2423.820	125.56	-24.54	101.02	74.00	27.02	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

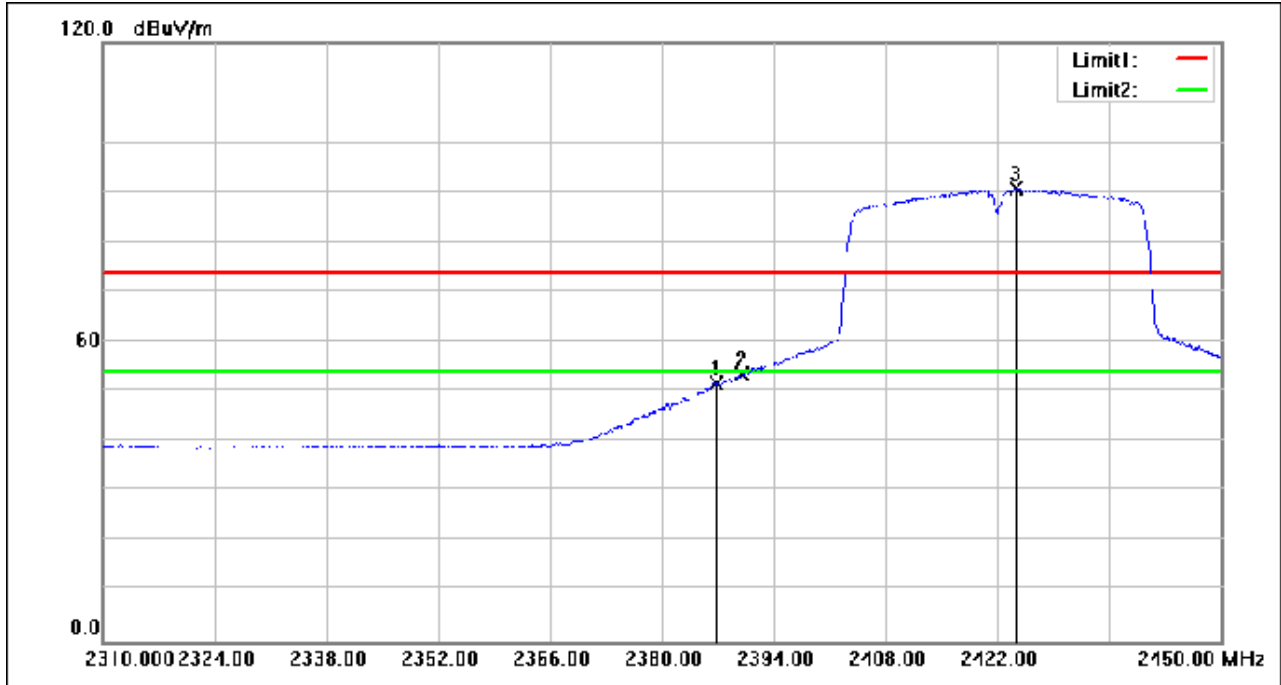


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.720	76.59	-24.72	51.87	54.00	-2.13	AVG
2	2390.000	78.26	-24.71	53.55	54.00	-0.45	AVG
3	2424.240	115.41	-24.54	90.87	54.00	36.87	AVG

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

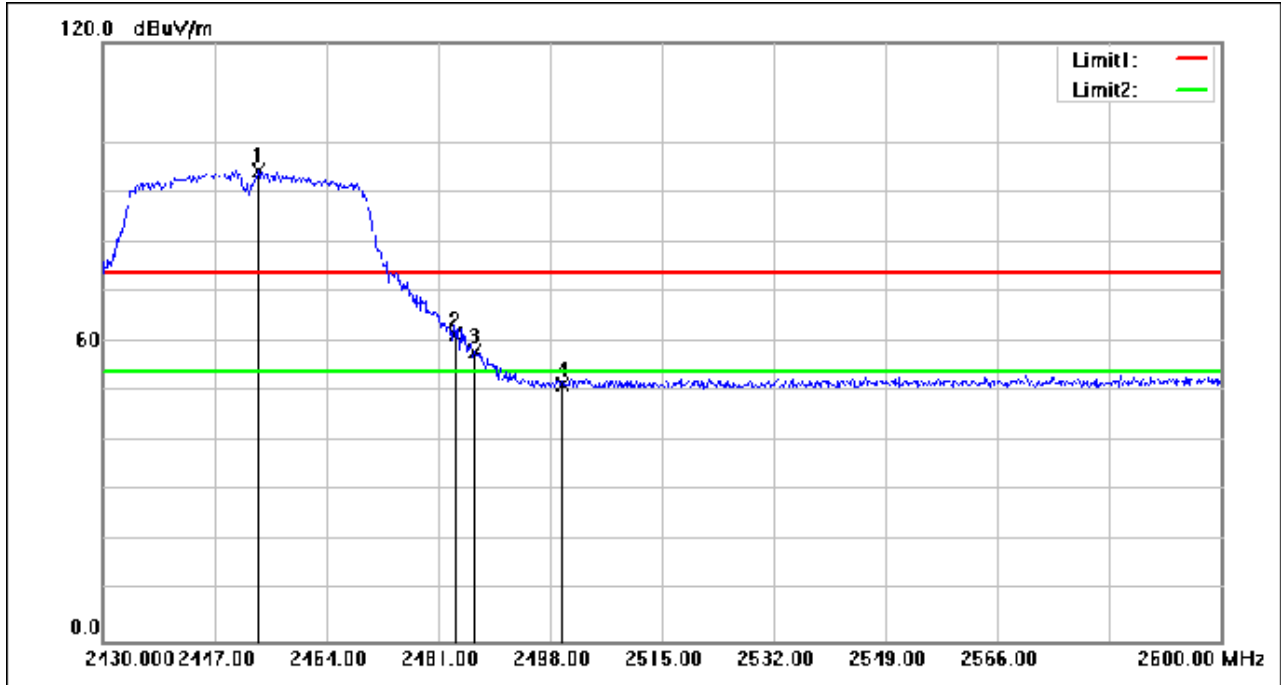


Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

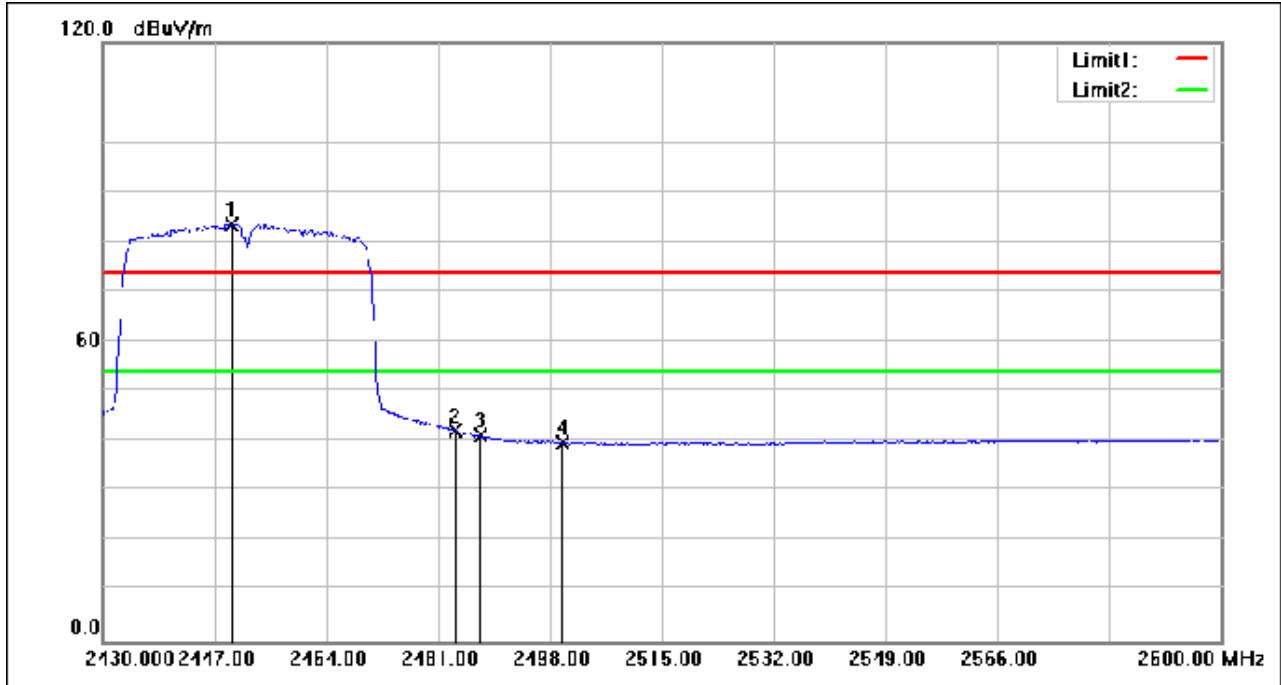


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2449.550	108.09	-24.43	83.66	54.00	29.66	AVG
2	2483.500	66.53	-24.27	42.26	54.00	-11.74	AVG
3	2487.460	65.42	-24.25	41.17	54.00	-12.83	AVG
4	2500.000	63.85	-24.19	39.66	54.00	-14.34	AVG

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

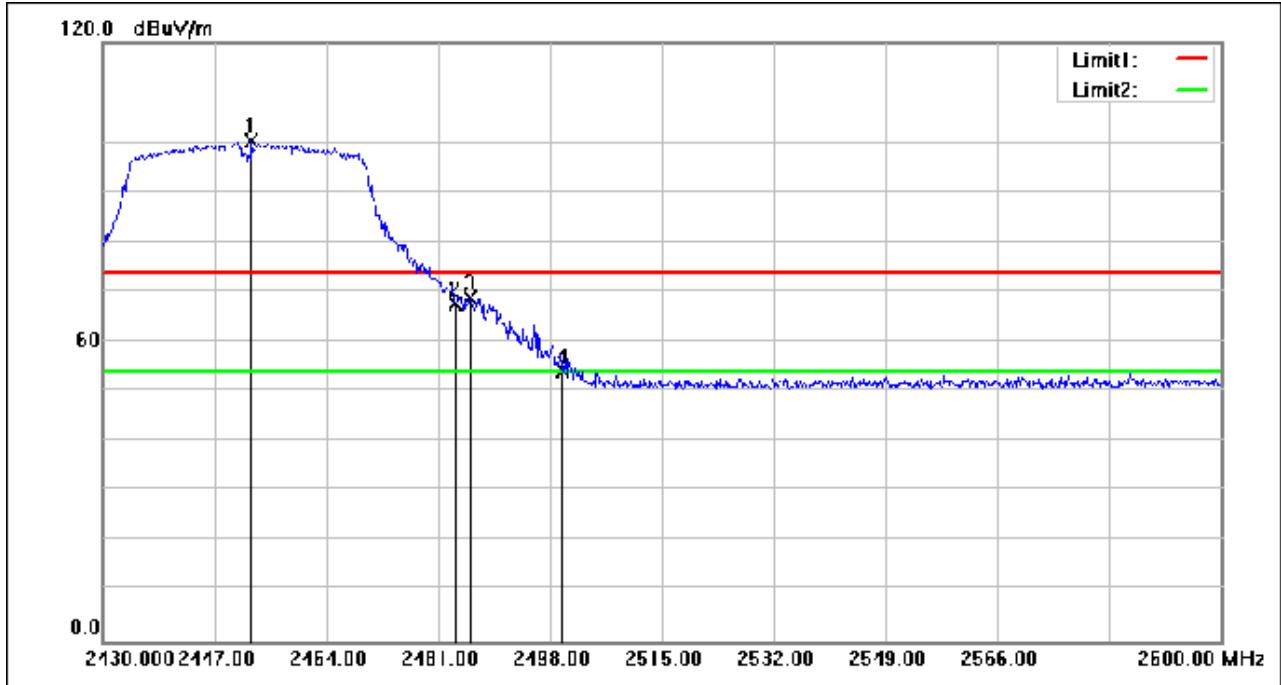


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2452.610	124.76	-24.41	100.35	74.00	26.35	peak
2	2483.500	91.87	-24.27	67.60	74.00	-6.40	peak
3	2485.760	93.02	-24.26	68.76	74.00	-5.24	peak
4	2500.000	78.30	-24.19	54.11	74.00	-19.89	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

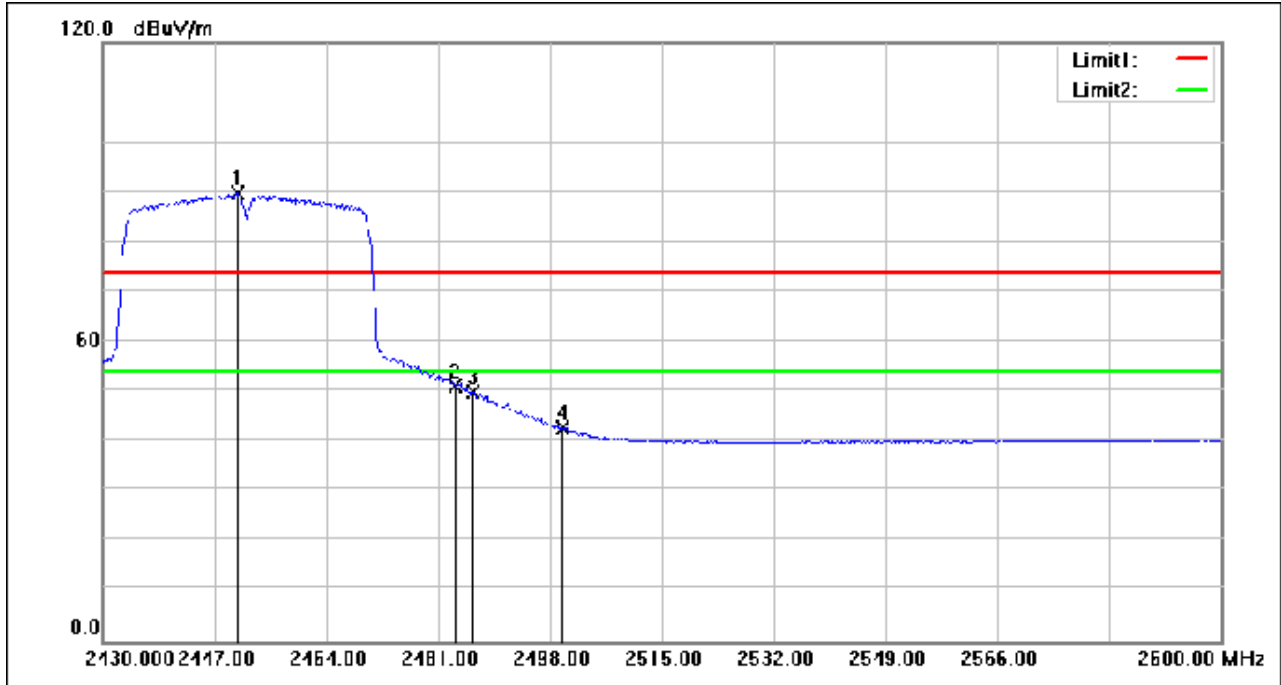


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.400	114.19	-24.42	89.77	54.00	35.77	AVG
2	2483.500	75.53	-24.27	51.26	54.00	-2.74	AVG
3	2486.270	74.23	-24.26	49.97	54.00	-4.03	AVG
4	2500.000	66.84	-24.19	42.65	54.00	-11.35	AVG

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

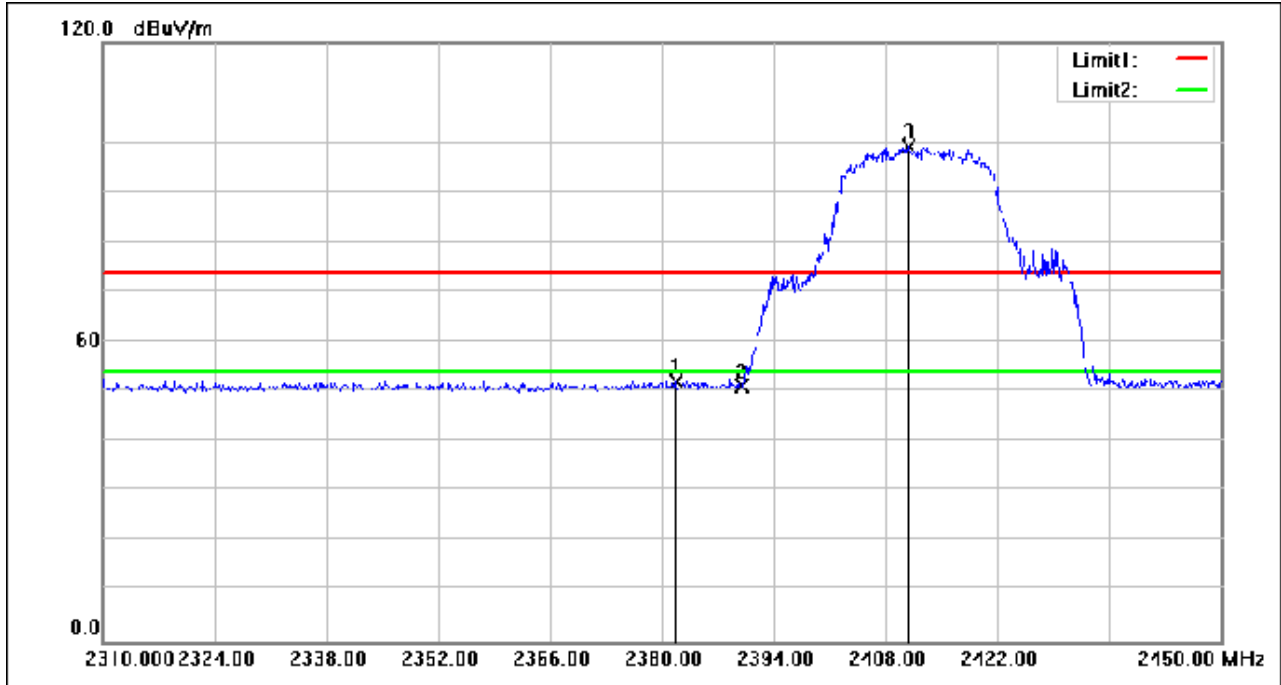


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.680	76.78	-24.74	52.04	74.00	-21.96	peak
2	2390.000	75.87	-24.71	51.16	74.00	-22.84	peak
3	2410.800	123.68	-24.61	99.07	74.00	25.07	peak

Test Mode: 00; Polarity: Vertical; Modulation:802. 802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

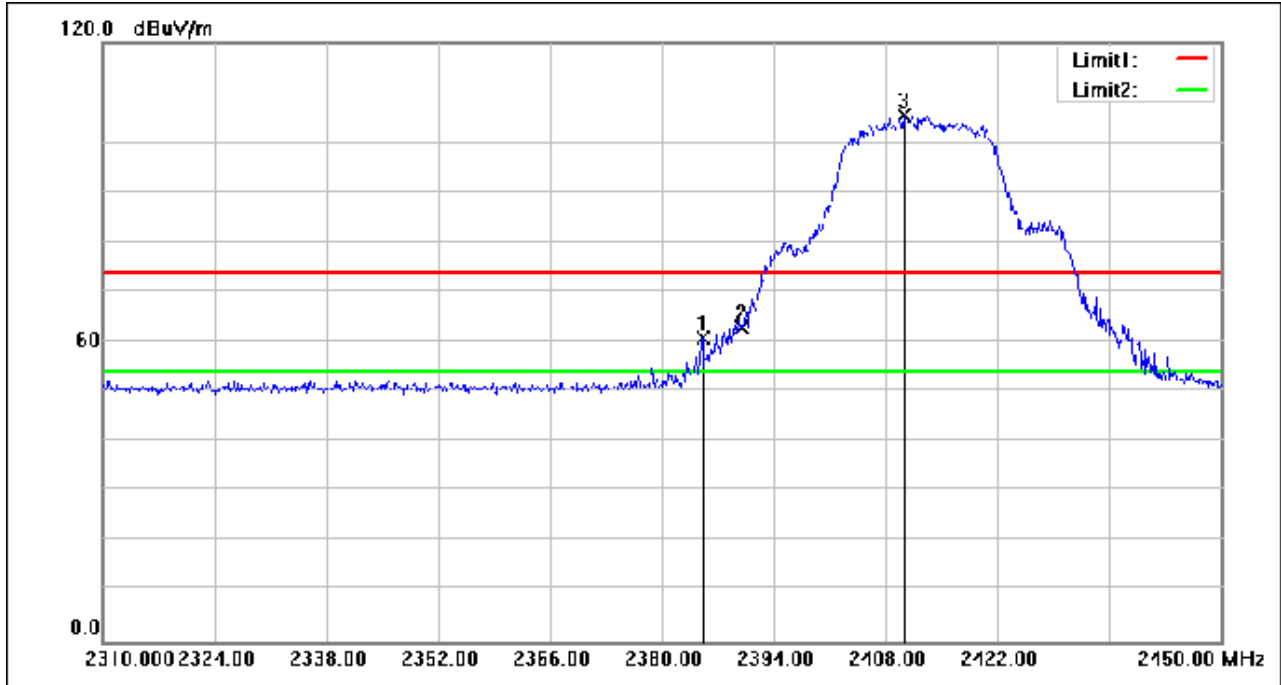

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.040	85.53	-24.73	60.80	74.00	-13.20	peak
2	2390.000	87.50	-24.71	62.79	74.00	-11.21	peak
3	2410.240	130.04	-24.61	105.43	74.00	31.43	peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

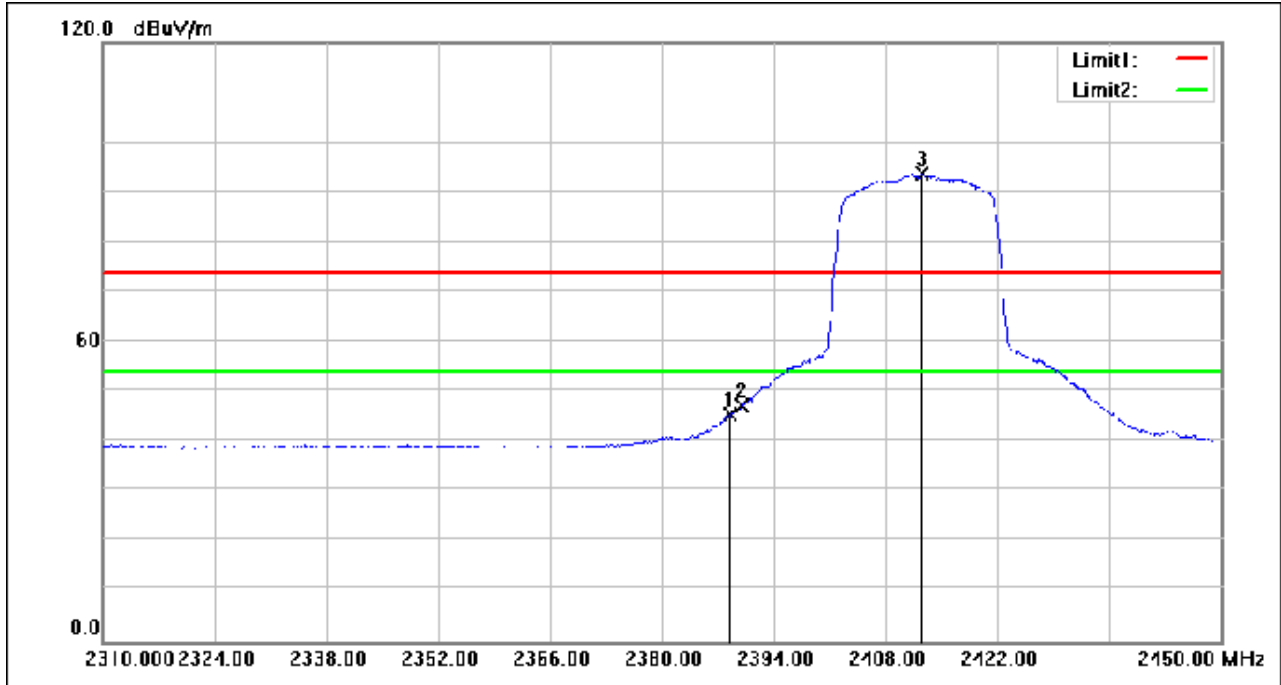


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	70.30	-24.71	45.59	54.00	-8.41	AVG
2	2390.000	71.83	-24.71	47.12	54.00	-6.88	AVG
3	2412.620	118.22	-24.60	93.62	54.00	39.62	AVG

Test Mode: 00; Polarity: Horizontal; Modulation: 802. 802.11ax(Full RU0); Bandwidth:20MHz; Channel:High



No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.550	127.39	-24.39	103.00	74.00	29.00	peak
2	2483.500	81.98	-24.27	57.71	74.00	-16.29	peak
3	2485.550	78.01	-24.26	53.75	74.00	-20.25	peak
4	2500.000	76.46	-24.19	52.27	74.00	-21.73	peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802. 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: High

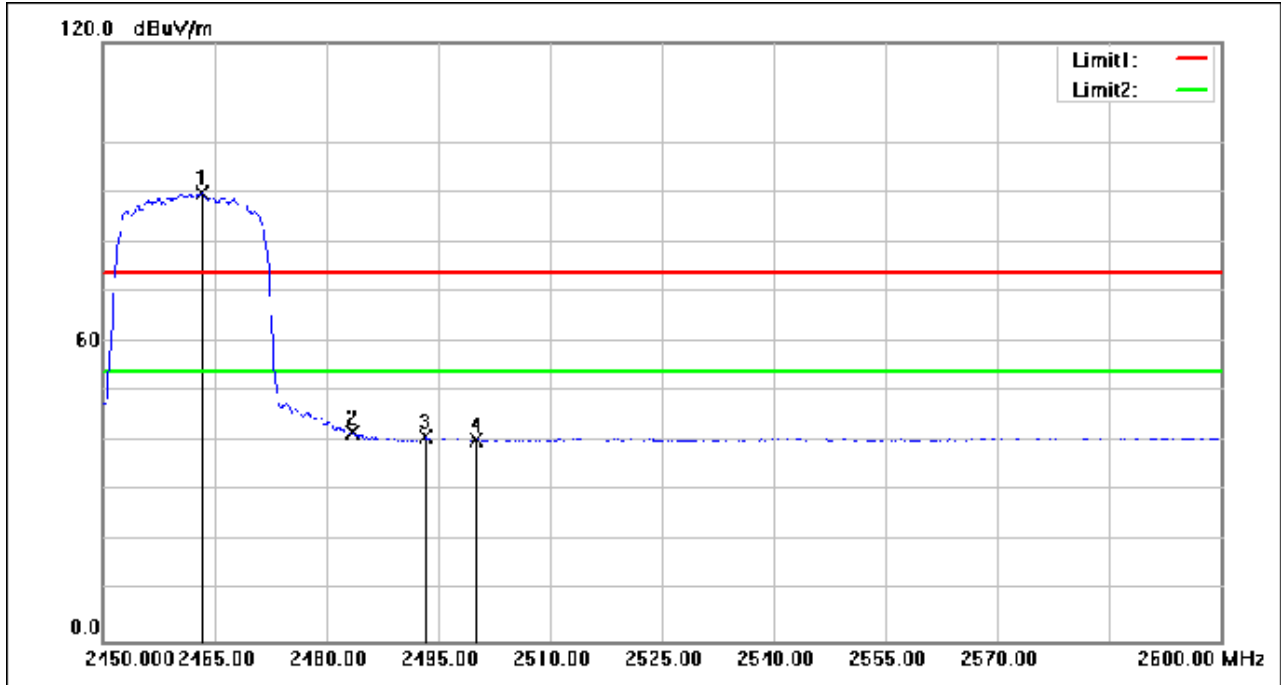


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.350	114.20	-24.37	89.83	54.00	35.83	AVG
2	2483.500	66.08	-24.27	41.81	54.00	-12.19	AVG
3	2493.350	65.06	-24.22	40.84	54.00	-13.16	AVG
4	2500.000	64.49	-24.19	40.30	54.00	-13.70	AVG

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:20MHz; Channel:High




No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.900	130.54	-24.37	106.17	74.00	32.17	peak
2	2483.500	95.11	-24.27	70.84	74.00	-3.16	peak
3	2486.450	92.92	-24.25	68.67	74.00	-5.33	peak
4	2500.000	76.53	-24.19	52.34	74.00	-21.66	peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

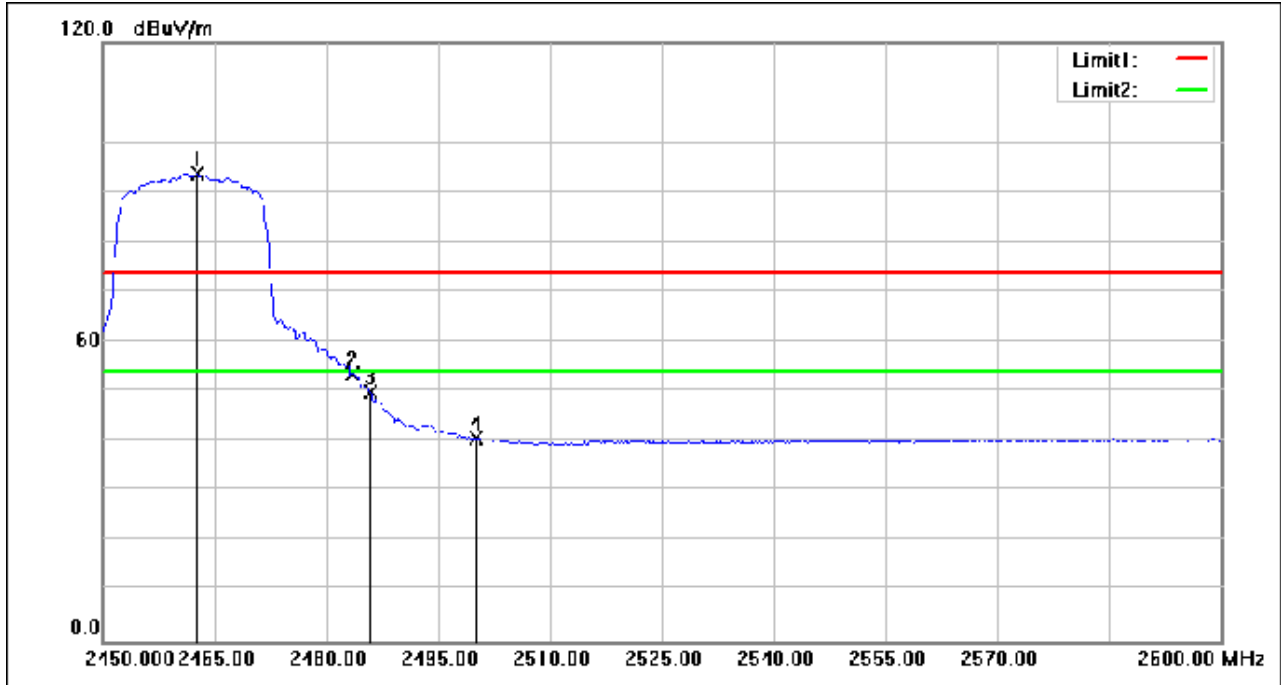


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.600	118.13	-24.37	93.76	54.00	39.76	AVG
2	2483.500	77.95	-24.27	53.68	54.00	-0.32	AVG
3	2485.850	74.27	-24.26	50.01	54.00	-3.99	AVG
4	2500.000	64.93	-24.19	40.74	54.00	-13.26	AVG

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

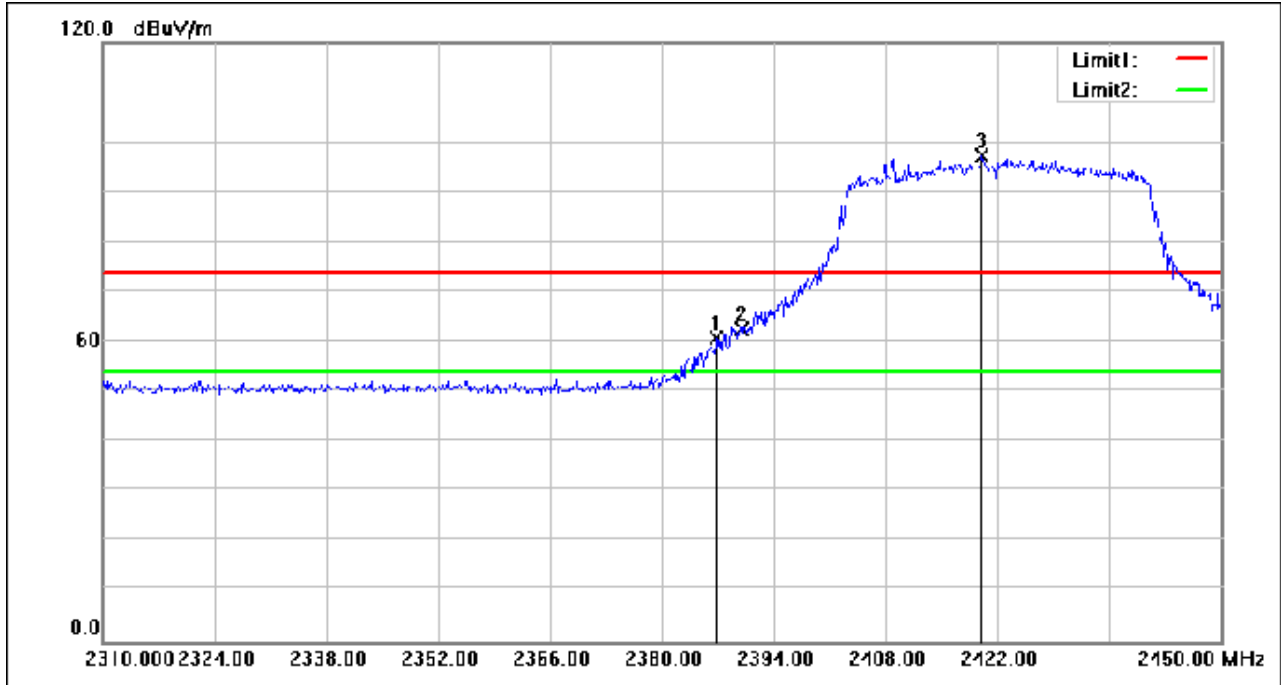


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.860	85.59	-24.72	60.87	74.00	-13.13	peak
2	2390.000	87.39	-24.71	62.68	74.00	-11.32	peak
3	2420.040	121.89	-24.57	97.32	74.00	23.32	peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

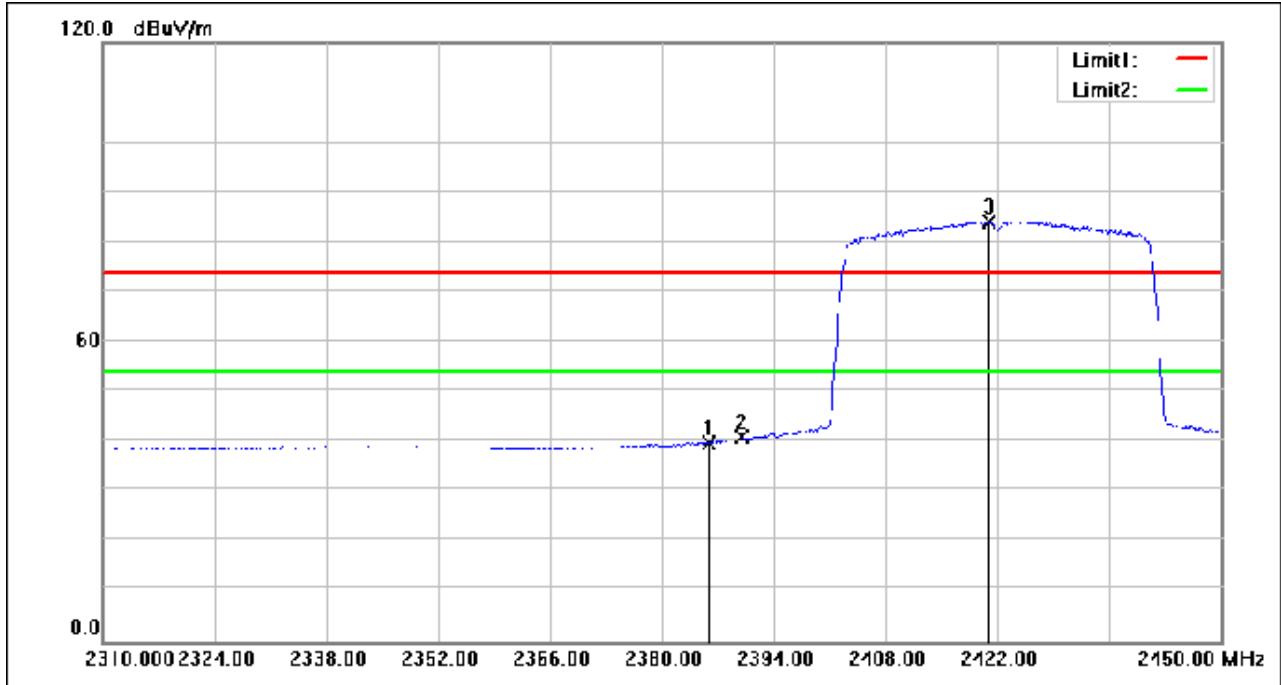


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.880	64.61	-24.72	39.89	54.00	-14.11	AVG
2	2390.000	65.60	-24.71	40.89	54.00	-13.11	AVG
3	2420.880	108.85	-24.57	84.28	54.00	30.28	AVG

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

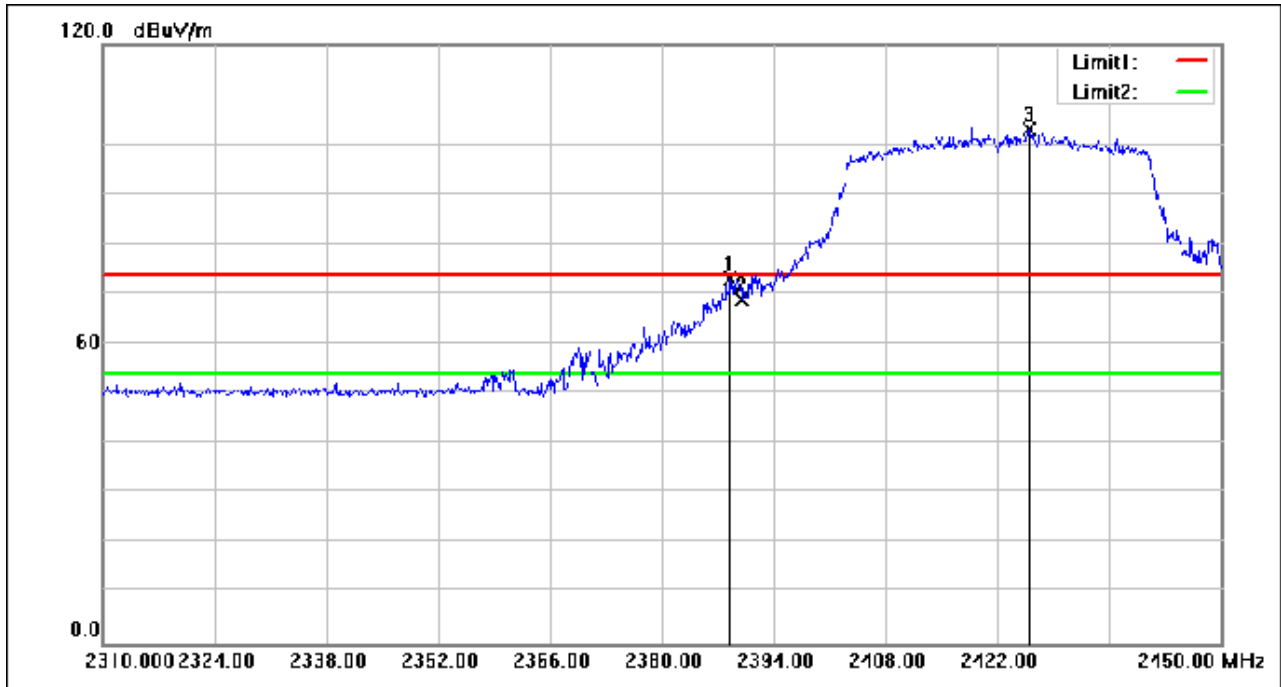


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	97.73	-24.71	73.02	74.00	-0.98	peak
2	2390.000	93.49	-24.71	68.78	74.00	-5.22	peak
3	2425.920	127.59	-24.54	103.05	74.00	29.05	peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

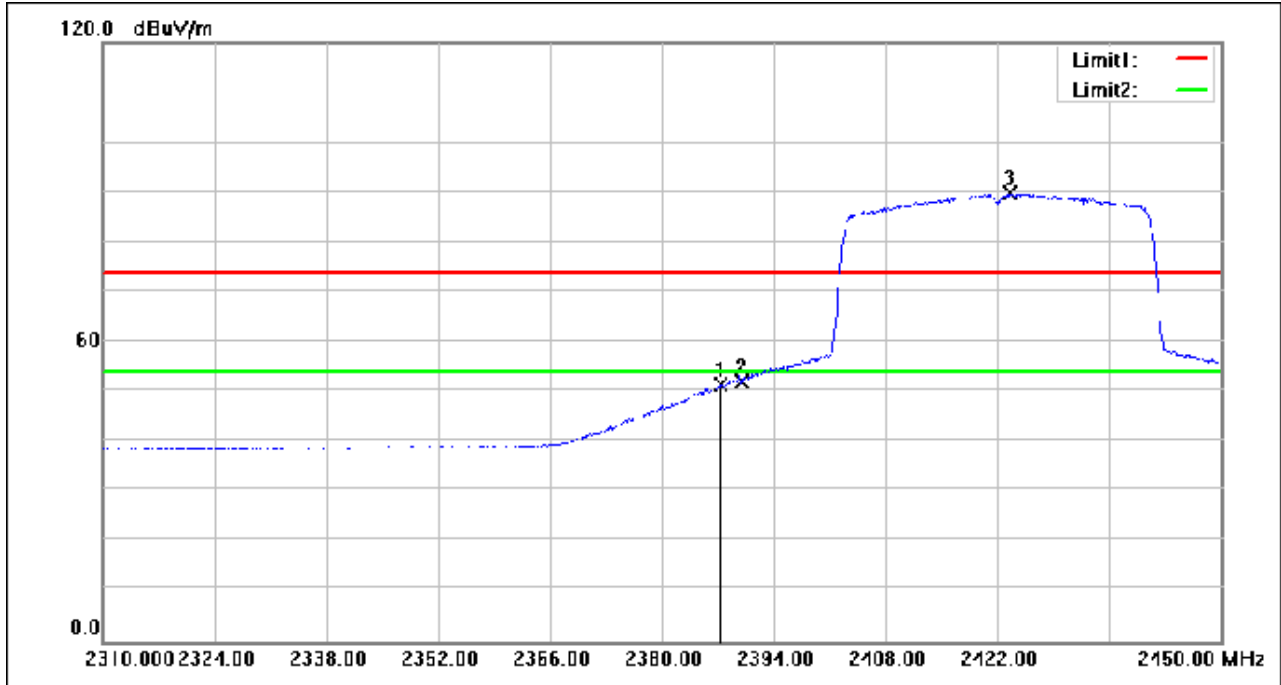


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.420	76.10	-24.72	51.38	54.00	-2.62	AVG
2	2390.000	76.83	-24.71	52.12	54.00	-1.88	AVG
3	2423.540	114.26	-24.54	89.72	54.00	35.72	AVG

Test Mode: 00; Polarity: Horizontal; Modulation: 802. 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

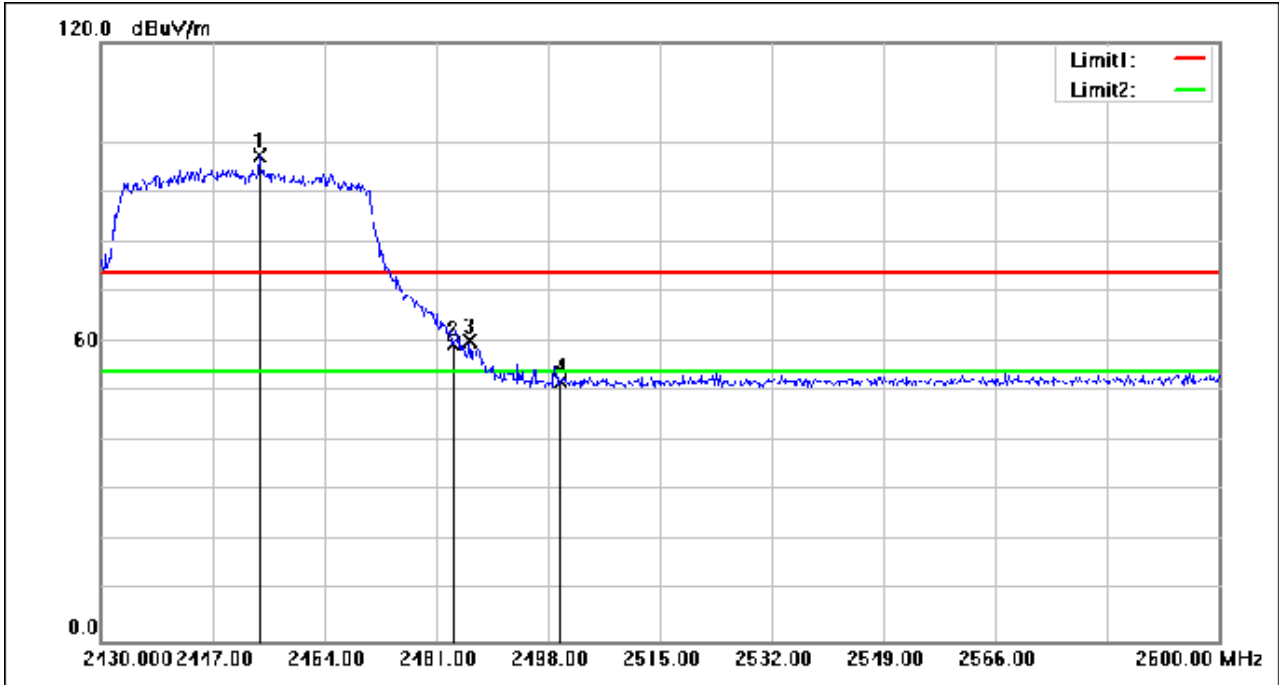


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.140	121.72	-24.40	97.32	74.00	23.32	peak
2	2483.500	83.76	-24.27	59.49	74.00	-14.51	peak
3	2486.100	84.29	-24.26	60.03	74.00	-13.97	peak
4	2500.000	76.26	-24.19	52.07	74.00	-21.93	peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

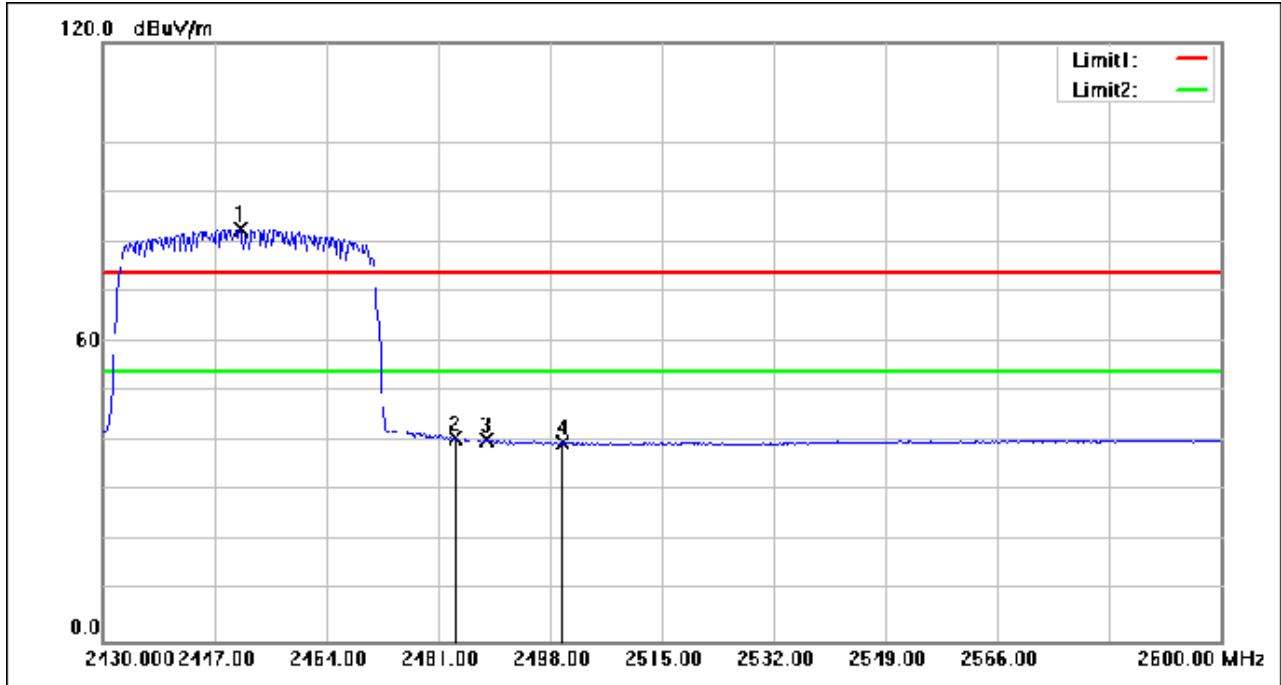


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.910	107.18	-24.42	82.76	54.00	28.76	AVG
2	2483.500	64.80	-24.27	40.53	54.00	-13.47	AVG
3	2488.310	64.50	-24.25	40.25	54.00	-13.75	AVG
4	2500.000	63.90	-24.19	39.71	54.00	-14.29	AVG

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

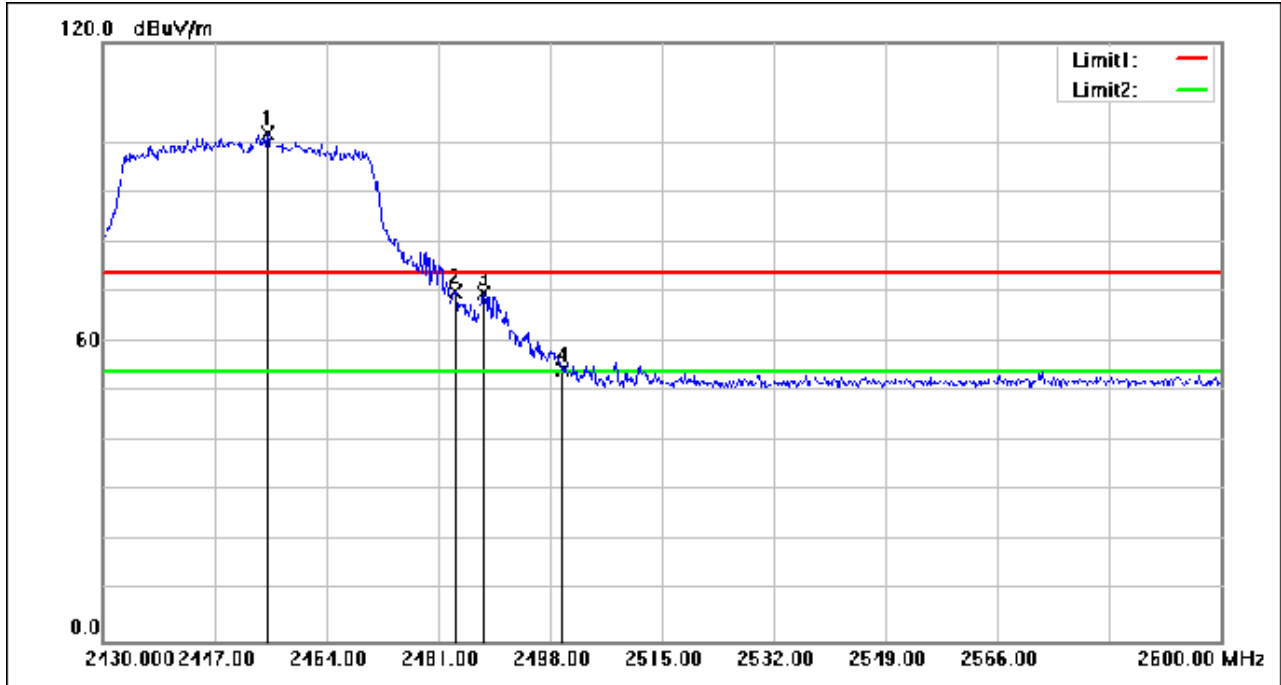

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.990	126.39	-24.40	101.99	74.00	27.99	peak
2	2483.500	94.37	-24.27	70.10	74.00	-3.90	peak
3	2487.800	93.90	-24.25	69.65	74.00	-4.35	peak
4	2500.000	78.70	-24.19	54.51	74.00	-19.49	peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

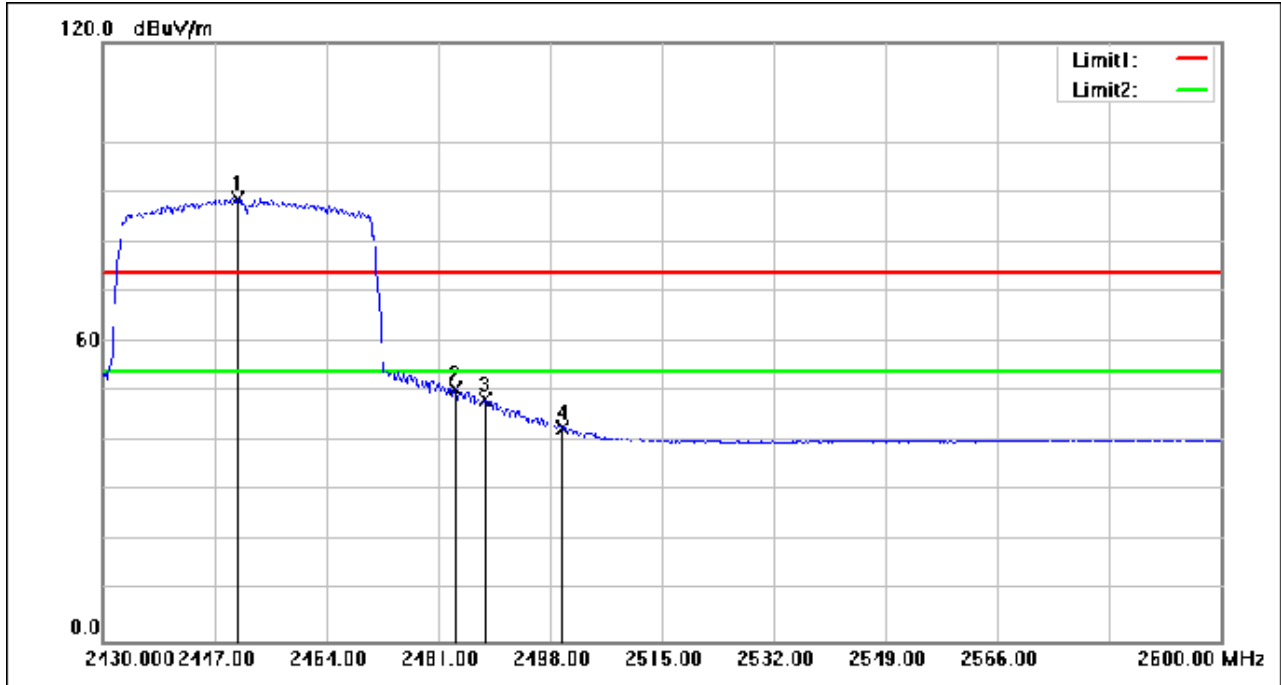

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.400	113.10	-24.42	88.68	54.00	34.68	AVG
2	2483.500	74.78	-24.27	50.51	54.00	-3.49	AVG
3	2488.140	72.57	-24.25	48.32	54.00	-5.68	AVG
4	2500.000	66.90	-24.19	42.71	54.00	-11.29	AVG

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.6 °C


Humidity: 48.7 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

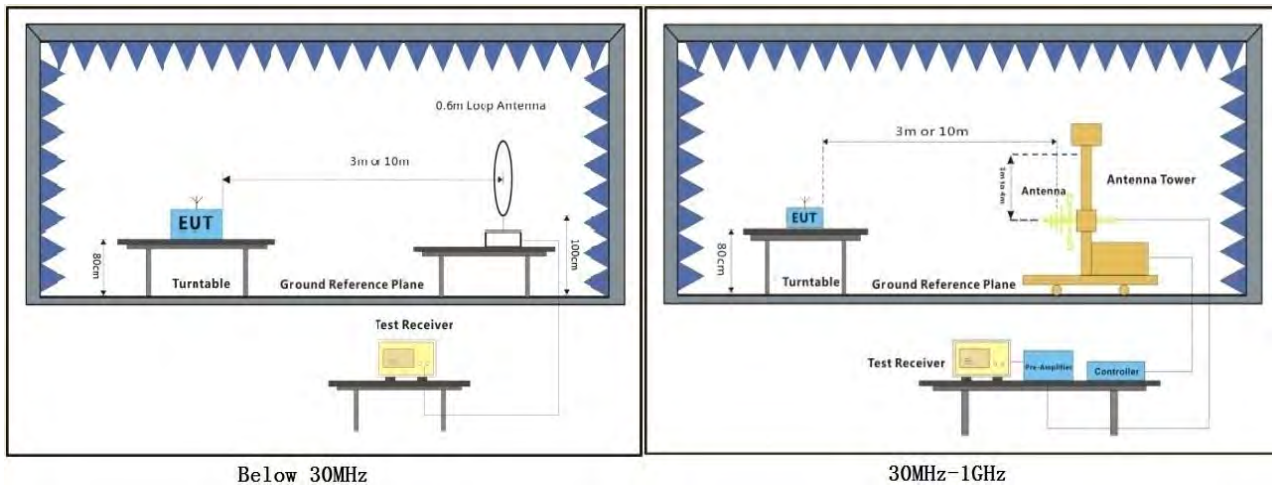

7.3.4 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 01; Polarity: Horizontal


Test Data :

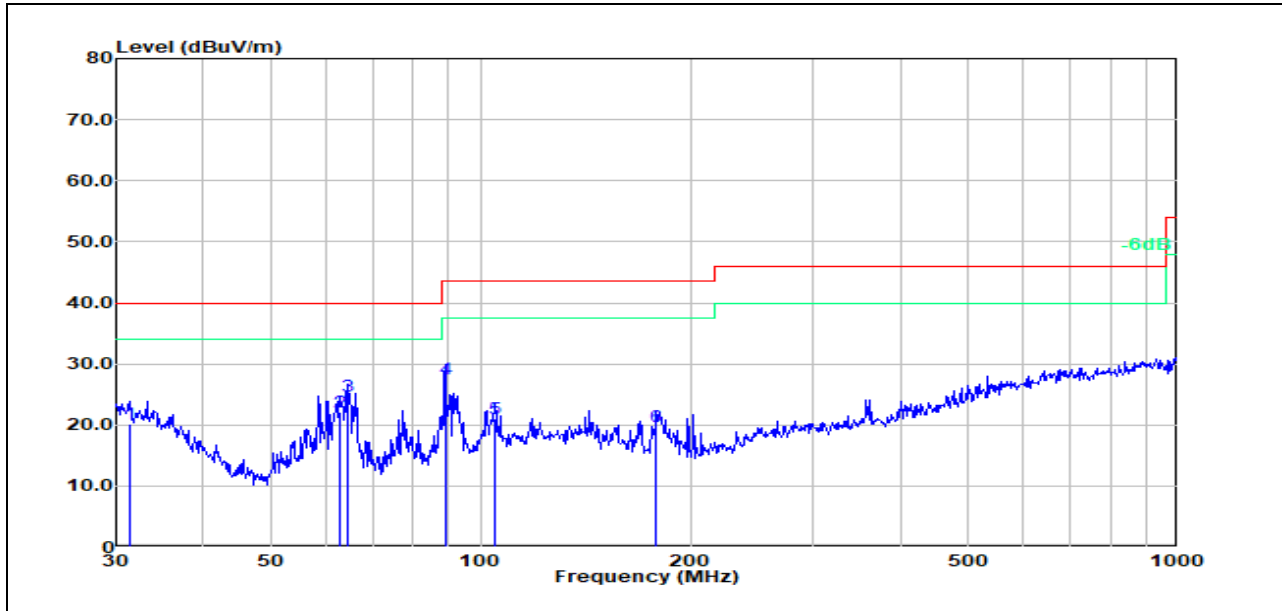

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	31.3990	2.03	18.23	20.26	40.00	-19.74	100	8	QP
2	62.6510	16.02	6.10	22.12	40.00	-17.88	200	356	QP
3	64.6590	18.16	6.45	24.61	40.00	-15.39	200	315	QP
4	88.9640	16.02	11.59	27.61	43.50	-15.89	100	360	QP
5	104.9030	7.85	13.25	21.10	43.50	-22.40	200	275	QP
6	178.7580	7.86	11.96	19.82	43.50	-23.68	200	4	QP

Test Mode: 01; Polarity: Vertical

Test Data :

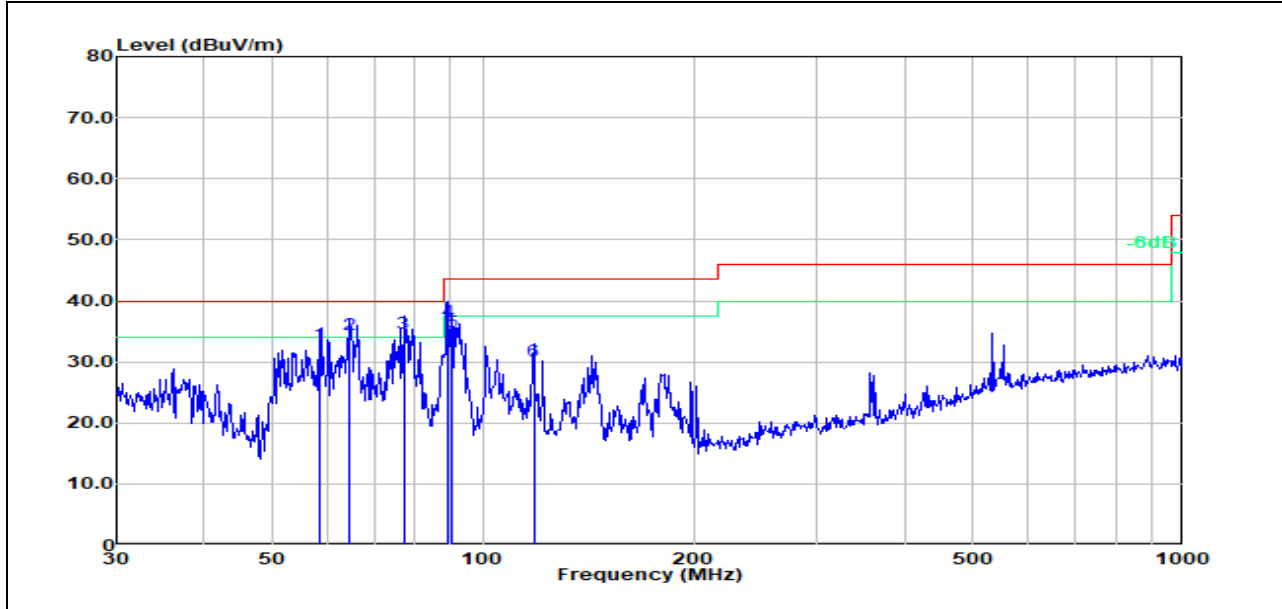

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	58.6126	27.01	5.88	32.89	40.00	-7.11	100	351	QP
2	64.6594	28.02	6.45	34.47	40.00	-5.53	100	351	QP
3	77.0505	25.03	9.72	34.75	40.00	-5.25	100	261	QP
4	88.9639	25.14	11.59	36.73	43.50	-6.77	100	268	QP
5	90.2205	22.96	12.03	34.99	43.50	-8.51	100	68	QP
6	118.1862	15.65	14.46	30.11	43.50	-13.39	100	356	QP

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 49.2 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

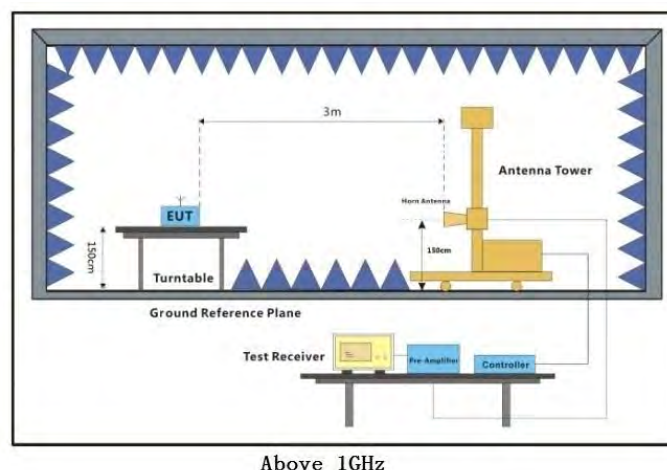


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

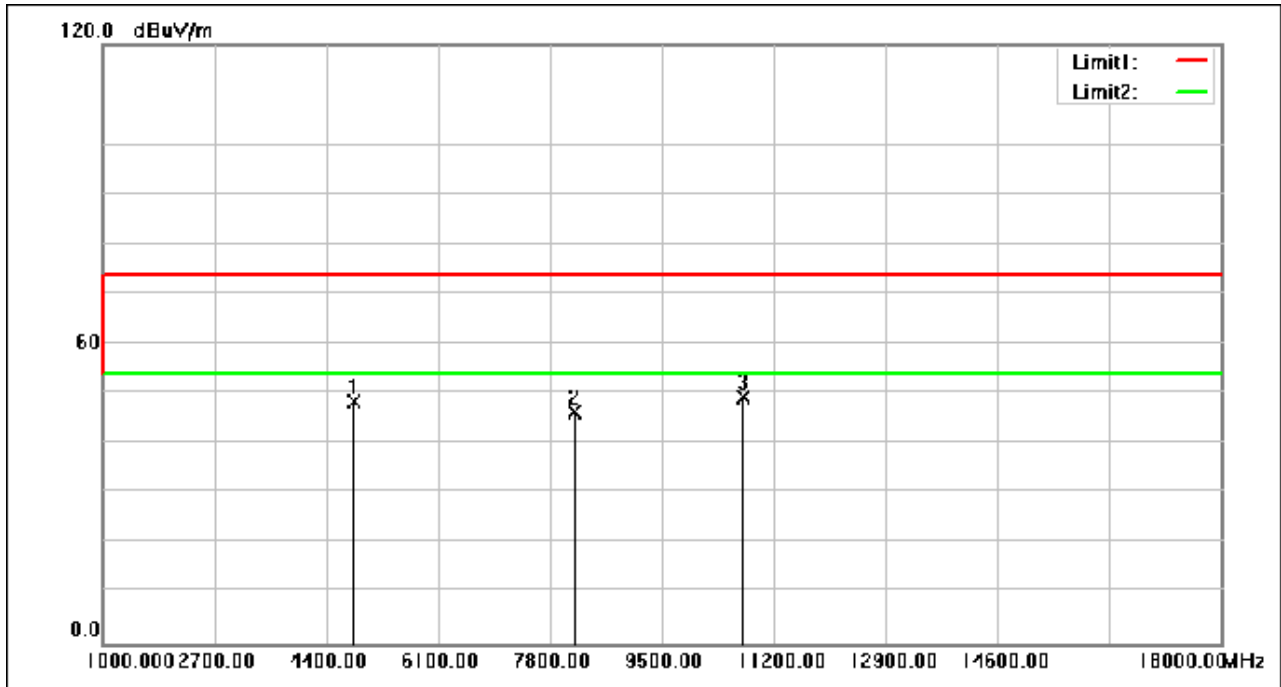


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.320	67.09	-18.54	48.55	74.00	-25.45	peak
2	8174.680	56.51	-10.29	46.22	74.00	-27.78	peak
3	10733.520	56.35	-6.91	49.44	74.00	-24.56	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

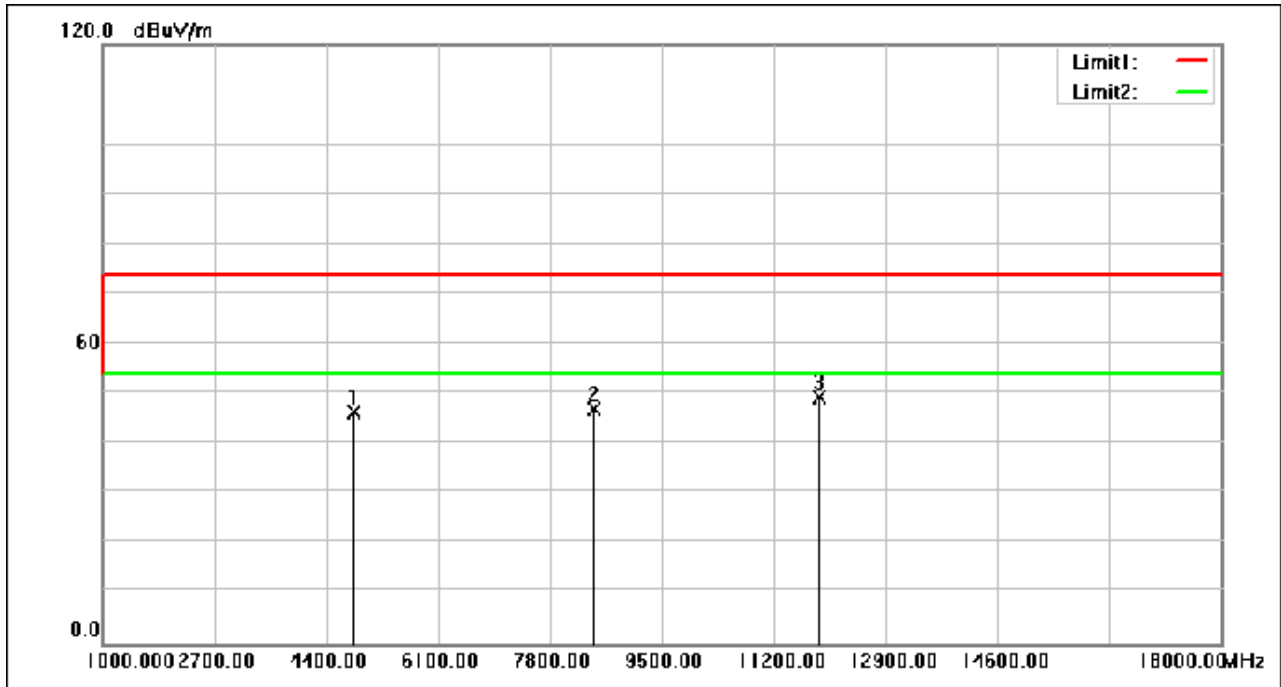


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.320	65.01	-18.54	46.47	74.00	-27.53	peak
2	8478.640	56.76	-9.79	46.97	74.00	-27.03	peak
3	11890.200	55.27	-6.04	49.23	74.00	-24.77	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

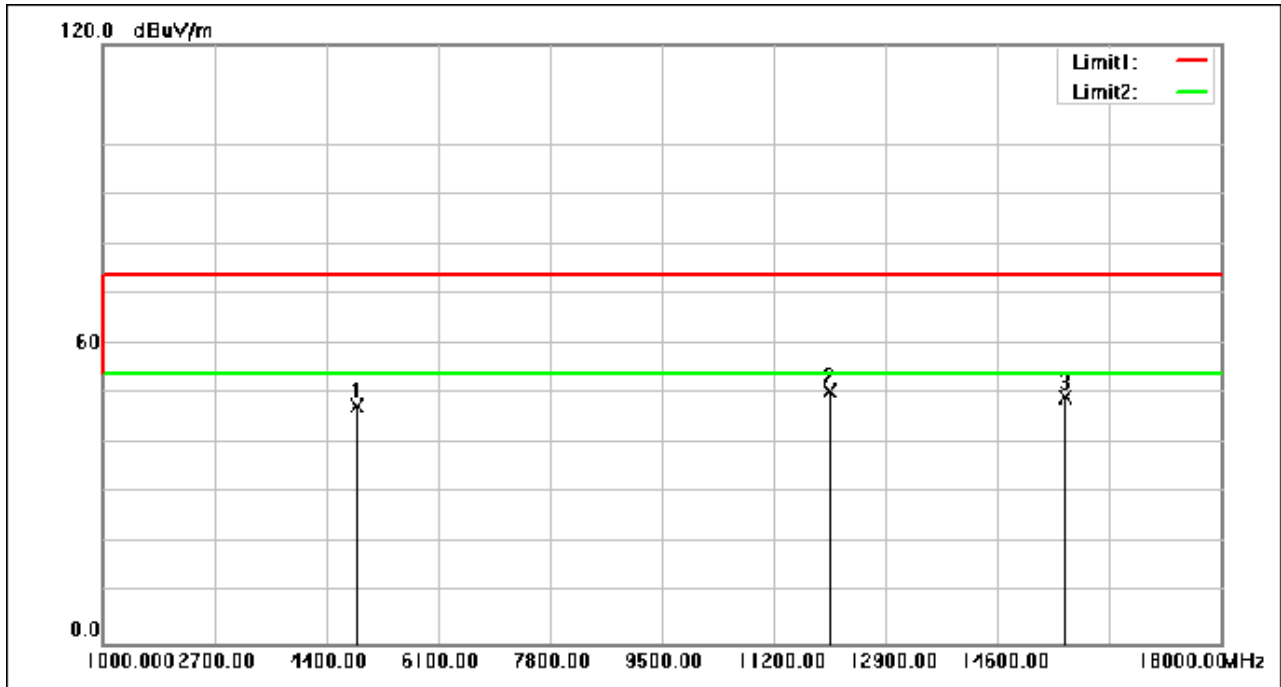


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4873.960	65.96	-18.52	47.44	74.00	-26.56	peak
2	12054.760	56.48	-5.91	50.57	74.00	-23.43	peak
3	15623.400	53.75	-4.55	49.20	74.00	-24.80	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

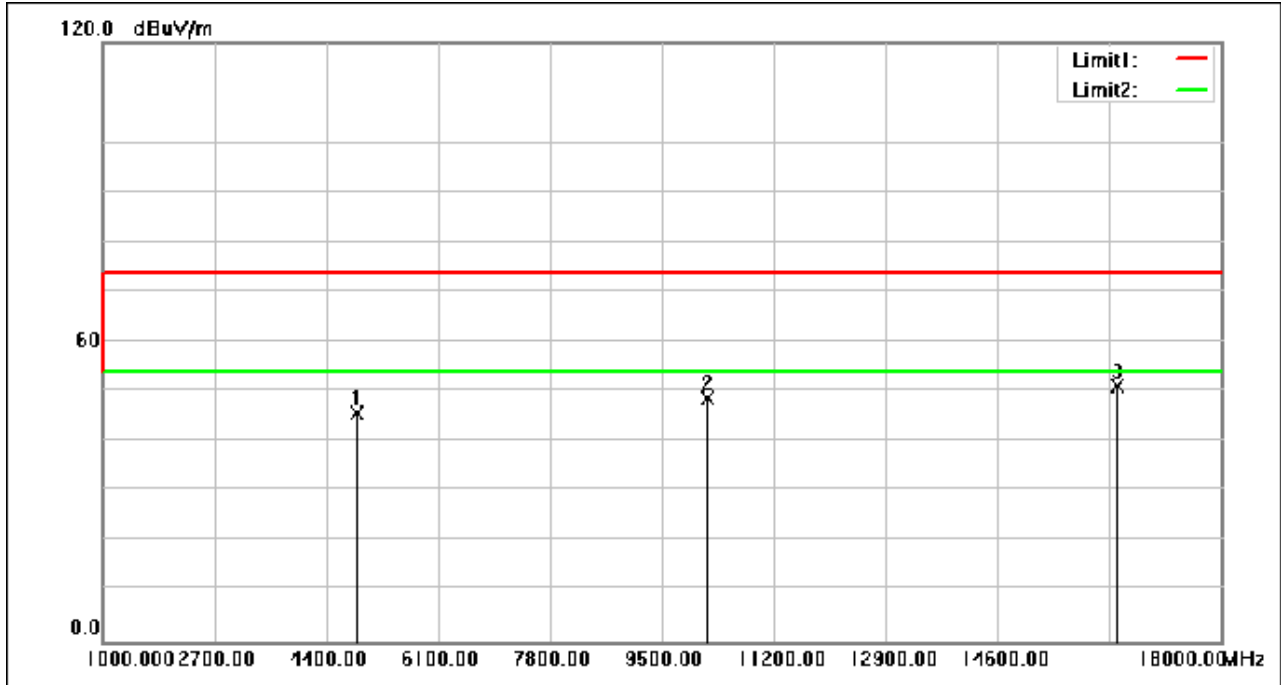


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4873.960	64.31	-18.52	45.79	74.00	-28.21	peak
2	10206.520	55.97	-7.21	48.76	74.00	-25.24	peak
3	16426.480	54.62	-3.61	51.01	74.00	-22.99	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

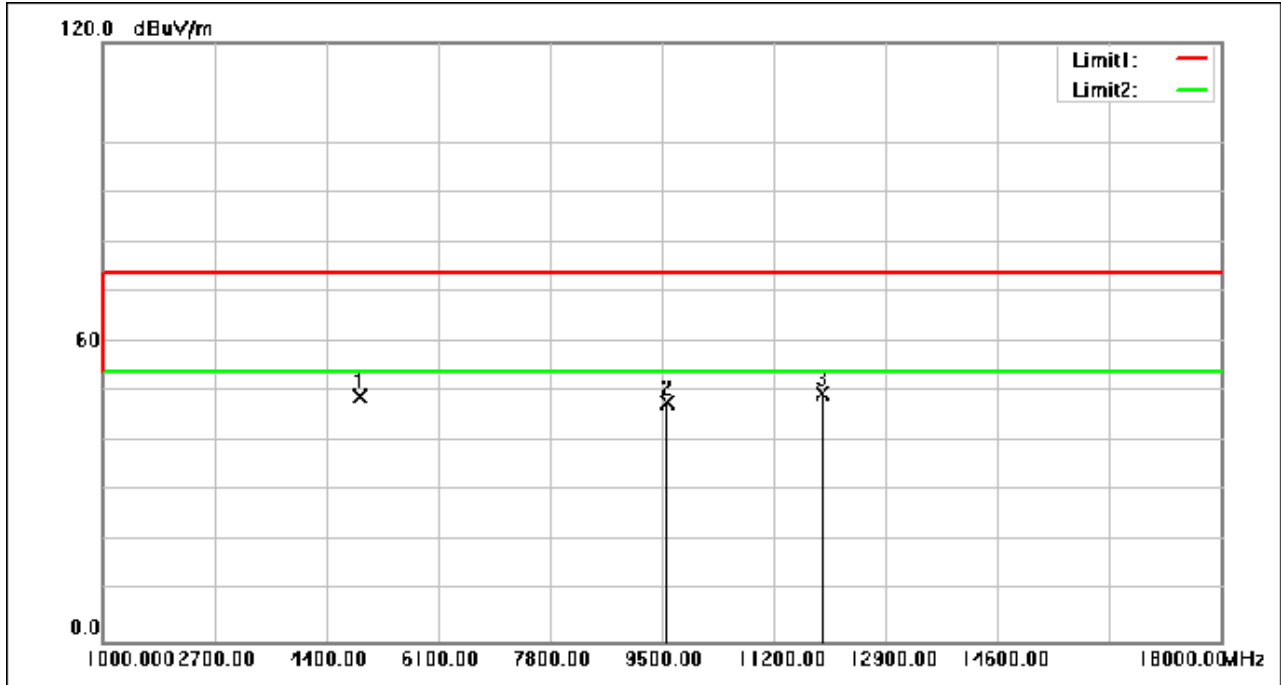


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4923.600	67.42	-18.49	48.93	74.00	-25.07	peak
2	9591.800	55.69	-7.78	47.91	74.00	-26.09	peak
3	11939.840	55.68	-5.99	49.69	74.00	-24.31	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

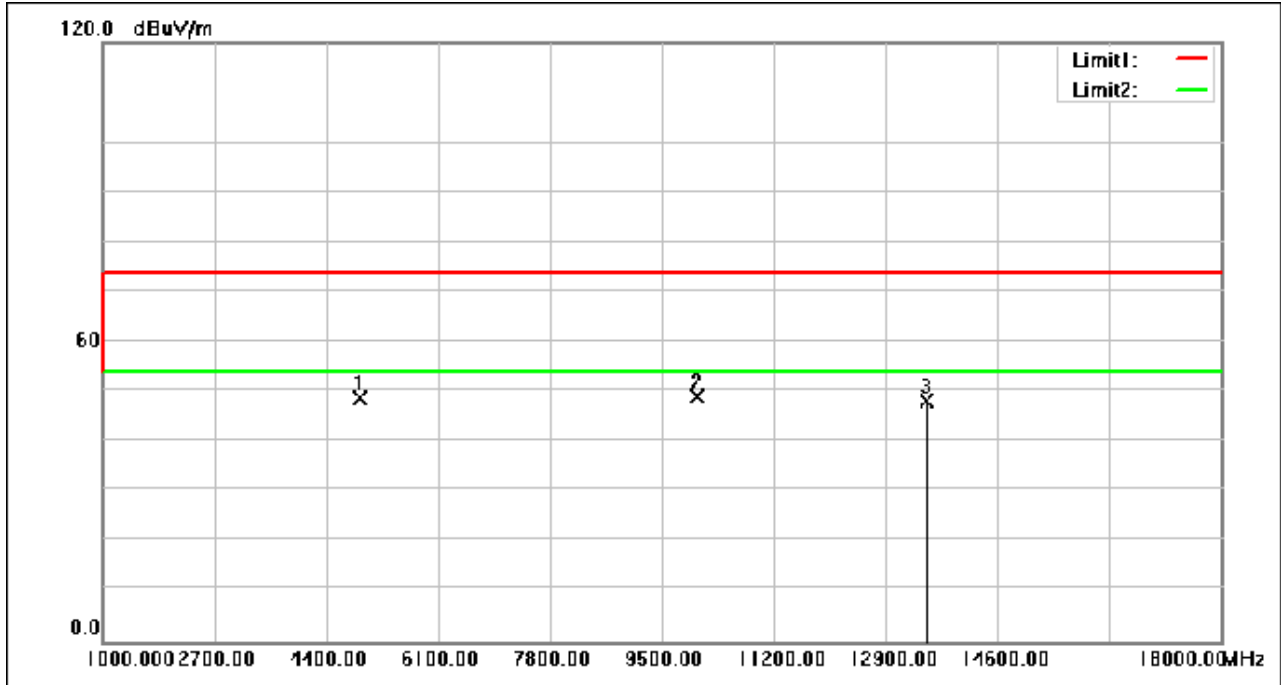


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.280	67.26	-18.49	48.77	74.00	-25.23	peak
2	10033.800	56.34	-7.31	49.03	74.00	-24.97	peak
3	13536.480	54.40	-6.34	48.06	74.00	-25.94	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

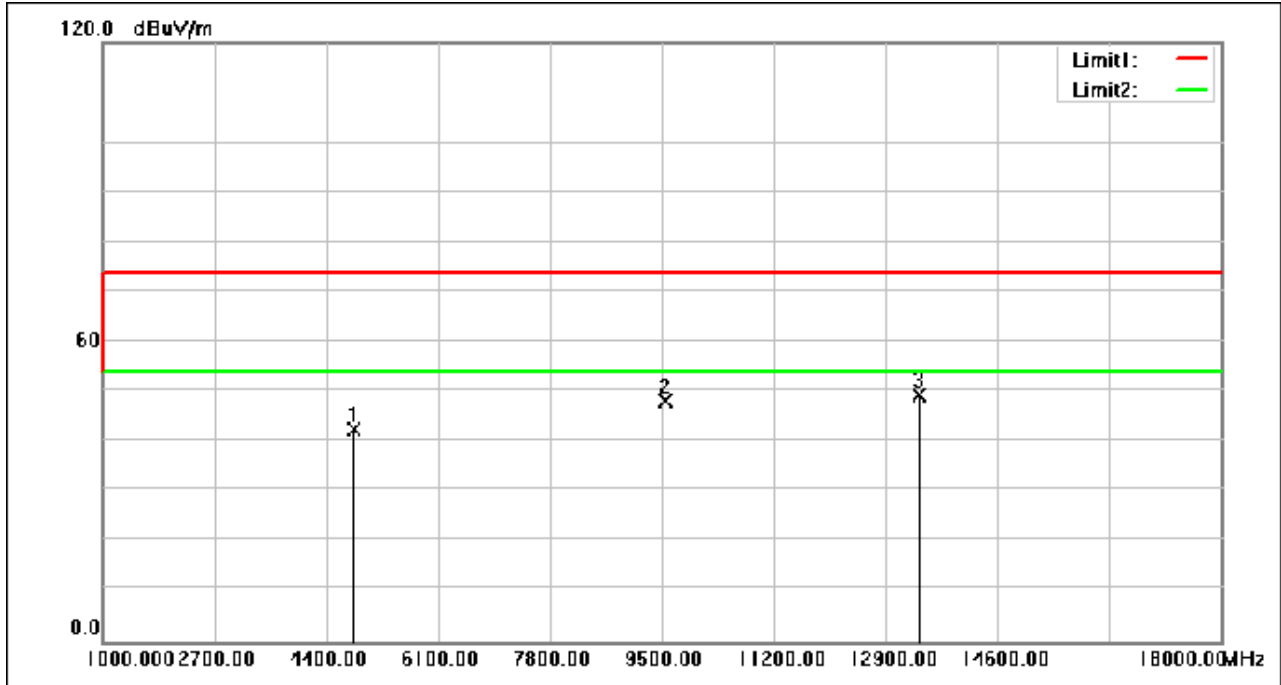


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4831.800	61.14	-18.55	42.59	74.00	-31.41	peak
2	9561.200	56.11	-7.84	48.27	74.00	-25.73	peak
3	13412.040	55.81	-6.32	49.49	74.00	-24.51	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

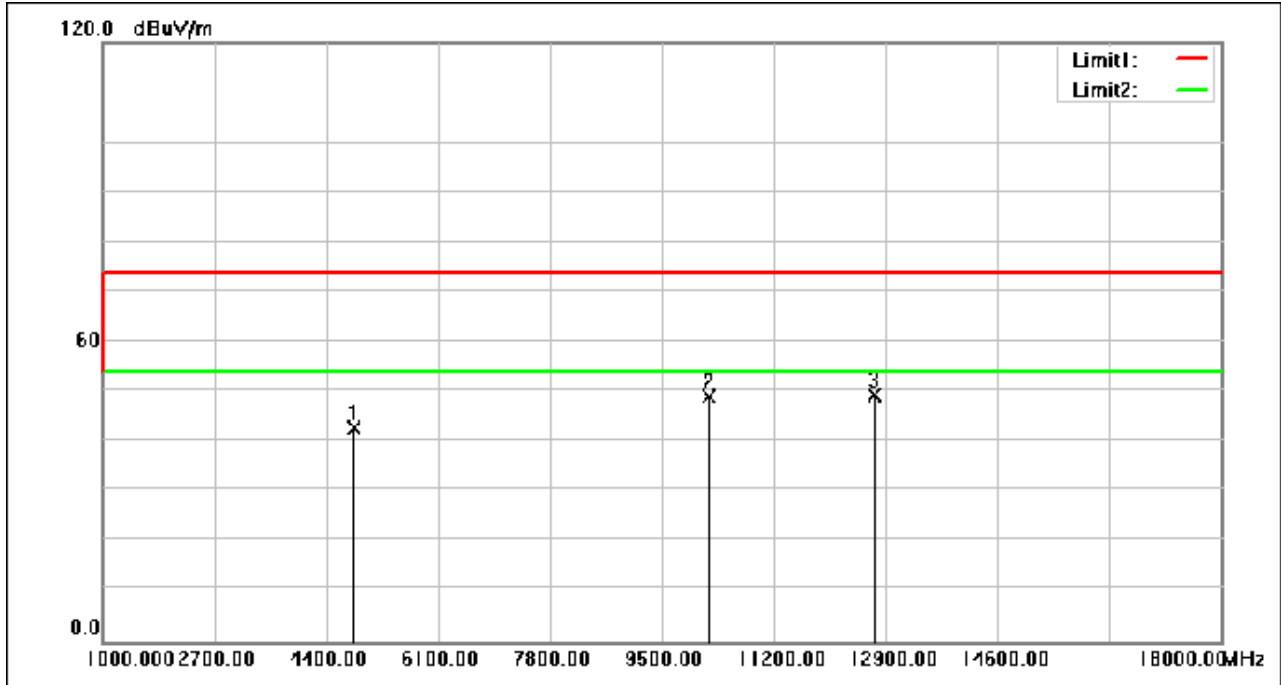


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4823.640	61.36	-18.55	42.81	74.00	-31.19	peak
2	10217.400	56.28	-7.20	49.08	74.00	-24.92	peak
3	12736.120	55.58	-6.22	49.36	74.00	-24.64	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

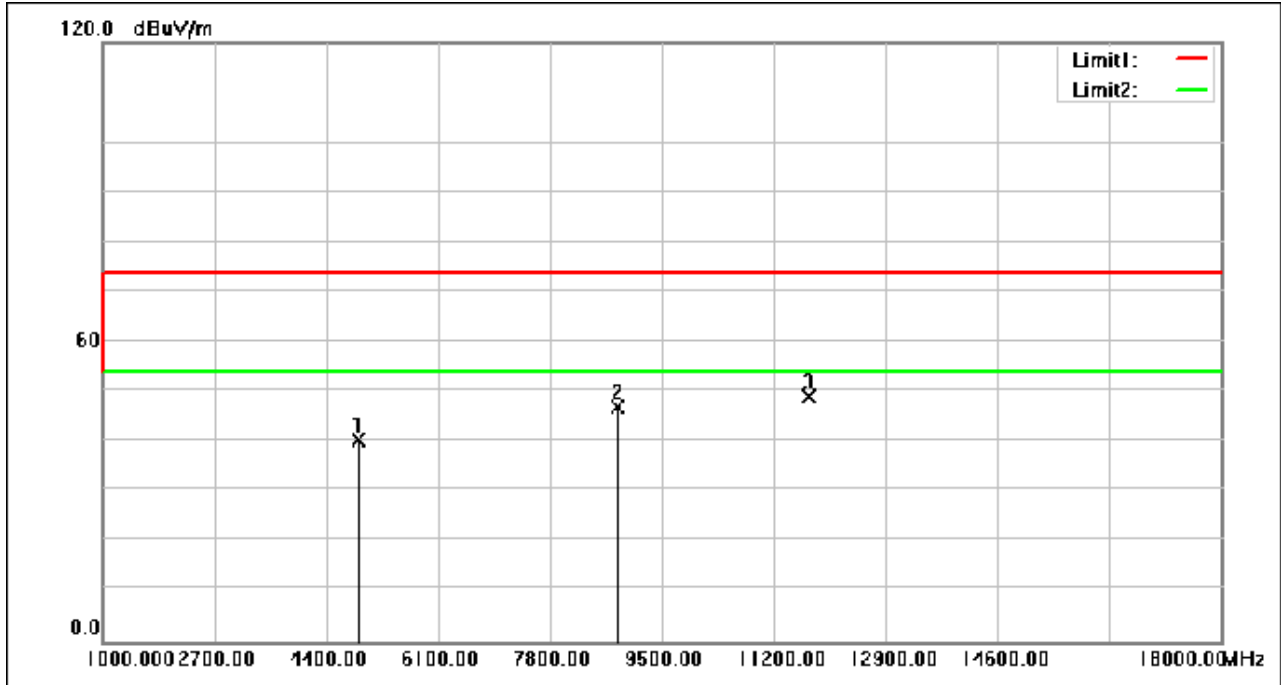


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4876.000	58.95	-18.52	40.43	74.00	-33.57	peak
2	8821.360	56.16	-9.22	46.94	74.00	-27.06	peak
3	11738.560	55.24	-6.17	49.07	74.00	-24.93	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

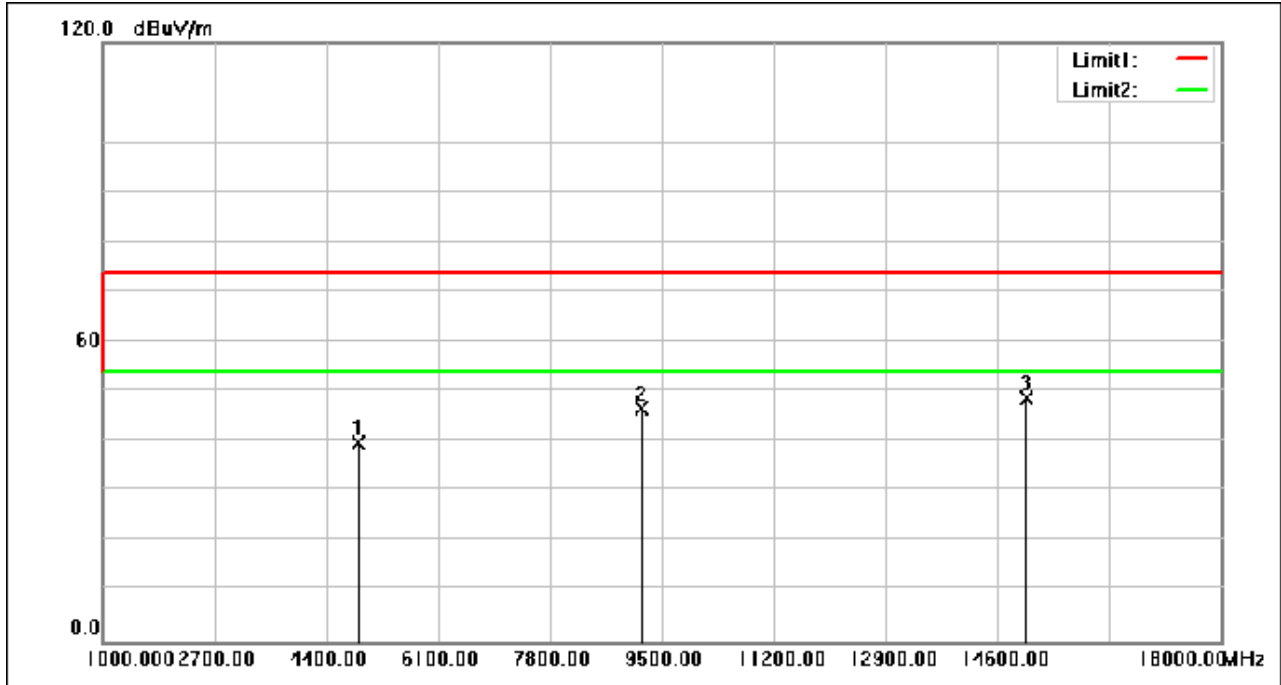


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4876.000	58.36	-18.52	39.84	74.00	-34.16	peak
2	9210.320	55.05	-8.50	46.55	74.00	-27.45	peak
3	15042.000	53.79	-5.06	48.73	74.00	-25.27	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

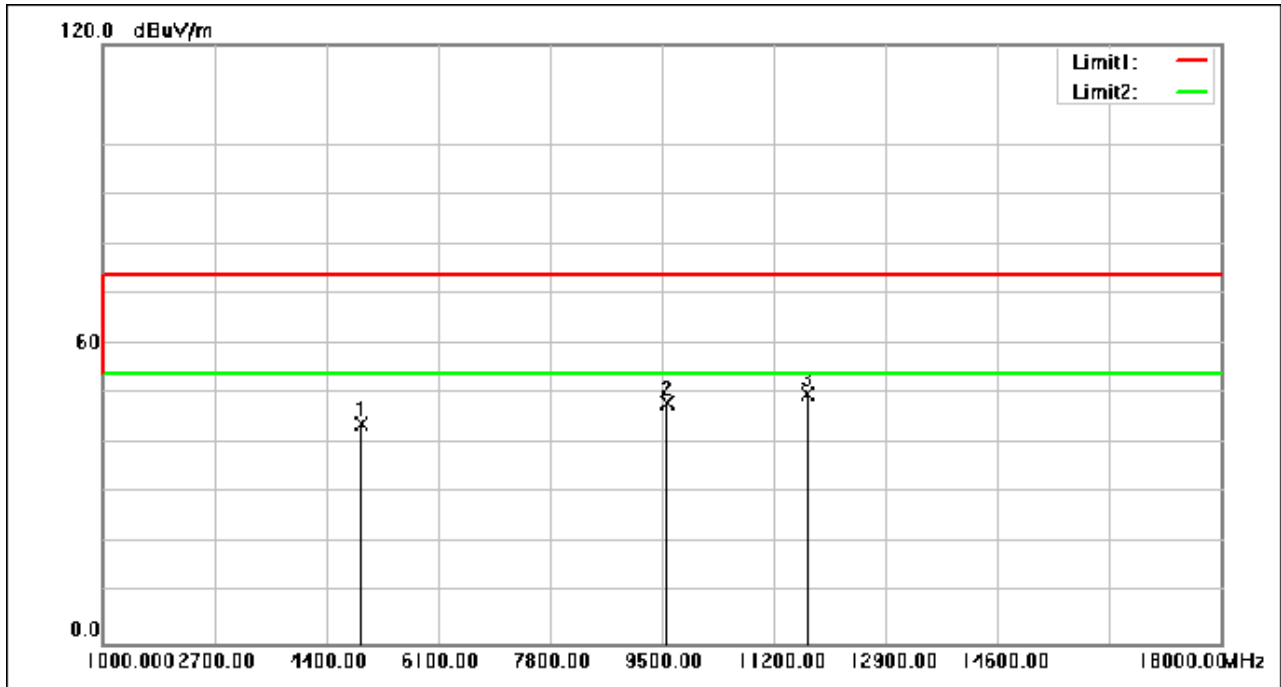


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4927.000	62.54	-18.49	44.05	74.00	-29.95	peak
2	9573.440	55.92	-7.82	48.10	74.00	-25.90	peak
3	11720.880	56.04	-6.18	49.86	74.00	-24.14	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

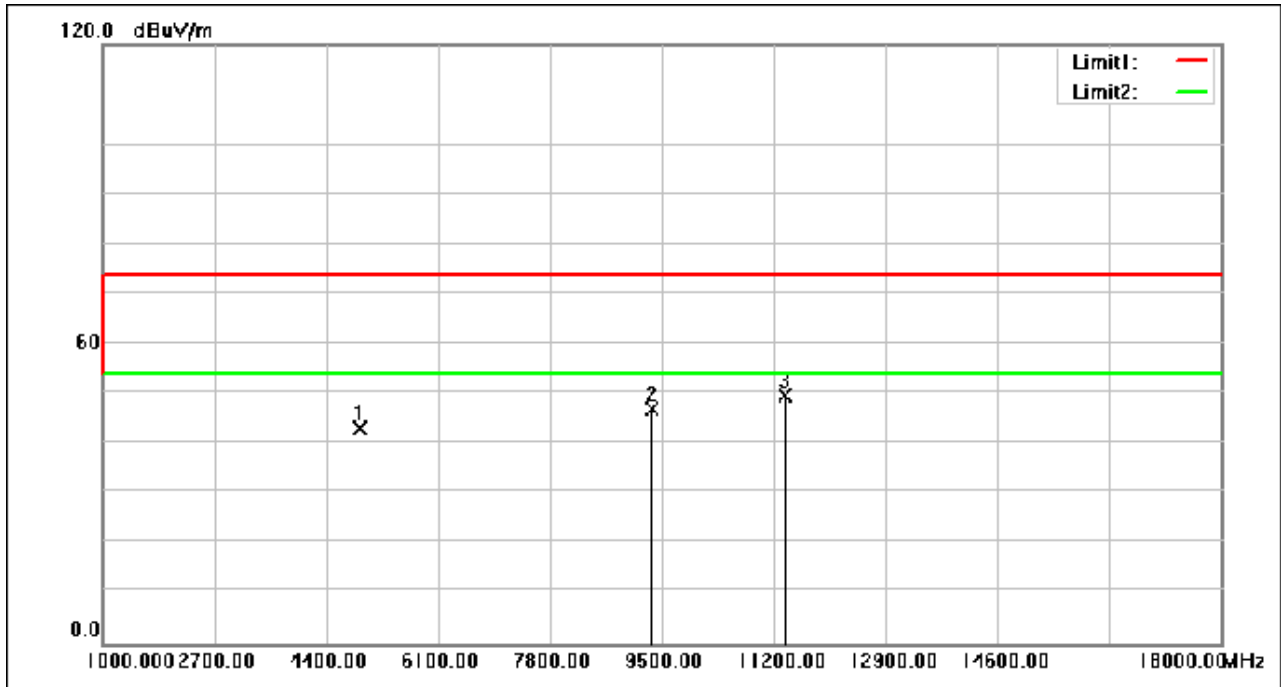


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4925.640	61.57	-18.49	43.08	74.00	-30.92	peak
2	9359.240	55.07	-8.22	46.85	74.00	-27.15	peak
3	11382.920	56.03	-6.46	49.57	74.00	-24.43	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

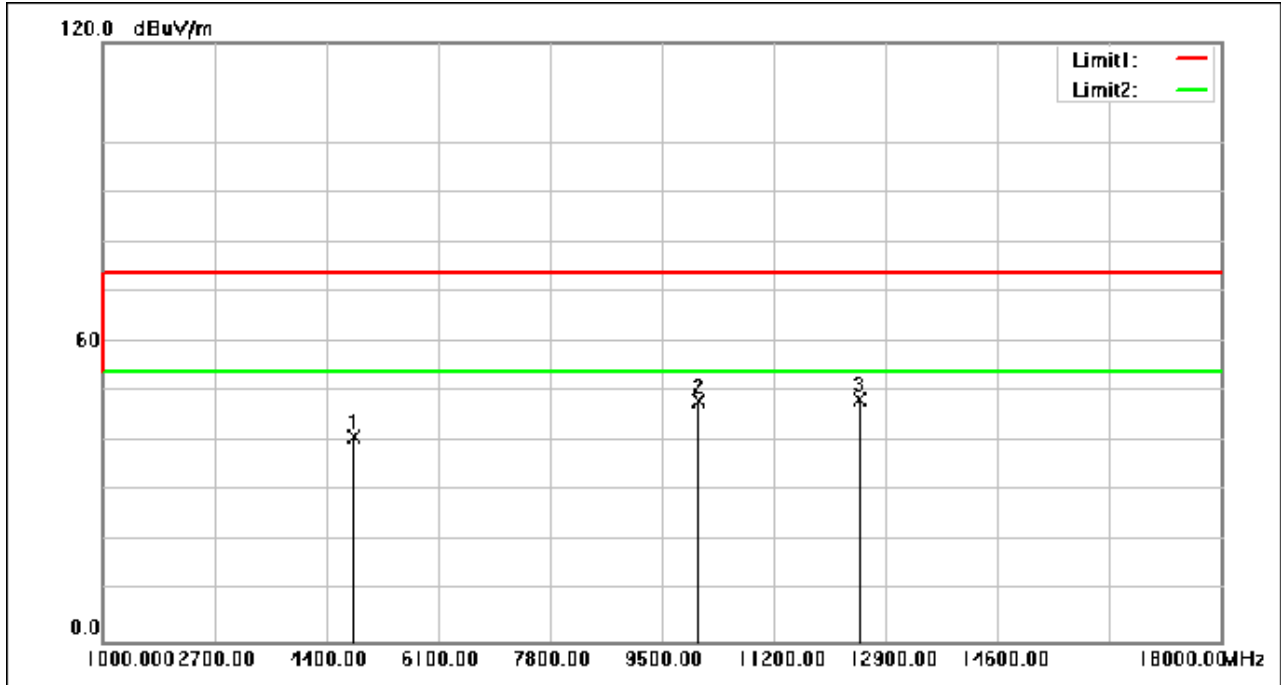


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4832.480	59.44	-18.54	40.90	74.00	-33.10	peak
2	10075.960	55.46	-7.29	48.17	74.00	-25.83	peak
3	12501.520	54.70	-6.11	48.59	74.00	-25.41	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

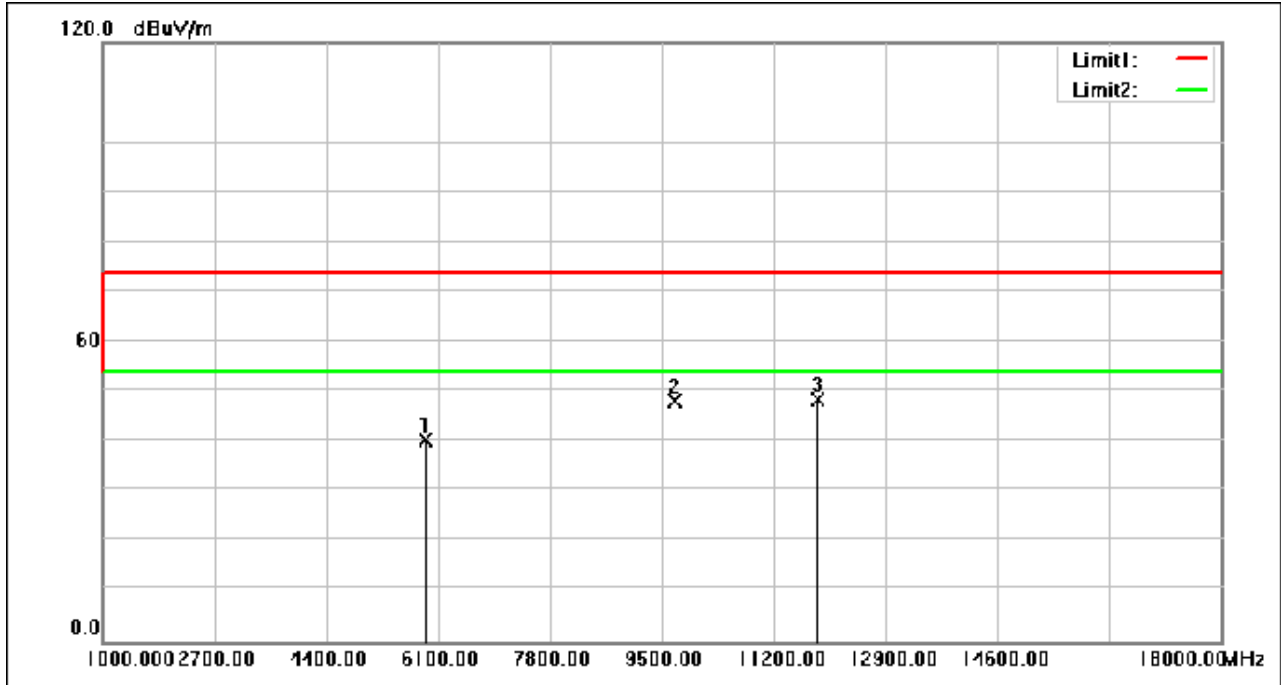


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5912.320	56.56	-16.14	40.42	74.00	-33.58	peak
2	9688.360	55.65	-7.60	48.05	74.00	-25.95	peak
3	11876.600	54.43	-6.05	48.38	74.00	-25.62	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

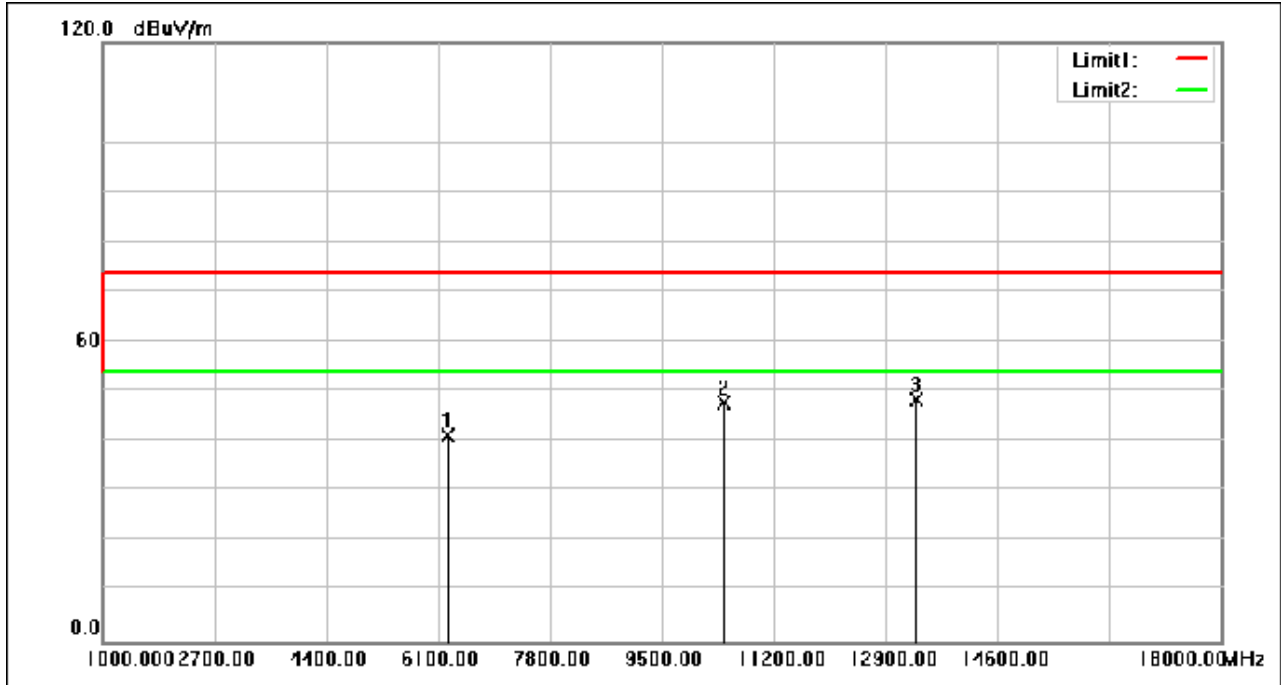

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6268.640	55.78	-14.43	41.35	74.00	-32.65	peak
2	10443.160	54.89	-7.07	47.82	74.00	-26.18	peak
3	13374.640	54.68	-6.32	48.36	74.00	-25.64	peak


Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

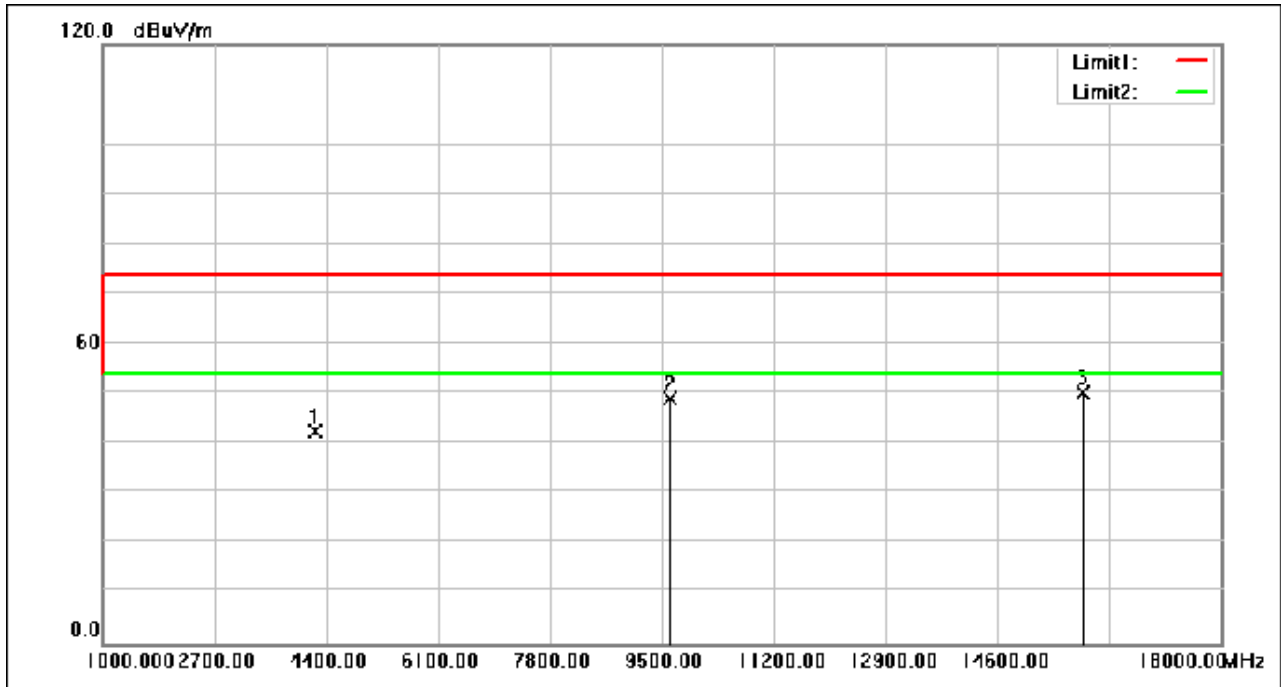

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4234.760	62.23	-19.74	42.49	74.00	-31.51	peak
2	9629.880	56.81	-7.71	49.10	74.00	-24.90	peak
3	15914.440	54.49	-4.27	50.22	74.00	-23.78	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

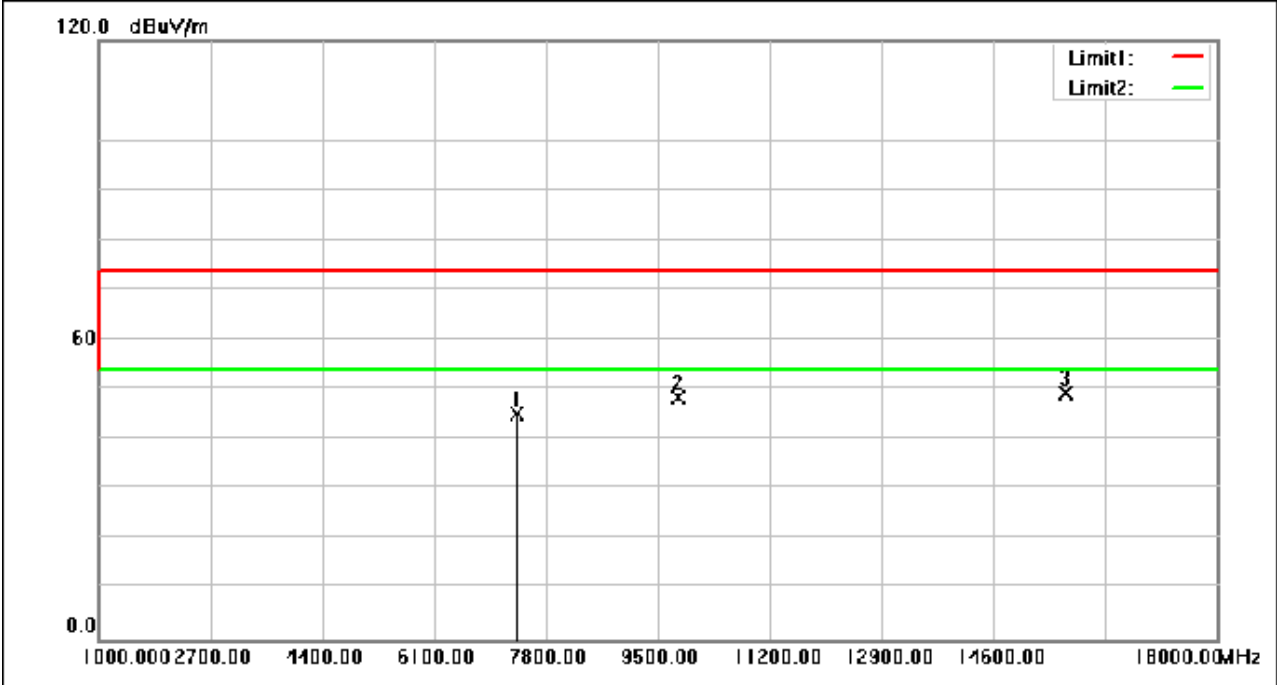


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7358.680	56.61	-11.41	45.20	74.00	-28.80	peak
2	9808.040	55.97	-7.37	48.60	74.00	-25.40	peak
3	15706.360	53.68	-4.47	49.21	74.00	-24.79	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

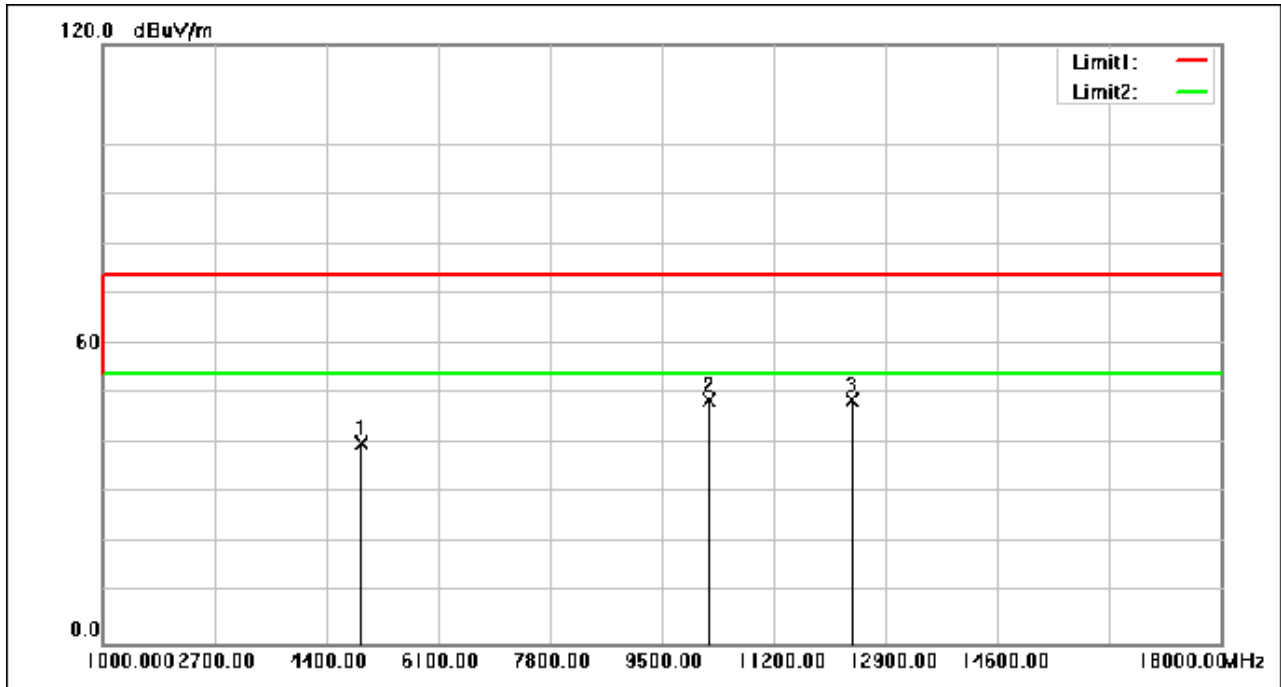


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4933.120	58.53	-18.48	40.05	74.00	-33.95	peak
2	10221.480	56.08	-7.20	48.88	74.00	-25.12	peak
3	12390.680	54.79	-6.06	48.73	74.00	-25.27	peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

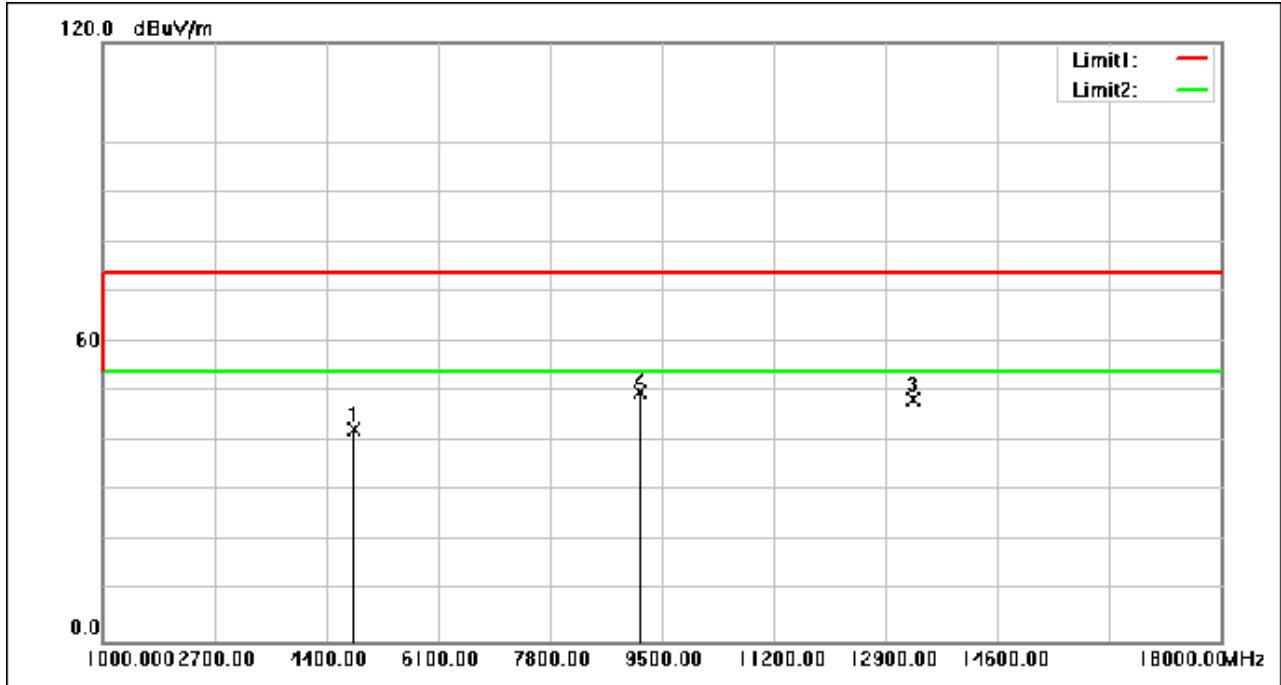


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4820.920	60.92	-18.55	42.37	74.00	-31.63	peak
2	9181.760	58.40	-8.56	49.84	74.00	-24.16	peak
3	13324.320	54.91	-6.31	48.60	74.00	-25.40	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

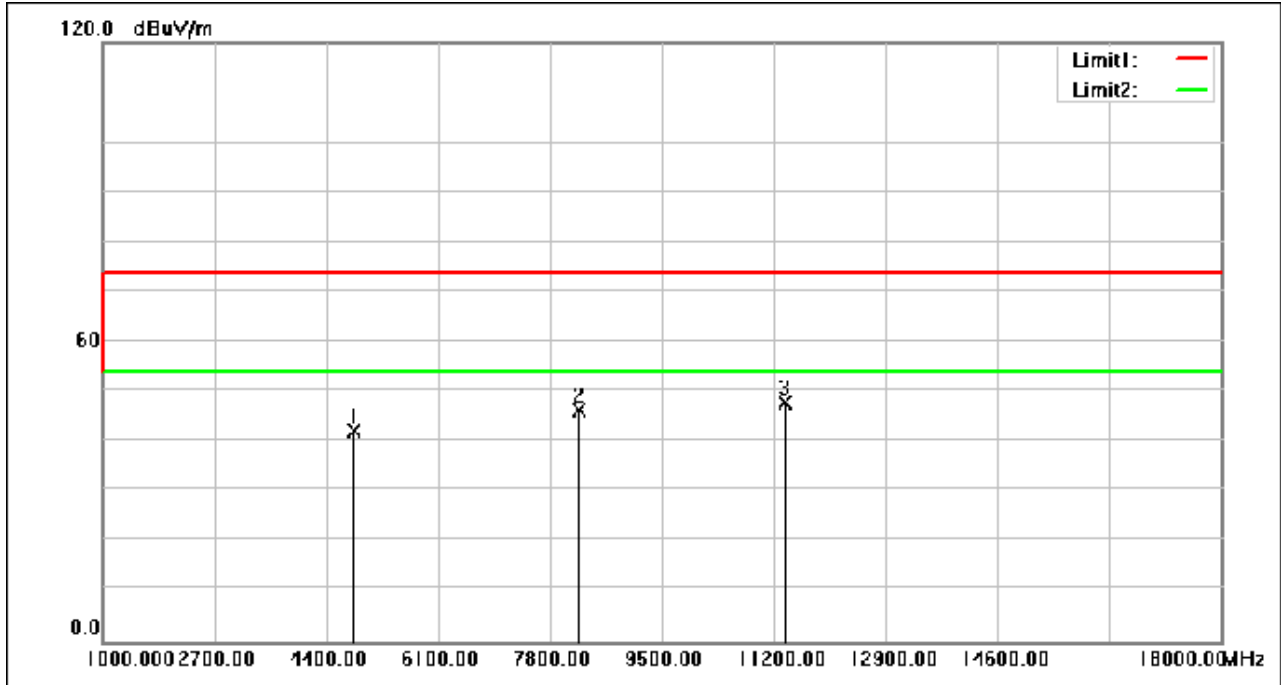


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.320	60.77	-18.54	42.23	74.00	-31.77	peak
2	8248.800	56.62	-10.17	46.45	74.00	-27.55	peak
3	11381.560	54.29	-6.46	47.83	74.00	-26.17	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

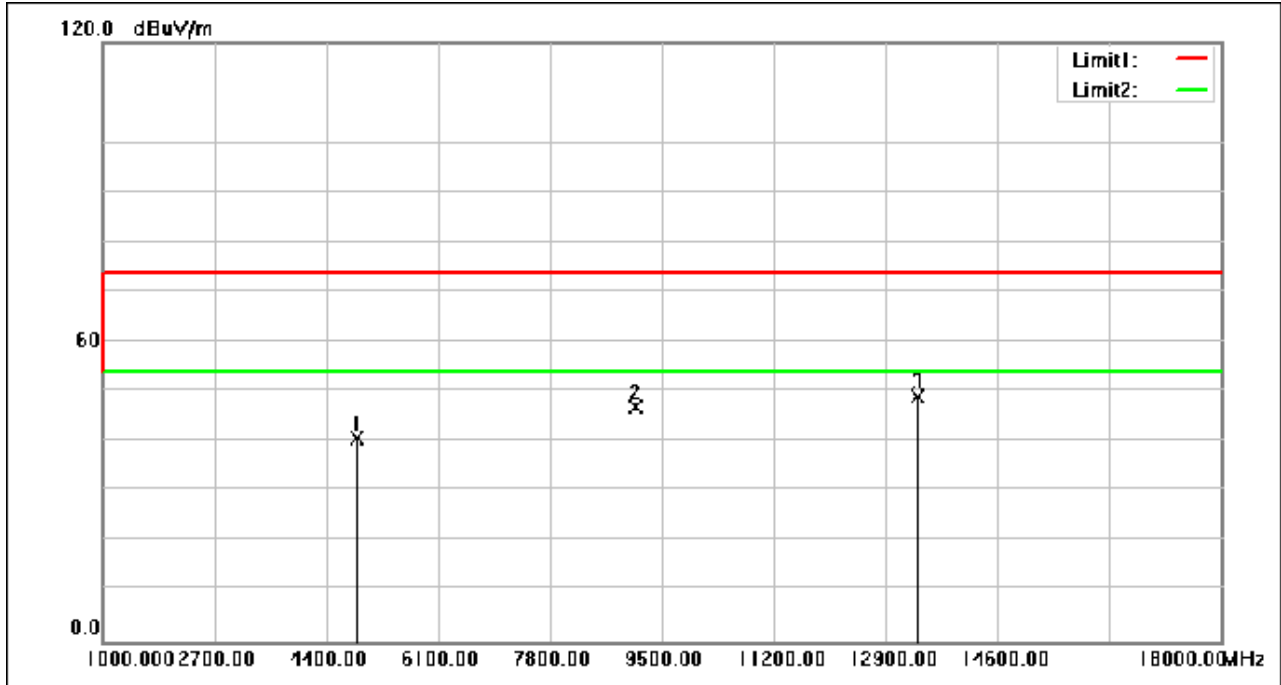


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4871.240	59.09	-18.52	40.57	74.00	-33.43	peak
2	9105.600	55.59	-8.70	46.89	74.00	-27.11	peak
3	13405.920	55.41	-6.32	49.09	74.00	-24.91	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

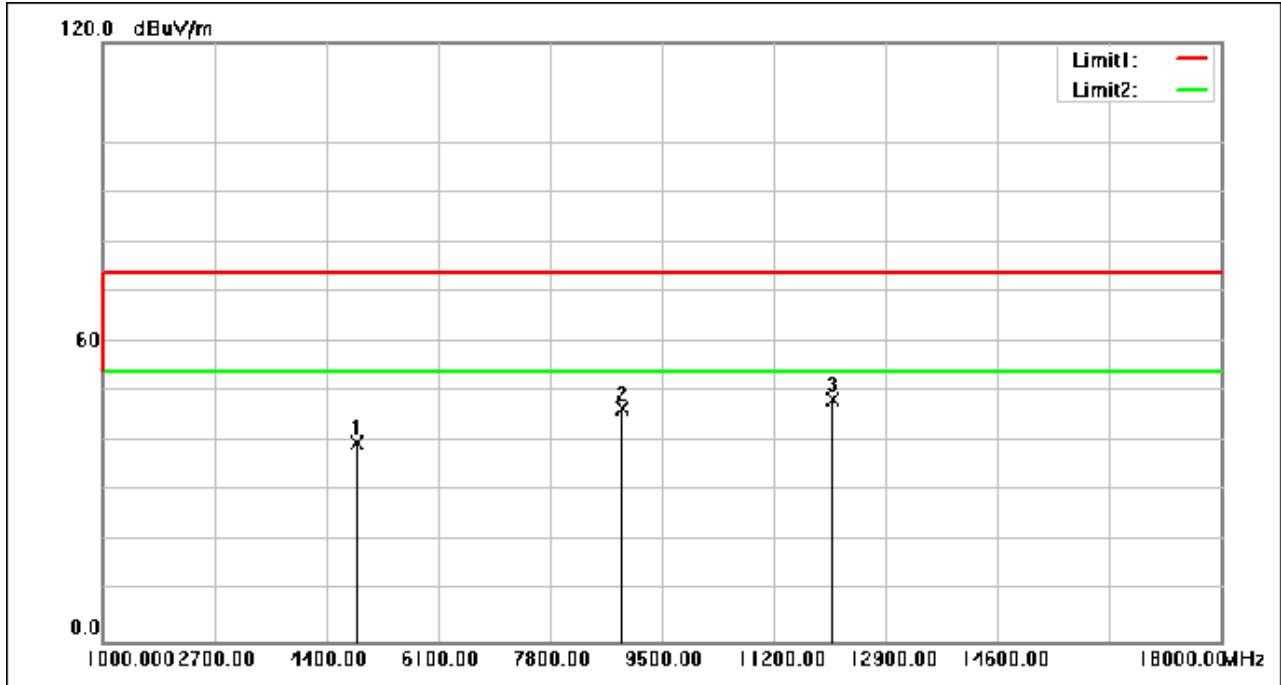


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4873.960	58.40	-18.52	39.88	74.00	-34.12	peak
2	8905.000	55.71	-9.09	46.62	74.00	-27.38	peak
3	12101.680	54.47	-5.93	48.54	74.00	-25.46	peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: High

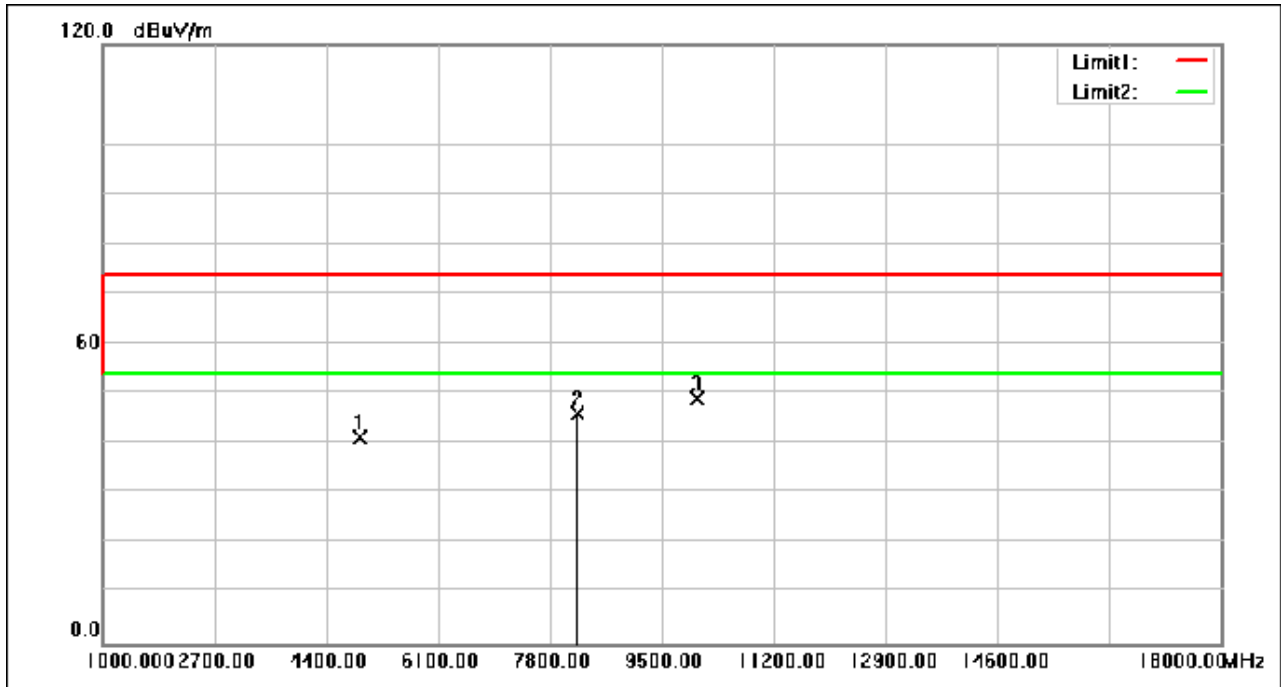


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.960	59.86	-18.48	41.38	74.00	-32.62	peak
2	8237.920	56.35	-10.19	46.16	74.00	-27.84	peak
3	10043.320	56.30	-7.30	49.00	74.00	-25.00	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

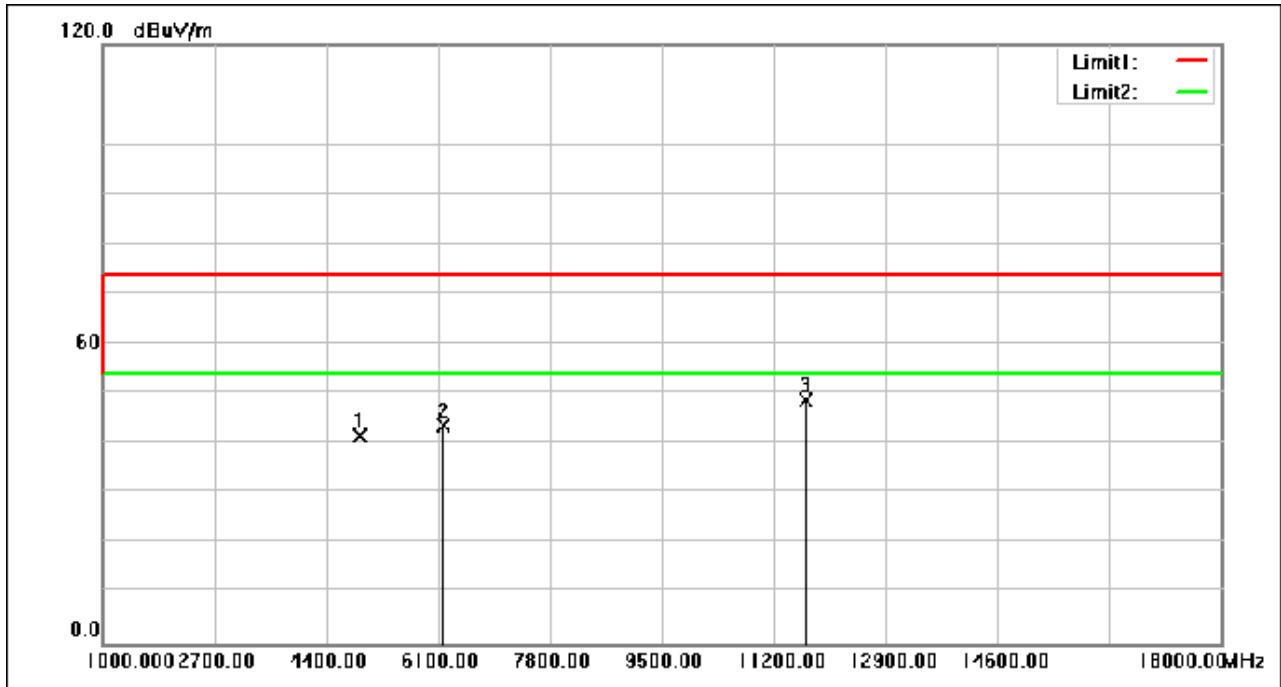


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.880	59.99	-18.49	41.50	74.00	-32.50	peak
2	6193.160	58.46	-14.83	43.63	74.00	-30.37	peak
3	11709.320	55.01	-6.19	48.82	74.00	-25.18	peak

Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

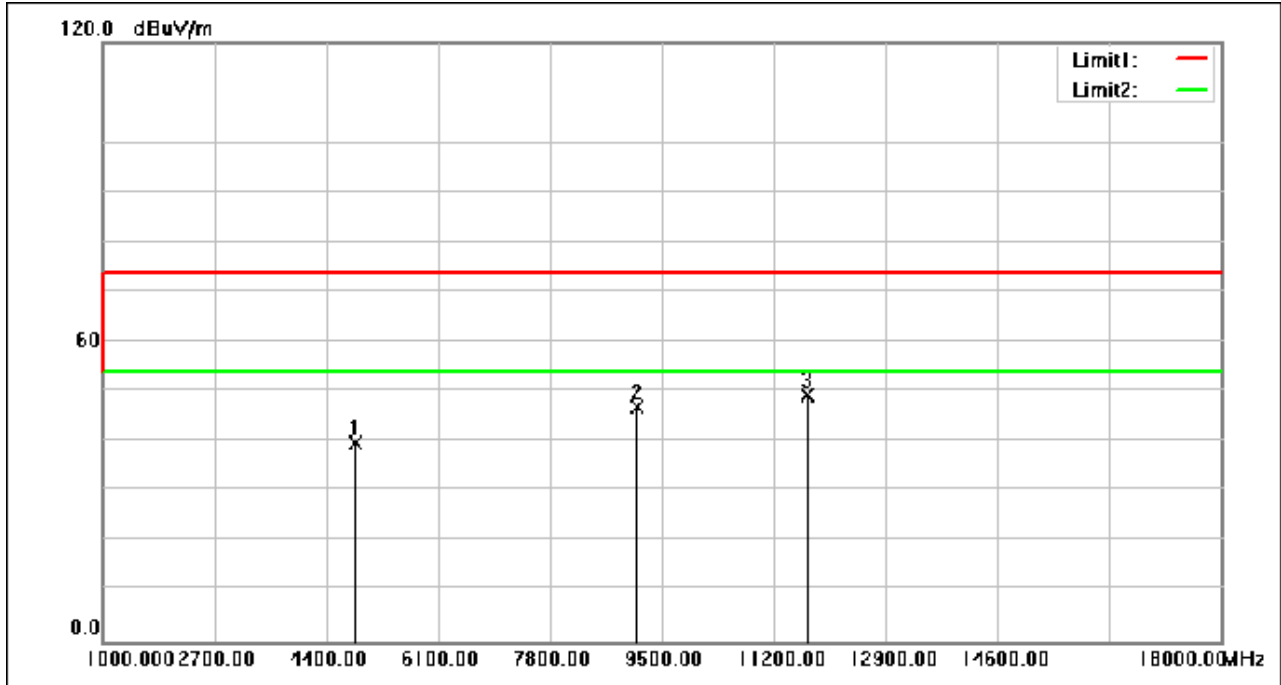


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4858.320	58.24	-18.52	39.72	74.00	-34.28	peak
2	9132.800	55.54	-8.64	46.90	74.00	-27.10	peak
3	11716.120	55.50	-6.18	49.32	74.00	-24.68	peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

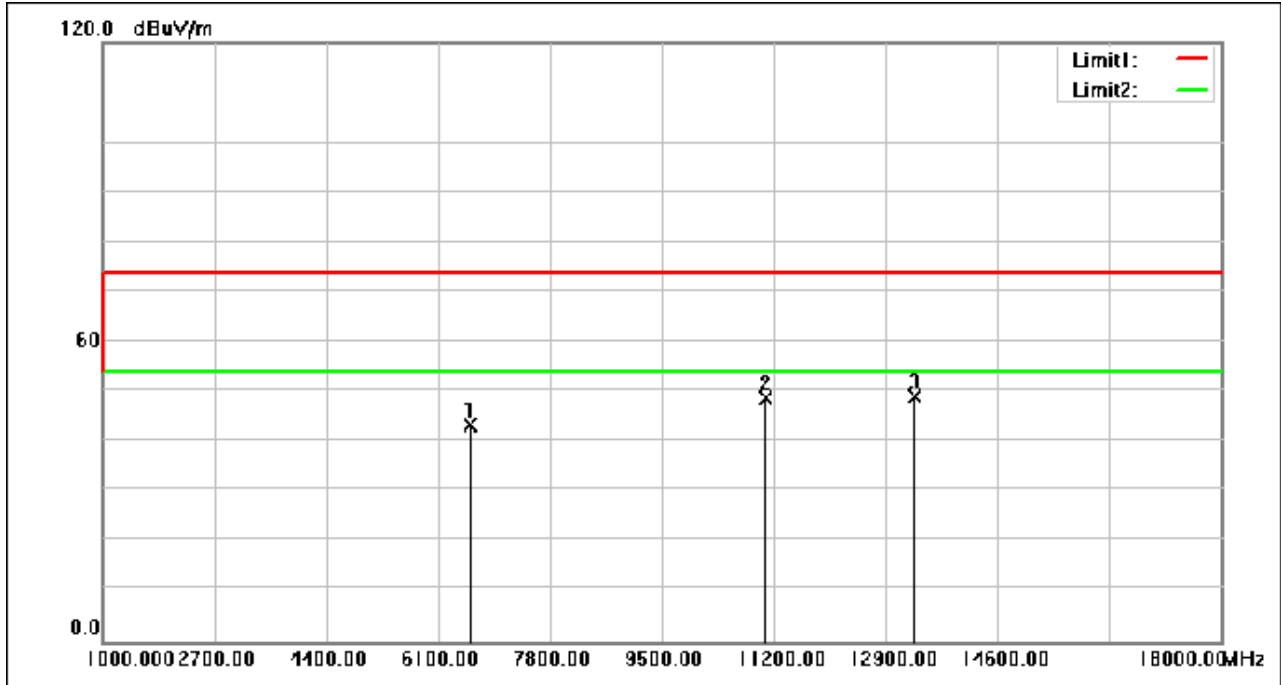


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6580.760	56.09	-12.80	43.29	74.00	-30.71	peak
2	11086.440	55.35	-6.69	48.66	74.00	-25.34	peak
3	13344.720	55.45	-6.31	49.14	74.00	-24.86	peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

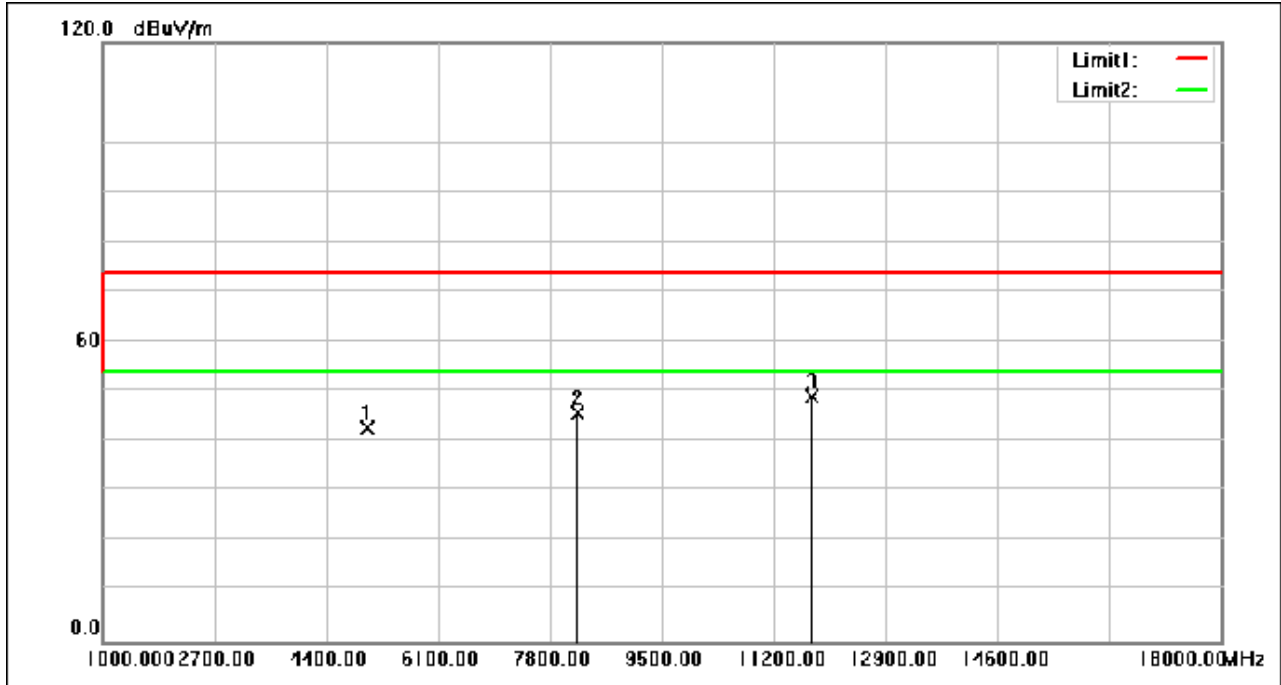

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5013.360	61.14	-18.42	42.72	74.00	-31.28	peak
2	8211.400	55.87	-10.23	45.64	74.00	-28.36	peak
3	11778.000	55.22	-6.13	49.09	74.00	-24.91	peak


Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

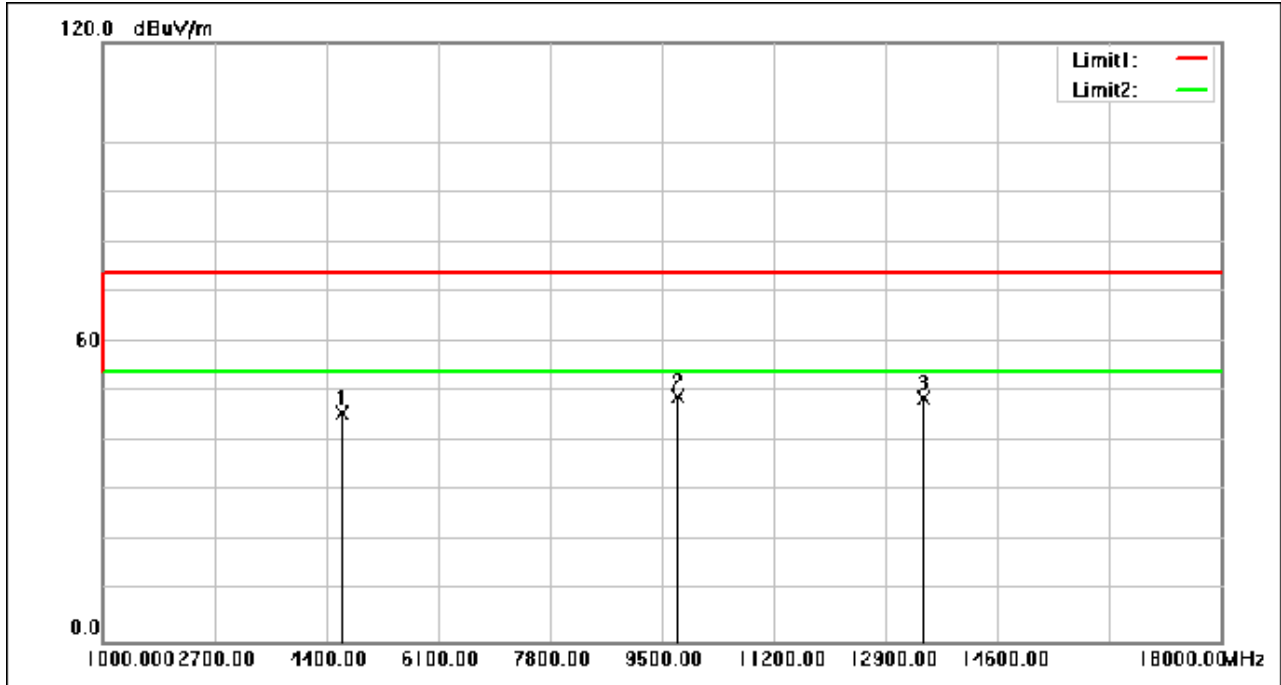

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4645.480	64.46	-18.66	45.80	74.00	-28.20	peak
2	9748.200	56.52	-7.48	49.04	74.00	-24.96	peak
3	13480.720	55.24	-6.34	48.90	74.00	-25.10	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

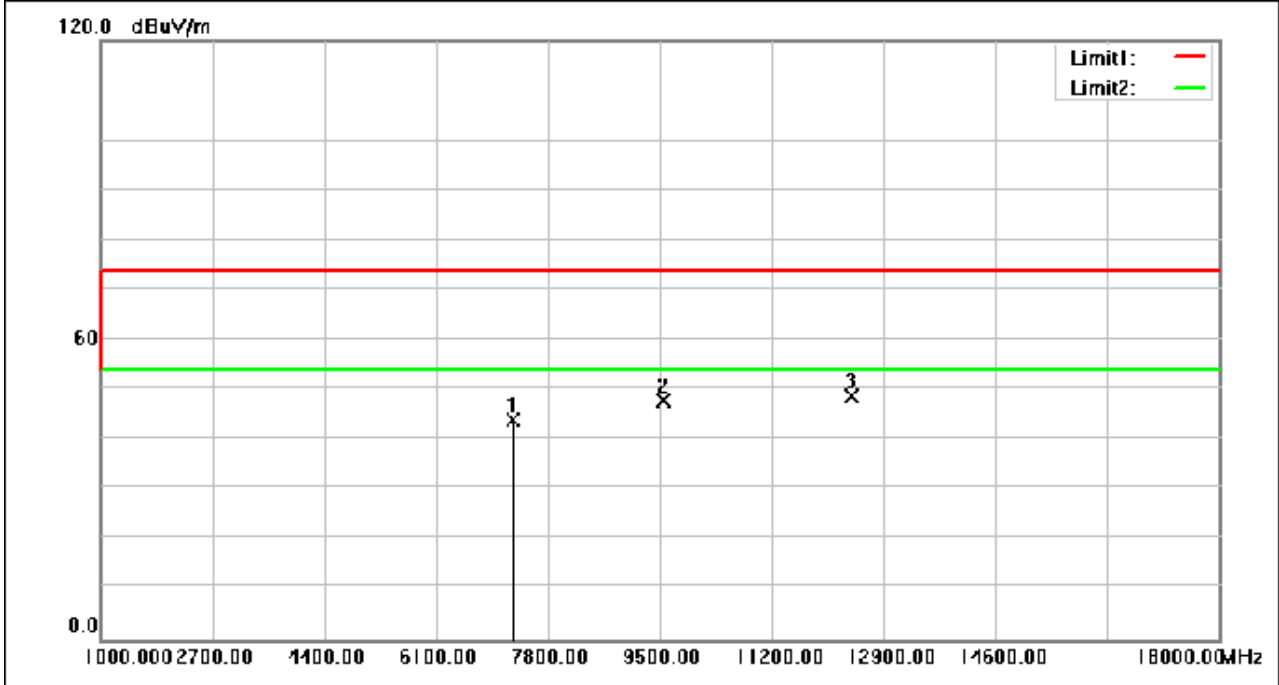

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7256.000	55.40	-11.45	43.95	74.00	-30.05	peak
2	9566.640	55.79	-7.83	47.96	74.00	-26.04	peak
3	12419.240	54.83	-6.08	48.75	74.00	-25.25	peak

Test Mode: 00; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

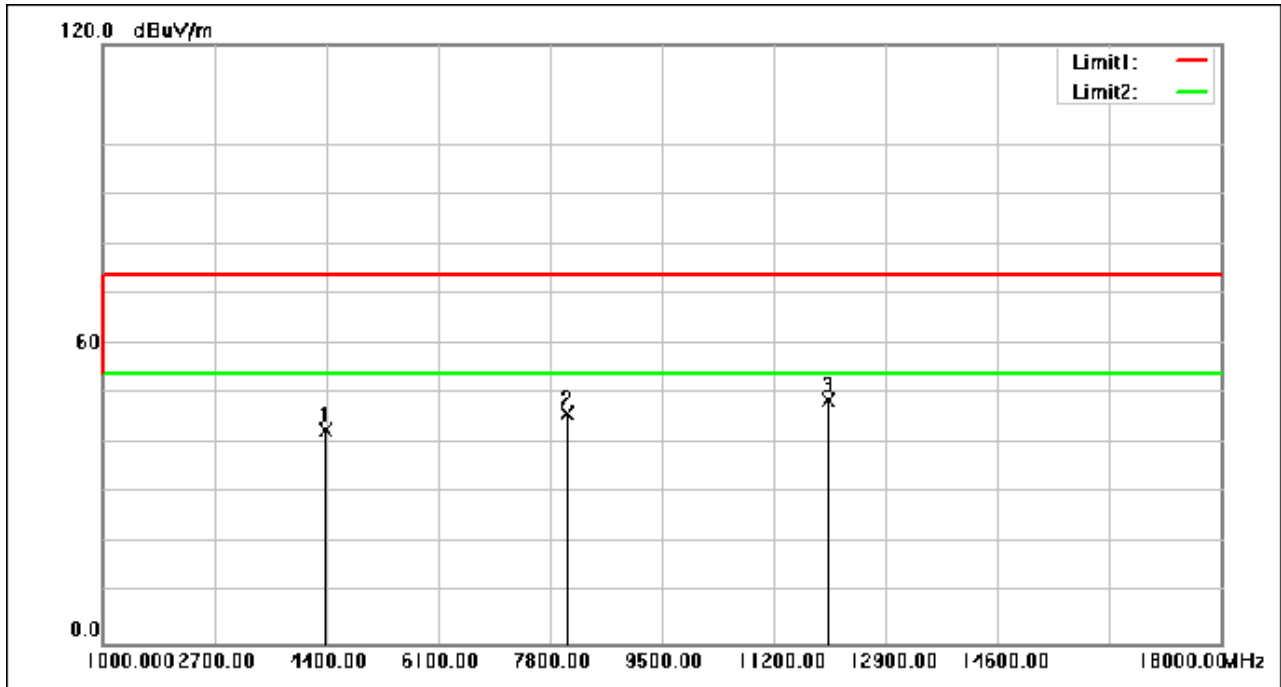

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4394.560	62.08	-19.27	42.81	74.00	-31.19	peak
2	8067.920	56.44	-10.48	45.96	74.00	-28.04	peak
3	12039.800	54.76	-5.90	48.86	74.00	-25.14	peak

7.5 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

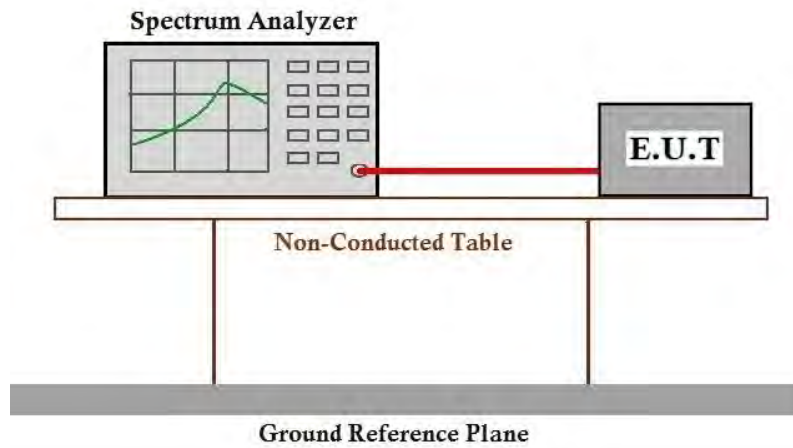

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.6.3 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.7.3 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.8.3 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HE40). Only the data of worst case is recorded in the report.

7.9.3 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: KSCR241200263901

Page: 95 of 171

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2412002639AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2412002639AT

10 Appendix

1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	8.223	8.406	97.82	0.10	0.04
		2437	/	/	8.224	8.404	97.86	0.09	0.00
		2462	/	/	8.250	8.430	97.86	0.09	0.31
802.11g	SISO	2412	/	/	4.032	4.325	93.23	0.30	0.03
		2437	/	/	4.033	4.328	93.18	0.31	0.03
		2462	/	/	4.033	4.327	93.21	0.31	0.03
802.11n (HT20)	SISO	2412	/	/	3.736	4.030	92.70	0.33	0.03
		2437	/	/	3.736	4.030	92.70	0.33	0.03
		2462	/	/	3.736	4.030	92.70	0.33	0.03
802.11n (HT40)	SISO	2422	/	/	1.820	2.113	86.13	0.65	0.03
		2437	/	/	1.821	2.115	86.10	0.65	0.03
		2452	/	/	1.820	2.114	86.09	0.65	0.03
802.11ax (HE20)	SISO	2412	SU	/	2.858	3.151	90.70	0.42	0.00
		2437	SU	/	2.858	3.151	90.70	0.42	0.00
		2462	SU	/	2.858	3.151	90.70	0.42	0.00
802.11ax (HE40)	SISO	2422	SU	/	1.457	1.750	83.26	0.80	0.03
		2437	SU	/	1.458	1.760	82.84	0.82	0.45
		2452	SU	/	1.457	1.751	83.21	0.80	0.01


1.2 Test Graph

1.2.1 Ant1


802.11b LCH 2412MHz Ant1 (SISO) NTN

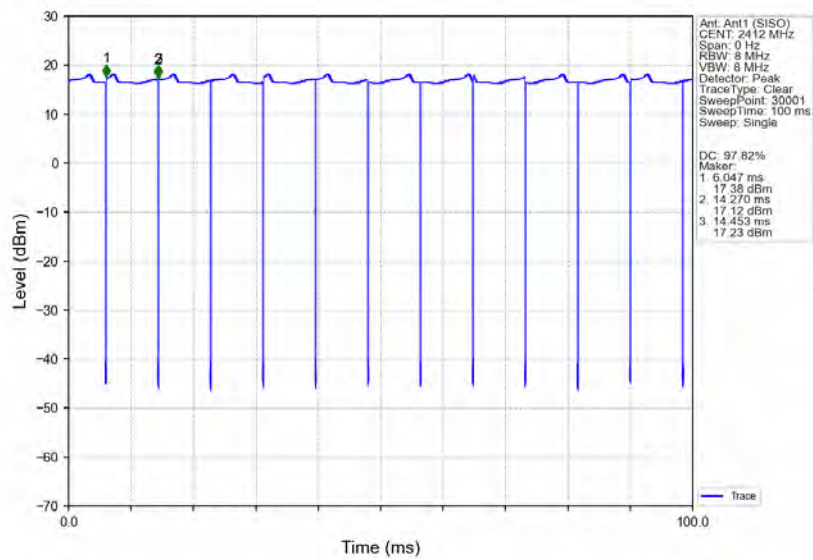


802.11b MCH 2437MHz Ant1 (SISO) NTN

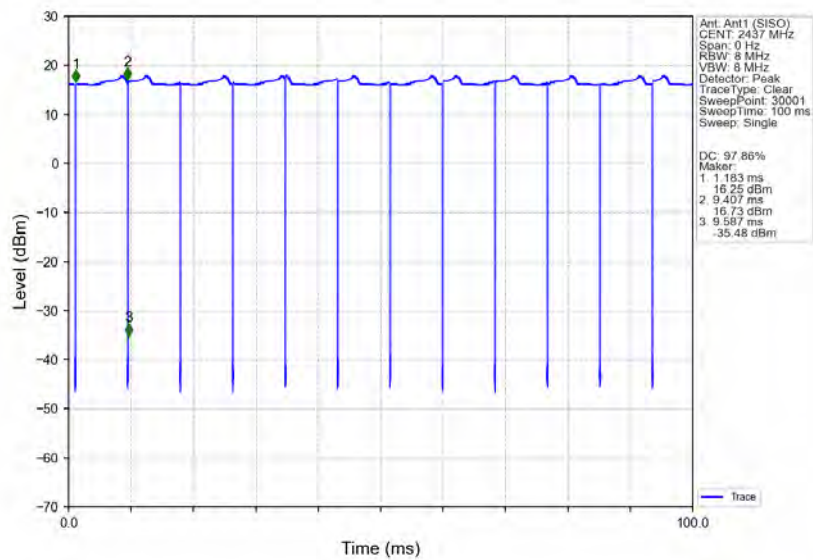


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

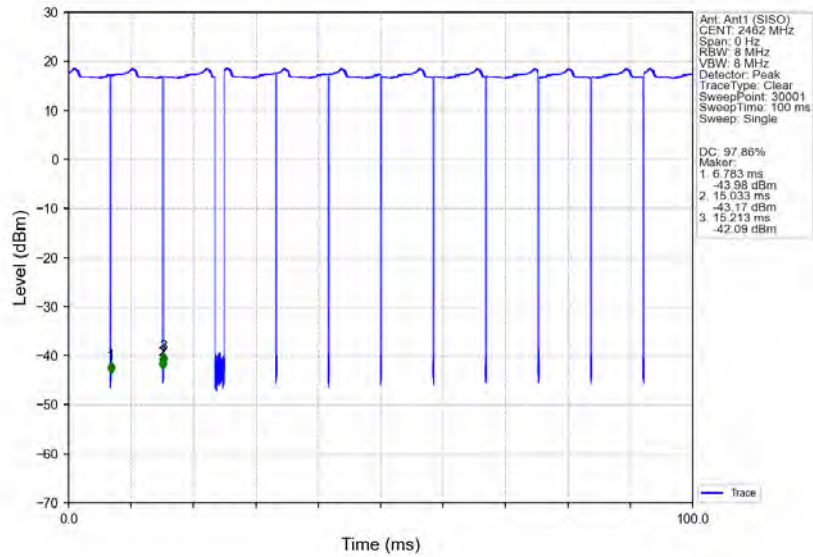


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

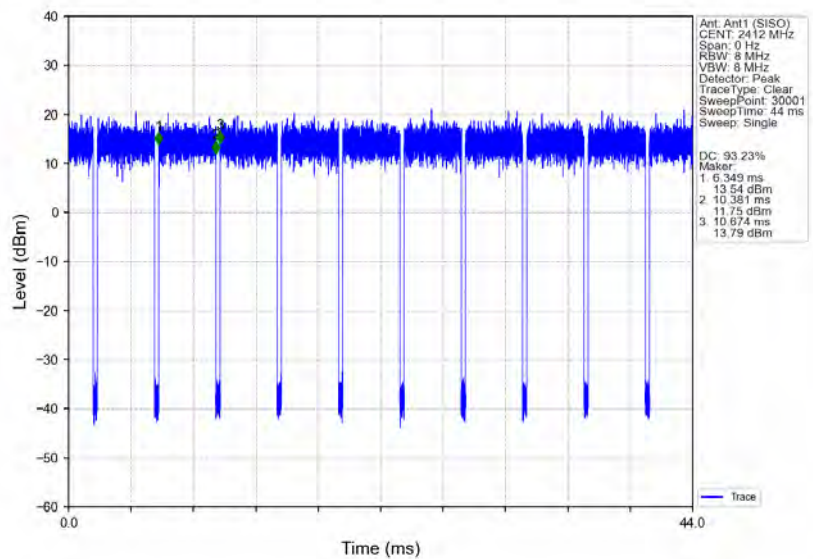


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

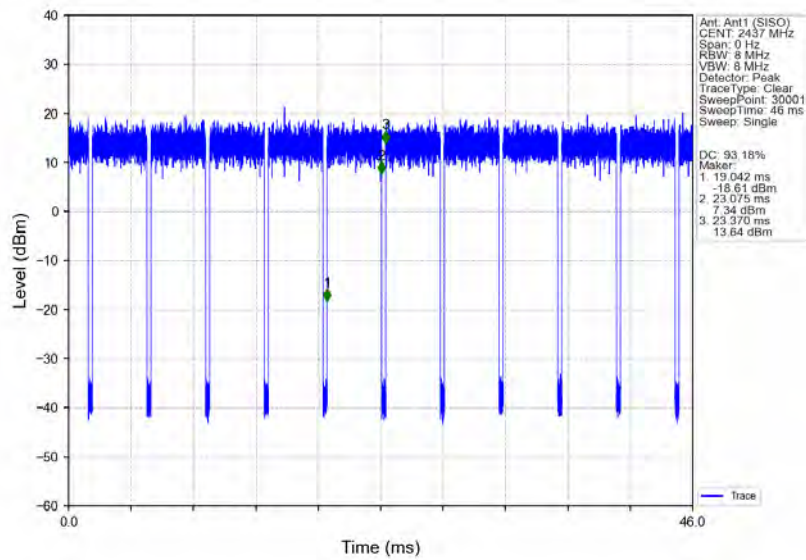


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

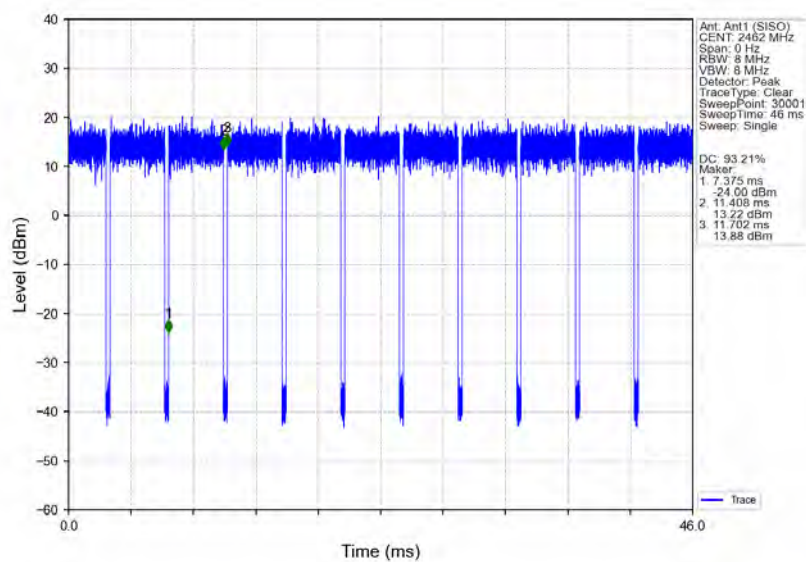


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

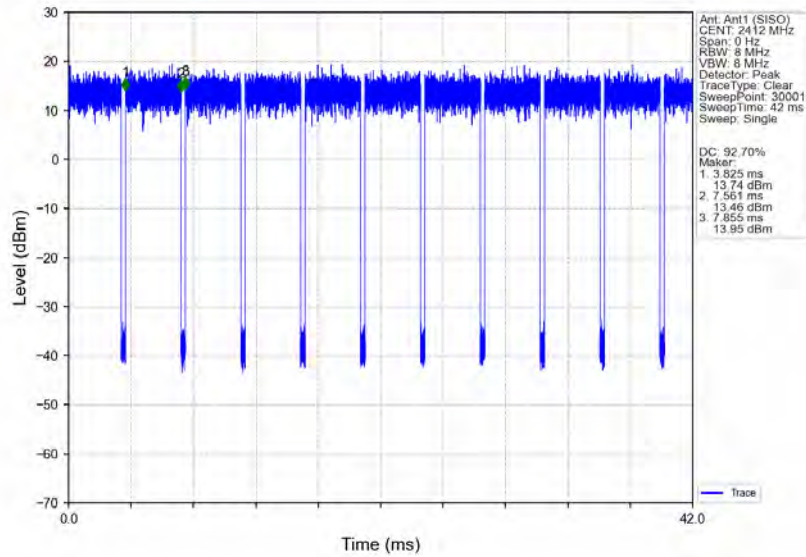


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

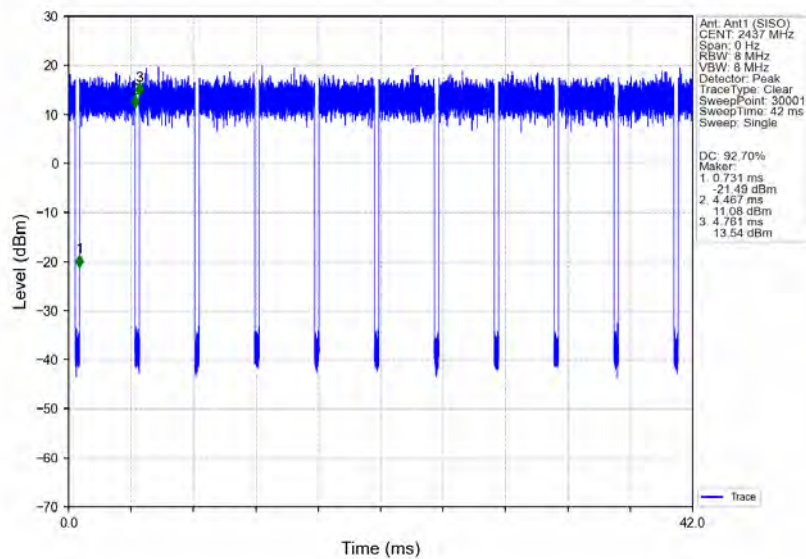


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

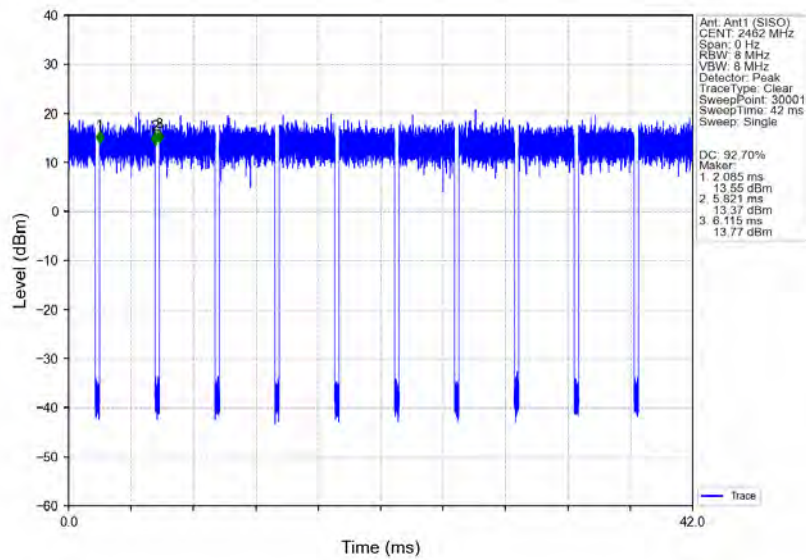


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

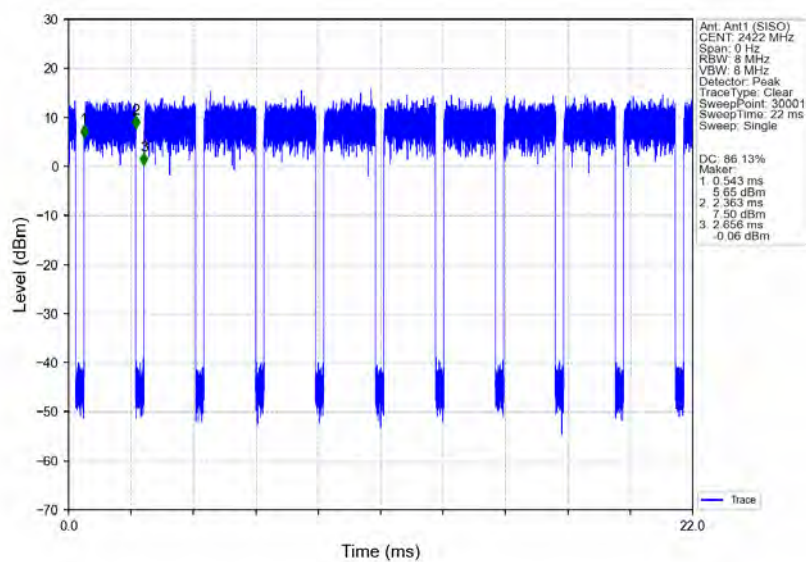


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

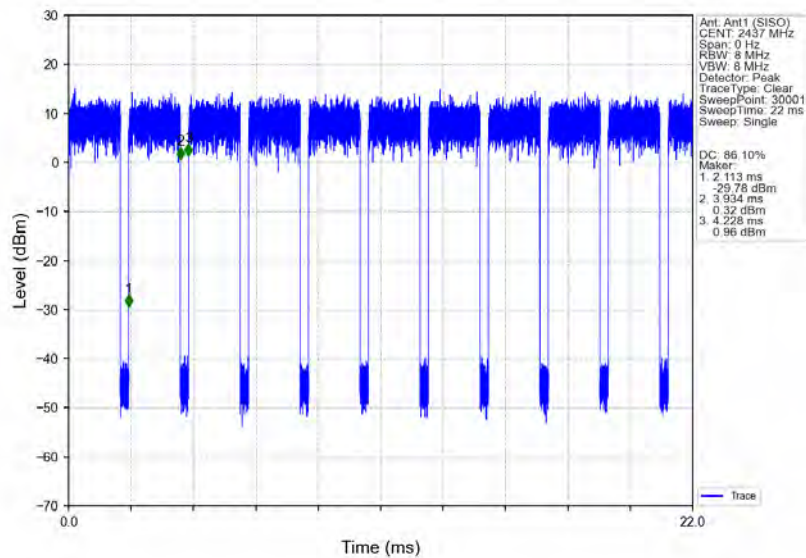


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

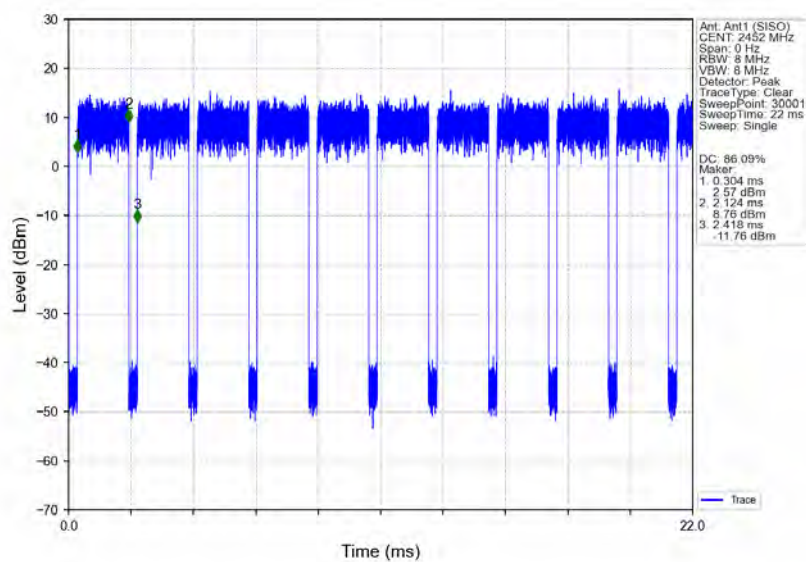


802.11ax(HE20) LCH 2412MHz_SU / Ant1 (SISO) NTN

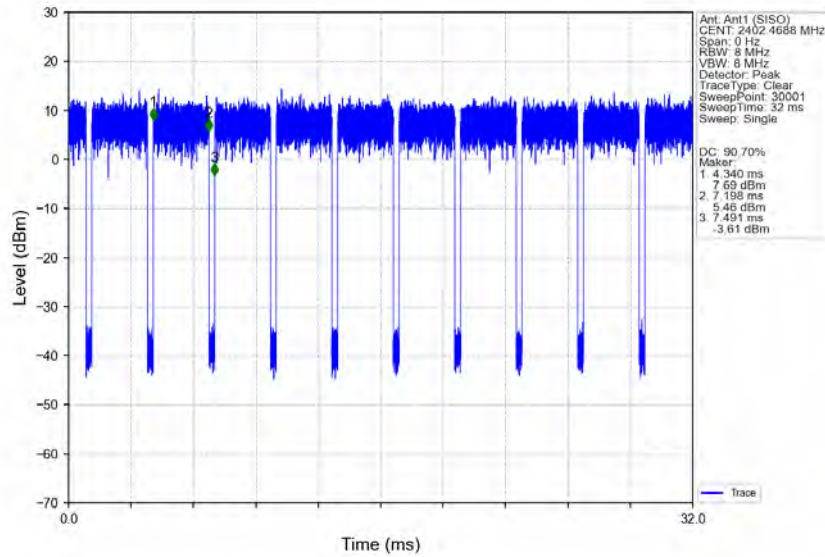


802.11ax(HE20) MCH 2437MHz_SU / Ant1 (SISO) NTN

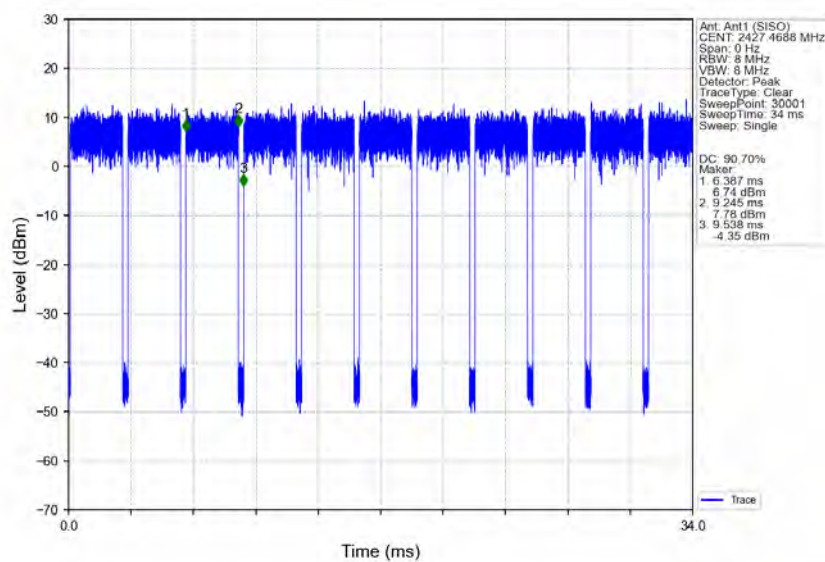


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTNV

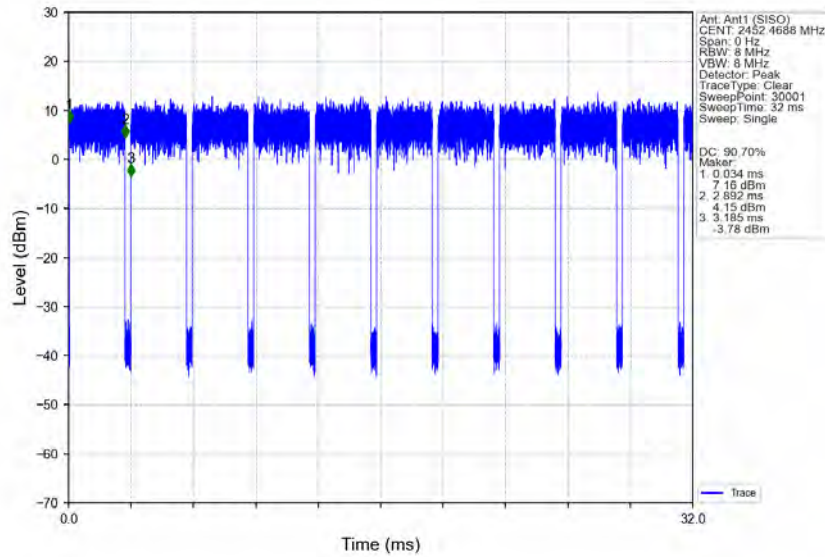


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTNV

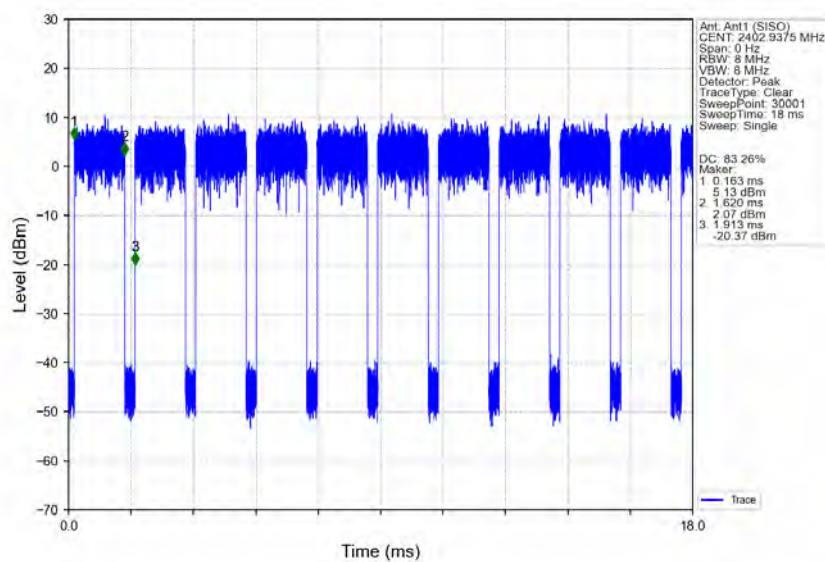

802.11ax(HE40) MCH_2437MHz_SU_ / Ant1 (SISO) NTVN

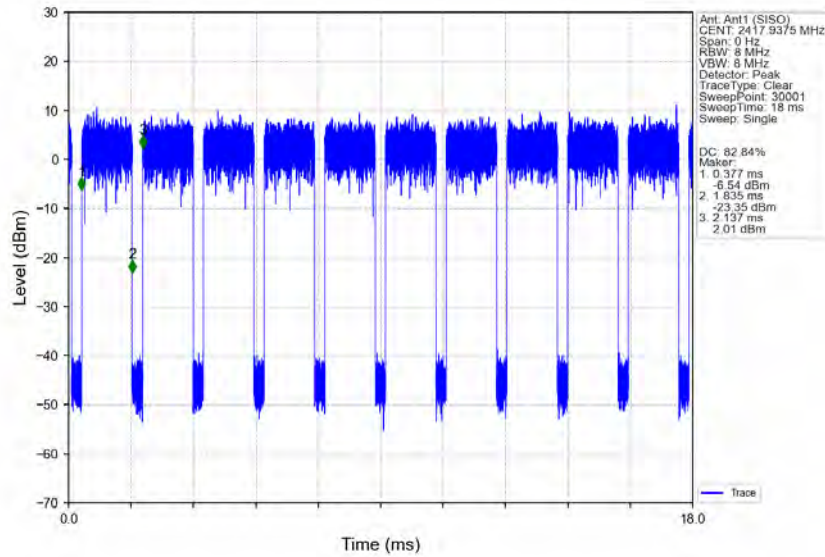

802.11ax(HE40) HCH_2452MHz_SU_ / Ant1 (SISO) NTVN

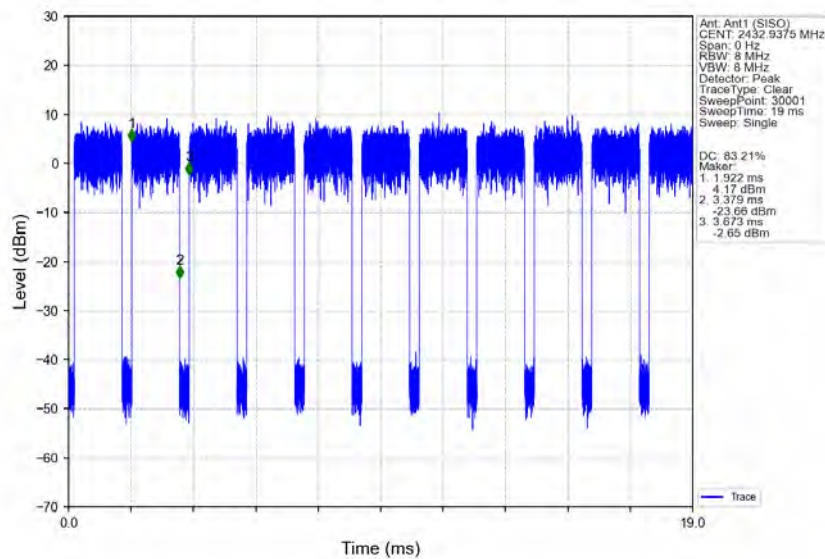

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	15.133	/	Pass
		2437	/	/	1	15.240	/	Pass
		2462	/	/	1	15.139	/	Pass
802.11g	SISO	2412	/	/	1	18.689	/	Pass
		2437	/	/	1	18.978	/	Pass
		2462	/	/	1	18.765	/	Pass
802.11n (HT20)	SISO	2412	/	/	1	19.639	/	Pass
		2437	/	/	1	20.064	/	Pass
		2462	/	/	1	19.869	/	Pass
802.11n (HT40)	SISO	2422	/	/	1	38.596	/	Pass
		2437	/	/	1	38.866	/	Pass
		2452	/	/	1	38.641	/	Pass
802.11ax (HE20)	SISO	2412	SU	/	1	19.882	/	Pass
		2437	SU	/	1	20.019	/	Pass
		2462	SU	/	1	19.821	/	Pass
802.11ax (HE40)	SISO	2422	SU	/	1	38.811	/	Pass
		2437	SU	/	1	39.065	/	Pass
		2452	SU	/	1	38.920	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	10.086	>=0.5	Pass
		2437	/	/	1	10.060	>=0.5	Pass
		2462	/	/	1	10.088	>=0.5	Pass
802.11g	SISO	2412	/	/	1	15.166	>=0.5	Pass
		2437	/	/	1	15.176	>=0.5	Pass
		2462	/	/	1	15.355	>=0.5	Pass
802.11n (HT20)	SISO	2412	/	/	1	15.160	>=0.5	Pass
		2437	/	/	1	15.157	>=0.5	Pass
		2462	/	/	1	15.175	>=0.5	Pass
802.11n (HT40)	SISO	2422	/	/	1	35.162	>=0.5	Pass
		2437	/	/	1	35.498	>=0.5	Pass
		2452	/	/	1	35.177	>=0.5	Pass
802.11ax (HE20)	SISO	2412	SU	/	1	16.463	>=0.5	Pass
		2437	SU	/	1	18.071	>=0.5	Pass
		2462	SU	/	1	16.269	>=0.5	Pass
802.11ax (HE40)	SISO	2422	SU	/	1	35.177	>=0.5	Pass
		2437	SU	/	1	37.814	>=0.5	Pass



Report No.: KSCR241200263901


Page: 107 of 171

		2452	SU	/	1	35.542	>=0.5	Pass
--	--	------	----	---	---	--------	-------	------


2.2 Test Graph

2.2.1 OBW


802.11b LCH 2412MHz Ant1 (SISO) NTN

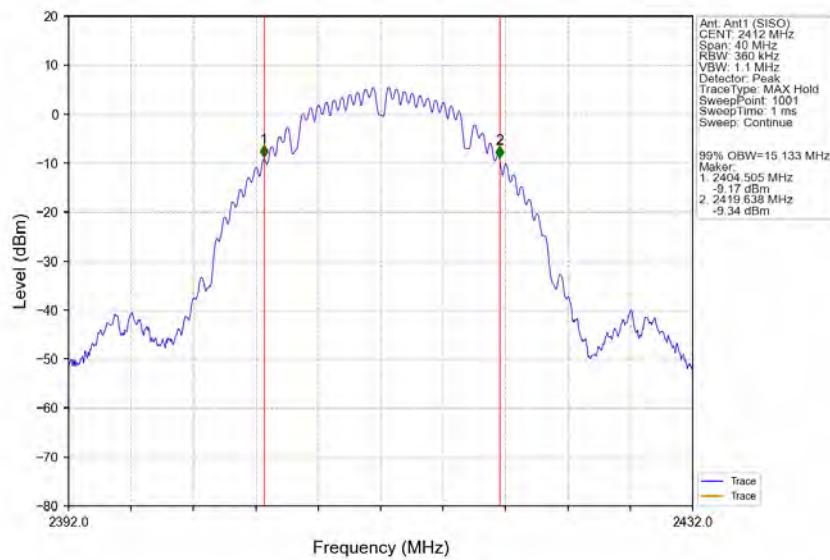


802.11b MCH 2437MHz Ant1 (SISO) NTN

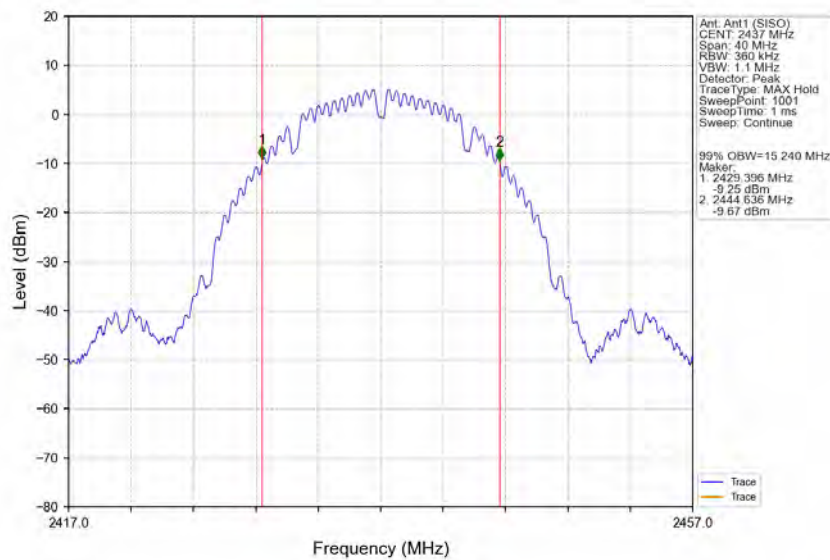


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

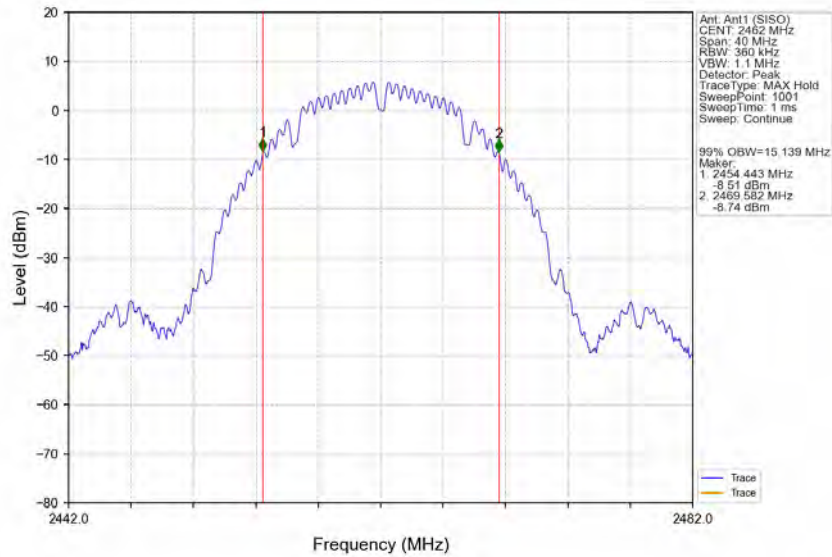


802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

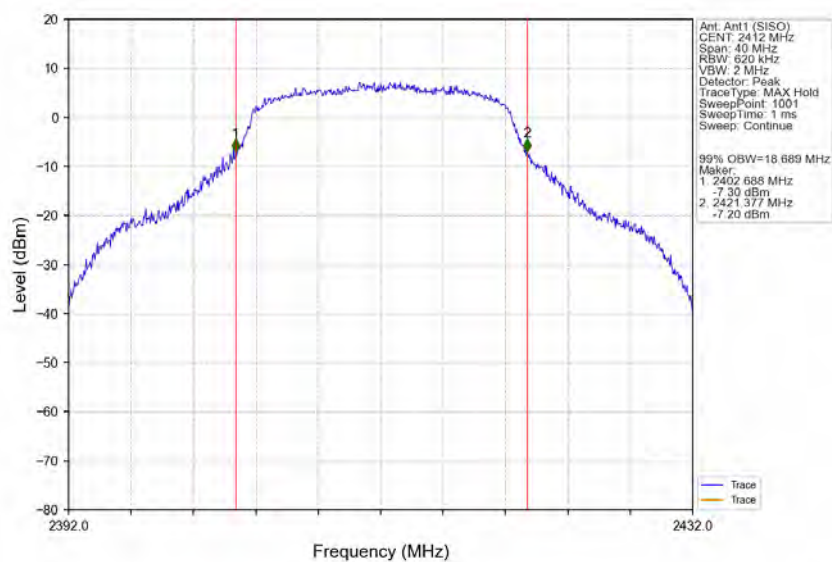


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

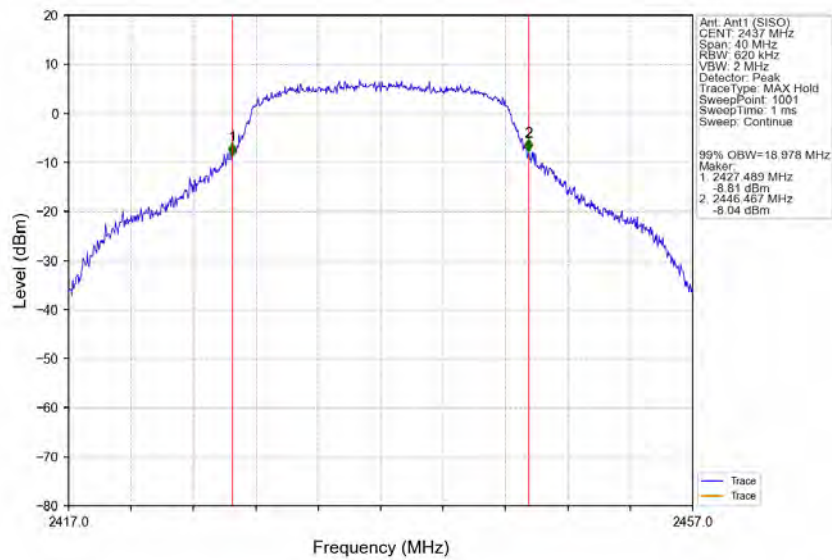


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

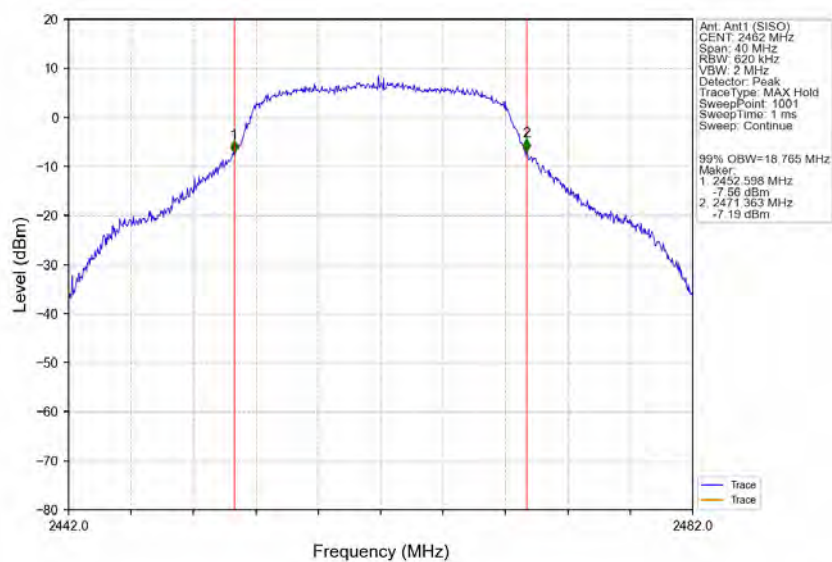


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

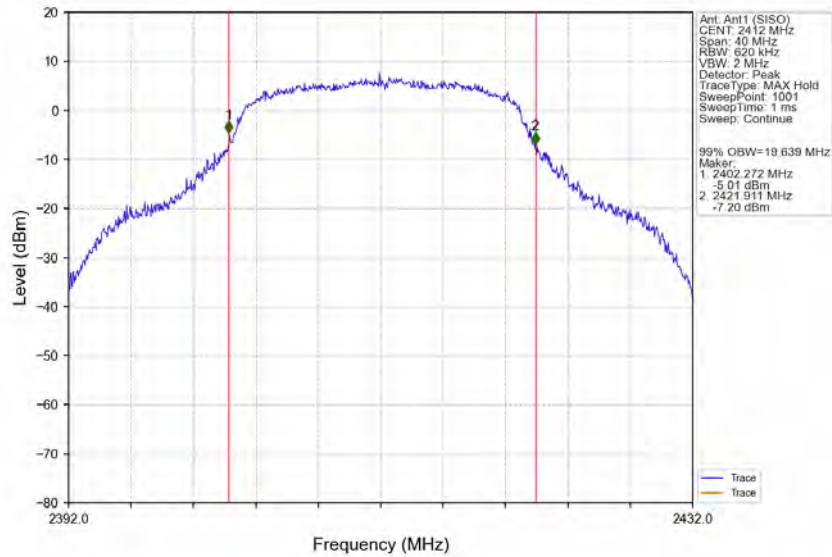


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

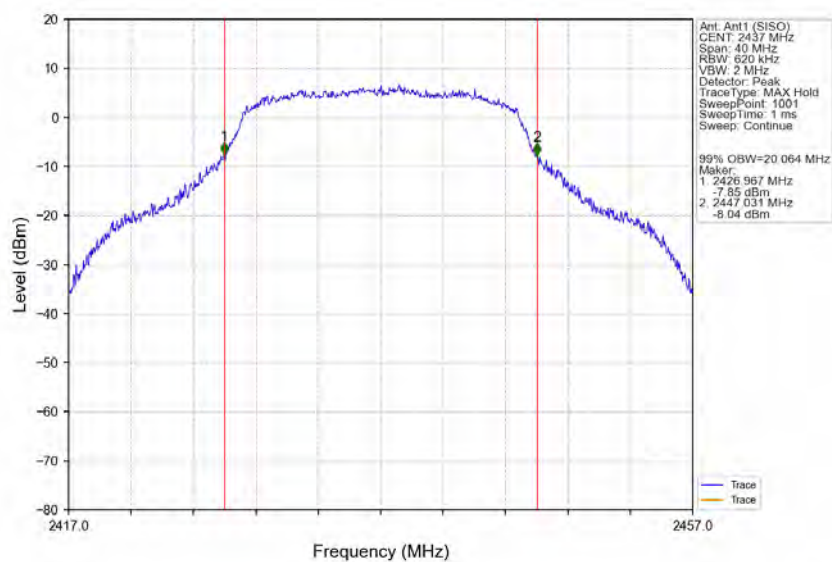


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

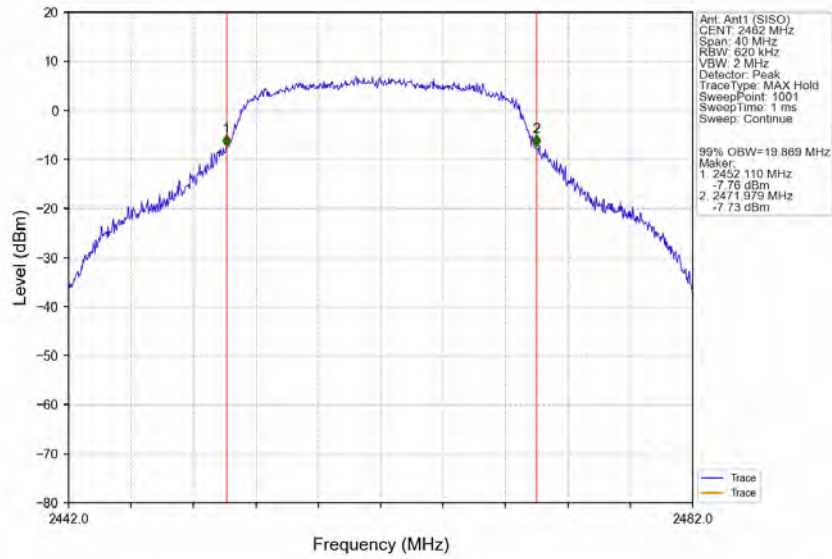


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

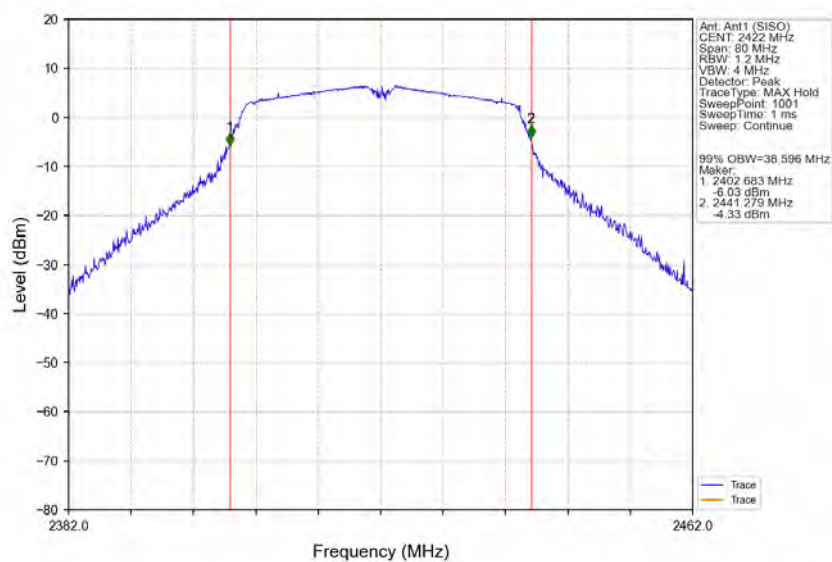


802.11n(HT40) MCH_2437MHz_Ant1 (SISO) NTN

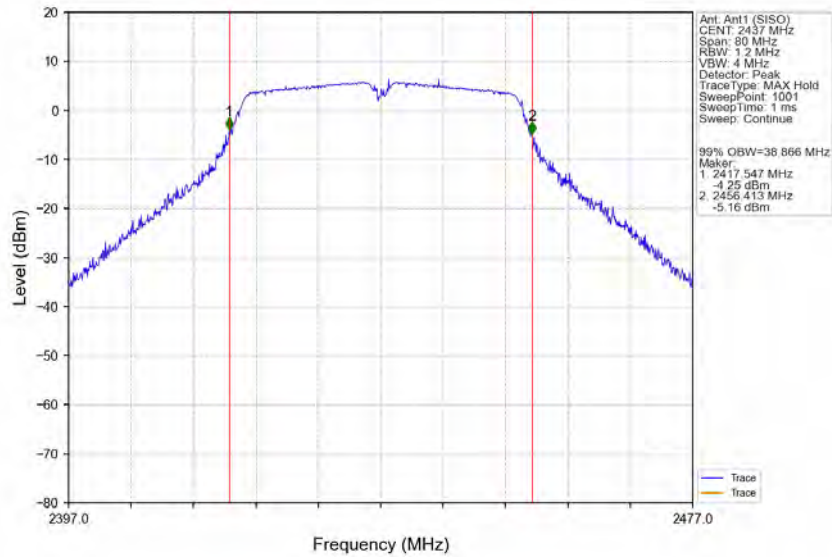


802.11n(HT40) HCH_2452MHz_Ant1 (SISO) NTN

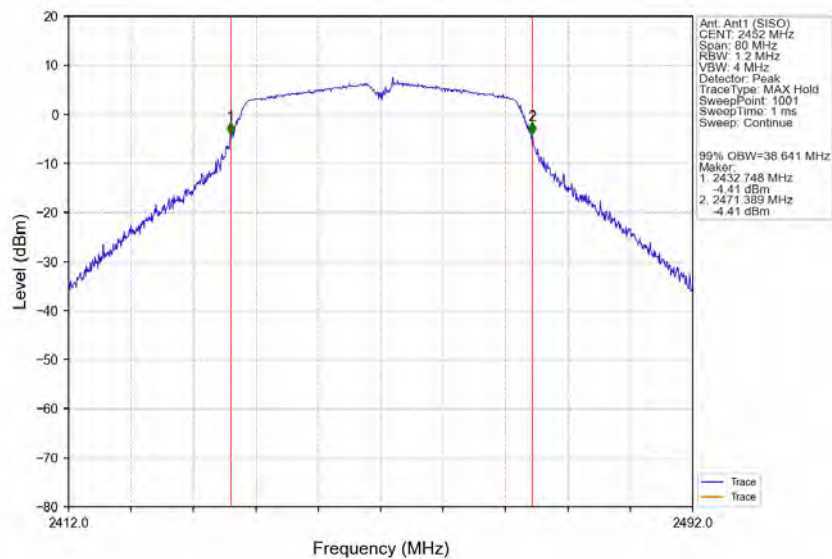


802.11ax(HE20) LCH 2412MHz SU / Ant1 (SISO) NTNV

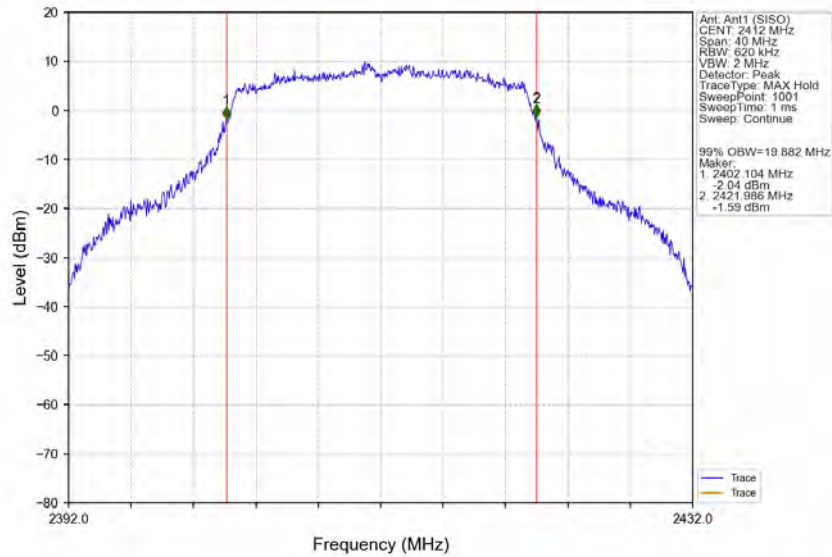


802.11ax(HE20) MCH 2437MHz SU / Ant1 (SISO) NTNV

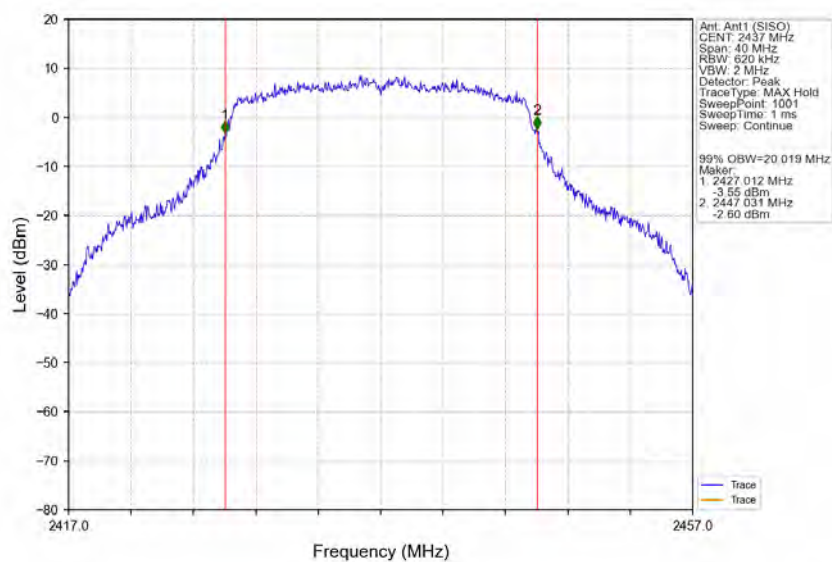


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTVN

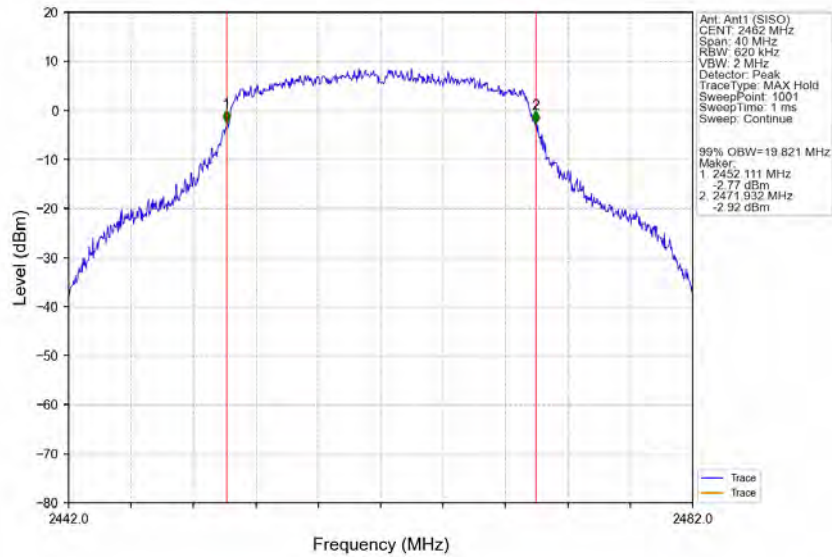


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTVN

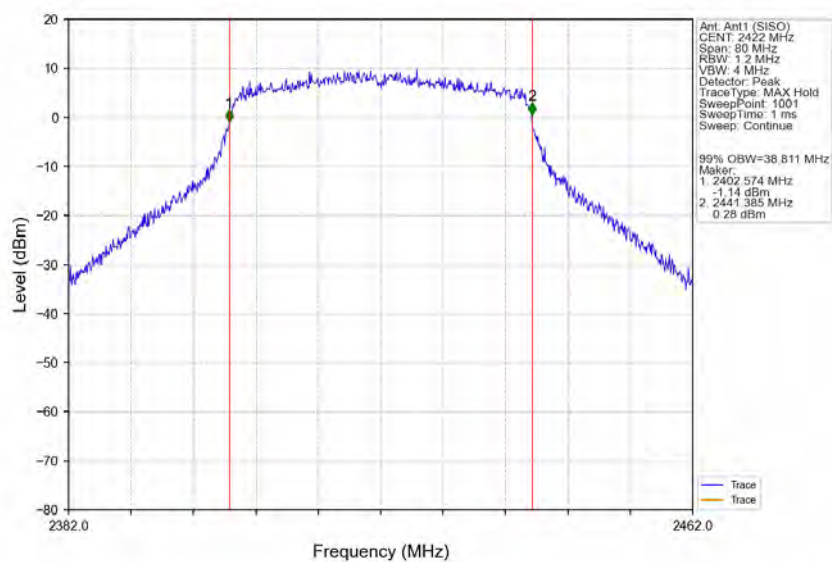

802.11ax(HE40) MCH 2437MHz_SU / Ant1 (SISO) NTVN

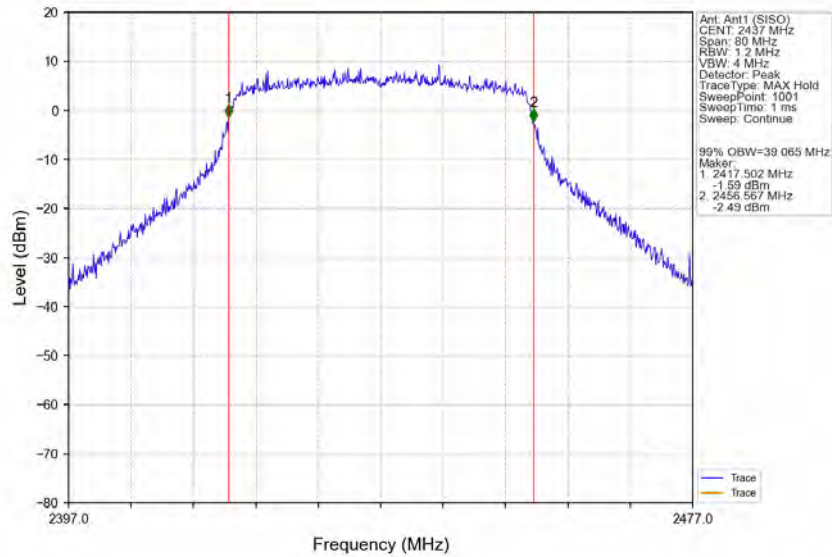


802.11ax(HE40) HCH 2452MHz_SU / Ant1 (SISO) NTVN

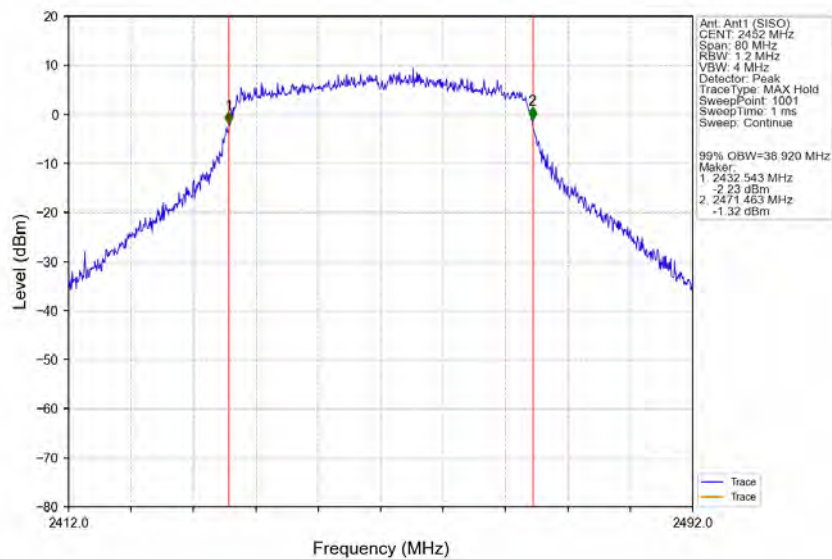


2.2.2 6dB BW


802.11b LCH 2412MHz_Ant1 (SISO)_NTNV

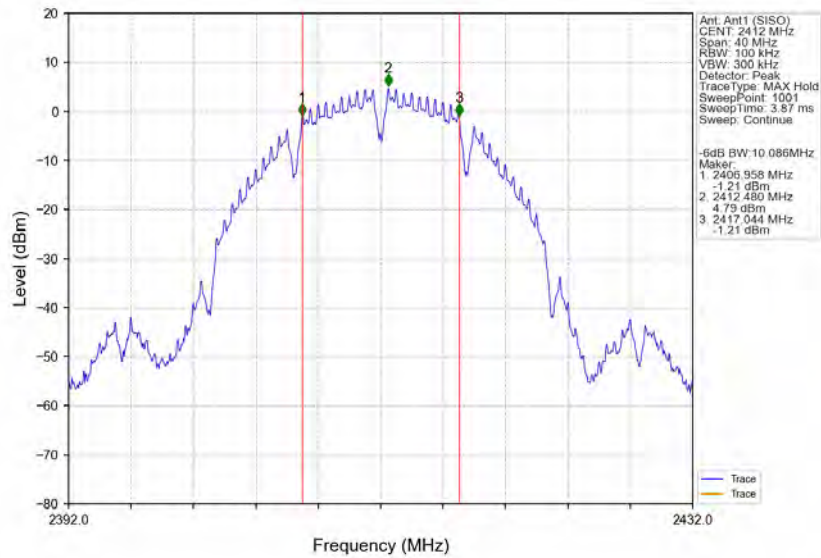


802.11b MCH 2437MHz_Ant1 (SISO)_NTNV

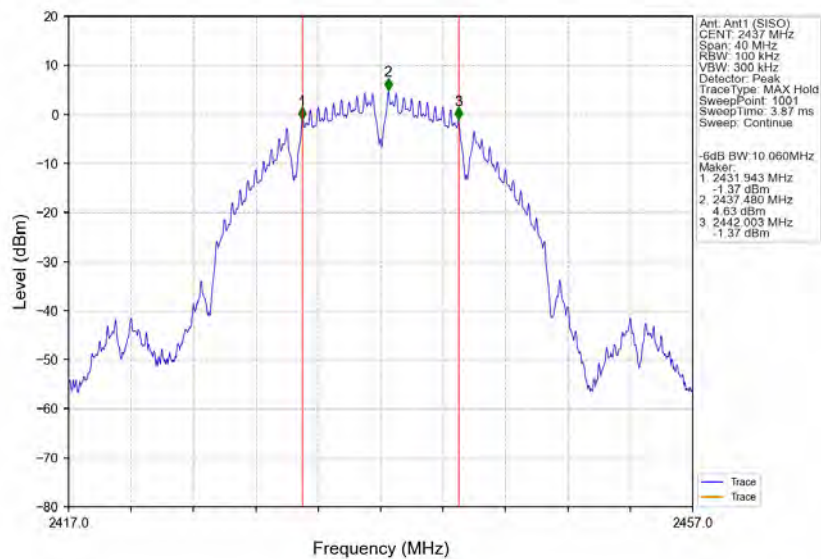


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

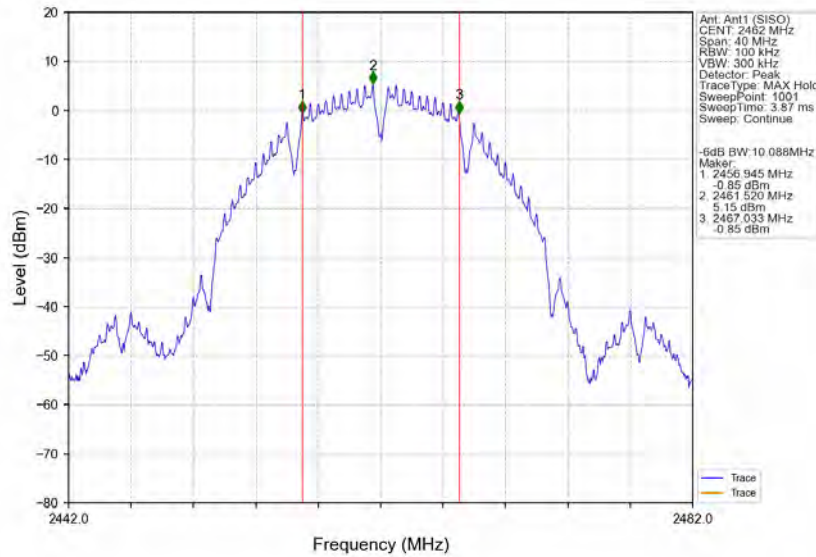


802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

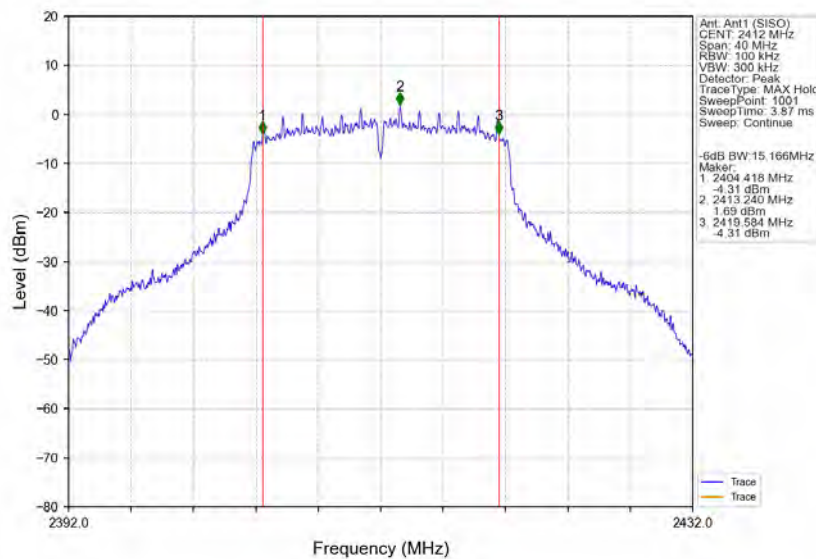


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

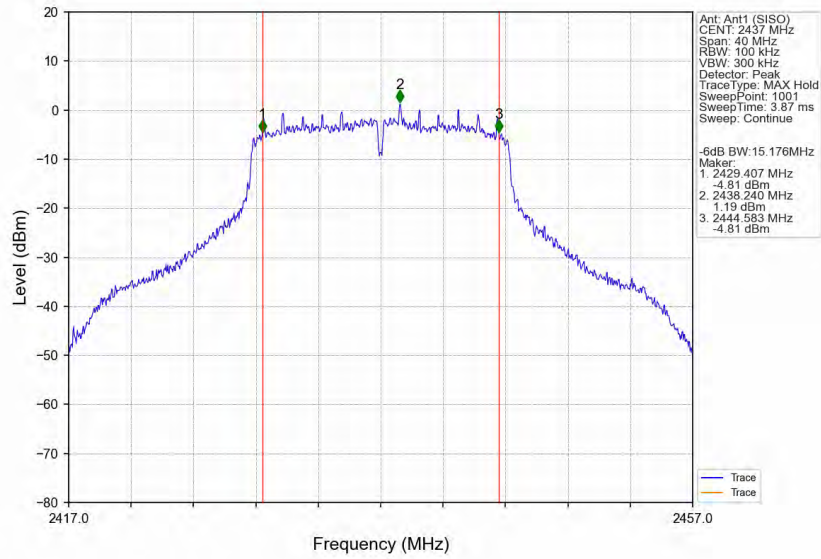


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

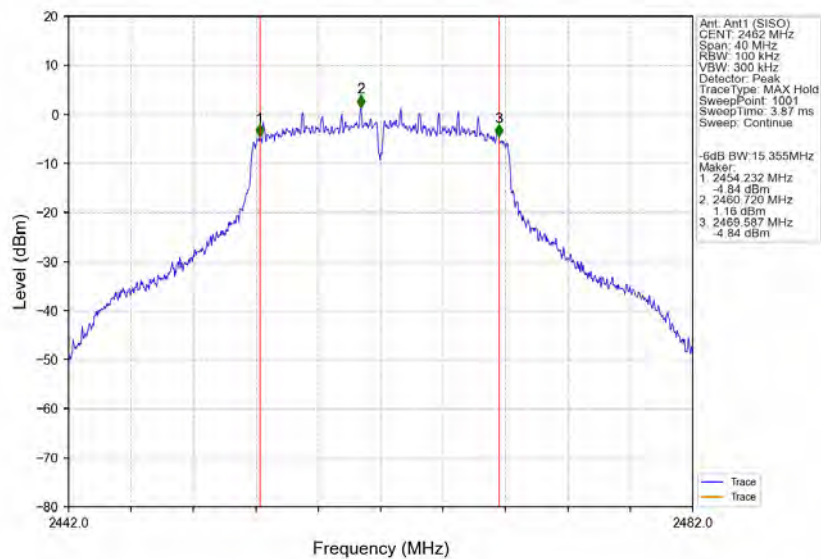


802.11n(HT20) LCH_2412MHz_Ant1 (SISO)_NTNV

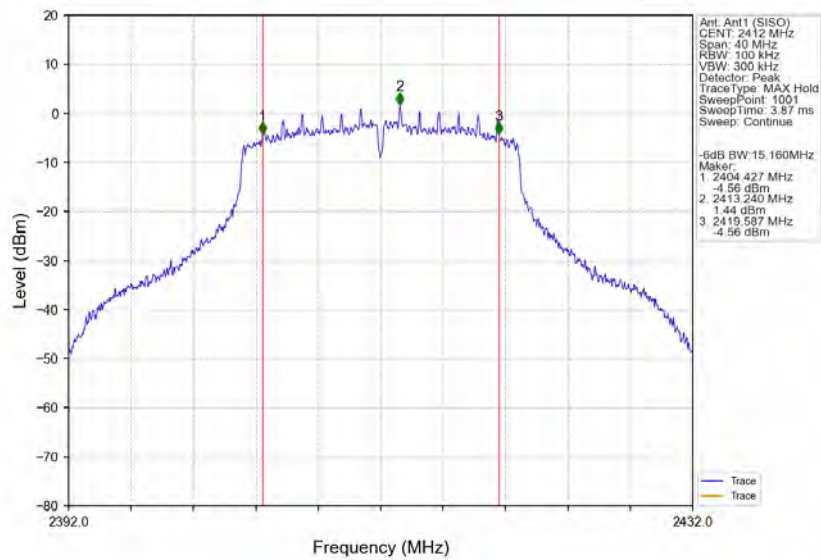


802.11n(HT20) MCH_2437MHz_Ant1 (SISO)_NTNV

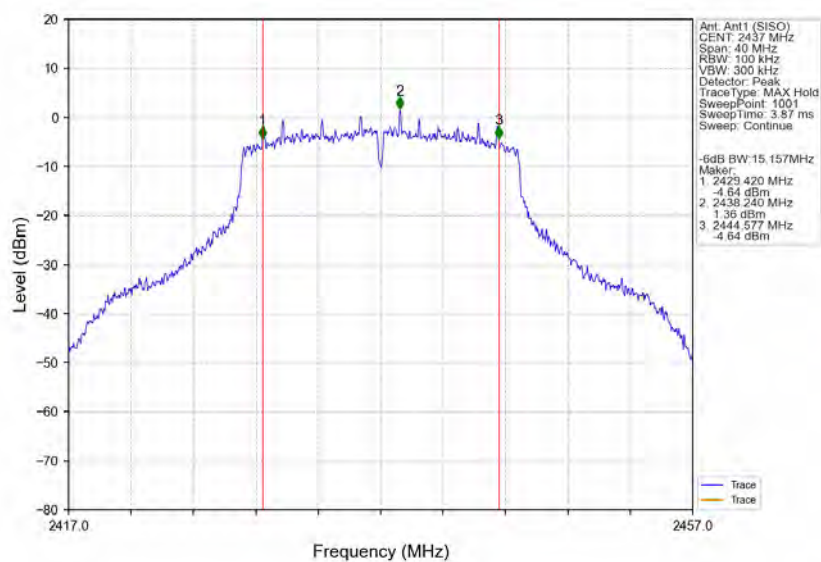


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

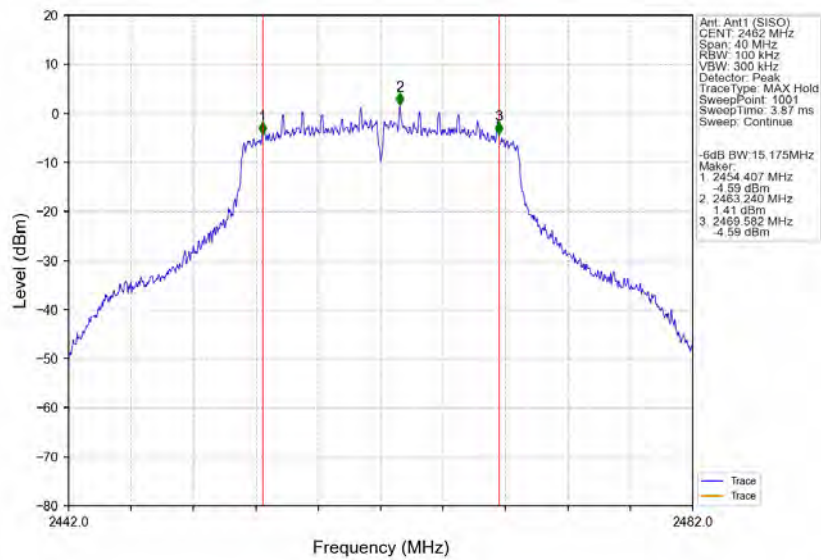


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

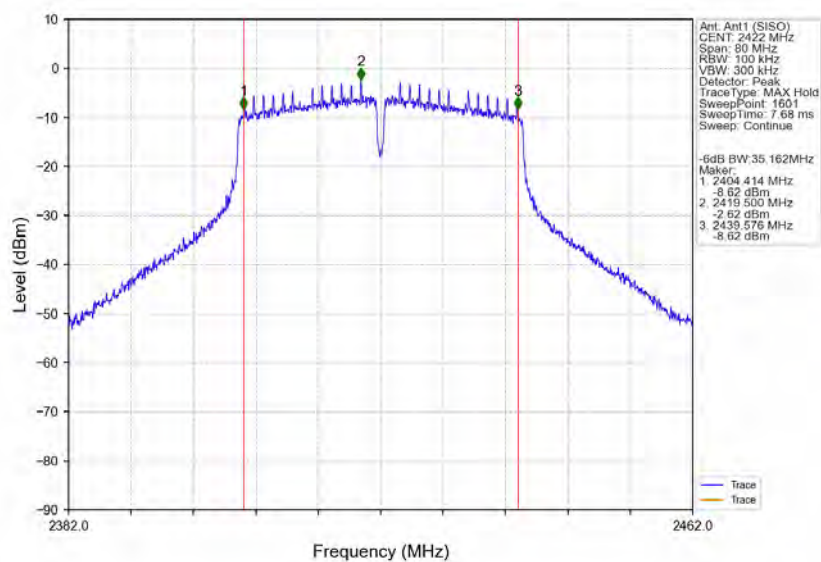


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

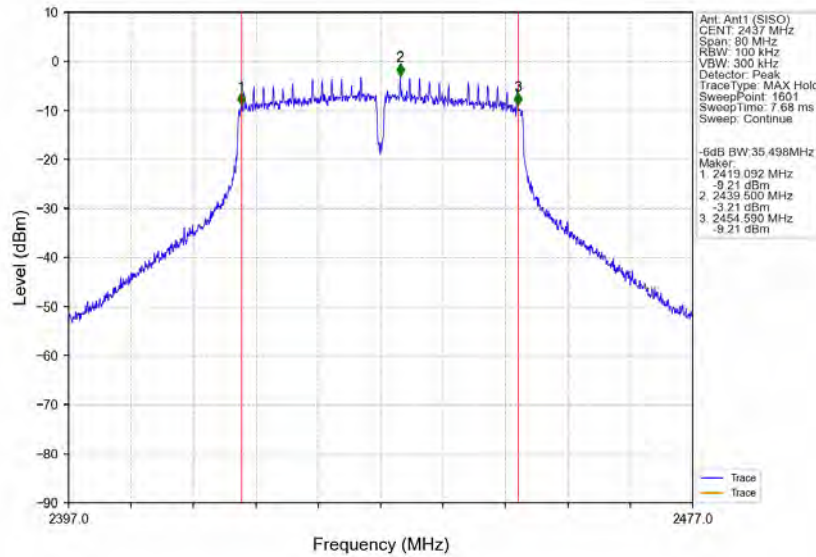


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

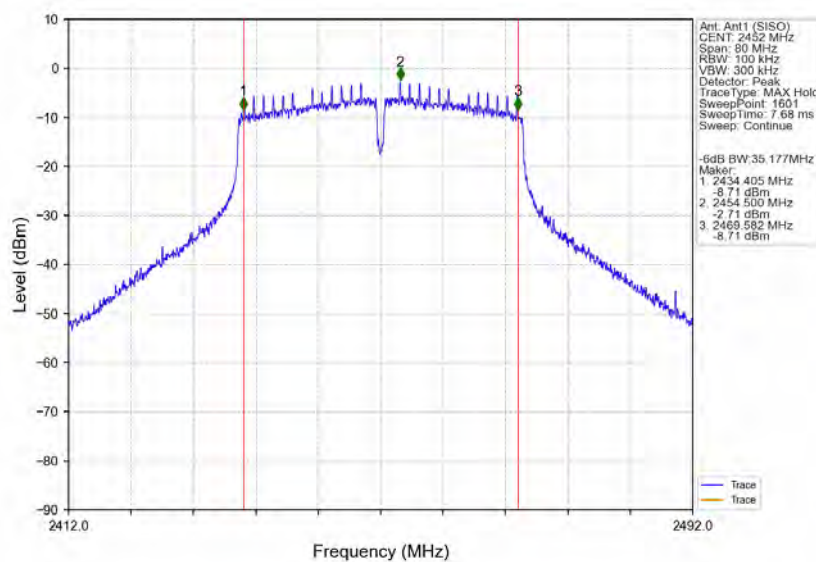


802.11ax(HE20) LCH 2412MHz_SU / Ant1 (SISO) NTN

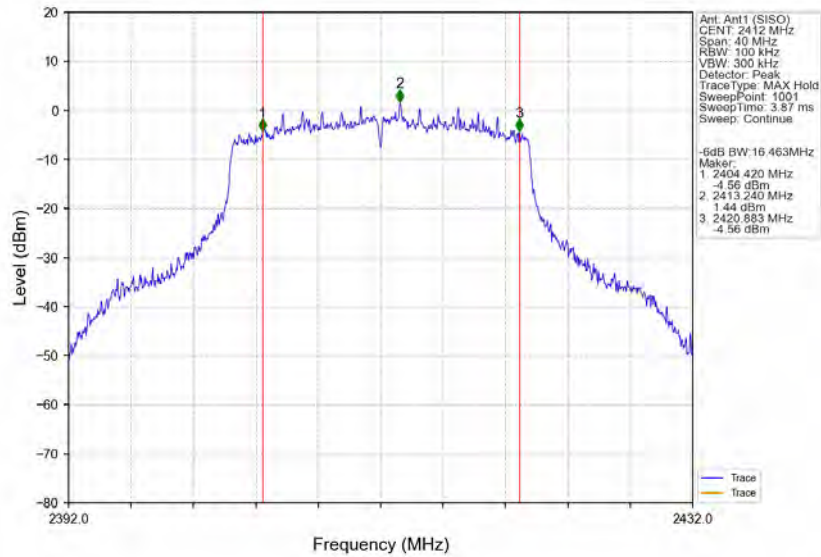


802.11ax(HE20) MCH 2437MHz_SU / Ant1 (SISO) NTN

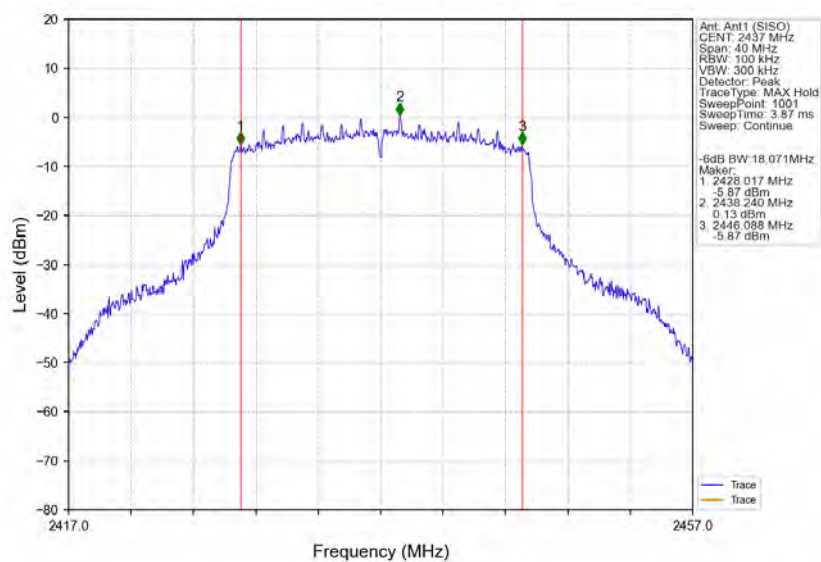


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTVN

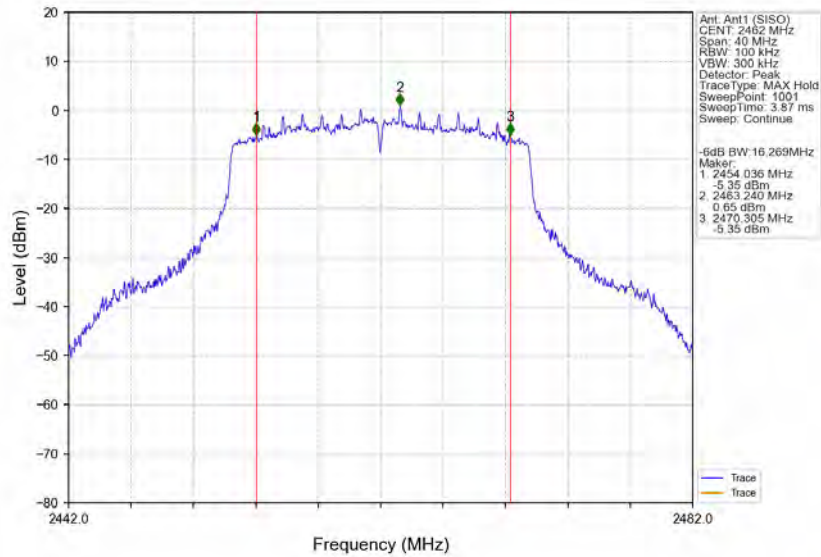


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTVN

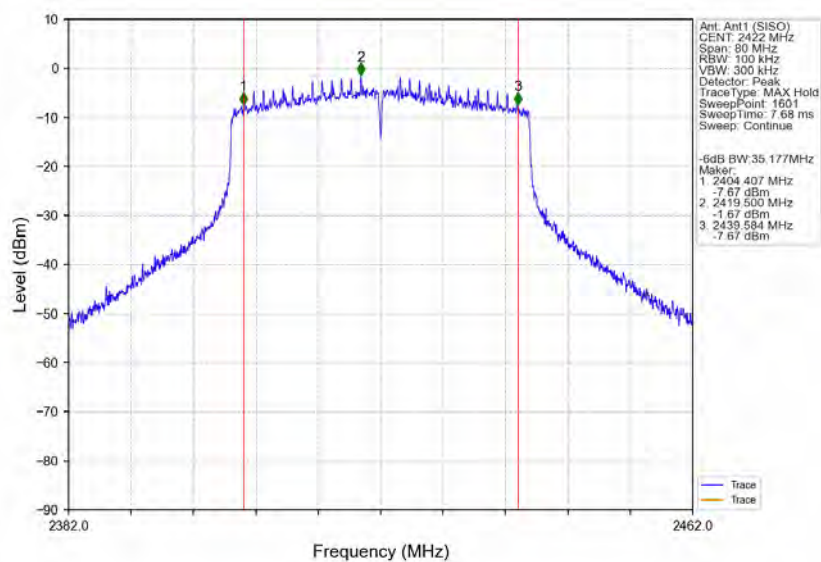

802.11ax(HE40) MCH 2437MHz_SU / Ant1 (SISO) NTNV

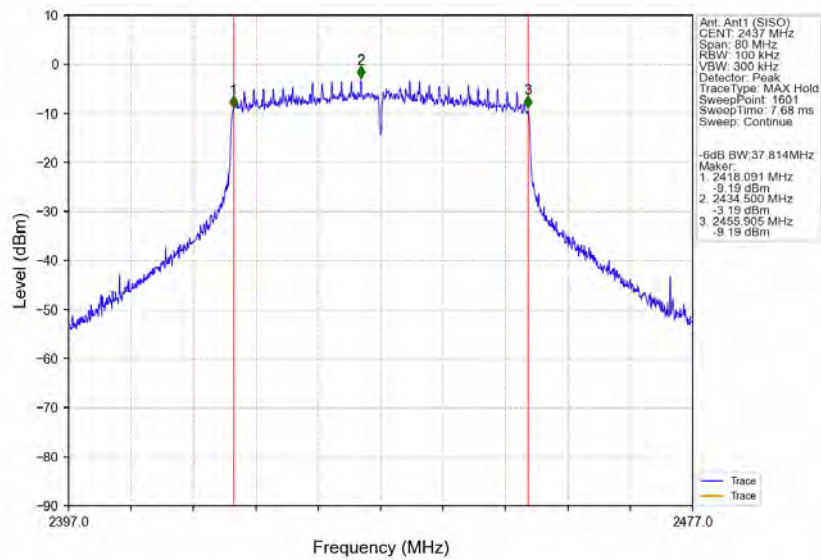

802.11ax(HE40) HCH 2452MHz_SU / Ant1 (SISO) NTNV

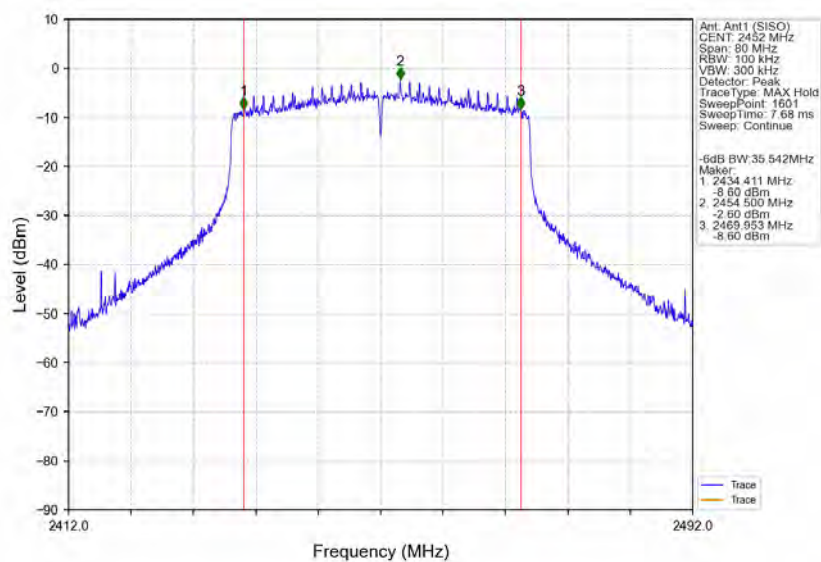

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Verdict
					ANT1	Limit	
802.11b	SISO	2412	/	/	13.49	<=30	Pass
		2437	/	/	13.21	<=30	Pass
		2462	/	/	13.84	<=30	Pass
802.11g	SISO	2412	/	/	11.66	<=30	Pass
		2437	/	/	11.36	<=30	Pass
		2462	/	/	11.78	<=30	Pass
802.11n (HT20)	SISO	2412	/	/	11.99	<=30	Pass
		2437	/	/	11.75	<=30	Pass
		2462	/	/	12.09	<=30	Pass
802.11n (HT40)	SISO	2422	/	/	10.40	<=30	Pass
		2437	/	/	10.36	<=30	Pass
		2452	/	/	10.52	<=30	Pass
802.11ax (HE20)	SISO	2412	SU	/	11.43	<=30	Pass
		2437	SU	/	9.92	<=30	Pass
		2462	SU	/	10.44	<=30	Pass
802.11ax (HE40)	SISO	2422	SU	/	11.36	<=30	Pass
		2437	SU	/	10.36	<=30	Pass
		2452	SU	/	10.48	<=30	Pass
Note1: Antenna Gain: Ant1: 4.79dBi;							

3.2 Test Graph


3.2.1 Power

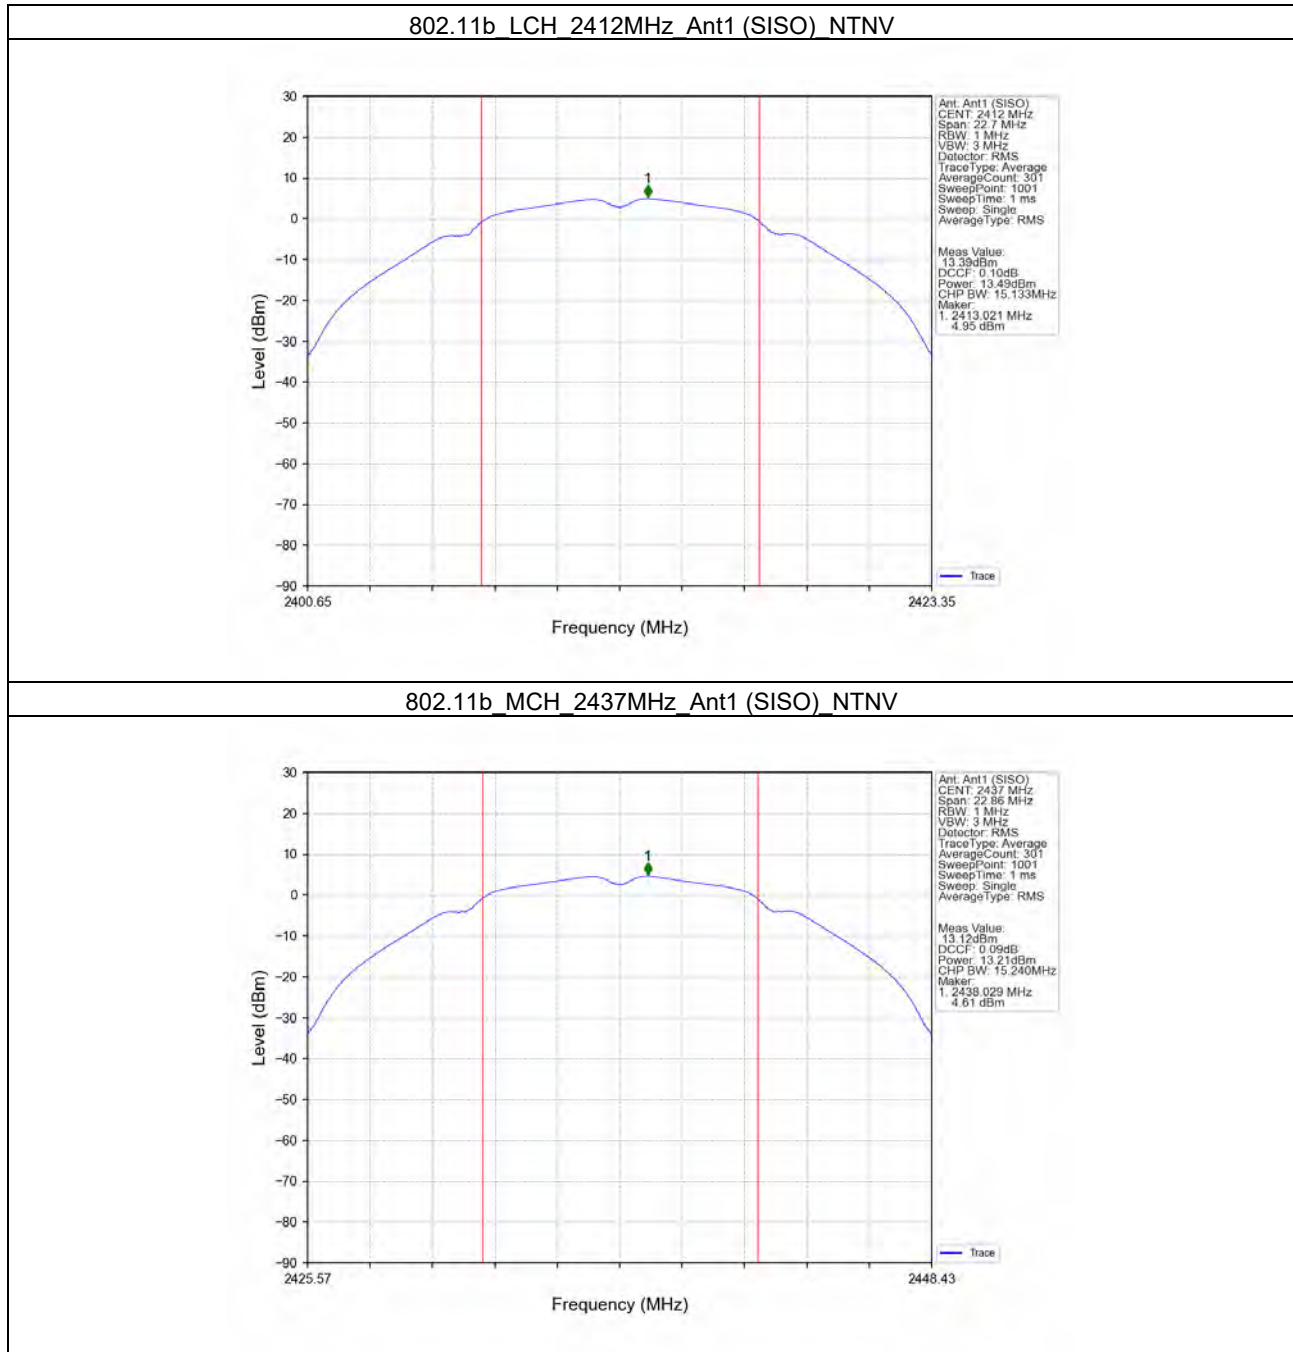


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

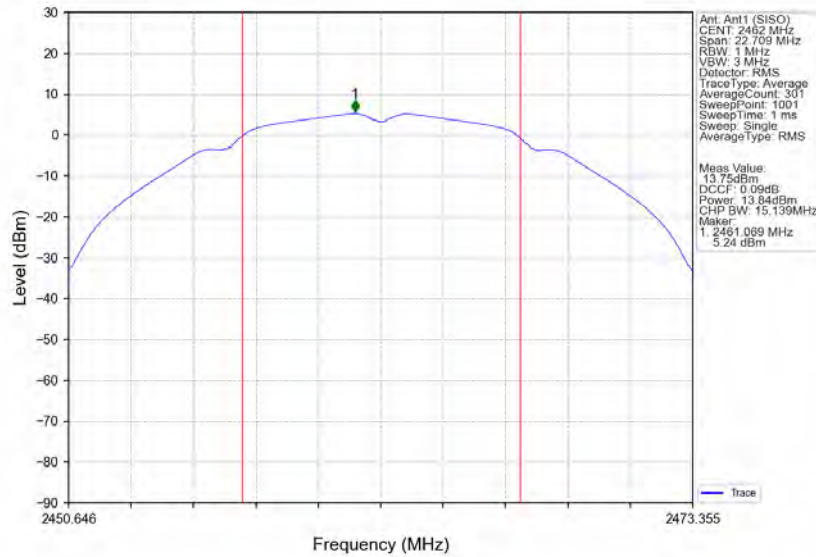


802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

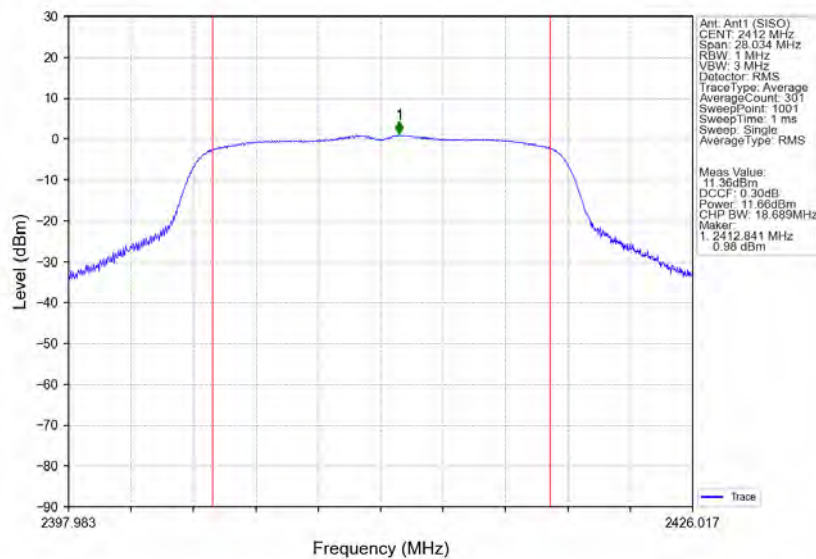


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

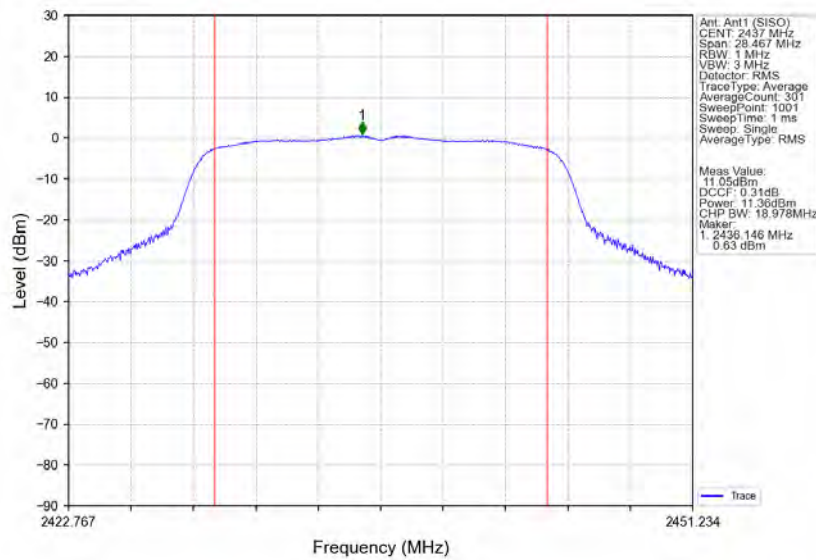


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

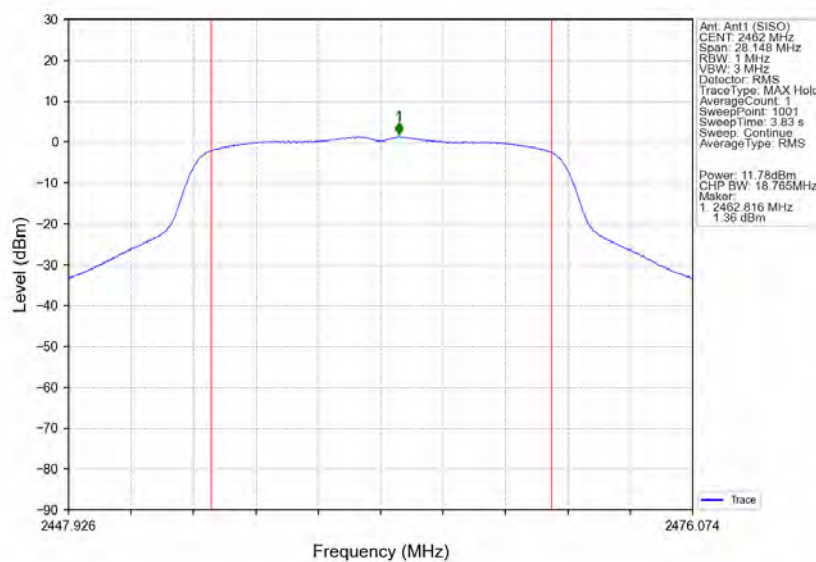


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

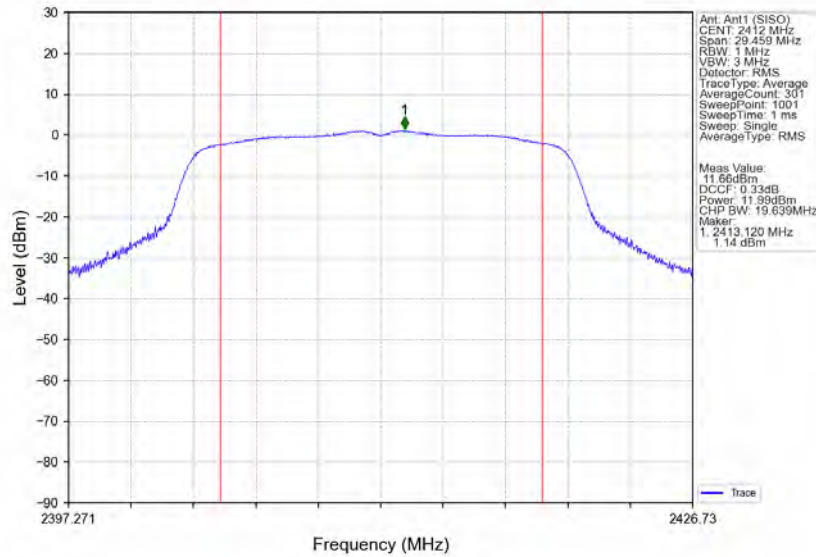


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

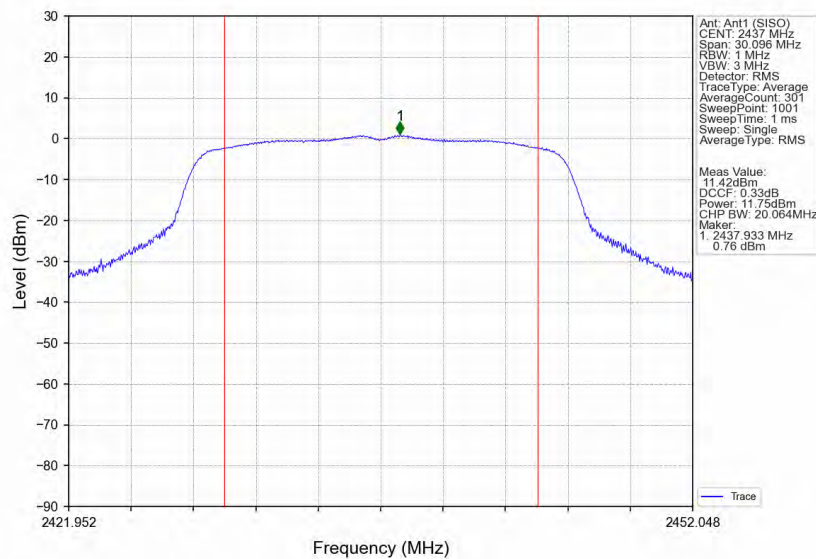


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

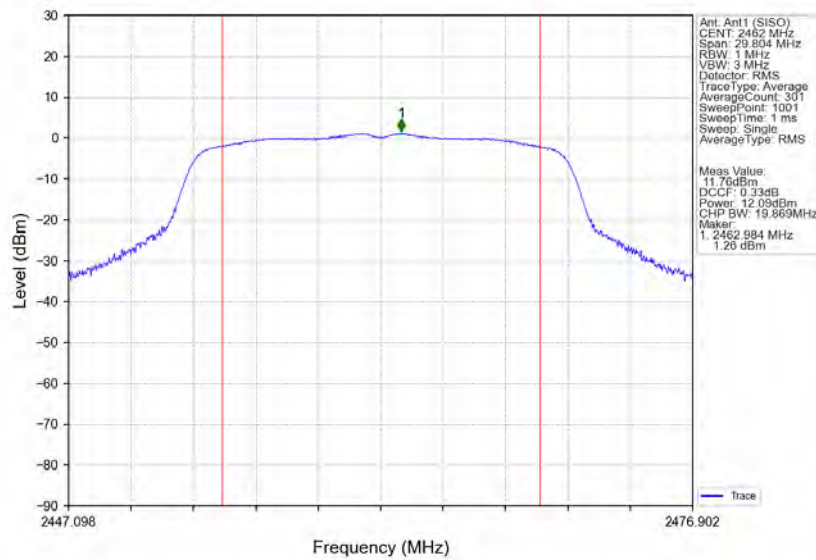


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

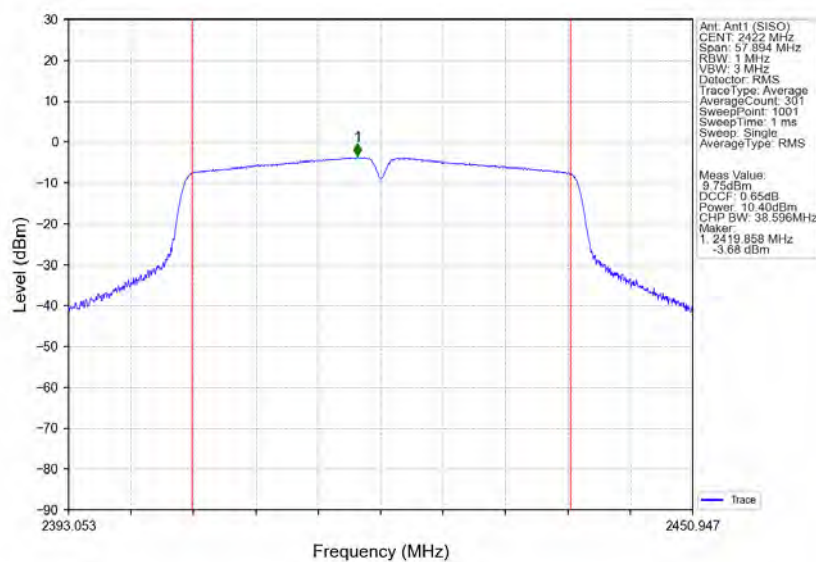


802.11n(HT40) MCH 2437MHz Ant1 (SISO) NTN

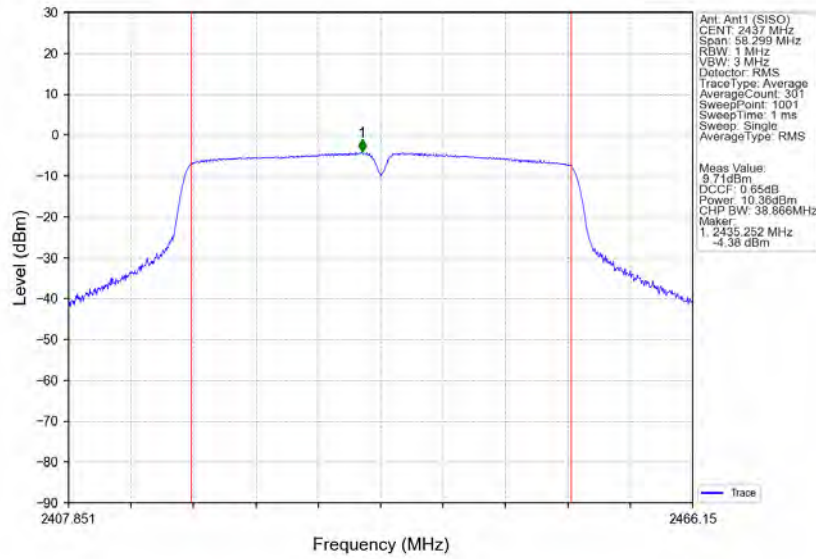


802.11n(HT40) HCH 2452MHz Ant1 (SISO) NTN

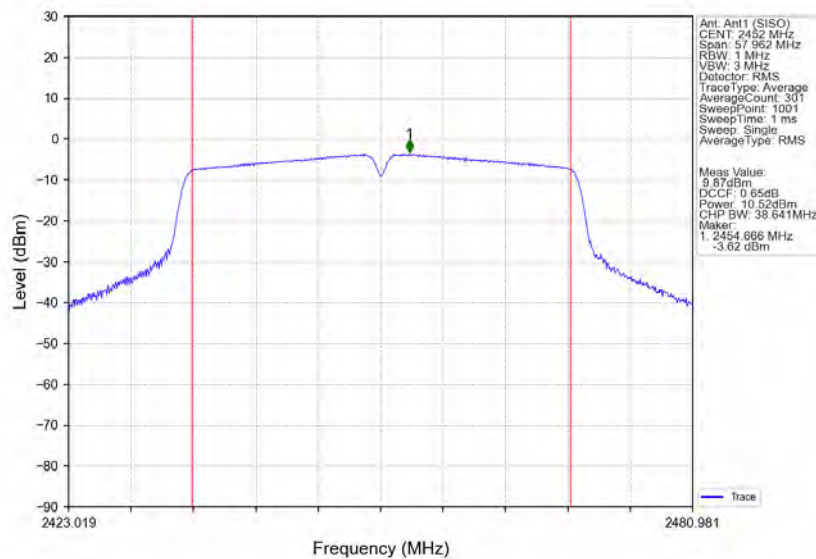


802.11ax(HE20) LCH 2412MHz_SU / Ant1 (SISO) NTNV

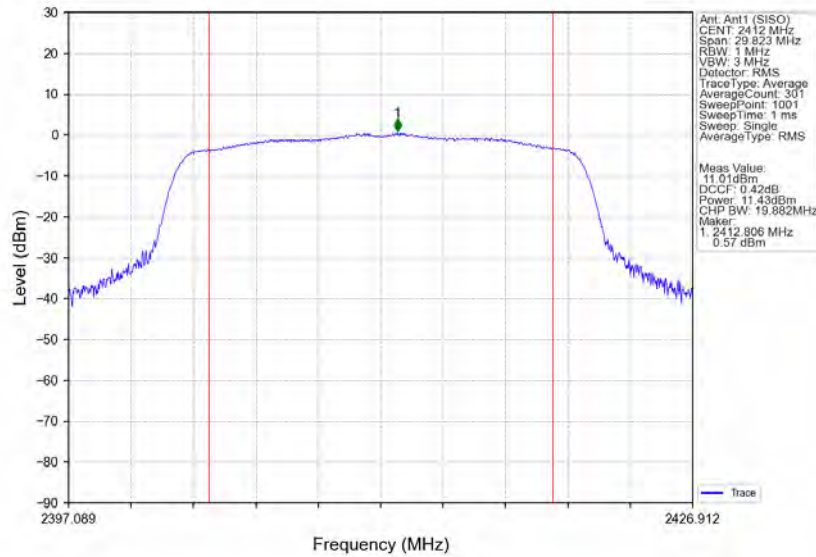


802.11ax(HE20) MCH 2437MHz_SU / Ant1 (SISO) NTNV

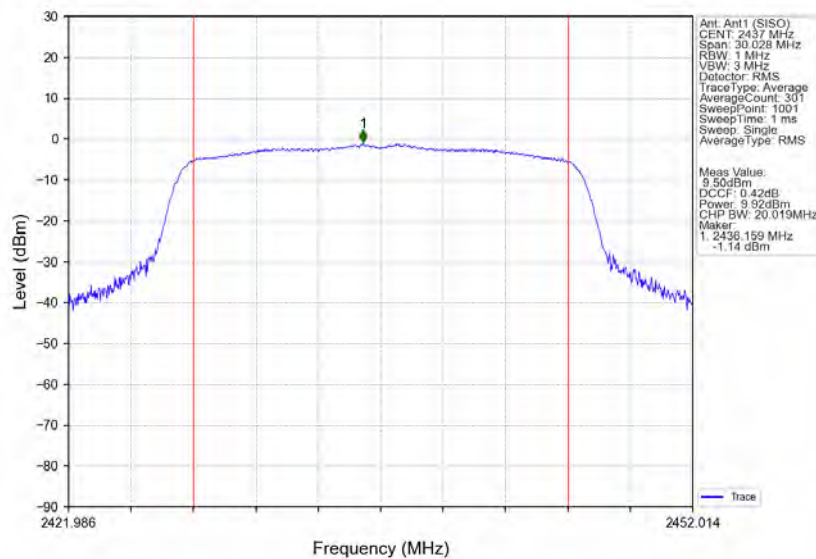


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTVN

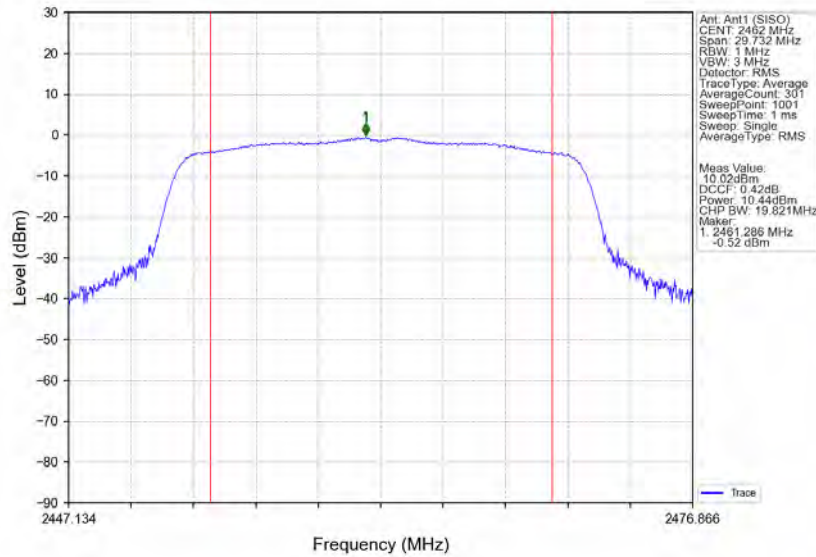


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTVN

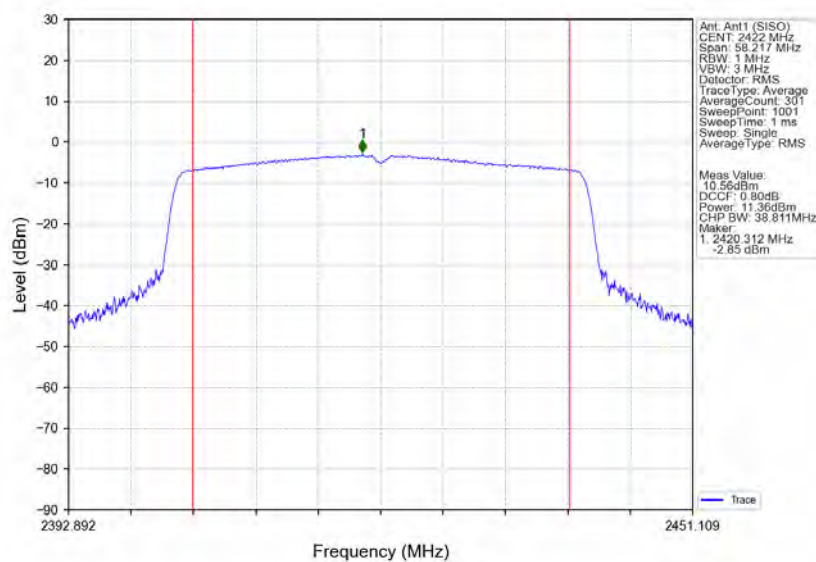

802.11ax(HE40) MCH 2437MHz SU / Ant1 (SISO) NTVN

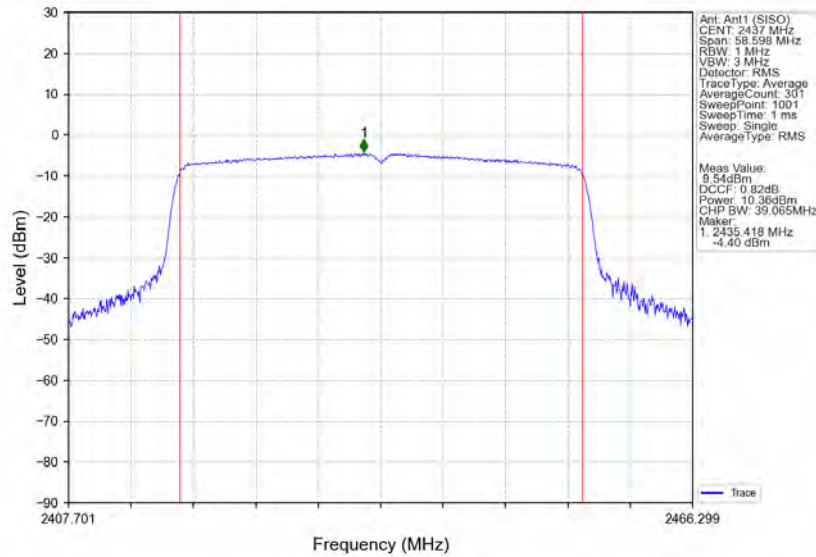

802.11ax(HE40) HCH 2452MHz SU / Ant1 (SISO) NTVN

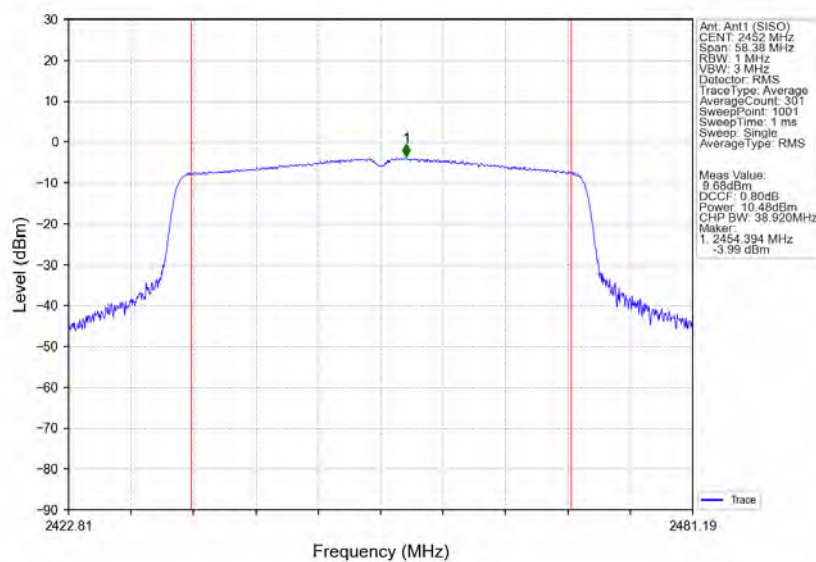

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/3kHz)		Verdict
					ANT1	Limit	
802.11b	SISO	2412	/	/	-9.63	<=8	Pass
		2437	/	/	-9.01	<=8	Pass
		2462	/	/	-8.91	<=8	Pass
802.11g	SISO	2412	/	/	-13.26	<=8	Pass
		2437	/	/	-13.38	<=8	Pass
		2462	/	/	-12.65	<=8	Pass
802.11n (HT20)	SISO	2412	/	/	-13.76	<=8	Pass
		2437	/	/	-13.57	<=8	Pass
		2462	/	/	-12.50	<=8	Pass
802.11n (HT40)	SISO	2422	/	/	-17.29	<=8	Pass
		2437	/	/	-18.56	<=8	Pass
		2452	/	/	-17.57	<=8	Pass
802.11ax (HE20)	SISO	2412	SU	/	-14.00	<=8	Pass
		2437	SU	/	-16.46	<=8	Pass
		2462	SU	/	-14.35	<=8	Pass
802.11ax (HE40)	SISO	2422	SU	/	-17.06	<=8	Pass
		2437	SU	/	-16.81	<=8	Pass
		2452	SU	/	-17.27	<=8	Pass

Note1: Antenna Gain: Ant1: 4.79dBi;


4.2 Test Graph

4.2.1 PSD


802.11b LCH 2412MHz Ant1 (SISO) NTN

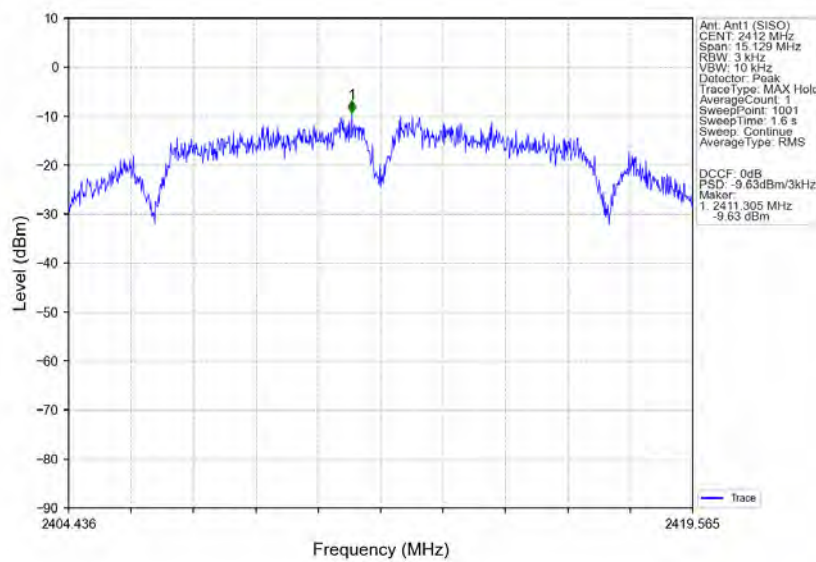


802.11b MCH 2437MHz Ant1 (SISO) NTN

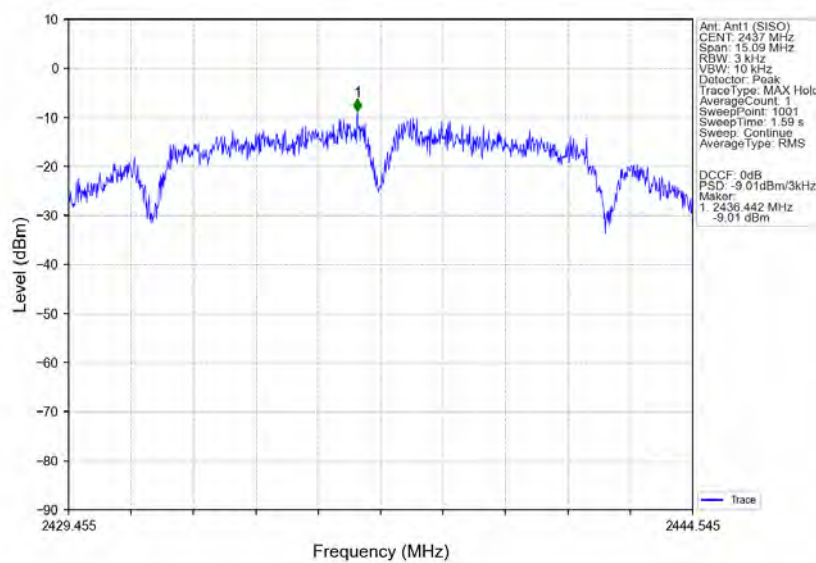


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

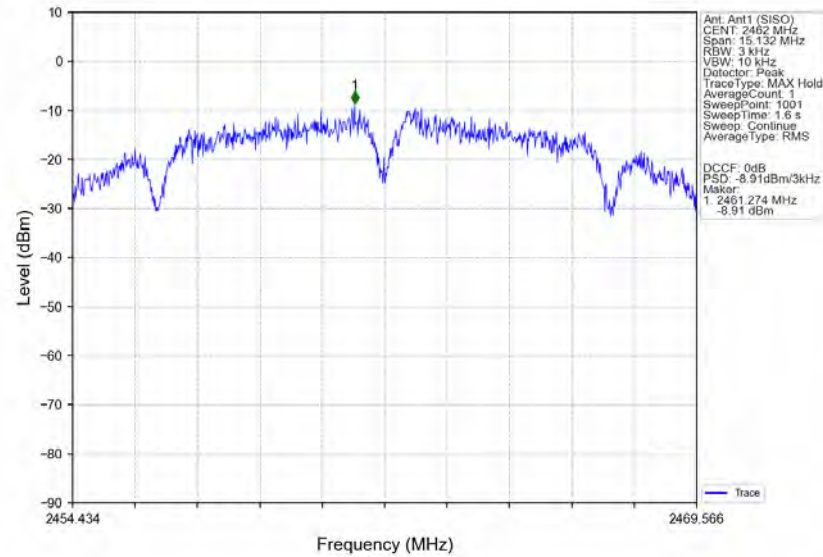


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

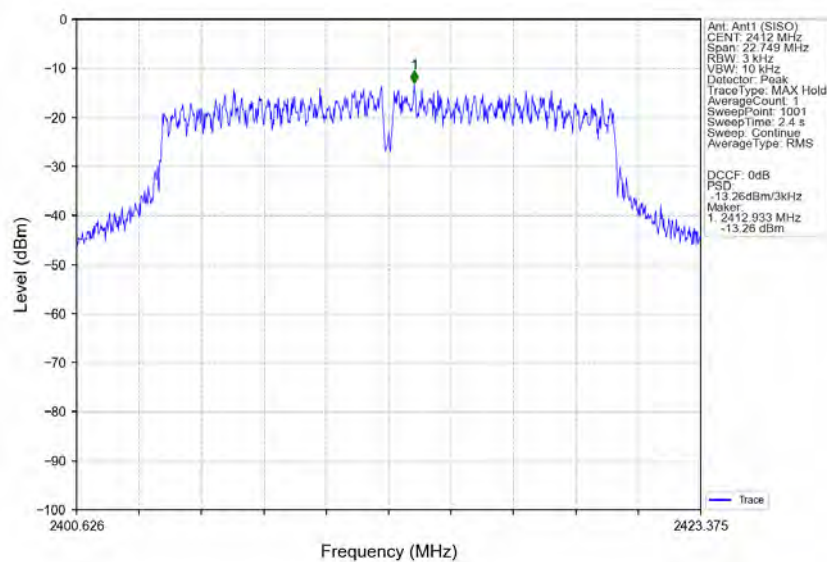


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

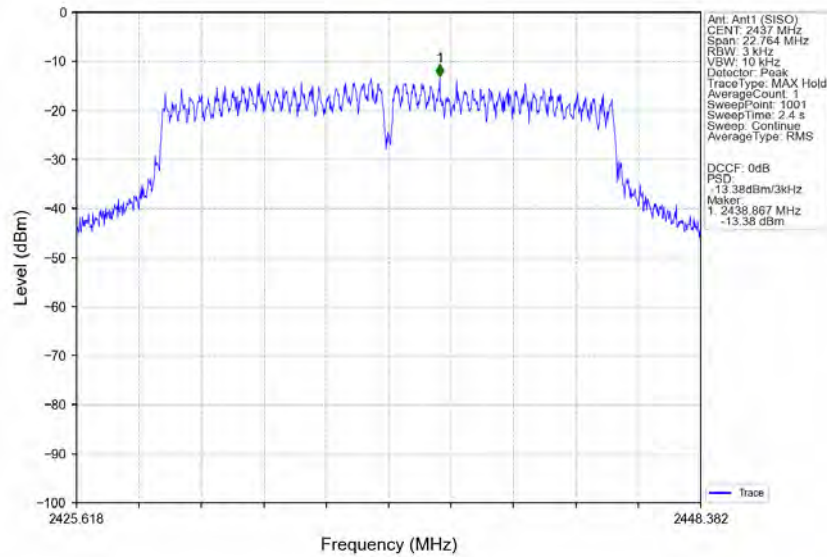


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

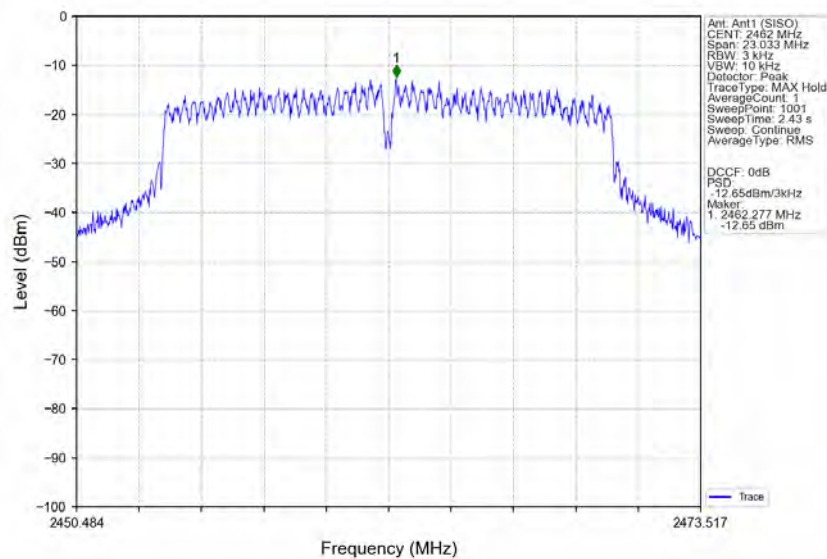


802.11n(HT20) LCH_2412MHz_Ant1 (SISO)_NTNV

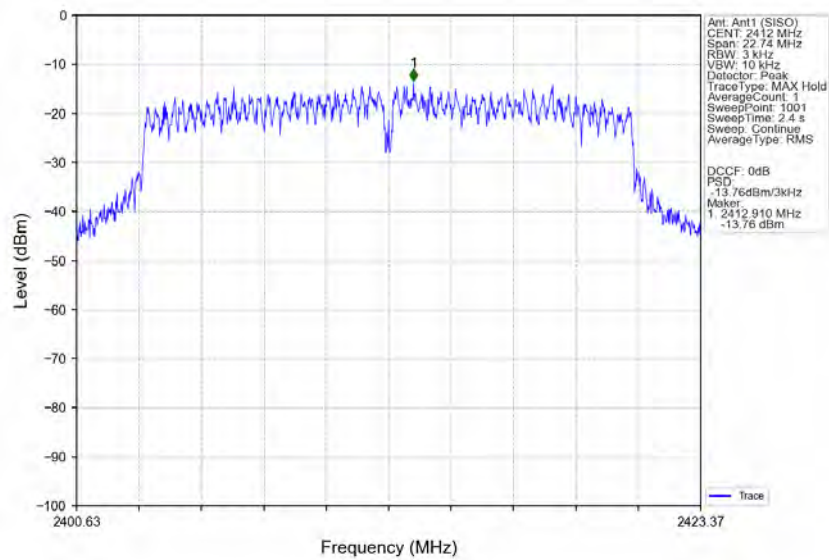


802.11n(HT20) MCH_2437MHz_Ant1 (SISO)_NTNV

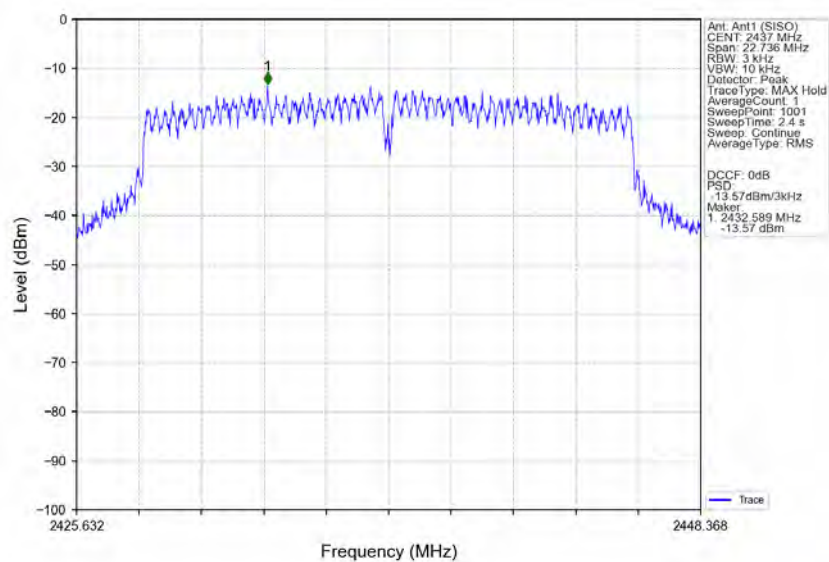


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

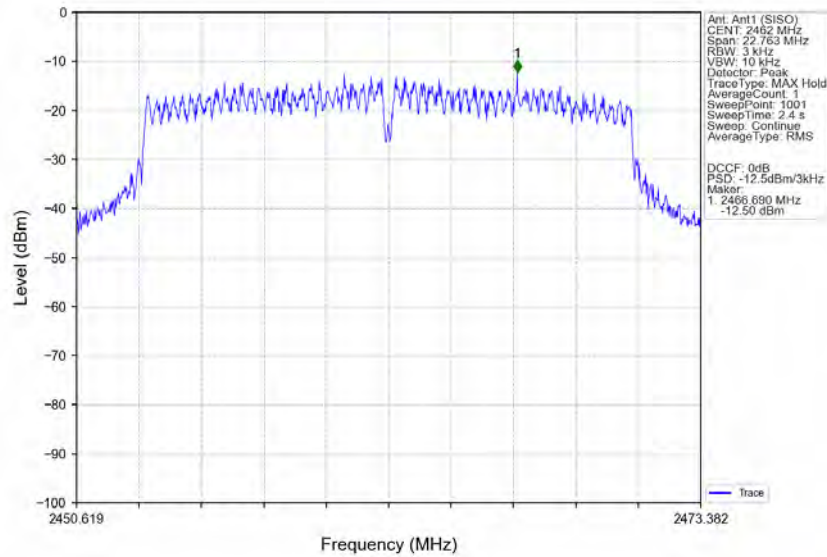


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

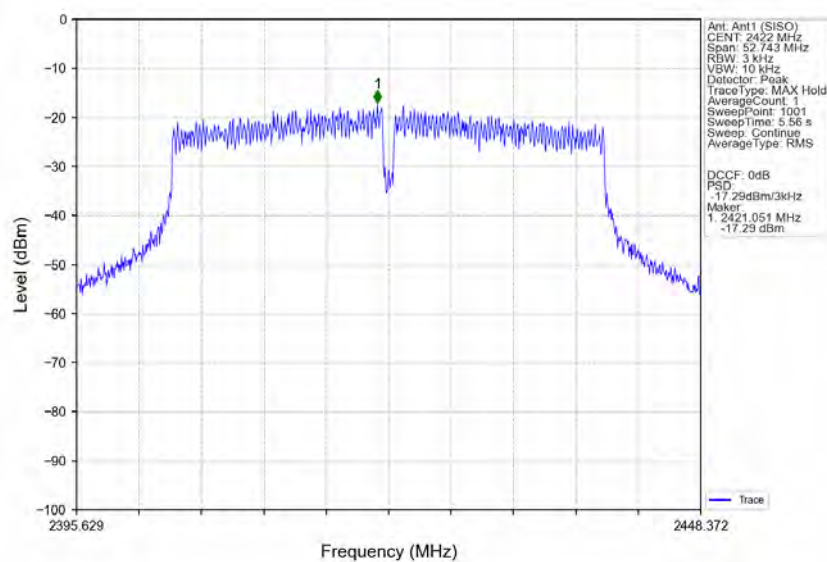


802.11n(HT40) MCH_2437MHz_Ant1 (SISO) NTN

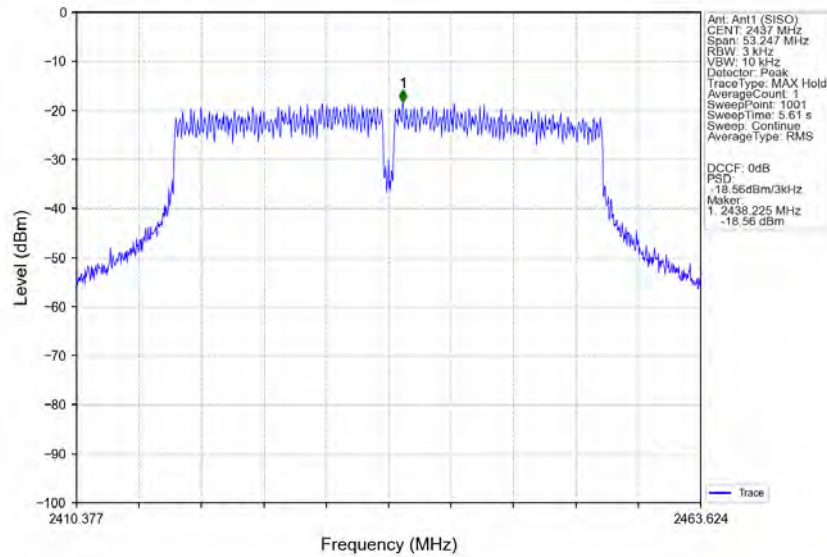


802.11n(HT40) HCH_2452MHz_Ant1 (SISO) NTN

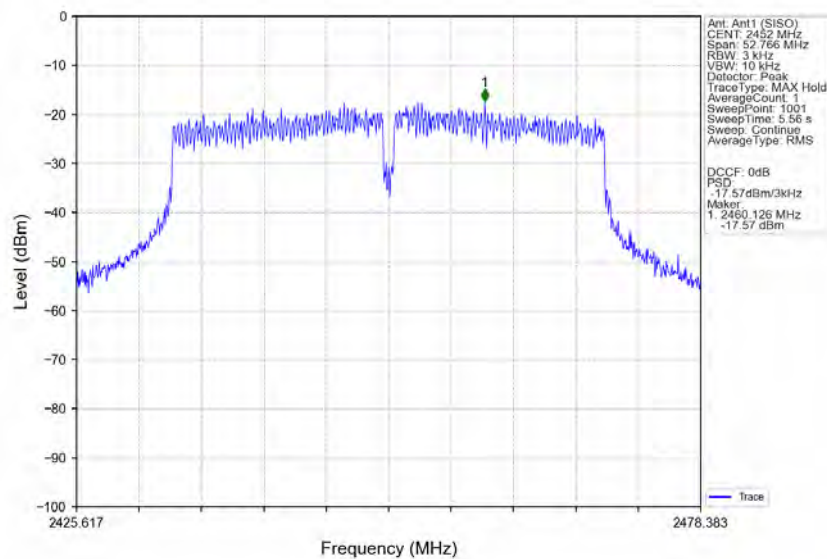


802.11ax(HE20) LCH 2412MHz_SU / Ant1 (SISO) NTNV

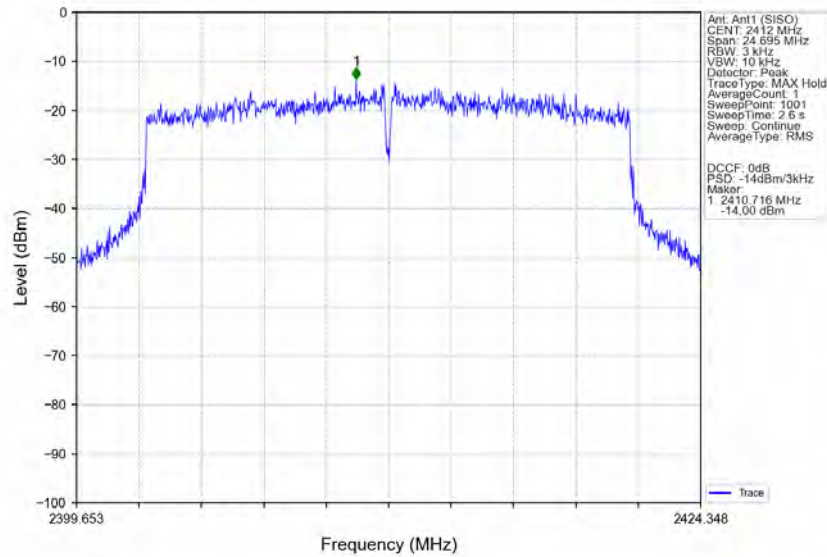


802.11ax(HE20) MCH 2437MHz_SU / Ant1 (SISO) NTNV

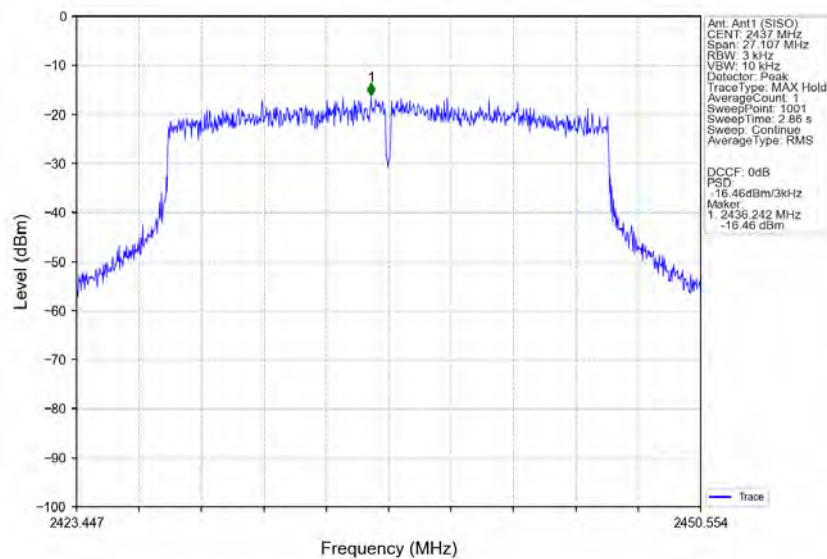


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTNV

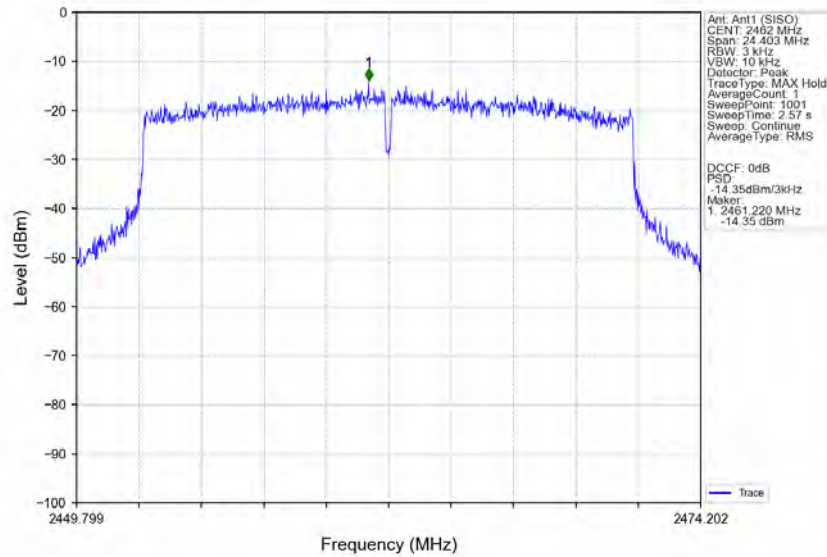


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTNV

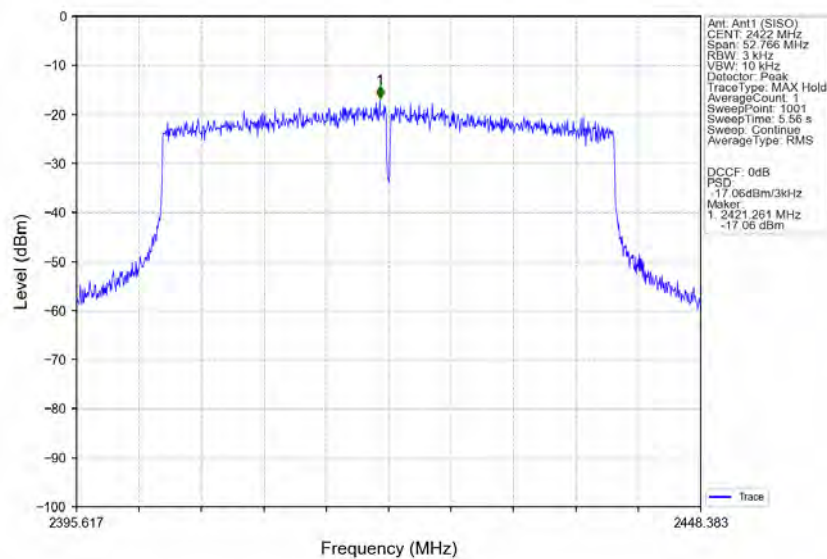

802.11ax(HE40) MCH 2437MHz_SU / Ant1 (SISO) NTVN

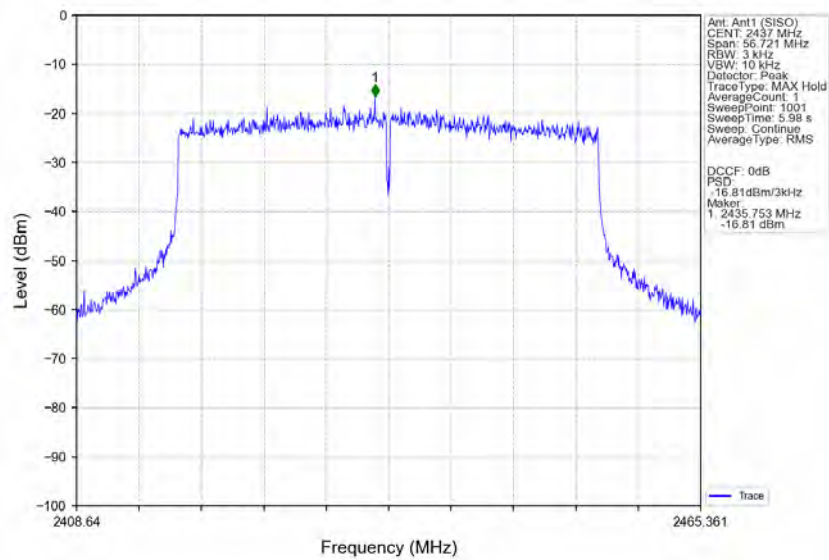

802.11ax(HE40) HCH 2452MHz_SU / Ant1 (SISO) NTVN

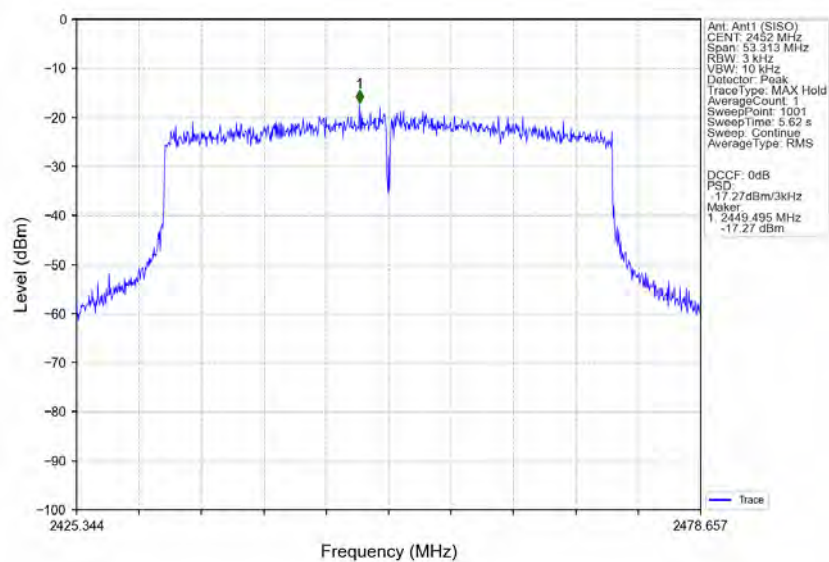

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Level of Reference (dBm)
802.11b	SISO	2412	/	/	1	5.10
		2437	/	/	1	4.53
		2462	/	/	1	5.06
802.11g	SISO	2412	/	/	1	0.92
		2437	/	/	1	0.62
		2462	/	/	1	0.94
802.11n (HT20)	SISO	2412	/	/	1	1.61
		2437	/	/	1	0.40
		2462	/	/	1	0.92
802.11n (HT40)	SISO	2422	/	/	1	-2.77
		2437	/	/	1	-3.37
		2452	/	/	1	-2.81
802.11ax (HE20)	SISO	2412	SU	/	1	1.40
		2437	SU	/	1	-0.10
		2462	SU	/	1	0.65
802.11ax (HE40)	SISO	2422	SU	/	1	-1.92
		2437	SU	/	1	-3.21
		2452	SU	/	1	-2.78

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	SISO	2412	/	/	1	5.10	-24.90	Pass
		2437	/	/	1	5.10	-24.90	Pass
		2462	/	/	1	5.10	-24.90	Pass
802.11g	SISO	2412	/	/	1	0.94	-29.06	Pass
		2437	/	/	1	0.94	-29.06	Pass
		2462	/	/	1	0.94	-29.06	Pass
802.11n (HT20)	SISO	2412	/	/	1	1.61	-28.39	Pass
		2437	/	/	1	1.61	-28.39	Pass
		2462	/	/	1	1.61	-28.39	Pass
802.11n (HT40)	SISO	2422	/	/	1	-2.77	-32.77	Pass
		2437	/	/	1	-2.77	-32.77	Pass
		2452	/	/	1	-2.77	-32.77	Pass
802.11ax (HE20)	SISO	2412	SU	/	1	1.40	-28.60	Pass
		2437	SU	/	1	1.40	-28.60	Pass
		2462	SU	/	1	1.40	-28.60	Pass



Report No.: KSCR241200263901


Page: 147 of 171

802.11ax (HE40)	SISO	2422	SU	/	1	-1.92	-31.92	Pass
		2437	SU	/	1	-1.92	-31.92	Pass
		2452	SU	/	1	-1.92	-31.92	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.								


5.2 Test Graph

5.2.1 Ref


802.11b LCH 2412MHz Ant1 (SISO) NTNV

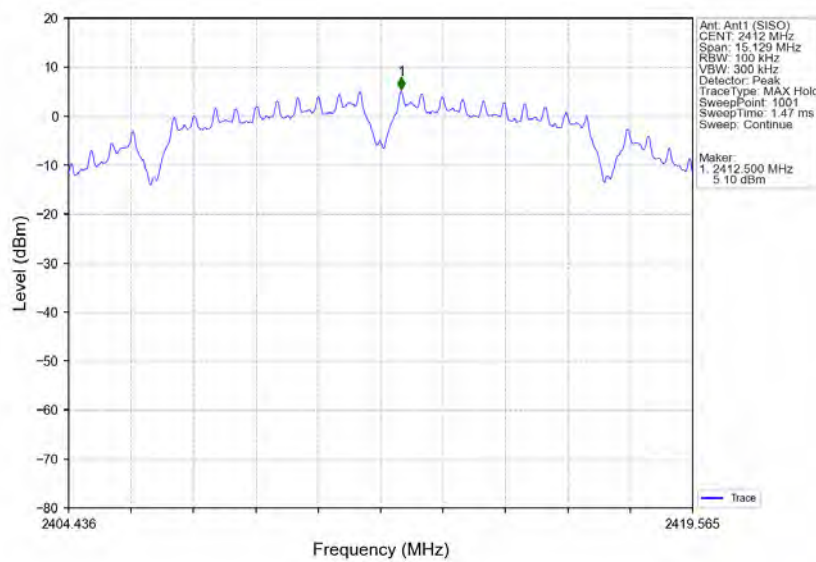


802.11b MCH 2437MHz Ant1 (SISO) NTNV

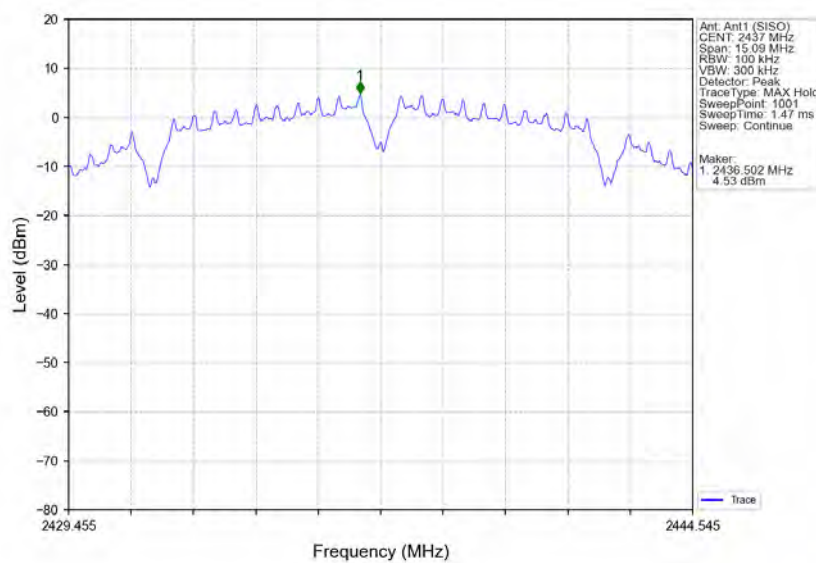


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

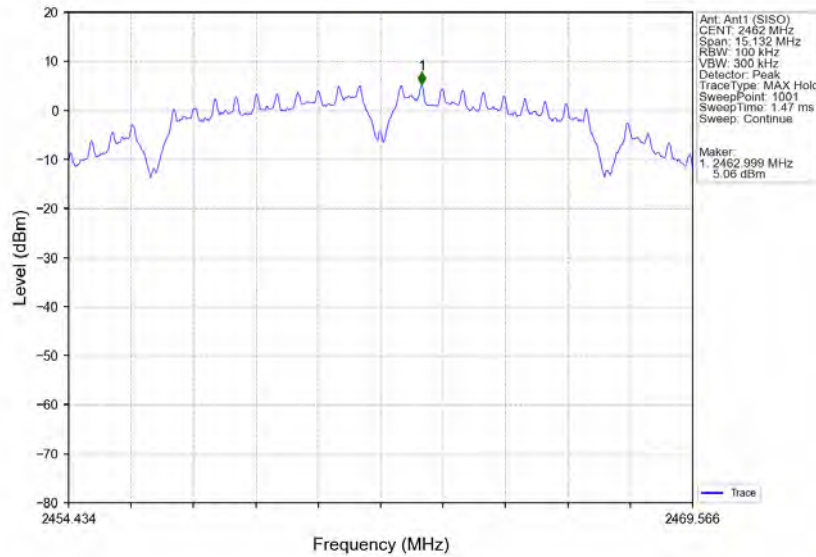


802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

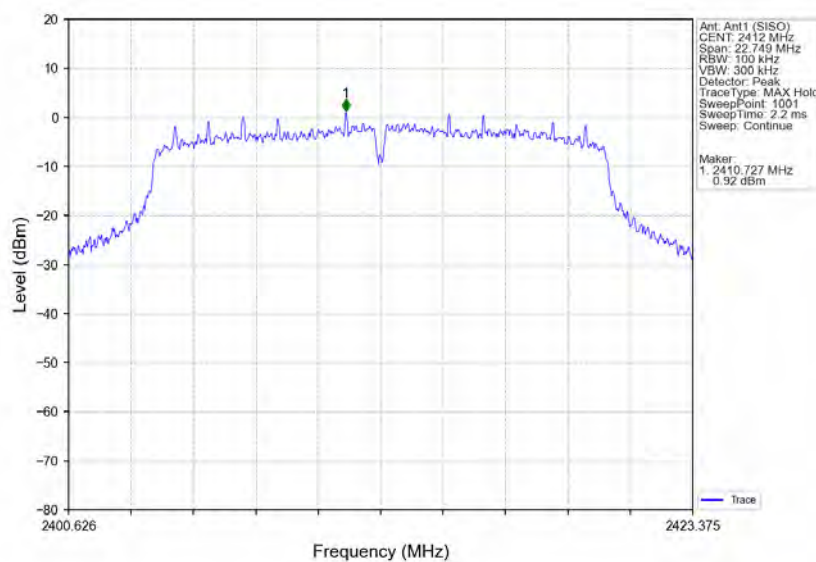


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

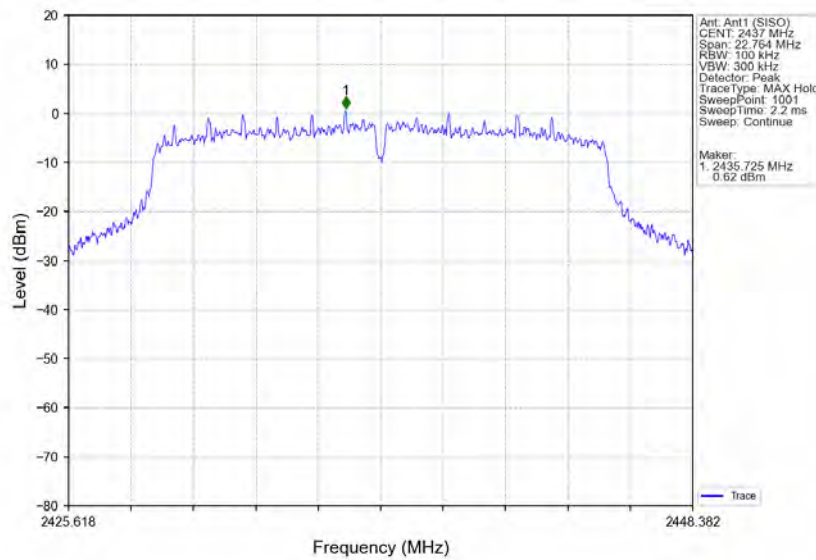


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

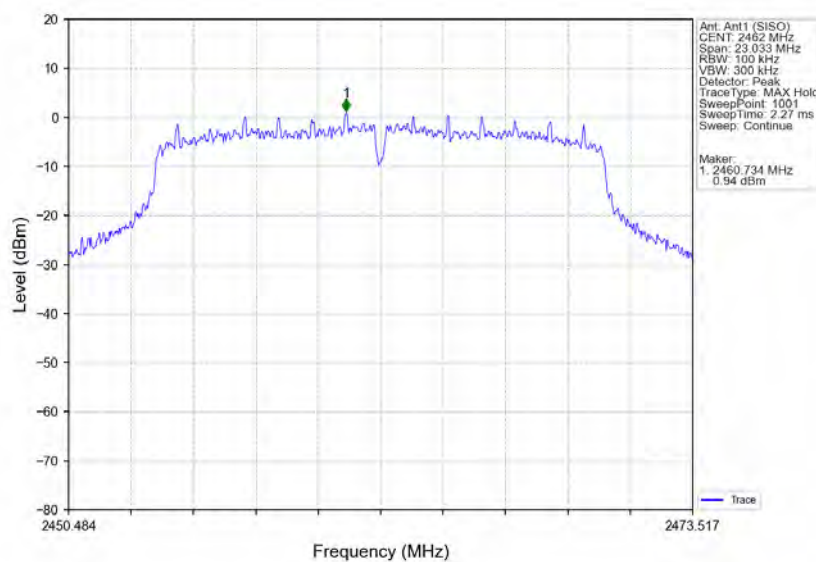


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

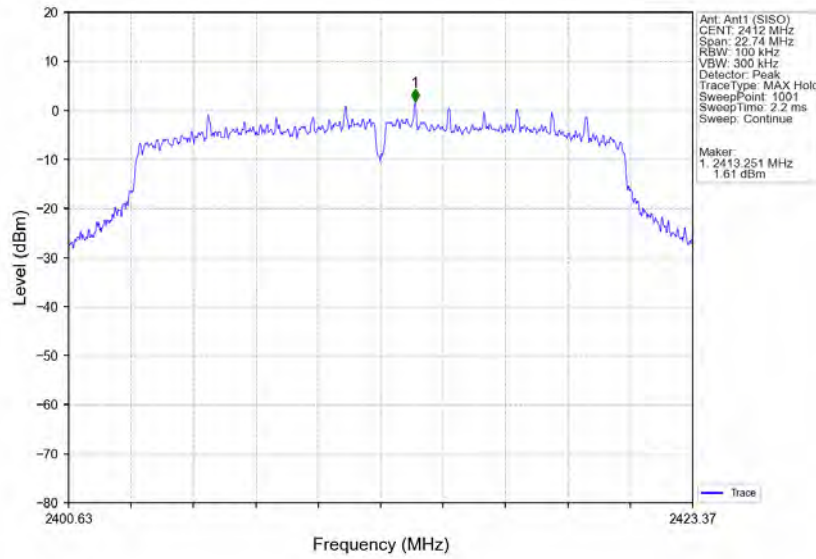


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

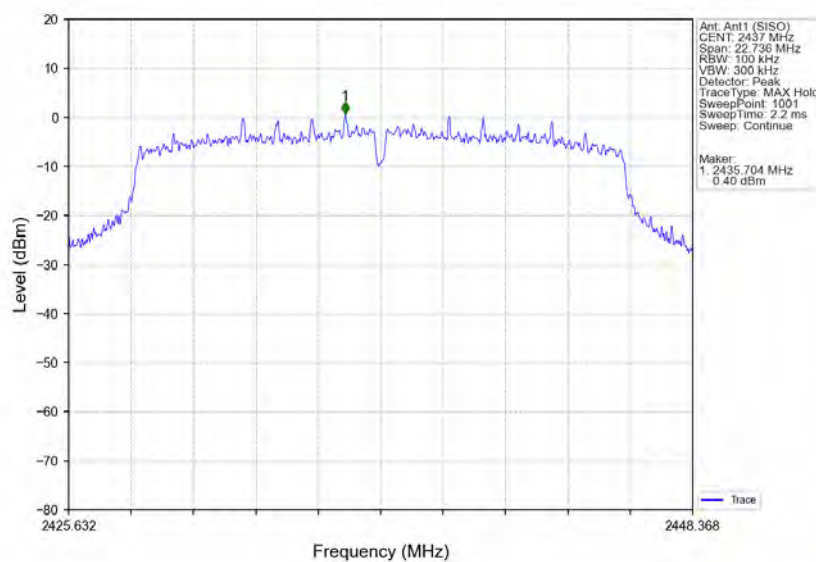


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

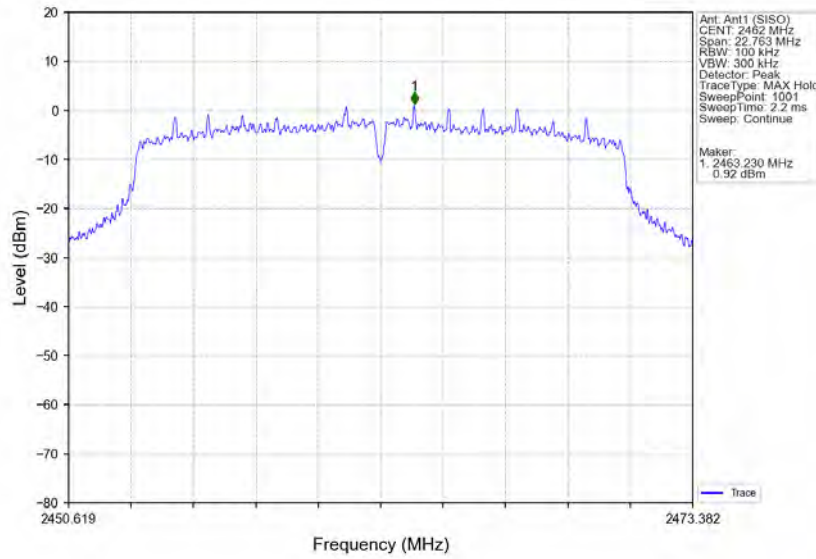


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

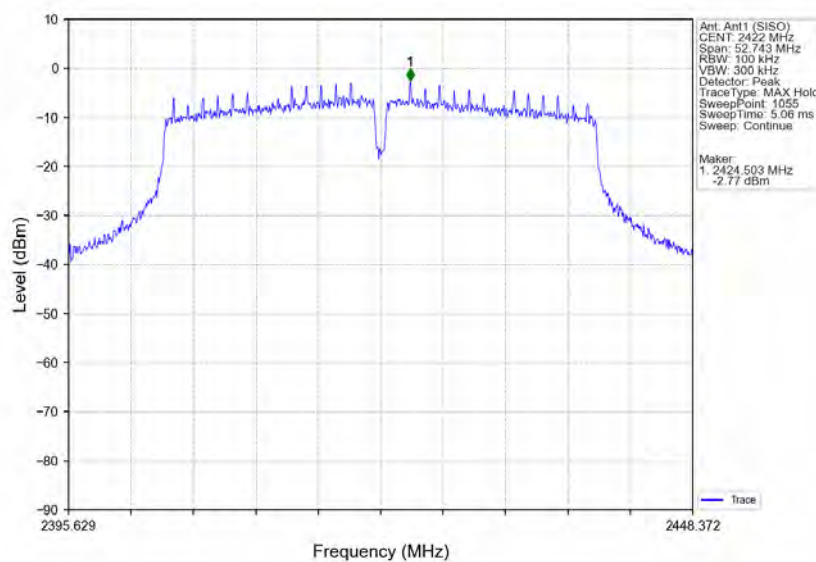


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

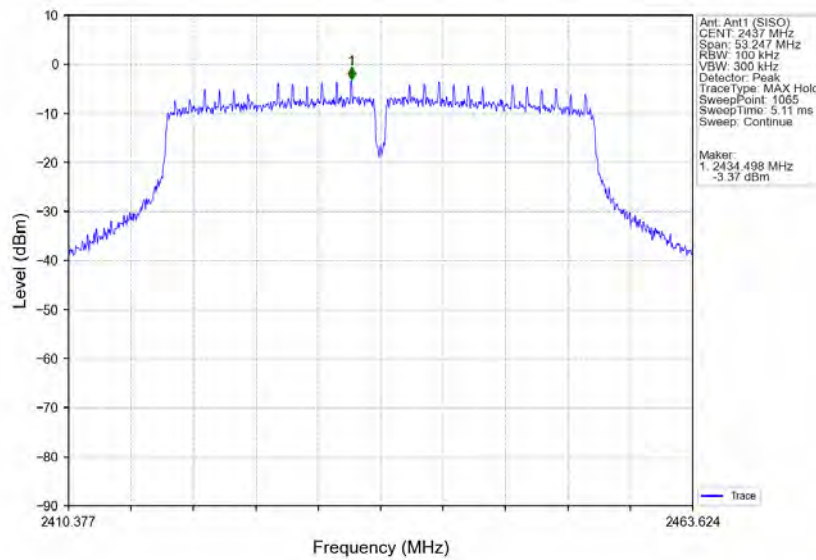


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

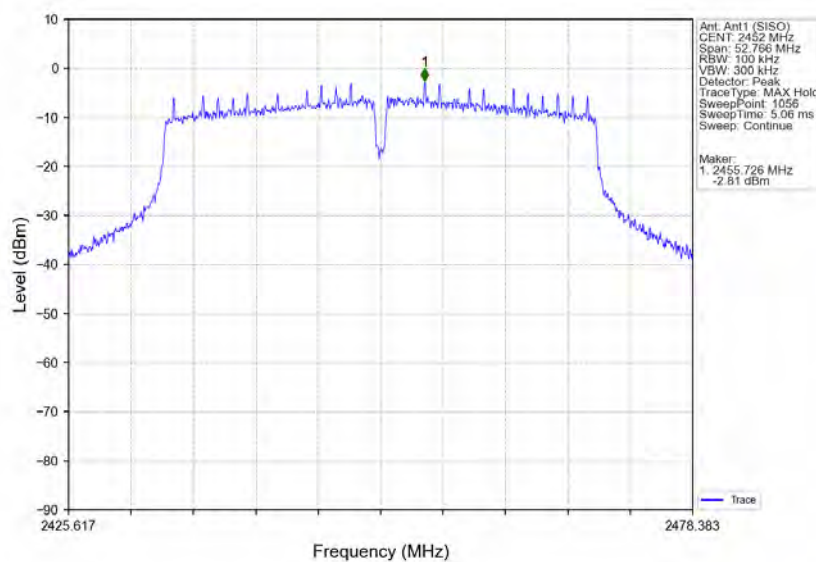


802.11ax(HE20) LCH 2412MHz SU / Ant1 (SISO) NTNV

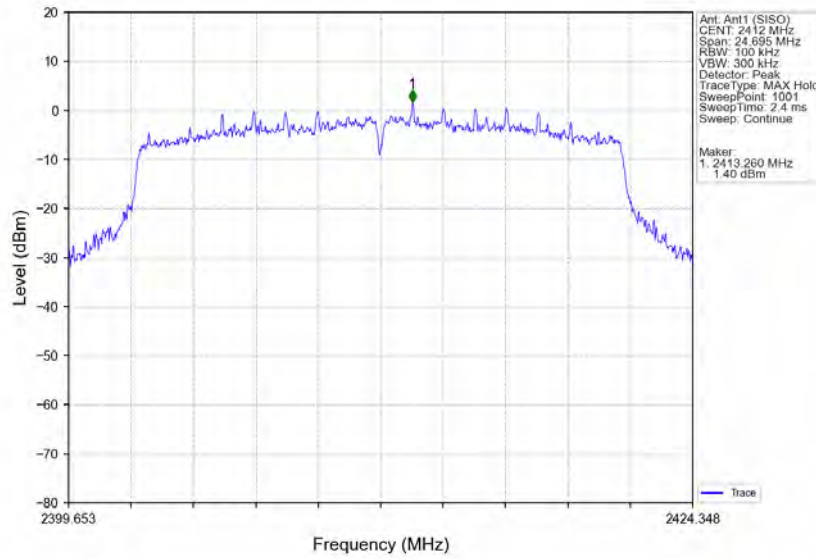


802.11ax(HE20) MCH 2437MHz SU / Ant1 (SISO) NTNV

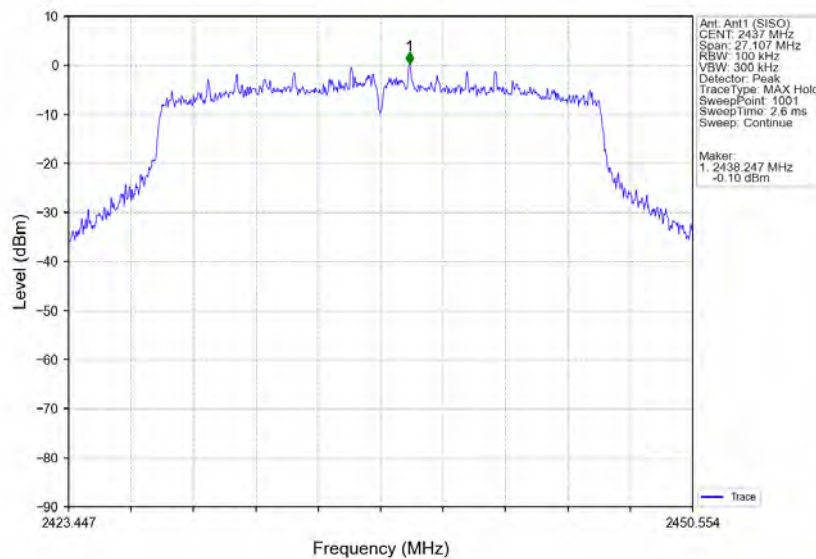


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTVN

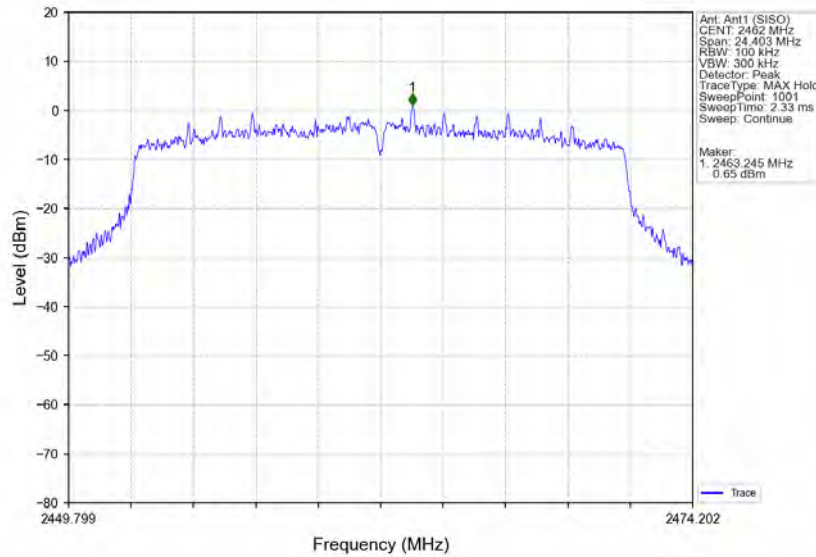


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTVN

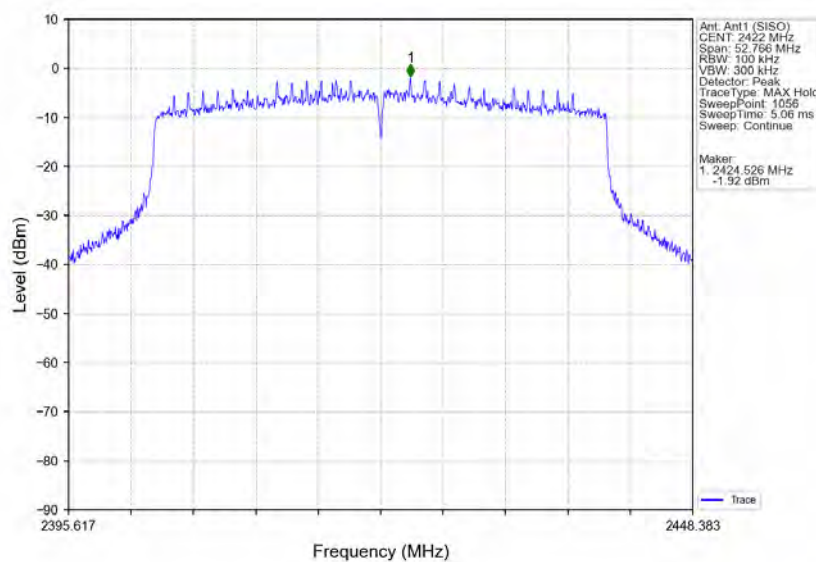

802.11ax(HE40) MCH 2437MHz_SU / Ant1 (SISO) NTNV

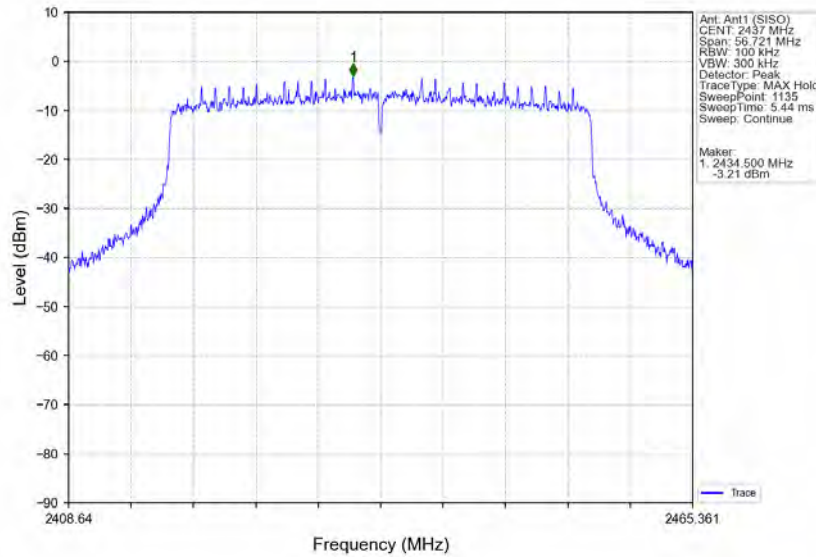


802.11ax(HE40) HCH 2452MHz_SU / Ant1 (SISO) NTNV

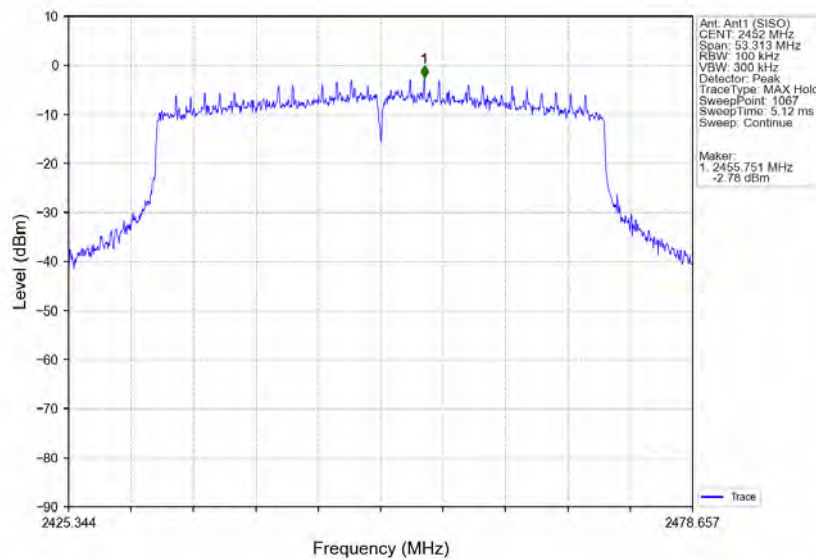


5.2.2 CSE


802.11b LCH 2412MHz_Ant1 (SISO)_NTNV

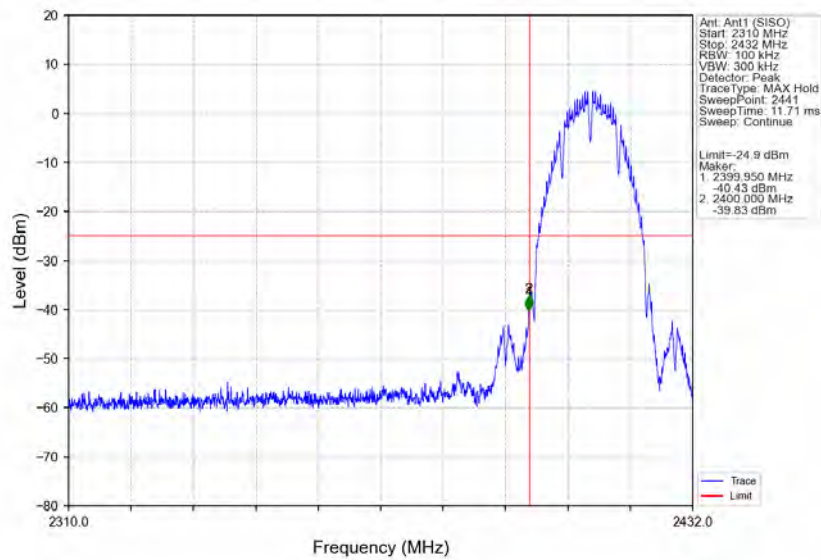


802.11b LCH 2412MHz_Ant1 (SISO)_NTNV

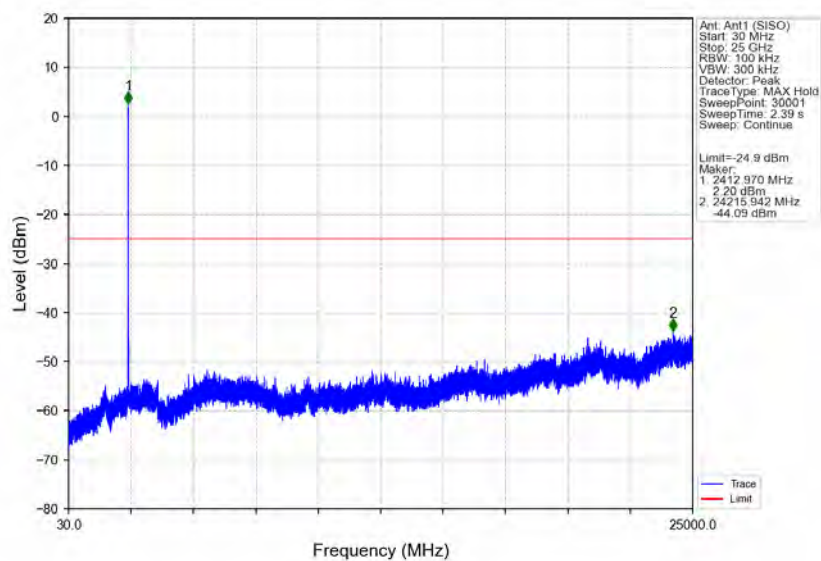


802.11b MCH 2437MHz_Ant1 (SISO) NTN

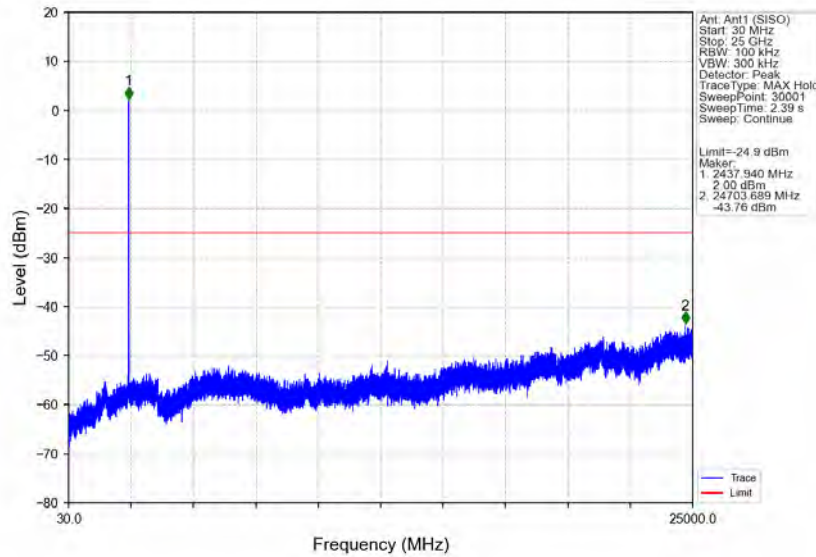


802.11b HCH 2462MHz_Ant1 (SISO) NTN

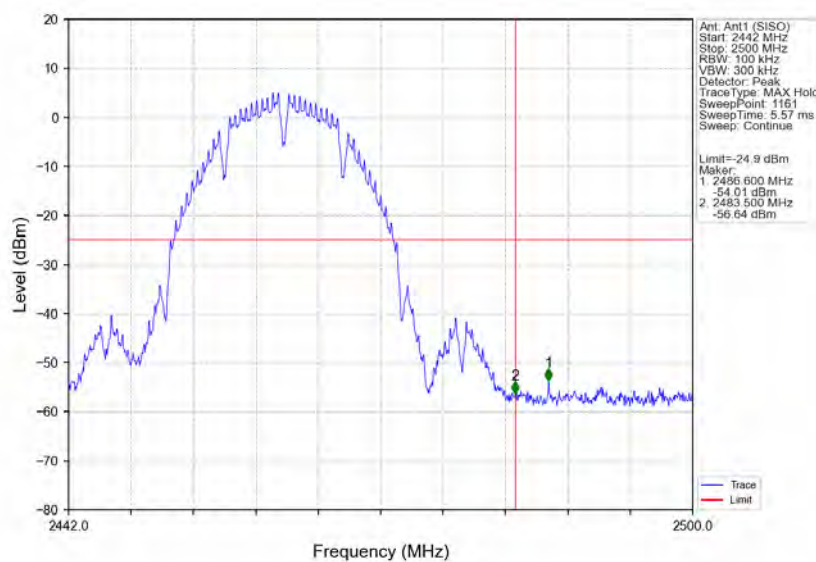


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

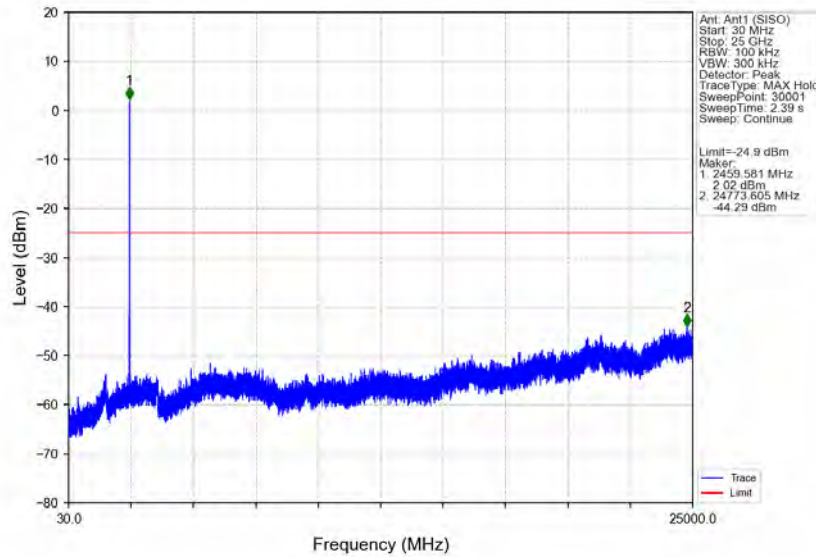


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

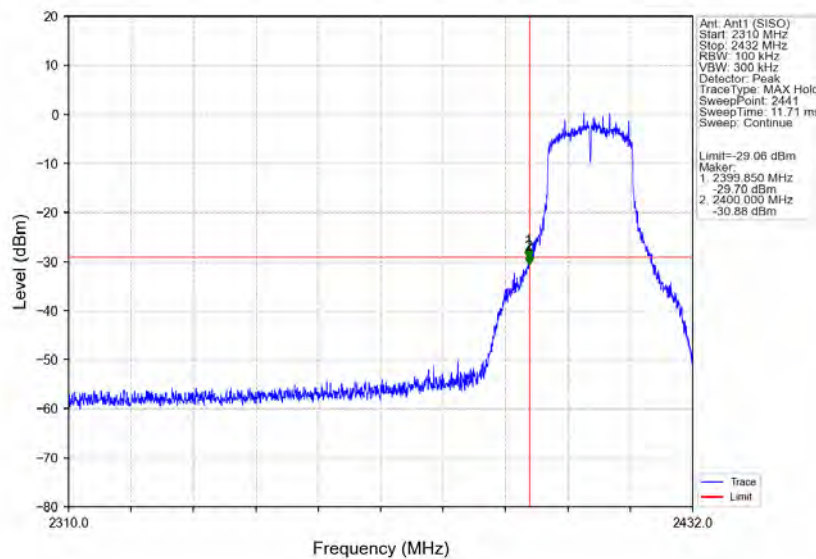


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

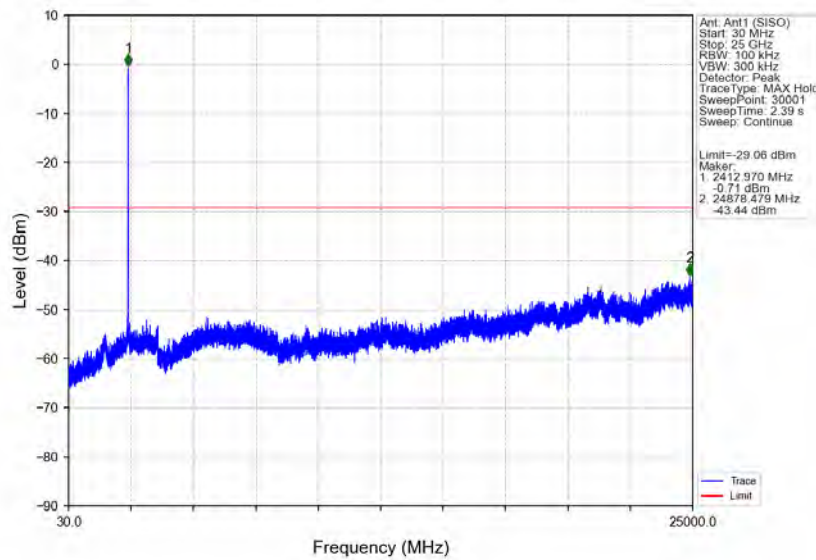


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

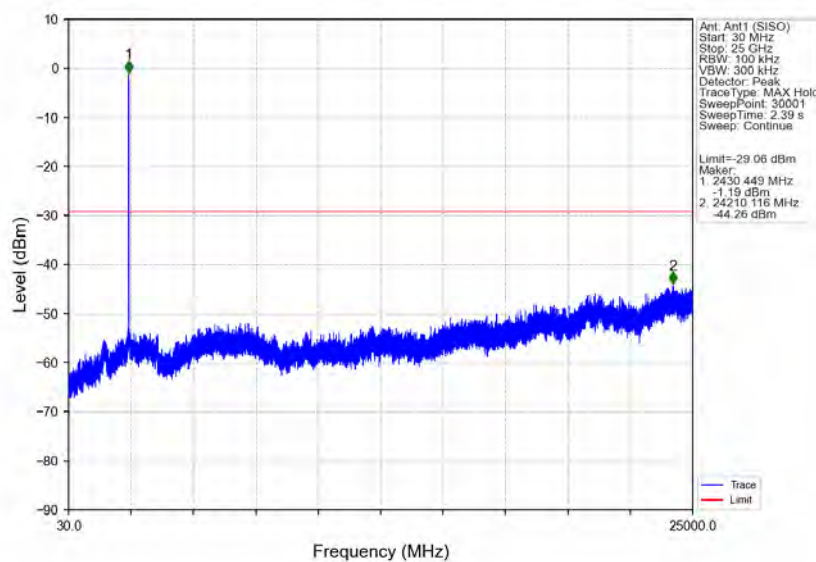


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

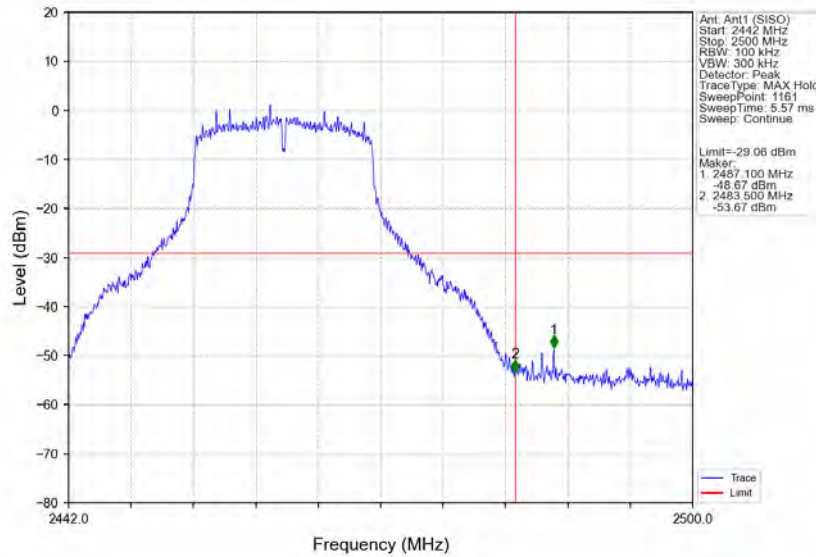


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

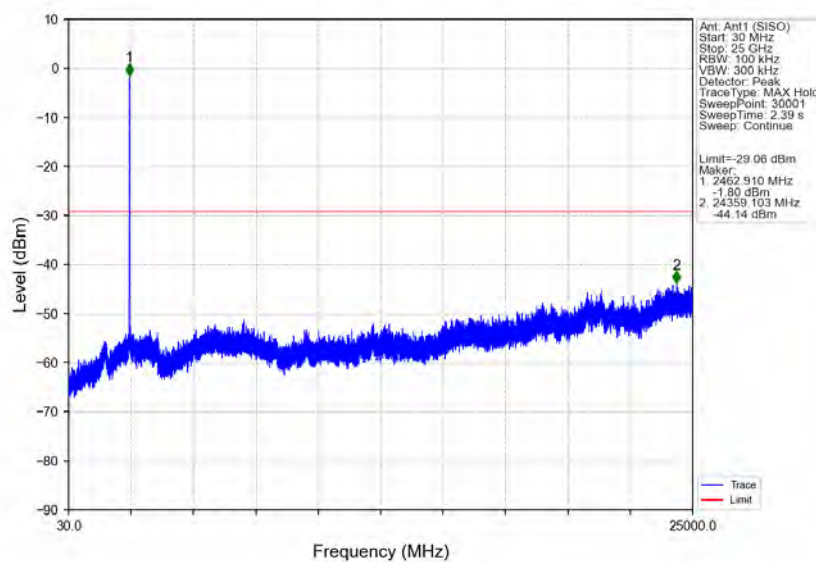


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

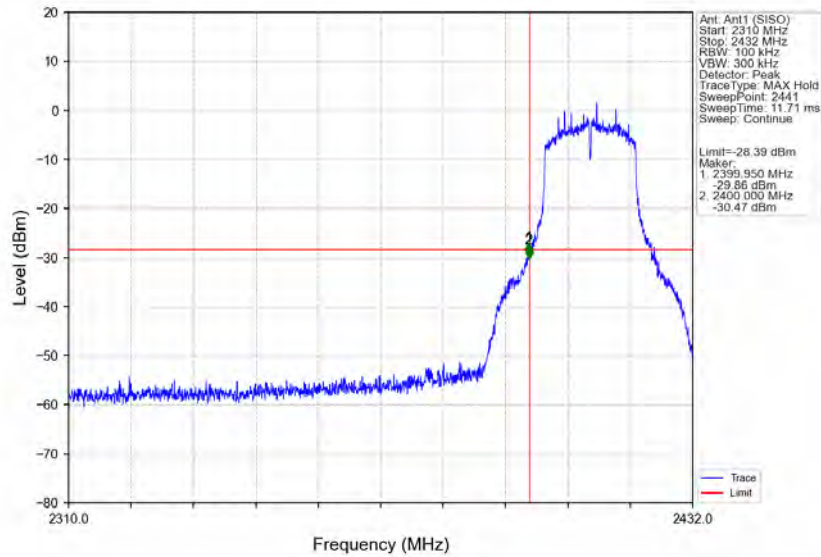


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

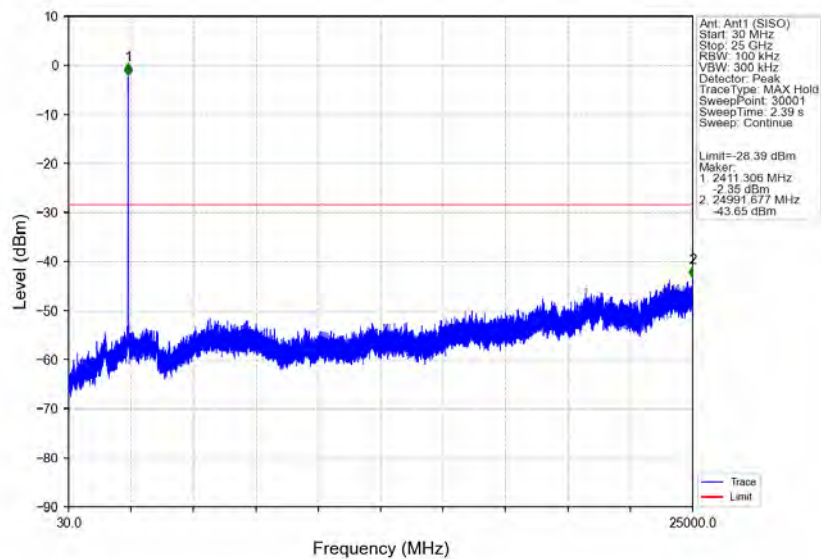


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

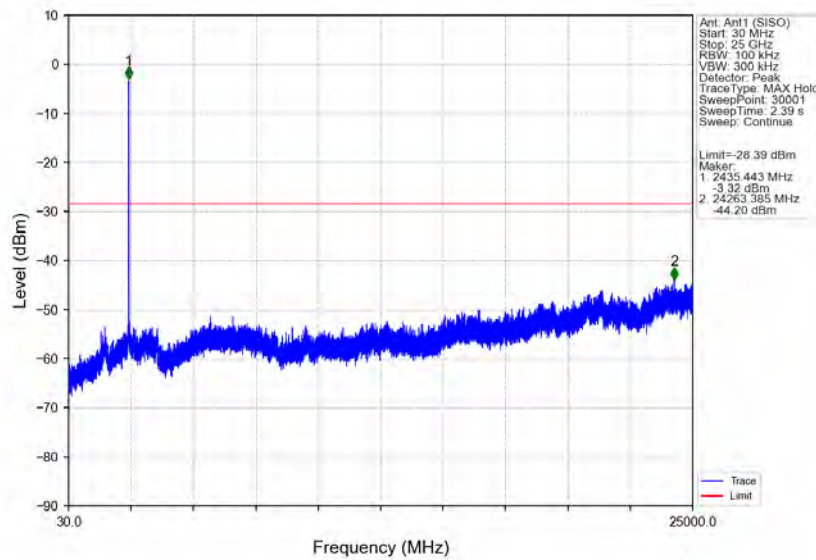


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

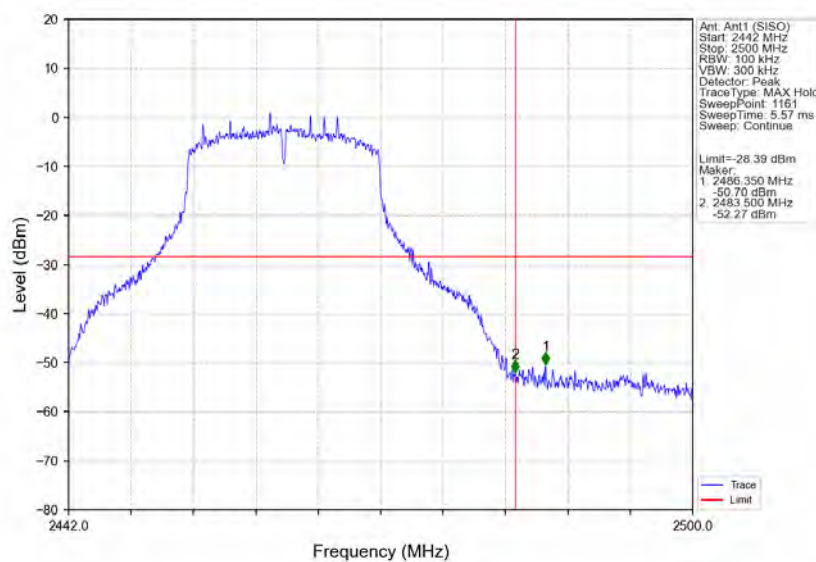


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

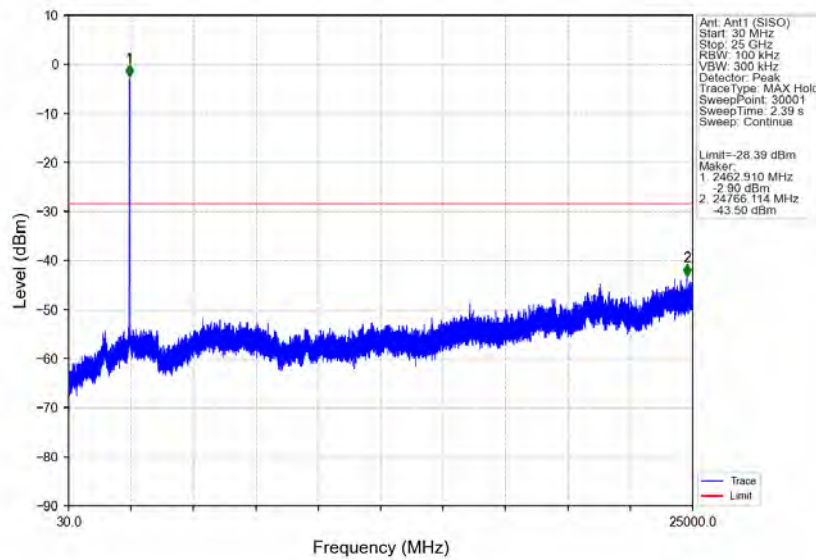


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

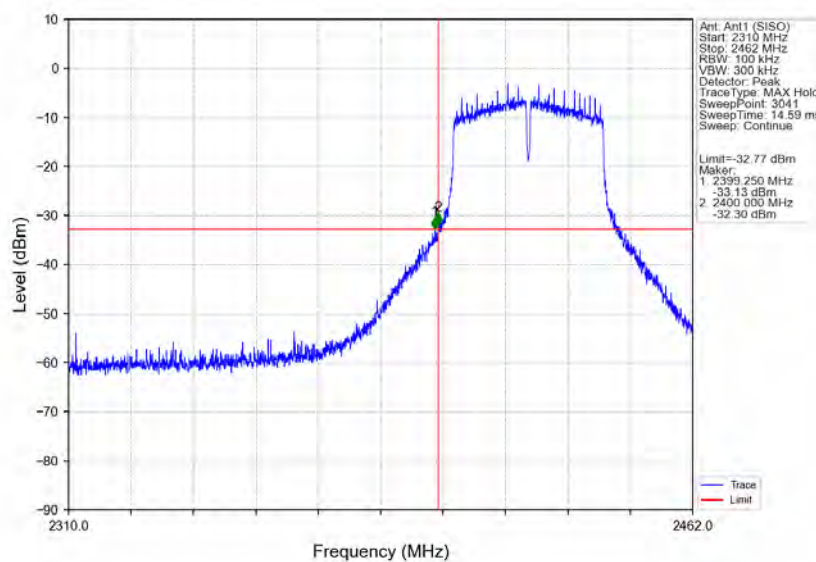


802.11n(HT40) LCH_2422MHz_Ant1 (SISO) NTN

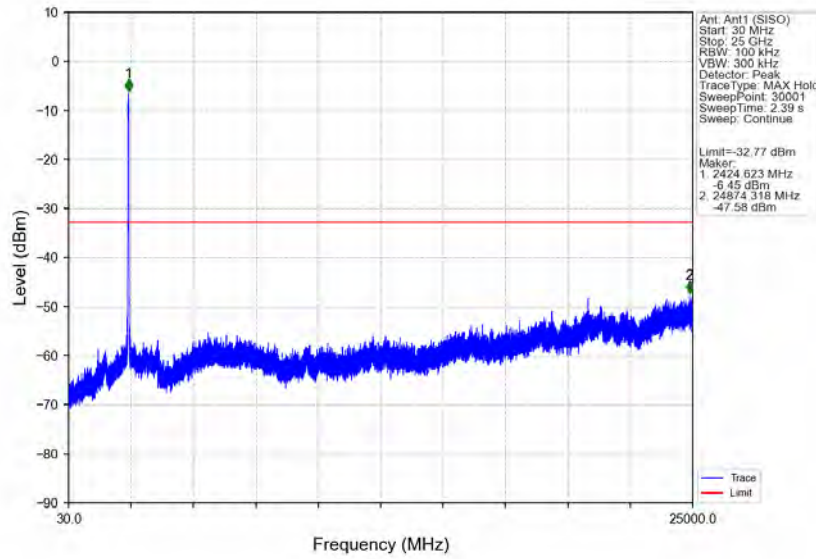


802.11n(HT40) MCH_2437MHz_Ant1 (SISO) NTN

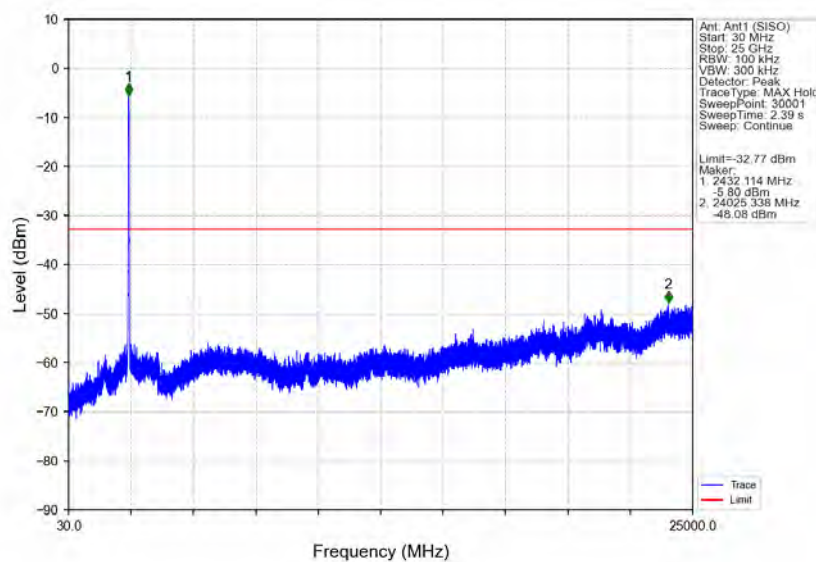


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

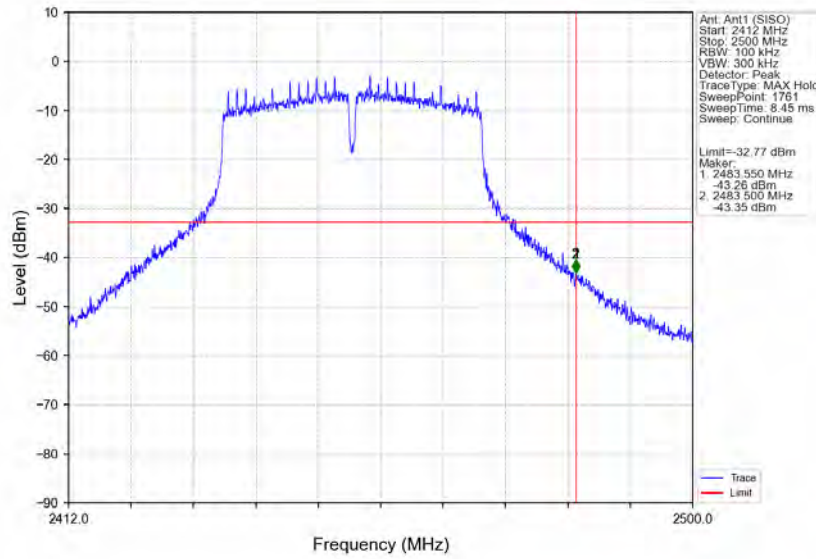


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

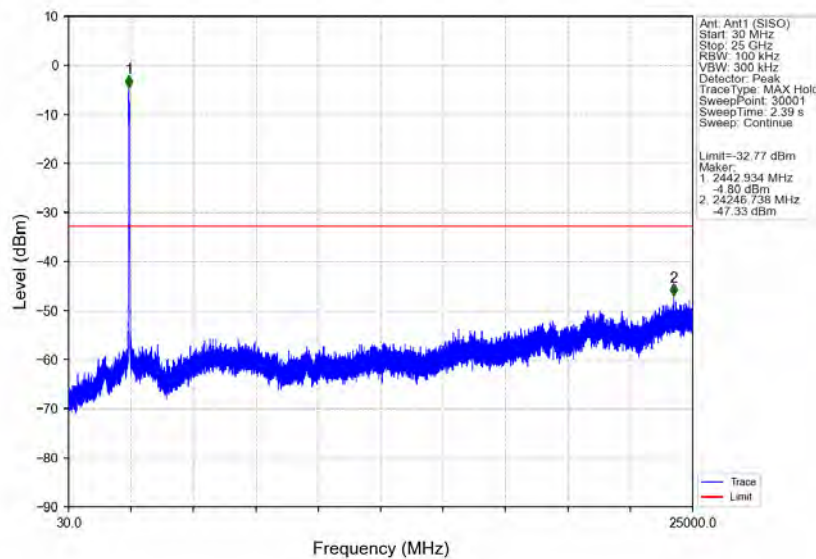


802.11ax(HE20)_LCH_2412MHz_SU / Ant1 (SISO) _NTNV

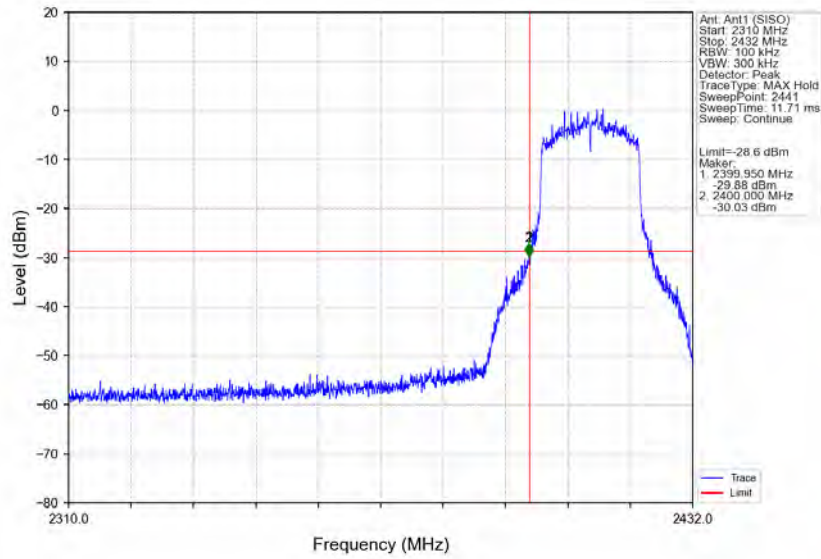


802.11ax(HE20)_LCH_2412MHz_SU / Ant1 (SISO) _NTNV

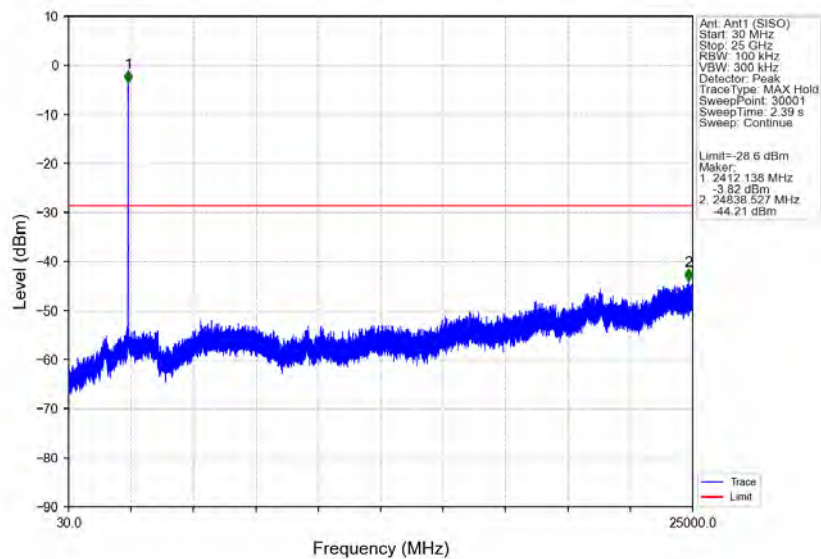


802.11ax(HE20) MCH_2437MHz_SU / Ant1 (SISO) NTVN

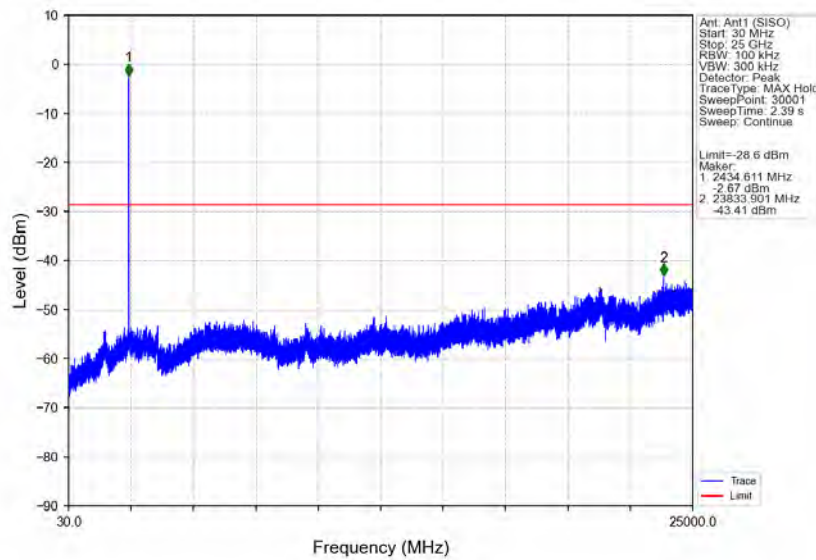


802.11ax(HE20) HCH_2462MHz_SU / Ant1 (SISO) NTVN

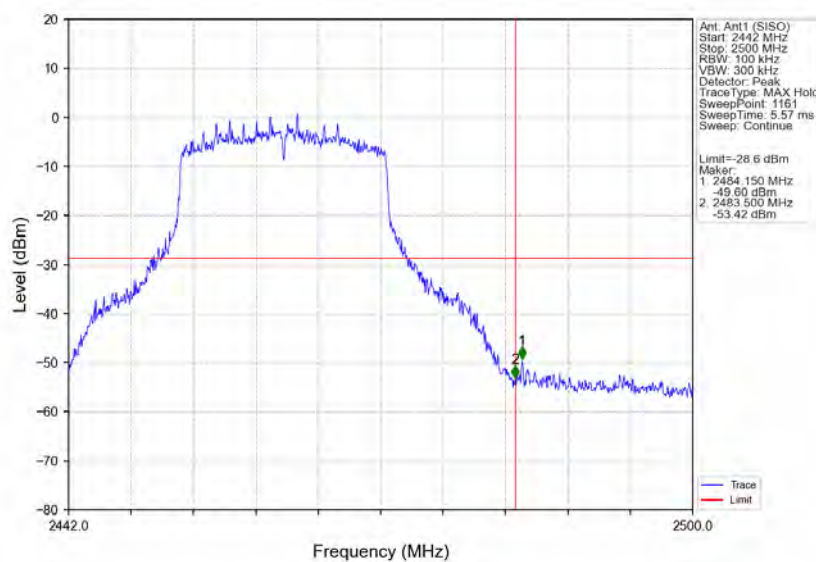


802.11ax(HE20) HCH 2462MHz SU / Ant1 (SISO) NTVN

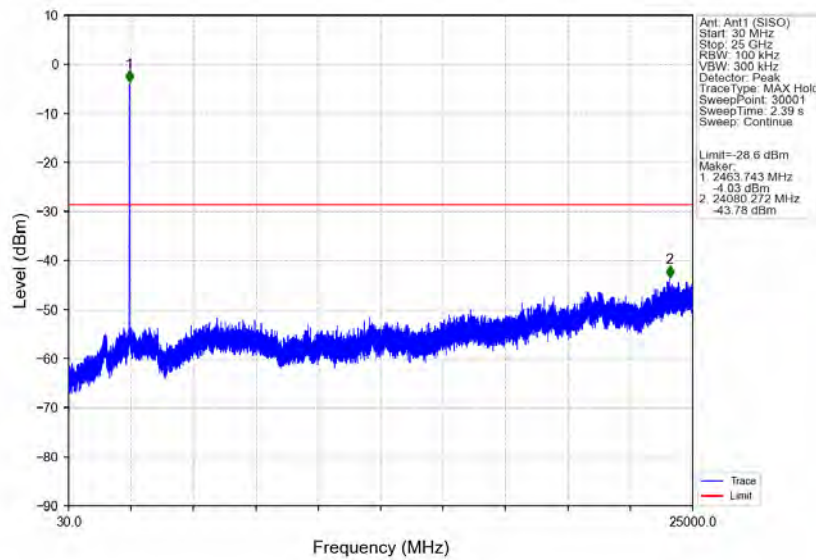


802.11ax(HE40) LCH 2422MHz SU / Ant1 (SISO) NTVN

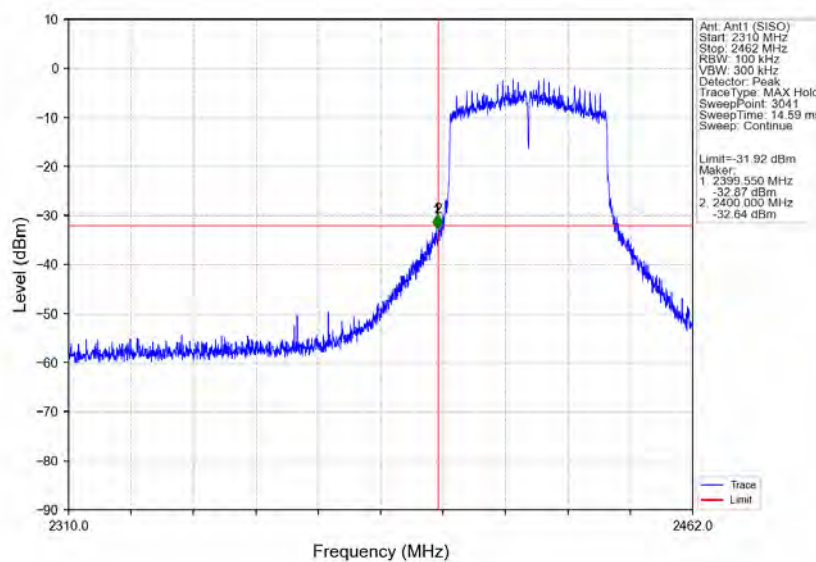


802.11ax(HE40) LCH 2422MHz_SU / Ant1 (SISO) NTNV

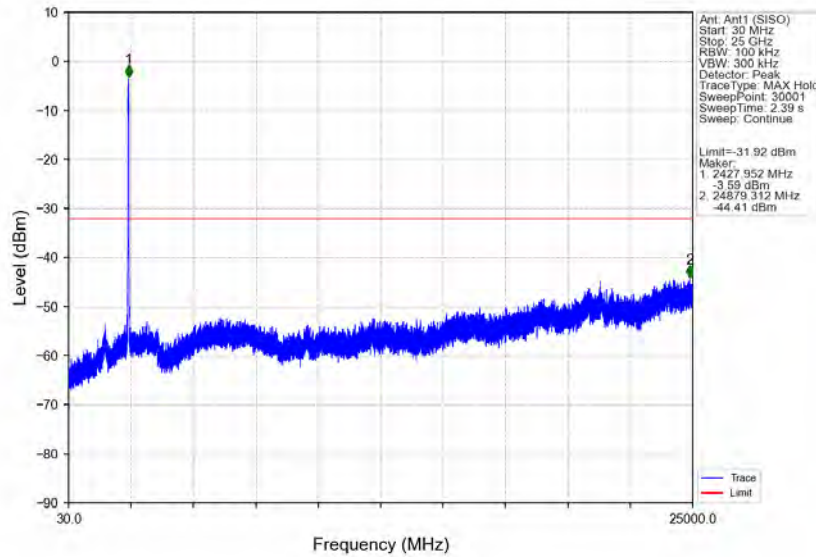


802.11ax(HE40) MCH 2437MHz_SU / Ant1 (SISO) NTNV

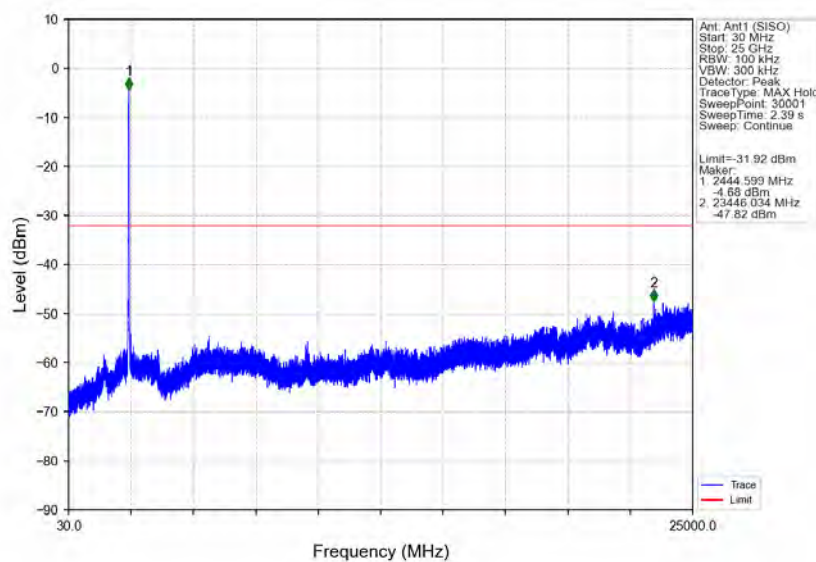

802.11ax(HE40) HCH 2452MHz SU / Ant1 (SISO) NTVN

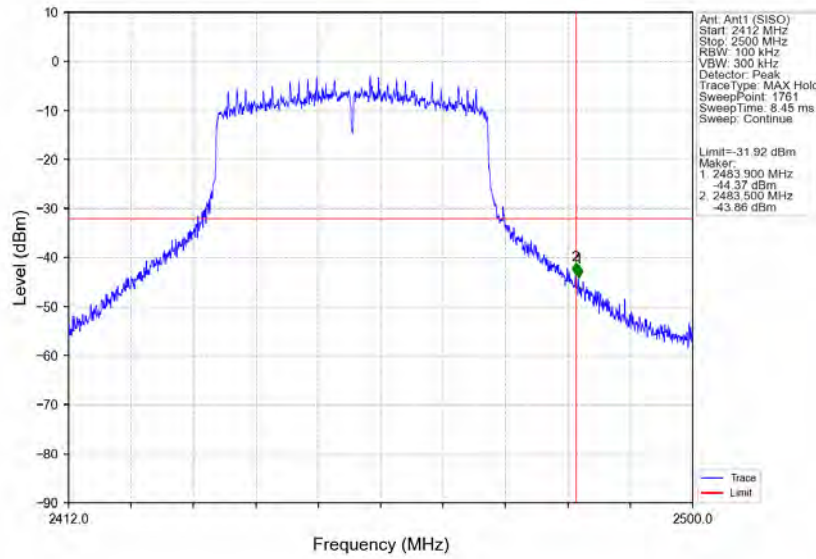

802.11ax(HE40) HCH 2452MHz SU / Ant1 (SISO) NTVN

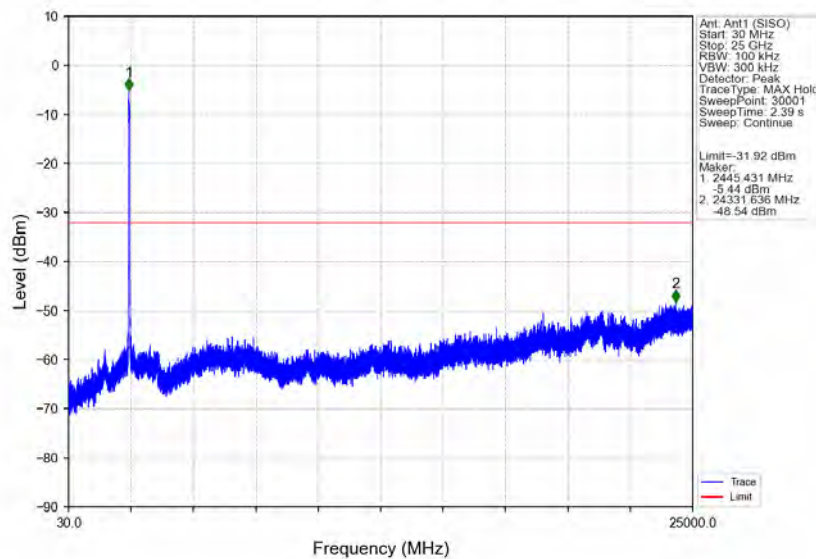

- End of the Report -