

FCC TEST REPORT

For

VTIN TECHNOLOGY Co., Limited

dongle

Model No.: MX-270

Prepared For : VTIN TECHNOLOGY Co., Limited
Address : ROOM 603, 6/F, HANG PONT COMMERCIAL BUILDING, 31 TONKIN
STREET, CHEUNG SHA WAN, KOWLOON, Hong Kong.

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : SZAWW171201008-01

Date of Test : Oct. 31~Nov. 10, 2017

Date of Report : Nov. 15, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiated Emission and Band Edge.....	13
4.1. Test Standard and Limit.....	13
4.2. Test Setup.....	13
4.3. Test Procedure.....	15
4.4. Test Data.....	15
5. 20dB Bandwidth Test.....	24
5.1. Test Standard and Limit.....	24
5.2. Test Setup.....	24
5.3. Test Procedure.....	24
5.4. Test Data.....	24
6. Antenna Requirement.....	27
6.1. Test Standard and Requirement.....	27
6.2. Antenna Connected Construction.....	27
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	28
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	30
APPENDIX III -- INTERNAL PHOTOGRAPH.....	33

TEST REPORT

Applicant : VTIN TECHNOLOGY Co., Limited
Manufacturer : Dongguan Newemen Electronics Technology Co.,Ltd.
Product Name : dongle
Model No. : MX-270
Trade Mark : Vicsing, Newmen
Rating(s) : Input: DC 5V, 15mA by USB Port

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 31~Nov. 10, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	VTIN TECHNOLOGY Co., Limited
Address	:	ROOM 603, 6/F, HANG PONT COMMERCIAL BUILDING, 31 TONKIN STREET, CHEUNG SHA WAN, KOWLOON, Hong Kong.
Manufacturer	:	Dongguan Newemen Electronics Technology Co.,Ltd.
Address	:	No.5, Xifa Road, Lin Village, Tangxia Town, Dongguan, Guangdong, China.

1.2. Description of Device (EUT)

Product Name	:	dongle	
Model No.	:	MX-270	
Trade Mark	:	Victsing, Newmen	
Test Power Supply	:	DC 5V by USB Port	
Product Description	:	Operation Frequency:	2405-2470MHz
		Number of Channel:	8 Channels
		Modulation Type:	GFSK
		Antenna Type:	Ceramic Antenna
		Antenna Gain(Peak):	-1.35 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

Notebook	:	Manufacturer: LIFE BOOK Model: LH531
----------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Keeping TX mode
Mode 2	CH01
Mode 3	CH04
Mode 4	CH08

For Conducted Emission	
Final Test Mode	Description
Mode 1	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 2	CH01
Mode 3	CH04
Mode 4	CH08

Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.5. List of Channels


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2405	3	2422	5	2440	7	2460
2	2413	4	2430	6	2450	8	2470

1.6. Description of Test Setup

CE

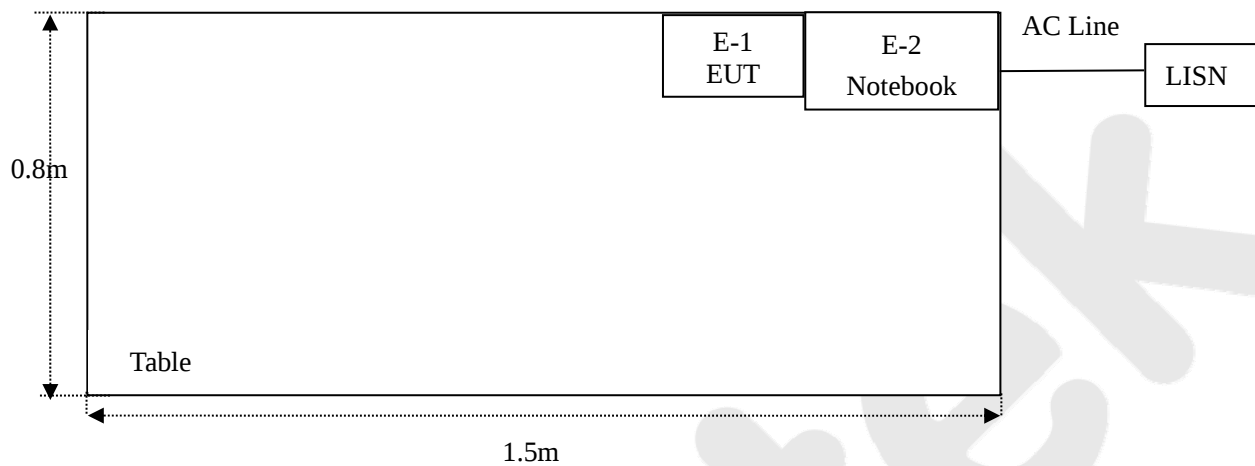

RE

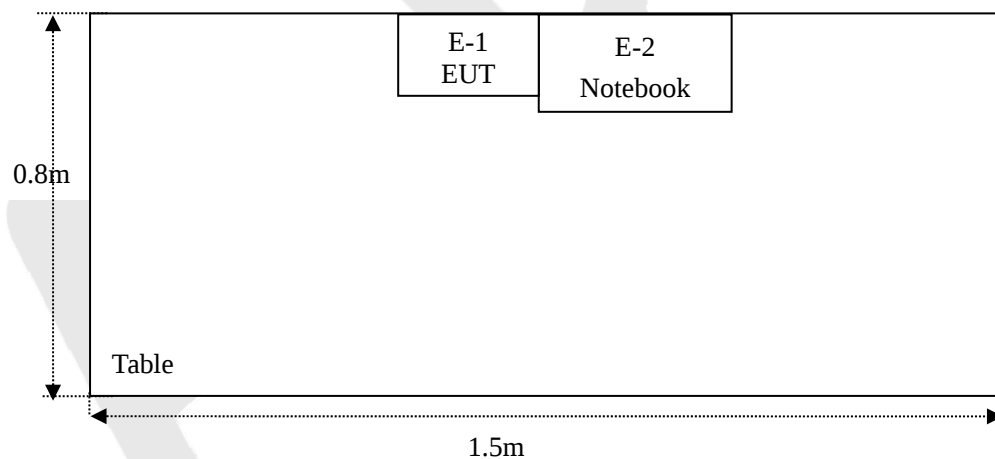

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	May 27, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	May 27, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
13.	Pre-amplifier	SKET Electronic	BK1G40G50 A	KD25352	May 27, 2017	1 Year
14.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
20.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
21.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited.
at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

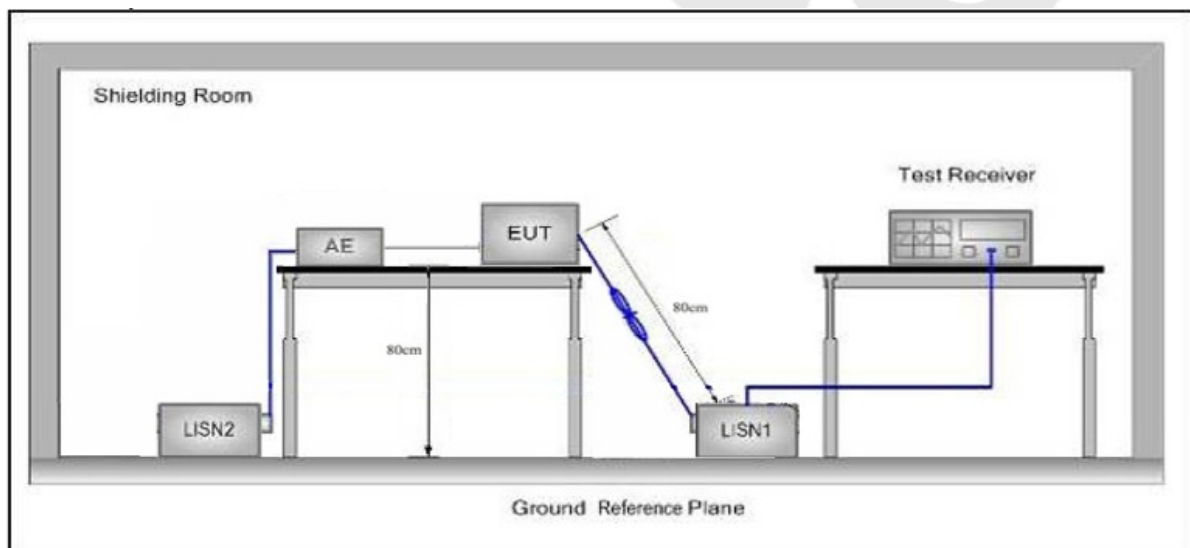

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: DC 5V by USB Port
Comment: Live Line
Tem.:25℃ Hum.:50%

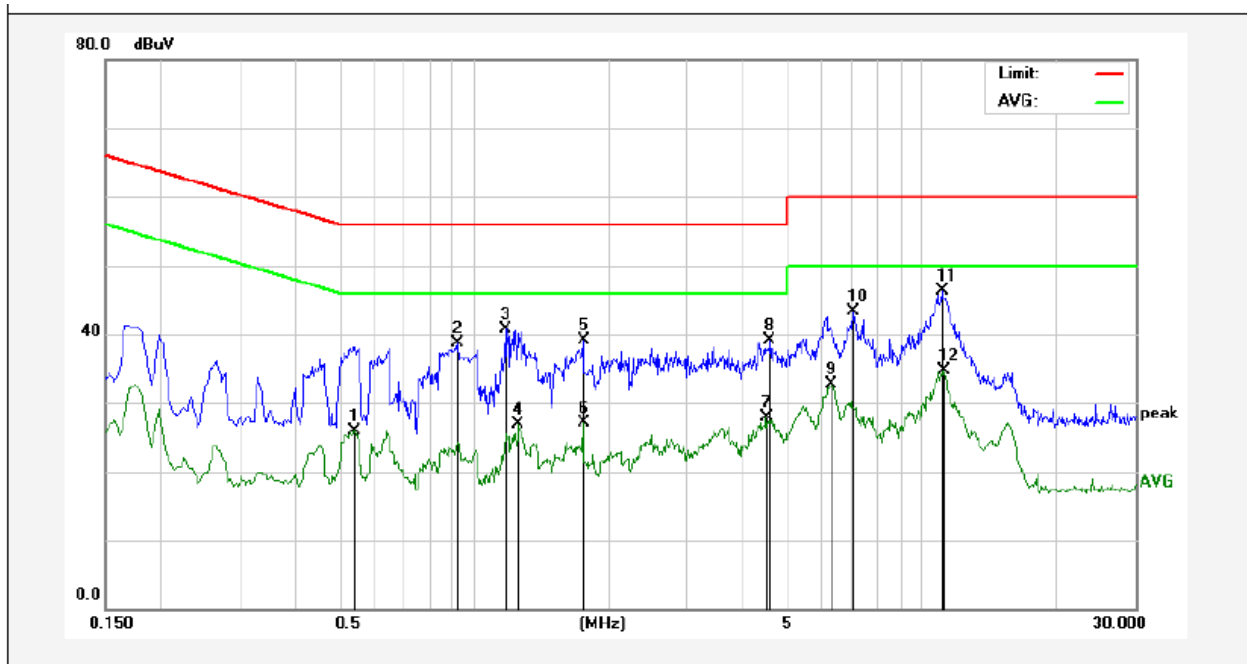

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.5420	6.01	19.99	26.00	46.00	-20.00	AVG	
2	0.9220	18.62	20.10	38.72	56.00	-17.28	QP	
3	1.1780	20.63	20.12	40.75	56.00	-15.25	QP	
4	1.2579	6.84	20.13	26.97	46.00	-19.03	AVG	
5	1.7620	18.88	20.14	39.02	56.00	-16.98	QP	
6	1.7620	7.04	20.14	27.18	46.00	-18.82	AVG	
7	4.4780	7.63	20.19	27.82	46.00	-18.18	AVG	
8	4.5939	18.91	20.20	39.11	56.00	-16.89	QP	
9	6.2940	12.37	20.24	32.61	50.00	-17.39	AVG	
10	7.0260	22.95	20.26	43.21	60.00	-16.79	QP	
11	11.0940	25.94	20.32	46.26	60.00	-13.74	QP	
12	11.1580	14.40	20.32	34.72	50.00	-15.28	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: DC 5V by USB Port
Comment: Neutral Line
Tem.:25℃ Hum.:50%

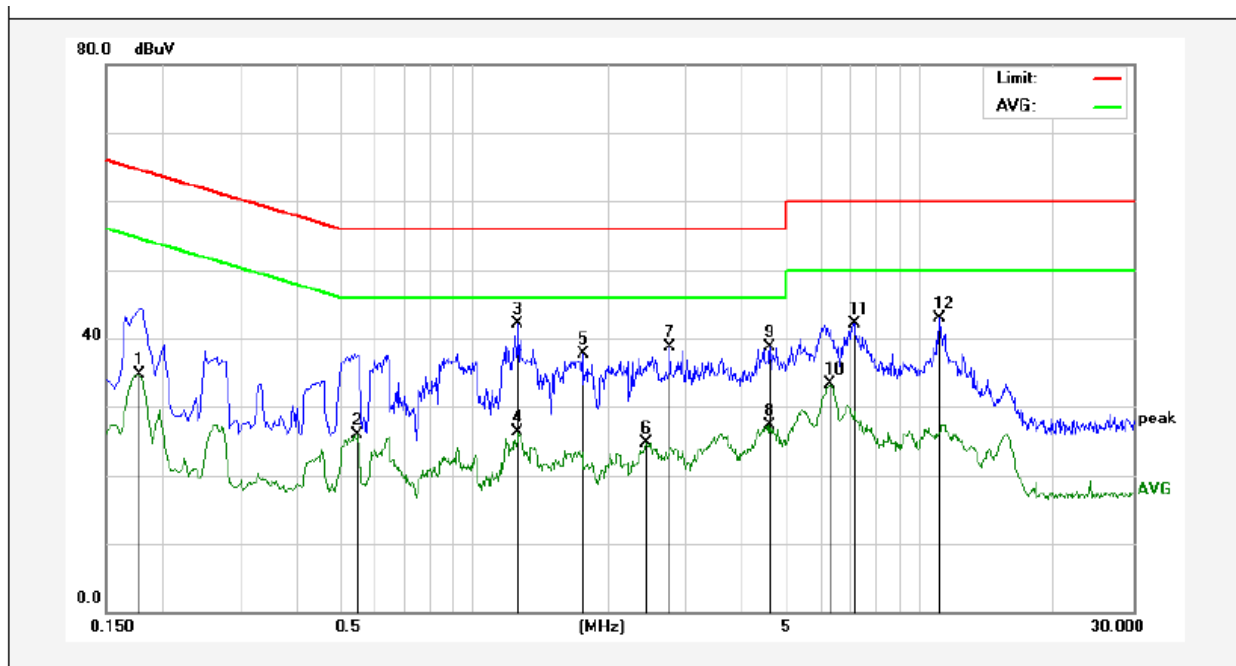

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1780	14.80	19.90	34.70	54.57	-19.87	AVG	
2	0.5500	5.89	19.99	25.88	46.00	-20.12	AVG	
3	1.2579	21.97	20.13	42.10	56.00	-13.90	QP	
4	1.2579	6.27	20.13	26.40	46.00	-19.60	AVG	
5	1.7540	17.52	20.14	37.66	56.00	-18.34	QP	
6	2.4460	4.54	20.15	24.69	46.00	-21.31	AVG	
7	2.7580	18.63	20.16	38.79	56.00	-17.21	QP	
8	4.5900	7.05	20.20	27.25	46.00	-18.75	AVG	
9	4.6140	18.49	20.20	38.69	56.00	-17.31	QP	
10	6.2780	13.10	20.24	33.34	50.00	-16.66	AVG	
11	7.1100	21.90	20.26	42.16	60.00	-17.84	QP	
12	11.0300	22.62	20.32	42.94	60.00	-17.06	QP	

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

Figure 1. Below 30MHz

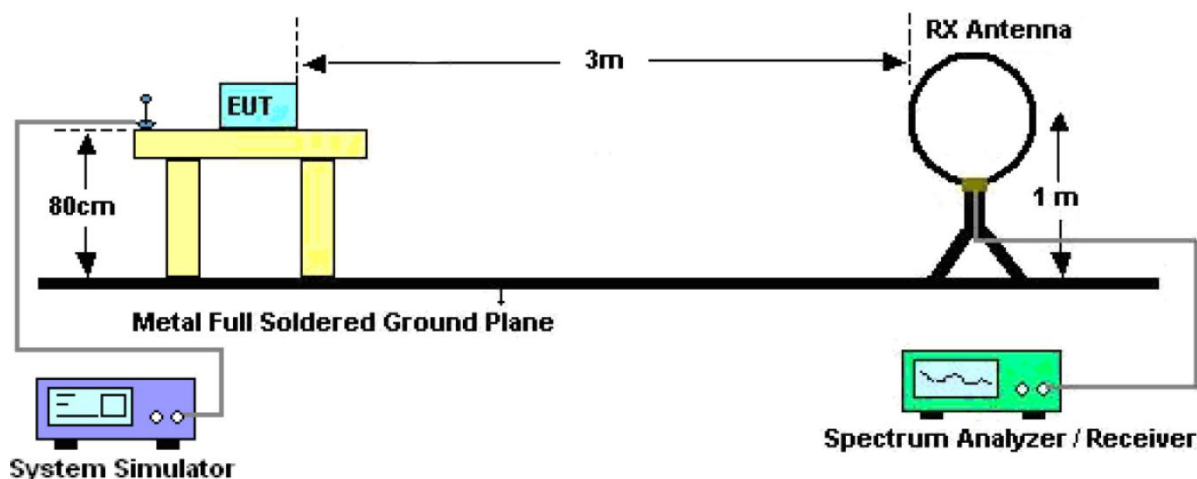


Figure 2. 30MHz to 1GHz


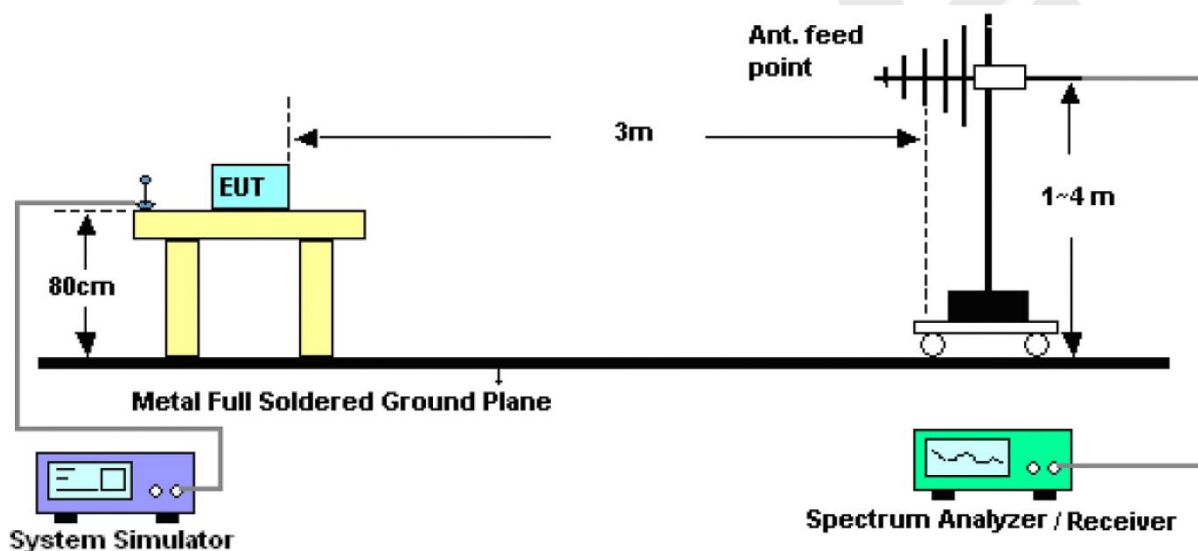


Figure 3. Above 1 GHz

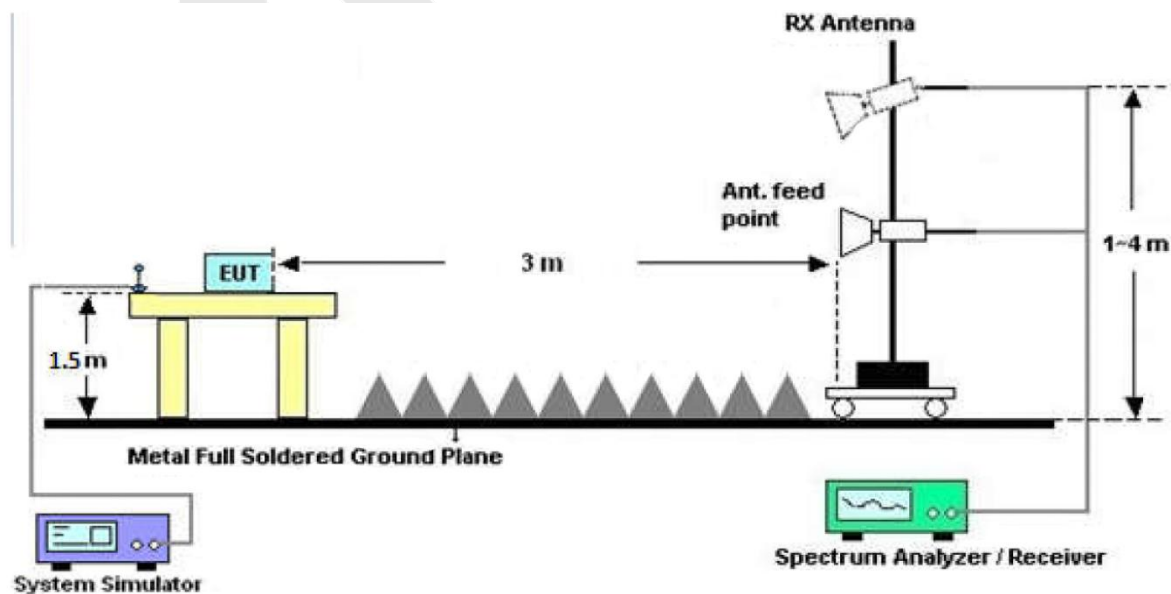

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: SZAWW171201008-0 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
1
Standard: FCC PART 15C Power Source: DC 5V
Test Mode: TX Mode Polarization: Horizontal

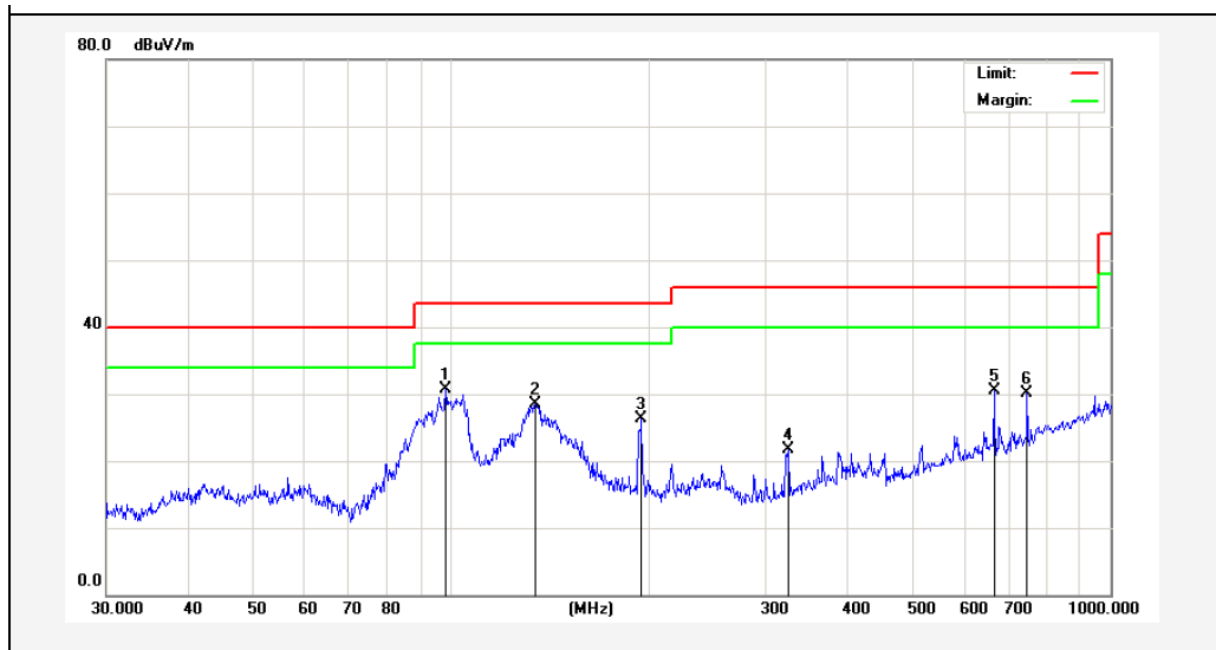

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	98.1419	53.01	-22.37	30.64	43.50	-12.86	QP	300	36	
2	134.0882	55.05	-26.46	28.59	43.50	-14.91	QP	300	78	
3	194.4534	49.33	-23.07	26.26	43.50	-17.24	QP	300	104	
4	324.4561	40.24	-18.55	21.69	46.00	-24.31	QP	300	157	
5	665.8035	42.59	-12.18	30.41	46.00	-15.59	QP	300	231	
6	747.4825	40.43	-10.40	30.03	46.00	-15.97	QP	300	360	

Test Results (30~1000MHz)

Job No.: SZAWW171201008-01 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 5V
Test Mode: TX Mode Polarization: Vertical

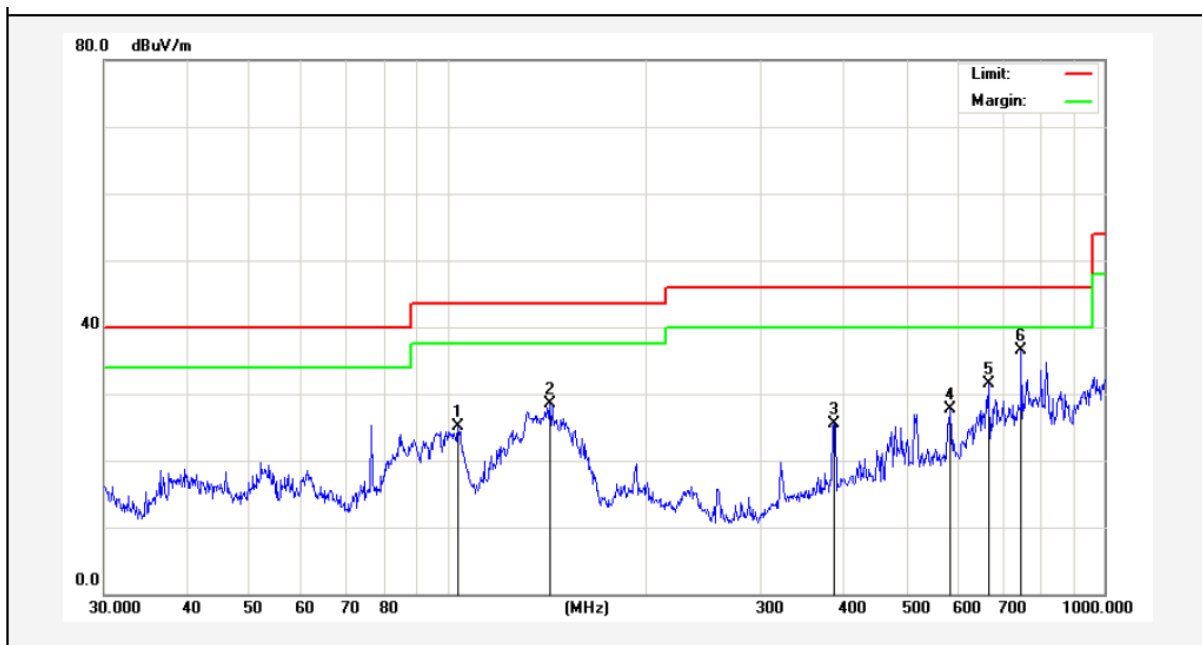

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	103.8055	41.66	-16.53	25.13	43.50	-18.37	QP	300	67	
2	143.3261	49.21	-20.80	28.41	43.50	-15.09	QP	300	137	
3	387.9920	41.03	-15.45	25.58	46.00	-20.42	QP	300	256	
4	582.7425	40.03	-12.35	27.68	46.00	-18.32	QP	300	304	
5	665.8035	42.94	-11.49	31.45	46.00	-14.55	QP	300	334	
6	747.4825	46.47	-9.92	36.55	46.00	-9.45	QP	300	360	

Test Results (1GHz-25GHz)

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2405.0000	95.63	31.21	2.17	35.30	93.71	114.00	-20.29	V	Peak
2405.0000	84.26	31.21	2.17	35.30	82.34	94.00	-11.66	V	AVG
4810.0000	50.33	34.01	2.56	34.71	52.19	74.00	-21.81	V	Peak
4810.0000	41.75	34.01	2.56	34.71	43.61	54.00	-10.39	V	AVG
7215.0000	44.36	36.16	2.98	35.15	48.35	74.00	-25.65	V	Peak
7215.0000	36.46	36.16	2.98	35.15	40.45	54.00	-13.55	V	AVG
9620.0000	*								
12025.0000	*								
14430.0000	*								
16835.0000	*								
2405.0000	95.42	31.21	2.17	35.30	93.50	114.00	-20.50	H	Peak
2405.0000	81.12	31.21	2.17	35.30	79.20	94.00	-14.80	H	AVG
4810.0000	46.36	34.01	2.56	34.71	48.22	74.00	-25.78	H	Peak
4810.0000	41.75	34.01	2.56	34.71	43.61	54.00	-10.39	H	AVG
7215.0000	43.17	36.16	2.98	35.15	47.16	74.00	-26.84	H	Peak
7215.0000	34.22	36.16	2.98	35.15	38.21	54.00	-15.79	H	AVG
9620.0000	*								
12025.0000	*								
14430.0000	*								
16835.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH04 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2430.0000	94.56	31.10	2.11	34.43	93.34	114.00	-20.66	V	Peak
2430.0000	80.92	31.10	2.11	34.43	79.70	94.00	-14.30	V	AVG
4860.0000	46.55	34.87	2.47	34.11	49.78	74.00	-24.22	V	Peak
4860.0000	42.66	34.87	2.47	34.11	45.89	54.00	-8.11	V	AVG
7290.0000	41.74	35.81	3.01	34.54	46.02	74.00	-27.98	V	Peak
7290.0000	35.11	35.81	3.01	34.54	39.39	54.00	-14.61	V	AVG
9720.0000	*								
12150.0000	*								
14580.0000	*								
17010.0000	*								
2430.0000	92.29	31.10	2.11	34.43	91.07	114.00	-22.93	H	Peak
2430.0000	77.26	31.10	2.11	34.43	76.04	94.00	-17.96	H	AVG
4860.0000	45.74	34.87	2.47	34.11	48.97	74.00	-25.03	H	Peak
4860.0000	42.63	34.87	2.47	34.11	45.86	54.00	-8.14	H	AVG
7290.0000	43.22	35.81	3.01	34.54	47.50	74.00	-26.50	H	Peak
7290.0000	36.00	35.81	3.01	34.54	40.28	54.00	-13.72	H	AVG
9720.0000	*								
12150.0000	*								
14580.0000	*								
17010.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH08 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2470.0000	94.06	31.64	2.18	35.89	91.99	114.00	-22.01	V	Peak
2470.0000	86.55	31.64	2.18	35.89	84.48	94.00	-9.52	V	AVG
4940.0000	54.15	35.10	2.52	34.87	56.90	74.00	-17.10	V	Peak
4940.0000	42.66	35.10	2.52	34.87	45.41	54.00	-8.59	V	AVG
7410.0000	44.75	36.18	3.18	34.96	49.15	74.00	-24.85	V	Peak
7410.0000	36.49	36.18	3.18	34.96	40.89	54.00	-13.11	V	AVG
9880.0000	*								
12350.0000	*								
14820.0000	*								
17290.0000	*								
2470.0000	95.66	31.64	2.18	35.89	93.59	114.00	-20.41	H	Peak
2470.0000	77.36	31.64	2.18	35.89	75.29	94.00	-18.71	H	AVG
4940.0000	48.95	35.10	2.52	34.87	51.70	74.00	-22.30	H	Peak
4940.0000	42.65	35.10	2.52	34.87	45.40	54.00	-8.60	H	AVG
7410.0000	45.78	36.18	3.18	34.96	50.18	74.00	-23.82	H	Peak
7410.0000	36.54	36.18	3.18	34.96	40.94	54.00	-13.06	H	AVG
9880.0000	*								
12350.0000	*								
14820.0000	*								
17290.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:


Test Mode:					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.47	29.15	3.41	34.01	51.02	74.00	-22.98	V
2400.00	62.33	29.16	3.43	34.01	60.91	74.00	-13.09	V
2390.00	52.95	29.15	3.41	34.01	51.50	74.00	-22.50	H
2400.00	63.75	29.16	3.43	34.01	62.33	74.00	-11.67	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	41.94	29.15	3.41	34.01	40.49	54.00	-13.51	V
2400.00	45.36	29.16	3.43	34.01	43.94	54.00	-10.06	V
2390.00	43.22	29.15	3.41	34.01	41.77	54.00	-12.23	H
2400.00	41.69	29.16	3.43	34.01	40.27	54.00	-13.73	H

Test Mode:					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	41.69	29.28	3.53	34.03	40.47	74.00	-33.53	V
2500.00	47.45	29.30	3.56	34.03	46.28	74.00	-27.72	V
2483.50	55.69	29.28	3.53	34.03	54.47	74.00	-19.53	H
2500.00	52.33	29.30	3.56	34.03	51.16	74.00	-22.84	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	41.66	29.28	3.53	34.03	40.44	54.00	-13.56	V
2500.00	35.94	29.30	3.56	34.03	34.77	54.00	-19.23	V
2483.50	41.52	29.28	3.53	34.03	40.30	54.00	-13.70	H
2500.00	28.60	29.30	3.56	34.03	27.43	54.00	-26.57	H


Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


Conducted Emission Method

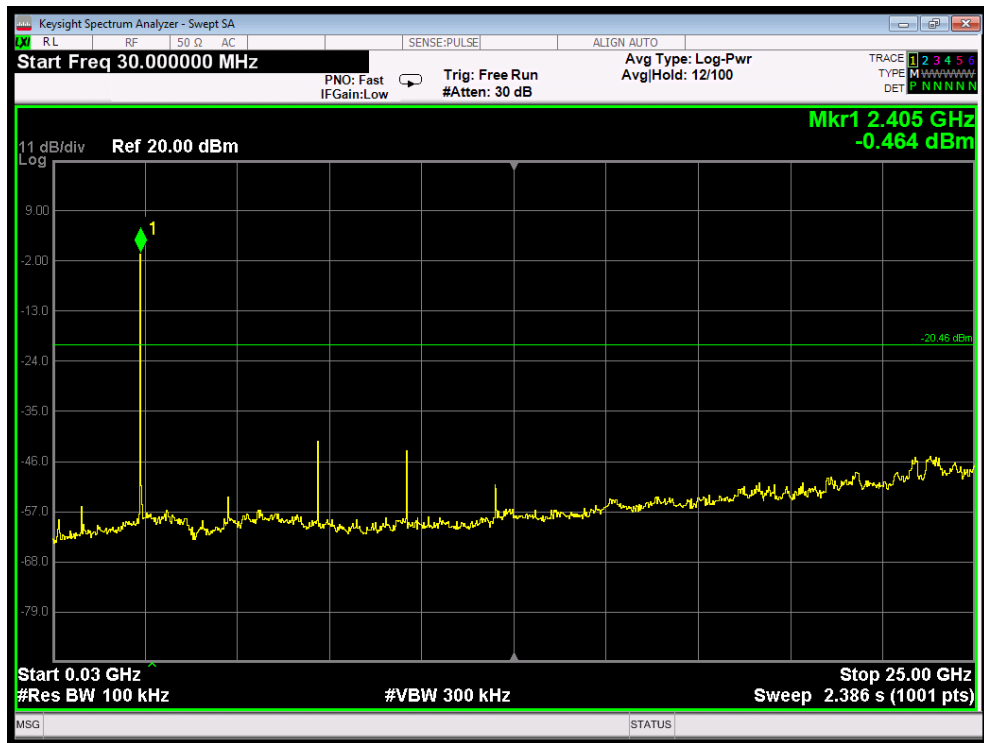

CH: Low

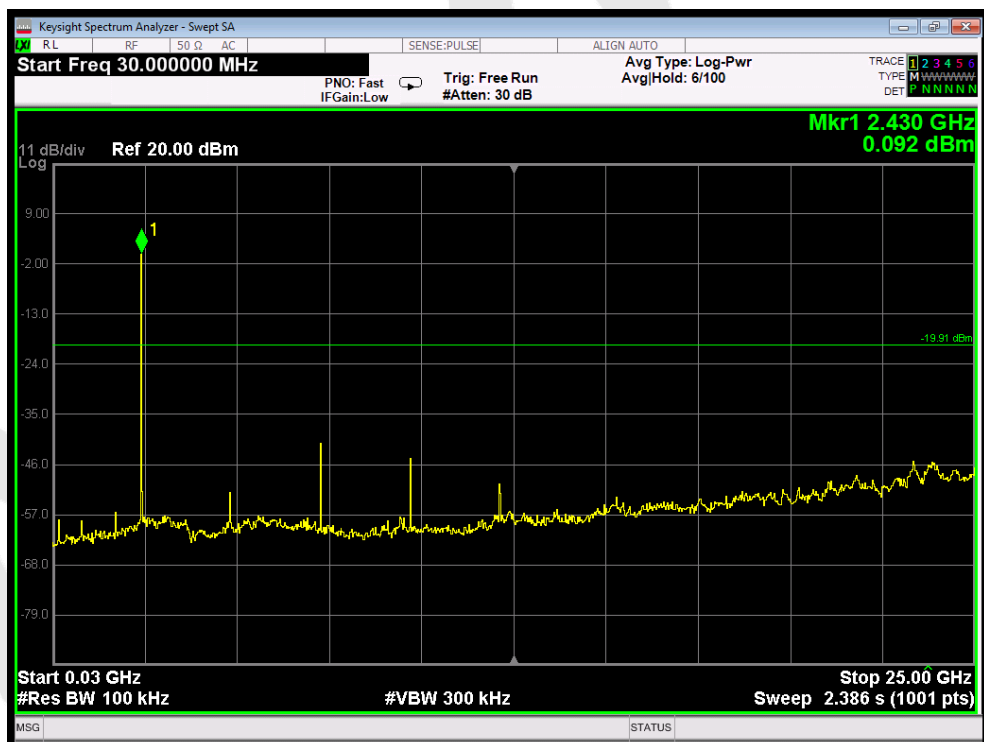

CH: Middle

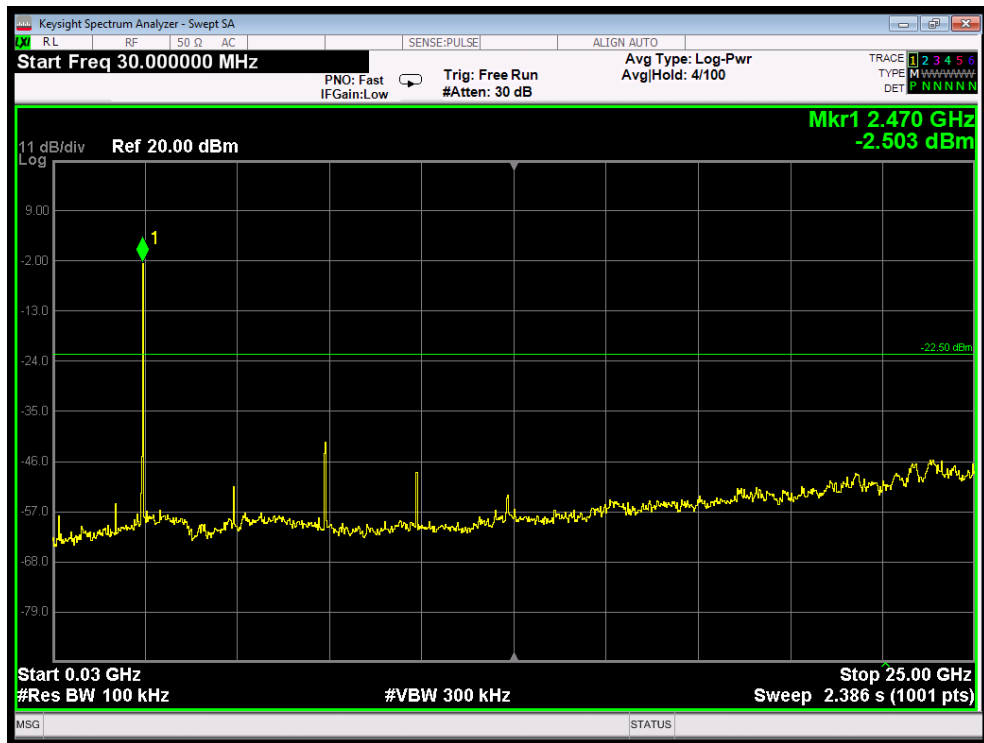


CH: High

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup




5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 RBW = 30kHz, VBW $\geq$ 3*RBW = 100kHz,
 Detector= Average
 Trace mode= Max hold.
 Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: TX Mode
Test Voltage	: DC 5V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2405MHZ	2622.0	PASS
2430MHZ	2617.0	PASS
2470MHZ	2587.0	PASS

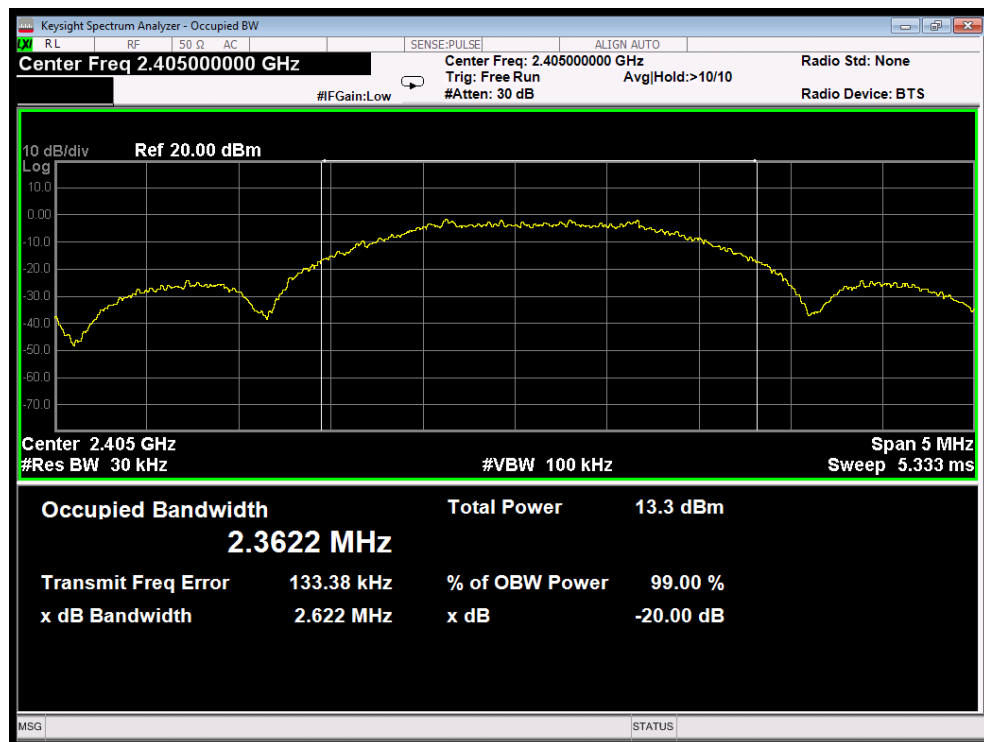

Test Mode: Low

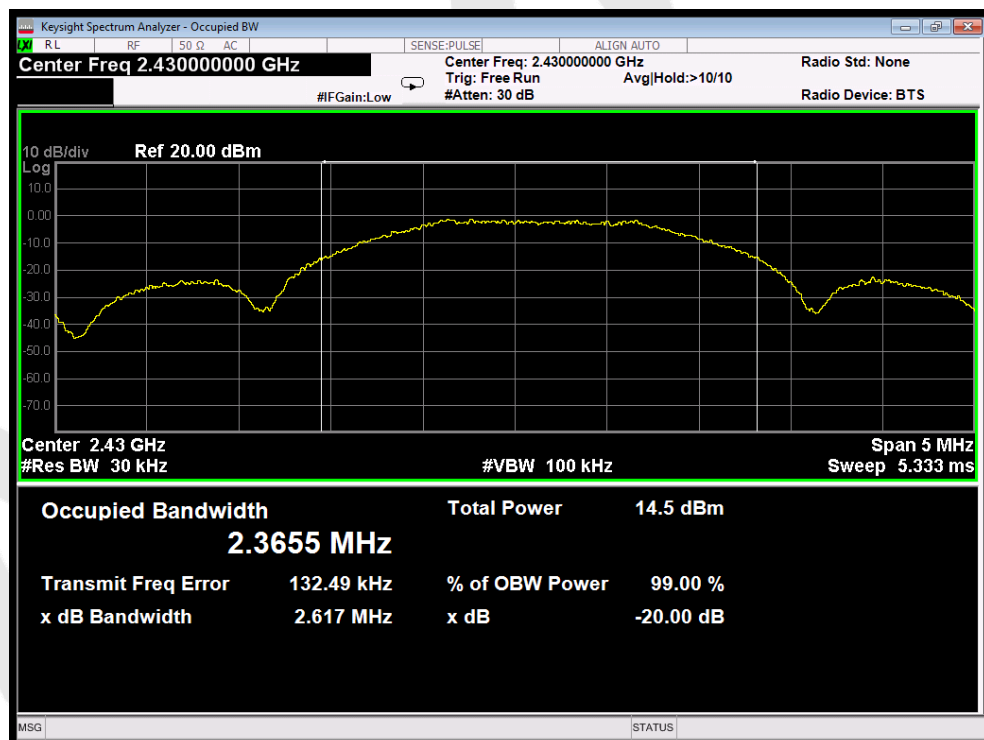

Test Mode: Middle

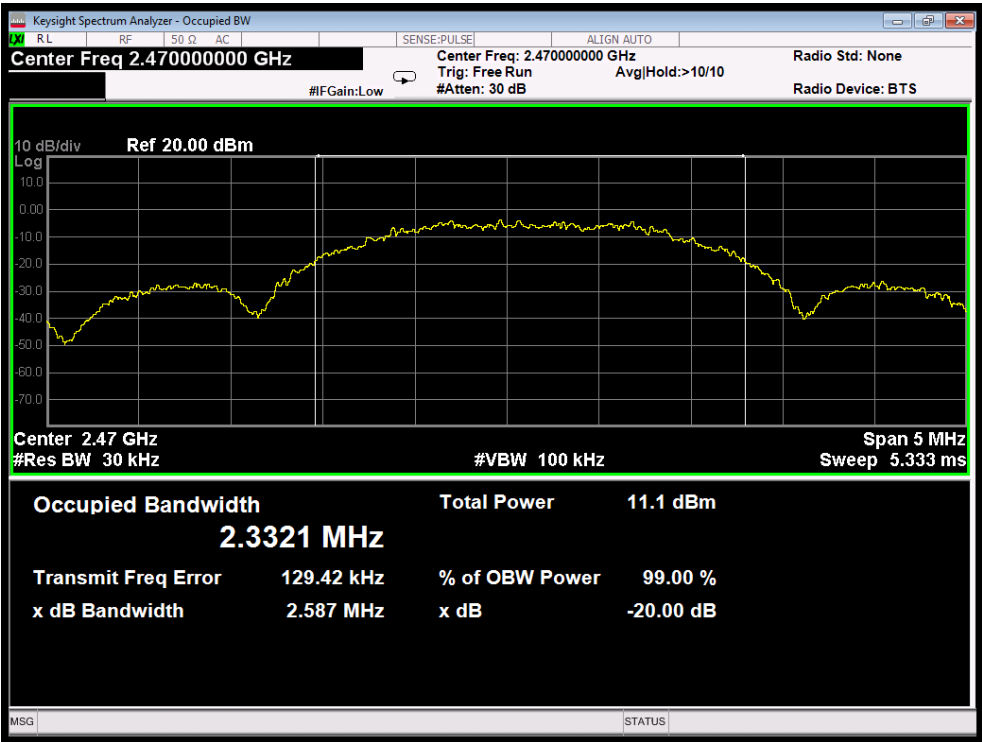

Test Mode: High


6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a Ceramic Antenna which permanently attached, and the best case gain of the antenna is -1.35 dBi. It complies with the standard requirement.

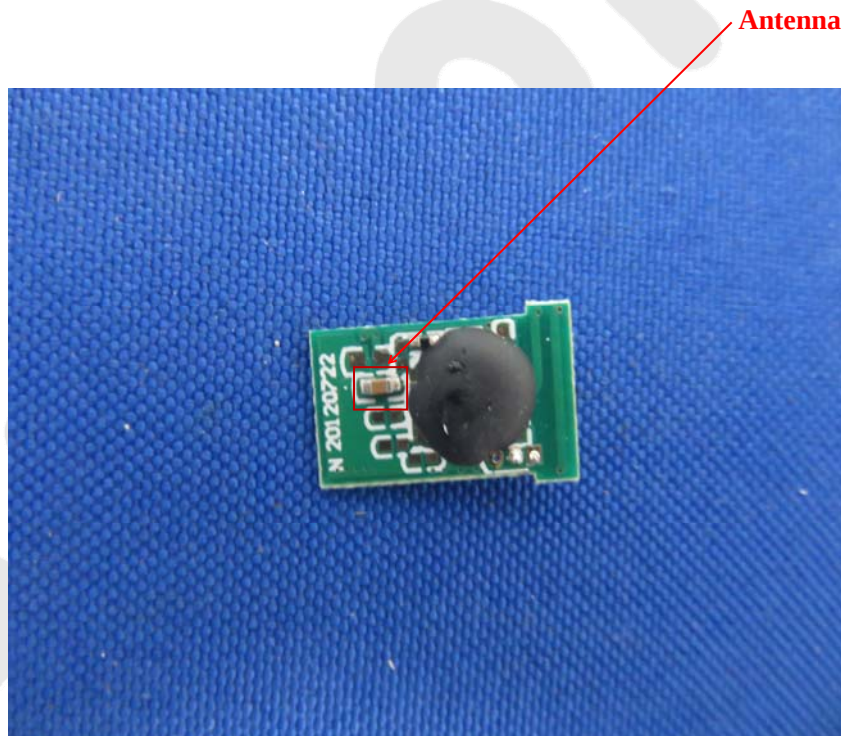


APPENDIX I -- TEST SETUP PHOTOGRAPH



Photo of Conducted Emission Measurement







Photo of Radiation Emission Test

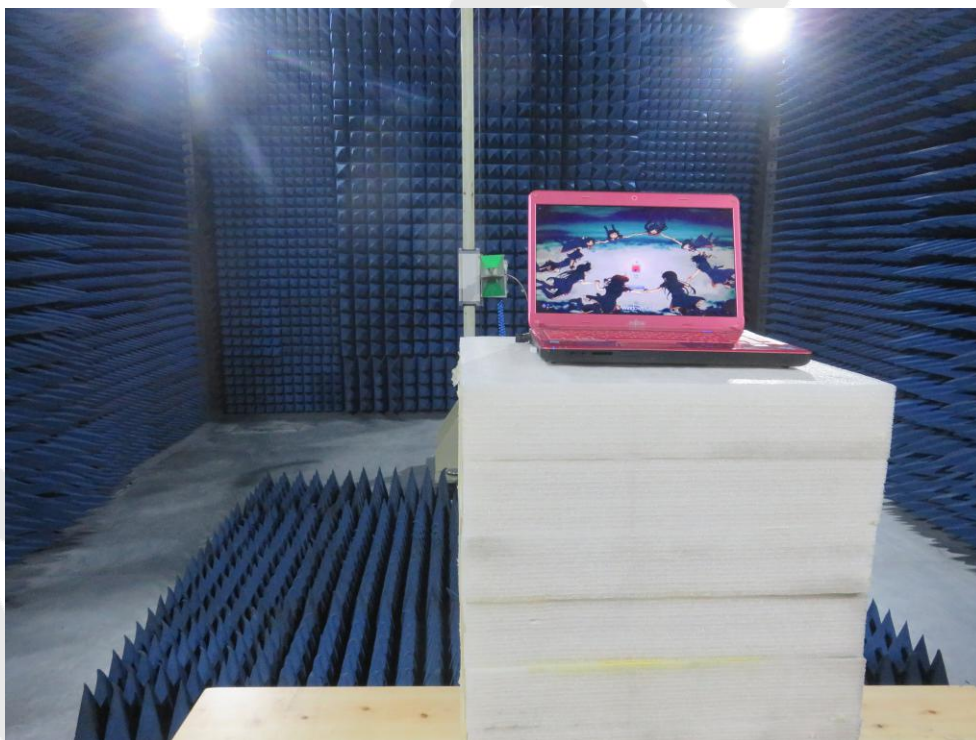



APPENDIX II -- EXTERNAL PHOTOGRAPH

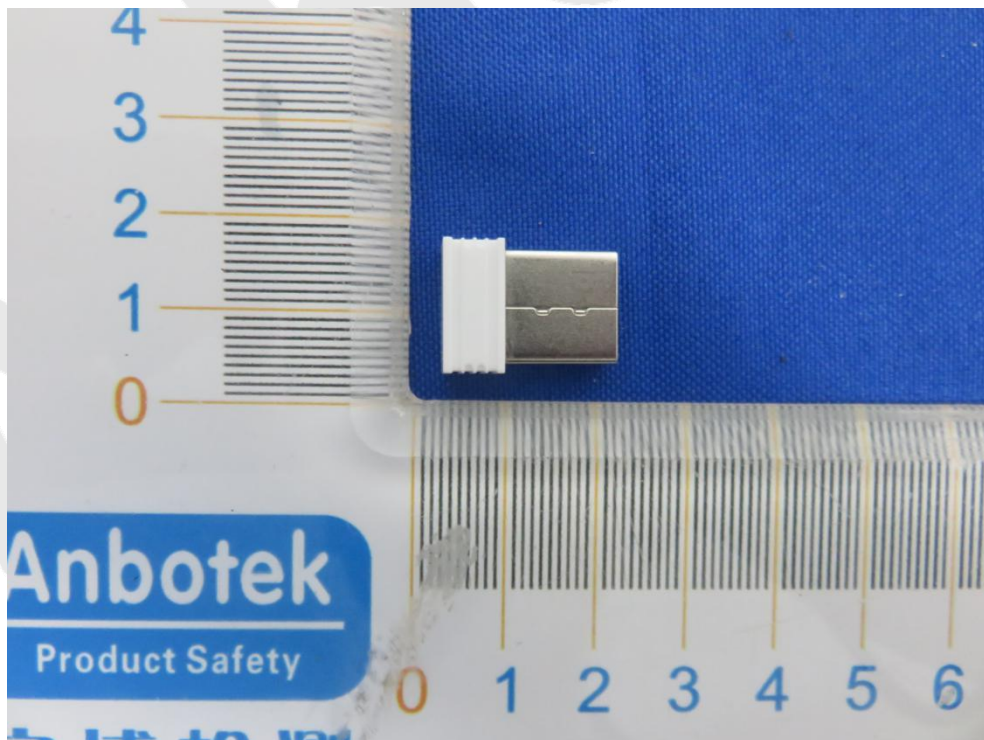
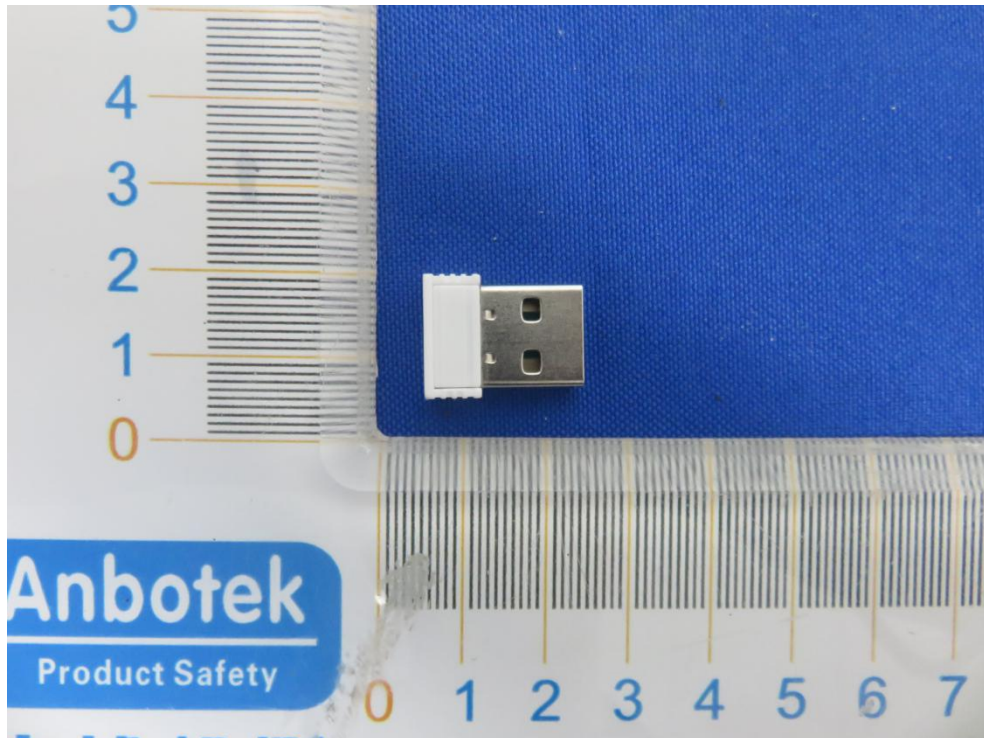


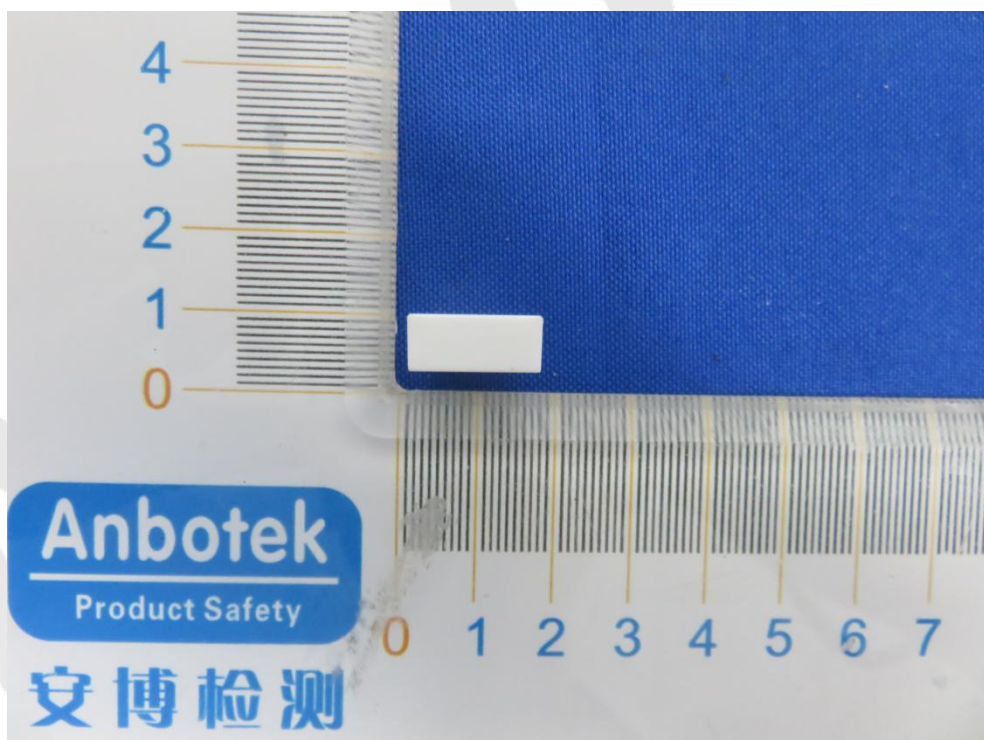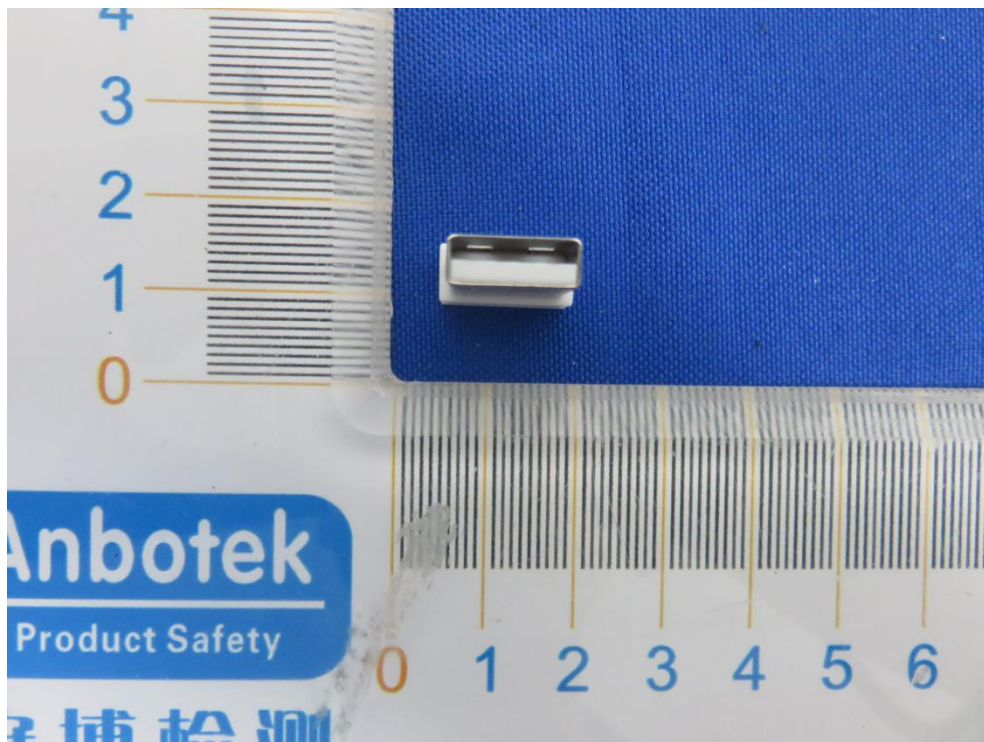

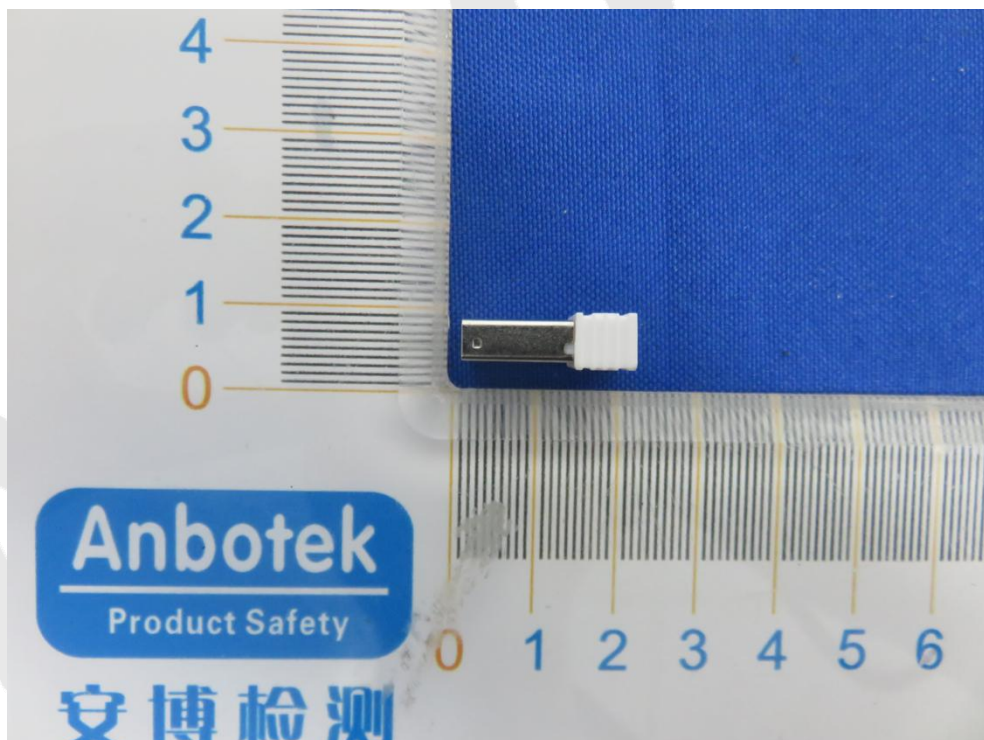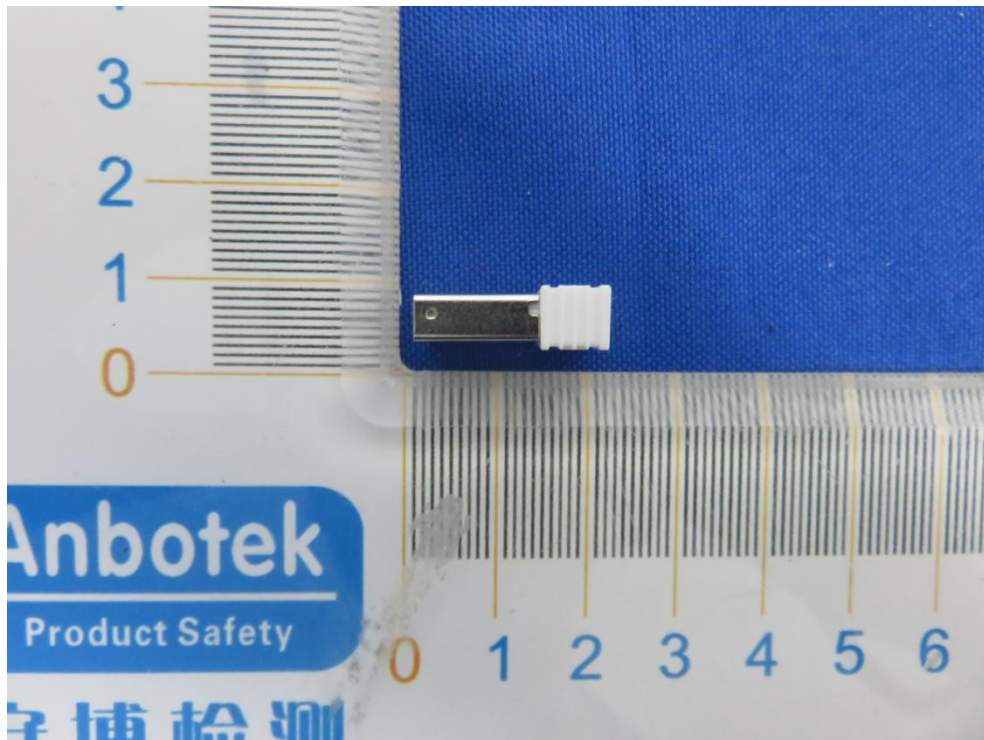

APPENDIX III -- INTERNAL PHOTOGRAPH

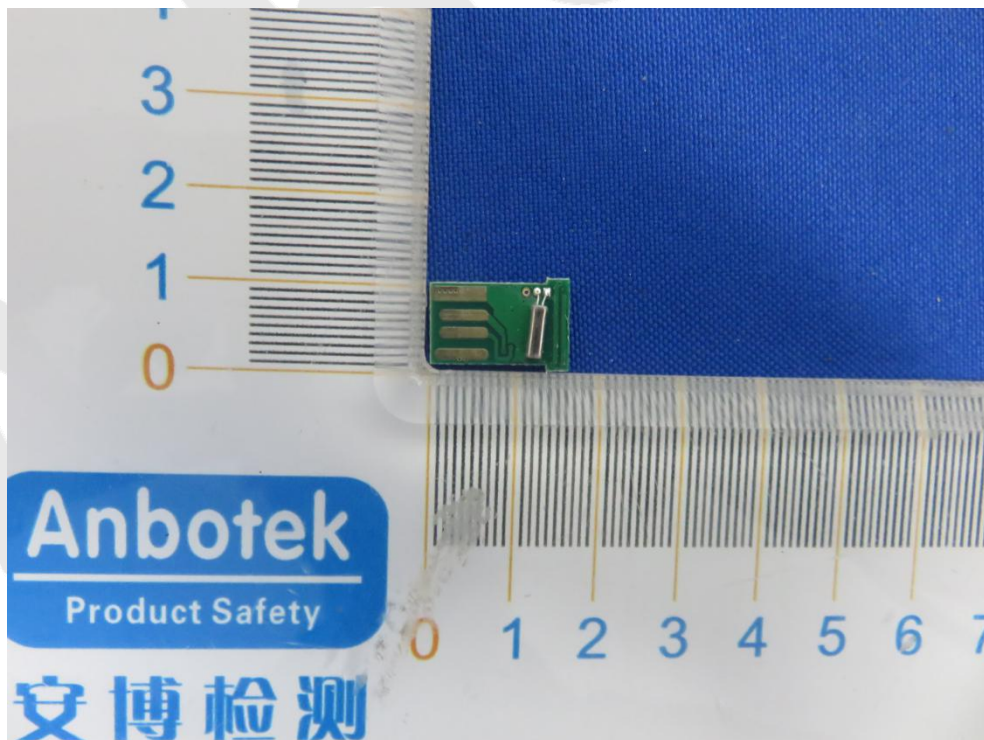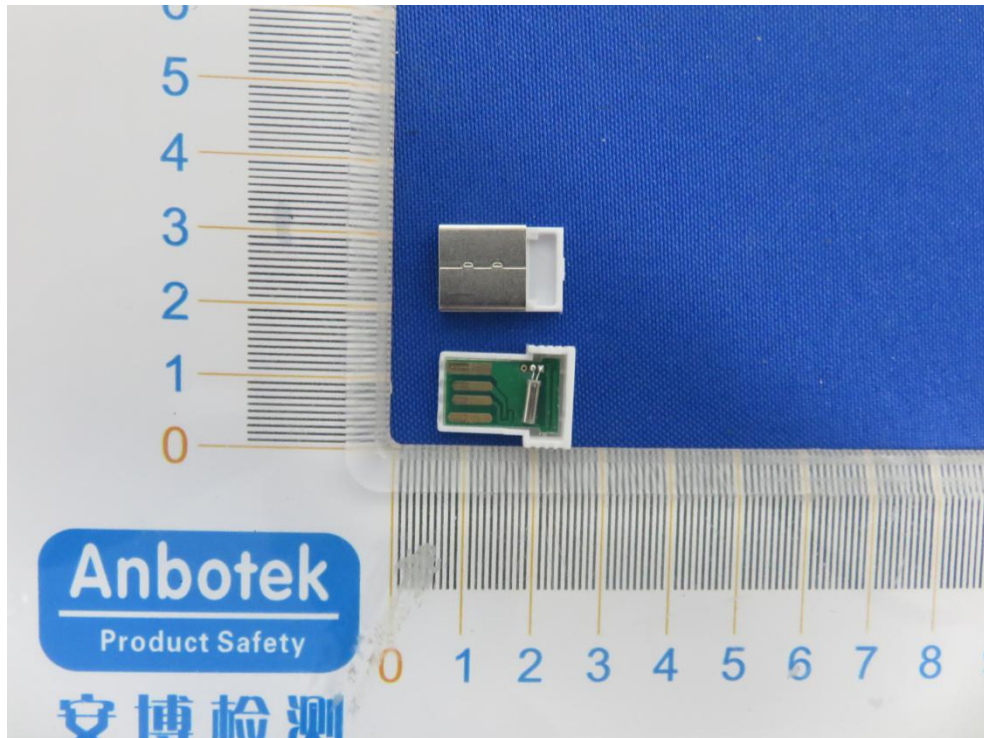

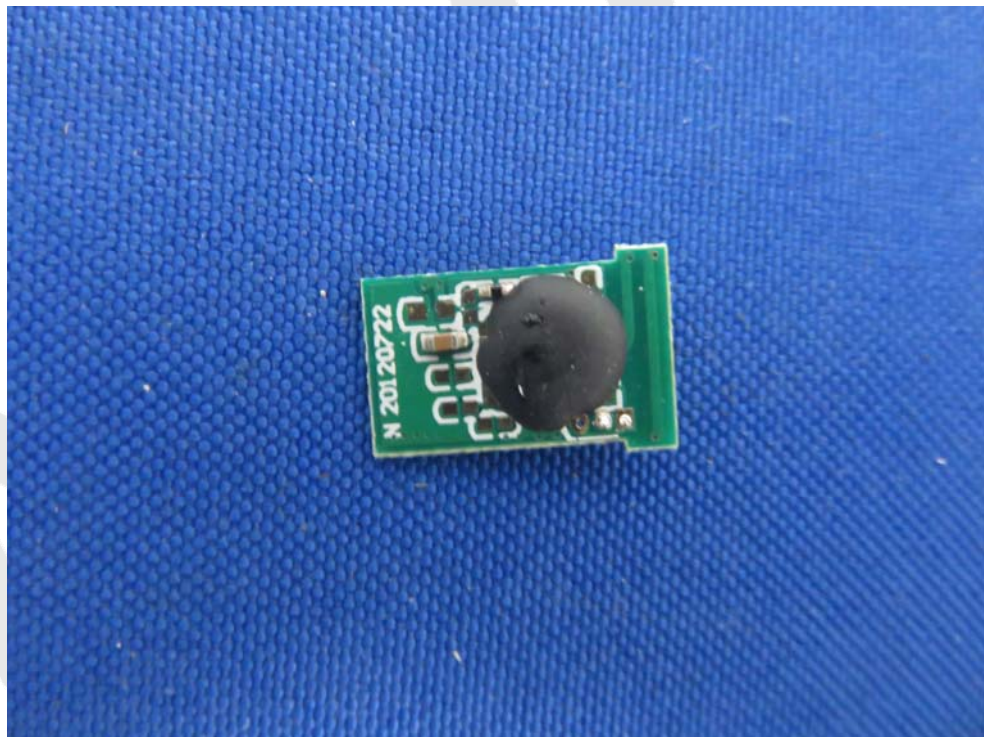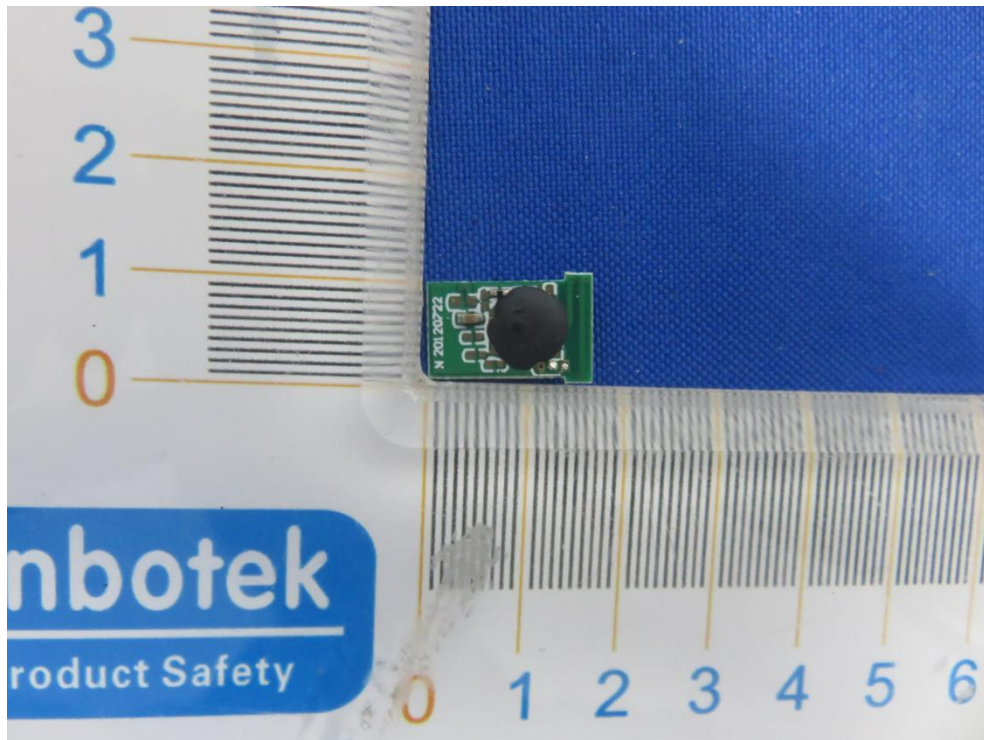



----- End of Report -----