

STATEMENT OF CERTIFICATION


The technical data supplied with this application, having been taken under my supervision is hereby duly certified. The following is a statement of my qualifications:

College Degree: BSEE, Texas Tech University, Lubbock, TX, USA
MSEE, University of Texas at Arlington, Arlington, TX, USA

2 years of Design and Development experience in the field of two-way radio communication.

6 years of Design and Development experience in the field of Cellular/PCS communication.

NAME: Michael Graham


SIGNATURE: 

DATE: February 10, 2003

POSITION: Senior Staff Engineer

I hereby certify that the above application was prepared under my direction and that to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct:

NAME: Michael Pieper

SIGNATURE: 

DATE: February 10, 2003

POSITION: Engineering Manager

SUBMITTED MEASURED DATA -- INDEX

<u>EXHIBIT</u>	<u>DESCRIPTION</u>
11A	RF Output-Data
11B	Adjacent Channel Coupled Power (ACCP) Requirements
11B-1	ACCP Results ≤ 400 kHz for QPSK and C4FM Modulation at 763 MHz
11B-2	ACCP Results > 400 kHz at 762 MHz
11C	Conducted Spurious Emissions: Setup, Specifications, Index
11C-1	Conducted Spurious Harmonic Emissions, Power Output at 55 Watts
11C-2	Conducted Spurious Harmonic Emissions, Power Output at 2.5 Watts
11C-3	Conducted Spurious Close-In Emissions, 763 MHz at Power Output of 55 Watts and 2.5 Watts
11D	Radiated Spurious Emissions: Setup, Specifications, Index
11D-1	Radiated Spurious Emissions, Power Output at 55 Watts
11D-2	Radiated Spurious Emissions, Power Output at 2.5 Watts
11E	Frequency Stability: Setup, Specifications, Index
11E-1	Frequency Stability Vs Temperature
11E-2	Frequency Stability Vs Voltage
11F	Protection of the 1559-1610 MHz Band

RF POWER OUTPUT DATA

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device.

Measured RF output	<u>55</u>	Watts
Normal DC Voltage	<u>28.0</u>	Volts
Normal DC Current	<u>13.5</u>	Amperes
DC Input power for final RF amplifying device(s)	<u>385</u>	Watts
Primary Supply Voltage	<u>48</u>	Volts DC

Minimum Measured RF output	<u>2.5</u>	Watts
Normal DC Voltage	<u>28.0</u>	Volts
Normal DC Current	<u>3.1</u>	Amperes
DC Input power for final RF amplifying device(s)	<u>88</u>	Watts
Primary Supply Voltage	<u>48</u>	Volts DC

ACCP Requirements

Modulation Type: Widepulse QPSK – 9600 bps Random Data
 Emission Designator: 8K70D1W

Modulation Type: C4FM - 9600 bps Random Data
 Emission Designator: 8K10F1E

Channelization: 12.5 kHz

SPECIFICATION REQUIREMENT:**§ 27.53 Emission limits: For operation in the 762-764 MHz Band**

For base transmitters designed to operate with a 12.5 kHz channel bandwidth, the ACCP shall be in accordance to the following table.

12.5 KHz Base Transmitter ACCP Requirements for 27.53(d)

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACCP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
>400 to receive band	30(s)	-80 (continues at -6dB/Octave)
In the receive band	30(s)	-100

Measurement Procedure, per 27.53(d):

Setting the Reference Level, per 27.53(d)(2)(i): Using a spectrum analyzer capable of ACCP measurements set the measurement bandwidth to the channel size, (12.5 kHz). Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power level as the reference power level.

Measuring the power Level at frequency offset <600 kHz, per 27.53(d)(2)(ii): Using a spectrum analyzer capable of ACCP measurements set the measurement bandwidth as shown in the table. Measure the ACCP in dBm. These measurements should be made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACCP values must be less than the values given in the table for each condition.

Measuring the power Level at frequency offset >600 kHz, per 27.53(d)(2)(iii): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth and sample mode detection. Sweep ± 6 MHz from the carrier

frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >600 kHz must be less than the values listed in the table.

Measurement results, per 27.53(d):

For measurements ≤ 400 kHz offset from center frequency the ACCP results are shown in Tabular format. For measurements >400 kHz offset from center frequency the ACCP results are shown in Graphical format.

The ACCP test results for >400 kHz offsets are shown for QPSK modulation only, as this represents the worse case of the two supported modulation techniques.

ACCP Data:


<u>EXHIBIT</u>	<u>DESCRIPTION</u>
11B-1	ACCP Results ≤ 400 kHz for QPSK and C4FM Modulation
11B-2	ACCP Results >400 kHz at 762 MHz

ACCP Test Results for offset frequencies ≤ 400 kHz

ACCP Test Results: QPSK Modulation, Pout = 55 Watts				
FCC Requirements			Measurement Results	
			763 MHz	
Offset from Center Freq (kHz)	Measurement BW (kHz)	Maximum ACP (dBc)	Max ACP at low side offset freq. (dBc)	Max ACP at high side offset freq. (dBc)
+/- 9.375	6.25	-40	-41.90	-42.10
+/- 15.625	6.25	-60	-74.60	-74.60
+/- 21.875	6.25	-60	-77.40	-75.60
+/- 37.5	25	-60	-72.20	-71.60
+/- 62.5	25	-65	-72.60	-72.10
+/- 87.5	25	-65	-72.60	-72.60
+/- 150	100	-65	-69.30	-69.50
+/- 250	100	-65	-73.20	-73.00
+/- 350	100	-65	-76.40	-76.40

ACCP Test Results: C4FM Modulation, Pout = 55 Watts				
FCC Requirements			Measurement Results	
			763 MHz	
Offset from Center Freq (kHz)	Measurement BW (kHz)	Maximum ACP (dBc)	Max ACP at low side offset freq. (dBc)	Max ACP at high side offset freq. (dBc)
+/- 9.375	6.25	-40	-43.80	-42.60
+/- 15.625	6.25	-60	-74.70	-74.30
+/- 21.875	6.25	-60	-77.40	-76.70
+/- 37.5	25	-60	-72.20	-71.90
+/- 62.5	25	-65	-72.70	-72.80
+/- 87.5	25	-65	-73.40	-73.40
+/- 150	100	-65	-69.10	-69.20
+/- 250	100	-65	-72.70	-72.80
+/- 350	100	-65	-76.00	-76.10

ACCP Plot for offset frequencies > 400 kHz at 762 MHz

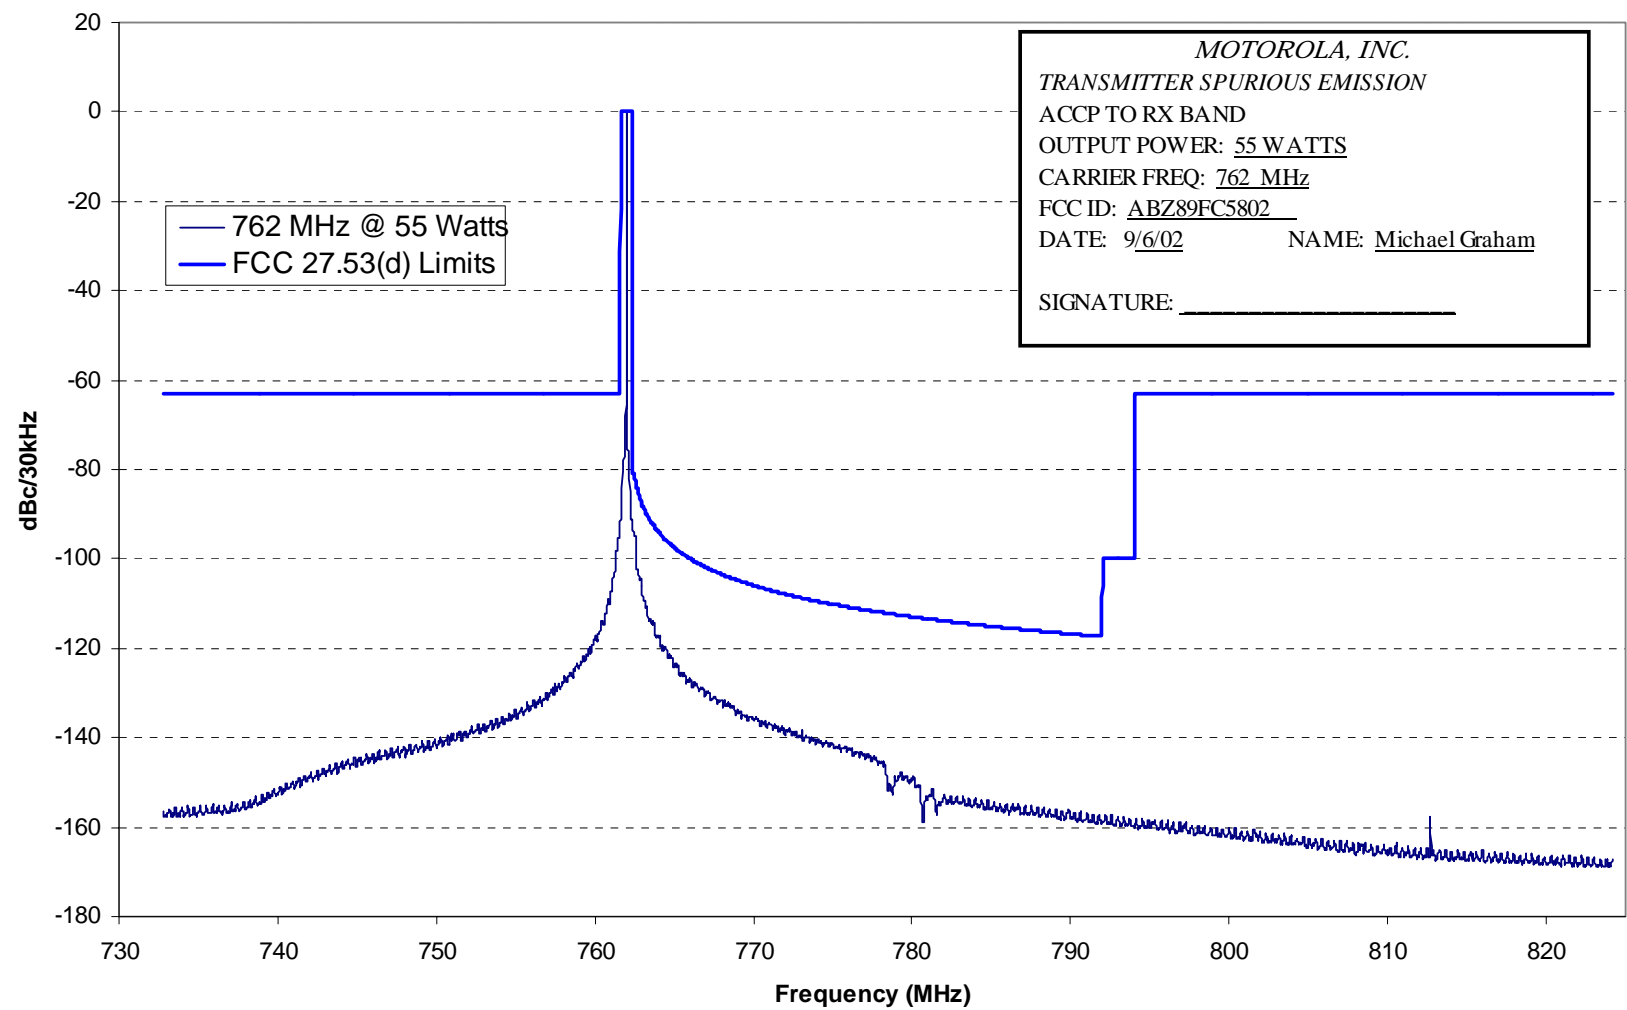

CONDUCTED SPURIOUS EMISSIONS**SPECIFICATION REQUIREMENT:****Reference: Part 27.53(d)(3)**

On any frequency displacement outside of the frequency ranges covered in the ACCP tables, the power of any emission must be reduced below the unmodulated carrier power (P) by at least $43+10*\log(P)$.

For this transmitter, when operating at the full power setting of 55 Watts, this specification limit is 60.4 dBc.

For this transmitter, when operating at the lowest power setting of 2.5 Watts, this specification limit is 47 dBc.


Modulation: Psuedorandom data


Carrier Frequency: One carrier frequencies was measured at 763 MHz. This frequency represents the center of the 762-764 MHz band covered by Part 27.53.



The spurious emissions test results are shown for QPSK modulation only, this represents the worse case of the two supported modulation techniques.

SPURIOUS EMISSION PLOTS:**EXHIBIT DESCRIPTION**

11C-1	Conducted Spurious Harmonic Emissions, Power Output at 55 Watts
11C-2	Conducted Spurious Harmonic Emissions, Power Output at 2.5 Watts
11C-3	Conducted Spurious Close-In Emissions, 763 MHz at Power Output of 55 Watts and 2.5 Watts

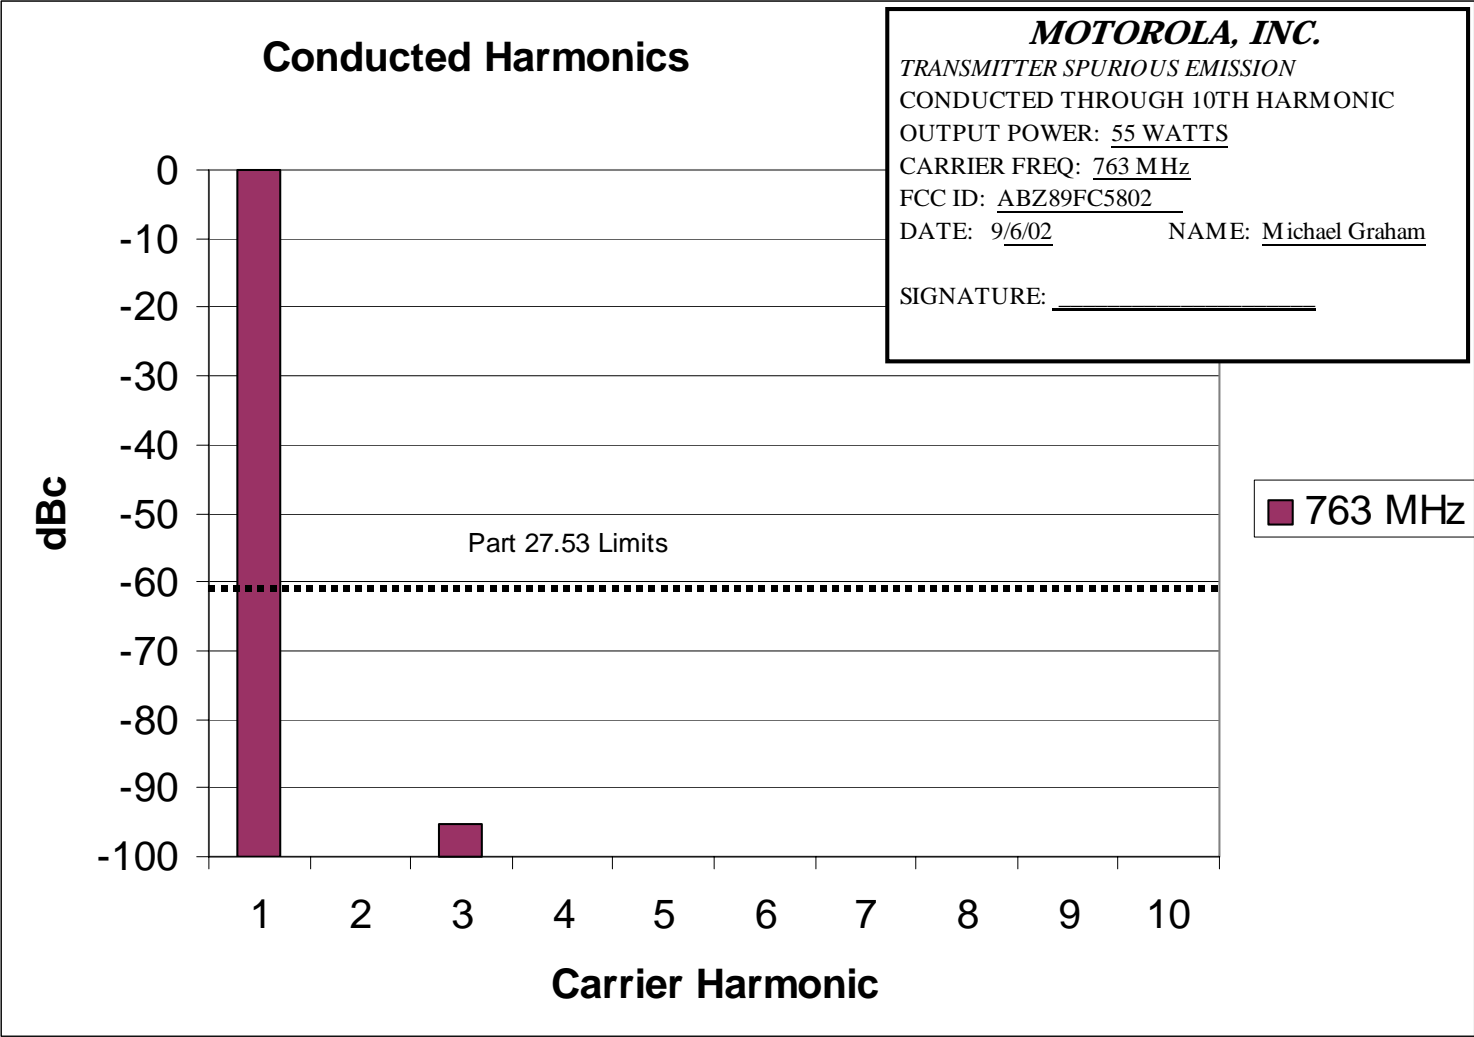

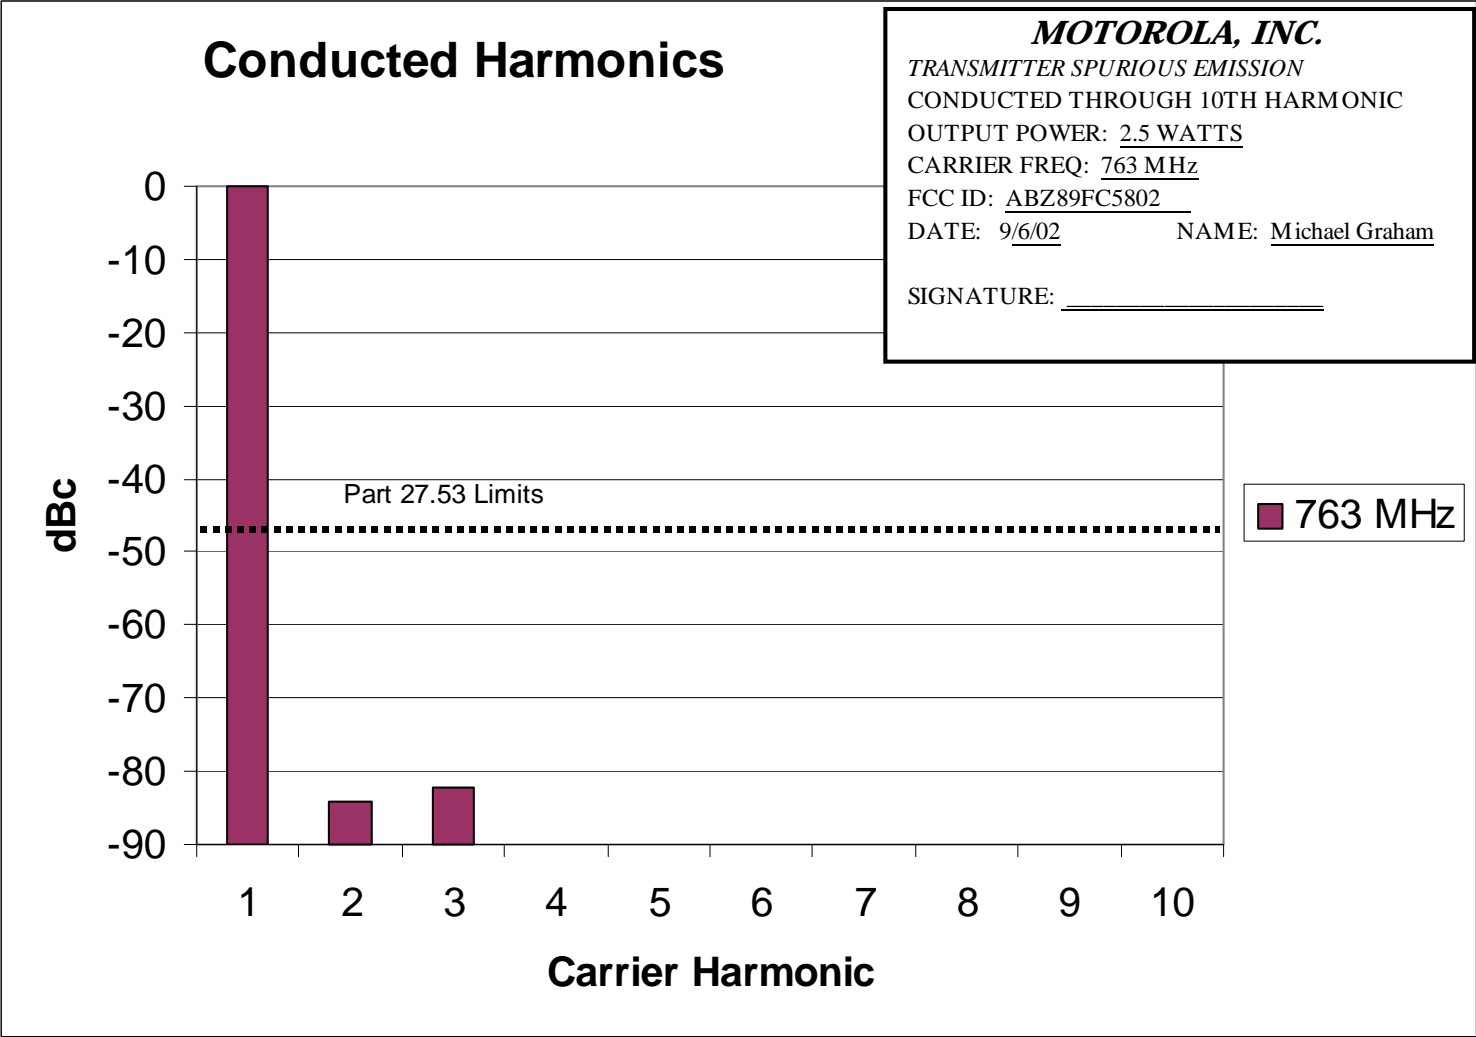

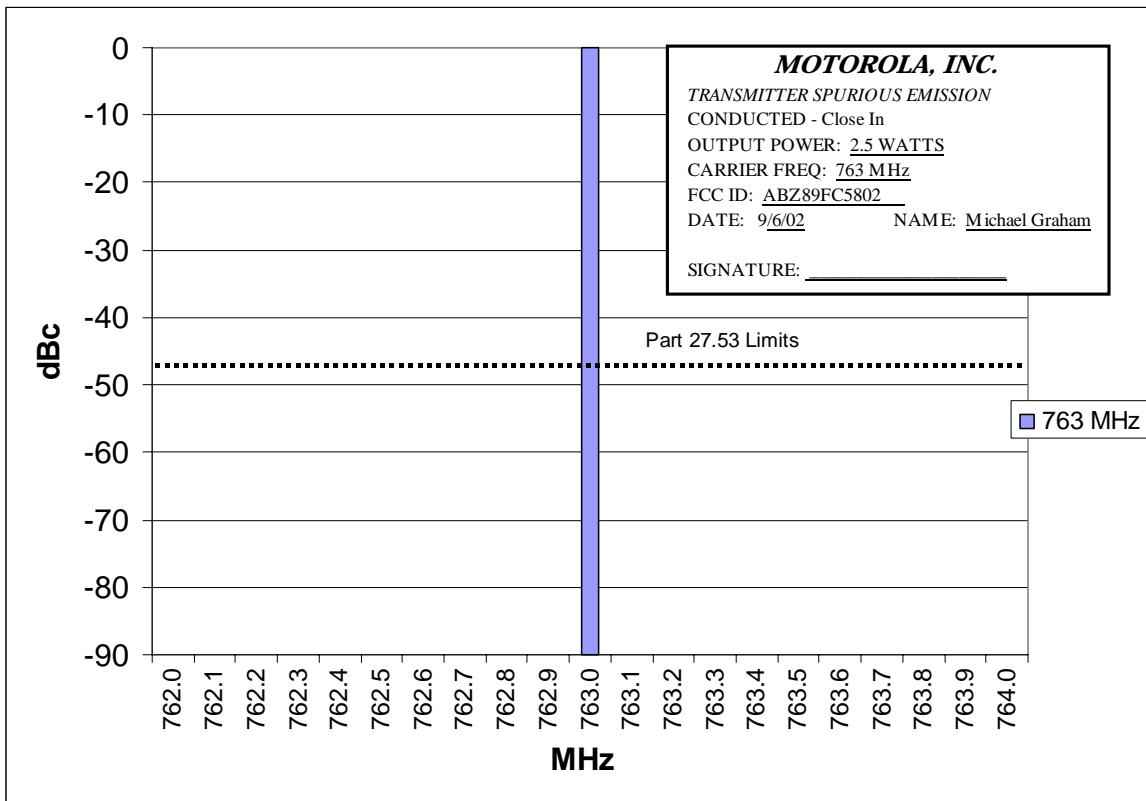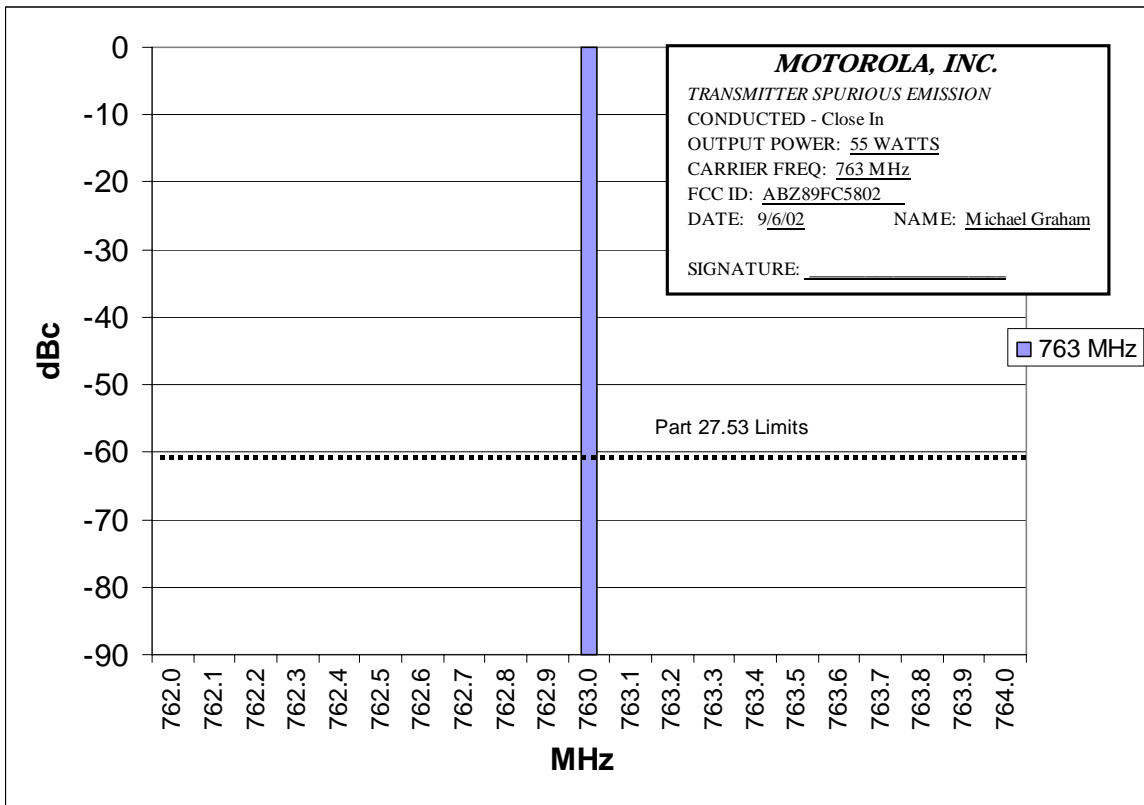

RADIATED SPURIOUS EMISSIONS**SPECIFICATION REQUIREMENT:****Reference: Part 27.53(d)(3)**

On any frequency displacement outside of the frequency ranges covered in the ACCP tables, the power of any emission must be reduced below the unmodulated carrier power (P) by at least $43+10*\log(P)$.

For this transmitter, when operating at the full power setting of 55 Watts, this specification limit is 60.4 dBc.

For this transmitter, when operating at the lowest power setting of 2.5 Watts, this specification limit is 47 dBc.


Modulation: Pseudorandom data


Carrier Frequency: One carrier frequency was measured at 762 MHz. This frequency represents the lower band edge of the 762-764 MHz band covered by Part 27.53.

The radiated spurious emissions test results are shown for QPSK modulation only as this represents the worse case of the two supported modulation techniques.

RADIATED SPURIOUS EMISSION PLOTS:**EXHIBIT DESCRIPTION**

11D-1	Radiated Spurious Emissions, Power Output at 55 Watts
11D-2	Radiated Spurious Emissions, Power Output at 2.5 Watts

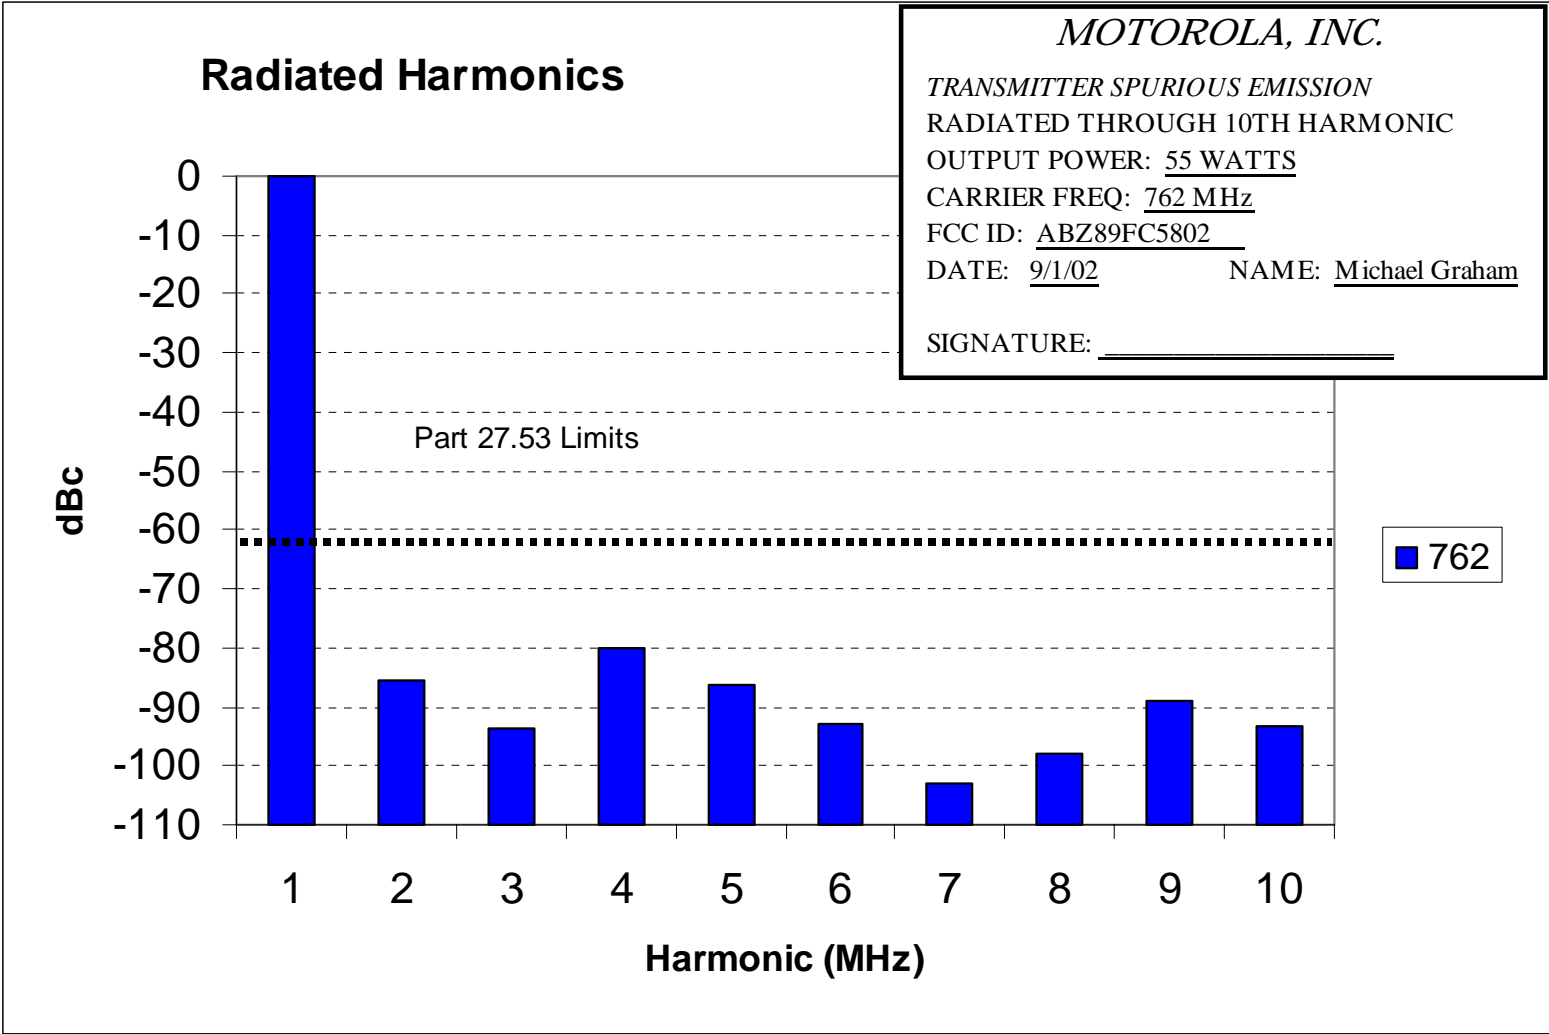

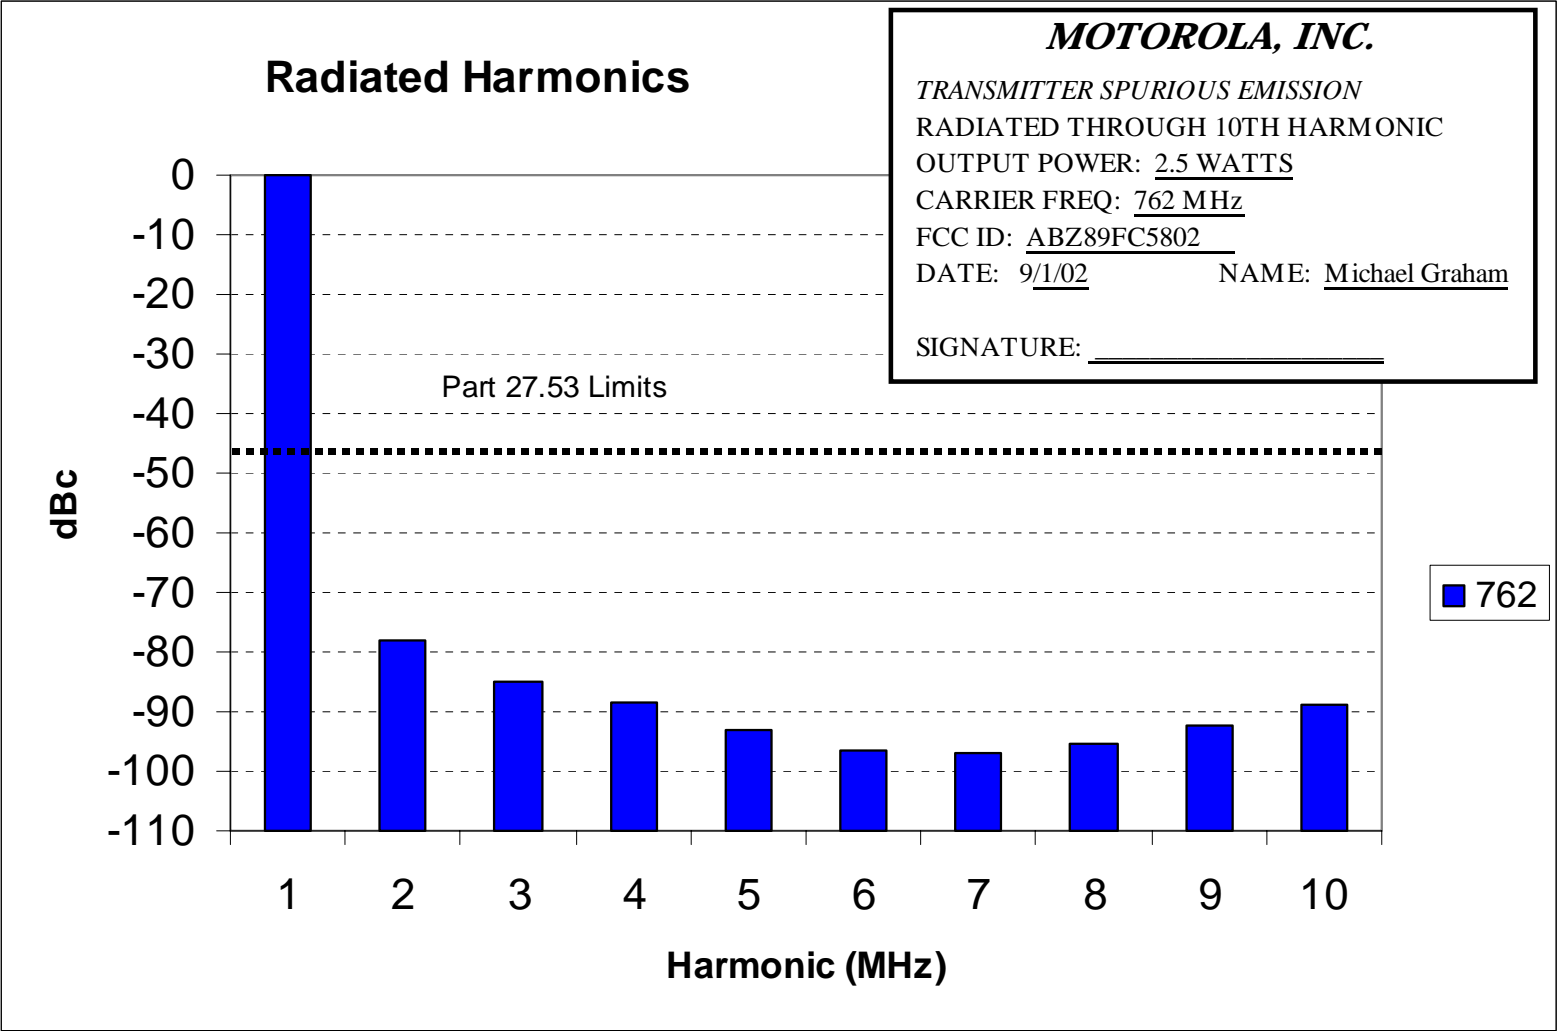

OSCILLATOR FREQUENCY STABILITY

SPECIFICATION REQUIREMENT:

Reference: Part 27.54


Fixed and Base stations, operating at 762-764 MHz, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.


Motorola's internal specification for frequency stability for this product must be better than 100 PPB.

Manufacturer's data for the Private Site Controller (PSC 9600) site frequency standard was used in generation of the following frequency stability exhibits.

FREQUENCY STABILITY PLOTS:

<u>EXHIBIT</u>	<u>DESCRIPTION</u>
11E-1	Frequency Stability Vs Temperature
11E-2	Frequency Stability Vs Voltage

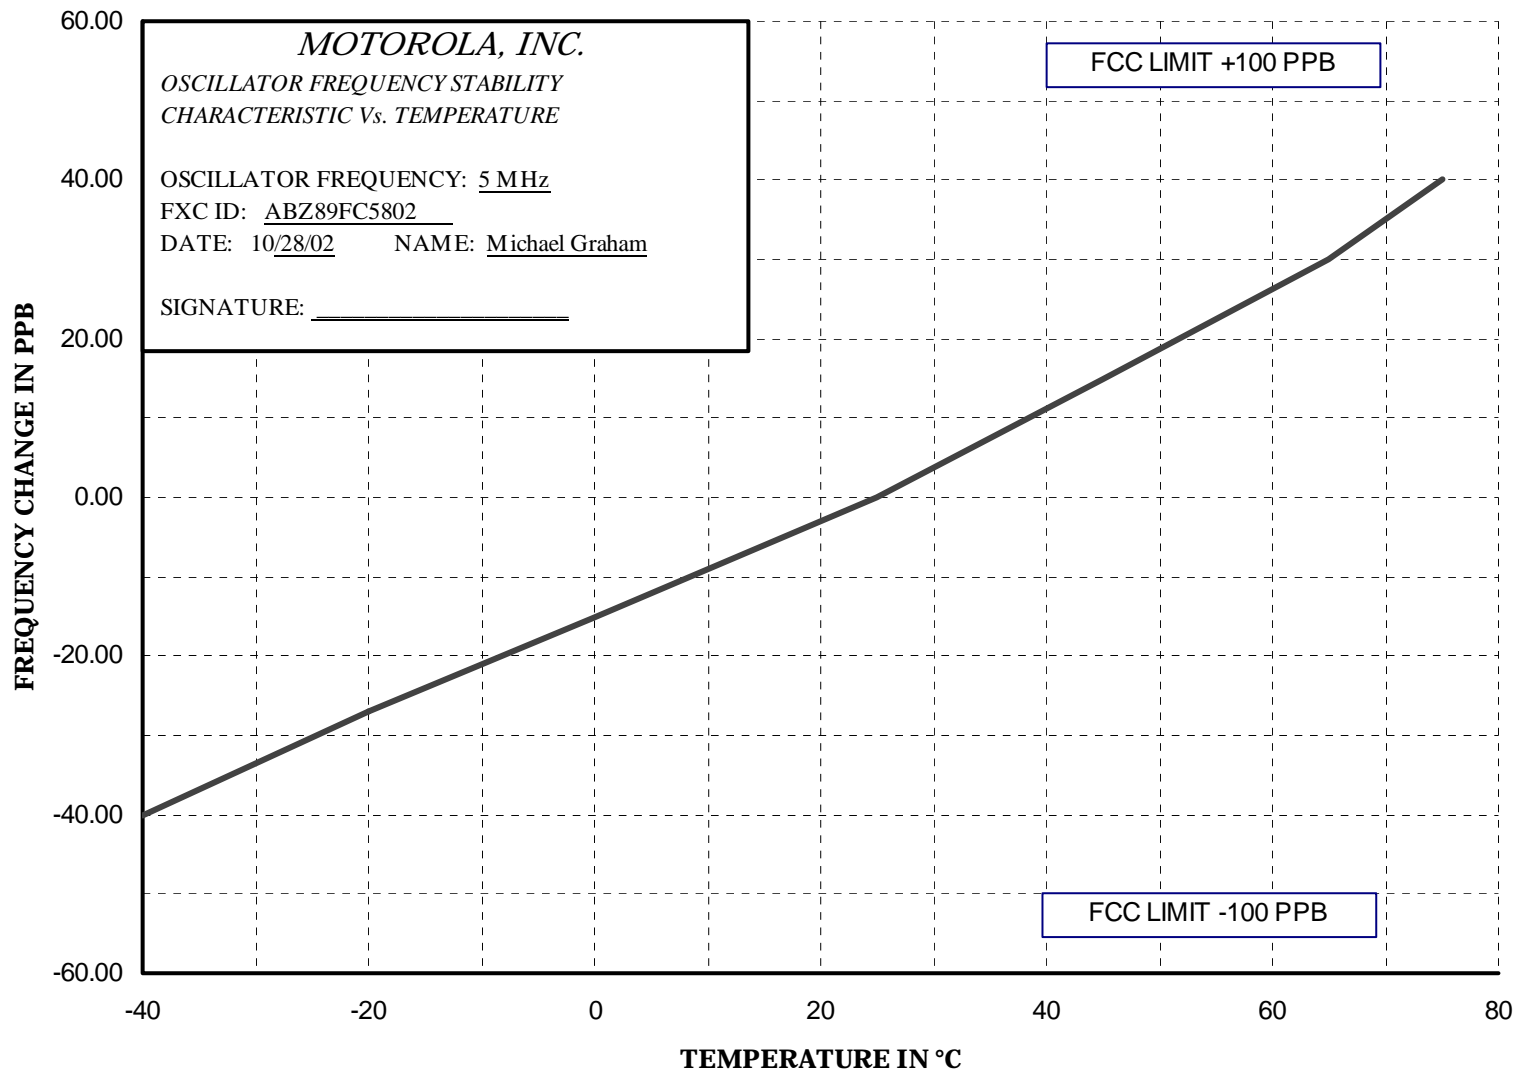

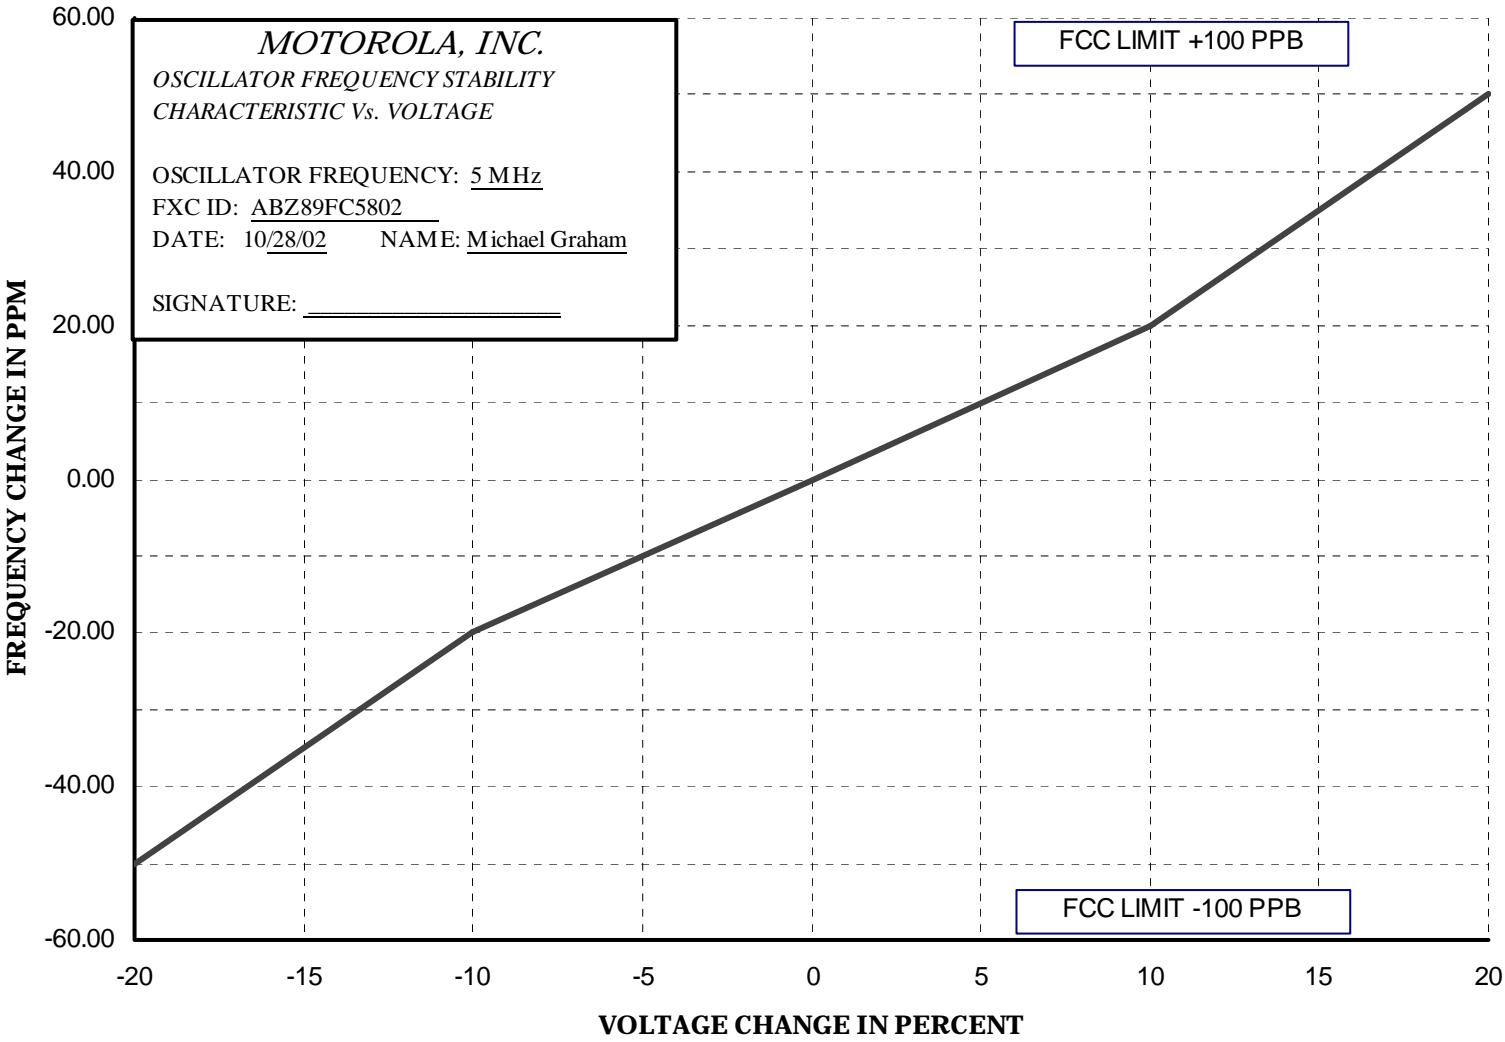

Protection of the 1559-1610 MHz Band**SPECIFICATION REQUIREMENT:****Reference: Part 27.53(e)**

For operation in the 746-764 MHz and 776-794 MHz bands all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The data was measured at the Fort Worth OATS test site using the base radio and transmit combiner to drive a representative dipole antenna with 55 watts average power, measured at the output of the combiner network. The radiated emissions in the 1559-1610 MHz band were recorded.

For this test the transmitter was configured for 55 Watts output power at 763 MHz. The receiver channel is locked to 793 MHz.

Modulation: Pseudorandom data

Carrier Frequency: A carrier frequency of 763 MHz was measured. This frequency represents the center of the 762-764 MHz guard band. band whose second harmonic, VCO and receiver spurs are closest to the 1559-1610 MHz band.


The test results are shown for QPSK modulation only, as this represents the worse case of the two supported modulation techniques.

EXHIBIT DESCRIPTION

11F Protection of the 1559-1610 MHz band, Power Output at 55 Watts at 763 MHz

Title:	GNSS band testing, FCC 90.543(e)	
Specification	< -70 dBW/MHz for wideband signals	
	< -80 dBW for discrete signals less than 700 Hz bandwidth	
Date:	07-February, 2003	
Product:	STR3000 700 MHz	
Temp/Humidity:	10C/40%	
TX Frequency:	763 MHz	
Channel Spacing	12.5 kHz	
	EIRP Maximum (dBW/MHz)	
Frequency (MHz)	Vertical Polarization	Horizontal Polarization
1600	-88.92	-89.32

Plot for EIRP limits in the GNSS band

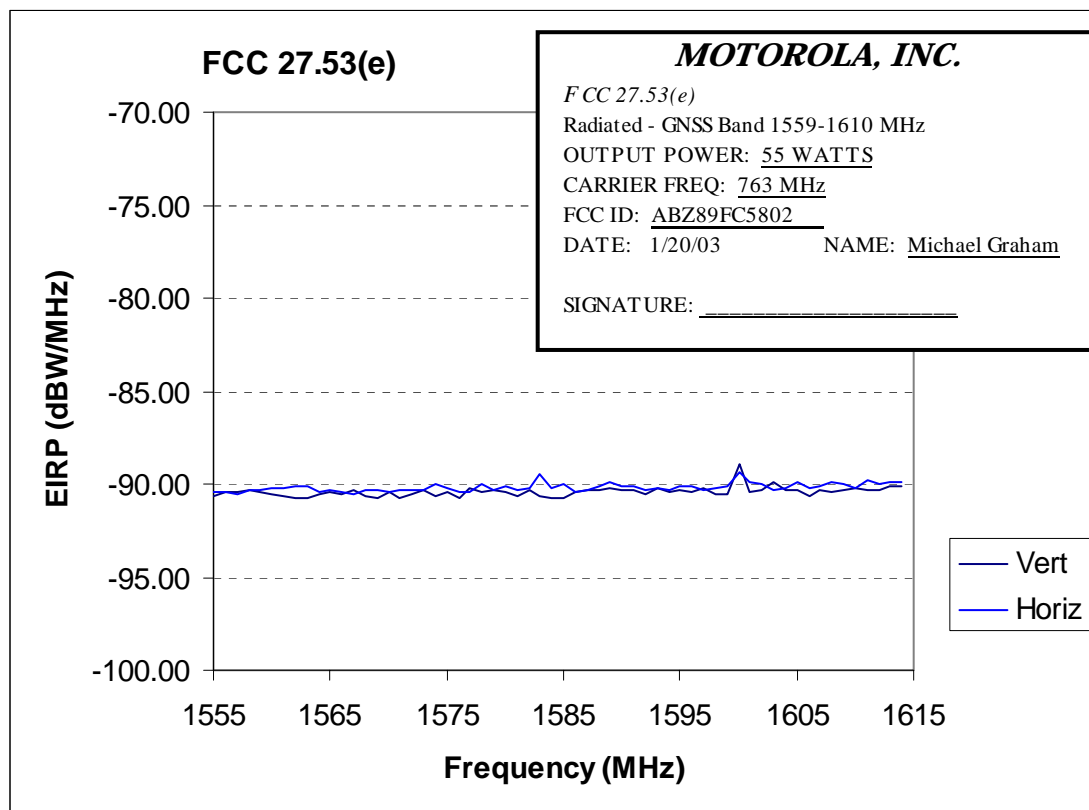

TEST EQUIPMENT LIST

MODEL	MANUFACTURER	DESCRIPTION	Eqmt ID No.	Last Cal	Next Cal
E4419B	Hewlett Packard	RF Power Meter	120423	12/05/01	12/05/02
E9301A	Hewlett Packard	RF Power Sensor	120422	12/09/01	01/03/03
8563A	Hewlett Packard	Spectrum Analyzer	210419	05/23/02	05/39/04
8644B	Hewlett Packard	Signal Generator	212042	07/01/02	07/09/05
8593EM	Hewlett Packard	EMC Analyzer	112019	03/06/02	03/06/03
85460A	Hewlett Packard	EMI Analyzer, Filter	117028	11/28/01	11/28/02
85462A	Hewlett Packard	EMI Analyzer, Rcvr	117027	11/28/01	11/28/02
83006A	Hewlett Packard	RF Amps, Wideband	112251	09/05/01	09/05/02
(Various)	Weinschel, Kathrein, Bird	RF Loads	Various	no calibration required	
3020A, etc.	Narda	Directional Coupler	Various	no calibration required	