



Full

TEST REPORT

No. I16D00274-WLA

For

Client : VeryKool USA Inc

Production : Mobile Phone

Model Name : s4513

FCC ID: WA6S4513

Hardware Version: R615-MB-V2.0

Software Version: S4513_VK_Generic_Dual_SW_1.0

Issued date: 2017-02-22

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

| Report Number | Revision | Date | Memo |
|----------------|----------|------------|---------------------------------|
| I16D00274-WLAN | 00 | 2017-02-16 | Initial creation of test report |
| I16D00274-WLAN | 01 | 2017-02-22 | Second creation of test report |

CONTENTS

| | | |
|------|---|----|
| 1. | TEST LABORATORY | 5 |
| 1.1. | TESTING LOCATION | 5 |
| 1.2. | TESTING ENVIRONMENT | 5 |
| 1.3. | PROJECT DATA | 5 |
| 1.4. | SIGNATURE | 5 |
| 2. | CLIENT INFORMATION | 6 |
| 2.1. | APPLICANT INFORMATION | 6 |
| 2.2. | MANUFACTURER INFORMATION | 6 |
| 3. | EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 7 |
| 3.1. | ABOUT EUT | 7 |
| 3.2. | INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 7 |
| 3.3. | INTERNAL IDENTIFICATION OF AE USED DURING THE TEST | 7 |
| 4. | REFERENCE DOCUMENTS | 8 |
| 4.1. | REFERENCE DOCUMENTS FOR TESTING | 8 |
| 5. | SUMMARY OF TEST RESULTS | 9 |
| 5.1. | NOTES | 10 |
| 5.2. | STATEMENTS | 10 |
| 6. | TEST RESULT | 11 |
| 6.1. | MAXIMUM OUTPUT POWER | 11 |
| 6.2. | PEAK POWER SPECTRAL DENSITY | 13 |
| 6.3. | OCCUPIED 6DB BANDWIDTH | 19 |
| 6.4. | BAND EDGES COMPLIANCE | 25 |
| 6.5. | TRANSMITTER SPURIOUS EMISSION-CONDUCTED | 29 |
| 6.6. | TRANSMITTER SPURIOUS EMISSION-RADIATED | 40 |
| 6.7. | AC POWERLINE CONDUCTED EMISSION | 54 |

| | | |
|----------|---|----|
| 7. | TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS | 57 |
| 8. | TEST ENVIRONMENT | 58 |
| ANNEX A. | DEVIATIONS FROM PRESCRIBED TEST METHODS | 59 |
| ANNEX B. | ACCREDITATION CERTIFICATE | 60 |

1. Test Laboratory

1.1. Testing Location

| | |
|---------------|---|
| Company Name: | ECIT Shanghai, East China Institute of Telecommunications |
| Address: | 7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China |
| Postal Code: | 200001 |
| Telephone: | (+86)-021-63843300 |
| Fax: | (+86)-021-63843301 |


1.2. Testing Environment

| | |
|----------------------|----------|
| Normal Temperature: | 15-35℃ |
| Extreme Temperature: | -10/+55℃ |
| Relative Humidity: | 20-75% |


1.3. Project data

| | |
|---------------------|------------|
| Project Leader: | Xu Yuting |
| Testing Start Date: | 2016-12-26 |
| Testing End Date: | 2017-02-22 |

1.4. Signature



Zhang Shiyu
(Prepared this test report)



Ding Li
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: VeryKool USA Inc
Address: 3636 Nobel Drive, Suite 325, San Diego, CA92122 USA
Telephone: +1-858-373-1635
Postcode: CA92122

2.2. Manufacturer Information

Company Name: Fortune Ship
Address: 6/F, Kanghesheng Building, No.1 Chuangsheng Road,
Nanshan District, Shenzhen, Guangdong, China
Telephone: 0755-26397320
Postcode: 518055

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|-------------------------|---------------------------------|
| EUT Description | Mobile Phone |
| Model name | s4513 |
| WLAN Frequency | 2412MHz-2462MHz |
| WLAN Channel | Channel1-Channel11 |
| WLAN type of modulation | 802.11b:DSSS 802.11g/n: OFDM |
| Extreme Temperature | -10/+55℃ |
| Nominal Voltage | 3.8V |
| Extreme High Voltage | 4.2V |
| Extreme Low Voltage | 3.4V |

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version | Date of receipt |
|---------|---------------------|--------------|----------------------------------|-----------------|
| N01 | 352139069715 266 | R615-MB-V2.0 | S4513_VK_Generi c_Dual_SW_1.0 | 2016-12-26 |
| N08 | 867400020316 612 | R615-MB-V2.0 | S4513_VK_Generi c_Dual_SW_1.0 | 2016-12-26 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

| AE ID* | Description | SN |
|--------|-------------|-----|
| AE1 | RF cable | --- |
| AE2 | --- | --- |

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------|---|---------------------|
| FCC Part15 | FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz. | Jun,2016 Edition |
| ANSI 63.10 | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz | 2013 |

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

| Measurement Items | Sub-clause of Part15C | Sub-clause of IC | Verdict |
|---|-----------------------|------------------|---------|
| Maximum Peak Output Power | 15.247(a) | / | P |
| Peak Power Spectral Density | 15.247(e) | / | P |
| Occupied 6dB Bandwidth | 15.247(d) | / | P |
| Band Edges Compliance | 15.247(b) | / | P |
| Transmitter Spurious Emission-Conducted | 15.247 | / | P |
| Transmitter Spurious Emission-Radiated | 15.247,15.209, | / | P |
| AC Powerline Conducted Emission | 15.107,15.207 | / | P |

Please refer to part 5 for detail.

The measurements are according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

| | |
|----|--|
| P | Pass, the EUT complies with the essential requirements in the standard. |
| NP | Not Perform, the test was not performed by ECIT. |
| NA | Not Applicable, the test was not applicable. |
| F | Fail, the EUT does not comply with the essential requirements in the standard. |

Test Conditions

| | |
|------|--------------------|
| Tnom | Normal temperature |
| Tmin | Low Temperature |
| Tmax | High Temperature |
| Vnom | Normal Voltage |
| Vmin | Low Voltage |
| Vmax | High Voltage |
| Hnom | Norm Humidity |
| Anom | Norm Air Pressure |

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

| | | |
|--------------|------|---------|
| Temperature | Tnom | 22℃ |
| Voltage | Vnom | 3.7V |
| Humidity | Hnom | 32% |
| Air Pressure | Anom | 1010hPa |

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

5.2. Statements

The product name s4513, supporting GSM/GPRS /WCDMA/HSDPA/HSUPA/WLAN/BT, manufactured by Fortune Ship is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Maximum Output Power

6.1.1 Measurement Limit and method:

| Standard | Limit(dBm) |
|-------------------|------------|
| FCC CRF 15.247(b) | < 30 |

6.1.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW \geq OBW, VBW \geq 3RBW.
4. Detector : Peak.
5. Trace mode: Max Hold

6.1.3 Measurement Uncertainty:

| | |
|-------------------------|--------|
| Measurement Uncertainty | 0.75dB |
|-------------------------|--------|

6.1.4 Maximum Peak Output Power-conducted

Measurement Results:

802.11b/g mode

| Mode | Data Rate(Mbps) | Teat Result(dBm) | | |
|---------|-----------------|------------------|--------------|---------------|
| | | 2412MHz(Ch1) | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11b | 1 | 14.87 | 14.99 | 14.92 |
| | 2 | 15.06 | 14.73 | 14.57 |
| | 5.5 | 15.99 | 15.60 | 15.66 |
| | 11 | 15.81 | 15.49 | 15.49 |
| 802.11g | 6 | 15.06 | 14.67 | 14.46 |
| | 9 | 15.20 | 14.64 | 14.62 |
| | 12 | 14.86 | 14.73 | 14.74 |
| | 18 | 14.99 | 14.74 | 14.70 |

| | | | | |
|--|----|-------|-------|-------|
| | 24 | 15.25 | 14.71 | 14.67 |
| | 36 | 15.08 | 14.43 | 14.79 |
| | 48 | 15.18 | 14.78 | 14.59 |
| | 54 | 15.26 | 14.58 | 14.81 |

The data rate 5.5Mbps and 54Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n mode

| Mode | Data Rate(Index) | Teat Result(dBm) | | |
|----------------|------------------|------------------|--------------|---------------|
| | | 2412MHz(Ch1) | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11n(20MHz) | MCS0 | 14.03 | 13.47 | 13.38 |
| | MCS1 | 13.85 | 13.15 | 13.57 |
| | MCS2 | 13.74 | 13.28 | 13.37 |
| | MCS3 | 13.80 | 13.31 | 13.28 |
| | MCS4 | 13.68 | 13.35 | 13.40 |
| | MCS5 | 13.60 | 13.30 | 13.18 |
| | MCS6 | 13.37 | 13.93 | 13.06 |
| | MCS7 | 13.14 | 14.01 | 13.77 |
| 802.11n(40MHz) | MCS0 | / | / | / |
| | MCS1 | / | / | / |
| | MCS2 | / | / | / |
| | MCS3 | / | / | / |
| | MCS4 | / | / | / |
| | MCS5 | / | / | / |
| | MCS6 | / | / | / |
| | MCS7 | / | / | / |

The data rate MCS0 is selected as worse condition, and the following case are performed with this condition.

6.1.5 Maximum Average Output Power-conducted**802.11b/g mode**

| Mode | Test Result(dBm) | | |
|---------|------------------|--------------|---------------|
| | 2412MHz(Ch1) | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11b | 9.62 | 9.15 | 9.13 |
| 802.11g | 7.46 | 7.22 | 7.10 |

802.11n mode

| Mode | Test Result(dBm) | | |
|----------------|------------------|--------------|---------------|
| | 2412MHz(Ch1) | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11n(20MHz) | 4.14 | 3.64 | 3.72 |
| 802.11n(40MHz) | / | / | / |

Conclusion: PASS**6.2. Peak Power Spectral Density****6.2.1 Measurement Limit:**

| Standard | Limit |
|------------------------|--------------|
| FCC CFR Part 15.247(e) | < 8dBm/3 KHz |

6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the

RBW.

12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.2.3 Measurement Uncertainty:

| | |
|-------------------------|--------|
| Measurement Uncertainty | 0.75dB |
|-------------------------|--------|


6.2.4 Measurement Results:
802.11b/g mode

| Mode | Channel | Power Spectral Density(dBm/3kHz) | | Conclusion |
|---------|---------|----------------------------------|---------|------------|
| 802.11b | 1 | Fig.1 | -12.849 | P |
| | 6 | Fig.2 | -13.751 | P |
| | 11 | Fig.3 | -13.774 | P |
| 802.11g | 1 | Fig.4 | -13.302 | P |
| | 6 | Fig.5 | -13.442 | P |
| | 11 | Fig.6 | -15.343 | P |

802.11n mode


| Mode | Channel | Power Spectral Density(dBm/3kHz) | | Conclusion |
|----------------|---------|----------------------------------|---------|------------|
| 802.11n(20MHz) | 1 | Fig.7 | -14.921 | P |
| | 6 | Fig.8 | -14.266 | P |
| | 11 | Fig.9 | -15.293 | P |
| 802.11g(40MHz) | 1 | / | / | / |
| | 6 | / | / | / |
| | 11 | / | / | / |

Conclusion: PASS
Test graphs as below:

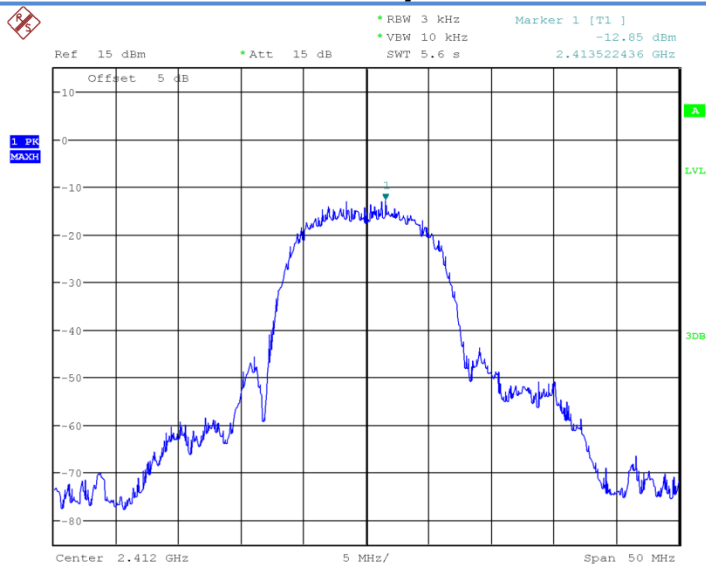


Date: 7.FEB.2017 13:46:55

Fig.1 Power Spectral Density (802.1b,Ch1)

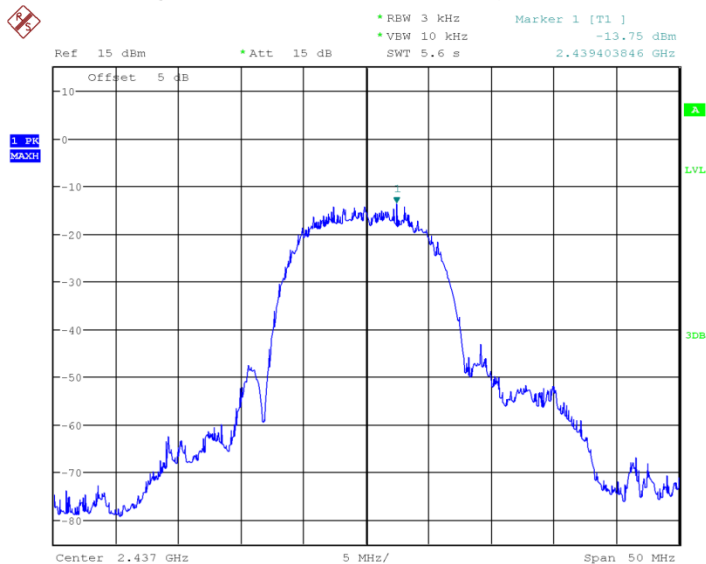


Date: 7.FEB.2017 13:51:59

Fig.2 Power Spectral Density (802.1b,Ch6)

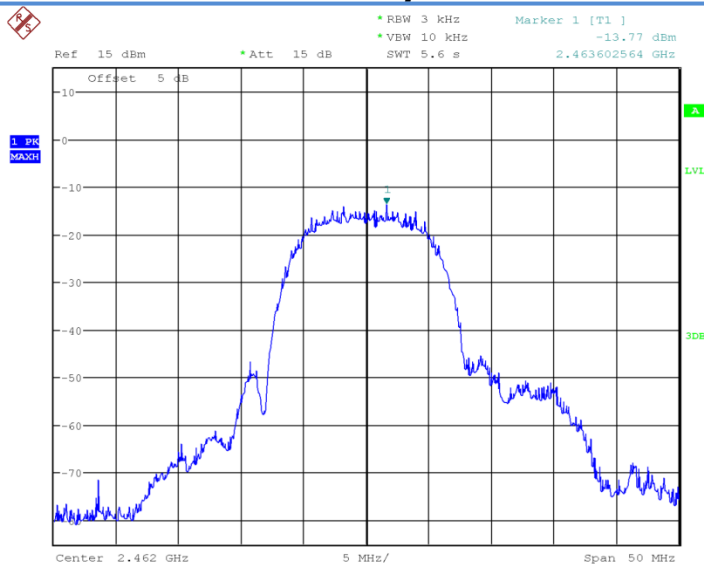


Date: 7.FEB.2017 13:52:38

Fig.3 Power Spectral Density (802.1b,Ch11)

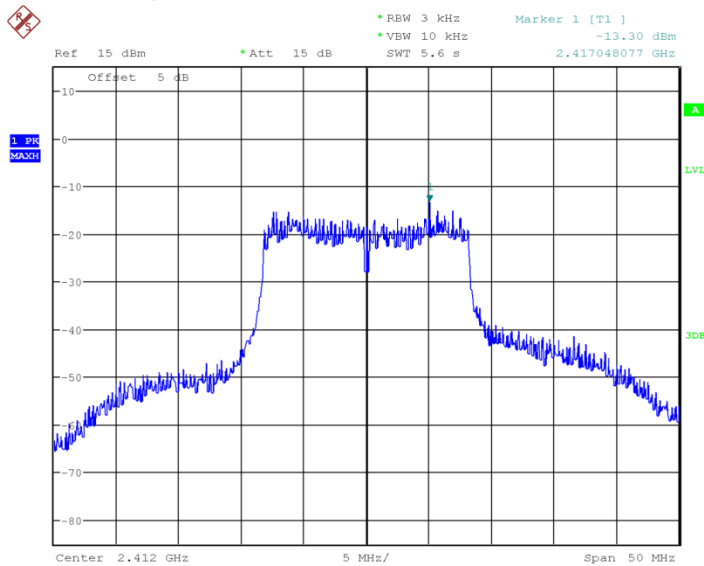


Date: 7.FEB.2017 13:54:33

Fig.4 Power Spectral Density (802.1g,Ch1)

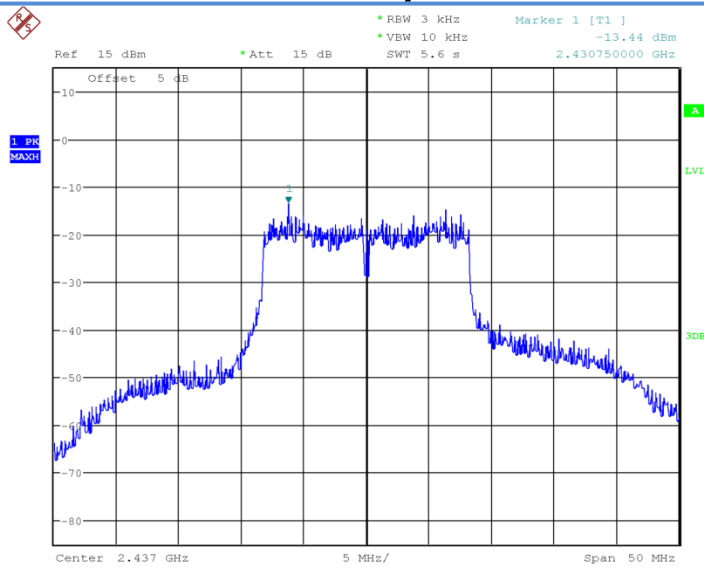


Date: 7.FEB.2017 13:55:52

Fig.5 Power Spectral Density (802.1g,Ch6)

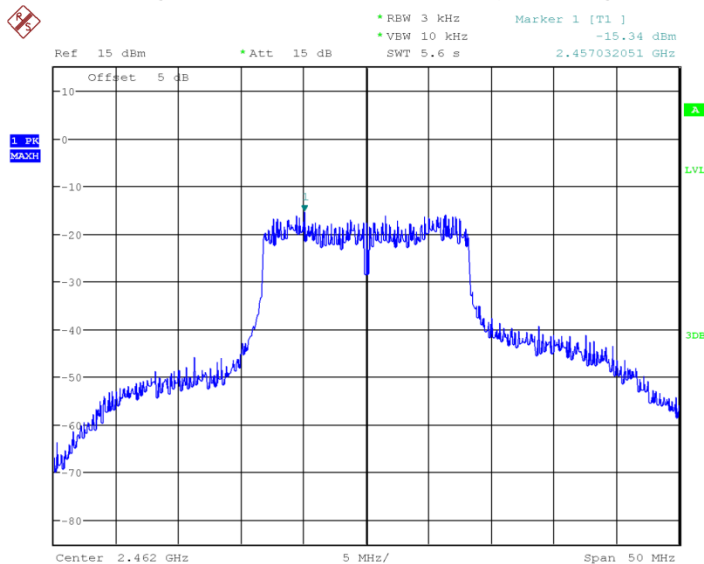


Date: 7.FEB.2017 13:56:55

Fig.6 Power Spectral Density (802.1g,Ch11)

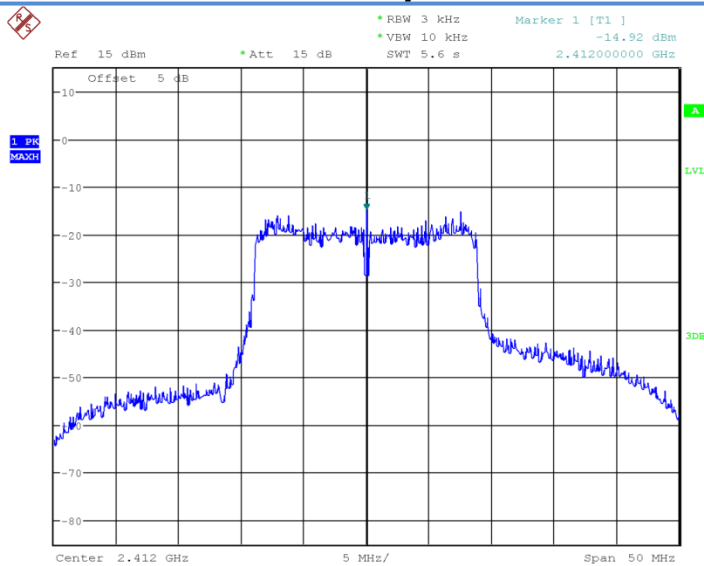


Date: 7.FEB.2017 13:58:43

Fig.7 Power Spectral Density (802.1n-20MHz,Ch1)

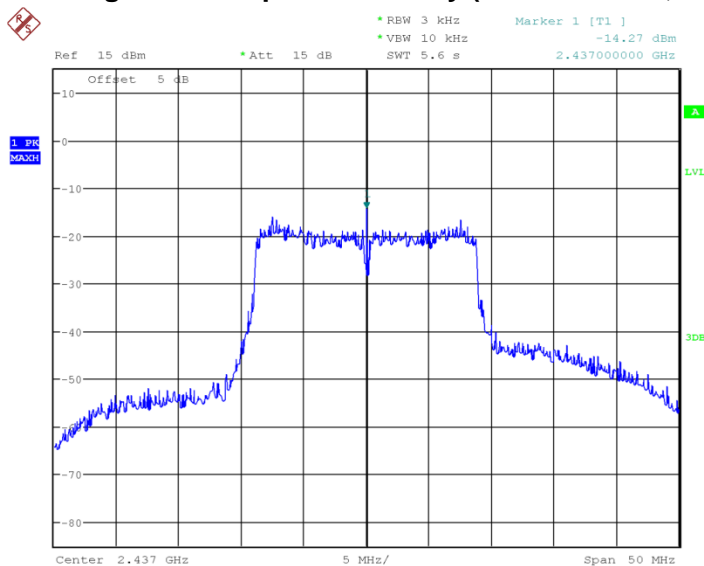

Date: 7.FEB.2017 13:59:59

Fig.8 Power Spectral Density (802.1n-20MHz,Ch6)

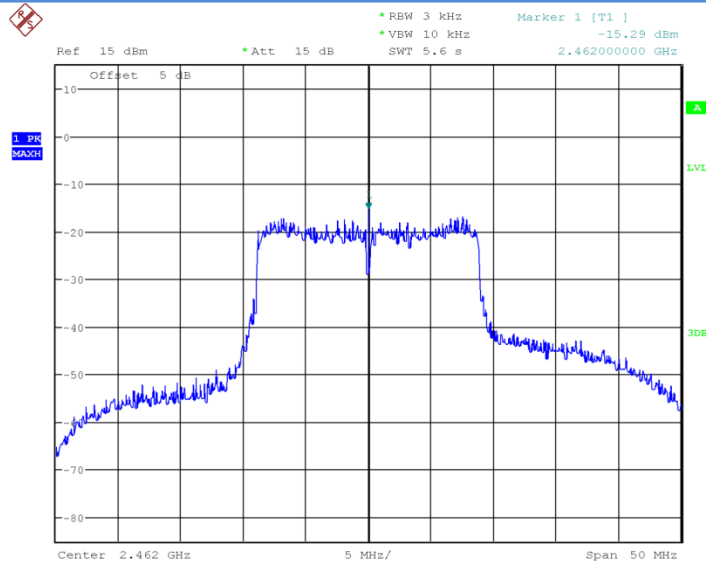

Date: 7.FEB.2017 14:00:40

Fig.9 Power Spectral Density (802.11n-20MHz,Ch11)

6.3. Occupied 6dB Bandwidth

6.3.1 Measurement Limit:

| Standard | Limit(KHz) |
|---------------------------|------------|
| FCC 47 CFR Part 15.247(a) | ≥500 |

6.3.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4 Measurement Uncertainty:

| | |
|-------------------------|---------|
| Measurement Uncertainty | 60.80Hz |
|-------------------------|---------|

6.3.5 Measurement Result:

802.11b/g mode


| Mode | Channel | Occupied 6dB Bandwidth(KHz) | | Conclusion |
|---------|---------|-----------------------------|--------|------------|
| 802.11b | 1 | Fig.10 | 10.577 | P |
| | 6 | Fig.11 | 10.256 | P |
| | 11 | Fig.12 | 10.657 | P |
| 802.11g | 1 | Fig.13 | 16.186 | P |
| | 6 | Fig.14 | 16.106 | P |
| | 11 | Fig.15 | 16.106 | P |

802.11n mode

| Mode | Channel | Occupied 6dB Bandwidth(KHz) | | Conclusion |
|----------------|---------|-----------------------------|--------|------------|
| 802.11n(20MHz) | 1 | Fig.16 | 16.987 | P |
| | 6 | Fig.17 | 17.067 | P |
| | 11 | Fig.18 | 16.987 | P |
| 802.11n(40MHz) | 1 | / | / | / |
| | 6 | / | / | / |
| | 11 | / | / | / |


Conclusion: PASS

Test graphs as below:

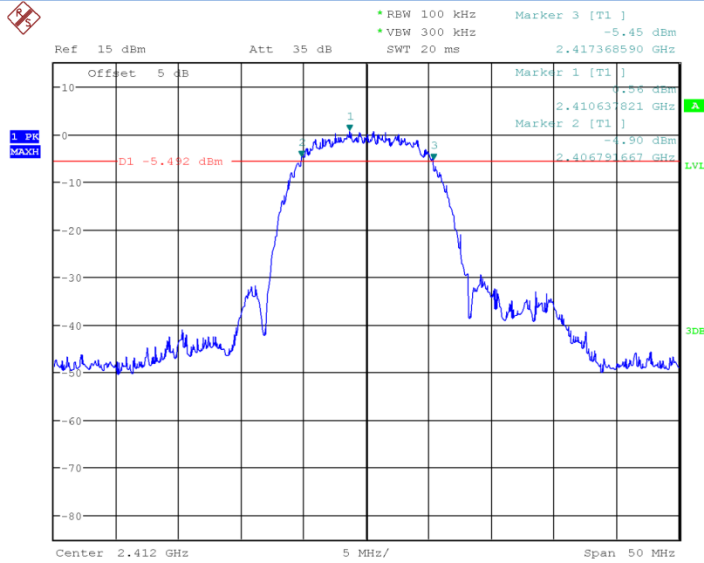


Date: 7.FEB.2017 15:12:09

Fig.10 Occupied 6dB Bandwidth (802.11b, Ch1)

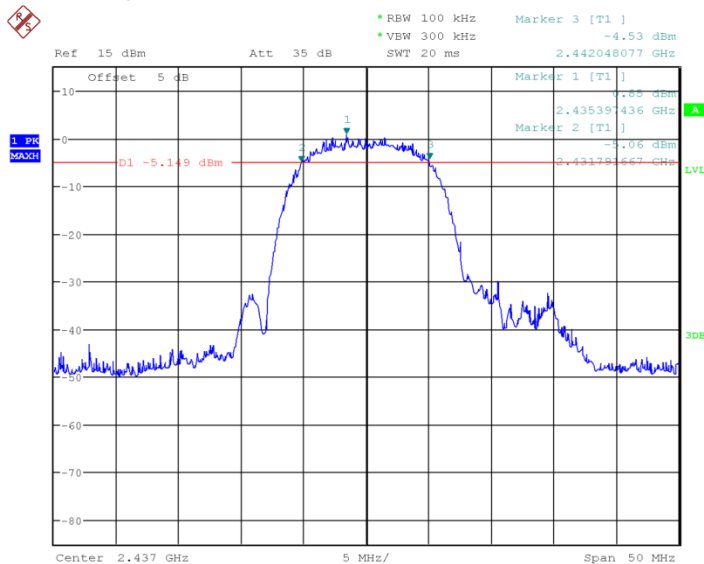


Date: 7.FEB.2017 15:12:39

Fig.11 Occupied 6dB Bandwidth (802.11b, Ch6)

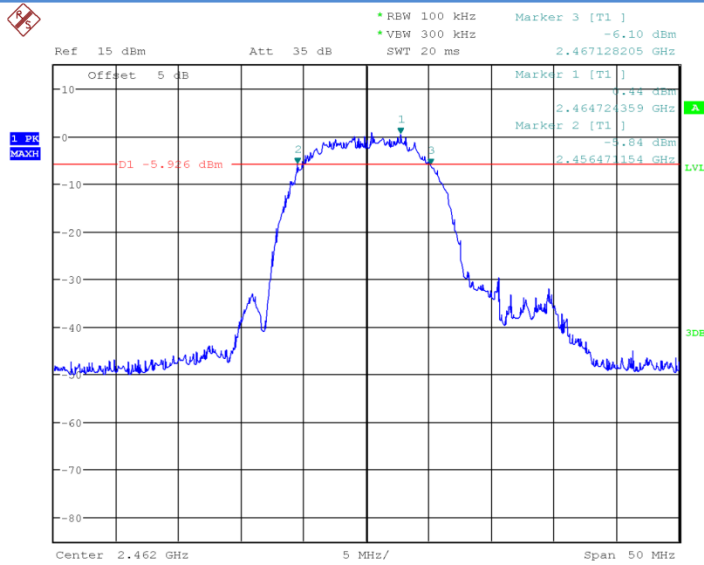


Date: 7.FEB.2017 15:14:13

Fig.12 Occupied 6dB Bandwidth (802.11b, Ch11)

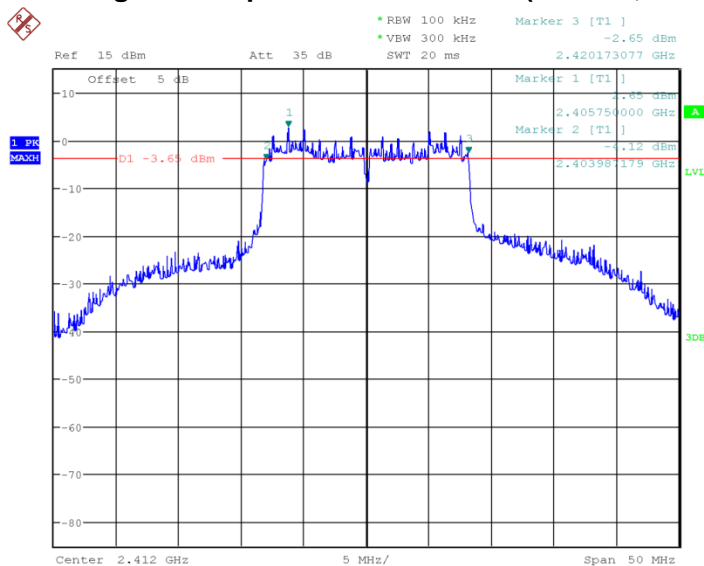


Date: 7.FEB.2017 15:15:12

Fig.13 Occupied 6dB Bandwidth (802.11g, Ch1)

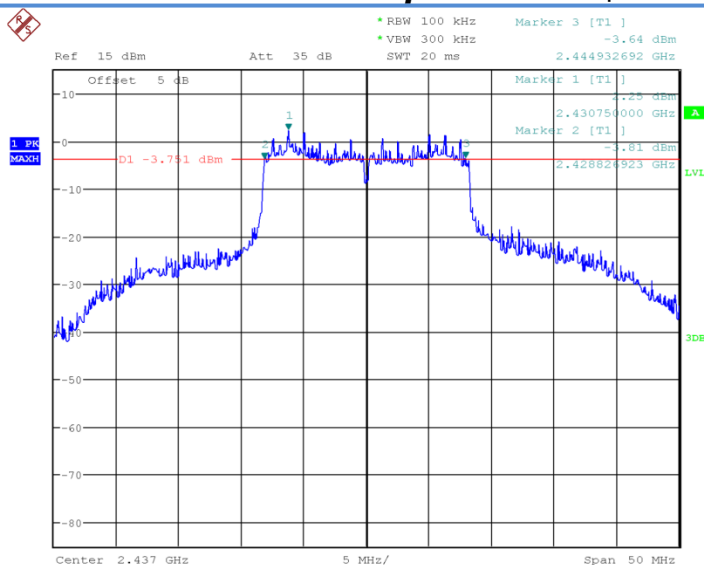


Date: 7.FEB.2017 15:16:04

Fig.14 Occupied 6dB Bandwidth (802.11g, Ch6)

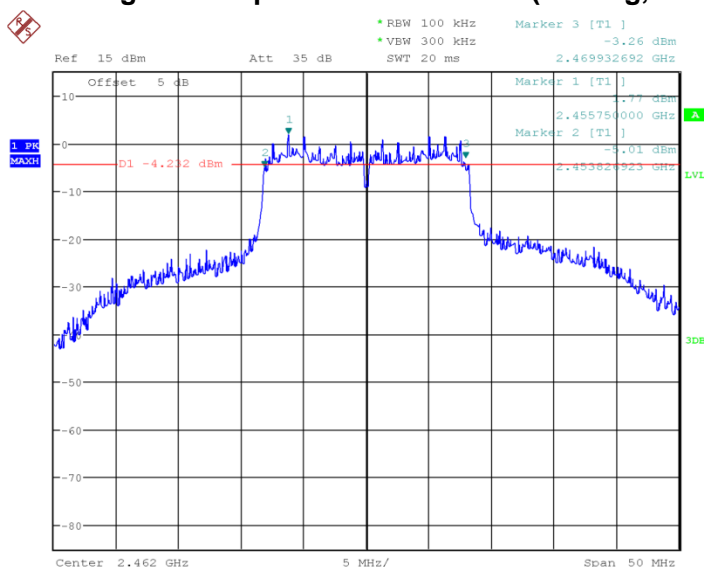


Date: 7.FEB.2017 15:16:44

Fig.15 Occupied 6dB Bandwidth (802.11g, Ch11)

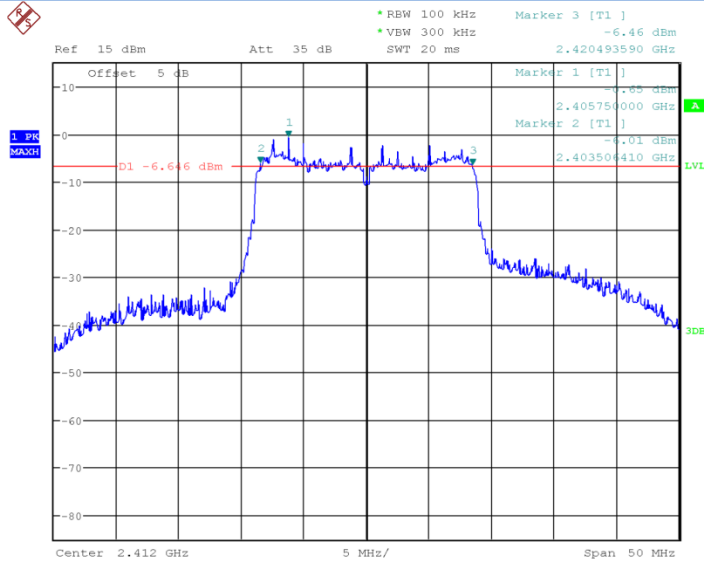


Date: 7.FEB.2017 15:17:29

Fig.16 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)

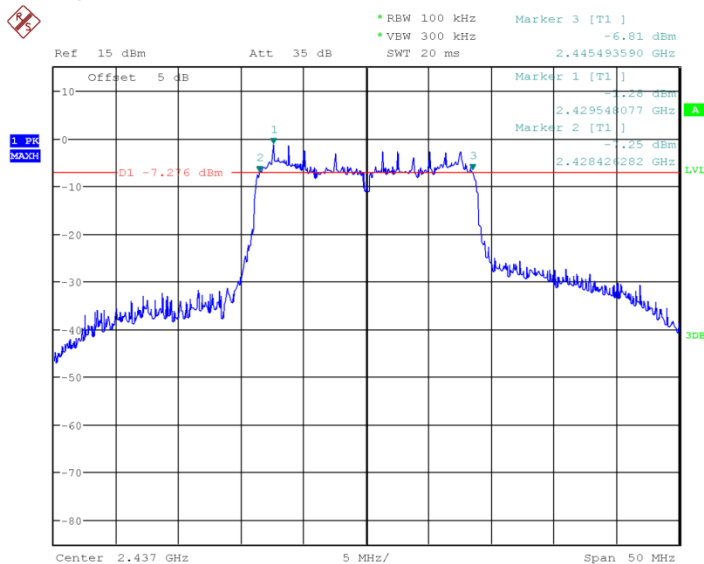

Date: 7.FEB.2017 15:17:53

Fig.17 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)

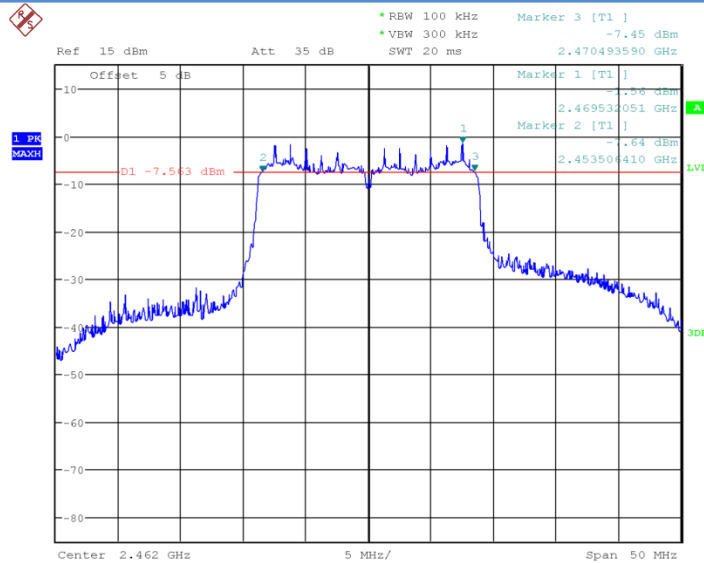

Date: 7.FEB.2017 15:18:18

Fig.18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)

6.4. Band Edges Compliance

6.4.1 Measurement Limit:

| Standard | Limited(dBc) |
|---------------------------|--------------|
| FCC 47 CFR Part 15.247(d) | >20 |

6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. $VBW \geq [3 \times RBW]$.
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

6.4.3 Measurement Uncertainty:

| | |
|-------------------------|--------|
| Measurement Uncertainty | 0.75dB |
|-------------------------|--------|

6.4.4 Measurement results

802.11b/g mode


| Mode | Channel | Test Results | Conclusion |
|---------|---------|--------------|------------|
| 802.11b | 1 | Fig.19 | P |
| | 11 | Fig.20 | P |
| 802.11g | 1 | Fig.21 | P |
| | 11 | Fig.22 | P |

802.11n mode

| Mode | Channel | Test Results | Conclusion |
|----------------|---------|--------------|------------|
| 802.11n(20MHz) | 1 | Fig.23 | P |
| | 11 | Fig.24 | P |
| 802.11(40MHz) | / | / | / |
| | / | / | / |


Conclusion: PASS

Test graphs as blew:

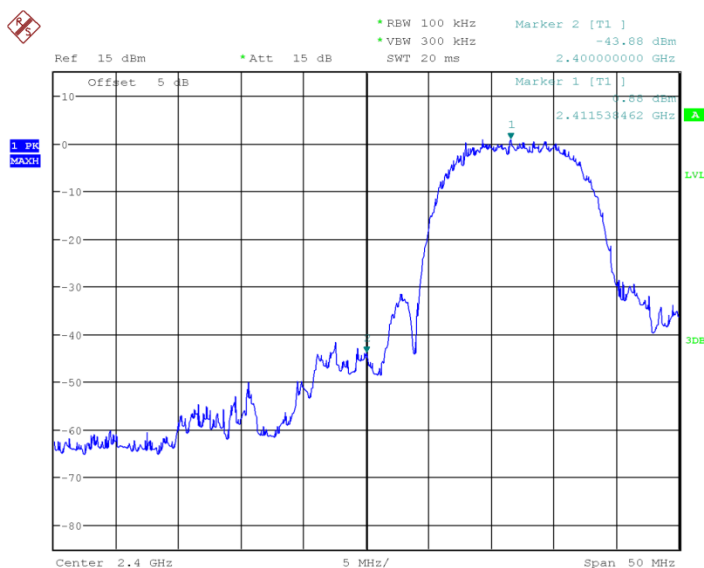


Date: 7.FEB.2017 14:45:25

Fig.19 Band Edges (802.11b, Ch1)

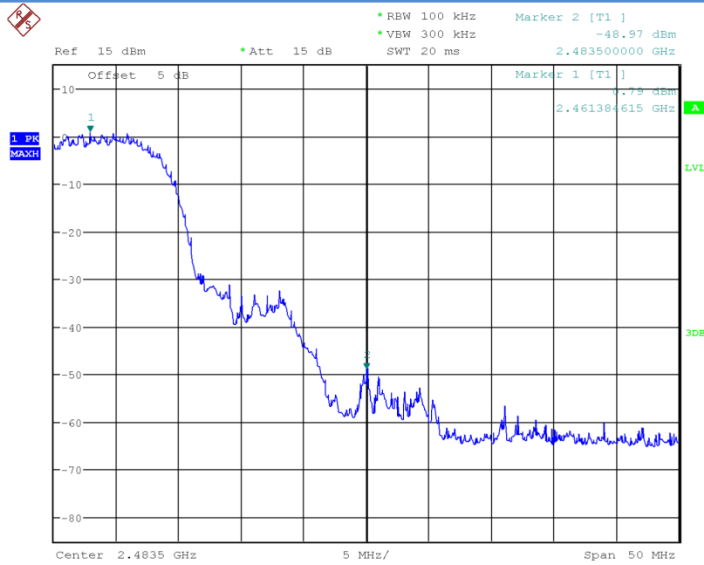


Date: 7.FEB.2017 14:45:51

Fig.20 Band Edges (802.11b, Ch11)

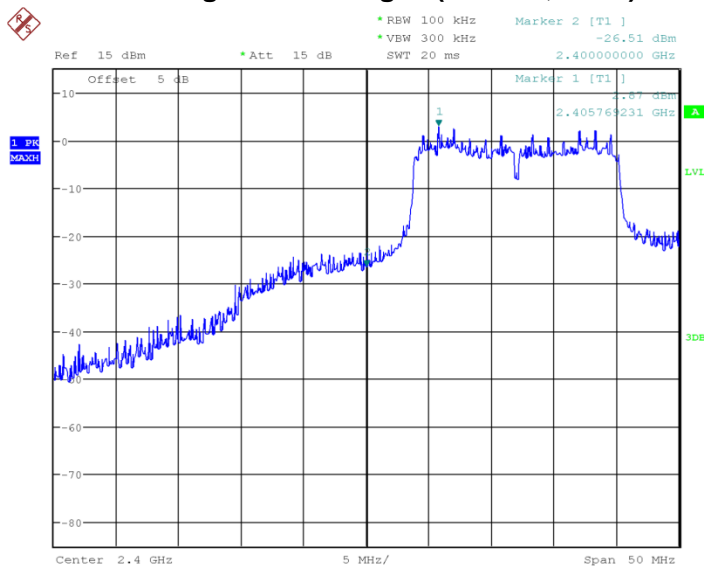


Date: 7.FEB.2017 14:46:26

Fig.21 Band Edges (802.11g, Ch1)

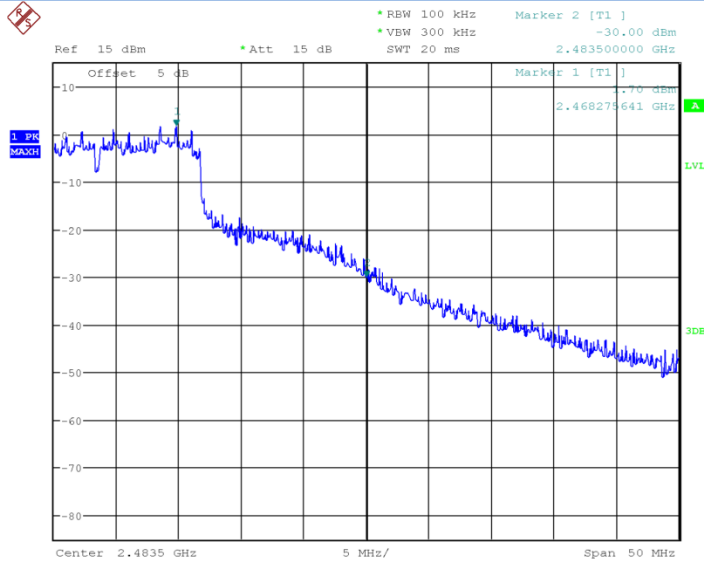


Date: 7.FEB.2017 14:46:51

Fig.22 Band Edges (802.11g, Ch11)

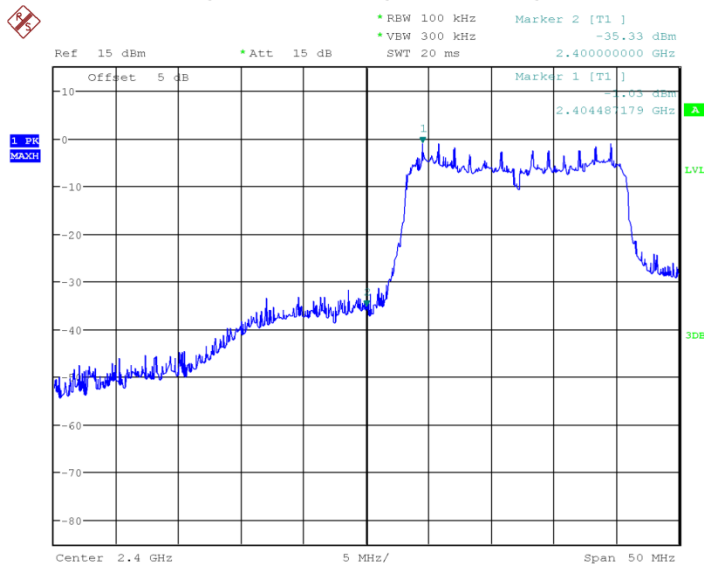

Date: 7.FEB.2017 14:50:08

Fig.23 Band Edges (802.11n-20MHz, Ch1)

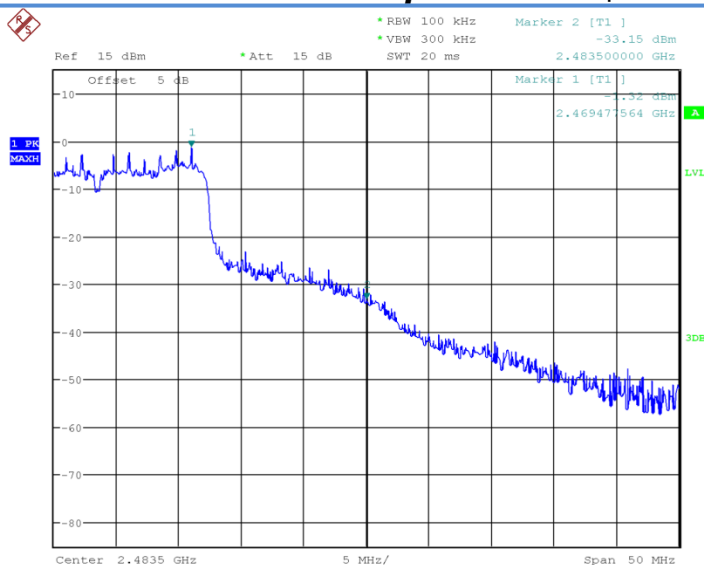

Date: 7.FEB.2017 14:50:36

Fig.24 Band Edges (802.11b-20MHz, Ch11)

6.5. Transmitter Spurious Emission-conducted

6.5.1 Measurement Limit:

| Standard | Limit |
|---------------------------|--|
| FCC 47 CFR Part 15.247(d) | 20dB below peak output power in 100KHz bandwidth |

6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.

13. Set the RBW = 100 kHz.
14. Set the VBW $\geq [3 \times \text{RBW}]$.
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

6.5.3 Measurement Uncertainty:

| Frequency Range | Uncertainty |
|---|-------------|
| $30\text{MHz} \leq f \leq 2\text{GHz}$ | 0.63 |
| $2\text{GHz} \leq f \leq 3.6\text{GHz}$ | 0.82 |
| $3.6\text{GHz} \leq f \leq 8\text{GHz}$ | 1.55 |
| $8\text{GHz} \leq f \leq 20\text{GHz}$ | 1.86 |
| $20\text{GHz} \leq f \leq 22\text{GHz}$ | 1.90 |
| $22\text{GHz} \leq f \leq 26\text{GHz}$ | 2.20 |

6.5.4 Measurement Result:

802.11b/g mode


| Mode | Channel | Frequency Range | Test Results | Conclusion |
|---------|---------|-----------------|--------------|------------|
| 802.11b | 1 | 2.412GHz | Fig.25 | P |
| | | 30MHz~26GHz | Fig.26 | P |
| | 6 | 2.437GHz | Fig.27 | P |
| | | 30MHz~26GHz | Fig.28 | P |
| | 11 | 2.462GHz | Fig.29 | P |
| | | 30MHz~26GHz | Fig.30 | P |
| 802.11g | 1 | 2.412GHz | Fig.31 | P |
| | | 30MHz~26GHz | Fig.32 | P |
| | 6 | 2.437GHz | Fig.33 | P |
| | | 30MHz~26GHz | Fig.34 | P |
| | 11 | 2.462GHz | Fig.35 | P |
| | | 30MHz~26GHz | Fig.36 | P |

802.11n mode

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|----------------|---------|-----------------|--------------|------------|
| 802.11n(20MHz) | 1 | 2.412GHz | Fig.37 | P |
| | | 30MHz~26GHz | Fig.38 | P |
| | 6 | 2.437GHz | Fig.39 | P |
| | | 30MHz~26GHz | Fig.40 | P |
| | 11 | 2.462GHz | | P |
| | | 30MHz~26GHz | Fig.42 | P |
| 802.11n(40MHz) | 1 | / | / | / |
| | | / | / | / |
| | 6 | / | / | / |
| | | / | / | / |
| | 11 | / | / | / |
| | | / | / | / |


Conclusion: PASS

Test graphs as below:

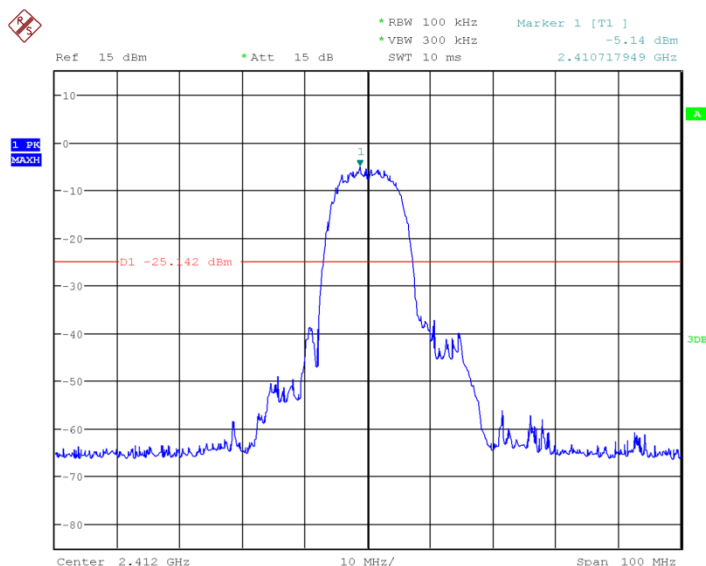


Date: 22.FEB.2017 12:36:02

Fig.25 Conducted Spurious Emission (802.11b, Ch1)

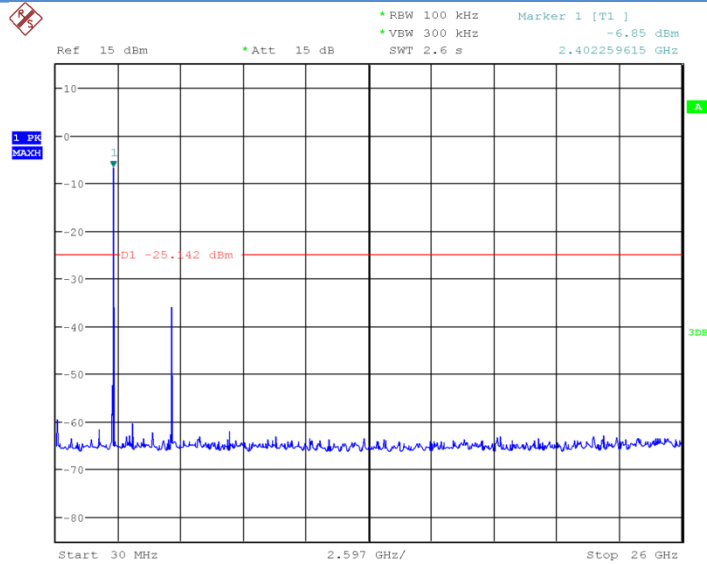


Date: 22.FEB.2017 12:36:25

Fig.26 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)

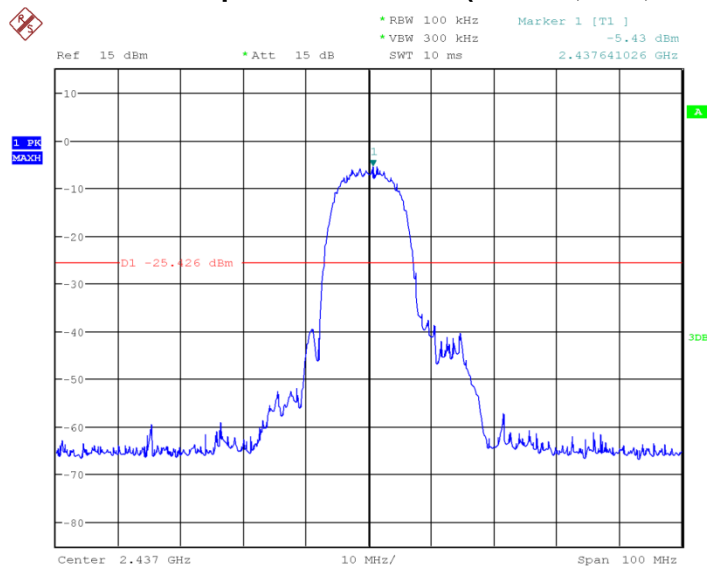


Date: 22.FEB.2017 12:36:56

Fig.27 Conducted Spurious Emission (802.11b, Ch6)

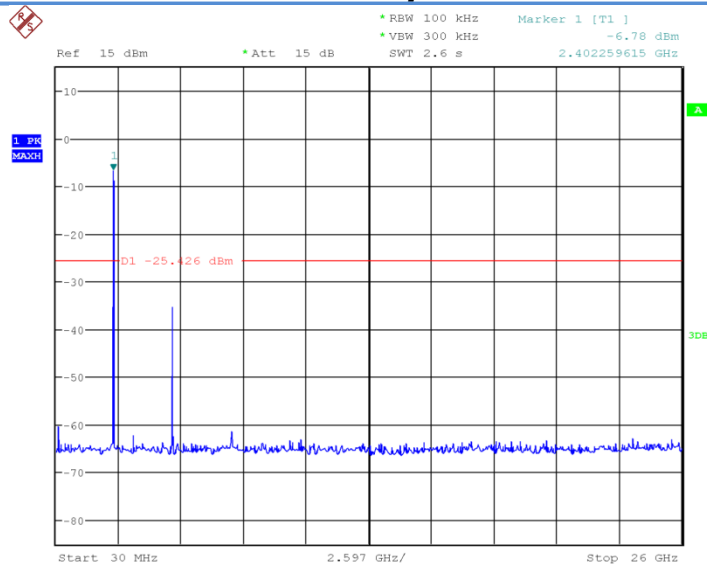


Date: 22.FEB.2017 12:37:19

Fig.28 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)

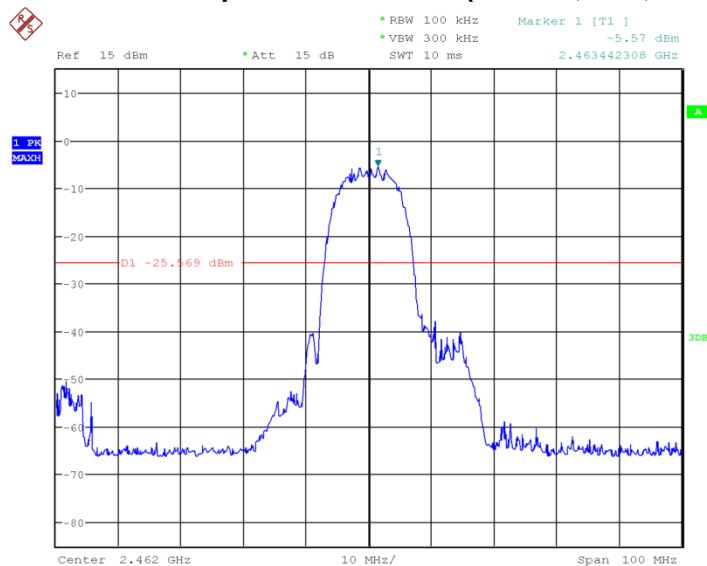


Date: 22.FEB.2017 12:38:04

Fig.29 Conducted Spurious Emission (802.11b, Ch11)

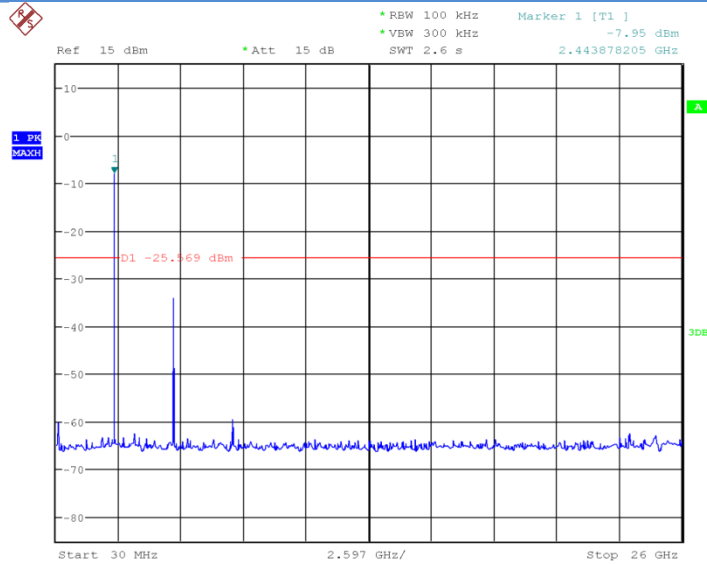


Date: 22.FEB.2017 12:38:27

Fig.30 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)

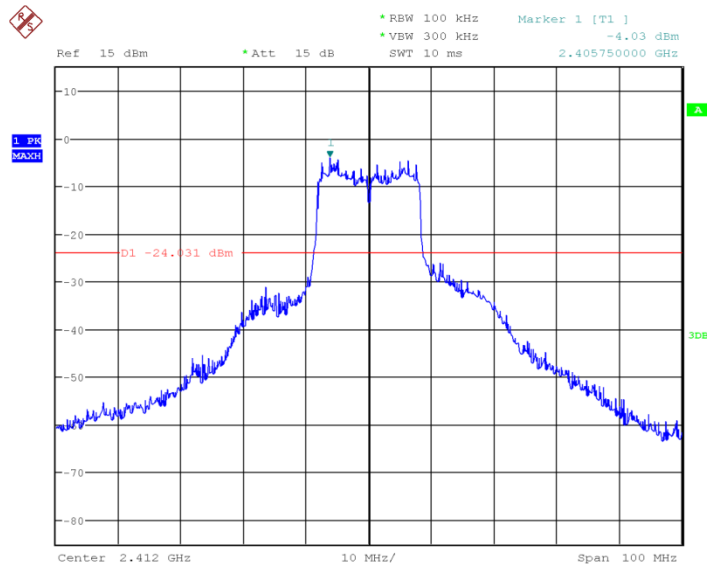


Date: 22.FEB.2017 12:39:36

Fig.31 Conducted Spurious Emission (802.11g, Ch1)

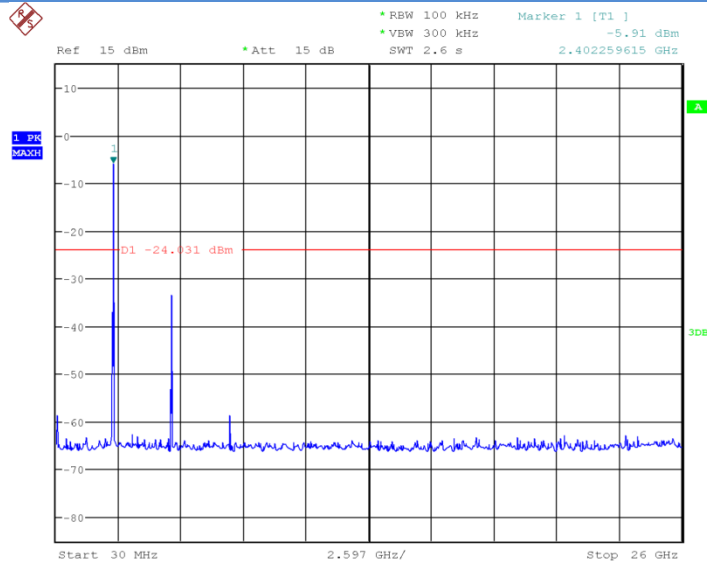


Date: 22.FEB.2017 12:40:00

Fig.32 Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)

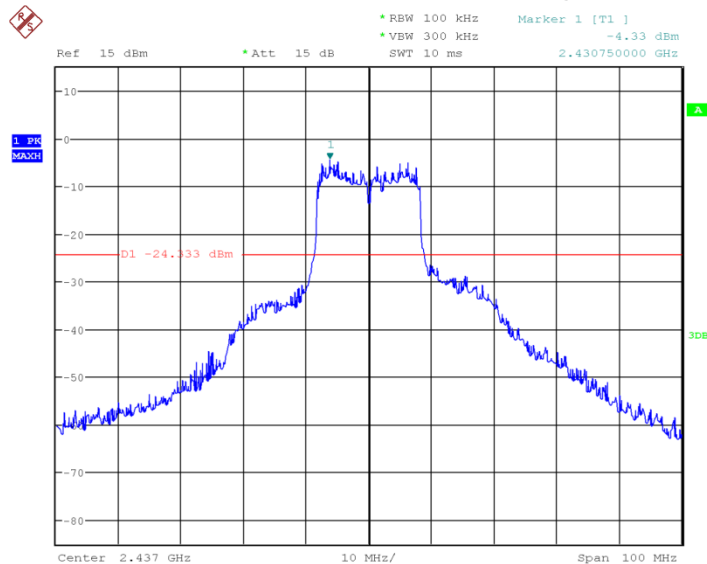


Date: 22.FEB.2017 12:40:35

Fig.33 Conducted Spurious Emission (802.11g, Ch6)

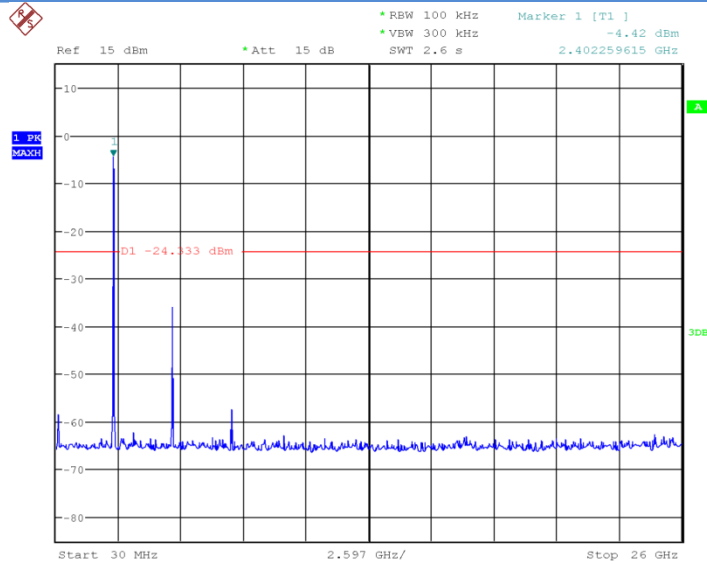


Date: 22.FEB.2017 12:40:58

Fig.34 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)

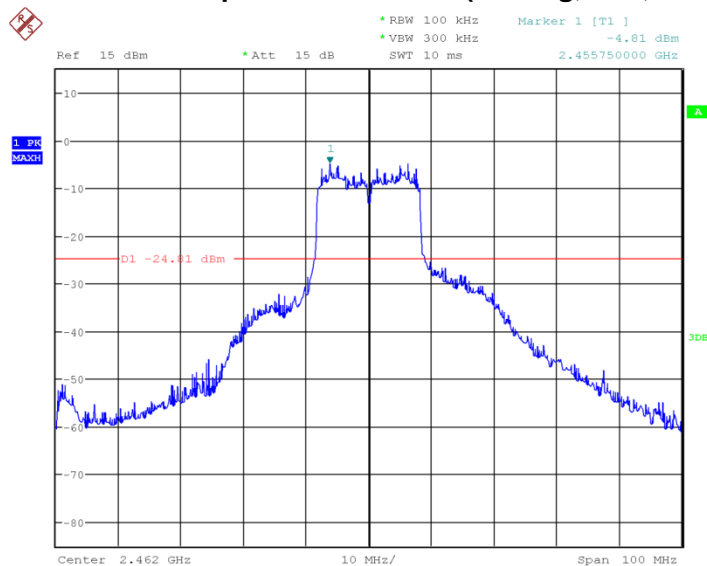


Date: 22.FEB.2017 12:41:40

Fig.35 Conducted Spurious Emission (802.11g, Ch11)

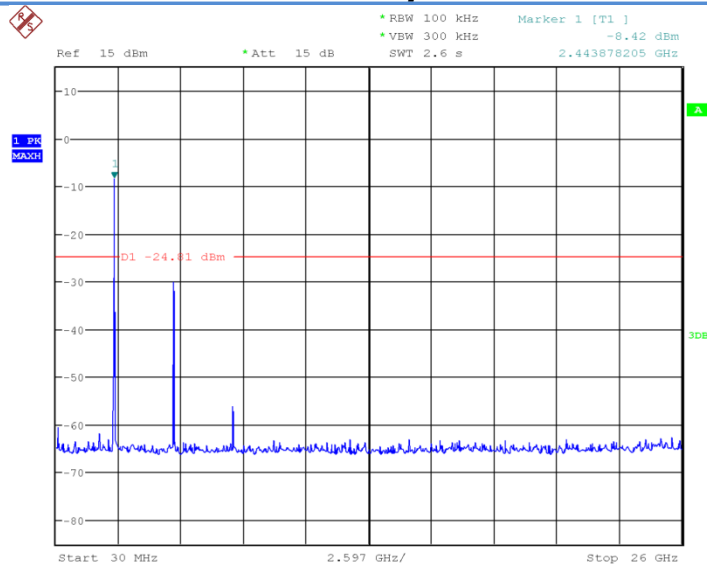


Date: 22.FEB.2017 12:42:04

Fig.36 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)

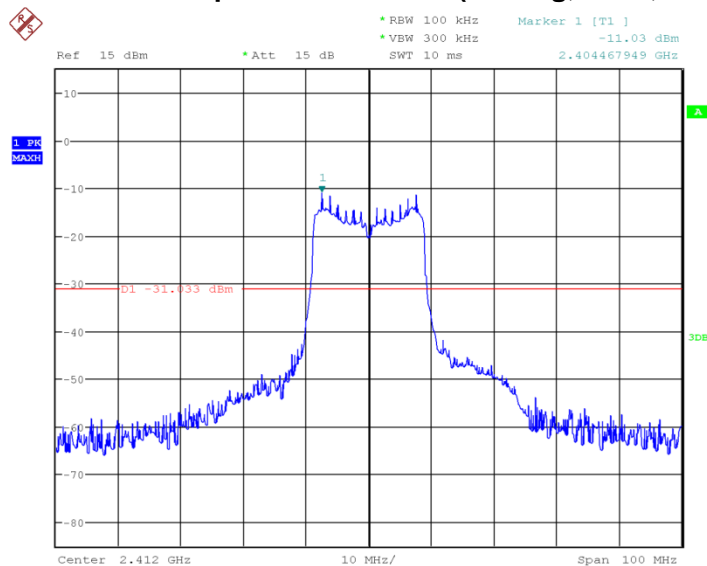


Date: 22.FEB.2017 12:42:54

Fig.37 Conducted Spurious Emission (802.11n-20MHz, Ch1)

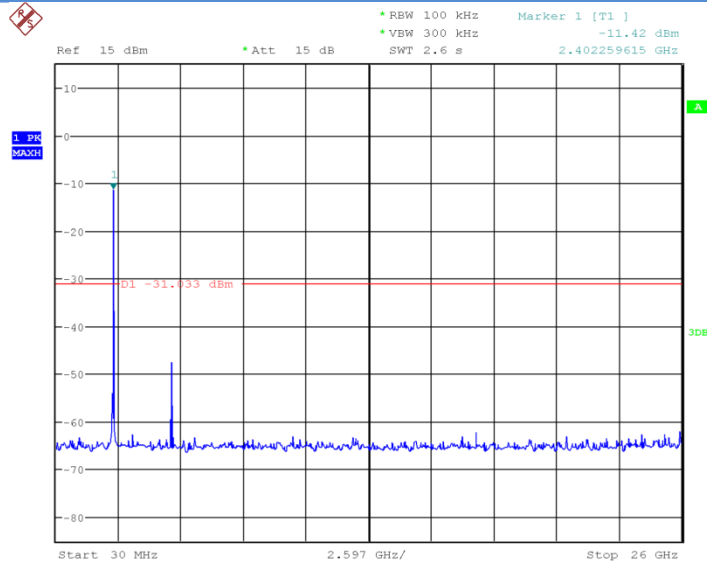


Date: 22.FEB.2017 12:43:18

Fig.38 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)

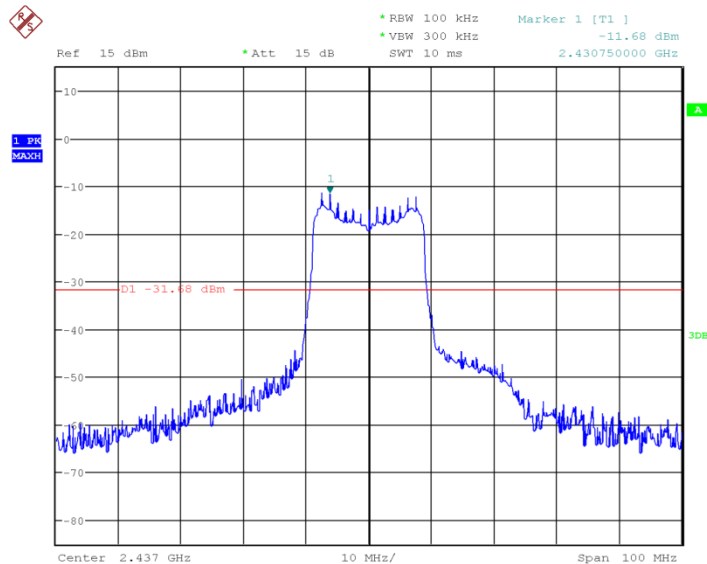


Date: 22.FEB.2017 12:44:02

Fig.39 Conducted Spurious Emission (802.11n-20MHz, Ch6)

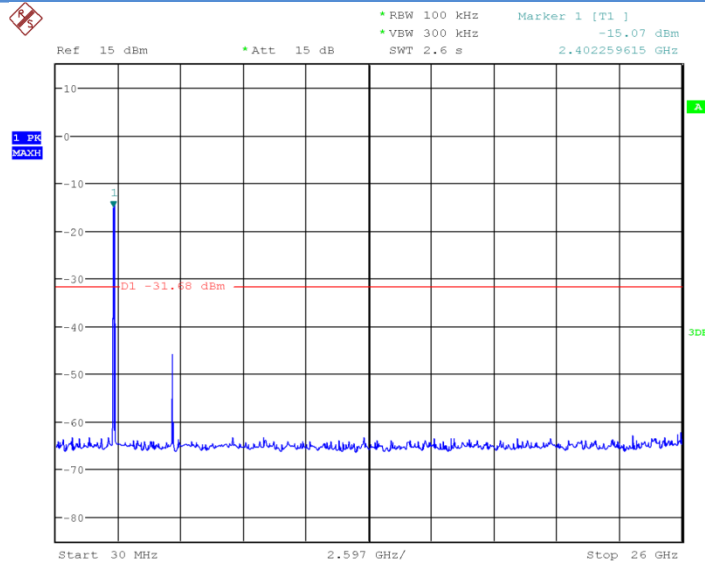


Date: 22.FEB.2017 12:44:26

Fig.40 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)

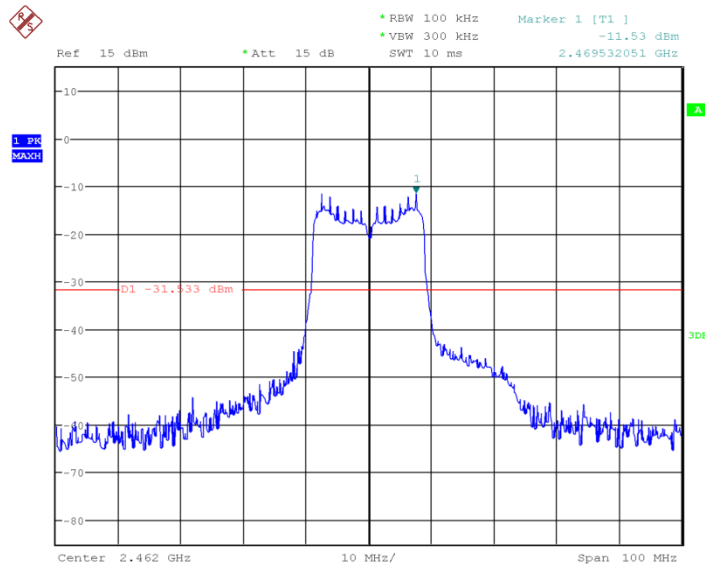

Date: 22.FEB.2017 12:44:58

Fig.41 Conducted Spurious Emission (802.11n-20MHz, Ch11)

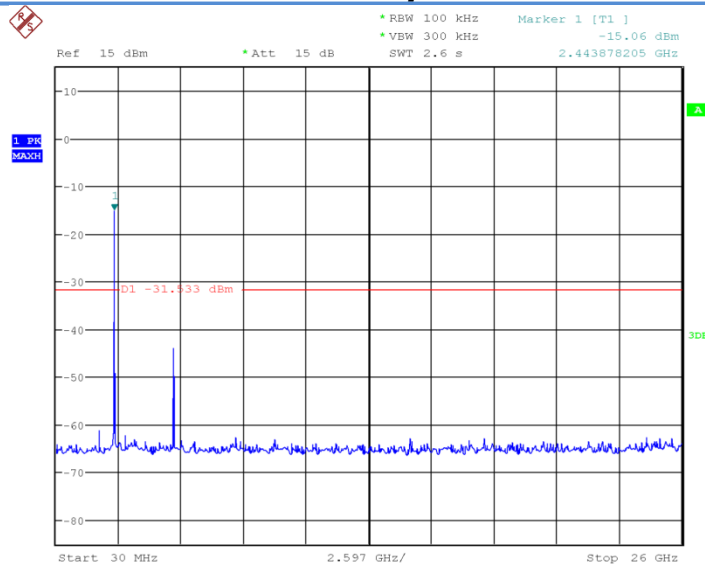

Date: 22.FEB.2017 12:45:21

Fig.42 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)

6.6. Transmitter Spurious Emission-Radiated

6.6.1 Measurement Limit:

| Standard | Limit |
|--------------------------------------|------------------------------|
| FCC 47 CFR Part 15.247,15.205,15.209 | 20dB below peak output power |

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

6.6.2 Limit in restricted band:

| Frequency of emission(MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|----------------------------|----------------------|------------------------|
| 30~88 | 100 | 40 |
| 88~216 | 150 | 43.5 |
| 216~960 | 200 | 46 |
| Above 960 | 500 | 54 |

6.6.3 Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by

the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2014 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

| Frequency of emission (MHz) | RBW/VBW | Sweep Times (s) |
|-----------------------------|---------------|-----------------|
| 30~1000 | 100KHz/300KHz | 5 |
| 1000~4000 | 1MHz/1MHz | 15 |
| 4000~18000 | 1MHz/1MHz | 40 |
| 18000~26500 | 1MHz/1MHz | 20 |

802.11b/g mode

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|---------|---------|-----------------|--------------|------------|
| 802.11b | Power | 2.38GHz~2.45GHz | Fig.44 | P |
| | Power | 2.45GHz~2.5GHz | Fig.45 | P |
| | 6 | 30MHz~1GHz | Fig.46 | P |
| | | 1GHz~3GHz | Fig.47 | P |
| | | 3GHz~18GHz | Fig.48 | P |
| 802.11g | Power | 2.38GHz~2.45GHz | Fig.49 | P |
| | Power | 2.45GHz~2.5GHz | Fig.50 | P |
| | 6 | 30MHz~1GHz | Fig.51 | P |
| | | 1GHz~3GHz | Fig.52 | P |
| | | 3GHz~18GHz | Fig.53 | P |

802.11n mode

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|----------------|--------------|-----------------|--------------|------------|
| 802.11n(20MHz) | Power | 2.38GHz~2.45GHz | Fig.54 | P |
| | Power | 2.45GHz~2.5GHz | Fig.55 | P |
| | 6 | 30MHz~1GHz | Fig.56 | P |
| | | 1GHz~3GHz | Fig.57 | P |
| | | 3GHz~18GHz | Fig.58 | P |
| / | All channels | 18GHz~26.5GHz | Fig.59 | P |

Conclusion: PASS

Note:

A "reference path loss" is established and A_{Rpi} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

AR_{pi} = Cable loss + Antenna Gain-Preamplifier gain

Result = P_{Mea} + Cable loss + Antenna Gain-Preamplifier gain = P_{Mea} + AR_{pi} .

802.11b mode

Ch6 30MHz~1GHz

| Frequency(MHz) | Result(dBuV/m) | AR _{pi} (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------------------|--------------|----------|
| 32.224408 | 7.51 | -26.9 | 34.41 | V |
| 34.384928 | 10.11 | -26.8 | 36.91 | V |
| 34.878324 | 7.7 | -26.8 | 34.5 | V |
| 36.676836 | 9.16 | -26.4 | 35.56 | V |
| 861.598104 | 20.01 | -9.1 | 29.11 | H |

Ch6 1GHz~3GHz

| Frequency(MHz) | Result(dBuV/m) | AR _{pi} (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------------------|--------------|----------|
| 2697.132885 | 52.94 | 9.5 | 43.44 | V |
| 2824.528846 | 53.25 | 10.3 | 42.95 | V |
| 2875.771346 | 53.23 | 10.8 | 42.43 | V |
| 2919.744615 | 53.5 | 10.7 | 42.8 | H |

| | | | | |
|-------------|-------|------|-------|---|
| 2956.374038 | 53.07 | 10.8 | 42.27 | V |
|-------------|-------|------|-------|---|

Ch6 3GHz~18GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 14981.76573 | 56.36 | 21.7 | 34.66 | V |
| 15517.57367 | 56.63 | 23.3 | 33.33 | V |
| 16190.22167 | 58.96 | 25.6 | 33.36 | H |
| 16798.4266 | 59.51 | 27.3 | 32.21 | H |
| 17575.163 | 62.33 | 29.5 | 32.83 | V |

802.11g

Ch6 30MHz~1GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 33.661744 | 14.99 | -26.8 | 41.79 | V |
| 34.829328 | 15.15 | -26.8 | 41.95 | V |
| 41.507432 | 11.87 | -25.8 | 37.67 | V |
| 531.1506 | 14.33 | -14.9 | 29.23 | V |
| 619.135304 | 16.47 | -12.8 | 29.27 | H |
| 904.402204 | 20.84 | -8 | 28.84 | H |

Ch6 1GHz~3GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 2584.662115 | 51.95 | 8.6 | 43.35 | H |
| 2676.042307 | 52.75 | 9.4 | 43.35 | H |
| 2817.326538 | 53.13 | 10.1 | 43.03 | V |
| 2866.534807 | 54 | 10.8 | 43.2 | H |
| 2902.748077 | 53.61 | 10.8 | 42.81 | V |
| 2973.587115 | 53.97 | 11 | 42.97 | V |

Ch6 3GHz~18GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 10806.779 | 49.41 | 12.3 | 37.11 | V |
| 13020.37833 | 52.51 | 16.9 | 35.61 | V |
| 14264.14113 | 55.32 | 20.3 | 35.02 | H |
| 15844.4538 | 57.94 | 24.7 | 33.24 | H |
| 16502.79193 | 59.78 | 26.9 | 32.88 | H |
| 17468.841 | 61.55 | 28.9 | 32.65 | V |

802.11n-20MHz

Ch6 30MHz~1GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 33.279468 | 28.59 | -26.8 | 55.39 | V |
| 34.969208 | 26.53 | -26.8 | 53.33 | V |
| 39.271304 | 25.89 | -25.9 | 51.79 | V |
| 104.559144 | 15.02 | -24.8 | 39.82 | H |
| 602.22556 | 16.31 | -13 | 29.31 | V |
| 867.09774 | 20.15 | -8.9 | 29.05 | V |


Ch6 1GHz~3GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 2608.878846 | 55.69 | 8.8 | 46.89 | V |
| 2655.9375 | 57.49 | 9.4 | 48.09 | V |
| 2685.19423 | 56.54 | 9.4 | 47.14 | V |
| 2857.364038 | 53.46 | 10.8 | 42.66 | H |
| 2898.342308 | 53.63 | 10.8 | 42.83 | V |
| 2953.331153 | 54.46 | 10.7 | 43.76 | H |

Ch6 3GHz~18GHz


| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 4860.3262 | 42.83 | 0.9 | 41.93 | H |
| 10992.92793 | 52.24 | 14.5 | 37.74 | V |
| 13364.84127 | 53.7 | 17.5 | 36.2 | H |
| 14853.06147 | 55.64 | 21.2 | 34.44 | V |
| 16463.1044 | 58.6 | 26.4 | 32.2 | H |
| 17618.3994 | 62.07 | 29.4 | 32.67 | H |

Test graphs as below:

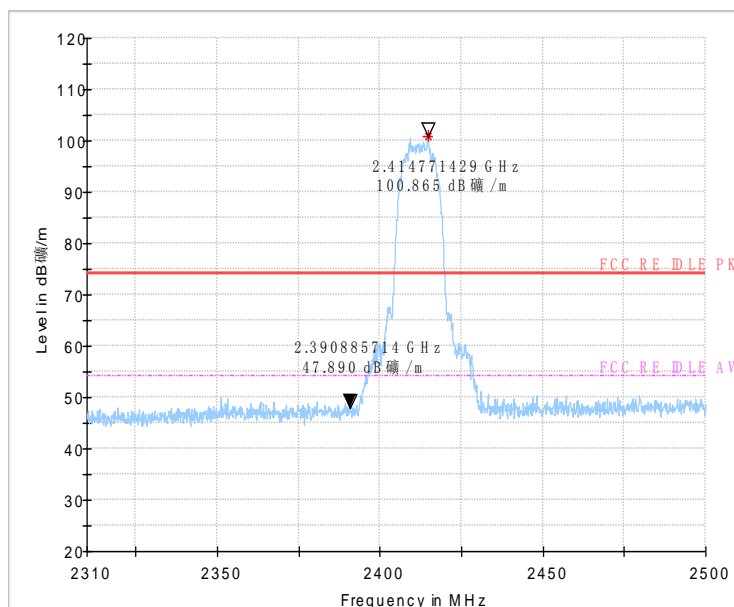

Peak detector

Fig.43 Radiated emission (Power): 802.11b, low channel

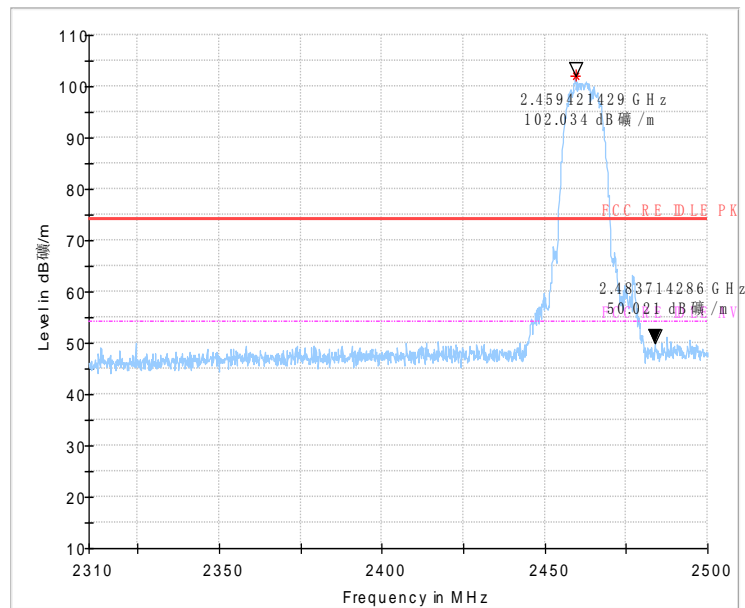

Peak detector

Fig.44 Radiated emission (Power): 802.11b, high channel

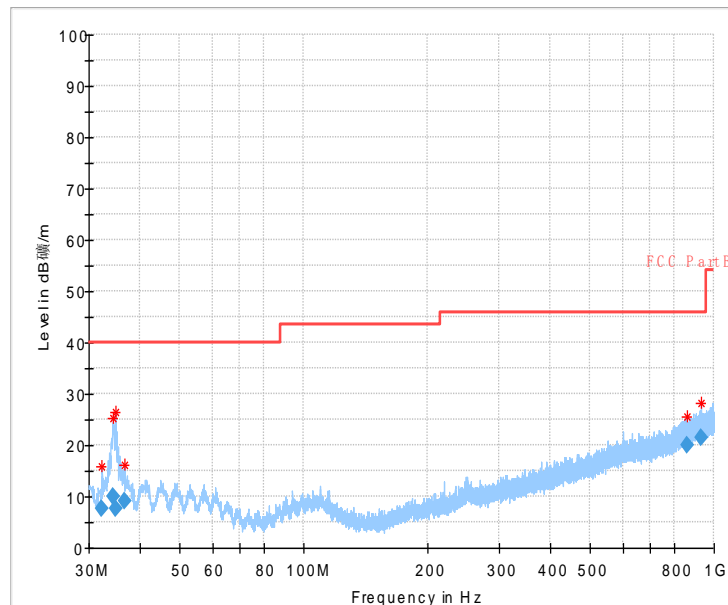


Fig.45 Radiated Spurious Emission (802.11b,Ch6,30MHz~1GHz)

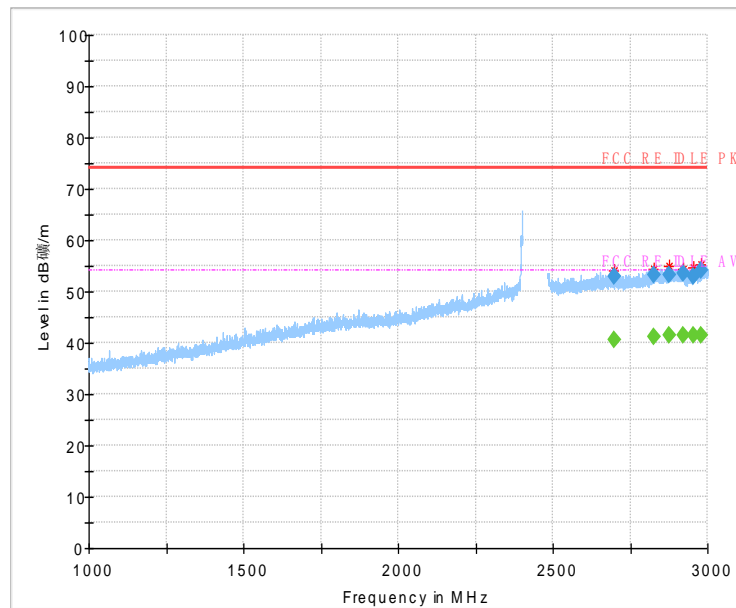


Fig.46 Radiated Spurious Emission (802.11b,Ch6,1GHz~3GHz)



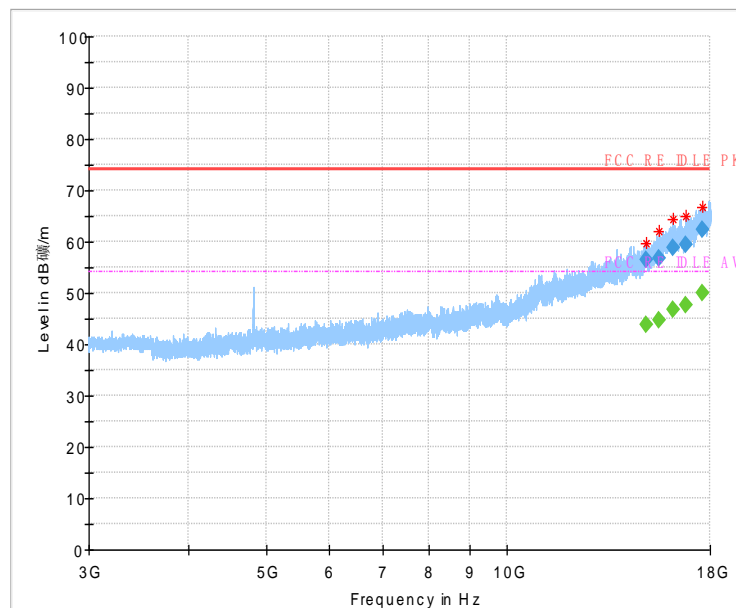


Fig.47 Radiated Spurious Emission (802.11b,Ch6,3GHz~18GHz)

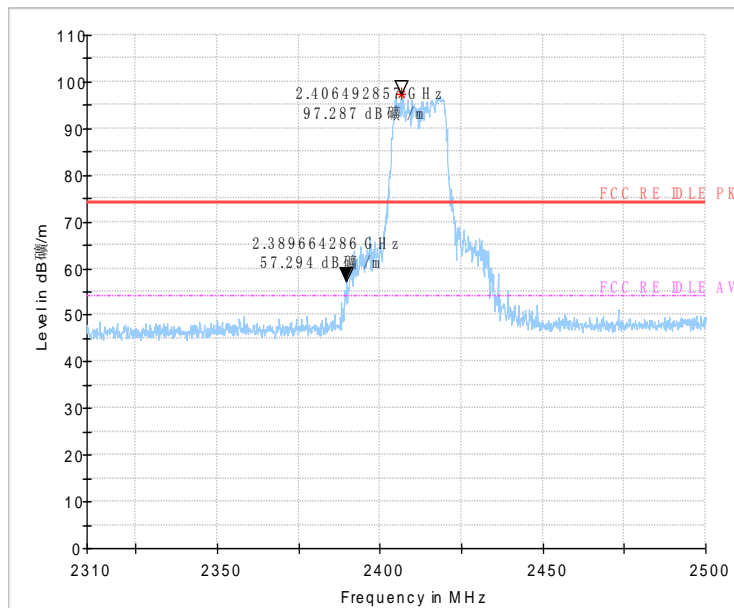


Peak detector

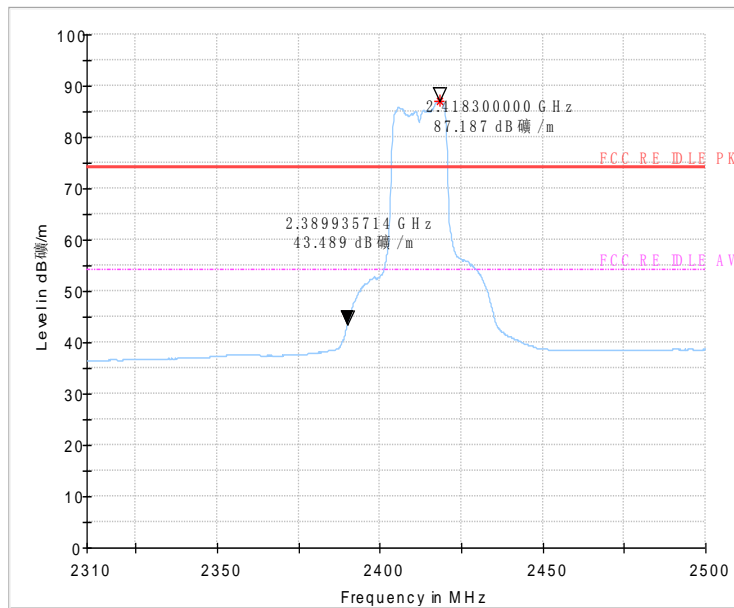


AV detector

Fig.48 Radiated emission (Power): 802.11g, low channel

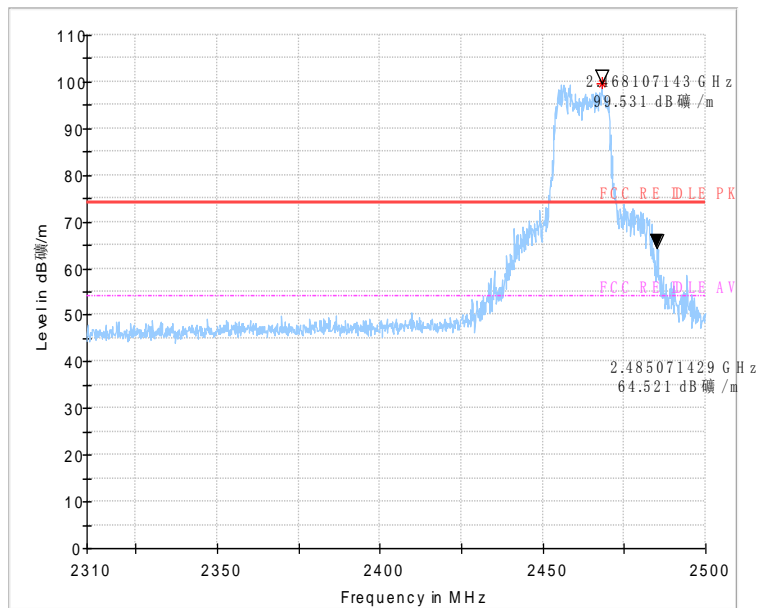

Peak detector

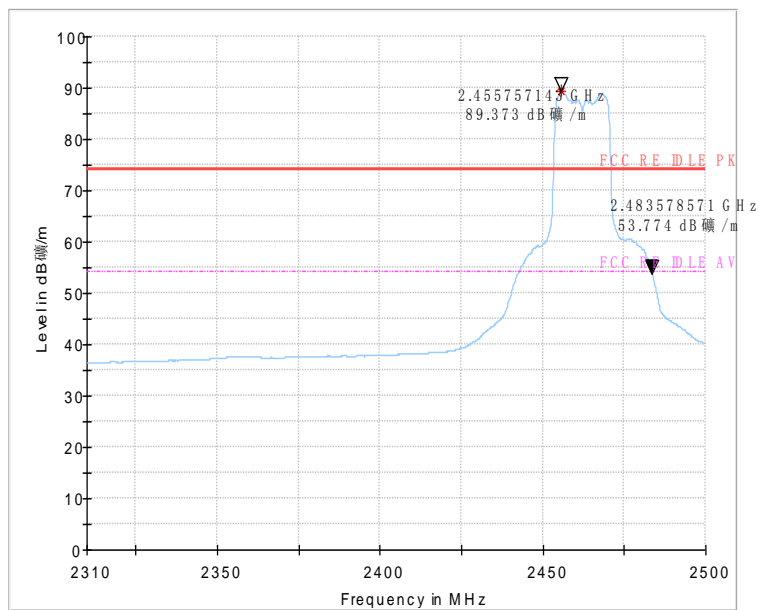

AV detector

Fig.49 Radiated emission (Power): 802.11g, high channel

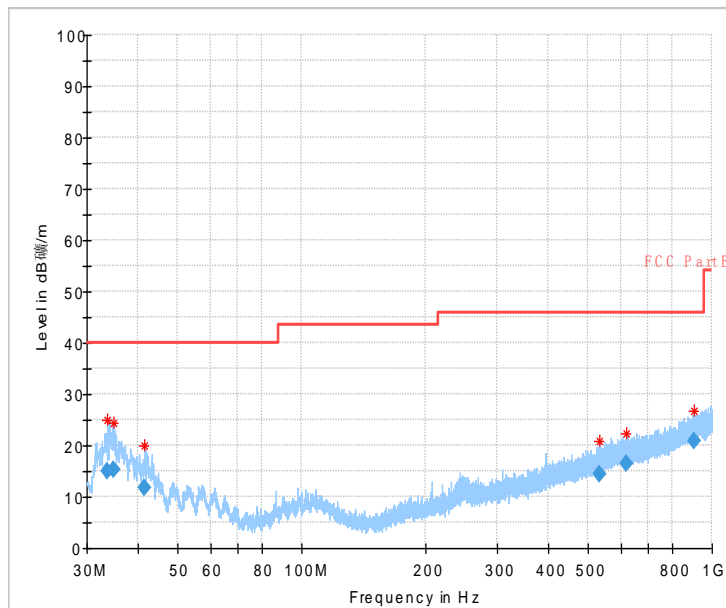


Fig.50 Radiated Spurious Emission (802.11g, Ch6, 30MHz~1GHz)

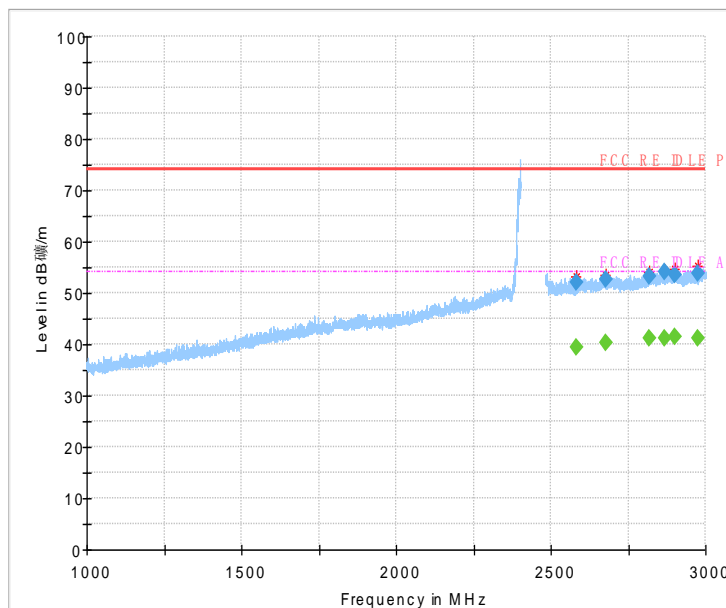


Fig.51 Radiated Spurious Emission (802.11g, Ch6, 1GHz~3GHz)



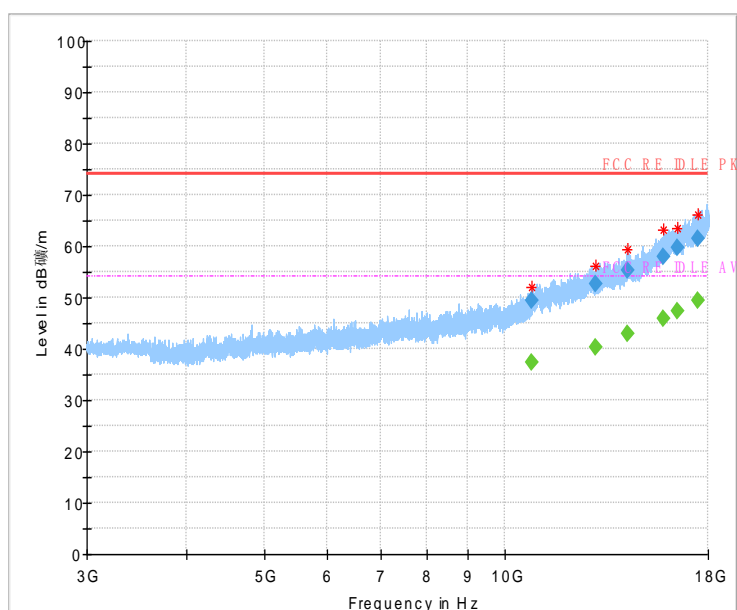


Fig.52 Radiated Spurious Emission (802.11g,Ch6,3GHz~18GHz)

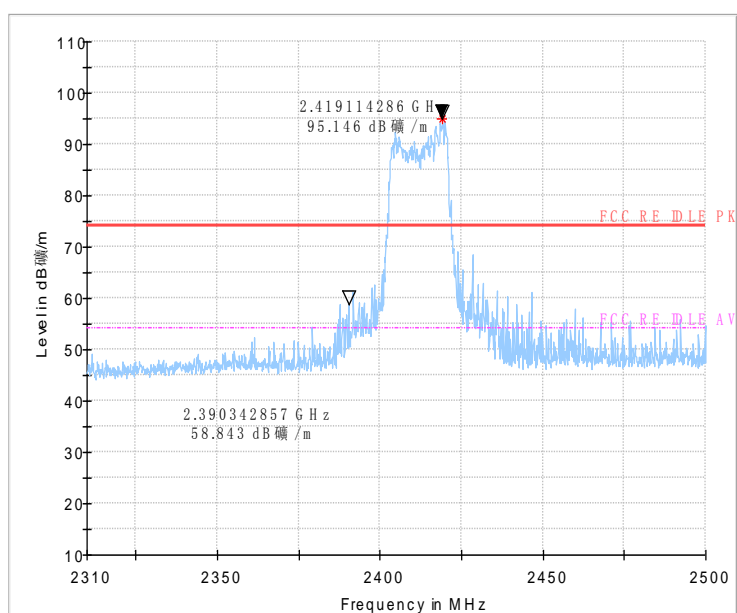


Peak detector

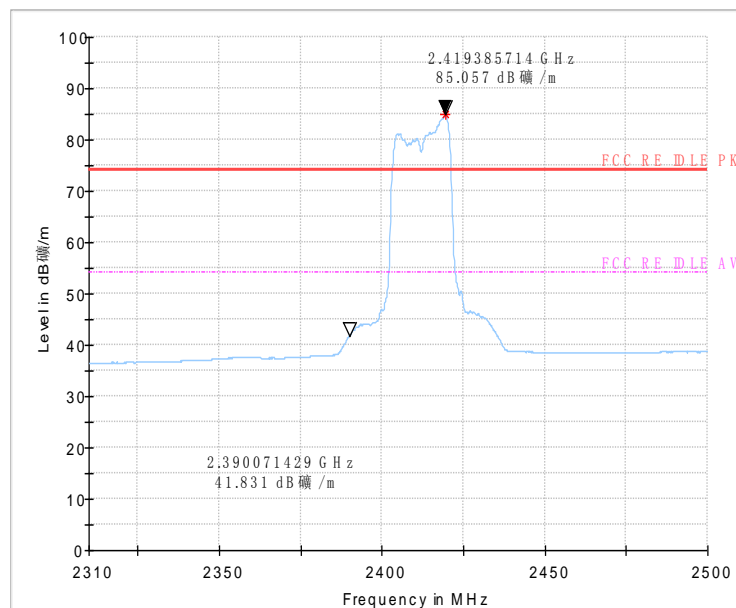


AV detector

Fig.53 Radiated emission (Power): 802.11n, low channel

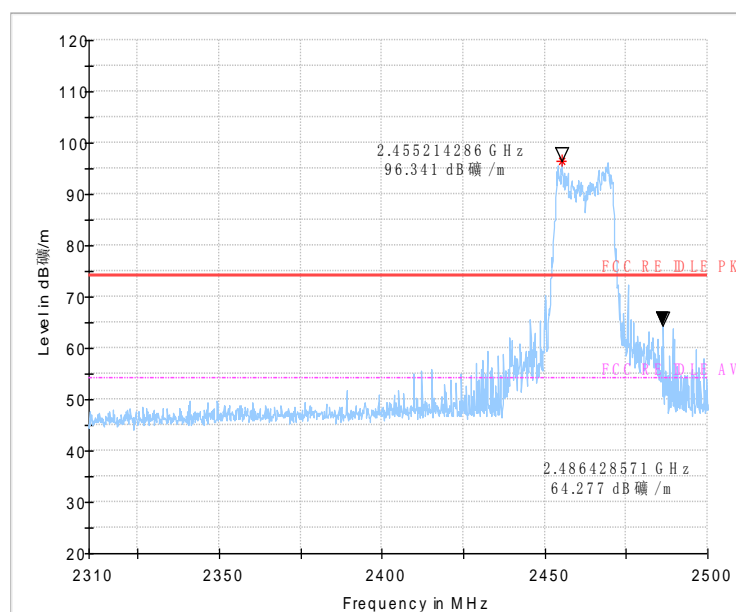

Peak detector

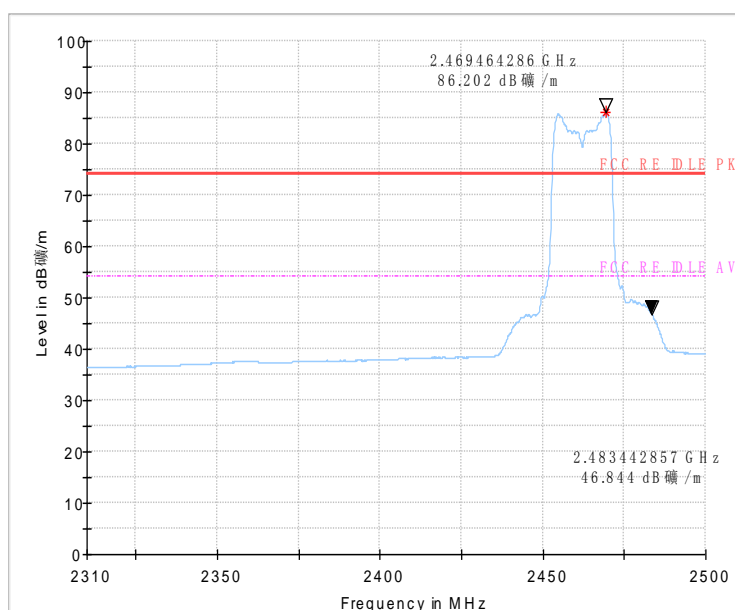

AV detector

Fig.54 Radiated emission (Power): 802.11n, high channel

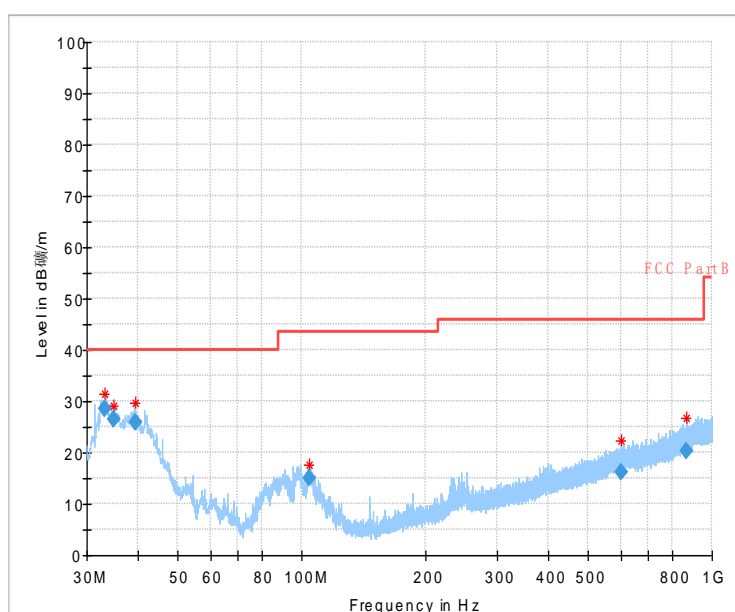


Fig.55 Radiated Spurious Emission (802.11 n-20MHz,Ch6,30MHz~1GHz)

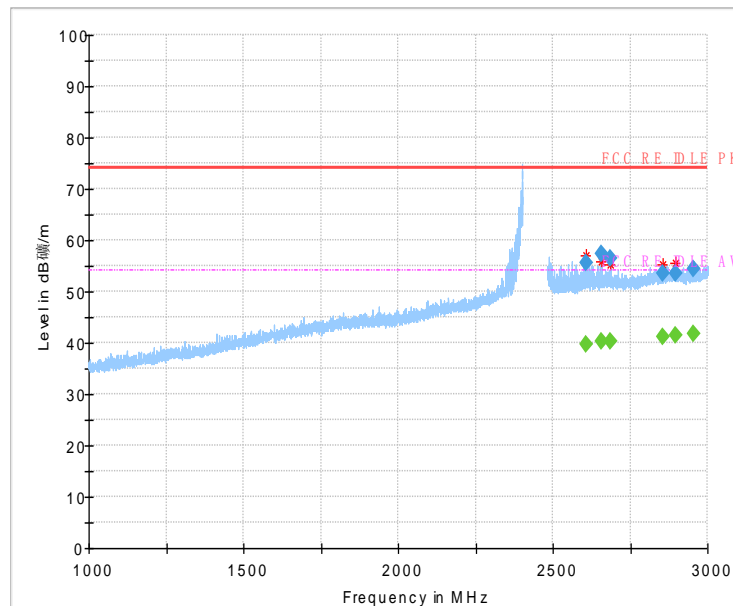


Fig.56 Radiated Spurious Emission (802.11 n-20MHz,Ch1,1GHz~3GHz)

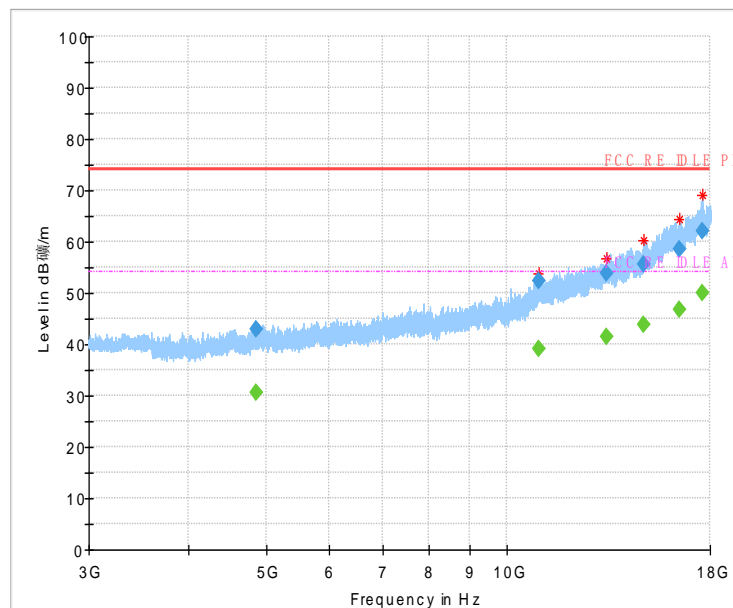


Fig.57 Radiated Spurious Emission (802.11 n-20MHz,Ch6,3GHz~18GHz)

6.7. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.

- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

| Voltage (V) | Frequency (Hz) |
|-------------|----------------|
| 120 | 60 |

Measurement Result and limit:

(Quasi-peak-average Limit)

| Frequency range (MHz) | Quasi-peak Limit (dBμV) | Average Limit (dBμV) | Result (dBμV) | Conclusion |
|--|----------------------------|-------------------------|---------------|------------|
| | | | With charger | |
| | | | 802.11b | |
| 0.15 to 0.5 | 66 to 56 | 56 to 46 | Fig.58 | P |
| 0.5 to 5 | 56 | 46 | | |
| 5 to 30 | 60 | 50 | | |
| NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz. | | | | |

Conclusion: Pass

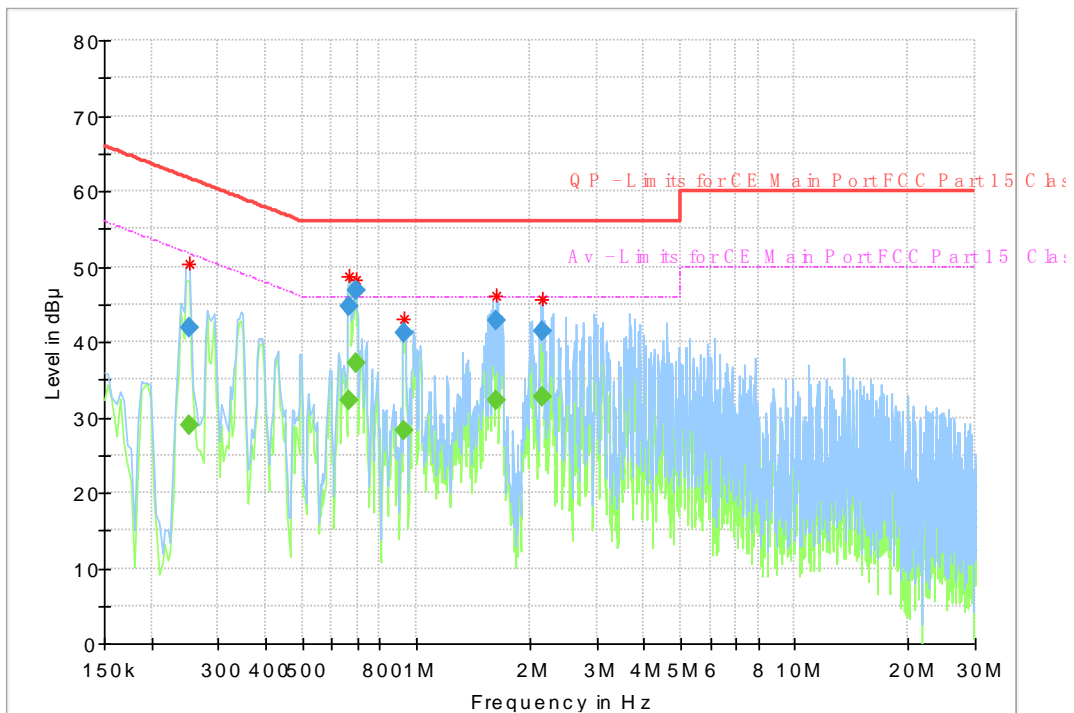


Fig.58 AC Powerline Conducted Emission

| Frequency (MHz) | QuasiPeak (dB μ V) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Meas. Time | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|--------------------|------------------|----------------|-------------|------------|-----------------|------|--------|------------|
| 0.250744 | 41.85 | --- | 61.73 | 19.88 | 1000.0 | 9.000 | N | ON | 9.7 |
| 0.250744 | --- | 29.00 | 51.73 | 22.73 | 1000.0 | 9.000 | N | ON | 9.7 |
| 0.664912 | 44.78 | --- | 56.00 | 11.22 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 0.664912 | --- | 32.24 | 46.00 | 13.76 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 0.691031 | 46.76 | --- | 56.00 | 9.24 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 0.691031 | --- | 37.26 | 46.00 | 8.74 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 0.929831 | 41.21 | --- | 56.00 | 14.79 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 0.929831 | --- | 28.17 | 46.00 | 17.83 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 1.635038 | 42.74 | --- | 56.00 | 13.26 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 1.635038 | --- | 32.28 | 46.00 | 13.72 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 2.153681 | 41.51 | --- | 56.00 | 14.49 | 1000.0 | 9.000 | L1 | ON | 9.7 |
| 2.153681 | --- | 32.61 | 46.00 | 13.39 | 1000.0 | 9.000 | L1 | ON | 9.7 |

7. Test Equipment and Ancillaries Used For Tests

The test equipment and ancillaries used are as follows.

Conducted test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration date | Cal.interval |
|-----|-----------------|----------|-----------------|--------------|------------------|--------------|
| 1 | Vector Signal | FSQ26 | 101096 | R&S | 2016-05-12 | 1 Year |
| 2 | DC Power Supply | ZUP60-14 | LOC-22 0Z006 | TDL-Lambda | 2016-05-12 | 1 Year |

Radiated emission test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Cal.interval |
|-----|--------------------------------------|----------|---------------|--------------|----------------------|--------------|
| 1 | Universal Radio Communication Tester | CMU200 | 123101 | R&S | 2016-05-12 | 1 Year |
| 3 | Test Receiver | ESU40 | 100307 | R&S | 2016-05-12 | 1 Year |
| 4 | Trilog Antenna | VULB9163 | VULB9163-515 | Schwarzbeck | 2014-11-05 | 3 Year |
| 5 | Double Ridged Guide Antenna | ETS-3117 | 135885 | ETS | 2014-05-06 | 3 Year |
| 8 | 2-Line V-Network | ENV216 | 101380 | R&S | 2016-05-12 | 1 Year |

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 25 %, Max. = 75 % |
| Shielding effectiveness | > 110 dB |
| Ground system resistance | < 0.5 Ω |

Control room did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. =25 %, Max. = 75 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

| | |
|------------------------------|--|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 25 %, Max. = 75 % |
| Shielding effectiveness | > 100 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |
| VSWR | Between 0 and 6 dB, from 1GHz to 18GHz |
| Site Attenuation Deviation | Between -4 and 4 dB,30MHz to 1GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80MHz to 3000 MHz |

ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

ANNEX B. Accreditation Certificate**Accredited Laboratory**


A2LA has accredited

EAST CHINA INSTITUTE OF TELECOMMUNICATIONS*Shanghai, People's Republic of China*

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets the requirements of any additional program requirements in the field of Electrical. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 10th day of December 2014.

President & CEO
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2017

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*******End The Report*******