

Test Report

Report No.: MTi221104002-03E2

Date of issue: 2023-02-06

Applicant: Spigen Korea Co., Ltd.

Product: Spigen OneTap Pro 3 15W Wireless Car Charger
Airvent/Spigen OneTap Pro 3 15W Wireless Car Charger
Dashboard

Model(s): ITM12W, ITM35W

FCC ID: 2AFKNITM12W

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	7
3	Test facilities and accreditations.....	8
3.1	Test laboratory	8
4	List of test equipment	9
5	Test result	10
5.2	Test setup	11
5.3	Test Procedures.....	11
5.4	Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01	12
5.5	Test results	13
	Photographs of the Test Setup.....	14
	Photographs of the EUT.....	15

Test Result Certification	
Applicant:	Spigen Korea Co., Ltd.
Address:	Spigen HQ-A Dong, 446, Bongeunsa-ro, Gangnam-gu, Seoul, 06153, Rep. of KOREA
Manufacturer:	Shenzhen Wireless Technology Co., Ltd
Address:	301, Building A2, Block A, Fangxing Science & Tech. Park, No. 13 of BaoNan Road, Longgang Community, Longgang Street, Longgang District, Shenzhen
Product description	
Product name:	Spigen OneTap Pro 3 15W Wireless Car Charger Airvent/Spigen OneTap Pro 3 15W Wireless Car Charger Dashboard
Trademark:	Spigen
Model name:	ITM12W
Series Model:	ITM35W
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 v03r01
Date of Test	
Date of test:	2022-12-01 ~ 2022-12-09
Test result:	Pass

Test Engineer :


(Yanice Xie)

Reviewed By: :


(Leon Chen)

Approved By: :


(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Spigen OneTap Pro 3 15W Wireless Car Charger Airvent/Spigen OneTap Pro 3 15W Wireless Car Charger Dashboard
Model name:	ITM12W
Series Model:	ITM35W
Model difference:	All the models are the same circuit and module, except the model name and bracket.
Electrical rating:	Input: DC 5V/3.0A, 9V/2.22A Wireless Output: 5W/7.5W/15W
Accessories:	N/A
Hardware version:	MPFW
Software version:	267.0.0.0
Test sample(s) number:	MTi221104002-03S1001
RF specification:	
Operation frequency:	115 kHz – 205 kHz 360 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode 1	Wireless Output(5W)
Mode 2	Wireless Output(7.5W)
Mode 3	Wireless Output(15W)
Mode 4	Stand-by

The test data only show worst test mode: Mode 3

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	Find X3	/	OPPO
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.
Accumulator	/	/	/
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	$\pm 7.8\%$
Electric field measurements (9kHz~30MHz)	$\pm 7.8\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2022/08/15	2023/08/14

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

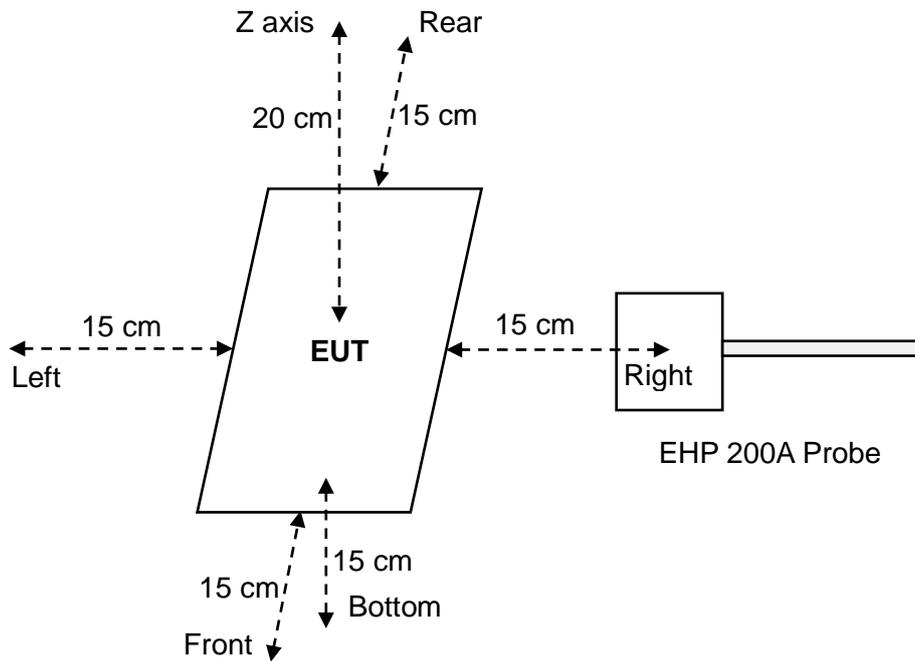

5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the device and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 v03r01.

5.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies are: 115 kHz – 205 kHz 360 kHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The maximum output power is: 15W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. The EUT has one source primary coil.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes. Mobile exposure conditions only.
6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes. See the test result in item 4.5.

5.5 Test results
Test condition 1: Mode 2 operating mode with client device (1 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	1.1513	614	0.31%	0.0439	1.63	4.14%
	Left	1.2897			0.0675		
	Right	1.1477			0.0482		
	Front	1.883			0.0597		
	Rear	1.232			0.0368		
	Bottom	0.9865			0.0407		

Test condition 2: Mode 2 operating mode with client device (50 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	1.1324	614	0.30%	0.0411	1.63	4.11%
	Left	1.2697			0.0670		
	Right	1.1347			0.0463		
	Front	1.8649			0.0542		
	Rear	1.2179			0.0337		
	bottom	0.9746			0.0349		

Test condition 3: Mode 2 operating mode with client device (99 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	1.1437	614	0.29%	0.0402	1.63	3.94%
	Left	1.2819			0.0642		
	Right	1.1319			0.0428		
	Front	1.7692			0.0497		
	Rear	1.229			0.0316		
	bottom	0.9831			0.0327		

Test condition 1: Mode 3 operating mode with client device (1 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	1.3709	614	0.35%	0.0478	1.63	4.55%
	Left	1.2618			0.0742		
	Right	1.4872			0.0524		
	Front	2.1611			0.0478		
	Rear	1.5041			0.0460		
	Bottom	1.7267			0.0528		

Test condition 2: Mode 3 operating mode with client device (50 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	1.3801	614	0.35%	0.044	1.63	4.60%
	Left	1.2746			0.0749		
	Right	1.4836			0.0612		
	Front	2.1766			0.0442		
	Rear	1.4933			0.0487		
	bottom	1.7358			0.0537		

Test condition 3: Mode 3 operating mode with client device (99 % battery status of client device)

Antenna	Probe Position	E -field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	1.3549	614	0.35%	0.0472	1.63	4.12%
	Left	1.2499			0.0671		
	Right	1.4785			0.043		
	Front	2.1579			0.0379		
	Rear	1.4892			0.039		
	bottom	1.714			0.046		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----