



04:10:33 PMJul 24, 2024

TRACE 1 2 3 4 5

TYPE M P NNNN Center Freq 13.750000000 GHz
PNO: Fast →
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 13/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.442 7 GHz -48.992 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.750000000 GHz Start Fred 2.500000000 GHz 25.000000000 GHz **CF Step** 2.250000000 GHz <u>Auto</u> Freq Offset 0 Hz Scale Type Center 13.75 GHz #Res BW 100 kHz Span 22.50 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test_Graph_802.11g_Chain B_2462_6Mbps_Higher Band Emissions






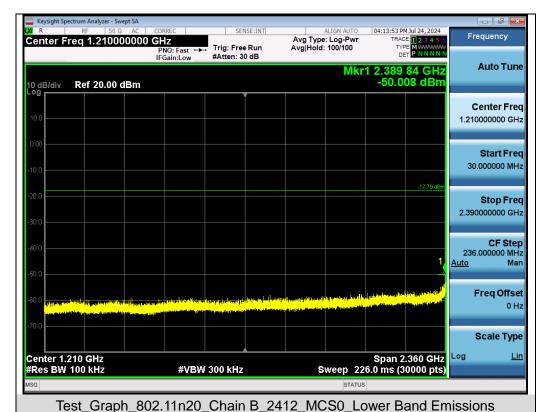


04:14:28 PMJul 24, 2024

TRACE 1 2 3 4 5

TYPE M P NNNN Center Freq 13.741750000 GHz
PNO: Fast
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 15/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 23.825 4 GHz -49.322 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.741750000 GHz Start Fred 2.483500000 GHz -17.79 di 25.000000000 GHz **CF Step** 2.251650000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Center 13.74 GHz #Res BW 100 kHz Span 22.52 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test_Graph_802.11n20_Chain B_2412_MCS0_Higher Band Emissions






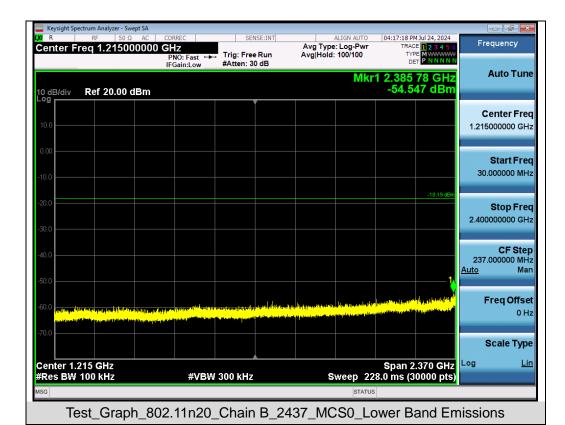




Test_Graph_802.11n20_Chain B_2437_MCS0_Higher Band Emissions















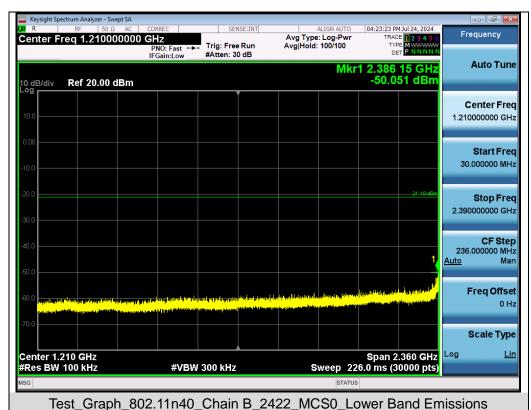


04:23:59 PMJul 24, 2024

TRACE 1 2 3 4 5

TYPE M P N N N N Center Freq 13.741750000 GHz
PNO: Fast
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 15/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.972 2 GHz -49.004 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.741750000 GHz Start Fred 2.483500000 GHz 25.000000000 GHz **CF Step** 2.251650000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Center 13.74 GHz #Res BW 100 kHz Span 22.52 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test_Graph_802.11n40_Chain B_2422_MCS0_Higher Band Emissions






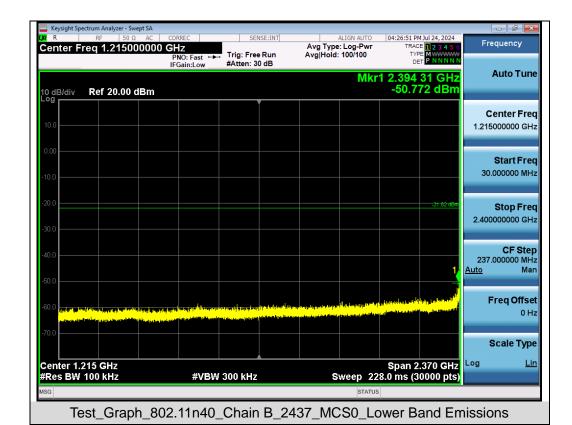



Test_Graph_802.11n40_Chain B_2437_MCS0_Higher Band Emissions


#VBW 300 kHz

























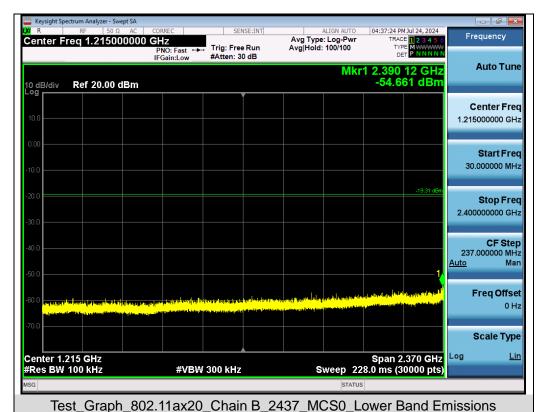









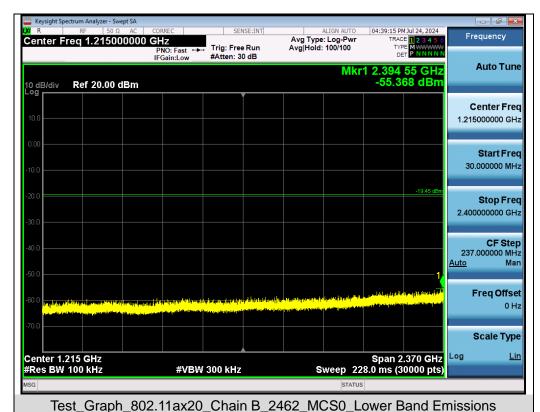








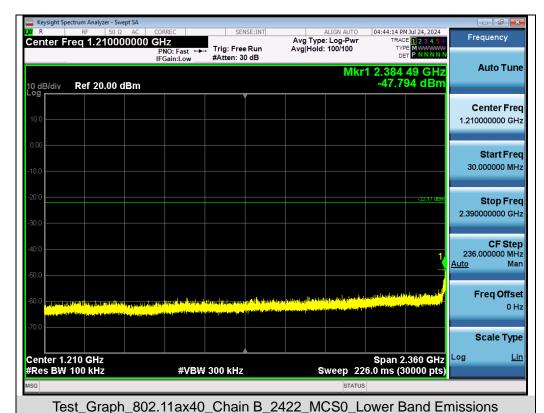


















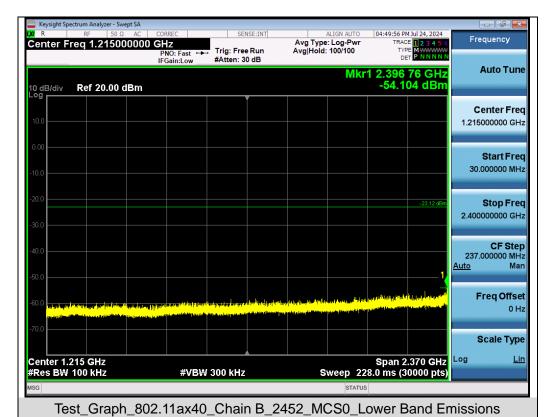



Test_Graph_802.11ax40_Chain B_2452_MCS0_Higher Band Emissions






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11g_Chain A_2412_6Mbps_Lower Band Edge Emissions



Scale Type


Log



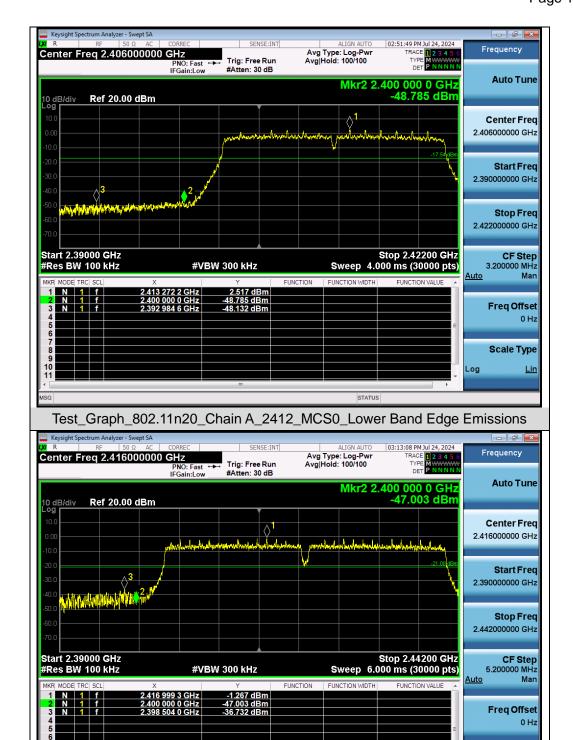


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11n40_Chain A_2422_MCS0_Lower Band Edge Emissions





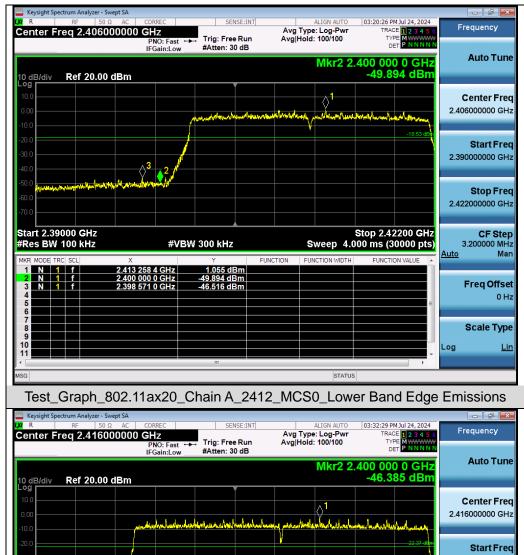

2.390000000 GHz 2.442000000 GHz Stop 2.44200 GHz Sweep 6.000 ms (30000 pts) Start 2.39000 GHz **CF Step** #Res BW 100 kHz #VBW 300 kHz 5.200000 MHz <u>Auto</u> Mar FUNCTION Freq Offset 0 Hz **Scale Type** Log Test_Graph_802.11ax40_Chain A_2422_MCS0_Lower Band Edge Emissions




Log





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11g_Chain B_2412_6Mbps_Lower Band Edge Emissions



Scale Type


Log



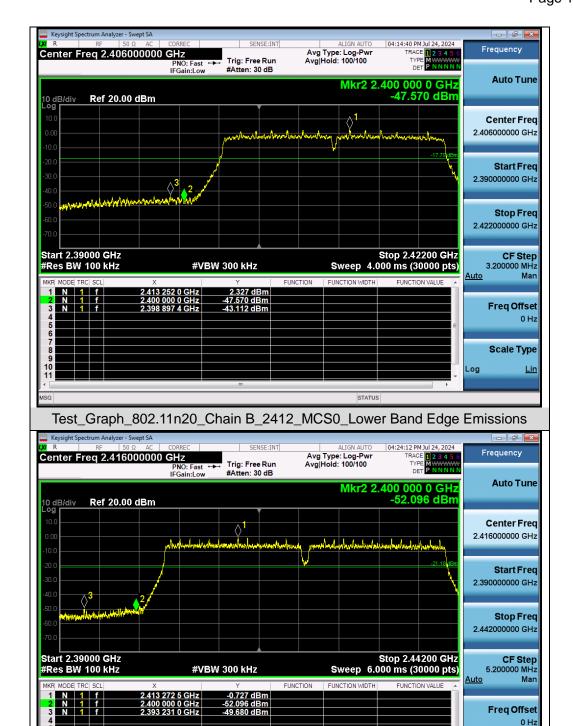



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_Chain B_2422_MCS0_Lower Band Edge Emissions





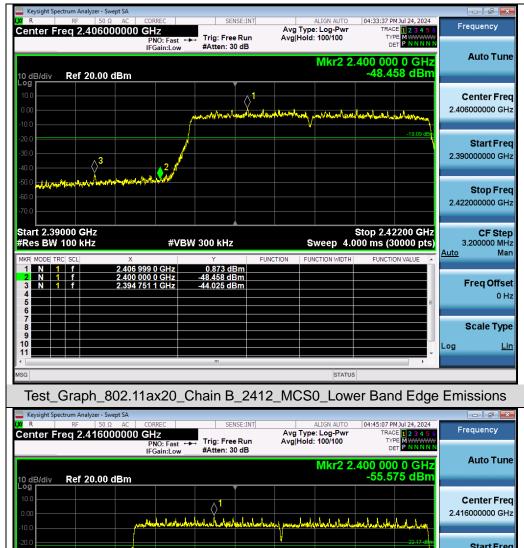

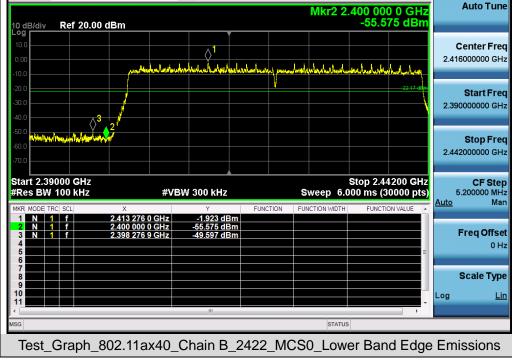



Page 130 of 167

11. Radiated Spurious Emission

11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Page 131 of 167

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Page 132 of 167

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


• Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. $VBW \ge [3 \times RBW]$
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

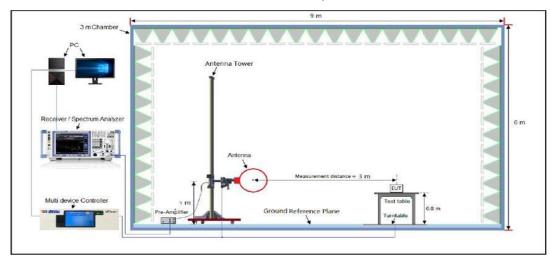

Radiated Emission Test Setup 30MHz-1000MHz

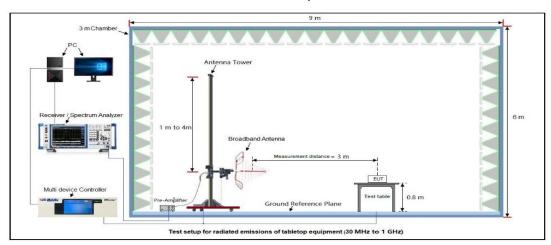

Radiated Emission Test Setup Above 1000MHz

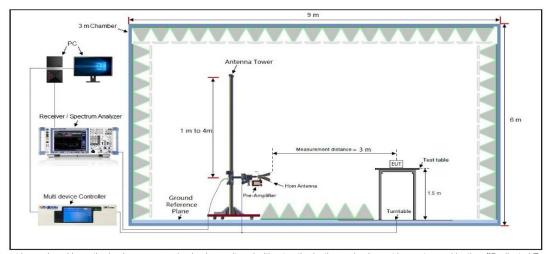

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

-7.25

-10.73

-7.17

peak

peak

peak

46.00

46.00

46.00




11.4 Measurement Result

Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

•	•					
Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO			
Temperature	23°C	Relative Humidity	57.1%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 7	Antenna Polarity	Horizontal			

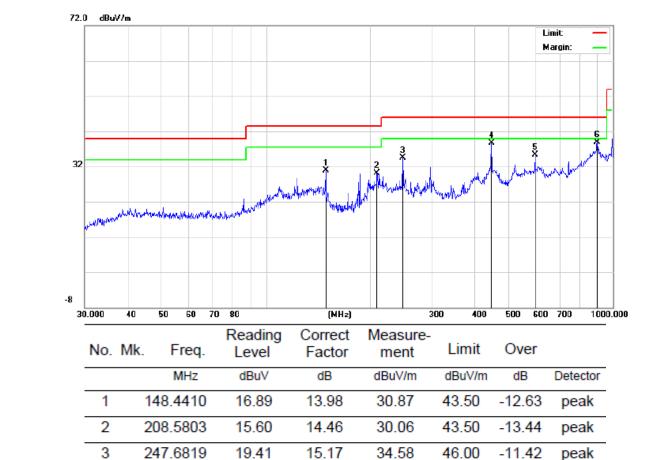

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

24.88

24.91

31.78

38.75

35.27

38.83

446.4141

595.1329

900.1474

5


13.87

10.36

7.05



Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO		
Temperature	23°C	Relative Humidity	57.1%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 7	Antenna Polarity	Vertical		

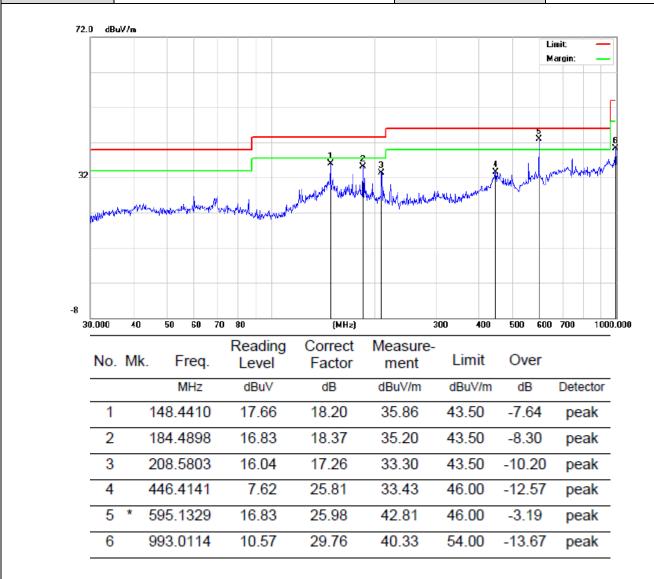

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.



Page 136 of 167

Radiated Emissions Test Results above 1 GHz

EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	23°C	Relative Humidity	57.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	47.65	0.08	47.73	74	-26.27	peak
4824.000	38.42	0.08	38.5	54	-15.5	AVG
7236.000	42.57	2.21	44.78	74	-29.22	peak
7236.000	31.65	2.21	33.86	54	-20.14	AVG
Remark:	Remark:					

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	23°C	Relative Humidity	57.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	47.68	0.08	47.76	74	-26.24	peak
4824.000	38.42	0.08	38.5	54	-15.5	AVG
7236.000	42.49	2.21	44.7	74	-29.3	peak
7236.000	31.58	2.21	33.79	54	-20.21	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 137 of 167

Radiated Emissions Test Results above 1GHz

EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	23°C	Relative Humidity	57.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	→ Value Type
4874.000	47.65	0.14	47.79	74	-26.21	peak
4874.000	38.54	0.14	38.68	54	-15.32	AVG
7311.000	42.19	2.36	44.55	74	-29.45	peak
7311.000	31.54	2.36	33.9	54	-20.1	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	23°C	Relative Humidity	57.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	47.65	0.14	47.79	74	-26.21	peak
4874.000	38.42	0.14	38.56	54	-15.44	AVG
7311.000	41.25	2.36	43.61	74	-30.39	peak
7311.000	32.34	2.36	34.7	54	-19.3	AVG

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 138 of 167

Radiated Emissions Test Results above 1GHz

EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	23°C	Relative Humidity	57.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	48.65	0.22	48.87	74	-25.13	peak
4924.000	37.42	0.22	37.64	54	-16.36	AVG
7386.000	42.91	2.64	45.55	74	-28.45	peak
7386.000	31.25	2.64	33.89	54	-20.11	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	23°C	Relative Humidity	57.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	47.95	0.22	48.17	74	-25.83	peak
4924.000	36.95	0.22	37.17	54	-16.83	AVG
7386.000	41.35	2.64	43.99	74	-30.01	peak
7386.000	32.48	2.64	35.12	54	-18.88	AVG
emark:						

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- **3.** The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

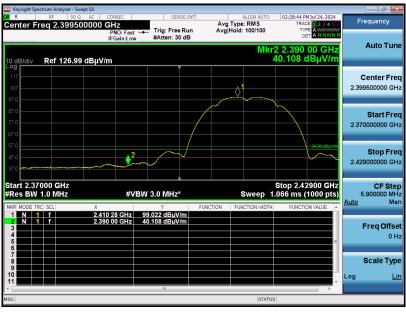

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

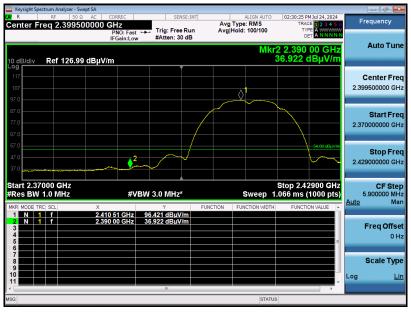


RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

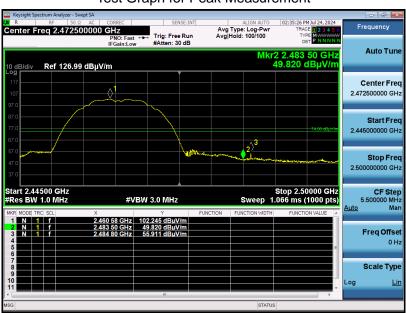

Test Graph for Average Measurement

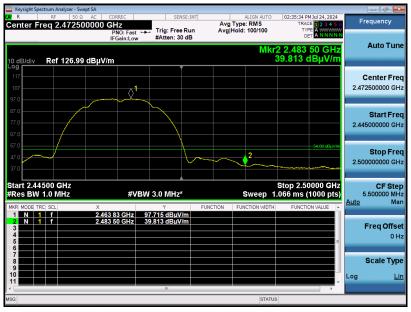

RESULT: Pass



EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

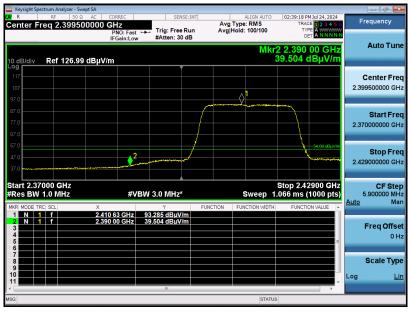

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

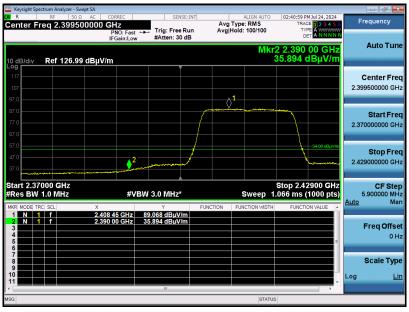

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

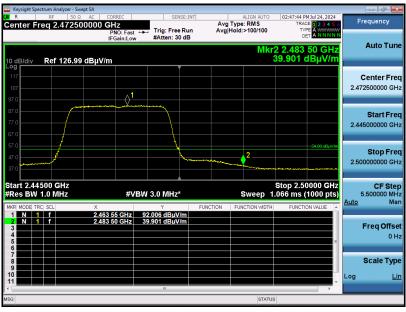

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

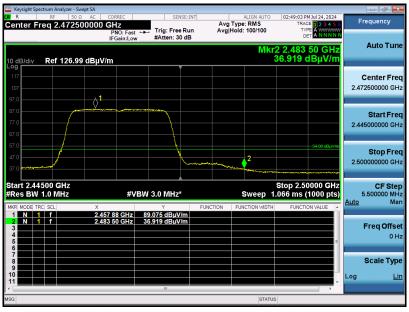


RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

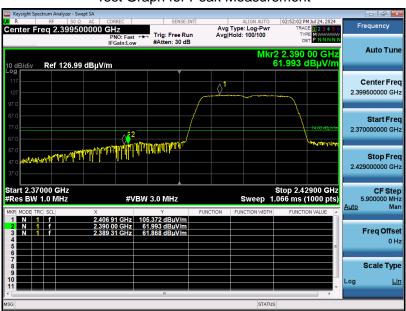

Test Graph for Average Measurement



RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

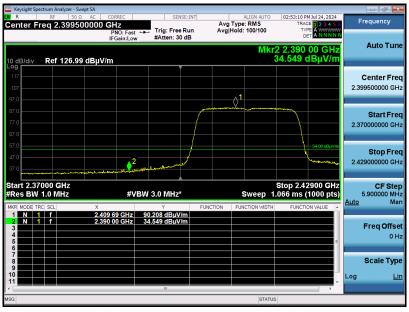

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

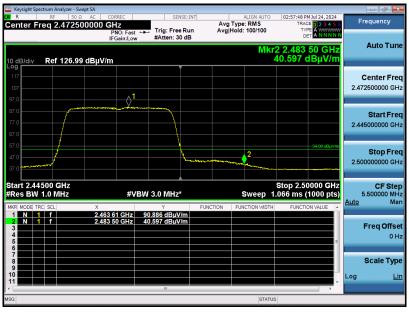

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

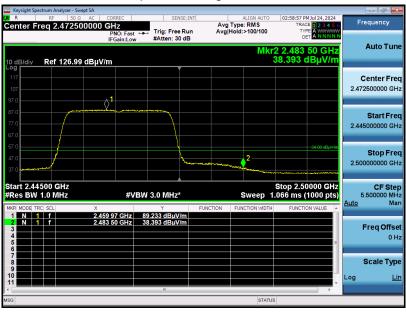

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

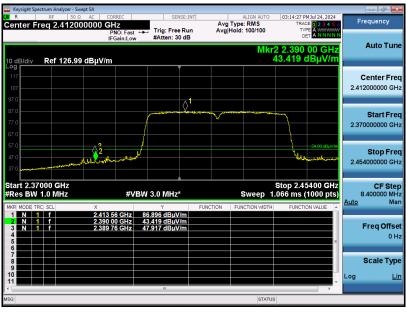

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

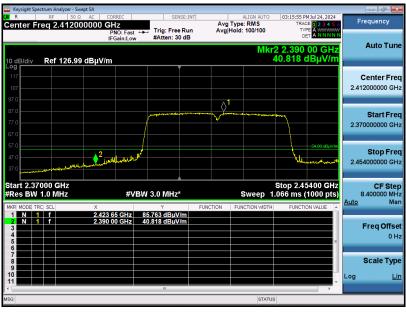

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

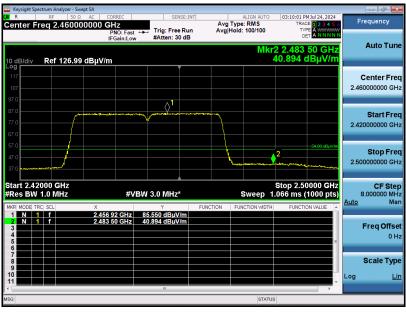

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

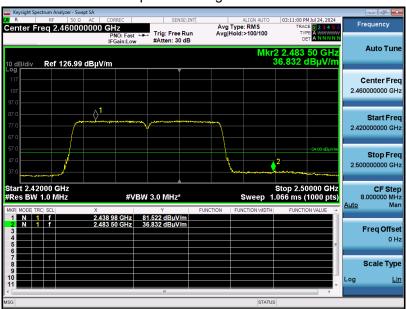

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 13	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

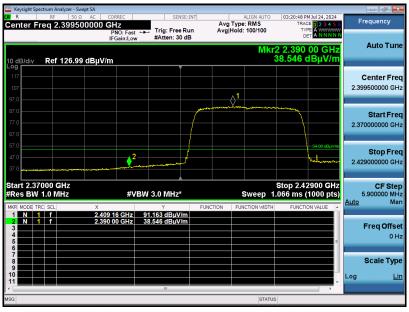

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 13	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

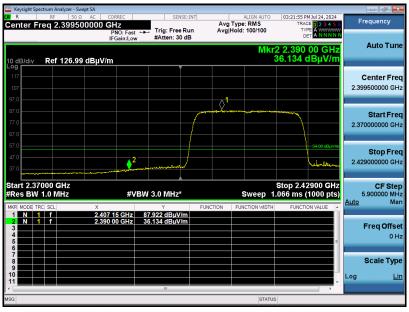

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 15	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

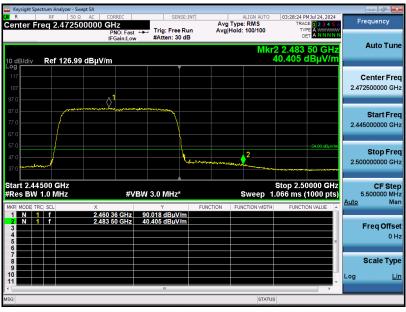

RESULT: Pass




EUT Name	Video and Audio Production Console	Model Name	RØDECASTER VIDEO
Temperature	24.7°C	Relative Humidity	57%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 15	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

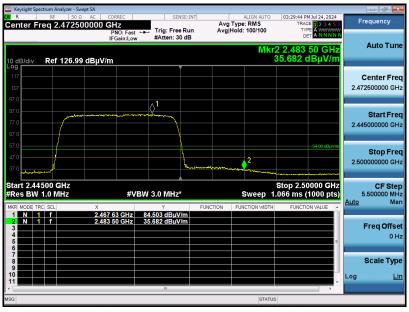

RESULT: Pass