



Mobile Approval
Test Report
And Application for Grant of Equipment Authorization

TEST REPORT PERTAINING TO:

Equipment Under Test	Model Number(s)
DRIG Wireless Device Server	XSDR22W00-01

CONFIGURATION

802.11b & 802.11g module with a Wanshih 2.89 dBi Antenna (WSS003)

MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE FOLLOWING STANDARD (S)

Regulatory Standard(s)

47 CFR Part 15, Subpart C Section 15.247

Test Method:

ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

PREPARED FOR:

Lantronix Inc.
15353 Barranca Parkway
Irvine, California 92618
Contact(s): Mr. Michael Simonsen

PREPARED BY:

Aegis Labs, Inc.
22431 Antonio Parkway B160-417
Rancho S. Margarita, CA 92688
Agent(s): Mr. Rick Candelas
Mr. Johnny Candelas



Test Report #: LANTR-060623F

Test Report Revision: NONE

	REPORT BODY	APPENDICES		TOTAL PAGES
		<i>A</i>	<i>B</i>	
PAGES	14	47	1	62

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.
The Lantronix Inc. logo is used for identification purposes only and is a registered trademark of Lantronix Inc.



TABLE OF CONTENTS

SECTION	TITLE	PAGE
	COVER SHEET.....	01
	TABLE OF CONTENTS.....	02
1.0	REGULATORY COMPLIANCE GUIDELINES.....	03
1.1	Guidelines For Testing To Emissions Standards.....	03
2.0	SUMMARY OF REGULATORY LIMITS.....	04
3.0	ADMINISTRATIVE DATA AND TEST DESCRIPTION.....	06
4.0	DESCRIPTION OF EUT CONFIGURATION.....	07
4.1	EUT Description	07
4.2	EUT Configuration.....	08
4.3	List of EUT Sub-Assemblies and Host Equipment.....	09
4.4	I/O Cabling Diagram and Description	10
4.5	EMC Test Hardware and Software Measurement Equipment.....	12
5.0	CONDITIONS DURING EMISSIONS MEASUREMENTS.....	13
5.1	General.....	13
5.2	Conducted Emissions Test Setup.....	13
5.3	Radiated Emissions Test Setup.....	14

APPENDICES

A	Test Data
B	Modifications And Recommendations



1.0 REGULATORY COMPLIANCE GUIDELINES

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual. Testing and engineering functions provided by Aegis Labs were furnished by RF technicians and engineers with accredited qualifications and training credentials to carry out their duties.

The object of this report was to publish verifiable test results of an EUT subjected to the tests outlined in the standard listed on the cover page of this report.

1.1 Guidelines For Testing To Emissions Standards

This standard for EMC emission requirements apply to electrical equipment for Information Technology Equipment (ITE). Compliance to these standards and in combination with the other standards listed in this test report can be used to demonstrate presumption of compliance with the protection requirements of the appropriate agency standard.

The purpose of this standard is to specify minimum requirements for emissions regarding electromagnetic compatibility (EMC) and protect the radio frequency spectrum 9 kHz. – 400 GHz. from unwanted interference generated from electrical/digital systems that intentionally or unintentionally generated RF energy. The emissions standards, normative documents and/or publications were used to conduct all tests performed on the equipment herein referred to as “Equipment Under Test”.



2.0 SUMMARY OF TEST RESULTS

802.11b Mode (2400-2483.5 MHz)

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 10.08 MHz 2437 MHz = 10.17 MHz 2462 MHz = 10.17 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	PASSED	2412 MHz = 16.57 dBm = 45.39 mW 2437 MHz = 16.71 dBm = 46.88 mW 2462 MHz = 16.67 dBm = 46.45 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations Exhibit
15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets
15.247(c)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets
15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -17.67 dB 2437 MHz = -15.17 dB 2462 MHz = -15.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheets



2.0 Summary of Test Results (Continued)

802.11g Mode (2400-2483.5 MHz)

EMISSIONS STANDARD


FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 16.58 MHz 2437 MHz = 16.67 MHz 2462 MHz = 16.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	PASSED	2412 MHz = 20.49 dBm = 111.94 mW 2437 MHz = 20.31 dBm = 107.40 mW 2462 MHz = 19.54 dBm = 89.95 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations Exhibit
15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets
15.247(c)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets
15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -17.83 dB 2437 MHz = -17.00 dB 2462 MHz = -19.33 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheets

ANALYSIS AND CONCLUSIONS


Based upon the measurement results we find that this equipment is within the limits of the standard listed on the cover page of this test report. All results are based on a test of one sample. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

Approval Signatories

Test and Report Completed By:


Johnny Candelas **07/26/06**
Test Technician **Date:**
Aegis Labs, Inc.

Report Approved By:


Rick Candelas **07/26/06**
Quality Assurance Manager **Date:**
Aegis Labs, Inc.



3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

DEVICE TESTED:	ITE Type: DRIG Wireless Device Server Model Number(s): XSDR22W00-01 Serial Number: None FCC ID: R68XSDRWLSG
DATE EUT RECEIVED:	July 17 th , 2006
TEST DATE(S):	July 18 th , - 26 th , 2006
ORIGIN OF TEST SAMPLE(S):	Pre-Production
EQUIPMENT CLASS:	EUT tested as CLASS B device
RESPONSIBLE PARTY:	Lantronix Inc. 15353 Barranca Parkway Irvine, CA 92618
CLIENT CONTACT:	Mr. Michael Simonsen
MANUFACTURER:	Lantronix Inc.
TEST LOCATION:	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Open Area Test Site #1 & #2
ACCREDITATION CERTIFICATE(s):	A2LA Certificate Number: 1111.01, Valid through February 28, 2008
PURPOSE OF TEST:	To demonstrate compliance with the standards as described in Sections 1.0 & 2.0 of this report.
UNCERTAINTY BUDGET:	Proficiency Testing and Uncertainty Calculations for all tests indicated in this report have been conducted in accordance with ISO 17025: 2005 requirements Section 5.4.6, and 5.9. Uncertainty Budgets and Proficiency Test results available upon request.
STATEMENT OF CALIBRATION:	All accredited equipment calibrations were performed by Liberty Labs, Inc. and World Cal. with typical calibration uncertainty estimates derived from ISO Guide to the determination of uncertainties with a Coverage Factor of k=2 for 95% level of confidence.



4.0 DESCRIPTION OF EUT CONFIGURATION

4.1 EUT Description

Equipment Under Test (EUT)	
Trade Name:	DRIG Wireless Device Server
Model Number:	XSDR22W00-01
Frequency Range:	802.11b/g = 2400 – 2483.5 MHz
Type of Transmission:	Direct Sequence Spread Spectrum
Transfer Rate:	1/5.5/11 Mbps for 802.11b mode 6/36/54 Mbps for 802.11g mode
Number of Channels:	802.11b mode (2400-2483.5 MHz) = 11 802.11g mode (2400-2483.5 MHz) = 11
Modulation Type:	CCK, OFDM
Antenna Type:	External Swivel Antenna with Reverse SMA connector
Antenna Gain (See Note 2):	2.4 GHz = 2.89 dBi
Transmit Output Power:	Ch. 1-11 14dBm Average (Typical) for 802.11b mode Ch. 1-10: 14dBm Average & Ch. 11: 12dBm Average(Typical) for 802.11g mode Please see Appendix A (Data Sheets) for actual output power.
Power Supply:	9-30VDC, 9-24VAC input
Number of External Test Ports Exercised:	1 Antenna Port, 2 Serial Ports, 2 Network Port

The DRIG Wireless Device Server provides a network-enabling solution based on the IEEE 802.11b/g wireless standard.

It was tested as a standalone device with a Wanshih (MN: WSS003) antenna continuously transmitting and receiving from the antenna port.

NOTE 1: For a more detailed description, please refer to the manufacture's specifications or User's Manual.

NOTE 2: The EUT was tested with a Wanshih antenna. (Refer to the antenna specifications exhibits).



4.2 EUT Configuration

For Testing Above 1GHz

The EUT was tested as a standalone device connected to a remotely located Linksys Hub via its 2 network ports & a Dell computer via its serial port 1. The Linksys Hub was then connected to a Dell computer via its network port. The Dell computer was then connected to a Dell monitor, a Dell keyboard and Logitech mouse via its video, keyboard and mouse ports respectively. A Wanshih external antenna (WSS003) was connected to the EUT's antenna ports via its reverse SMA antenna connector. Data for the Wanshih antenna can be found in Appendix A (Data Sheets).

The low, middle, and high channels were tested in 802.11b/g mode. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the manufacturer (*Linktest*).



4.3 List of EUT, Sub-Assemblies and Host Equipment


Equipment Under Test			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Lantronix Inc.	DRIG Wireless Device Server	XSDR22W00-01	None

EUT Sub Assemblies			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Wanshih	External Antenna	WSS003	N/A

Remotely Located Support Equipment			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Dell	Host Computer	XPS B1000r	2V9N10B
Dell	Monitor	E550	MY-07753T-46632-9BR-23D1
Dell	Keyboard	RT7D5JTW	37171 03H S341
Logitech	Mouse	M-S3S	LZK13810013
Linksys	Router	WRTS4G5 V.2	CGN30E436355

NOTE: All the power cords of the above support equipment are standard and non-shielded.

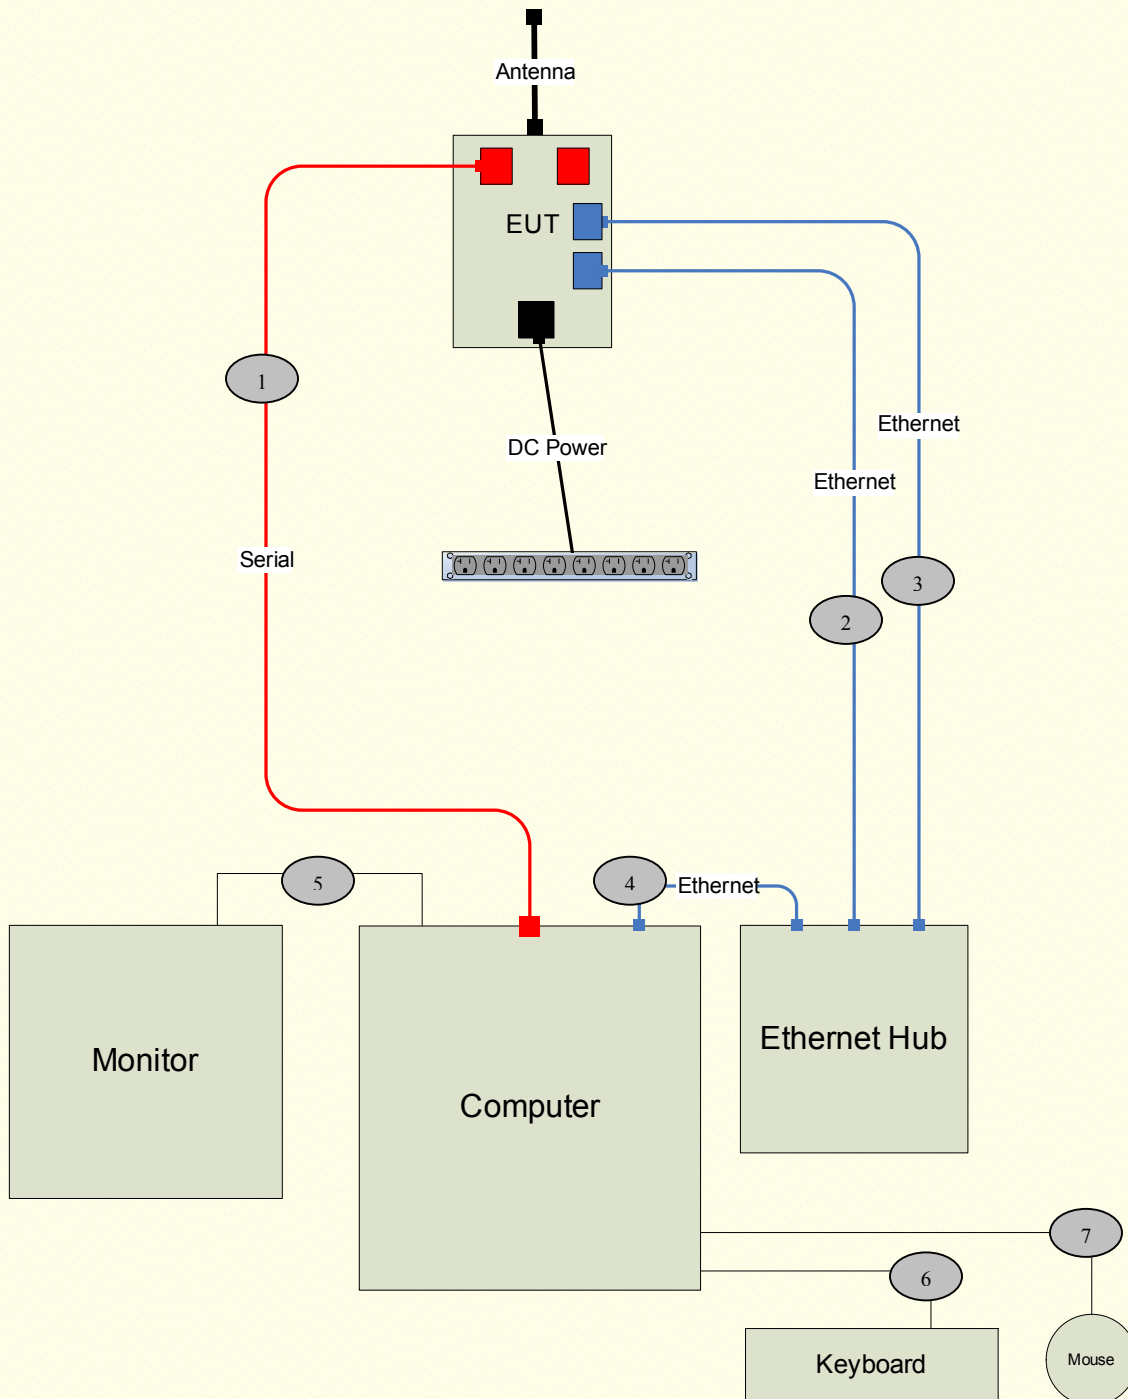4.4 I/O Cabling Diagram and Description





4.4 I/O Cabling Diagram and Description (continued)

Signal Line Cable Description							
Cable	Length	Construction	Source Connector	Destination Connector	Bundled Length	Ferrite Attached	Note
1	10.0m	Serial Cable	EUT's Port 1: Metallic RJ-45	Host Computer: Metallic DB-9	N/A	N/A	N/A
2	10.0m	Round, Un-Shielded Twisted Pair (CAT 5)	EUT's Ethernet Port 1: Plastic RJ-45	Linksys Hub: Plastic RJ-45	N/A	N/A	N/A
3	10.0m	Round, Un-Shielded Twisted Pair (CAT 5)	EUT's Ethernet Port 2: Plastic RJ-45	Linksys Hub: Plastic RJ-45	N/A	N/A	N/A
4	1.5m	Round, Un-Shielded Twisted Pair (CAT 5)	Linksys Hub: Plastic RJ-45	Host Computer: Plastic RJ-45	N/A	N/A	N/A
5	1.5m	Round, Braid & Foil Shielded	Host Computer: Metallic DB-15	Monitor: Hardwired	N/A	N/A	N/A
6	1.5m	Round, Braid & Foil Shielded	Host Computer: Metallic 8-pin Mini DIN	Keyboard: Hardwired	N/A	N/A	N/A
7	1.5m	Round, Braid & Foil Shielded	Host Computer: Metallic 8-pin Mini DIN	Mouse: Hardwired	N/A	N/A	N/A



4.5 EMC Test Hardware and Software Measurement Equipment

TEST EQUIPMENT LIST - Emissions					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Maintenance Calibration Cycle
EMI Receiver - RF Section	Hewlett Packard	8546A	3325A00137	04/26/07	1 Year
EMI Receiver - RF Filter Section	Hewlett Packard	85460A	3330A00138	04/26/07	1 Year
10dB Attenuator	Pasternack	PE7014-10	N/A	06/30/07	1 Year
EUT LISN	Solar	9252-50-R-24-BNC	961025	03/30/08	2 Years
Accessory LISN	Solar	9252-50-R-24-BNC	961024	07/05/07	2 Years
Antenna - Biconical	EMCO	3110B	3383	04/06/07	1 Year
Antenna - Log Periodic	EMCO	3148	47943	06/22/07	1 Year
Spectrum Analyzer	Agilent	8564EC	4046A00387	08/15/06	1 Year
Antenna - Horn	EMCO	3115	2230	05/15/07	1 Year
Preamplifier	Agilent	8449B	3008A01573	12/08/06	1 Year
Cable	Semflex	X116BFSX10216	546	12/14/06	1 Year
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-02	003	10/21/06	1.5 Year
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	02/08/07	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	05/30/07	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	05/30/07	1 Year
12dB Attenuator	Narda	4779-12	203	01/09/07	1.5 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	03/24/07	1 Year

5.0 CONDITIONS DURING EMISSIONS MEASUREMENTS

5.1 General

All measurements were made according to the procedures defined in or referred to by the standard listed on the cover page of this report. The measurements were made in the operating mode producing the largest emissions consistent with normal operation and connected to the minimum configuration of auxiliary devices.

5.2 Conducted Emissions Test Setup

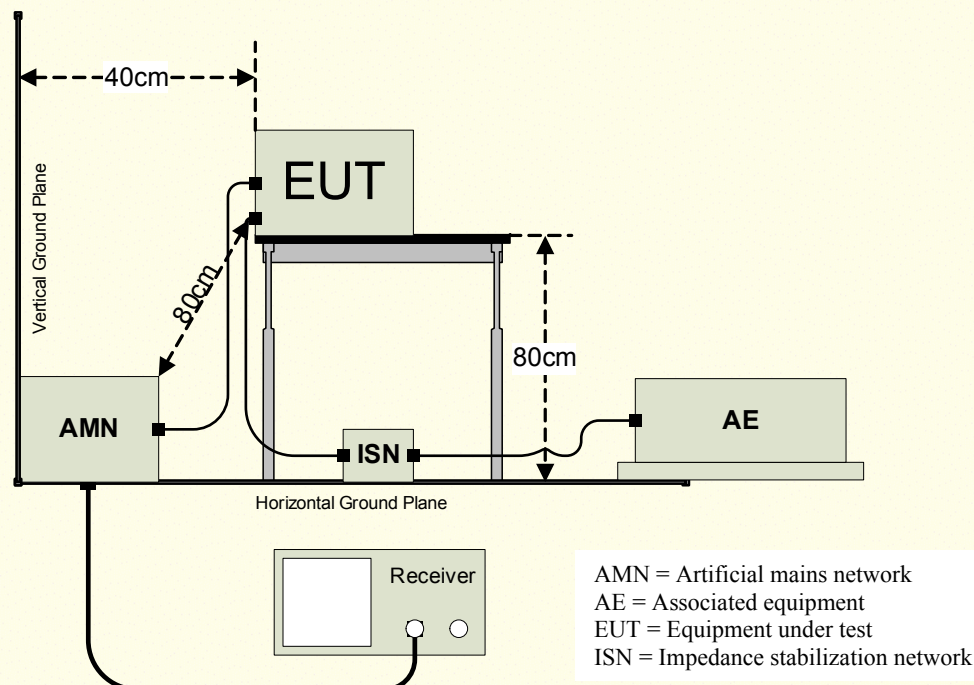
The following was the test configuration.

EUT signal cables that hung closer than 40 cm to the horizontal metal ground plane were folded back and forth forming a bundle 30 cm to 40 cm long. The power cord of the EUT was also bundled in the center and plugged into one of the artificial mains network (AMN). All peripheral equipment was powered from a second AMN via a multiple outlet strip placed at a distance on 10cm from each other. The AMN and ISN were positioned 80cm from the EUT. Signal cables that were not connected to an AE were terminated using the correct termination. If applicable, the current probe was placed at 0.1 m from the ISN.

Peak, quasi-peak and/or average detectors were used for testing performed between 150 kHz and 30 MHz. A swept frequency scan was performed for both Line 1 and Line 2. The six highest readings were compared against the limit and recorded in the data sheet along with a snapshot image of the sweep scan. The graphical scans in Appendix A only reflect peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak measurements.

Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.




5.3 Radiated Emissions Test Setup

The Open Area Test Site (OATS) was used for radiated emission testing. The receiving (Rx) antenna(s) was placed 10m from the nearest side of the EUT facing the Rx antenna. The EUT (if floor-standing) was placed directly on the flush-mounted 360 degree rotating turntable. The EUT (if table-top) was placed directly on an 80cm high non-metallic table, and the table was placed on the rotating turntable. During the initial EMI scan, all the suspect frequencies, i.e.; harmonics, broadband signals were checked with the Rx broadband antennas in both vertical and horizontal polarities. The biconical Rx, log periodic Rx, and horn Rx antennas were used from 30MHz – 299.99MHz, 300MHz – 1000MHz, and 1GHz – 18GHz respectively.

Upon completion of all harmonic and broadband measurements, the balance of any remaining frequencies was checked between 30MHz – 18GHz. Any signals appearing within 20 dB of the classification limit was measured. Each signal was maximized by first rotating the turntable at least 360 degrees and recording the azimuth in the data sheet. Lastly, the Rx antenna was raised and/or lowered to maximize the signal elevation. If the measured signal was obtained using the peak detector and that signal appeared within 3 dB of the regulatory limit line, then the same signal was re-measured using the quasi-peak detector on the EMI receiver. Both meter readings if necessary were recorded on the data sheet.

Climatic Conditions:

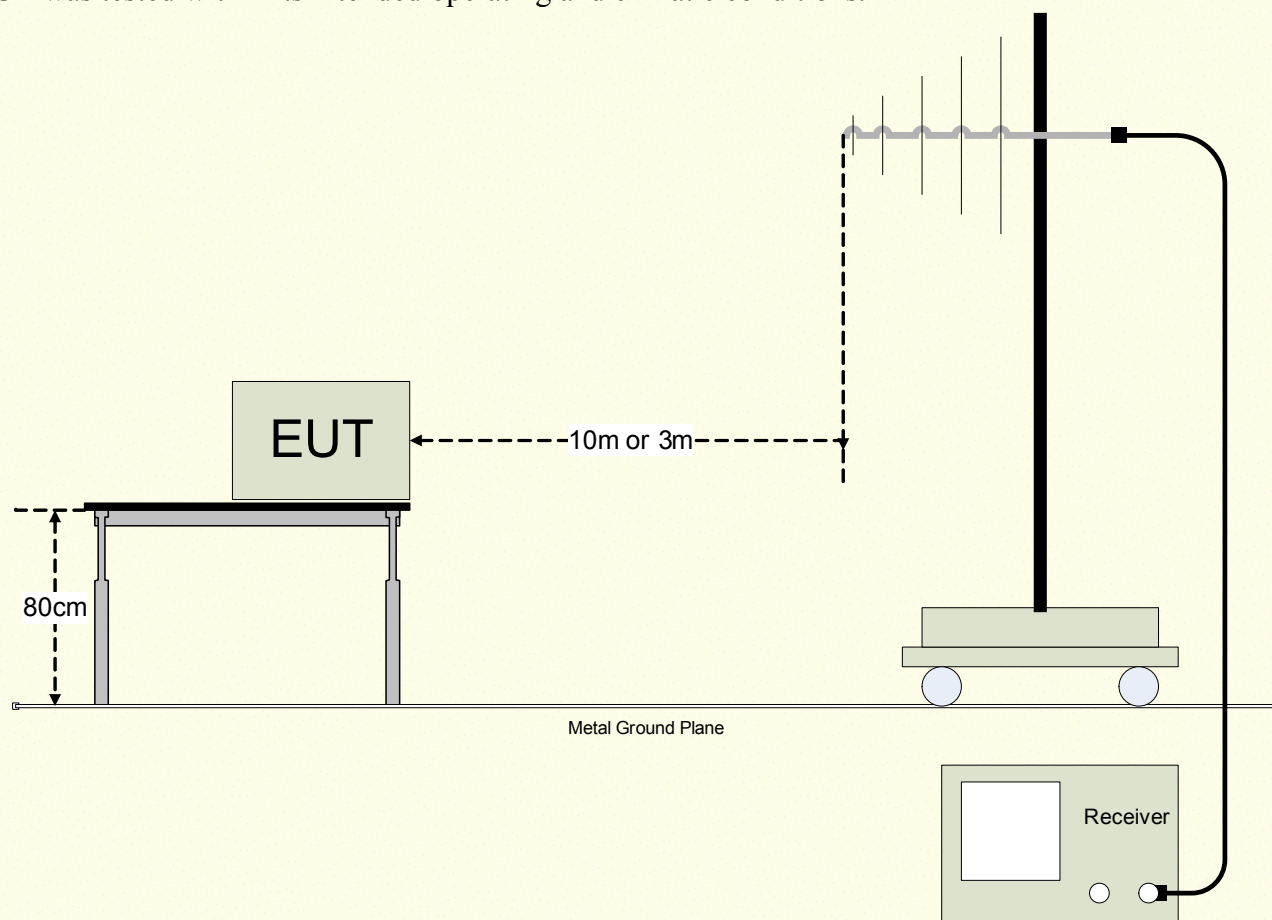The EUT was tested within its intended operating and climatic conditions.





APPENDIX A

TEST DATA



DC POWER PORT - CONDUCTED EMISSIONS TEST RESULTS

CLIENT:	Lantronix Inc.	DATE:	07/26/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	RJ
SERIAL NUMBER:	None	SITE #:	1
CONFIGURATION:	Tested with a DC power source & a Wanshih 2.89 dBi antenna.	TEMPERATURE:	26 deg. C
		HUMIDITY:	86%
		TIME:	10:40 AM

Description:	Conducted Power RF Emissions (150 kHz – 30 MHz)
Results:	PASSED Limits
Note:	Conducted Emissions Measurements were performed on the EUT with the power source set at the following voltage. • 9VDC • 12VDC • 30VDC

Conducted Limits		
Frequency (MHz)	Quasi-Peak Limit (dBuA)	Average Limit (dBuA)
0.15-0.5	40 to 30*	30 to 20*
0.5-30	30	20


*Decreases with the logarithm of the frequency.

DC Power Port – Conducted Emissions Test Results (Continued)

9VDC (LANTR-060623-12)

FCC Part 15 CLASS B CONDUCTED EMISSIONS

Freq. (MHz)	Meter Reading (dBuA)	Detector (PK/QP/AV)	Average Limit (dBuA)	Average Delta(dB)	Quasi-Peak Limit (dBuA)	Quasi-Peak Delta(dB)
1.1000	24.84	PK	20.00	4.84	30.00	-5.16
1.1000	4.19	AV	20.00	-15.81	30.00	-25.81
6.7200	21.19	PK	20.00	1.19	30.00	-8.81
6.7200	2.46	AV	20.00	-17.54	30.00	-27.54
6.9200	22.76	PK	20.00	2.76	30.00	-7.24
6.9200	3.38	AV	20.00	-16.62	30.00	-26.62
7.4000	20.95	PK	20.00	0.95	30.00	-9.05
7.4000	4.07	AV	20.00	-15.93	30.00	-25.93
7.8400	19.89	PK	20.00	-0.11	30.00	-10.11
7.8400	4.16	AV	20.00	-15.84	30.00	-25.84
10.4400	19.33	PK	20.00	-0.67	30.00	-10.67
10.4400	3.13	AV	20.00	-16.87	30.00	-26.87

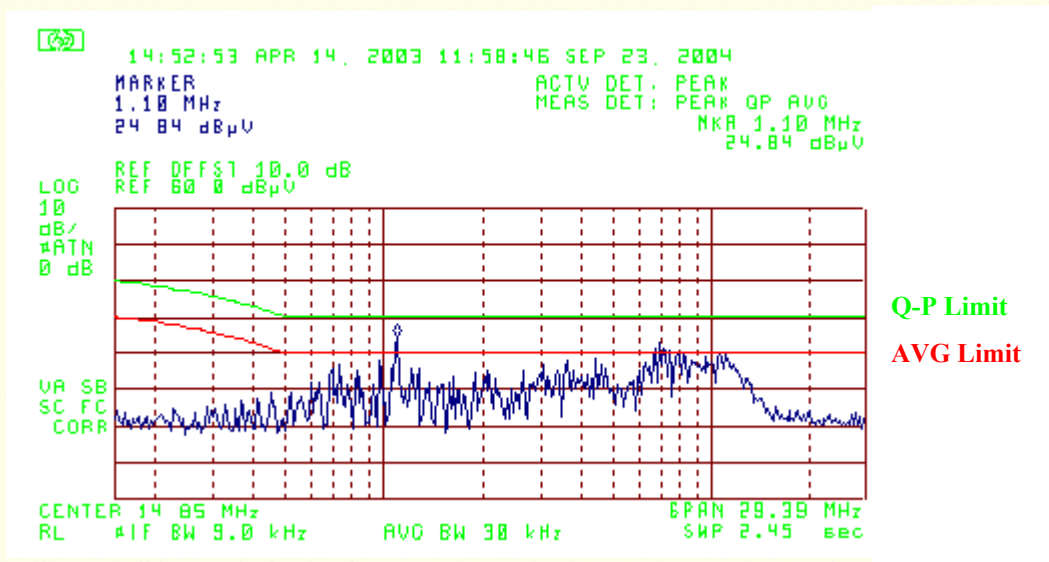


DC Power Port – Conducted Emissions Test Results (Continued)

12VDC (LANTR-060623-13)

FCC Part 15 CLASS B CONDUCTED EMISSIONS

Freq. (MHz)	Meter Reading (dBuA)	Detector (PK/QP/AV)	Average Limit (dBuA)	Average Delta(dB)	Quasi-Peak Limit (dBuA)	Quasi-Peak Delta(dB)
6.5300	17.41	PK	20.00	-2.59	30.00	-12.59
6.5300	12.62	AV	20.00	-7.38	30.00	-17.38
6.7200	18.36	PK	20.00	-1.64	30.00	-11.64
6.7200	8.77	AV	20.00	-11.23	30.00	-21.23
6.9200	21.26	PK	20.00	1.26	30.00	-8.74
6.9200	11.88	AV	20.00	-8.12	30.00	-18.12
7.8400	20.75	PK	20.00	0.75	30.00	-9.25
7.8400	10.24	AV	20.00	-9.76	30.00	-19.76
10.1400	17.32	PK	20.00	-2.68	30.00	-12.68
10.1400	9.94	AV	20.00	-10.06	30.00	-20.06
10.6100	17.11	PK	20.00	-2.89	30.00	-12.89
10.6100	11.33	AV	20.00	-8.67	30.00	-18.67

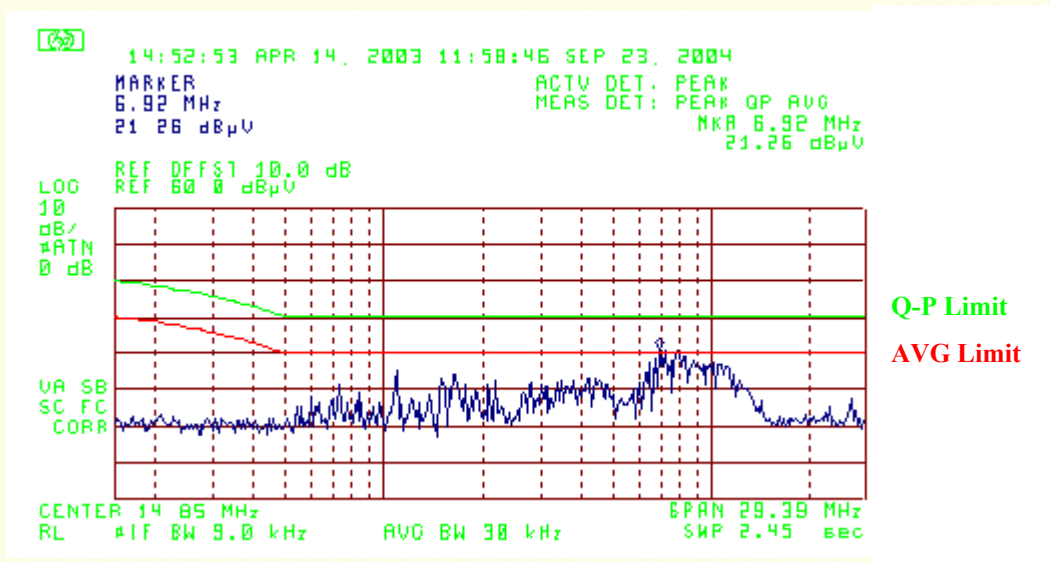


DC Power Port – Conducted Emissions Test Results (Continued)

30VDC (LANTR-060623-14)

FCC Part 15 CLASS B CONDUCTED EMISSIONS

Freq. (MHz)	Meter Reading (dBuA)	Detector (PK/QP/AV)	Average Limit (dBuA)	Average Delta(dB)	Quasi-Peak Limit (dBuA)	Quasi-Peak Delta(dB)
3.5700	20.63	PK	20.00	0.63	30.00	-9.37
3.5700	16.16	AV	20.00	-3.84	30.00	-13.84
7.2100	20.70	PK	20.00	0.70	30.00	-9.30
7.2100	13.42	AV	20.00	-6.58	30.00	-16.58
7.5000	20.16	PK	20.00	0.16	30.00	-9.84
7.5000	11.33	AV	20.00	-8.67	30.00	-18.67
7.9700	21.28	PK	20.00	1.28	30.00	-8.72
7.9700	16.19	AV	20.00	-3.81	30.00	-13.81
8.5800	20.39	PK	20.00	0.39	30.00	-9.61
8.5800	4.20	AV	20.00	-15.80	30.00	-25.80
10.6100	19.68	PK	20.00	-0.32	30.00	-10.32
10.6100	10.80	AV	20.00	-9.20	30.00	-19.20

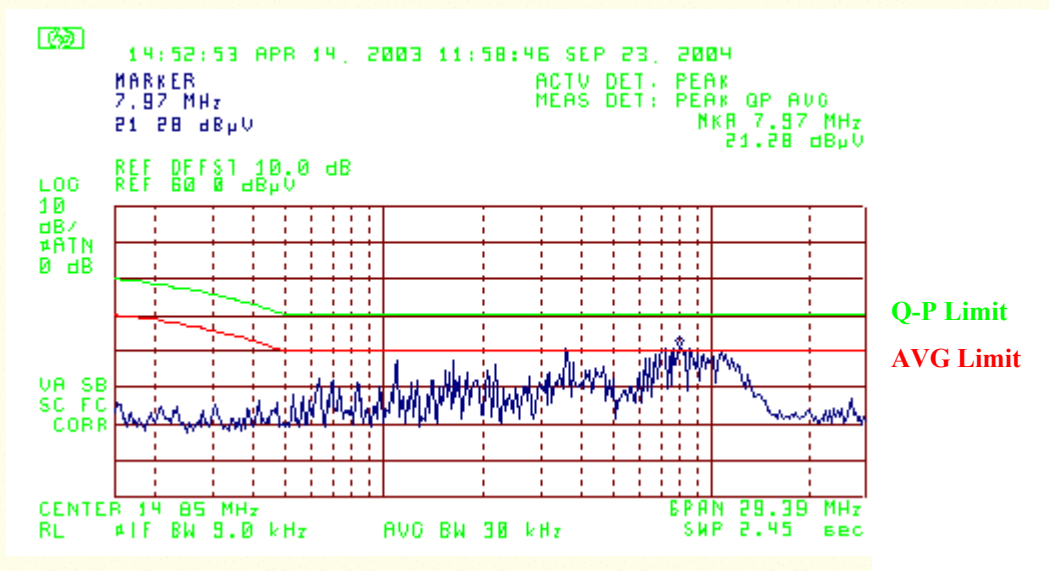



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Lantronix Inc.	DATE:	07/21/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	RJ
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	25 deg. C
		HUMIDITY:	61% RH
		TIME:	9:30 AM

Description:	Radiated RF Emissions (30 MHz – 1000 MHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	During preliminary scans, there wasn't any difference which channel or data rate was used with the EUT; therefore only 802.11b mode at Channel 1 with a data rate of 1 Mbps was used for final testing.

Radiated Limits	
Frequency (MHz)	Quasi-Peak Limit (dBuV)
30-88	40
88-216	43.52
216-960	46.02
960-1000	54

Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F + C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

Wanshih Antenna @ 120VAC/60Hz (LANTR-060623-07)

RADIATED EMISSIONS - Horizontal Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>10 Meter Distance Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
81.73	10.80	350	135			1.52	9.33	10.46	32.12	40.00	-7.88
200.00	11.42	350	135	8.06	Q	2.62	15.00	10.46	39.50	43.50	-4.00
244.00	5.74	350	135			2.91	17.18	10.46	36.30	46.00	-9.70
273.45	8.10	350	225			3.11	19.18	10.46	32.75	46.00	-13.25
350.00	12.80	375	225			3.52	15.20	10.46	41.98	46.00	-4.02
424.99	10.92	350	225			3.86	16.20	10.46	41.44	46.00	-4.56
475.00	7.83	375	135			4.10	18.00	10.46	40.39	46.00	-5.61
550.00	4.93	350	135			4.40	19.00	10.46	38.79	46.00	-7.21

RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>10 Meter Distance Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
200.00	10.05	100	180	8.27	Q	2.62	16.30	10.46	39.43	43.50	-4.07
240.00	9.94	100	135			2.90	18.02	10.46	41.32	46.00	-4.68
273.40	8.39	100	135			3.11	20.08	10.46	33.65	46.00	-12.35
350.00	9.69	100	180			3.52	15.50	10.46	39.17	46.00	-6.83
424.99	8.10	100	135			3.86	16.20	10.46	38.62	46.00	-7.38
475.00	5.94	100	225			4.10	17.80	10.46	38.30	46.00	-7.70
550.00	3.60	100	135			4.40	18.90	10.46	37.36	46.00	-8.64

NOTE: The measurements were taken at 10 meters and extrapolated to 3 meters.



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Lantronix Inc.	DATE:	07/19/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	JC/RJ
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested in 802.11b (2400-2483.5 MHz) mode with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	31 deg. C
		HUMIDITY:	69% RH
		TIME:	2:30 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F + C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous TX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-04

RADIATED EMISSIONS - Horizontal Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2412.00	57.33	100	225			3.19	29.50	90.02			Ch. 1
2412.00				53.44	A	3.19	29.50	86.13			
2437.00	57.33	150	225			3.20	29.59	90.12			Ch. 6
2437.00				53.88	A	3.20	29.59	86.67			
2462.00	58.83	150	225			3.22	29.67	91.72			Ch. 11
2462.00				55.35	A	3.22	29.67	88.24			

RADIATED EMISSIONS – Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2412.00	72.00	100	90			3.19	29.04	104.22			Ch. 1
2412.00				68.40	A	3.19	29.04	100.62			
2437.00	71.33	100	90			3.20	29.11	103.65			Ch. 6
2437.00				67.96	A	3.20	29.11	100.28			
2462.00	72.67	100	90			3.22	29.19	105.08			Ch. 11
2462.00				69.15	A	3.22	29.19	101.56			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1 & 11

Continuous TX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-04

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							38.02	74.00	-35.98	Ch. 1
2390.00				A			25.96	54.00	-28.04	
2400.00	28.83	100	225		3.18	29.46	61.47	70.02	-8.55	
2483.50							41.06	74.00	-32.94	Ch. 11
2483.50				A			30.74	54.00	-23.26	

RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							52.22	74.00	-21.78	Ch. 1
2390.00				A			40.45	54.00	-13.55	
2400.00	30.33	100	90		3.18	29.00	62.51	84.22	-21.71	
2483.50							54.42	74.00	-19.58	Ch. 11
2483.50				A			44.06	54.00	-9.94	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta_m$$

Where

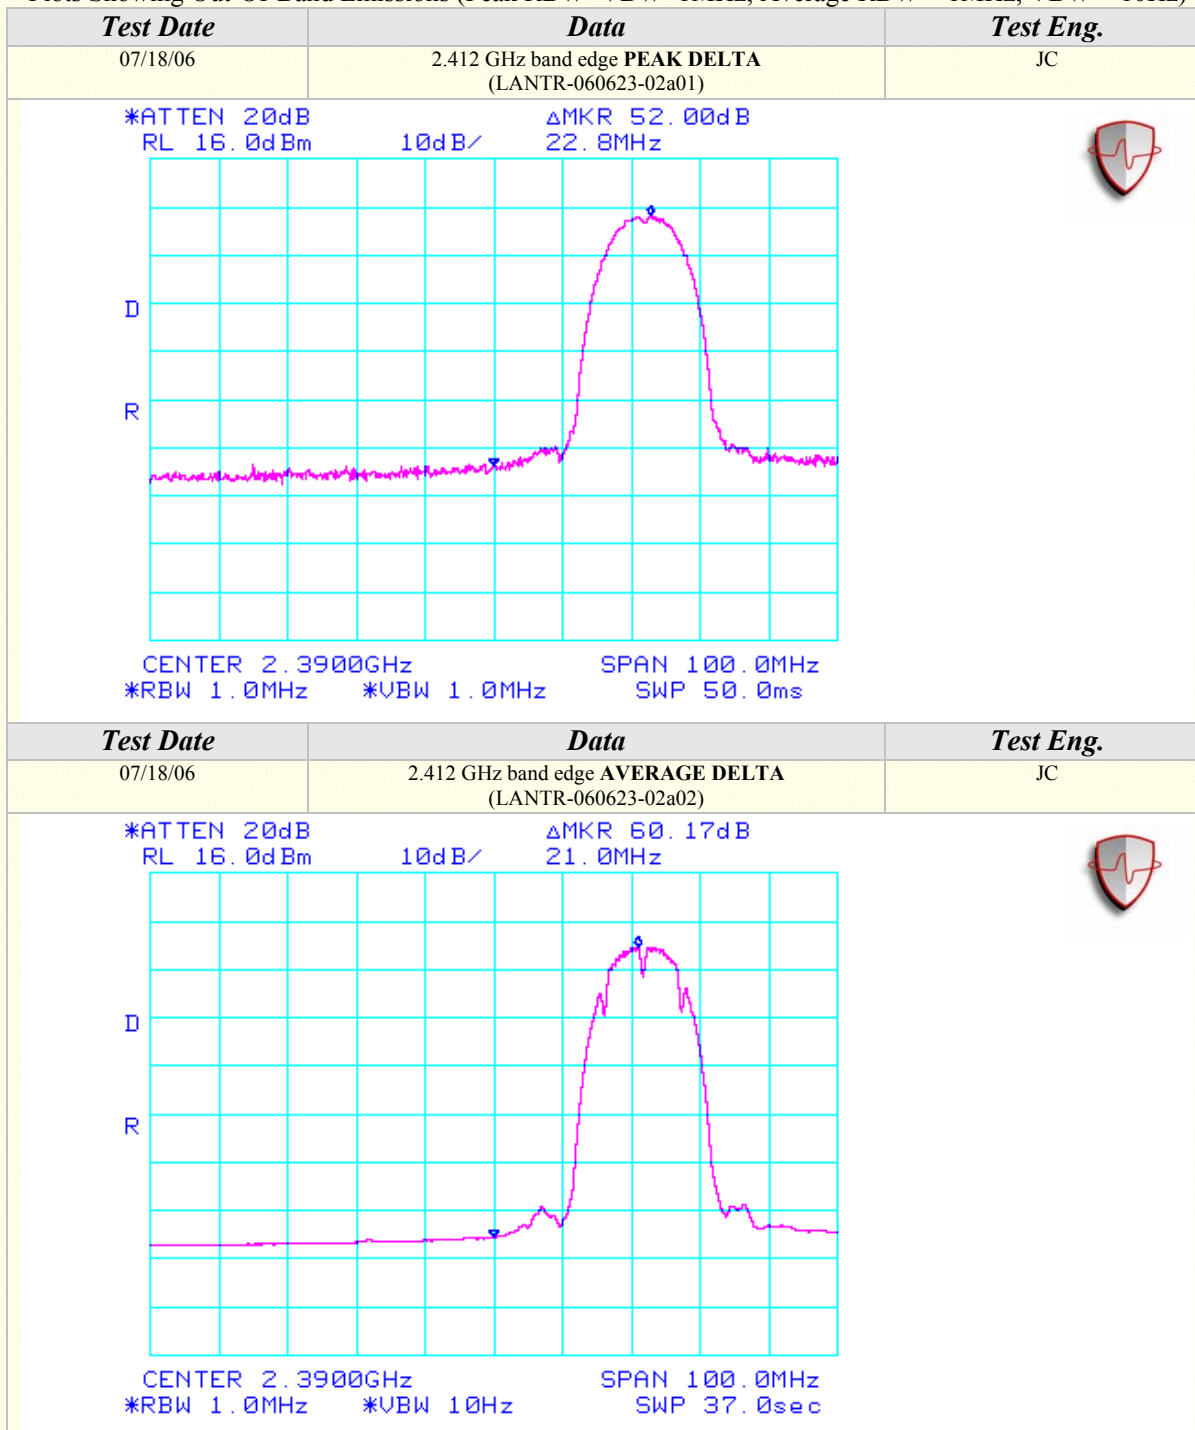
BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)


Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



Radiated Emissions Test Results (Continued)

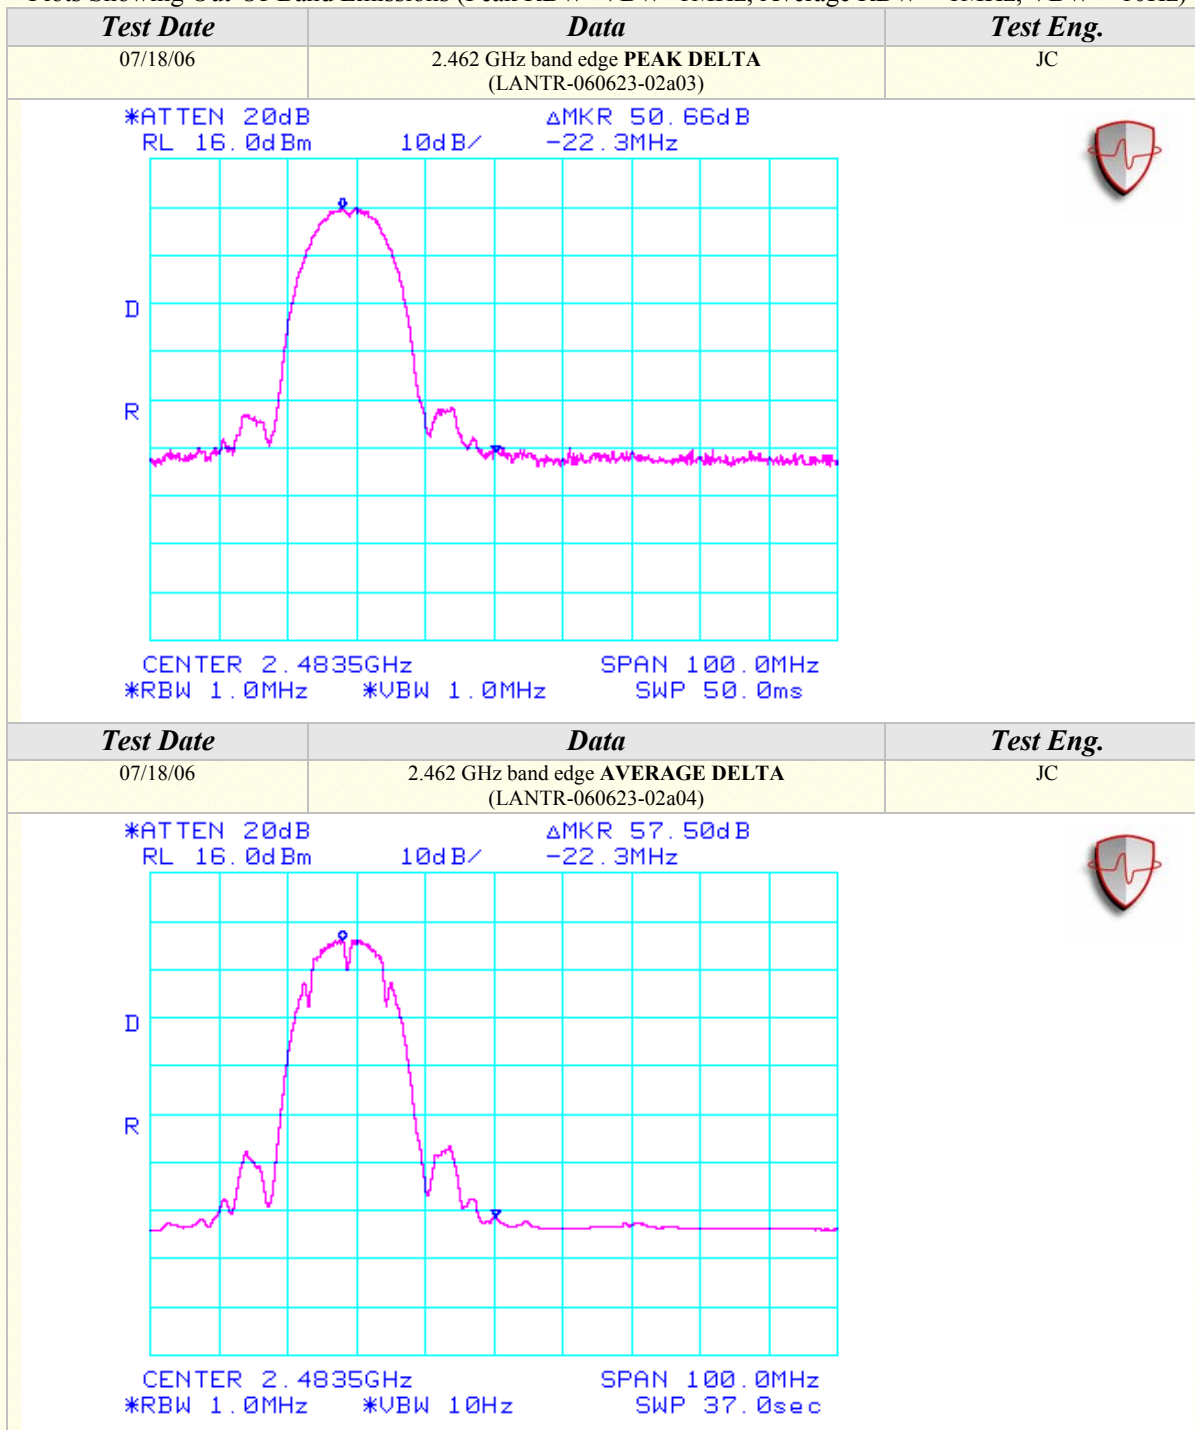Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)





Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous TX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-05

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Comments
1000.00	52.67	100	45			38.51	2.04	24.40	40.60	74.00	-33.40	Ch. 1
1000.00				45.08	A	38.51	2.04	24.40	33.01	54.00	-20.99	
3216.00	46.17	100	135			36.69	3.71	31.72	44.90	70.02	-25.12	
4824.00	48.00	150	135			36.28	4.57	33.91	50.19	74.00	-23.81	
4824.00				38.75	A	36.28	4.57	33.91	40.94	54.00	-13.06	
1000.00	53.00	100	45			38.51	2.04	24.40	40.93	74.00	-33.07	Ch. 6
1000.00				45.23	A	38.51	2.04	24.40	33.16	54.00	-20.84	
3249.32	46.00	100	135			36.69	3.72	31.80	44.84	70.12	-25.28	
4873.99	46.33	125	135			36.28	4.59	34.02	48.66	74.00	-25.34	
4873.99				36.39	A	36.28	4.59	34.02	38.72	54.00	-15.28	
1000.00	53.33	100	0			38.51	2.04	24.40	41.26	74.00	-32.74	Ch. 11
1000.00				45.97	A	38.51	2.04	24.40	33.90	54.00	-20.10	
3282.66	46.00	100	135			36.68	3.74	31.88	44.95	71.72	-26.77	
4924.00	47.50	100	135			36.27	4.61	34.13	49.98	74.00	-24.02	
4924.00				38.68	A	36.27	4.61	34.13	41.16	54.00	-12.84	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Comments
1000.00	53.33	100	135			38.51	2.04	24.60	41.46	74.00	-32.54	Ch. 1
1000.00				46.54	A	38.51	2.04	24.60	34.67	54.00	-19.33	
3216.00	50.50	100	270			36.69	3.71	31.28	48.79	84.22	-35.43	
4824.01	50.50	100	180			36.28	4.57	33.78	52.56	74.00	-21.44	
4824.01				44.23	A	36.28	4.57	33.78	46.29	54.00	-7.71	
1000.00	53.50	100	135			38.51	2.04	24.60	41.63	74.00	-32.37	Ch. 6
1000.00				46.38	A	38.51	2.04	24.60	34.51	54.00	-19.49	
3249.32	46.67	100	315			36.69	3.72	31.35	45.06	83.65	-38.59	
4873.99	50.33	100	225			36.28	4.59	33.87	52.52	74.00	-21.48	
4873.99				45.96	A	36.28	4.59	33.87	48.15	54.00	-5.85	
1000.00	53.17	100	135			38.51	2.04	24.60	41.30	74.00	-32.70	Ch. 11
1000.00				46.06	A	38.51	2.04	24.60	34.19	54.00	-19.81	
3282.66	47.83	100	315			36.68	3.74	31.42	46.32	85.08	-38.76	
4924.00	52.17	100	225			36.27	4.61	33.96	54.48	74.00	-19.52	
4924.00				47.88	A	36.27	4.61	33.96	50.19	54.00	-3.81	



Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous RX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-05

RADIATED EMISSIONS - Horizontal Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Preamplifier Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +/- FAIL</i>
--------------------	-----------------------------	----------------------------	--------------------------	-------------------------------	---------------------------------	--------------------------	-------------------------	---------------------------------	----------------------	---------------------------

No Signals Found

RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Preamplifier Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +/- FAIL</i>
--------------------	-----------------------------	----------------------------	--------------------------	-------------------------------	---------------------------------	--------------------------	-------------------------	---------------------------------	----------------------	---------------------------

No Signals Found



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Lantronix Inc.	DATE:	07/19/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	JC/RJ
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested in 802.11g (2400-2483.5 MHz) mode with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	31 deg. C
		HUMIDITY:	69% RH
		TIME:	2:30 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

Fundamental Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 6, 10, & 11
Continuous TX at MAIN Antenna port with Wanshih Antenna
Aegis Labs, Inc. File #: LANTR-060623-04

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	56.17	100	225			3.19	29.50	88.86			Ch. 1
2412.00				47.67	A	3.19	29.50	80.36			
2437.00	57.67	100	225			3.20	29.59	90.46			Ch. 6
2437.00				48.93	A	3.20	29.59	81.72			
2457.00	59.17	125	225			3.22	29.65	92.04			Ch. 10
2457.00				50.50	A	3.22	29.65	83.37			
2462.00	57.50	125	225			3.22	29.67	90.39			Ch. 11
2462.00				48.93	A	3.22	29.67	81.82			

RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	70.00	100	90			3.19	29.04	102.22			Ch. 1
2412.00				61.46	A	3.19	29.04	93.68			
2437.00	72.50	100	90			3.20	29.11	104.82			Ch. 6
2437.00				63.86	A	3.20	29.11	96.18			
2457.00	72.67	100	90			3.22	29.17	105.06			Ch. 10
2457.00				63.82	A	3.22	29.17	96.21			
2462.00	72.17	100	90			3.22	29.19	104.58			Ch. 11
2462.00				63.39	A	3.22	29.19	95.80			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1, 10, & 11

Continuous TX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-04

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							47.69	74.00	-26.31	Ch. 1
2390.00				A			34.03	54.00	-19.97	
2400.00	33.83	100	225		3.18	29.46	66.47	68.86	-2.39	
2483.50							44.71	74.00	-29.29	Ch. 10
2483.50				A			33.04	54.00	-20.96	
2483.50							46.39	74.00	-27.61	Ch. 11
2483.50				A			35.15	54.00	-18.85	

RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							61.05	74.00	-12.95	Ch. 1
2390.00				A			47.35	54.00	-6.65	
2400.00	44.17	100	90		3.18	29.00	76.35	82.22	-5.87	
2483.50							57.73	74.00	-16.27	Ch. 10
2483.50				A			45.88	54.00	-8.12	
2483.50							60.58	74.00	-13.42	Ch. 11
2483.50				A			49.13	54.00	-4.87	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta m$$

Where

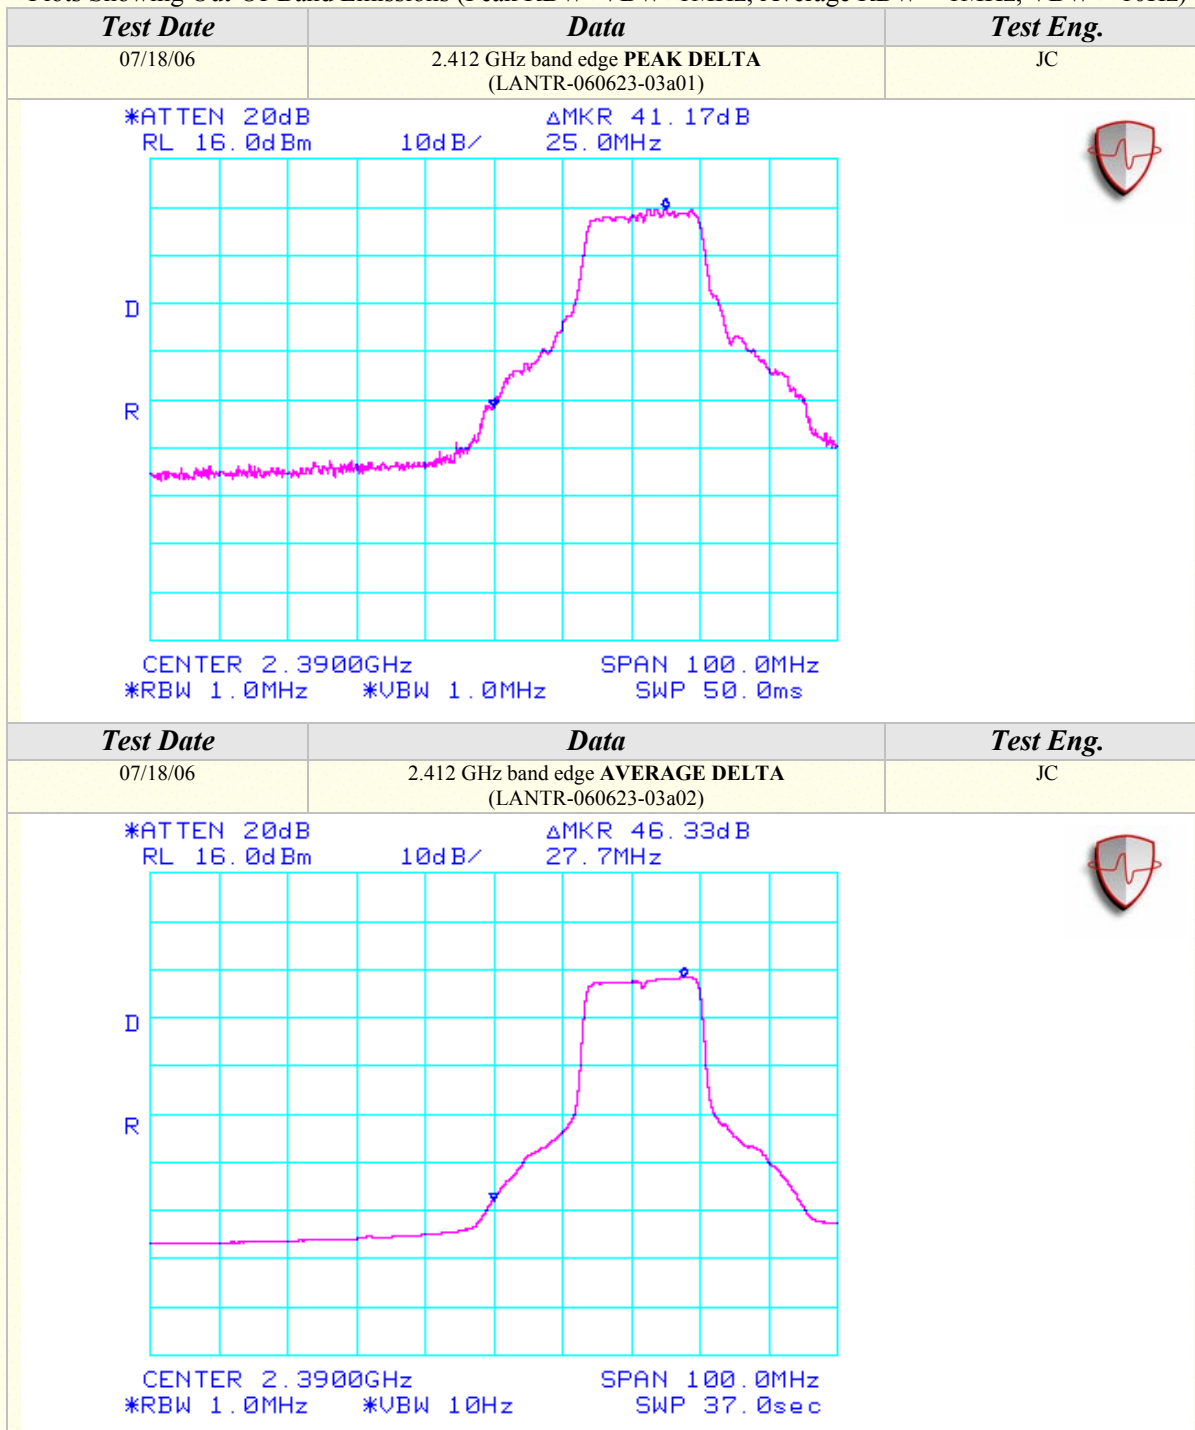
BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)


Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)




Radiated Emissions Test Results (Continued)

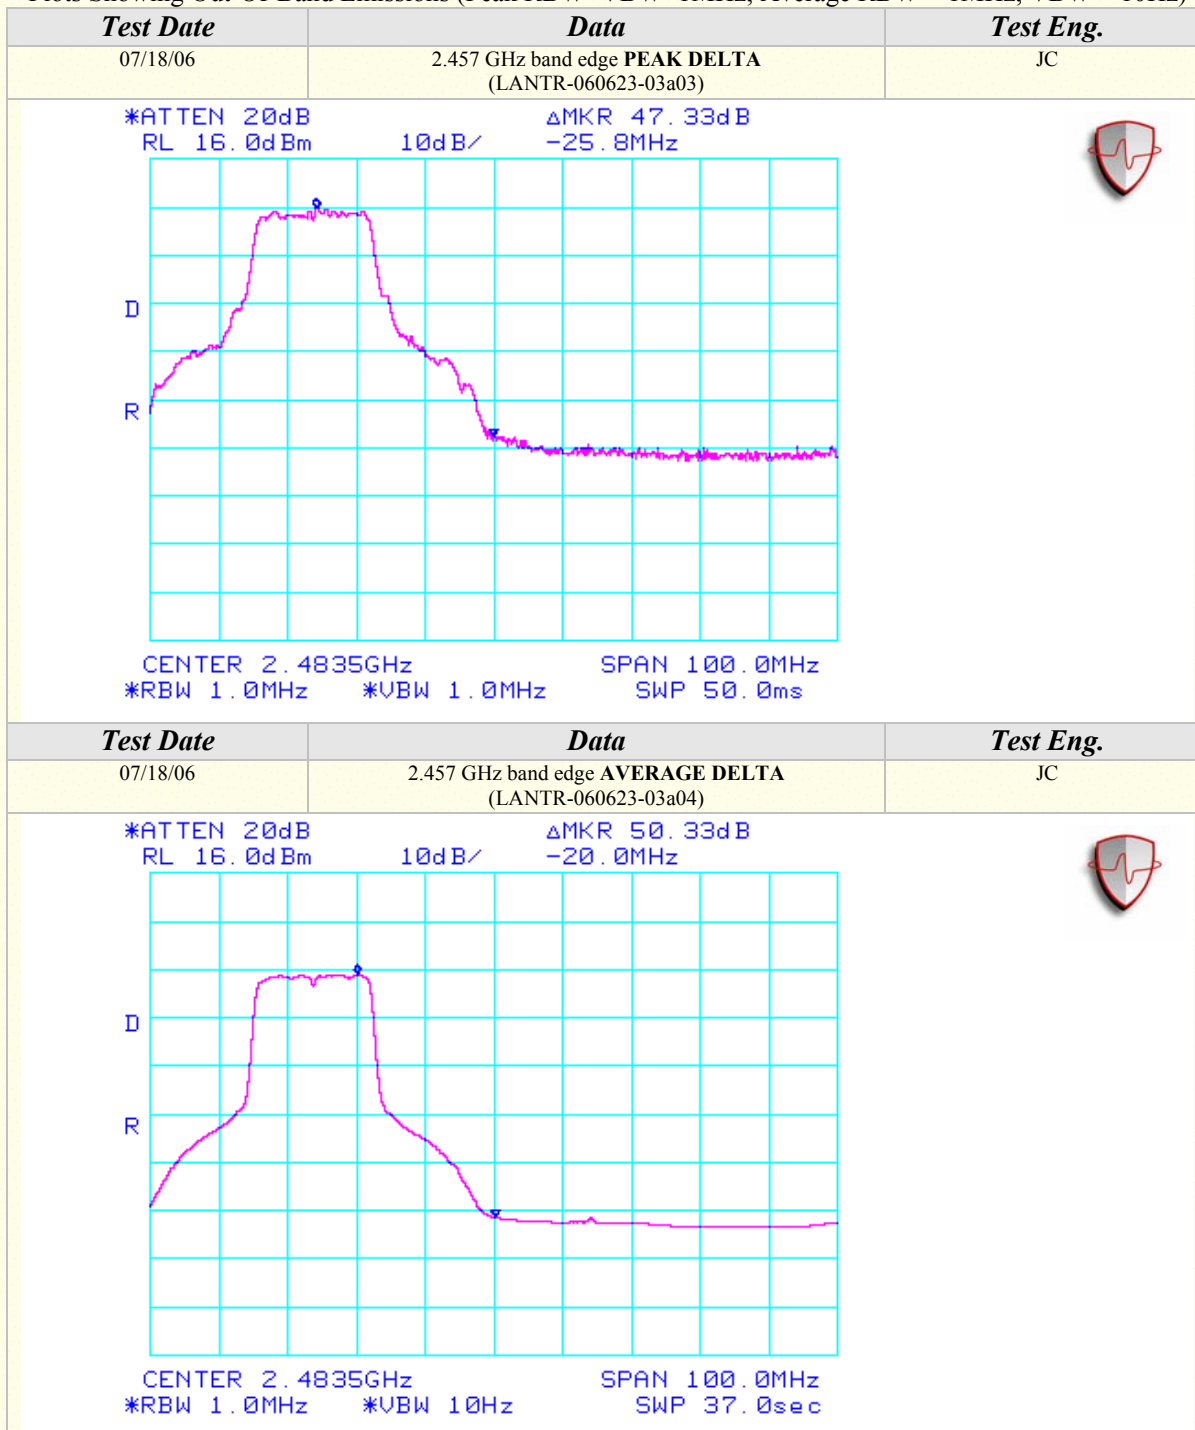Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



Radiated Emissions Test Results (Continued)

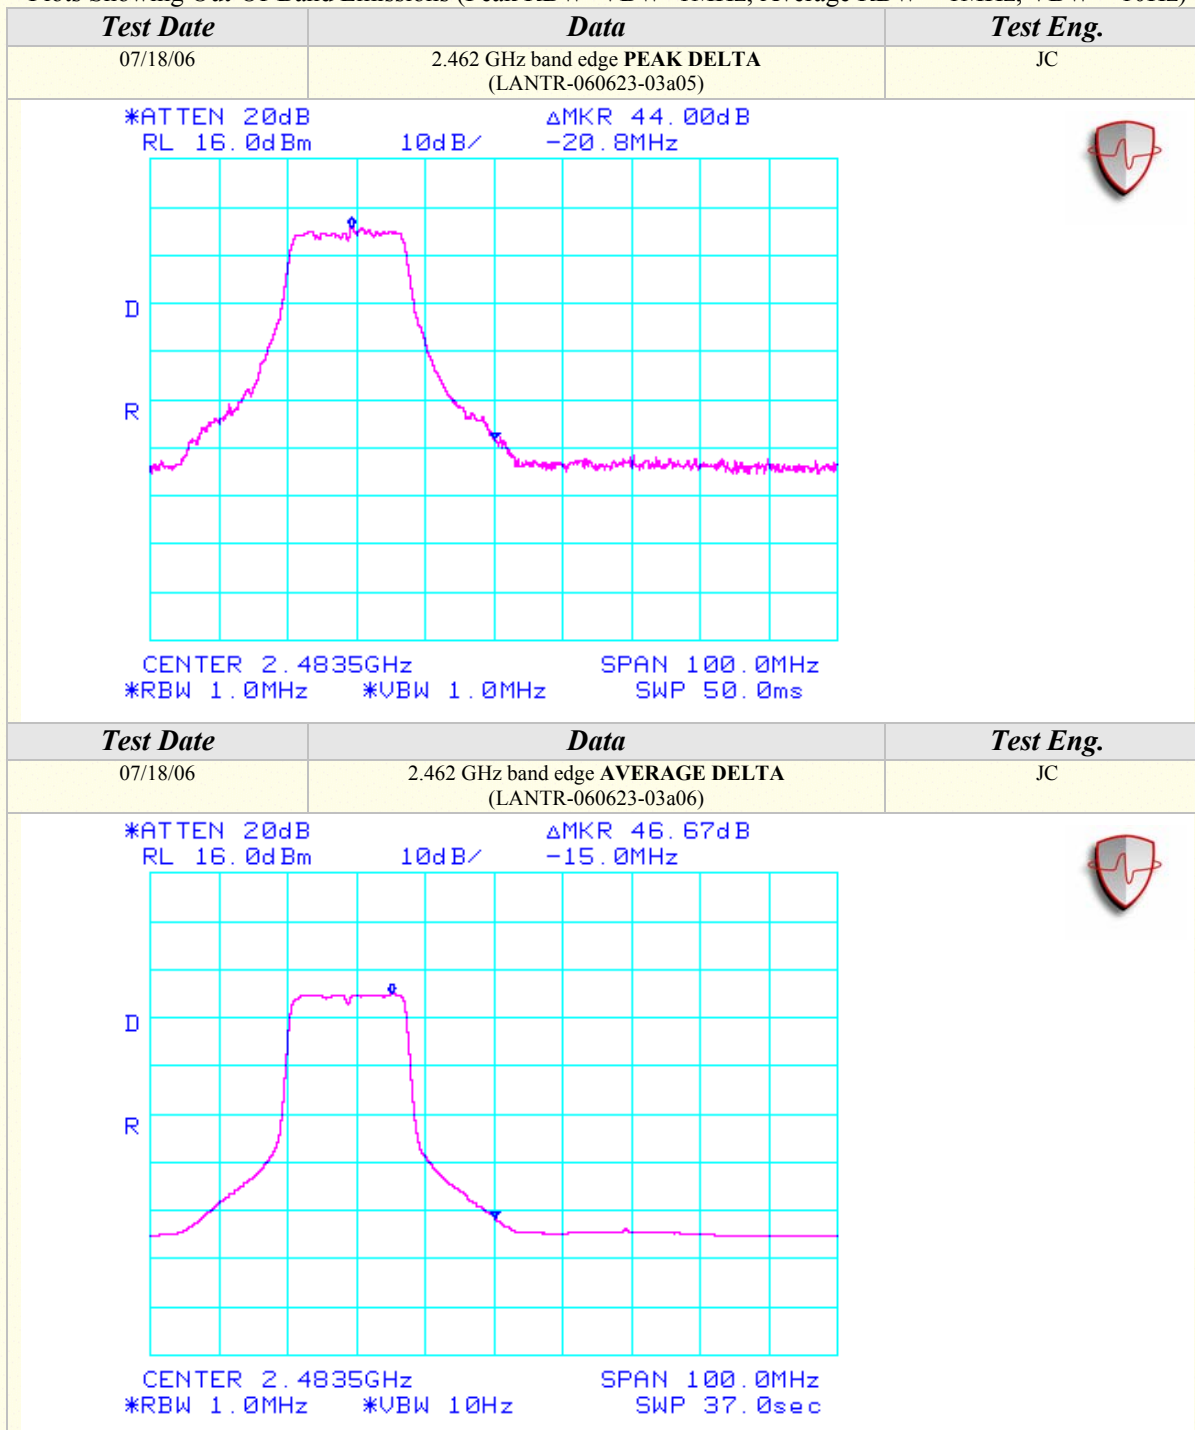Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)





Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous TX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-05

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Comments
1000.00	52.50	100	0			38.51	2.04	24.40	40.43	74.00	-33.57	Ch. 1
1000.00				44.33	A	38.51	2.04	24.40	32.26	54.00	-21.74	
3216.00	49.83	100	135			36.69	3.71	31.72	48.56	68.86	-20.30	
4824.00	45.17	100	135			36.28	4.57	33.91	47.36	74.00	-26.64	
4824.00				35.68	A	36.28	4.57	33.91	37.87	54.00	-16.13	
1000.00	52.00	100	45			38.51	2.04	24.40	39.93	74.00	-34.07	Ch. 6
1000.00				44.08	A	38.51	2.04	24.40	32.01	54.00	-21.99	
3249.32	46.00	100	135			36.69	3.72	31.80	44.84	70.46	-25.62	
4873.99	44.33	100	135			36.28	4.59	34.02	46.66	74.00	-27.34	
4873.99				35.18	A	36.28	4.59	34.02	37.51	54.00	-16.49	
1000.00	52.17	100	0			38.51	2.04	24.40	40.10	74.00	-33.90	Ch. 11
1000.00				44.63	A	38.51	2.04	24.40	32.56	54.00	-21.44	
3282.66	46.17	100	135			36.68	3.74	31.88	45.12	70.39	-25.27	
4924.00	45.67	100	180			36.27	4.61	34.13	48.15	74.00	-25.85	
4924.00				35.86	A	36.27	4.61	34.13	38.34	54.00	-15.66	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Comments
1000.00	53.00	100	225			38.51	2.04	24.60	41.13	74.00	-32.87	Ch. 1
1000.00				44.48	A	38.51	2.04	24.60	32.61	54.00	-21.39	
3216.00	51.67	100	270			36.69	3.71	31.28	49.96	82.22	-32.26	
4824.01	47.50	100	225			36.28	4.57	33.78	49.56	74.00	-24.44	
4824.01				36.56	A	36.28	4.57	33.78	38.62	54.00	-15.38	
1000.00	52.83	100	225			38.51	2.04	24.60	40.96	74.00	-33.04	Ch. 6
1000.00				44.97	A	38.51	2.04	24.60	33.10	54.00	-20.90	
3249.32	47.50	100	270			36.69	3.72	31.35	45.89	84.82	-38.93	
4873.99	46.00	100	225			36.28	4.59	33.87	48.19	74.00	-25.81	
4873.99				35.94	A	36.28	4.59	33.87	38.13	54.00	-15.87	
1000.00	52.83	100	225			38.51	2.04	24.60	40.96	74.00	-33.04	Ch. 11
1000.00				44.61	A	38.51	2.04	24.60	32.74	54.00	-21.26	
3282.66	47.33	100	180			36.68	3.74	31.42	45.82	84.58	-38.76	
4924.00	45.33	100	135			36.27	4.61	33.96	47.64	74.00	-26.36	
4924.00				35.13	A	36.27	4.61	33.96	37.44	54.00	-16.56	



Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1, 6, & 11

Continuous RX at MAIN Antenna port with Wanshih Antenna

Aegis Labs, Inc. File #: LANTR-060623-05

RADIATED EMISSIONS - Horizontal Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Preamplifier Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +/- FAIL</i>
--------------------	-----------------------------	----------------------------	--------------------------	-------------------------------	---------------------------------	--------------------------	-------------------------	---------------------------------	----------------------	---------------------------

No Signals Found

RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Preamplifier Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +/- FAIL</i>
--------------------	-----------------------------	----------------------------	--------------------------	-------------------------------	---------------------------------	--------------------------	-------------------------	---------------------------------	----------------------	---------------------------

No Signals Found



PEAK TRANSMIT POWER

CLIENT:	Lantronix Inc.	DATE:	07/19/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	JC
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	22 deg. C
		HUMIDITY:	42% RH
		TIME:	10:30 AM

Description:	The maximum peak output power of the intentional radiator shall not exceed 1 watt.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. • 120VAC / 60 Hz.

Peak Transmit Power Limits	
Frequency (MHz)	Output Power (W)
2412-2462	1



Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
802.11b	1	2412	1	14.25	26.61	16.57	45.39
802.11b	1	2412	5.5	14.08	25.59	15.83	38.28
802.11b	1	2412	11	13.98	25.00	16.23	41.98
802.11b	6	2437	1	14.40	27.54	16.71	46.88
802.11b	6	2437	5.5	14.29	26.85	15.98	39.63
802.11b	6	2437	11	14.21	26.36	16.40	43.65
802.11b	11	2462	1	14.46	27.93	16.67	46.45
802.11b	11	2462	5.5	14.52	28.31	16.20	41.69
802.11b	11	2462	11	14.29	26.85	16.41	43.75
802.11g	1	2412	6	13.83	24.15	20.49	111.94
802.11g	1	2412	36	13.72	23.55	20.36	108.64
802.11g	1	2412	54	13.75	23.71	20.39	109.40
802.11g	6	2437	6	14.11	25.76	20.31	107.40
802.11g	6	2437	36	14.03	25.29	20.27	106.41
802.11g	6	2437	54	13.88	24.43	20.18	104.23
802.11g	10	2457	6	14.23	26.49	20.35	108.39
802.11g	10	2457	36	14.19	26.24	20.29	106.91
802.11g	10	2457	54	14.05	25.41	20.07	101.62
802.11g	11	2462	6	12.32	17.06	19.54	89.95
802.11g	11	2462	36	12.21	16.63	19.45	88.10
802.11g	11	2462	54	12.13	16.33	19.33	85.70

NOTE: The output power measurement is conducted.





6dB EMISSIONS BANDWIDTH

CLIENT:	Lantronix Inc.	DATE:	07/18/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	JC
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	22 deg. C
		HUMIDITY:	45% RH
		TIME:	11:00 AM

Description:	The minimum 6 dB bandwidth shall be at least 500 kHz.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. • 120VAC / 60 Hz.


6 dB Emissions Bandwidth (Continued)

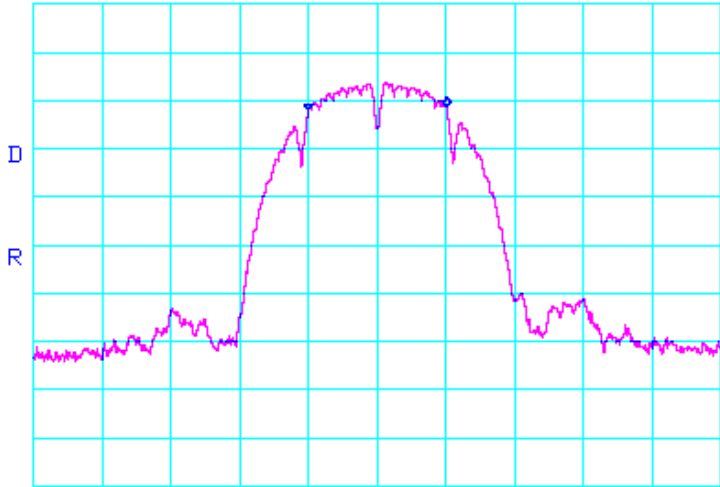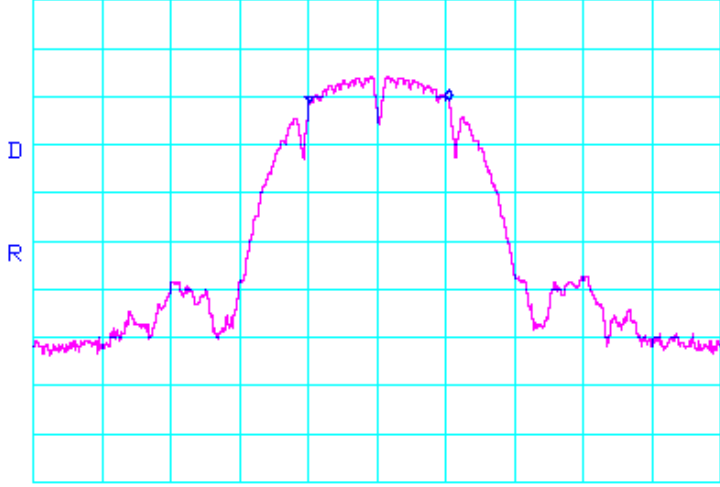802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-02b1)	JC
*ATTEN 20dB ΔMKR .67dB RL 16.0dBm 10dB/ 10.08MHz  CENTER 2.41200GHz SPAN 50.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms		
Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-02b2)	JC
*ATTEN 20dB ΔMKR .50dB RL 16.0dBm 10dB/ 10.17MHz  CENTER 2.43700GHz SPAN 50.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms		





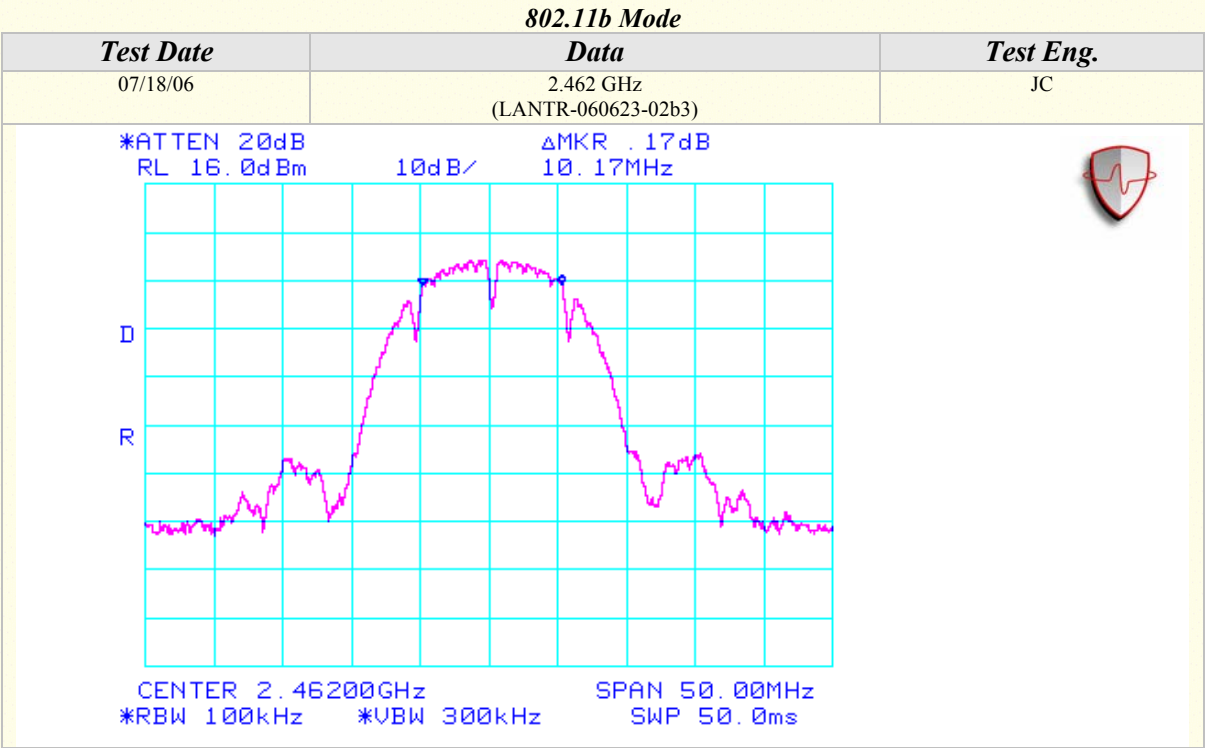6 dB Emissions Bandwidth (Continued)



6 dB Emissions Bandwidth (Continued)

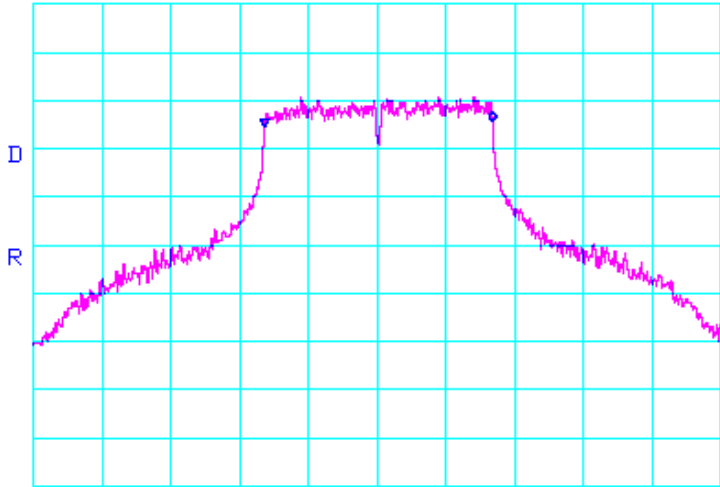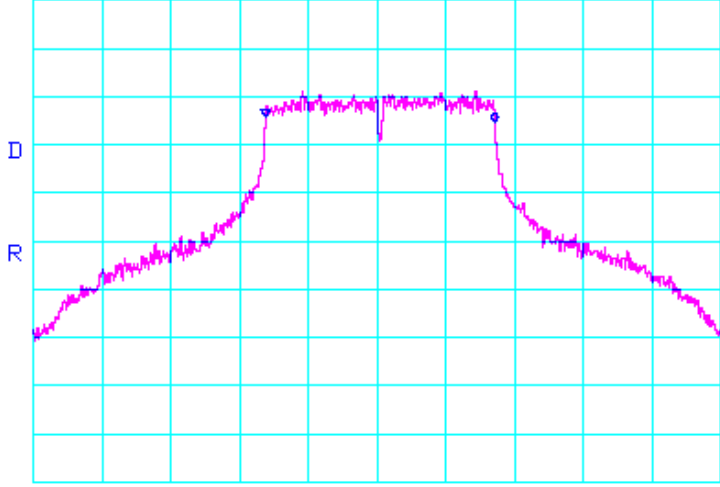
802.11g Mode

Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-03b1)	JC
*ATTEN 20dB ΔMKR 1.00dB RL 16.0dBm 10dB/ 16.58MHz  CENTER 2.41200GHz SPAN 50.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms		
Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-03b2)	JC
*ATTEN 20dB ΔMKR -1.16dB RL 16.0dBm 10dB/ 16.67MHz  CENTER 2.43700GHz SPAN 50.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms		



6 dB Emissions Bandwidth (Continued)

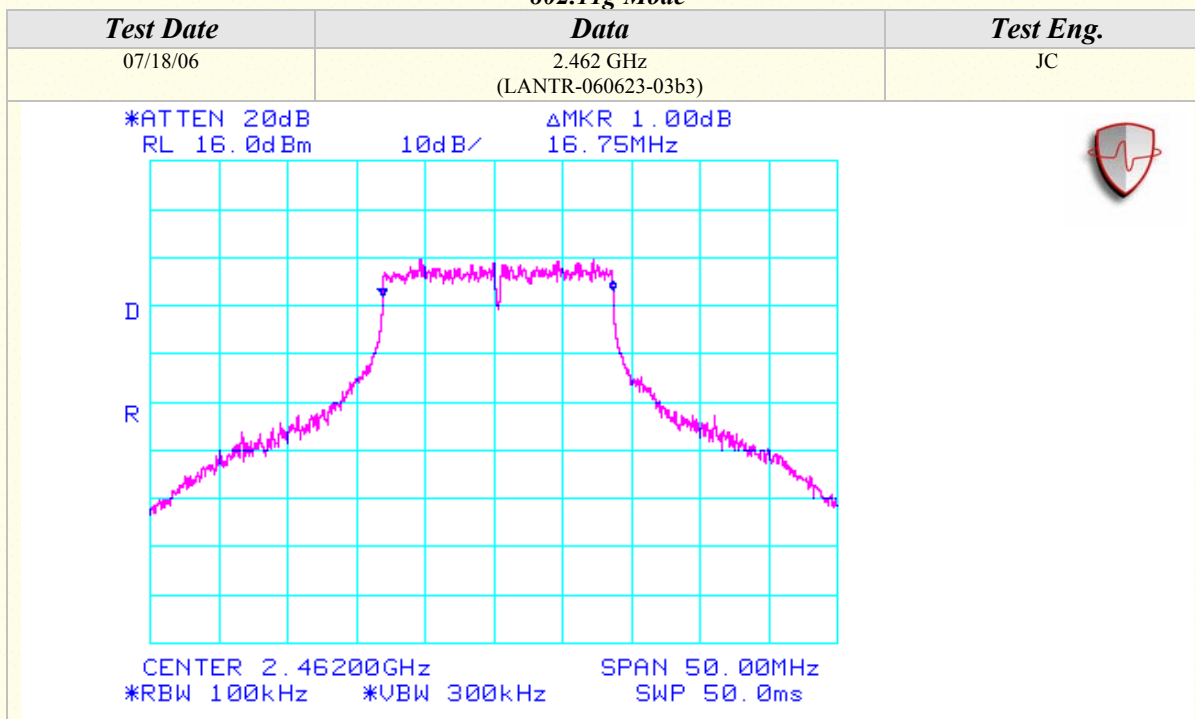802.11g Mode





PEAK POWER SPECTRAL DENSITY



CLIENT:	Lantronix Inc.	DATE:	07/18/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	JC
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	22 deg. C
		HUMIDITY:	45% RH
		TIME:	11:00 AM

Description:	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. 120VAC / 60 Hz.

Peak Power Spectral Density Limits	
Frequency (MHz)	Limit (dBm)
2412-2462	8


Peak Power Spectral Density (Continued)

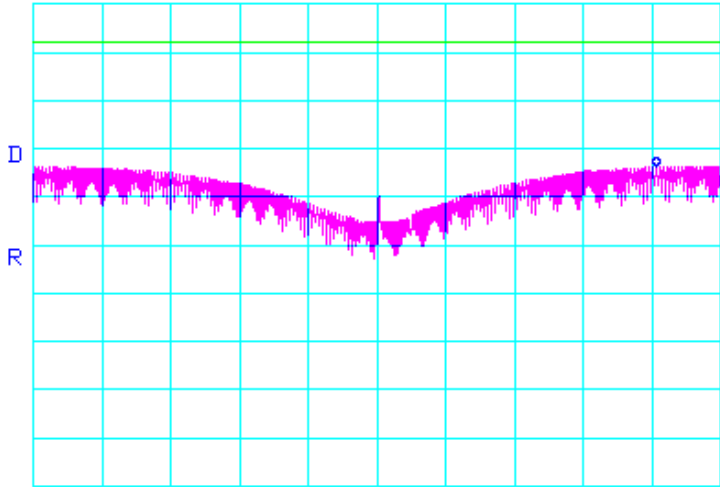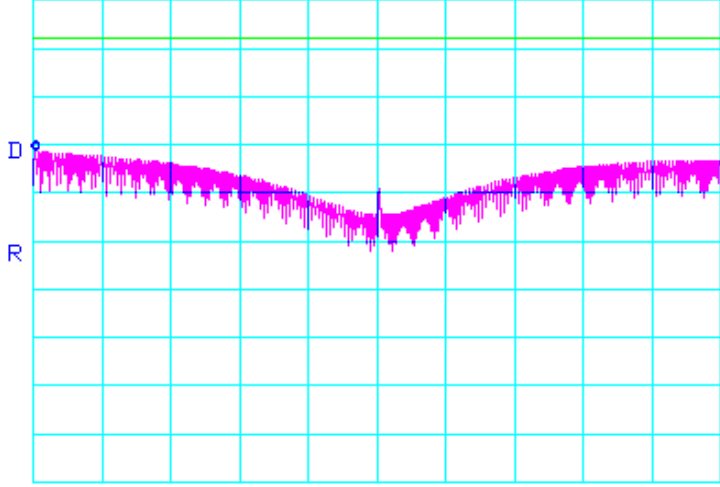802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-02d1)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -17.67dBm 2.412610GHz  CENTER 2.412000GHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec SPAN 1.500MHz		
Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-02d2)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -15.17dBm 2.436255GHz  CENTER 2.437000GHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec SPAN 1.500MHz		



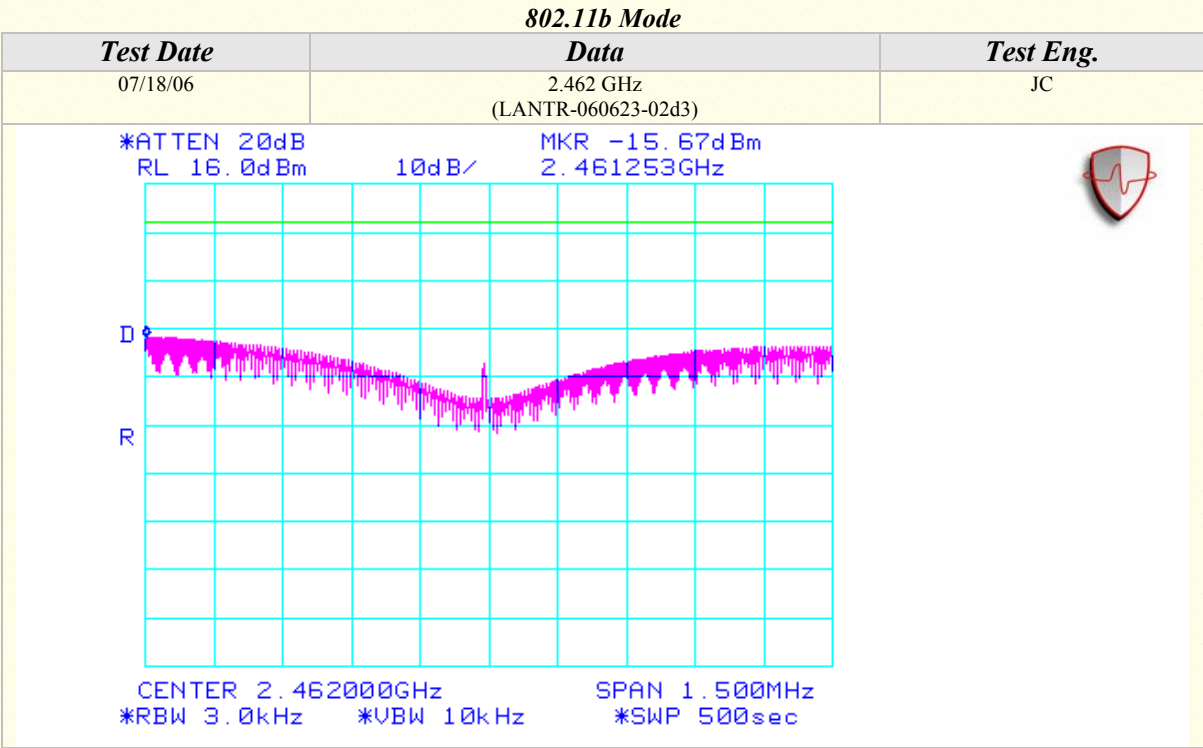Peak Power Spectral Density (Continued)






Peak Power Spectral Density (Continued)

802.11g Mode

Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-03d1)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -17.83dBm 2.411398GHz CENTER 2.412000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec		
Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-03d2)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -17.00dBm 2.436348GHz CENTER 2.437000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec		



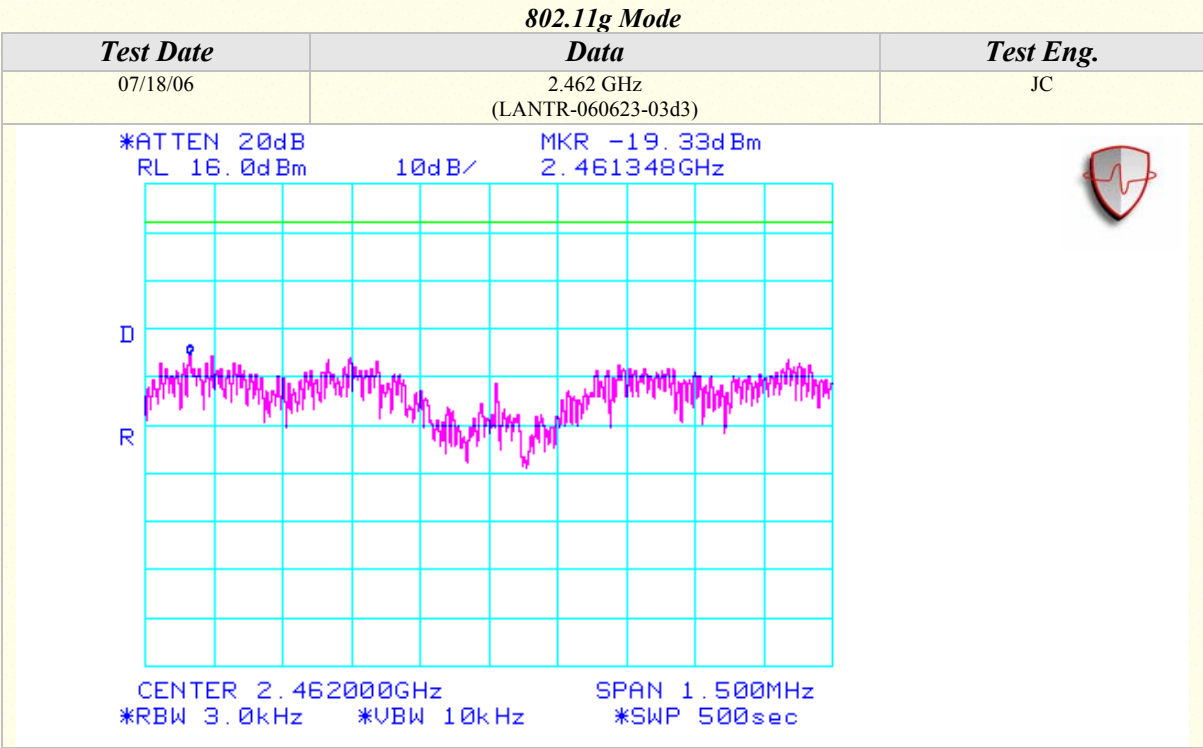Peak Power Spectral Density (Continued)





CONDUCTED OUT OF BAND EMISSIONS

CLIENT:	Lantronix Inc.	DATE:	07/18/06
EUT:	DRIG Wireless Device Server	PROJECT NUMBER:	LANTR-060623
MODEL NUMBER:	XSDR22W00-01	TEST ENGINEER:	JC
SERIAL NUMBER:	None	SITE #:	2
CONFIGURATION:	Tested with a Wanshih 2.89 dBi antenna.	TEMPERATURE:	22 deg. C
		HUMIDITY:	45% RH
		TIME:	11:00 AM

Description:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. • 120VAC / 60 Hz.





Peak Power Spectral Density (Continued)

802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-02e1)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -58.83dBm 447MHz		
Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-02e2)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -39.00dBm 4.827GHz		



Peak Power Spectral Density (Continued)

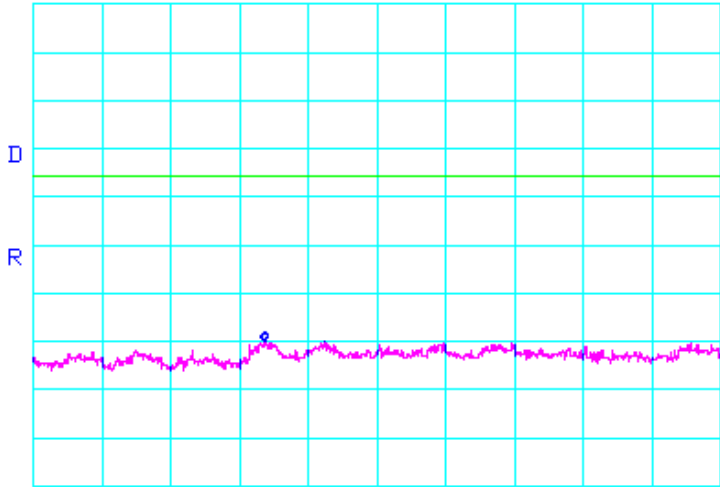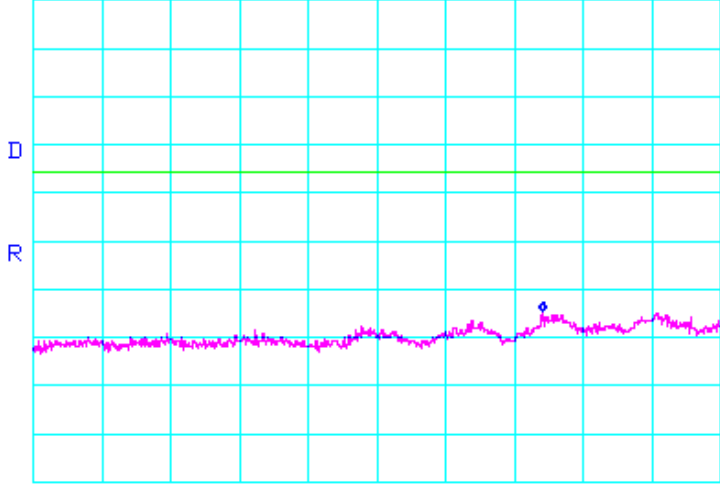802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-02e3)	JC
*ATTEN 20dB MKR -54.00dBm RL 16.0dBm 10dB/ 13.37GHz  START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec		
Test Date	Data	Test Eng.
07/18/06	2.412 GHz (LANTR-060623-02e4)	JC
*ATTEN 20dB MKR -48.67dBm RL 16.0dBm 10dB/ 24.450GHz  START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec		

Peak Power Spectral Density (Continued)

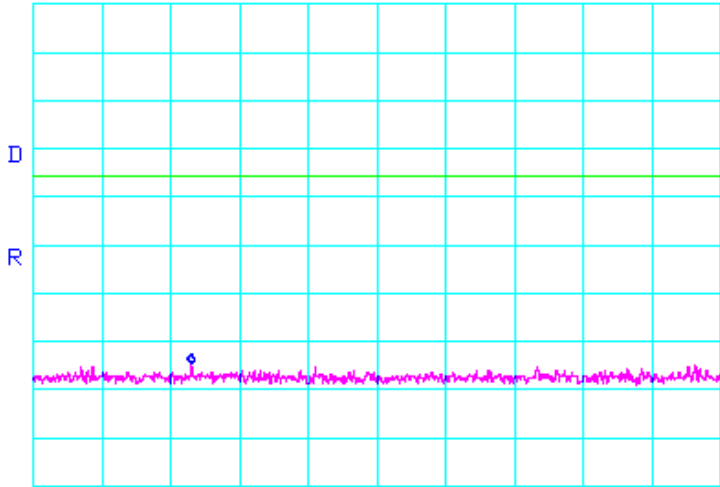
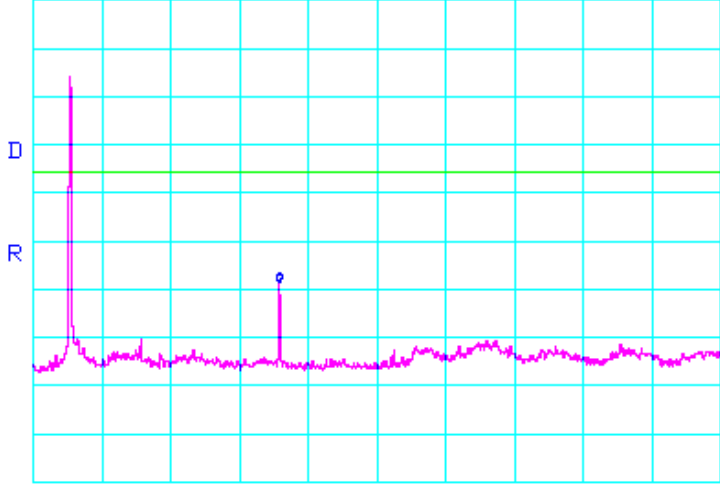
802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-02e5)	JC
*ATTEN 20dB MKR -58.67dBm RL 16.0dBm 10dB/ 483MHz  START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec		
Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-02e6)	JC
*ATTEN 20dB MKR -42.50dBm RL 16.0dBm 10dB/ 4.867GHz  START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec		





Peak Power Spectral Density (Continued)

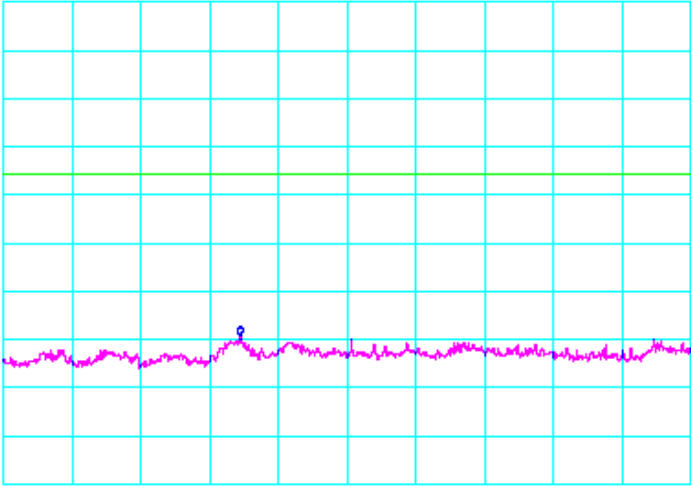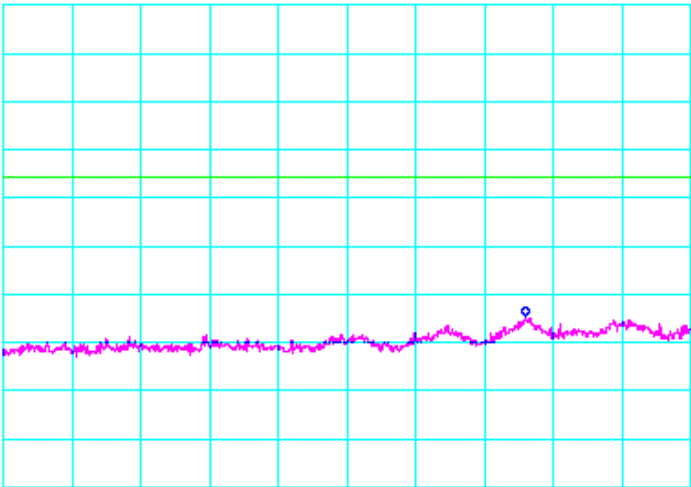802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-02e7)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -53.17dBm 13.45GHz  START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec 		
Test Date	Data	Test Eng.
07/18/06	2.437 GHz (LANTR-060623-02e8)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -48.50dBm 24.560GHz  START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec 		

Peak Power Spectral Density (Continued)

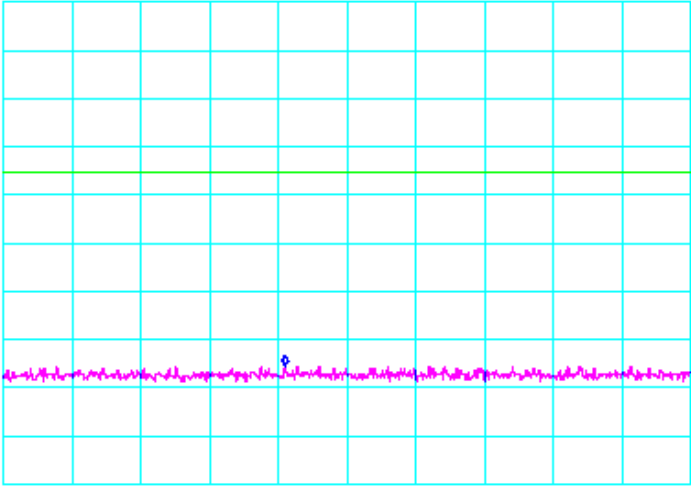
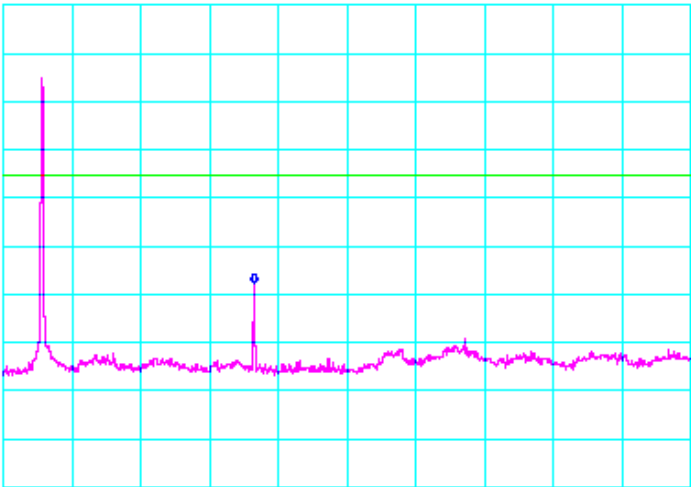
802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.462 GHz (LANTR-060623-02e9)	JC
*ATTEN 20dB MKR -59.50dBm RL 16.0dBm 10dB/ 838MHz  START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec		
Test Date	Data	Test Eng.
07/18/06	2.462 GHz (LANTR-060623-02e10)	JC
*ATTEN 20dB MKR -41.83dBm RL 16.0dBm 10dB/ 4.920GHz  START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec		



Peak Power Spectral Density (Continued)

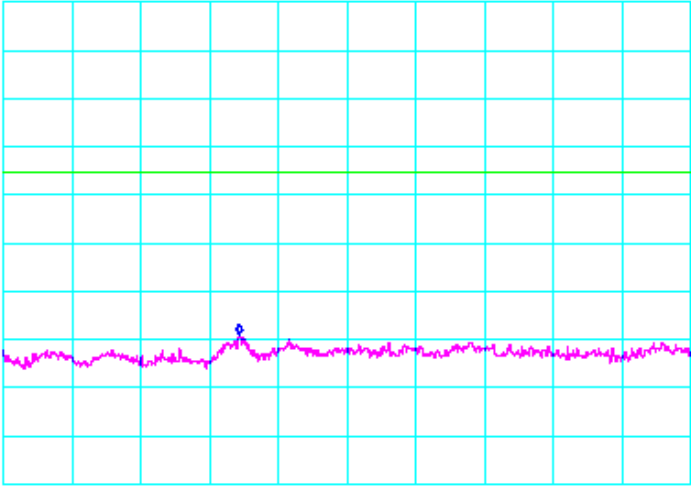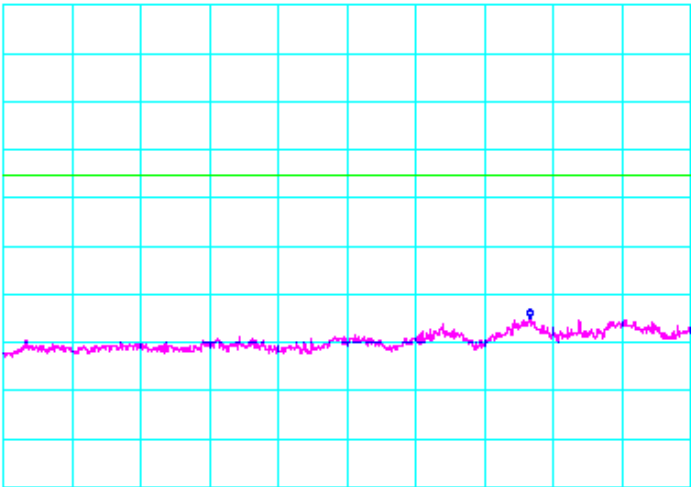802.11b Mode

Test Date	Data	Test Eng.
07/18/06	2.462 GHz (LANTR-060623-02e11)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -53.00dBm 13.43GHz  START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec		
Test Date	Data	Test Eng.
07/18/06	2.462 GHz (LANTR-060623-02e12)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -49.00dBm 24.600GHz  START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec		



Peak Power Spectral Density (Continued)

802.11g Mode

Test Date	Data	Test Eng.
07/19/06	2.412 GHz (LANTR-060623-03e1)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -58.83dBm 1.153GHz		
Test Date	Data	Test Eng.
07/19/06	2.412 GHz (LANTR-060623-03e2)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -47.00dBm 3.213GHz		





Peak Power Spectral Density (Continued)

802.11g Mode

Test Date	Data	Test Eng.
07/19/06	2.412 GHz (LANTR-060623-03e3)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -53.67dBm 13.42GHz		
Test Date	Data	Test Eng.
07/19/06	2.412 GHz (LANTR-060623-03e4)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -48.67dBm 24.540GHz		


Peak Power Spectral Density (Continued)

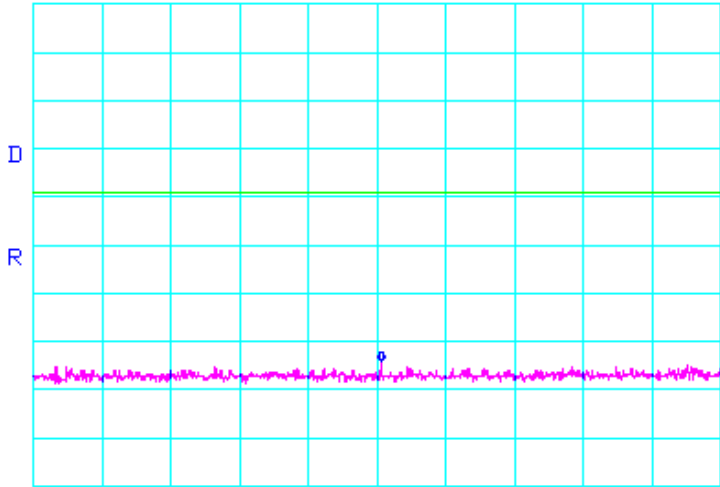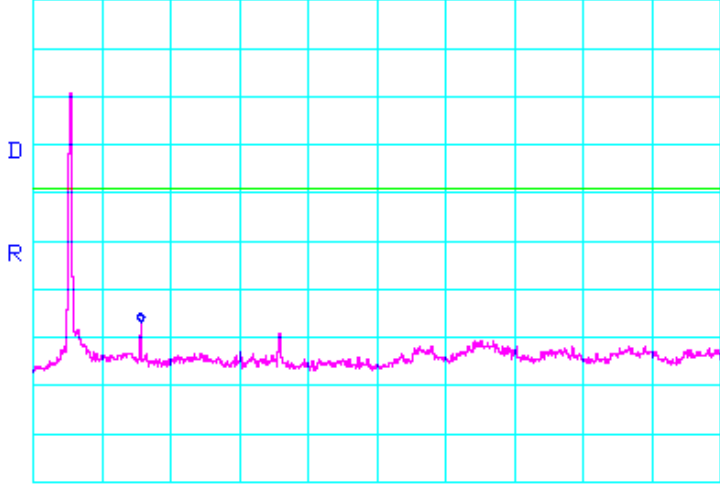802.11g Mode

Test Date	Data	Test Eng.
07/19/06	2.437 GHz (LANTR-060623-03e5)	JC
*ATTEN 20dB MKR -58.17dBm RL 16.0dBm 10dB/ 1.028GHz  START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec		
Test Date	Data	Test Eng.
07/19/06	2.437 GHz (LANTR-060623-03e6)	JC
*ATTEN 20dB MKR -50.83dBm RL 16.0dBm 10dB/ 3.253GHz  START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec		




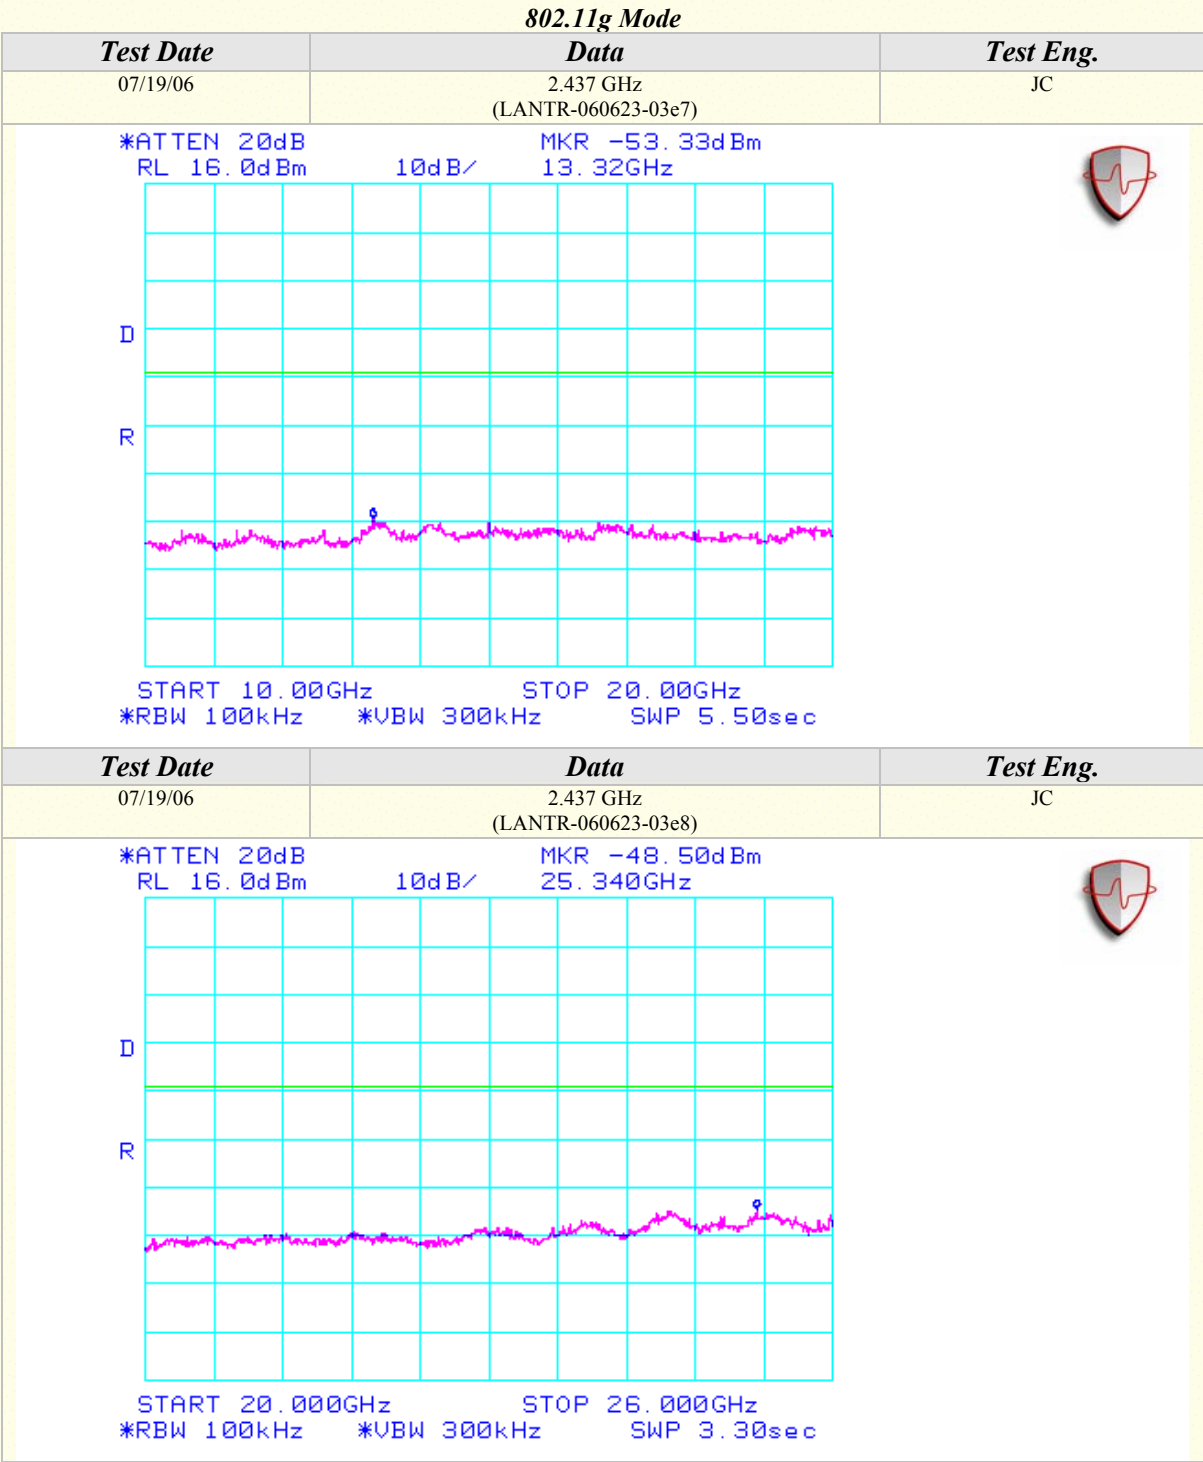
Peak Power Spectral Density (Continued)





Peak Power Spectral Density (Continued)

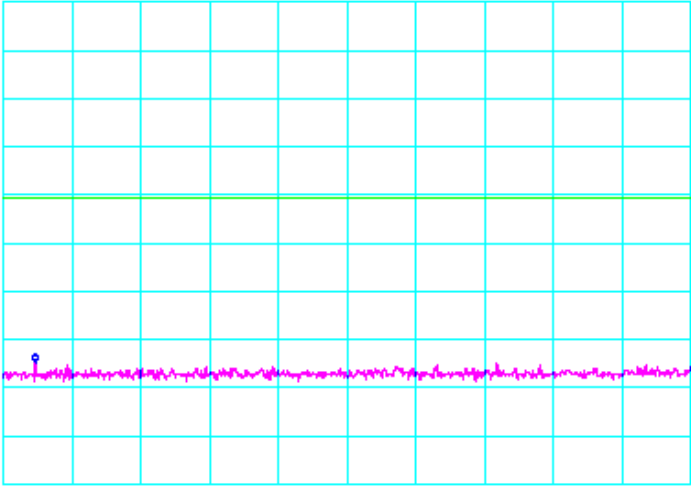
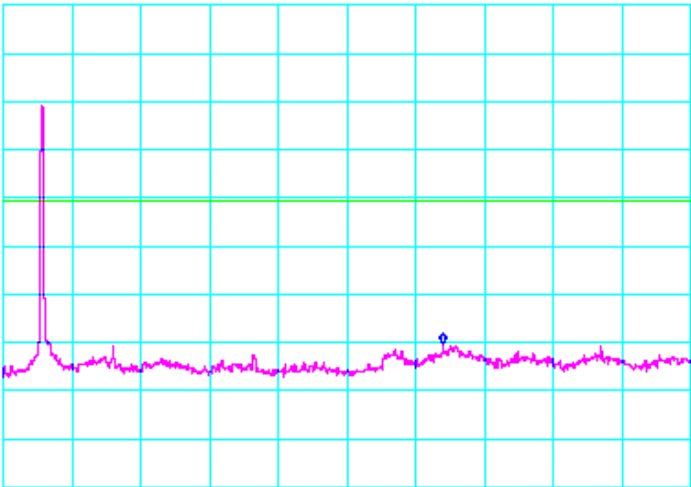
802.11g Mode

Test Date	Data	Test Eng.
07/19/06	2.462 GHz (LANTR-060623-03e9)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -58.83dBm 122MHz  START 30MHz *RBW 100kHz STOP 2.000GHz *VBW 300kHz SWP 1.10sec 		
Test Date	Data	Test Eng.
07/19/06	2.462 GHz (LANTR-060623-03e10)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -54.17dBm 7.120GHz  START 2.000GHz *RBW 100kHz STOP 10.000GHz *VBW 300kHz SWP 4.40sec 		



Peak Power Spectral Density (Continued)

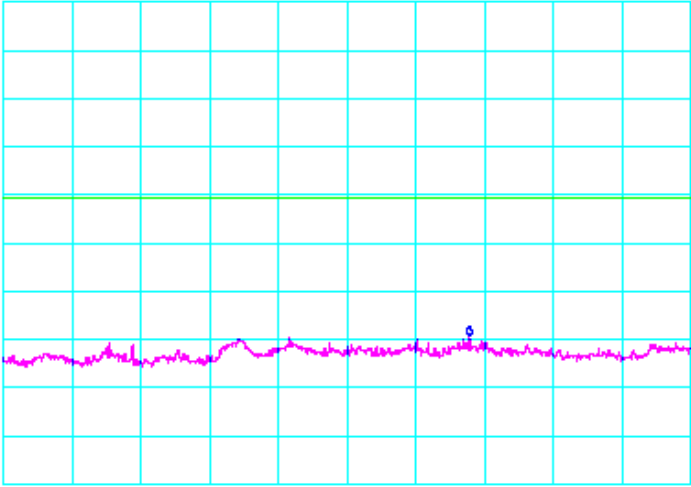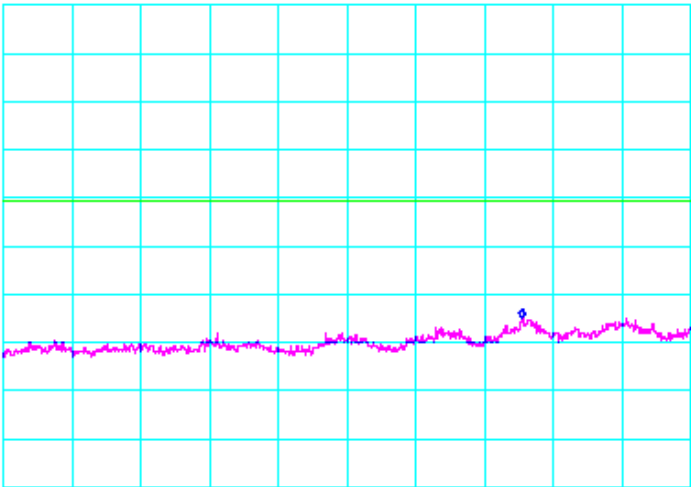802.11g Mode

Test Date	Data	Test Eng.
07/19/06	2.462 GHz (LANTR-060623-03e11)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -53.33dBm 16.78GHz  START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec		
Test Date	Data	Test Eng.
07/19/06	2.462 GHz (LANTR-060623-03e12)	JC
*ATTEN 20dB RL 16.0dBm 10dB/ MKR -49.00dBm 24.530GHz  START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec		



APPENDIX B

MODIFICATIONS AND RECOMMENDATIONS

1.0	NONE