




# FCC SAR TEST REPORT

FCC ID : PY7-61362R  
Brand Name : Sony  
Applicant : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa,  
Shinagawa-ku, Tokyo, 140-0002, Japan  
Manufacturer : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa,  
Shinagawa-ku, Tokyo, 140-0002, Japan  
Standard : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Feb. 20, 2019 and testing was started from Mar. 06, 2019 and completed on Mar. 06, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>1. Statement of Compliance .....</b>	<b>4</b>
<b>2. Guidance Applied.....</b>	<b>4</b>
<b>3. Equipment Under Test (EUT) Information .....</b>	<b>5</b>
3.1 General Information .....	5
3.2 Device Serial Number .....	5
<b>4. RF Exposure Limits.....</b>	<b>6</b>
4.1 Uncontrolled Environment.....	6
4.2 Controlled Environment.....	6
<b>5. Specific Absorption Rate (SAR).....</b>	<b>7</b>
5.1 Introduction .....	7
5.2 SAR Definition.....	7
<b>6. System Description and Setup .....</b>	<b>8</b>
6.1 E-Field Probe .....	9
6.2 Data Acquisition Electronics (DAE) .....	9
6.3 Phantom.....	10
6.4 Device Holder.....	11
<b>7. Measurement Procedures .....</b>	<b>12</b>
7.1 Spatial Peak SAR Evaluation.....	12
7.2 Power Reference Measurement.....	13
7.3 Area Scan .....	13
7.4 Zoom Scan.....	14
7.5 Volume Scan Procedures.....	14
7.6 Power Drift Monitoring.....	14
<b>8. Test Equipment List.....</b>	<b>15</b>
<b>9. System Verification .....</b>	<b>16</b>
9.1 Tissue Simulating Liquids.....	16
9.2 Tissue Verification .....	17
9.3 System Performance Check Results.....	18
<b>10. RF Exposure Positions .....</b>	<b>19</b>
10.1 Ear and handset reference point.....	19
10.2 Definition of the cheek position .....	20
10.3 Definition of the tilt position .....	21
10.4 Body Worn Accessory .....	21
10.5 Product Specific Exposure .....	22
10.6 Wireless Router.....	22
<b>11. Conducted RF Output Power (Unit: dBm).....</b>	<b>23</b>
<b>12. RF Exposure Conditions .....</b>	<b>27</b>
<b>13. SAR Test Results .....</b>	<b>27</b>
13.1 Head SAR .....	28
13.2 Hotspot SAR .....	28
13.3 Body Worn Accessory SAR.....	28
<b>14. Simultaneous Transmission Analysis .....</b>	<b>29</b>
14.1 Head Exposure Conditions .....	30
14.2 Hotspot Exposure Conditions.....	31
14.3 Body-Worn Accessory Exposure Conditions .....	33
14.4 Product Specific Exposure Conditions .....	33
<b>15. Uncertainty Assessment .....</b>	<b>34</b>
<b>16. References.....</b>	<b>34</b>
<b>Appendix A. Plots of System Performance Check</b>	
<b>Appendix B. Plots of High SAR Measurement</b>	
<b>Appendix C. DASY Calibration Certificate</b>	
<b>Appendix D. Test Setup Photos</b>	



## History of this test report

Report No.	Version	Description	Issued Date
FA8O2424-01	01	Initial issue of report	Apr. 03, 2019
FA8O2424-01	02	1. Updated SAR Result 2. Updated Appendix A, B & C 3. Updated General Information	Apr. 18, 2019



## 1. Statement of Compliance

Applicant Name	Sony Mobile Communications Inc.			
EUT Description	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS and NFC			
Brand Name	Sony			
FCC ID	PY7-61362R			
HW Version	AP			
SW Version	0.195			
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	NII	DSS
Head (1g SAR W/kg)	0.36	0.51	0.23	0.18
Body-Worn (1g SAR W/kg)	0.33	0.06	0.14	0.01
Wireless Router (1g SAR W/kg)	0.94	0.17		0.04
Product Specific (10g SAR W/kg)			0.52	
Highest Simultaneous Transmission (1g SAR W/kg)	Head: 1.06 Body-worn: 0.52 Hotspot: 0.94	Head: 1.06 Body-worn: 0.52 Hotspot: 0.94	Head: 1.06 Body-worn: 0.52 Hotspot: N/A	Head: 0.87 Body-worn: 0.49 Hotspot: 0.94
Highest Simultaneous Transmission (10g SAR W/kg)			Product Specific: 0.87	
Date Tested	2019/3/6			
Test Result	Pass			
Remark:				
1. This device 2.4GHz WLAN support Hotspot operation and Bluetooth support tethering applications.				
2. PY7-61362R was changed in Identification from PY7-80422E, then C2pc is applied, hence, in this report GSM850/GSM1900, WCDMA B5, LTE B4/B5/B7/B13/B17/B41 and WLAN & BT SAR test results and conducted RF output power are referenced from FCC ID PY7-80422E, Sporton Report No: FA8O2423-02.				
3. For LTE B17 SAR was cover by LTE B12 in original report, FCC ID: PY7-80422E, Sporton Report No: FA8O2423-02, due the have the same maximum output power and overlapping frequency.				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang

Report Producer: Wan Liu

## 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02

### **3. Equipment Under Test (EUT) Information**

#### **3.1 General Information**

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	<ul style="list-style-type: none"> <li>· GSM Voice</li> <li>· GPRS (GMSK)</li> <li>· EDGE (8PSK)</li> </ul>	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (Yes)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	<ul style="list-style-type: none"> <li>· UMTS Rel.99(Voice &amp; Data)</li> <li>· HSDPA Rel.5</li> <li>· HSUPA Rel.6</li> <li>· HSPA+ Rel.7 (downlink only)</li> </ul>	
LTE (FDD)	Band 4 Band 5 Band 7 Band 13 Band 17	<ul style="list-style-type: none"> <li>· QPSK</li> <li>· 16QAM</li> <li>· 64QAM</li> <li>· Rel 14 Carrier Aggregation Downlink Only (the detail refer to section 11)</li> </ul>	
LTE (TDD)	Band 41		
WiFi	2.4GHz: 2412 MHz ~ 2472 MHz	<ul style="list-style-type: none"> <li>· 11b</li> <li>· 11g</li> <li>· 11n (HT20)</li> </ul>	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	<ul style="list-style-type: none"> <li>· 11a</li> <li>· 11n (HT20)</li> <li>· 11n (HT40)</li> <li>· 11ac (VHT20)</li> <li>· 11ac (VHT40)</li> <li>· 11ac (VHT80)</li> </ul>	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

#### **3.2 Device Serial Number**

Band	SN
WWAN	BH97005YFW BH970065FW

**Note:** Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

## **4. RF Exposure Limits**

### **4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

**The DASY system used for performing compliance tests consists of the following items:**

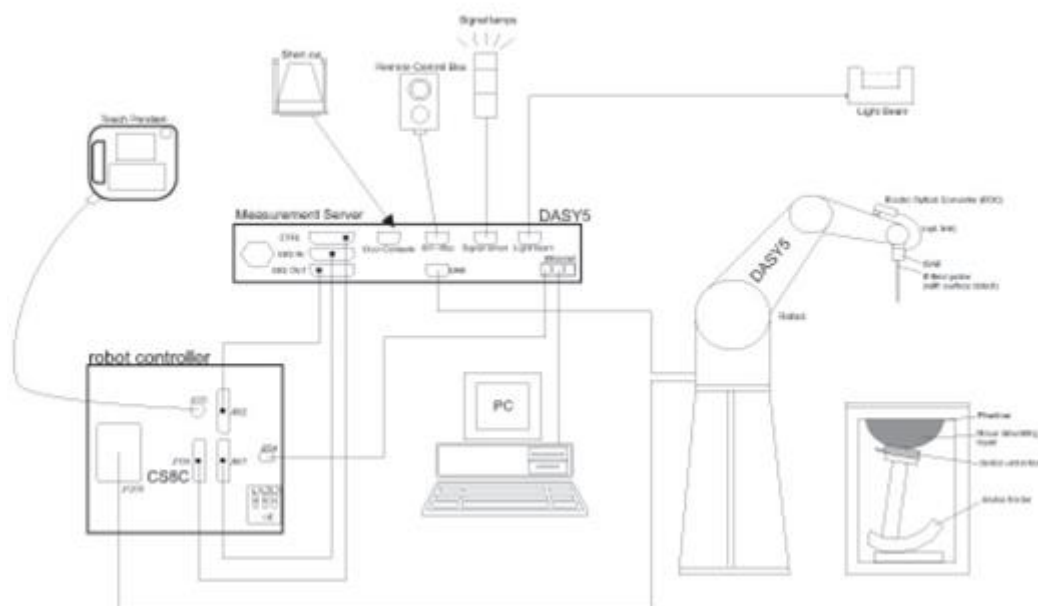


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.




## 6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### <ES3DV3 Probe>

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

### <EX3DV4 Probe>

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

## 6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


### 6.3 Phantom

#### <SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

#### <ELI Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## **7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

## 7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

## 7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 19, 2018	Nov. 18, 2019
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 10, 2019
SPEAG	Data Acquisition Electronics	DAE4	1326	Sep. 18, 2018	Sep. 17, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 28, 2018	May. 27, 2019
Gencom	Thermometer	TE1	TM225-1	Mar. 16, 2018	Mar. 15, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 17, 2018	Apr. 16, 2019
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 21, 2018	May. 20, 2019
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 11, 2018	Dec. 10, 2019
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2018	Sep. 18, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 11, 2018	Sep. 10, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 18, 2018	May. 17, 2019
Anritsu	Power Sensor	MA2411B	1339124	May. 18, 2018	May. 17, 2019
Anritsu	Power Meter	ML2495A	1240001	Sep. 13, 2018	Sep. 12, 2019
Anritsu	Power Sensor	MA2411B	1207349	Sep. 13, 2018	Sep. 12, 2019
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 23, 2018	Jun. 22, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 09, 2018	Aug. 08, 2019
Mini-Circuits	Power Amplifier	ZHL-42W+	15542	Aug. 09, 2018	Aug. 08, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**


1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



## **9. System Verification**

### **9.1 Tissue Simulating Liquids**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

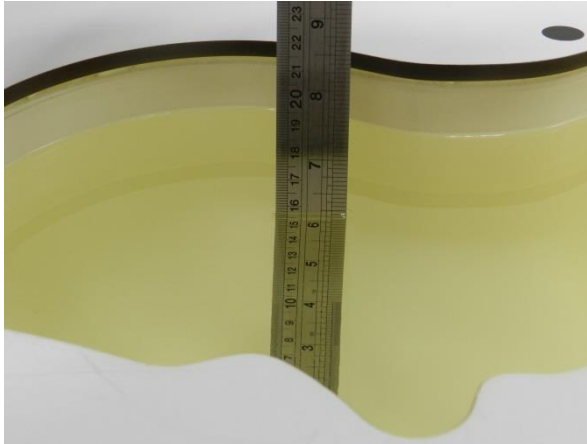

**Fig 10.1**Photo of Liquid Height for Head SAR



**Fig 10.2** Photo of Liquid Height for Body SAR



## 9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

### Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
1750	HSL	22.6	1.409	40.982	1.37	40.10	2.85	2.20	±5	2019/3/6
1750	MSL	22.4	1.463	53.922	1.49	53.40	-1.81	0.98	±5	2019/3/6
1900	HSL	22.6	1.458	41.063	1.40	40.00	4.14	2.66	±5	2019/3/6
1900	MSL	22.4	1.508	52.192	1.52	53.30	-0.79	-2.08	±5	2019/3/6

### 9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/3/6	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3169	DAE4 Sn1326	9.38	37.10	37.52	1.13
2019/3/6	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3169	DAE4 Sn1326	9.27	37.00	37.08	0.22
2019/3/6	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1326	10.70	40.20	42.8	6.47
2019/3/6	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1326	9.51	40.20	38.04	-5.37

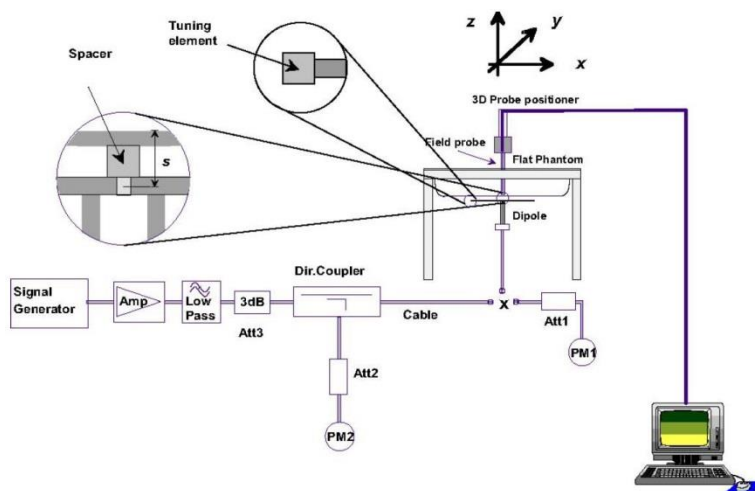

**Fig 8.3.1 System Performance Check Setup**




**Fig 8.3.2 Setup Photo**


## 10. RF Exposure Positions

### 10.1 Ear and handset reference point


Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

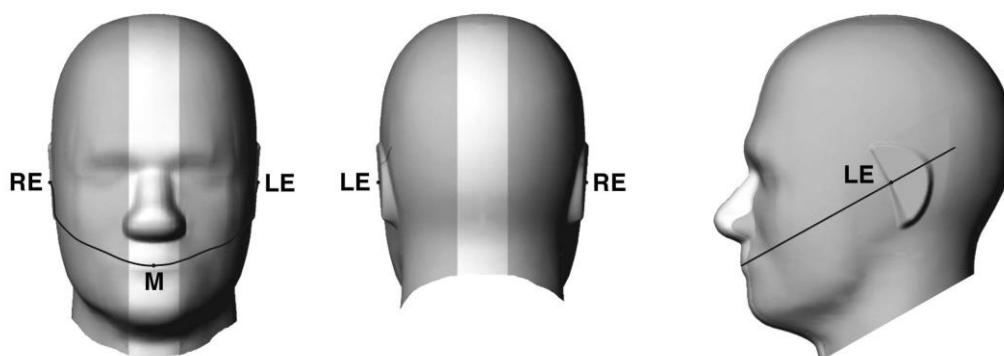

**Fig 9.1.1 Front, back, and side views of SAM twin phantom**

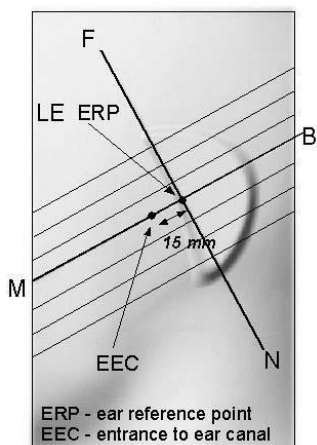

**Fig 9.1.2 Close-up side view of phantom showing the ear region.**

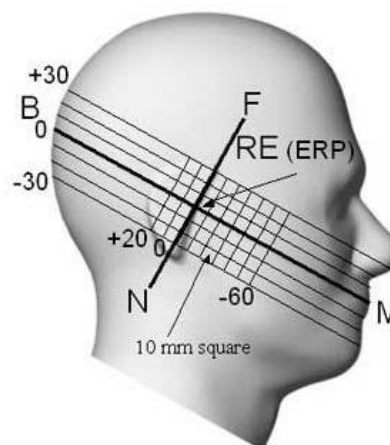

**Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations**

## 10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

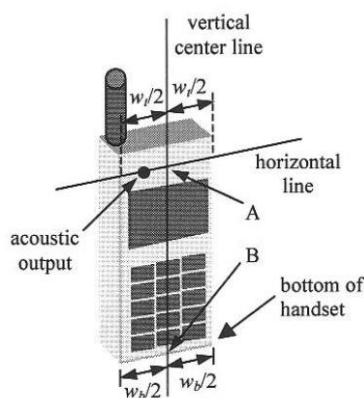


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

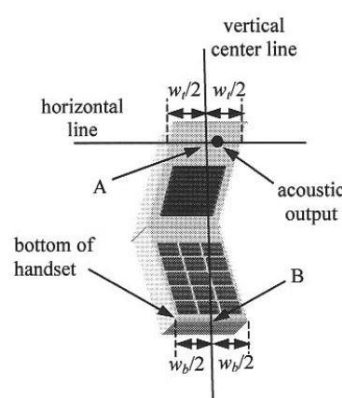


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

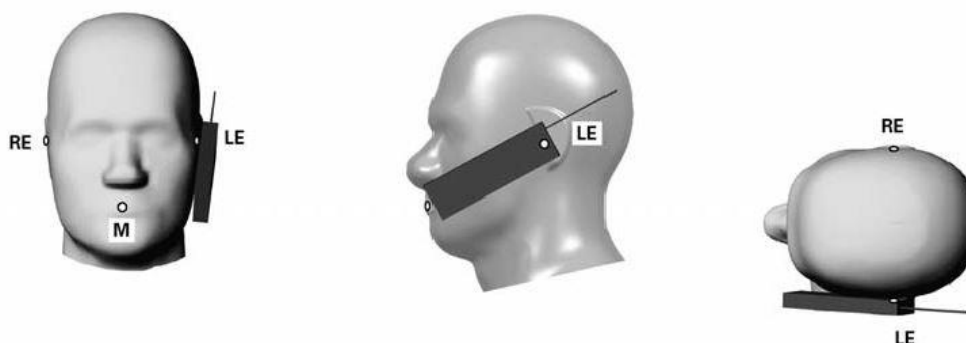


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by  $15^\circ$ .
3. Rotate the handset around the horizontal line by  $15^\circ$ .
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

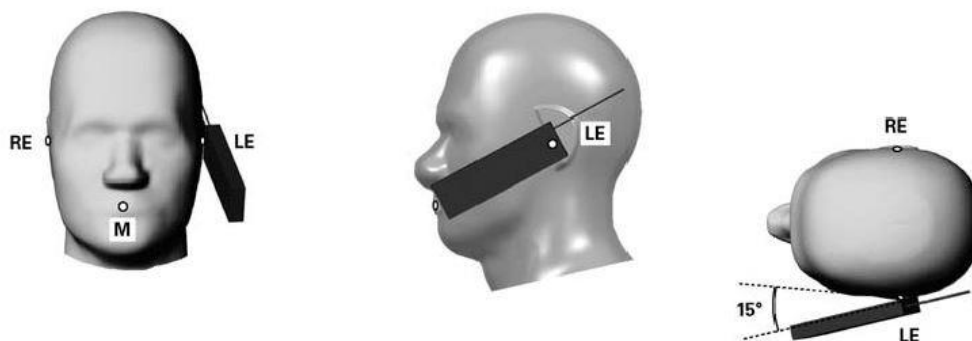


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

### 10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

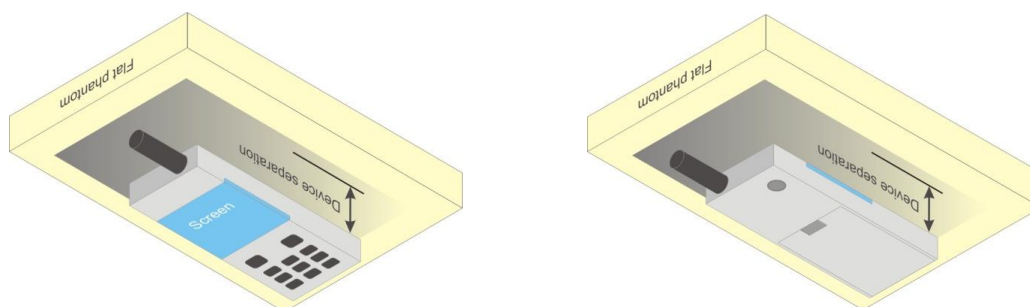


Fig 9.4 Body Worn Position



### **10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.<sup>6</sup> The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 11. Conducted RF Output Power (Unit: dBm)

### <WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

### HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

### Setup Configuration

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_d/\beta_c = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**



**<WCDMA Conducted Power>**
**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.23	18.50	18.44	18.70	18.51	18.44	18.39	18.70
3GPP Rel 99	RMC 12.2Kbps	18.24	18.53	18.45	18.70	18.52	18.45	18.39	18.70
3GPP Rel 6	HSDPA Subtest-1	17.27	17.56	17.46	18.00	17.52	17.44	17.42	18.00
3GPP Rel 6	HSDPA Subtest-2	17.22	17.56	17.47	18.00	17.48	17.49	17.41	18.00
3GPP Rel 6	HSDPA Subtest-3	16.74	17.07	16.96	17.50	16.97	16.92	16.91	17.50
3GPP Rel 6	HSDPA Subtest-4	16.67	17.11	16.91	17.50	16.98	16.92	16.85	17.50
3GPP Rel 6	HSUPA Subtest-1	17.40	17.81	17.70	18.00	17.72	17.55	17.62	18.00
3GPP Rel 6	HSUPA Subtest-2	15.46	15.69	15.76	16.00	15.80	15.77	15.67	16.00
3GPP Rel 6	HSUPA Subtest-3	16.44	16.84	16.78	17.00	16.68	16.73	16.63	17.00
3GPP Rel 6	HSUPA Subtest-4	15.44	15.81	15.71	16.00	15.79	15.61	15.55	16.00
3GPP Rel 6	HSUPA Subtest-5	17.60	17.70	17.70	18.00	17.80	17.80	17.60	18.00

**<LTE Carrier Aggregation combinations>**
**General Note:**

1. This device supports Carrier Aggregation on downlink only for intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.

2CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset
1	41C		

**<Power verification when LTE Carrier Aggregation Active>**
**General Note:**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**<Two Carrier power verification>**

Configure		PCC							SCC				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Contiguous	41	20	2680	41490	QPSK	50	50	41	20	2660.20	41292	16.43	16.74

## 12. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN chain0	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
2.4GHz WLAN chain1	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm
5GHz WLAN chain1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN chain0	Yes	Yes	Yes	No	No	Yes
2.4GHz WLAN chain1	Yes	Yes	No	No	No	Yes
5GHz WLAN chain1	Yes	Yes	Yes	No	No	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, The detail antenna location please refers to Appendix D.

## 13. SAR Test Results

**General Note:**

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8W/kg.
- Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

**UMTS Note:**

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA

### 13.1 Head SAR

#### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	18.53	18.70	1.040	0.05	0.013	0.014
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	18.53	18.70	1.040	0.13	0.003	0.003
01	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	18.53	18.70	1.040	0.1	0.015	0.016
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	18.53	18.70	1.040	0.05	0.005	0.005
02	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1312	1712.4	18.52	18.70	1.042	0.07	0.033	0.034
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1312	1712.4	18.52	18.70	1.042	0.06	0.011	0.011
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1312	1712.4	18.52	18.70	1.042	0.04	0.016	0.017
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1312	1712.4	18.52	18.70	1.042	0.02	0.014	0.015

### 13.2 Hotspot SAR

#### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9400	1880	18.53	18.70	1.040	0.1	0.323	0.336
	WCDMA II	RMC 12.2Kbps	Back	10mm	9400	1880	18.53	18.70	1.040	-0.07	0.275	0.286
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9400	1880	18.53	18.70	1.040	-0.03	0.036	0.037
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9400	1880	18.53	18.70	1.040	0.16	0.030	0.031
03	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	18.53	18.70	1.040	-0.18	0.623	0.648
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	18.52	18.70	1.042	-0.1	0.405	0.422
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1312	1712.4	18.52	18.70	1.042	0	0.385	0.401
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1312	1712.4	18.52	18.70	1.042	0.04	0.015	0.016
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	1312	1712.4	18.52	18.70	1.042	-0.13	0.047	0.049
04	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	18.52	18.70	1.042	-0.12	0.602	0.627

### 13.3 Body Worn Accessory SAR

#### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	WCDMA II	RMC 12.2Kbps	Front	15mm	9400	1880	18.53	18.70	1.040	-0.06	0.132	0.137
	WCDMA II	RMC 12.2Kbps	Back	15mm	9400	1880	18.53	18.70	1.040	-0.07	0.128	0.133
	WCDMA IV	RMC 12.2Kbps	Front	15mm	1312	1712.4	18.52	18.70	1.042	-0.04	0.171	0.178
06	WCDMA IV	RMC 12.2Kbps	Back	15mm	1312	1712.4	18.52	18.70	1.042	-0.04	0.191	0.199

## 14. Simultaneous Transmission Analysis

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	(None)	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G
15	UMTS/HSPA	WLAN 2.4G	WLAN 5G
16	LTE	WLAN 2.4G	WLAN 5G

**General Note:**

1. PY7-61362R was changed in Identification from PY7-80422E, then C2pc is applied, hence, in this report GSM850/GSM1900, WCDMA B5, LTE B4/B5/B7/B13/B17/B41 and WLAN & BT SAR test results and conducted RF output power are referenced from FCC ID PY7-80422E, Sporton Report No: FA8O2423-02.
2. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
3. 2.4GHz WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
4. All licensed modes share the same antenna part and cannot transmit simultaneously
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.



**14.1 Head Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	4+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth						
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Right Cheek	0.148	0.506	0.008	0.132	0.233	0.184	0.662	0.697	0.887	0.332	0.513	0.549
		Right Tilted	0.074	0.067	0.005	0.010	0.178	0.022	0.146	0.284	0.319	0.096	0.262	0.210
		Left Cheek	0.185	0.162	0.006	0.037	0.095	0.064	0.353	0.381	0.442	0.249	0.317	0.196
		Left Tilted	0.101	0.029	0.001	0.009	0.081	0.010	0.131	0.201	0.211	0.111	0.191	0.100
	GSM1900	Right Cheek	0.013	0.506	0.008	0.132	0.233	0.184	0.527	0.562	0.752	0.197	0.378	0.549
		Right Tilted	0.004	0.067	0.005	0.010	0.178	0.022	0.076	0.214	0.249	0.026	0.192	0.210
		Left Cheek	0.016	0.162	0.006	0.037	0.095	0.064	0.184	0.212	0.273	0.080	0.148	0.196
		Left Tilted	0.005	0.029	0.001	0.009	0.081	0.010	0.035	0.105	0.115	0.015	0.095	0.100
WCDMA	WCDMA II	Right Cheek	0.014	0.506	0.008	0.132	0.233	0.184	0.528	0.563	0.753	0.198	0.379	0.549
		Right Tilted	0.003	0.067	0.005	0.010	0.178	0.022	0.075	0.213	0.248	0.025	0.191	0.210
		Left Cheek	0.016	0.162	0.006	0.037	0.095	0.064	0.184	0.212	0.273	0.080	0.148	0.196
		Left Tilted	0.005	0.029	0.001	0.009	0.081	0.010	0.035	0.105	0.115	0.015	0.095	0.100
	WCDMA IV	Right Cheek	0.034	0.506	0.008	0.132	0.233	0.184	0.548	0.583	0.773	0.218	0.399	0.549
		Right Tilted	0.011	0.067	0.005	0.010	0.178	0.022	0.083	0.221	0.256	0.033	0.199	0.210
		Left Cheek	0.017	0.162	0.006	0.037	0.095	0.064	0.185	0.213	0.274	0.081	0.149	0.196
		Left Tilted	0.015	0.029	0.001	0.009	0.081	0.010	0.045	0.115	0.125	0.025	0.105	0.100
	WCDMA V	Right Cheek	0.322	0.506	0.008	0.132	0.233	0.184	0.836	0.871	1.061	0.506	0.687	0.549
		Right Tilted	0.102	0.067	0.005	0.010	0.178	0.022	0.174	0.312	0.347	0.124	0.290	0.210
		Left Cheek	0.337	0.162	0.006	0.037	0.095	0.064	0.505	0.533	0.594	0.401	0.469	0.196
		Left Tilted	0.161	0.029	0.001	0.009	0.081	0.010	0.191	0.261	0.271	0.171	0.251	0.100
LTE	LTE Band 4	Right Cheek	0.040	0.506	0.008	0.132	0.233	0.184	0.554	0.589	0.779	0.224	0.405	0.549
		Right Tilted	0.023	0.067	0.005	0.010	0.178	0.022	0.095	0.233	0.268	0.045	0.211	0.210
		Left Cheek	0.021	0.162	0.006	0.037	0.095	0.064	0.189	0.217	0.278	0.085	0.153	0.196
		Left Tilted	0.015	0.029	0.001	0.009	0.081	0.010	0.045	0.115	0.125	0.025	0.105	0.100
		Right Cheek	0.302	0.506	0.008	0.132	0.233	0.184	0.816	0.851	1.041	0.486	0.667	0.549
	LTE Band 5	Right Tilted	0.113	0.067	0.005	0.010	0.178	0.022	0.185	0.323	0.358	0.135	0.301	0.210
		Left Cheek	0.363	0.162	0.006	0.037	0.095	0.064	0.531	0.559	0.620	0.427	0.495	0.196
		Left Tilted	0.123	0.029	0.001	0.009	0.081	0.010	0.153	0.223	0.233	0.133	0.213	0.100
	LTE Band 7	Right Cheek	0.035	0.506	0.008	0.132	0.233	0.184	0.549	0.584	0.774	0.219	0.400	0.549
		Right Tilted	0.015	0.067	0.005	0.010	0.178	0.022	0.087	0.225	0.260	0.037	0.203	0.210
		Left Cheek	0.029	0.162	0.006	0.037	0.095	0.064	0.197	0.225	0.286	0.093	0.161	0.196
		Left Tilted	0.019	0.029	0.001	0.009	0.081	0.010	0.049	0.119	0.129	0.029	0.109	0.100
	LTE Band 17	Right Cheek	0.264	0.506	0.008	0.132	0.233	0.184	0.778	0.813	1.003	0.448	0.629	0.549
		Right Tilted	0.093	0.067	0.005	0.010	0.178	0.022	0.165	0.303	0.338	0.115	0.281	0.210
		Left Cheek	0.298	0.162	0.006	0.037	0.095	0.064	0.466	0.494	0.555	0.362	0.430	0.196
		Left Tilted	0.124	0.029	0.001	0.009	0.081	0.010	0.154	0.224	0.234	0.134	0.214	0.100
	LTE Band 13	Right Cheek	0.258	0.506	0.008	0.132	0.233	0.184	0.772	0.807	0.997	0.442	0.623	0.549
		Right Tilted	0.097	0.067	0.005	0.010	0.178	0.022	0.169	0.307	0.342	0.119	0.285	0.210
		Left Cheek	0.296	0.162	0.006	0.037	0.095	0.064	0.464	0.492	0.553	0.360	0.428	0.196
		Left Tilted	0.140	0.029	0.001	0.009	0.081	0.010	0.170	0.240	0.250	0.150	0.230	0.100
	LTE Band 41	Right Cheek	0.019	0.506	0.008	0.132	0.233	0.184	0.533	0.568	0.758	0.203	0.384	0.549
		Right Tilted	0.009	0.067	0.005	0.010	0.178	0.022	0.081	0.219	0.254	0.031	0.197	0.210
		Left Cheek	0.022	0.162	0.006	0.037	0.095	0.064	0.190	0.218	0.279	0.086	0.154	0.196
		Left Tilted	0.017	0.029	0.001	0.009	0.081	0.010	0.047	0.117	0.127	0.027	0.107	0.100

**14.2 Hotspot Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850	Front	0.151	0.079	0.001	0.015	0.231	0.166
		Back	0.152	0.136	0.144	0.028	0.432	0.180
		Left side	0.168	0.168	0.006	0.040	0.342	0.208
		Right side	0.115				0.115	0.115
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.098				0.098	0.098
	GSM1900	Front	0.470	0.079	0.001	0.015	0.550	0.485
		Back	0.438	0.136	0.144	0.028	0.718	0.466
		Left side	0.044	0.168	0.006	0.040	0.218	0.084
		Right side	0.011				0.011	0.011
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.940				0.940	0.940
WCDMA	WCDMA II	Front	0.336	0.079	0.001	0.015	0.416	0.351
		Back	0.286	0.136	0.144	0.028	0.566	0.314
		Left side	0.037	0.168	0.006	0.040	0.211	0.077
		Right side	0.031				0.031	0.031
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.648				0.648	0.648
	WCDMA IV	Front	0.422	0.079	0.001	0.015	0.502	0.437
		Back	0.401	0.136	0.144	0.028	0.681	0.429
		Left side	0.016	0.168	0.006	0.040	0.190	0.056
		Right side	0.049				0.049	0.049
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.627				0.627	0.627
	WCDMA V	Front	0.318	0.079	0.001	0.015	0.398	0.333
		Back	0.295	0.136	0.144	0.028	0.575	0.323
		Left side	0.349	0.168	0.006	0.040	0.523	0.389
		Right side	0.222				0.222	0.222
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.184				0.184	0.184

WWAN Band		Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
LTE	LTE Band 4	Front	0.452	0.079	0.001	0.015	0.532	0.467
		Back	0.421	0.136	0.144	0.028	0.701	0.449
		Left side	0.018	0.168	0.006	0.040	0.192	0.058
		Right side	0.051				0.051	0.051
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.743				0.743	0.743
	LTE Band 5	Front	0.294	0.079	0.001	0.015	0.374	0.309
		Back	0.271	0.136	0.144	0.028	0.551	0.299
		Left side	0.319	0.168	0.006	0.040	0.493	0.359
		Right side	0.241				0.241	0.241
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.173				0.173	0.173
	LTE Band 7	Front	0.225	0.079	0.001	0.015	0.305	0.240
		Back	0.263	0.136	0.144	0.028	0.543	0.291
		Left side	0.016	0.168	0.006	0.040	0.190	0.056
		Right side	0.141				0.141	0.141
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.445				0.445	0.445
	LTE Band 17	Front	0.311	0.079	0.001	0.015	0.391	0.326
		Back	0.340	0.136	0.144	0.028	0.620	0.368
		Left side	0.321	0.168	0.006	0.040	0.495	0.361
		Right side	0.273				0.273	0.273
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.114				0.114	0.114
	LTE Band 13	Front	0.301	0.079	0.001	0.015	0.381	0.316
		Back	0.330	0.136	0.144	0.028	0.610	0.358
		Left side	0.313	0.168	0.006	0.040	0.487	0.353
		Right side	0.247				0.247	0.247
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.113				0.113	0.113
	LTE Band 41	Front	0.150	0.079	0.001	0.015	0.230	0.165
		Back	0.172	0.136	0.144	0.028	0.452	0.200
		Left side	0.016	0.168	0.006	0.040	0.190	0.056
		Right side	0.104				0.104	0.104
		Top side		0.001		0.002	0.001	0.002
		Bottom side	0.327				0.327	0.327



### 14.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	4+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth						
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	0.151	0.031	0.001	0.002	0.001	0.004	0.183	0.158	0.183	0.155	0.154	0.007
		Back	0.144	0.057	0.051	0.021	0.137	0.007	0.252	0.309	0.338	0.151	0.302	0.165
	GSM1900	Front	0.220	0.031	0.001	0.002	0.001	0.004	0.252	0.227	0.252	0.224	0.223	0.007
		Back	0.202	0.057	0.051	0.021	0.137	0.007	0.310	0.367	0.396	0.209	0.360	0.165
WCDMA	WCDMA II	Front	0.137	0.031	0.001	0.002	0.001	0.004	0.169	0.144	0.169	0.141	0.140	0.007
		Back	0.133	0.057	0.051	0.021	0.137	0.007	0.241	0.298	0.327	0.140	0.291	0.165
	WCDMA IV	Front	0.178	0.031	0.001	0.002	0.001	0.004	0.210	0.185	0.210	0.182	0.181	0.007
		Back	0.199	0.057	0.051	0.021	0.137	0.007	0.307	0.364	0.393	0.206	0.357	0.165
	WCDMA V	Front	0.292	0.031	0.001	0.002	0.001	0.004	0.324	0.299	0.324	0.296	0.295	0.007
		Back	0.275	0.057	0.051	0.021	0.137	0.007	0.383	0.440	0.469	0.282	0.433	0.165
LTE	LTE Band 4	Front	0.223	0.031	0.001	0.002	0.001	0.004	0.255	0.230	0.255	0.227	0.226	0.007
		Back	0.225	0.057	0.051	0.021	0.137	0.007	0.333	0.390	0.419	0.232	0.383	0.165
	LTE Band 5	Front	0.279	0.031	0.001	0.002	0.001	0.004	0.311	0.286	0.311	0.283	0.282	0.007
		Back	0.270	0.057	0.051	0.021	0.137	0.007	0.378	0.435	0.464	0.277	0.428	0.165
	LTE Band 7	Front	0.125	0.031	0.001	0.002	0.001	0.004	0.157	0.132	0.157	0.129	0.128	0.007
		Back	0.141	0.057	0.051	0.021	0.137	0.007	0.249	0.306	0.335	0.148	0.299	0.165
	LTE Band 17	Front	0.312	0.031	0.001	0.002	0.001	0.004	0.344	0.319	0.344	0.316	0.315	0.007
		Back	0.328	0.057	0.051	0.021	0.137	0.007	0.436	0.493	0.522	0.335	0.486	0.165
	LTE Band 13	Front	0.303	0.031	0.001	0.002	0.001	0.004	0.335	0.310	0.335	0.307	0.306	0.007
		Back	0.308	0.057	0.051	0.021	0.137	0.007	0.416	0.473	0.502	0.315	0.466	0.165
	LTE Band 41	Front	0.087	0.031	0.001	0.002	0.001	0.004	0.119	0.094	0.119	0.091	0.090	0.007
		Back	0.100	0.057	0.051	0.021	0.137	0.007	0.208	0.265	0.294	0.107	0.258	0.165

### 14.4 Product Specific Exposure Conditions

Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
	5GHz WLAN Chain 0	5GHz WLAN Chain 1	
	10g SAR (W/kg)	10g SAR (W/kg)	
Front	0.115	0.114	0.229
Back	0.353	0.516	0.869
Left side	0.149	0.044	0.193
Right side			0.000
Top side	0.001	0.086	0.087
Bottom side			0.000

**Remark:**

- According to KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN / Bluetooth SAR was excluded, due to Hotspot SAR was < 1.2W/kg.
- According to KDB 941225 D06 v02r01, for 5GHz WLAN SAR was excluded for that position, due to transmitting antenna located larger 25mm from that surface or edge

**Test Engineer :** Neil Hsiang Randy Lin Andy Jiang Willy Yu Ted Hsieh Jay Jian Thomas Wang White  
Huang Wilson Lin and Carter Chuang

## **15. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, "SAR EVALUATION PROCEDURES FOR UMPC MINI-TABLET DEVICES", Oct. 2015
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.