



# RADIO TEST REPORT

Report No.: STS2009231W02

Issued for

Nortek Security & Control LLC

5919 Sea Otter Place, STE 100, Carlsbad CA 92010, United States

|                       |                                                                                  |
|-----------------------|----------------------------------------------------------------------------------|
| <b>Product Name:</b>  | Video Doorbell                                                                   |
| <b>Brand Name:</b>    | 2GIG                                                                             |
| <b>Model Name:</b>    | 2GIG-VBELL-1                                                                     |
| <b>Series Model:</b>  | N/A                                                                              |
| <b>FCC ID:</b>        | EF400191                                                                         |
| <b>IC:</b>            | 1078A-00191                                                                      |
| <b>Test Standard:</b> | FCC Part 15.247<br>RSS-247 Issue 2, February 2017<br>RSS-Gen Issue 5 ,March 2019 |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,  
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





## TEST RESULT CERTIFICATION

**Applicant's Name** ..... : Nortek Security & Control LLC  
**Address** ..... : 5919 Sea Otter Place, STE 100, Carlsbad CA 92010, United States

**Manufacture's Name** ..... : Shenzhen Aoni Electronic Co.,Ltd  
**Address** ..... : Building 5, Honghui Industrial Park, 2nd Road Liuxian, Baoan District, Shenzhen, P.R. China, 518101

### Product Description

**Product Name** ..... : Video Doorbell  
**Brand Name** ..... : 2GIG  
**Model Name** ..... : 2GIG-VBELL-1  
**Series Model** ..... : N/A

**Test Standards** ..... : FCC Part15.247  
RSS-247 Issue 2, February 2017  
RSS-Gen Issue 5 ,March 2019

**Test Procedure** ..... : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :

**Date of receipt of test item** ..... : 16 Sept. 2020

**Date (s) of performance of tests** ..... : 16 Sept. 2020 ~ 22 Sept. 2020

**Date of Issue** ..... : 22 Sept. 2020

**Test Result** ..... : **Pass**

**Testing Engineer** :

(Chris Chen)

**Technical Manager** :

(Sean she)

**Authorized Signatory** :

(Vita Li)





| Table of Contents                                           | Page      |
|-------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b>                           | <b>6</b>  |
| 1.1 TEST FACTORY                                            | 7         |
| 1.2 MEASUREMENT UNCERTAINTY                                 | 7         |
| <b>2. GENERAL INFORMATION</b>                               | <b>8</b>  |
| 2.1 GENERAL DESCRIPTION OF THE EUT                          | 8         |
| 2.2 DESCRIPTION OF THE TEST MODES                           | 10        |
| 2.3 TEST SOFTWARE AND POWER LEVEL                           | 11        |
| 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11        |
| 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS  | 12        |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 13        |
| <b>3. EMC EMISSION TEST</b>                                 | <b>14</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                          | 14        |
| 3.2 RADIATED EMISSION MEASUREMENT                           | 18        |
| <b>4.CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>        | <b>33</b> |
| 4.1 LIMIT                                                   | 33        |
| 4.2 TEST PROCEDURE                                          | 33        |
| 4.3 DEVIATION FROM STANDARD                                 | 33        |
| 4.4 TEST SETUP                                              | 33        |
| 4.5 EUT OPERATION CONDITIONS                                | 33        |
| 4.6 TEST RESULTS                                            | 34        |
| <b>5. POWER SPECTRAL DENSITY TEST</b>                       | <b>50</b> |
| 5.1 LIMIT                                                   | 50        |
| 5.2 TEST PROCEDURE                                          | 50        |
| 5.3 DEVIATION FROM STANDARD                                 | 50        |
| 5.4 TEST SETUP                                              | 50        |
| 5.5 EUT OPERATION CONDITIONS                                | 50        |
| 5.6 TEST RESULTS                                            | 51        |
| <b>6. BANDWIDTH TEST</b>                                    | <b>67</b> |
| 6.1 LIMIT                                                   | 67        |
| 6.2 TEST PROCEDURE                                          | 67        |
| 6.3 DEVIATION FROM STANDARD                                 | 67        |
| 6.4 TEST SETUP                                              | 67        |
| 6.5 EUT OPERATION CONDITIONS                                | 67        |



| Table of Contents                             | Page      |
|-----------------------------------------------|-----------|
| 6.6 TEST RESULTS                              | 68        |
| <b>7. PEAK OUTPUT POWER TEST</b>              | <b>84</b> |
| 7.1 LIMIT                                     | 84        |
| 7.2 TEST PROCEDURE                            | 84        |
| 7.3 DEVIATION FROM STANDARD                   | 84        |
| 7.4 TEST SETUP                                | 84        |
| 7.5 EUT OPERATION CONDITIONS                  | 84        |
| 7.6 TEST RESULTS                              | 85        |
| <b>8. ANTENNA REQUIREMENT</b>                 | <b>88</b> |
| 8.1 STANDARD REQUIREMENT                      | 88        |
| 8.2 EUT ANTENNA                               | 88        |
| <b>9. FREQUENCY STABILITY</b>                 | <b>89</b> |
| 9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT | 89        |
| 9.2 TEST PROCEDURE                            | 89        |
| 9.3 TEST RESULT                               | 89        |
| <b>APPENDIX-PHOTOS OF TEST SETUP</b>          | <b>90</b> |

**Revision History**

| Rev. | Issue Date    | Report No.    | Effect Page | Contents      |
|------|---------------|---------------|-------------|---------------|
| 00   | 22 Sept. 2020 | STS2009231W02 | ALL         | Initial Issue |
|      |               |               |             |               |





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

| FCC Part 15.247, Subpart C<br>RSS-247 Issue 2                       |                                         |          |        |
|---------------------------------------------------------------------|-----------------------------------------|----------|--------|
| Standard Section                                                    | Test Item                               | Judgment | Remark |
| 15.207<br>RSS-Gen 8.8                                               | Conducted Emission                      | PASS     | --     |
| 15.247 (a)(2)<br>RSS-Gen 6.7<br>RSS-247 5.2 (a)                     | 6dB&99% Bandwidth                       | PASS     | --     |
| 15.247 (b)(3)<br>RSS-247 5.4 (d)                                    | Output Power                            | PASS     | --     |
| 15.247 (c)<br>RSS-Gen 8.9/8.10                                      | Radiated Spurious Emission              | PASS     | --     |
| 15.247 (d)<br>RSS-247 5.5<br>RSS-Gen 8.9/8.10                       | Conducted Spurious & Band Edge Emission | PASS     | --     |
| 15.247 (e)<br>RSS-247 5.2 (b)                                       | Power Spectral Density                  | PASS     | --     |
| 15.205<br>RSS-Gen 8.9/8.10                                          | Restricted bands of operation           | PASS     | --     |
| Part 15.247(d)/part<br>15.209(a)<br>RSS-247 5.5<br>RSS-Gen 8.9/8.10 | Band Edge Emission                      | PASS     | --     |
| 15.203<br>RSS-Gen 6.8                                               | Antenna Requirement                     | PASS     | --     |
| RSS-Gen 6.11/8.11                                                   | Frequency Stability                     | PASS     | --     |

### NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



## 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                              | Uncertainty          |
|-----|-----------------------------------|----------------------|
| 1   | RF output power, conducted        | $\pm 0.68\text{dB}$  |
| 2   | Unwanted Emissions, conducted     | $\pm 2.988\text{dB}$ |
| 3   | All emissions, radiated 30-1GHz   | $\pm 6.7\text{dB}$   |
| 4   | All emissions, radiated 1G-6GHz   | $\pm 5.5\text{dB}$   |
| 5   | All emissions, radiated >6G       | $\pm 5.8\text{dB}$   |
| 6   | Conducted Emission (9KHz-150KHz)  | $\pm 3.37\text{dB}$  |
| 7   | Conducted Emission (150KHz-30MHz) | $\pm 3.83\text{dB}$  |



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------|----------------------|------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------|
| Product Name            | Video Doorbell                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Trade Name              | 2GIG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Model Name              | 2GIG-VBELL-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Series Model            | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Model Difference        | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Product Description     | <div>The EUT is a Video Doorbell</div> <table><tr><td>Operation Frequency:</td><td>802.11b/g/n 20: 2412~2462 MHz<br/>802.11n(40MHz):2422~2452MHz</td></tr><tr><td>Modulation Type:</td><td>802.11b(DSSS):CCK,DQPSK,DBPSK<br/>802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM<br/>802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM</td></tr><tr><td>Number of Channel:</td><td>802.11b/g/n20: 11CH<br/>802.11n 40: 7CH</td></tr><tr><td>Antenna Designation:</td><td>PIFA</td></tr><tr><td>Antenna Gain (dBi):</td><td>Antenna number: 2<br/>Antenna A gain : 3dBi<br/>Antenna B gain : 3dBi<br/>MIMO technology Directional gain=6.01dBi<br/>Please refer to the Note 3.</td></tr><tr><td>Duty Cycle:</td><td>&gt;98%</td></tr></table> | Operation Frequency: | 802.11b/g/n 20: 2412~2462 MHz<br>802.11n(40MHz):2422~2452MHz | Modulation Type: | 802.11b(DSSS):CCK,DQPSK,DBPSK<br>802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM<br>802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM | Number of Channel: | 802.11b/g/n20: 11CH<br>802.11n 40: 7CH | Antenna Designation: | PIFA | Antenna Gain (dBi): | Antenna number: 2<br>Antenna A gain : 3dBi<br>Antenna B gain : 3dBi<br>MIMO technology Directional gain=6.01dBi<br>Please refer to the Note 3. | Duty Cycle: | >98% |
| Operation Frequency:    | 802.11b/g/n 20: 2412~2462 MHz<br>802.11n(40MHz):2422~2452MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Modulation Type:        | 802.11b(DSSS):CCK,DQPSK,DBPSK<br>802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM<br>802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Number of Channel:      | 802.11b/g/n20: 11CH<br>802.11n 40: 7CH                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Antenna Designation:    | PIFA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Antenna Gain (dBi):     | Antenna number: 2<br>Antenna A gain : 3dBi<br>Antenna B gain : 3dBi<br>MIMO technology Directional gain=6.01dBi<br>Please refer to the Note 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Duty Cycle:             | >98%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Channel List            | Please refer to the Note 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Power Rating            | Input: AC 8-24V, 50/60Hz 1A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Battery                 | Rated Voltage: DC 3.8V<br>Charge Limit: DC 4.35V<br>Capacity: 300mAh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Hardware version number | V1.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Software versionnumber  | 2020.08.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |
| Connecting I/O Port(s)  | Please refer to the Note 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                      |                                                              |                  |                                                                                                                 |                    |                                        |                      |      |                     |                                                                                                                                                |             |      |

802.11b/g : SISO mode only, 802.11n H20 /H40: MIMO mode only.

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



| Operation Frequency of channel |           |                                 |           |
|--------------------------------|-----------|---------------------------------|-----------|
| 802.11b/g/n(20MHz)             |           | Channel List for 802.11n(40MHz) |           |
| Channel                        | Frequency | Channel                         | Frequency |
| 01                             | 2412      | 03                              | 2422      |
| 02                             | 2417      | 04                              | 2427      |
| 03                             | 2422      | 05                              | 2432      |
| 04                             | 2427      | 06                              | 2437      |
| 05                             | 2432      | 07                              | 2442      |
| 06                             | 2437      | 08                              | 2447      |
| 07                             | 2442      | 09                              | 2452      |
| 08                             | 2447      |                                 |           |
| 09                             | 2452      |                                 |           |
| 10                             | 2457      |                                 |           |
| 11                             | 2462      |                                 |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

| For 802.11b/g/n (HT20) |            | For 802.11n (HT40) |            |
|------------------------|------------|--------------------|------------|
| Channel                | Freq.(MHz) | Channel            | Freq.(MHz) |
| 01                     | 2412       | 03                 | 2422       |
| 06                     | 2437       | 06                 | 2437       |
| 11                     | 2462       | 09                 | 2452       |

### 3. KDB 662911 D01 Multiple Transmitter Output v02r01

#### 2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

Directional gain =  $G_{ANT} + 10 \log(N_{ANT})$  dBi

(ii) If all transmit signals are completely uncorrelated with each other,

Directional gain =  $G_{ANT}$

Antenna number: 2

Antenna A gain : 3dBi

Antenna B gain : 3dBi

$G_{ANT} + 10 \log(N_{ANT})$  dBi

MIMO technology Directional gain =  $3 + 10 \log 2 = 6.01$  dBi



## 2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Worst Mode | Description               | Data Rate |
|------------|---------------------------|-----------|
| Mode 1     | TX IEEE 802.11b CH1       | 1 Mbps    |
| Mode 2     | TX IEEE 802.11b CH6       | 1 Mbps    |
| Mode 3     | TX IEEE 802.11 b CH11     | 1 Mbps    |
| Mode 4     | SISO mode                 | 1 Mbps    |
| Mode 5     | TX IEEE 802.11g CH1       | 6 Mbps    |
| Mode 6     | TX IEEE 802.11g CH6       | 6 Mbps    |
| Mode 7     | TX IEEE 802.11g CH11      | 6 Mbps    |
| Mode 8     | SISO mode                 | 6 Mbps    |
| Mode 9     | TX IEEE 802.11n HT20 CH1  | MCS 0     |
| Mode 10    | TX IEEE 802.11n HT20 CH6  | MCS 0     |
| Mode 11    | TX IEEE 802.11n HT20 CH11 | MCS 0     |
| Mode 12    | keeping MIMO TX mode      | MCS 0     |
| Mode 13    | TX IEEE 802.11n HT40 CH3  | MCS 0     |
| Mode 14    | TX IEEE 802.11n HT40 CH6  | MCS 0     |
| Mode 15    | TX IEEE 802.11n HT40 CH9  | MCS 0     |
| Mode 16    | keeping MIMO TX mode      | MCS 0     |

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) The battery is fully-charged during the radiated and RF conducted test.

### AC Conducted Emission

| Test Case             |                                |
|-----------------------|--------------------------------|
| AC Conducted Emission | Mode17: Keeping TX + WLAN Link |




### 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


| RF Function | Type      | Mode Or Modulation type | Ant Gain(dBi)                      | Ant_A Power Class | Ant_B Power Class | Software For Testing |
|-------------|-----------|-------------------------|------------------------------------|-------------------|-------------------|----------------------|
| WIFI(2.4G)  | 2.4G WIFI | 802.11b                 | Ant A: 3<br>Ant B: 3<br>MIMO: 6.01 | default           | default           | SecureCRT            |
|             |           | 802.11g                 |                                    | default           | default           |                      |
|             |           | 802.11n(HT20)           |                                    | default           | default           |                      |
|             |           | 802.11n(HT40)           |                                    | default           | default           |                      |

### 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Radiation Test Set

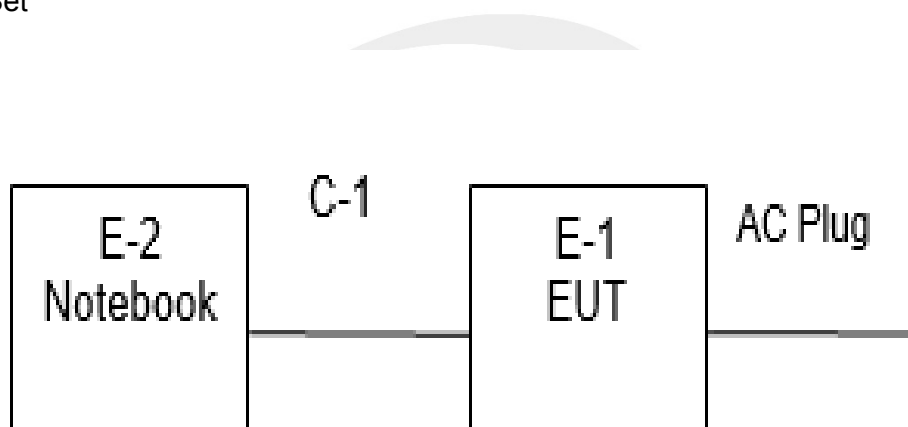

#### conduction Test Set

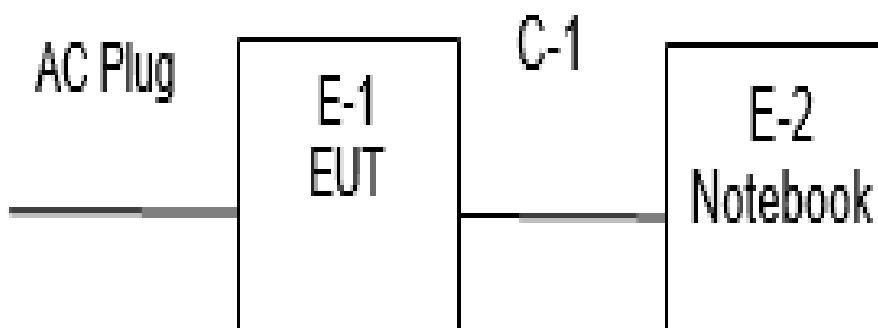



## 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|-----------|-----------|----------------|--------|------|
| N/A  | N/A       | N/A       | N/A            | N/A    | N/A  |
|      |           |           |                |        |      |
|      |           |           |                |        |      |
|      |           |           |                |        |      |

### Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|-----------|-----------|----------------|--------|------|
| E-2  | Notebook  | DELL      | VOSTRO.3800    | N/A    | N/A  |
| C-1  | USB Cable | N/A       | N/A            | 100cm  | N/A  |
|      |           |           |                |        |      |

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

| Kind of Equipment                   | Manufacturer | Type No.                   | Serial No.   | Last calibration | Calibrated until |
|-------------------------------------|--------------|----------------------------|--------------|------------------|------------------|
| Test Receiver                       | R&S          | ESCI                       | 101427       | 2019.10.09       | 2020.10.08       |
| Signal Analyzer                     | Agilent      | N9020A                     | MY51110105   | 2020.03.05       | 2021.03.04       |
| Active loop Antenna                 | ZHINAN       | ZN30900C                   | 16035        | 2018.03.11       | 2021.03.10       |
| Bilog Antenna                       | TESEQ        | CBL6111D                   | 34678        | 2017.11.02       | 2020.11.01       |
| Horn Antenna                        | SCHWARZBECK  | BBHA<br>9120D(1201)        | 9120D-1343   | 2018.10.19       | 2021.10.18       |
| SHF-EHF Horn<br>Antenna (18G-40GHz) | A-INFO       | LB-180400-KF               | J211020657   | 2018.03.11       | 2021.03.10       |
| Pre-Amplifier<br>(0.1M-3GHz)        | EM           | EM330                      | 060665       | 2019.10.09       | 2020.10.08       |
| Pre-Amplifier<br>(1G-18GHz)         | SKET         | LNPA-01018G-45             | SK2018080901 | 2019.10.12       | 2020.10.11       |
| Pre-Amplifier<br>(18G-40GHz)        | SKET         | LNPA-1840-50               | SK2018101801 | 2019.10.12       | 2020.10.11       |
| Temperature &<br>Humidity           | HH660        | Mieo                       | N/A          | 2019.10.17       | 2020.10.16       |
| turn table                          | EM           | SC100_1                    | 60531        | N/A              | N/A              |
| Antenna mast                        | EM           | SC100                      | N/A          | N/A              | N/A              |
| Test SW                             | FARAD        | EZ-EMC(Ver.STSLAB-03A1 RE) |              |                  |                  |

## Conduction Test equipment

| Kind of Equipment         | Manufacturer | Type No.                   | Serial No. | Last calibration | Calibrated until |
|---------------------------|--------------|----------------------------|------------|------------------|------------------|
| Test Receiver             | R&S          | ESCI                       | 101427     | 2019.10.09       | 2020.10.08       |
| LISN                      | R&S          | ENV216                     | 101242     | 2019.10.09       | 2020.10.08       |
| LISN                      | EMCO         | 3810/2NM                   | 23625      | 2019.10.09       | 2020.10.08       |
| Temperature &<br>Humidity | HH660        | Mieo                       | N/A        | 2019.10.12       | 2020.10.11       |
| Test SW                   | FARAD        | EZ-EMC(Ver.STSLAB-03A1 CE) |            |                  |                  |

## RF Connected Test

| Kind of Equipment         | Manufacturer | Type No.        | Serial No.    | Last calibration | Calibrated until |
|---------------------------|--------------|-----------------|---------------|------------------|------------------|
| USB RF power sensor       | DARE         | RPR3006W        | 15I00041SNO03 | 2019.10.09       | 2020.10.08       |
| Signal Analyzer           | Agilent      | N9020A          | MY49100060    | 2019.10.09       | 2020.10.08       |
| Temperature &<br>Humidity | HH660        | Mieo            | N/A           | 2019.10.12       | 2020.10.11       |
| Test SW                   | FARAD        | LZ-RF /LzRf-3A3 |               |                  |                  |



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15. 207(a)&RSS-Gen Issue 5 limit in the table below has to be followed.

| FREQUENCY (MHz) | Conducted Emissionlimit (dBUV) |           |
|-----------------|--------------------------------|-----------|
|                 | Quasi-peak                     | Average   |
| 0.15 -0.5       | 66 – 56 *                      | 56 – 46 * |
| 0.50 -5.0       | 56.00                          | 46.00     |
| 5.0 -30.0       | 60.00                          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 Db    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

### 3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50U<sub>H</sub> of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

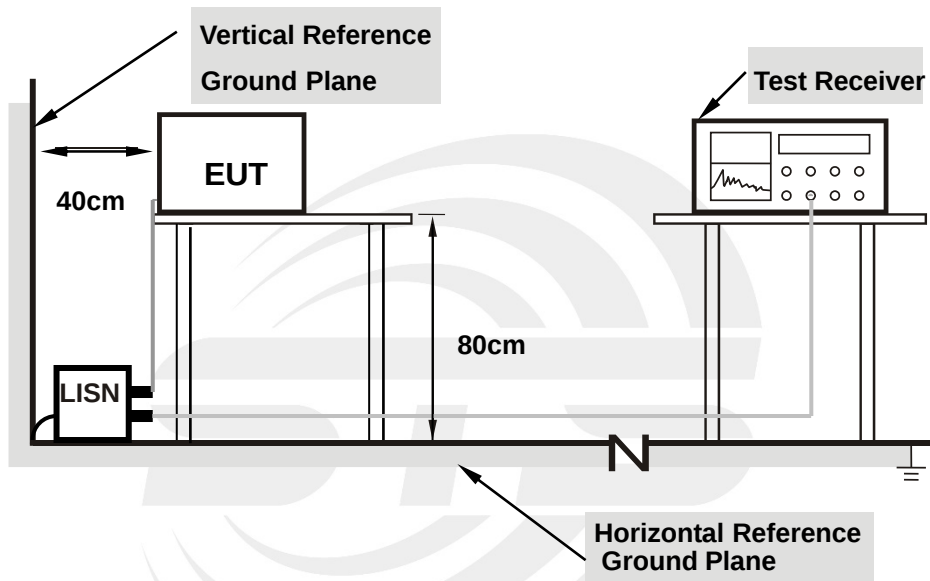

**Note: 1.**Support units were connected to second LISN.

**2.**Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 3.1.5 TEST RESULT


|               |             |                    |       |
|---------------|-------------|--------------------|-------|
| Temperature:  | 26.8l       | Relative Humidity: | 66%RH |
| Test Voltage: | AC 16V/60Hz | Phase:             | L     |
| Test Mode:    | Mode 17     |                    |       |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(D<br>b) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|---------------------------|------------------|-----------------|----------------|--------|
| 1   | 0.5060             | 17.51             | 20.43                     | 37.94            | 56.00           | -18.06         | QP     |
| 2   | 0.5060             | -2.01             | 20.43                     | 18.42            | 46.00           | -27.58         | AVG    |
| 3   | 0.9180             | 11.86             | 20.19                     | 32.05            | 56.00           | -23.95         | QP     |
| 4   | 0.9180             | 2.68              | 20.19                     | 22.87            | 46.00           | -23.13         | AVG    |
| 5   | 2.7660             | 7.94              | 20.09                     | 28.03            | 56.00           | -27.97         | QP     |
| 6   | 2.7660             | 2.72              | 20.09                     | 22.81            | 46.00           | -23.19         | AVG    |
| 7   | 6.4540             | 7.58              | 19.91                     | 27.49            | 60.00           | -32.51         | QP     |
| 8   | 6.4540             | 1.73              | 19.91                     | 21.64            | 50.00           | -28.36         | AVG    |
| 9   | 13.8380            | 8.43              | 20.00                     | 28.43            | 60.00           | -31.57         | QP     |
| 10  | 13.8380            | 2.35              | 20.00                     | 22.35            | 50.00           | -27.65         | AVG    |
| 11  | 24.9340            | 8.05              | 20.67                     | 28.72            | 60.00           | -31.28         | QP     |
| 12  | 24.9340            | -2.24             | 20.67                     | 18.43            | 50.00           | -31.57         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10Db)

100.0 dBuV

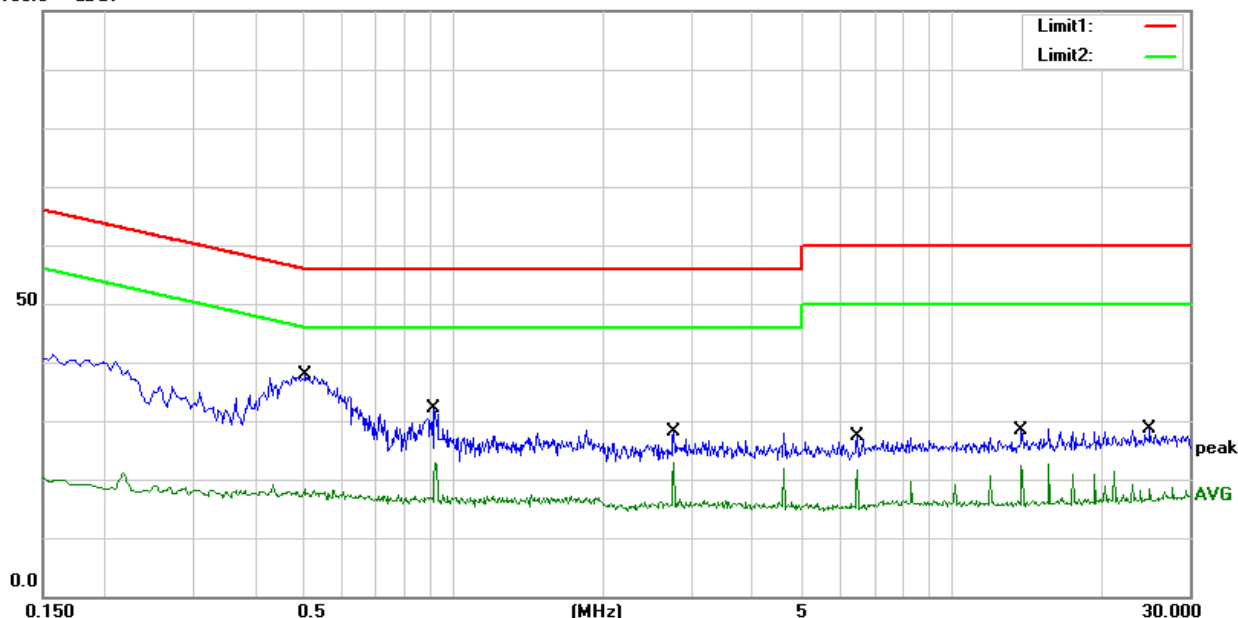




|               |             |                    |       |
|---------------|-------------|--------------------|-------|
| Temperature:  | 26.8l       | Relative Humidity: | 66%RH |
| Test Voltage: | AC 16V/60Hz | Phase:             | N     |
| Test Mode:    | Mode 17     |                    |       |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(D<br>b) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|---------------------------|------------------|-----------------|----------------|--------|
| 1   | 0.4820             | 18.03             | 20.44                     | 38.47            | 56.30           | -17.83         | QP     |
| 2   | 0.4820             | -1.78             | 20.44                     | 18.66            | 46.30           | -27.64         | AVG    |
| 3   | 0.9220             | 12.42             | 20.19                     | 32.61            | 56.00           | -23.39         | QP     |
| 4   | 0.9220             | 7.07              | 20.19                     | 27.26            | 46.00           | -18.74         | AVG    |
| 5   | 2.7620             | 9.30              | 20.09                     | 29.39            | 56.00           | -26.61         | QP     |
| 6   | 2.7620             | 2.66              | 20.09                     | 22.75            | 46.00           | -23.25         | AVG    |
| 7   | 6.4260             | 9.04              | 19.92                     | 28.96            | 60.00           | -31.04         | QP     |
| 8   | 6.4260             | 3.41              | 19.92                     | 23.33            | 50.00           | -26.67         | AVG    |
| 9   | 11.9420            | 9.05              | 19.90                     | 28.95            | 60.00           | -31.05         | QP     |
| 10  | 11.9420            | 3.31              | 19.90                     | 23.21            | 50.00           | -26.79         | AVG    |
| 11  | 21.1500            | 6.79              | 20.65                     | 27.44            | 60.00           | -32.56         | QP     |
| 12  | 21.1500            | -1.15             | 20.65                     | 19.50            | 50.00           | -30.50         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10Db)

100.0 dBuV

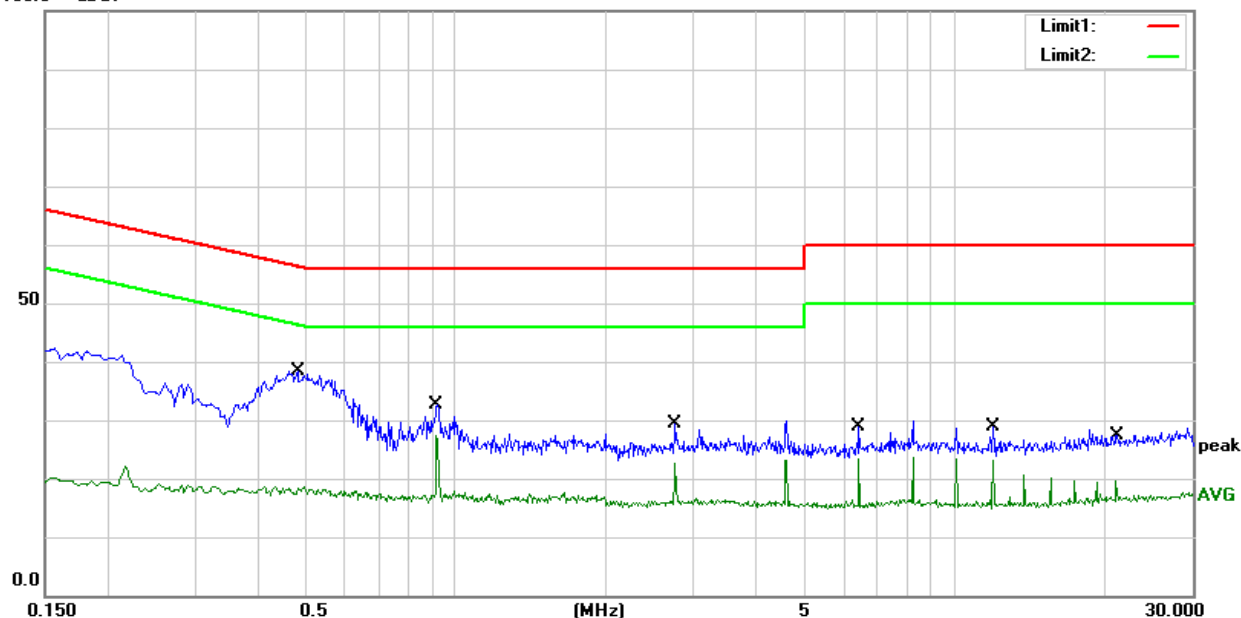



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a), RSS-Gen Issue 5 and RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz – 1000MHz)

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

| FREQUENCY (MHz) | (dBuV/m) (at 3M) |         |
|-----------------|------------------|---------|
|                 | PEAK             | AVERAGE |
| Above 1000      | 74               | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (Uv/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

| FREQUENCY (MHz)   | FREQUENCY (MHz)     | FREQUENCY (MHz) | FREQUENCY (GHz) |
|-------------------|---------------------|-----------------|-----------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410       | 4.5-5.15        |
| 0.495-0.505       | 16.69475-16.69525   | 608-614         | 5.35-5.46       |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240        | 7.25-7.75       |
| 4.125-4.128       | 25.5-25.67          | 1300-1427       | 8.025-8.5       |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5     | 9.0-9.2         |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5   | 9.3-9.5         |
| 6.215-6.218       | 74.8-75.2           | 1660-1710       | 10.6-12.7       |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2   | 13.25-13.4      |
| 6.31175-6.31225   | 123-138             | 2200-2300       | 14.47-14.5      |
| 8.291-8.294       | 149.9-150.05        | 2310-2390       | 15.35-16.2      |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500     | 17.7-21.4       |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900       | 22.01-23.12     |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267       | 23.6-24.0       |
| 12.29-12.293      | 167.72-173.2        | 3332-3339       | 31.2-31.8       |
| 12.51975-12.52025 | 240-285             | 3345.8-3358     | 36.43-36.5      |
| 12.57675-12.57725 | 322-335.4           | 3600-4400       | Above 38.6      |
| 13.36-13.41       |                     |                 |                 |



IC:

| FREQUENCY (MHz)     | FREQUENCY (MHz)       | FREQUENCY (GHz) |
|---------------------|-----------------------|-----------------|
| 0.090 – 0.110       | 149.9 – 150.05        | 9.0 – 9.2       |
| 0.495 – 0.505       | 156.52475 – 156.52525 | 9.3 – 9.5       |
| 2.1735 – 2.1905     | 156.7 – 156.9         | 10.6 – 12.7     |
| 3.020 – 3.026       | 162.0125 – 167.17     | 13.25 – 13.4    |
| 4.125 – 4.128       | 167.72 – 173.2        | 14.47 – 14.5    |
| 4.17725 – 4.17775   | 240 – 285             | 15.35 – 16.2    |
| 4.20725 – 4.20775   | 322 – 335.4           | 17.7 – 21.4     |
| 5.677 – 5.683       | 399.9 – 410           | 22.01 – 23.12   |
| 6.215 – 6.218       | 608 – 614             | 23.6 – 24.0     |
| 6.26775 – 6.26825   | 960 – 1427            | 31.2 – 31.8     |
| 6.31175 – 6.31225   | 1435 – 1626.5         | 36.43 – 36.5    |
| 8.291 – 8.294       | 1645.5 – 1646.5       | Above 38.6      |
| 8.362 – 8.366       | 1660 – 1710           |                 |
| 8.37625 – 8.38675   | 1718.8 – 1722.2       |                 |
| 8.41425 – 8.41475   | 2200 – 2300           |                 |
| 12.29 – 12.293      | 2310 – 2390           |                 |
| 12.51975 – 12.52025 | 2483.5 – 2500         |                 |
| 12.57675 – 12.57725 | 2655 – 2900           |                 |
| 13.36 – 13.41       | 3260 – 3267           |                 |
| 16.42 – 16.423      | 3332 – 3339           |                 |
| 16.69475 – 16.69525 | 3345.8 – 3358         |                 |
| 16.80425 – 16.80475 | 3500 – 4400           |                 |
| 25.5 – 25.67        | 4500 – 5150           |                 |
| 37.5 – 38.25        | 5350 - 5460           |                 |
| 73 – 74.6           | 7250 – 7750           |                 |
| 74.8 – 75.2         | 8025 – 8500           |                 |
| 108 – 138           |                       |                 |



## For Radiated Emission

| Spectrum Parameter                    | Setting                                                                                                                         |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Attenuation                           | Auto                                                                                                                            |
| Detector                              | Peak/QP/AV                                                                                                                      |
| Start Frequency                       | 9 KHz/150KHz(Peak/QP/AV)                                                                                                        |
| Stop Frequency                        | 150KHz/30MHz(Peak/QP/AV)                                                                                                        |
| RB / VB (emission in restricted band) | 200Hz (From 9kHz to 0.15MHz)/<br>9KHz (From 0.15MHz to 30MHz);<br>200Hz (From 9kHz to 0.15MHz)/<br>9KHz (From 0.15MHz to 30MHz) |

| Spectrum Parameter                    | Setting            |
|---------------------------------------|--------------------|
| Attenuation                           | Auto               |
| Detector                              | Peak/QP            |
| Start Frequency                       | 30 MHz(Peak/QP)    |
| Stop Frequency                        | 1000 MHz (Peak/QP) |
| RB / VB (emission in restricted band) | 120 KHz / 300 KHz  |

| Spectrum Parameter                    | Setting                                      |
|---------------------------------------|----------------------------------------------|
| Attenuation                           | Auto                                         |
| Detector                              | Peak/AV                                      |
| Start Frequency                       | 1000 MHz(Peak/AV)                            |
| Stop Frequency                        | 10 <sup>th</sup> carrier 20ntenna20(Peak/AV) |
| RB / VB (emission in restricted band) | 1 MHz / 3 MHz(Peak)<br>1 MHz/1/T MHz(AVG)    |

## For Restricted band

| Spectrum Parameter   | Setting                                                                |
|----------------------|------------------------------------------------------------------------|
| Detector             | Peak/AV                                                                |
| Start/Stop Frequency | Lower Band Edge: 2310 to 2430 MHz<br>Upper Band Edge: 2445 to 2500 MHz |
| RB / VB              | 1 MHz / 3 MHz(Peak)<br>1 MHz/1/T MHz(AVG)                              |



| Receiver Parameter     | Setting                              |
|------------------------|--------------------------------------|
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV    |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP       |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP        |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP     |

### 3.2.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported.

### 3.2.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

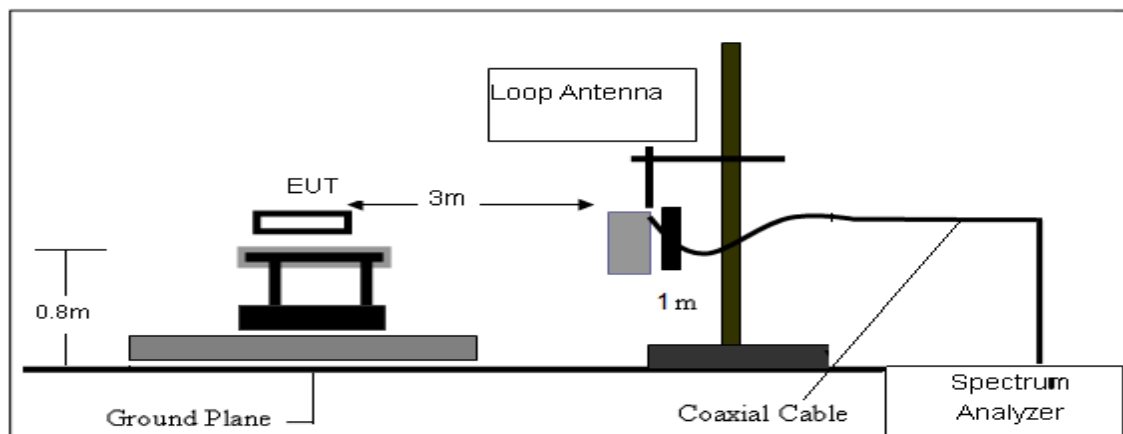

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

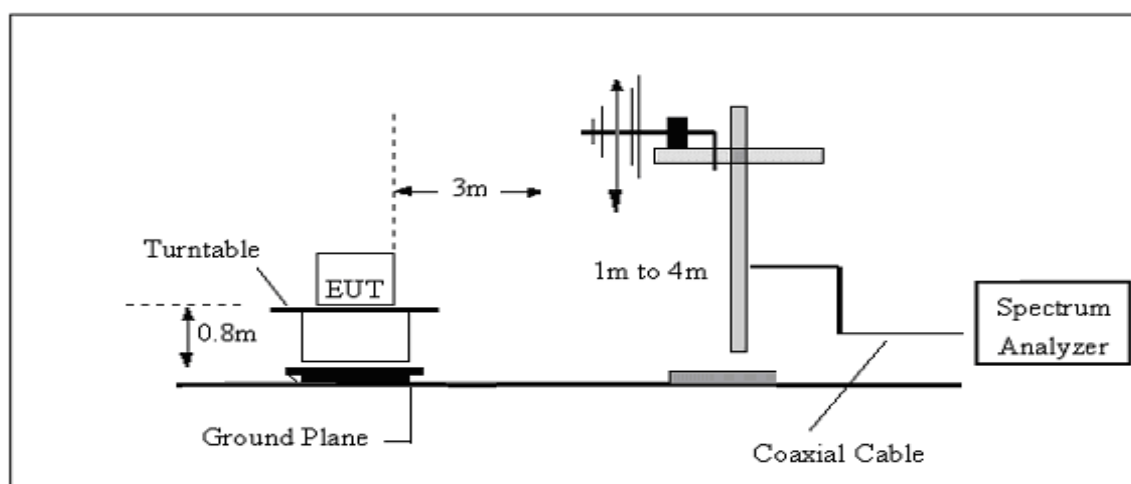

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

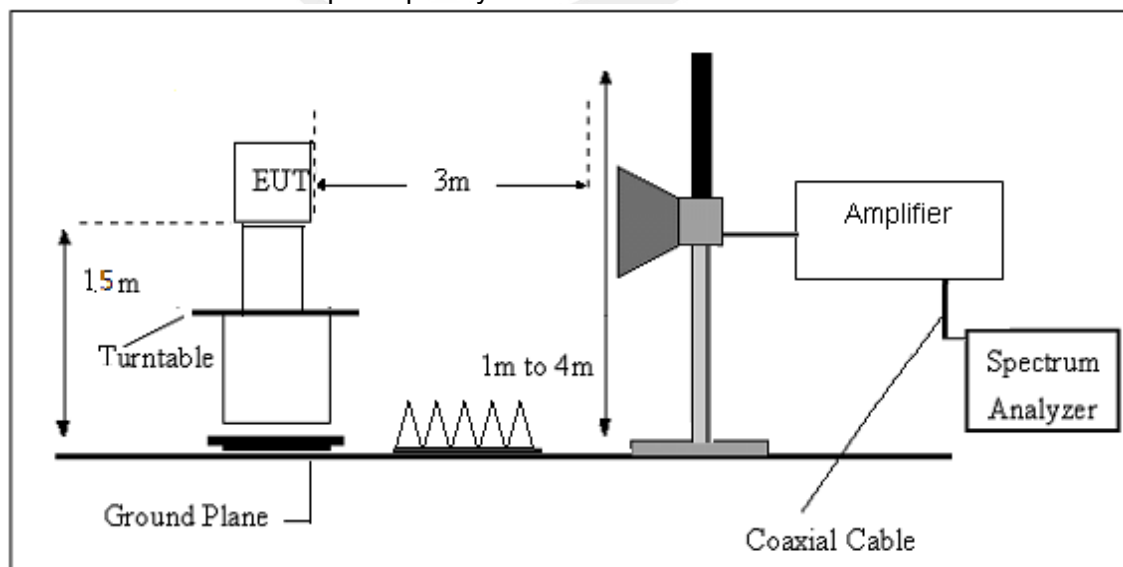

### 3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

| Frequency | FS       | RA       | AF   | CL   | AG   | Factor |
|-----------|----------|----------|------|------|------|--------|
| (MHz)     | (dBμV/m) | (dBμV/m) | (Db) | (Db) | (Db) | (Db)   |
| 300       | 40       | 58.1     | 12.2 | 1.6  | 31.9 | -18.1  |

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





## 3.2.6 TEST RESULT

9KHz-30MHz

|               |         |                    |       |
|---------------|---------|--------------------|-------|
| Temperature:  | 23.3l   | Relative Humidity: | 60%RH |
| Test Voltage: | DC 3.8V | Polarization:      | --    |
| Test Mode:    | TX Mode |                    |       |


| Freq. | Reading  | Limit    | Margin | State | Test Result |
|-------|----------|----------|--------|-------|-------------|
| (MHz) | (dBuV/m) | (dBuV/m) | (Db)   | P/F   |             |
| --    | --       | --       | --     | --    | PASS        |
| --    | --       | --       | --     | --    | PASS        |

## Note:

The amplitude of spurious emissions which are attenuated by more than 20Db below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance}) (\text{Db})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.

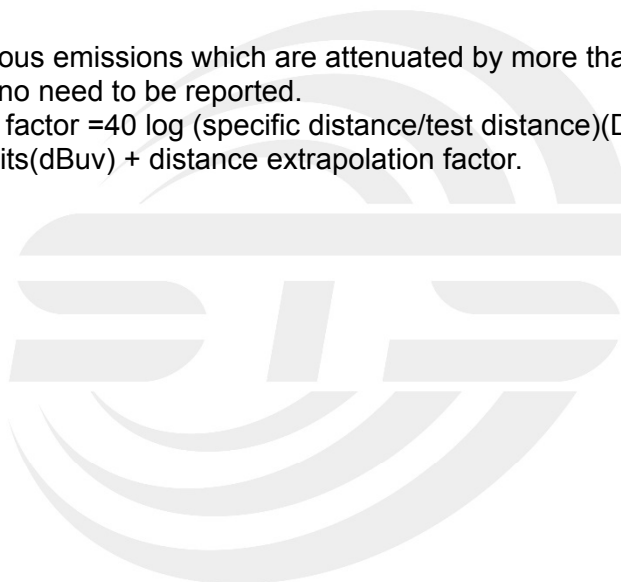



(30MHz – 1000MHz)

|               |                                |                    |            |
|---------------|--------------------------------|--------------------|------------|
| Temperature:  | 23.3l                          | Relative Humidity: | 60%RH      |
| Test Voltage: | DC 3.8V                        | Phase:             | Horizontal |
| Test Mode:    | Mode 1-16 (Mode 12 worst mode) |                    |            |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(Db/<br>m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1   | 199.7500           | 54.59             | -21.11                      | 33.48              | 43.50             | -10.02         | QP     |
| 2   | 279.2900           | 54.93             | -15.58                      | 39.35              | 46.00             | -6.65          | QP     |
| 3   | 594.5400           | 44.06             | -5.84                       | 38.22              | 46.00             | -7.78          | QP     |
| 4   | 668.2600           | 44.28             | -4.62                       | 39.66              | 46.00             | -6.34          | QP     |
| 5   | 742.9500           | 41.47             | -2.13                       | 39.34              | 46.00             | -6.66          | QP     |
| 6   | 903.0000           | 39.76             | -0.37                       | 39.39              | 46.00             | -6.61          | QP     |

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit

2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

80.0 dBuV/m

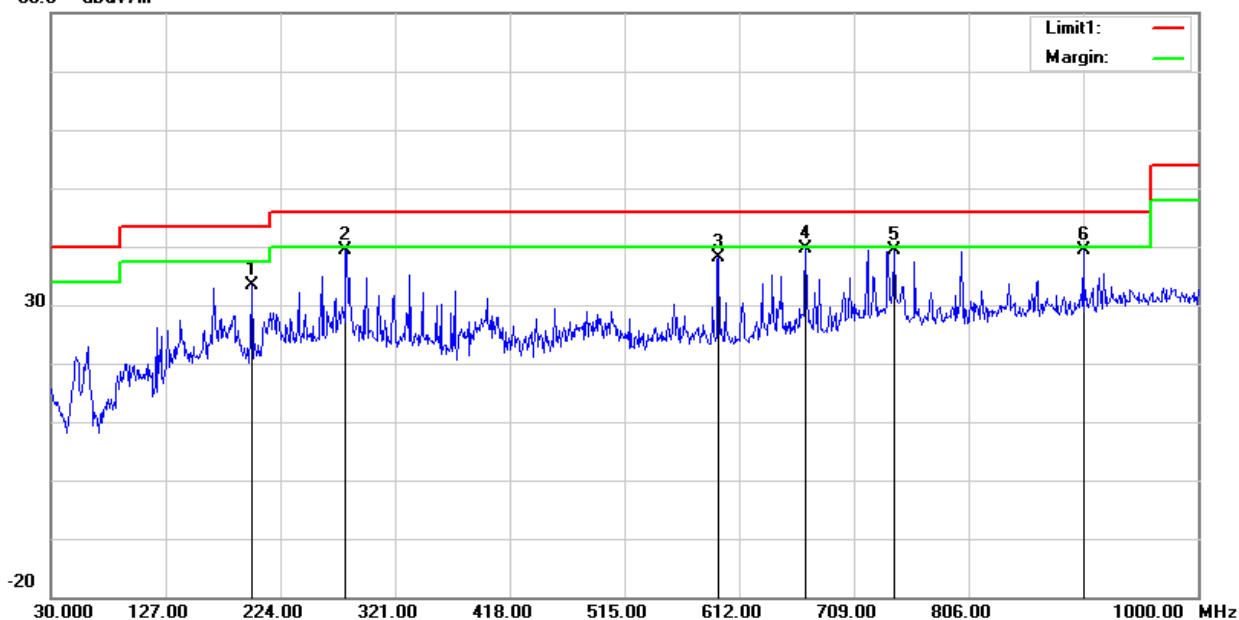




|               |                                |                    |          |
|---------------|--------------------------------|--------------------|----------|
| Temperature:  | 23.3l                          | Relative Humidity: | 60%RH    |
| Test Voltage: | DC 3.8V                        | Phase:             | Vertical |
| Test Mode:    | Mode 1-16 (Mode 12 worst mode) |                    |          |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(Db/<br>m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1   | 60.0700            | 57.91             | -25.86                      | 32.05              | 40.00             | -7.95          | QP     |
| 2   | 280.2600           | 53.97             | -15.60                      | 38.37              | 46.00             | -7.63          | QP     |
| 3   | 482.9900           | 36.97             | -8.52                       | 28.45              | 46.00             | -17.55         | QP     |
| 4   | 668.2600           | 40.31             | -4.62                       | 35.69              | 46.00             | -10.31         | QP     |
| 5   | 742.9500           | 36.44             | -2.13                       | 34.31              | 46.00             | -11.69         | QP     |
| 6   | 839.9500           | 34.80             | -0.34                       | 34.46              | 46.00             | -11.54         | QP     |

Remark:.

1. Margin = Result (Result =Reading + Factor )-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBuV/m

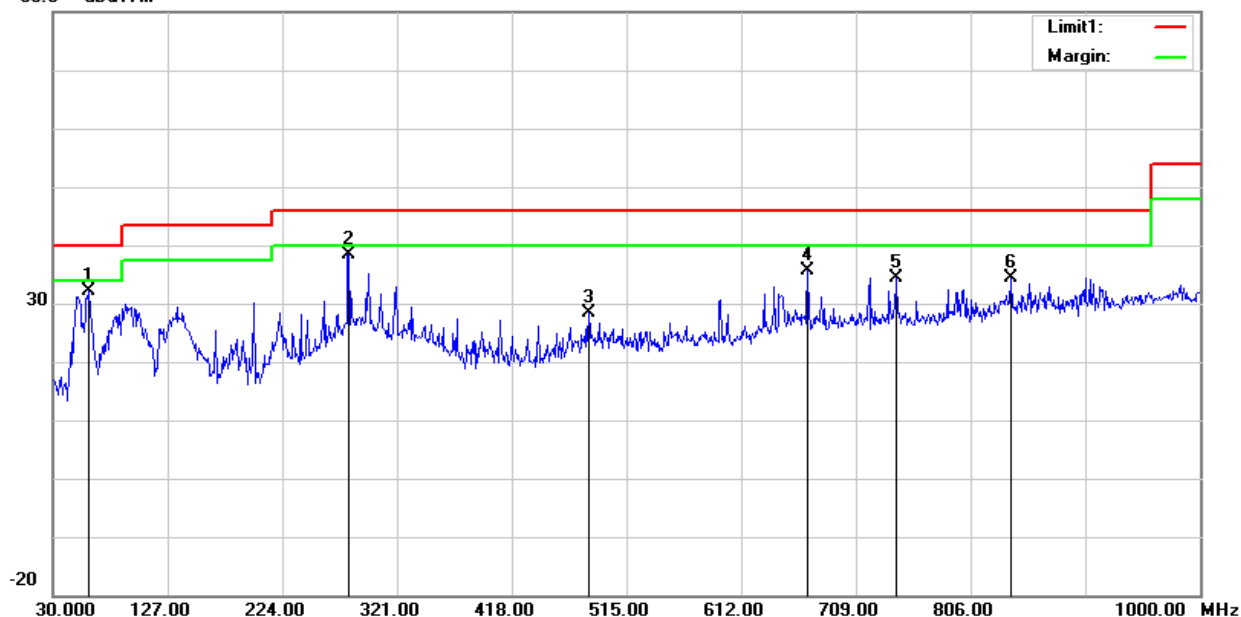



(1000MHz-25GHz) Restricted band and Spurious emission Requirements

## 802.11 n(HT20)

| Frequency                           | Meter Reading | Amplifier | Loss  | Antenna Factor | Corrected Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-------------------------------------|---------------|-----------|-------|----------------|------------------|----------------|----------|--------|----------|------------|
| (MHz)                               | (dBμV)        | (Db)      | (Db)  | (Db/m)         | (Db)             | (dBμV/m)       | (dBμV/m) | (Db)   | Type     |            |
| Low Channel (802.11n20/2412 MHz)    |               |           |       |                |                  |                |          |        |          |            |
| 3264.79                             | 62.02         | 44.70     | 6.70  | 28.20          | -9.80            | 52.22          | 74.00    | -21.78 | PK       | Vertical   |
| 3264.79                             | 50.04         | 44.70     | 6.70  | 28.20          | -9.80            | 40.24          | 54.00    | -13.76 | AV       | Vertical   |
| 3264.80                             | 61.67         | 44.70     | 6.70  | 28.20          | -9.80            | 51.87          | 74.00    | -22.13 | PK       | Horizontal |
| 3264.80                             | 51.21         | 44.70     | 6.70  | 28.20          | -9.80            | 41.41          | 54.00    | -12.59 | AV       | Horizontal |
| 4824.45                             | 59.41         | 44.20     | 9.04  | 31.60          | -3.56            | 55.85          | 74.00    | -18.15 | PK       | Vertical   |
| 4824.45                             | 49.50         | 44.20     | 9.04  | 31.60          | -3.56            | 45.94          | 54.00    | -8.06  | AV       | Vertical   |
| 4824.41                             | 58.16         | 44.20     | 9.04  | 31.60          | -3.56            | 54.60          | 74.00    | -19.40 | PK       | Horizontal |
| 4824.41                             | 49.91         | 44.20     | 9.04  | 31.60          | -3.56            | 46.35          | 54.00    | -7.65  | AV       | Horizontal |
| 5359.61                             | 48.17         | 44.20     | 9.86  | 32.00          | -2.34            | 45.83          | 74.00    | -28.17 | PK       | Vertical   |
| 5359.61                             | 39.27         | 44.20     | 9.86  | 32.00          | -2.34            | 36.93          | 54.00    | -17.07 | AV       | Vertical   |
| 5359.64                             | 47.32         | 44.20     | 9.86  | 32.00          | -2.34            | 44.98          | 74.00    | -29.02 | PK       | Horizontal |
| 5359.64                             | 38.77         | 44.20     | 9.86  | 32.00          | -2.34            | 36.43          | 54.00    | -17.57 | AV       | Horizontal |
| 7235.70                             | 53.60         | 43.50     | 11.40 | 35.50          | 3.40             | 57.00          | 74.00    | -17.00 | PK       | Vertical   |
| 7235.70                             | 44.09         | 43.50     | 11.40 | 35.50          | 3.40             | 47.49          | 54.00    | -6.51  | AV       | Vertical   |
| 7235.70                             | 53.73         | 43.50     | 11.40 | 35.50          | 3.40             | 57.13          | 74.00    | -16.87 | PK       | Horizontal |
| 7235.70                             | 44.53         | 43.50     | 11.40 | 35.50          | 3.40             | 47.93          | 54.00    | -6.07  | AV       | Horizontal |
| Middle Channel (802.11n20/2437 MHz) |               |           |       |                |                  |                |          |        |          |            |
| 3264.88                             | 61.91         | 44.70     | 6.70  | 28.20          | -9.80            | 52.11          | 74.00    | -21.89 | PK       | Vertical   |
| 3264.88                             | 50.10         | 44.70     | 6.70  | 28.20          | -9.80            | 40.30          | 54.00    | -13.70 | AV       | Vertical   |
| 3264.81                             | 61.28         | 44.70     | 6.70  | 28.20          | -9.80            | 51.48          | 74.00    | -22.52 | PK       | Horizontal |
| 3264.81                             | 51.24         | 44.70     | 6.70  | 28.20          | -9.80            | 41.44          | 54.00    | -12.56 | AV       | Horizontal |
| 4874.40                             | 59.43         | 44.20     | 9.04  | 31.60          | -3.56            | 55.87          | 74.00    | -18.13 | PK       | Vertical   |
| 4874.40                             | 49.34         | 44.20     | 9.04  | 31.60          | -3.56            | 45.78          | 54.00    | -8.22  | AV       | Vertical   |
| 4874.58                             | 58.87         | 44.20     | 9.04  | 31.60          | -3.56            | 55.31          | 74.00    | -18.69 | PK       | Horizontal |
| 4874.58                             | 49.33         | 44.20     | 9.04  | 31.60          | -3.56            | 45.77          | 54.00    | -8.23  | AV       | Horizontal |
| 5359.62                             | 48.69         | 44.20     | 9.86  | 32.00          | -2.34            | 46.35          | 74.00    | -27.65 | PK       | Vertical   |
| 5359.62                             | 39.67         | 44.20     | 9.86  | 32.00          | -2.34            | 37.33          | 54.00    | -16.67 | AV       | Vertical   |
| 5359.75                             | 47.60         | 44.20     | 9.86  | 32.00          | -2.34            | 45.26          | 74.00    | -28.74 | PK       | Horizontal |
| 5359.75                             | 39.17         | 44.20     | 9.86  | 32.00          | -2.34            | 36.83          | 54.00    | -17.17 | AV       | Horizontal |
| 7310.72                             | 54.58         | 43.50     | 11.40 | 35.50          | 3.40             | 57.98          | 74.00    | -16.02 | PK       | Vertical   |
| 7310.72                             | 44.08         | 43.50     | 11.40 | 35.50          | 3.40             | 47.48          | 54.00    | -6.52  | AV       | Vertical   |
| 7310.78                             | 54.64         | 43.50     | 11.40 | 35.50          | 3.40             | 58.04          | 74.00    | -15.96 | PK       | Horizontal |
| 7310.78                             | 43.58         | 43.50     | 11.40 | 35.50          | 3.40             | 46.98          | 54.00    | -7.02  | AV       | Horizontal |



| High Channel (802.11n20/2462 MHz) |       |       |       |       |       |       |       |        |    |            |
|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|----|------------|
| 3264.82                           | 61.56 | 44.70 | 6.70  | 28.20 | -9.80 | 51.76 | 74.00 | -22.24 | PK | Vertical   |
| 3264.82                           | 51.03 | 44.70 | 6.70  | 28.20 | -9.80 | 41.23 | 54.00 | -12.77 | AV | Vertical   |
| 3264.79                           | 61.37 | 44.70 | 6.70  | 28.20 | -9.80 | 51.57 | 74.00 | -22.43 | PK | Horizontal |
| 3264.79                           | 50.00 | 44.70 | 6.70  | 28.20 | -9.80 | 40.20 | 54.00 | -13.80 | AV | Horizontal |
| 4924.50                           | 59.37 | 44.20 | 9.04  | 31.60 | -3.56 | 55.81 | 74.00 | -18.19 | PK | Vertical   |
| 4924.50                           | 50.49 | 44.20 | 9.04  | 31.60 | -3.56 | 46.93 | 54.00 | -7.07  | AV | Vertical   |
| 4924.46                           | 58.32 | 44.20 | 9.04  | 31.60 | -3.56 | 54.76 | 74.00 | -19.24 | PK | Horizontal |
| 4924.46                           | 50.13 | 44.20 | 9.04  | 31.60 | -3.56 | 46.57 | 54.00 | -7.43  | AV | Horizontal |
| 5359.74                           | 49.16 | 44.20 | 9.86  | 32.00 | -2.34 | 46.82 | 74.00 | -27.18 | PK | Vertical   |
| 5359.74                           | 39.29 | 44.20 | 9.86  | 32.00 | -2.34 | 36.95 | 54.00 | -17.05 | AV | Vertical   |
| 5359.83                           | 48.14 | 44.20 | 9.86  | 32.00 | -2.34 | 45.80 | 74.00 | -28.20 | PK | Horizontal |
| 5359.83                           | 39.22 | 44.20 | 9.86  | 32.00 | -2.34 | 36.88 | 54.00 | -17.12 | AV | Horizontal |
| 7385.91                           | 54.78 | 43.50 | 11.40 | 35.50 | 3.40  | 58.18 | 74.00 | -15.82 | PK | Vertical   |
| 7385.91                           | 43.76 | 43.50 | 11.40 | 35.50 | 3.40  | 47.16 | 54.00 | -6.84  | AV | Vertical   |
| 7385.87                           | 54.08 | 43.50 | 11.40 | 35.50 | 3.40  | 57.48 | 74.00 | -16.52 | PK | Horizontal |
| 7385.87                           | 44.36 | 43.50 | 11.40 | 35.50 | 3.40  | 47.76 | 54.00 | -6.24  | AV | Horizontal |

## Remark:


- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40) all have been tested the antenna A, antenna B and antenna A+B, the worst case is 802.11n(HT20) of the antenna A+B.  
 Emission Level = Reading + Factor  
 Margin = Limit – Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20Db below the limit, the frequency emission is mainly from the environment noise.



## 3.2.6 TEST RESULTS(Restricted band Requirements)

## 802.11 n(HT20)-Low


Horizontal

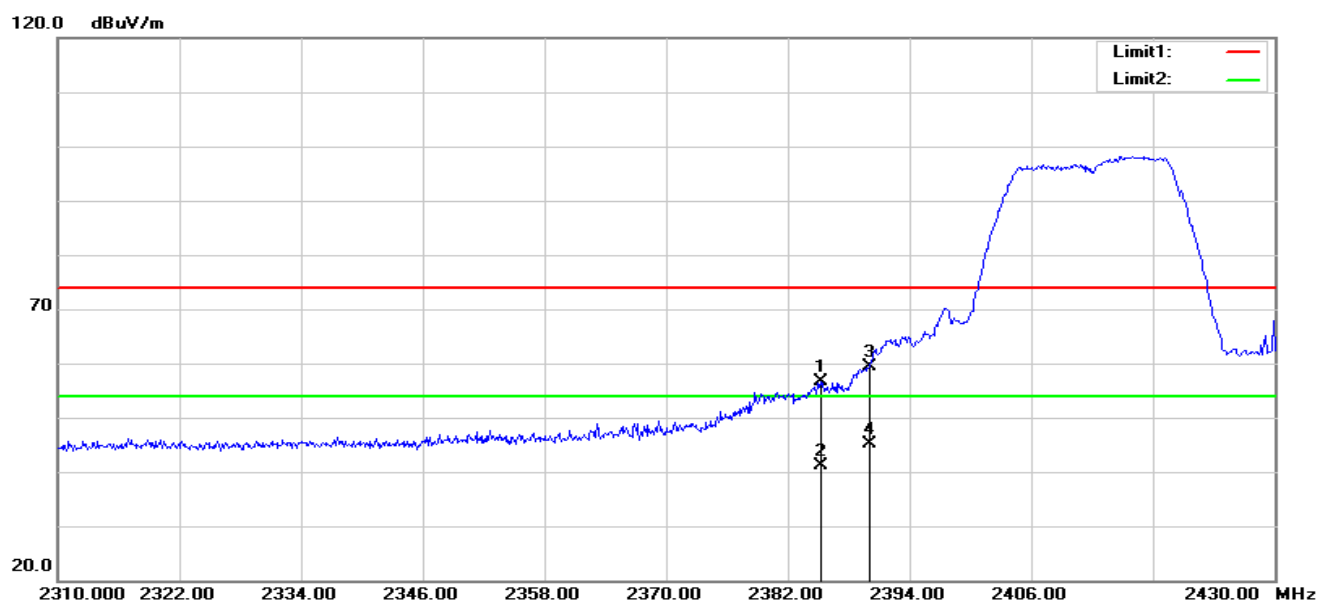

| No. | Frequency | Reading | Correct      | Result   | Limit    | Margin | Remark |
|-----|-----------|---------|--------------|----------|----------|--------|--------|
|     | (MHz)     | (dBuV)  | Factor(Db/m) | (dBuV/m) | (dBuV/m) | (Db)   |        |
| 1   | 2385.240  | 52.36   | 4.27         | 56.63    | 74.00    | -17.37 | peak   |
| 2   | 2385.240  | 36.83   | 4.27         | 41.10    | 54.00    | -12.90 | AVG    |
| 3   | 2390.000  | 55.16   | 4.34         | 59.50    | 74.00    | -14.50 | peak   |
| 4   | 2390.000  | 40.82   | 4.34         | 45.16    | 54.00    | -8.84  | AVG    |



## Vertical

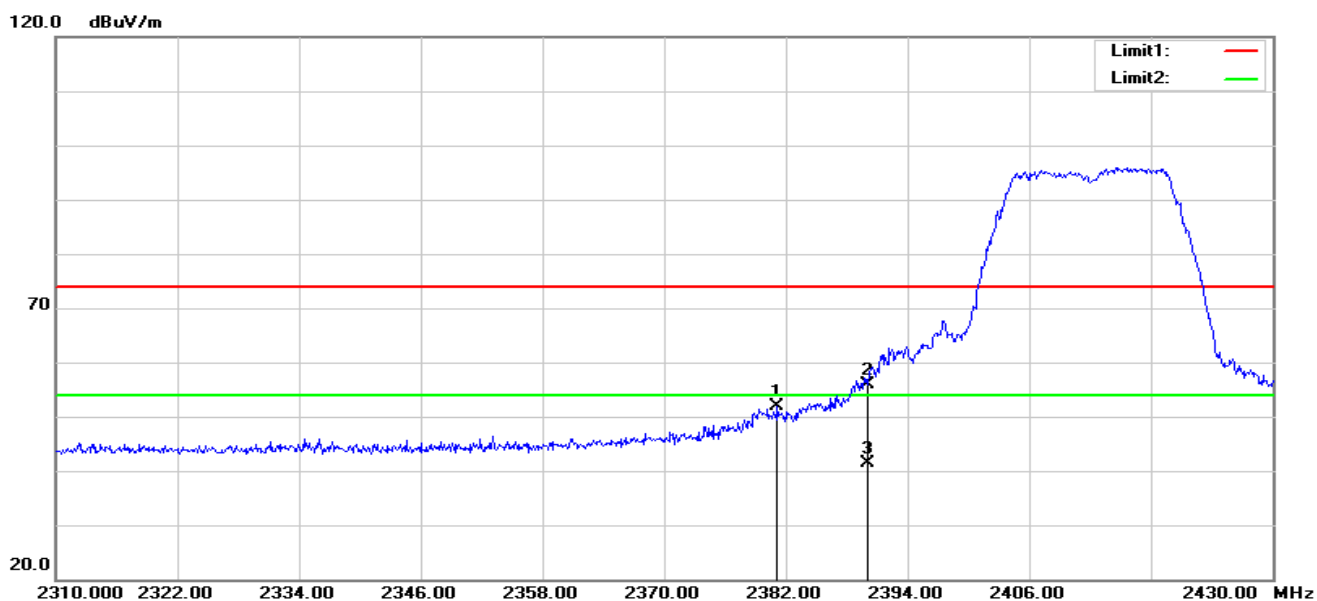


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(Db/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2381.160           | 47.60             | 4.21                    | 51.81              | 74.00             | -22.19         | peak   |
| 2   | 2390.000           | 51.57             | 4.34                    | 55.91              | 74.00             | -18.09         | peak   |
| 3   | 2390.000           | 37.14             | 4.34                    | 41.48              | 54.00             | -12.52         | AVG    |



## 802.11 n(HT20)-High


Horizontal

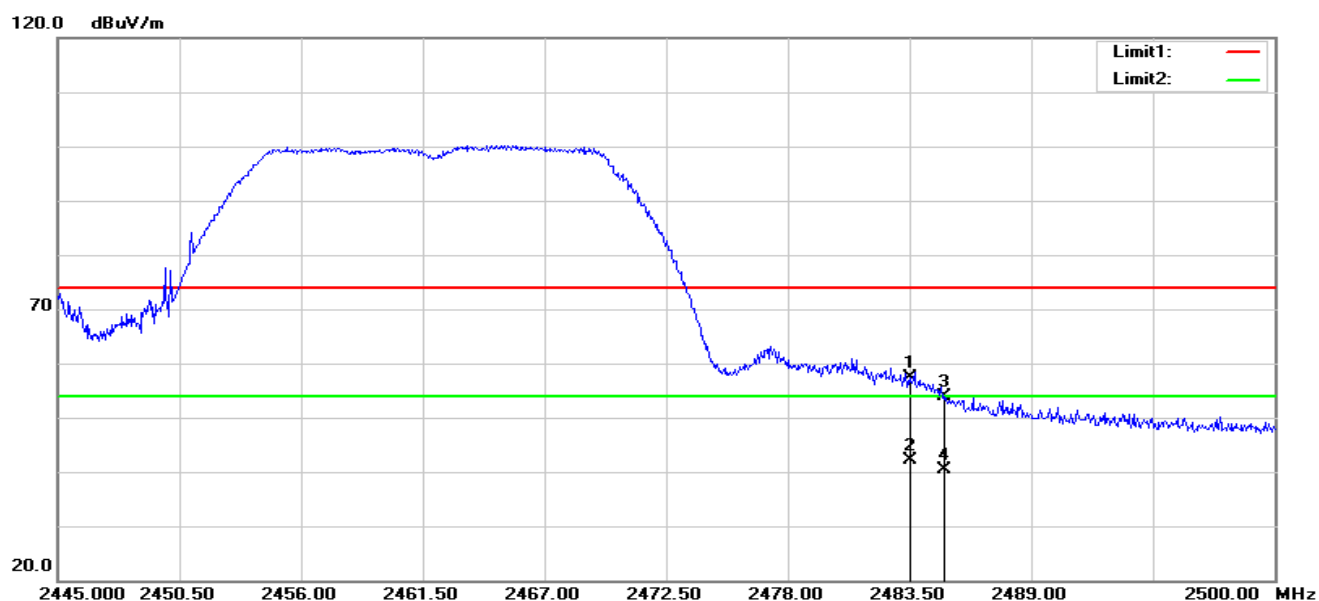

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(Db/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2483.500           | 52.84             | 4.60                    | 57.44              | 74.00             | -16.56         | peak   |
| 2   | 2483.500           | 37.49             | 4.60                    | 42.09              | 54.00             | -11.91         | AVG    |
| 3   | 2485.095           | 49.22             | 4.61                    | 53.83              | 74.00             | -20.17         | peak   |
| 4   | 2485.095           | 35.65             | 4.61                    | 40.26              | 54.00             | -13.74         | AVG    |



## Vertical

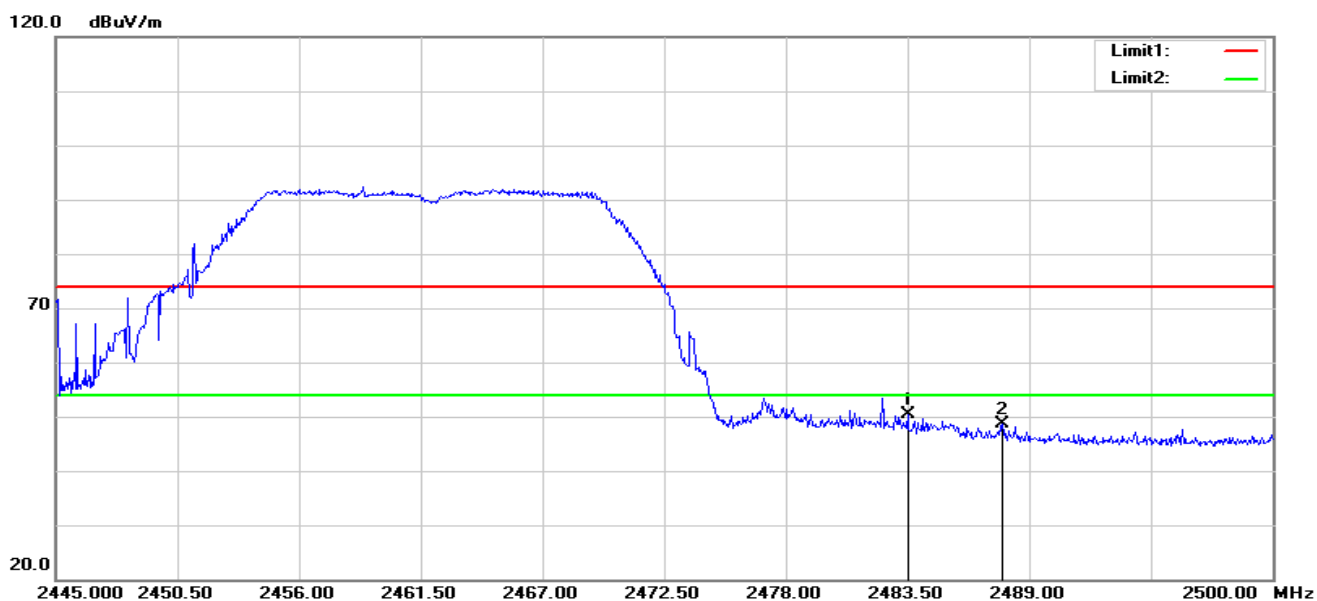

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(Db/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(Db) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2483.500           | 45.71             | 4.60                    | 50.31              | 74.00             | -23.69         | peak   |
| 2   | 2487.790           | 43.91             | 4.62                    | 48.53              | 74.00             | -25.47         | peak   |

Note: 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40), all have been tested the antenna A, antenna B and antenna A+B, the worst case is 802.11 n(HT20) of the antenna A+B.

## 4.CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 4.1 LIMIT

According to FCC section 15.247(d) & RSS-247 Issue 2, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20Db below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 4.2 TEST PROCEDURE

| Spectrum Parameter                    | Setting                                     |
|---------------------------------------|---------------------------------------------|
| Detector                              | Peak                                        |
| Start/Stop Frequency                  | 30 MHz to 10 <sup>th</sup> carrier harmonic |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz                             |
| Trace-Mode:                           | Max hold                                    |


For Band edge

| Spectrum Parameter                    | Setting                                                                |
|---------------------------------------|------------------------------------------------------------------------|
| Detector                              | Peak                                                                   |
| Start/Stop Frequency                  | Lower Band Edge: 2300 to 2432 MHz<br>Upper Band Edge: 2442 to 2500 MHz |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz                                                        |
| Trace-Mode:                           | Max hold                                                               |

### 4.3 DEVIATION FROM STANDARD

No deviation.

### 4.4 TEST SETUP

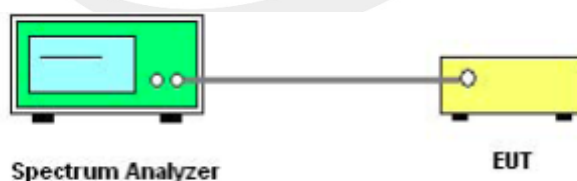

The EUT which is powered by the Battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




## 4.6 TEST RESULTS

Note: Antenna A Power> Antenna B Power, Both antenna A and B have been test, Only show the worst data of Antenna A


|               |         |                    |                             |
|---------------|---------|--------------------|-----------------------------|
| Temperature:  | 25°C    | Relative Humidity: | 60%                         |
| Test Voltage: | DC 3.8V | Test Mode:         | TX b Mode /CH01, CH06, CH11 |

Antenna A

CH 01

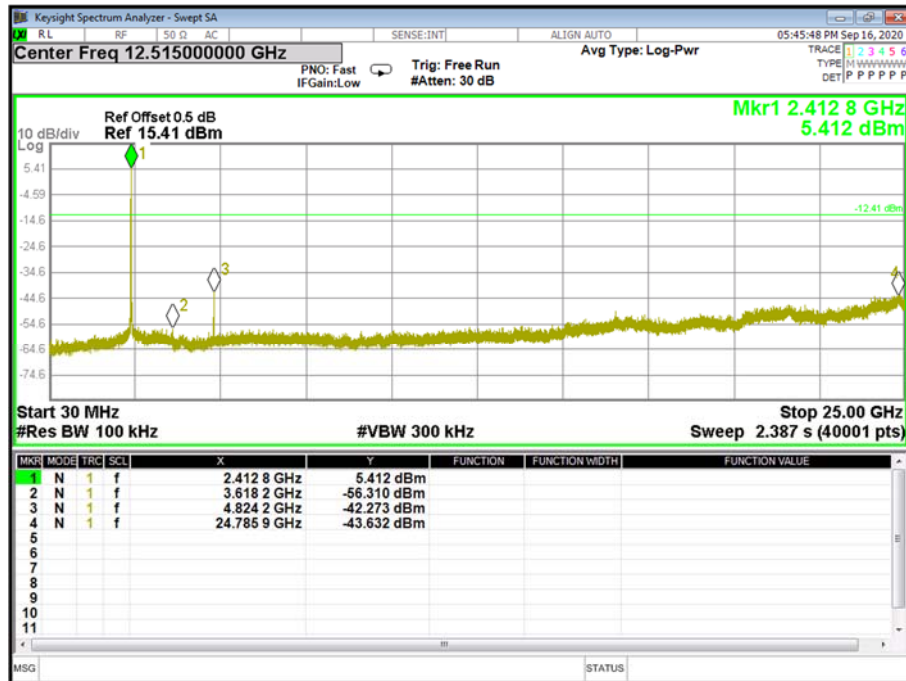


CH 06

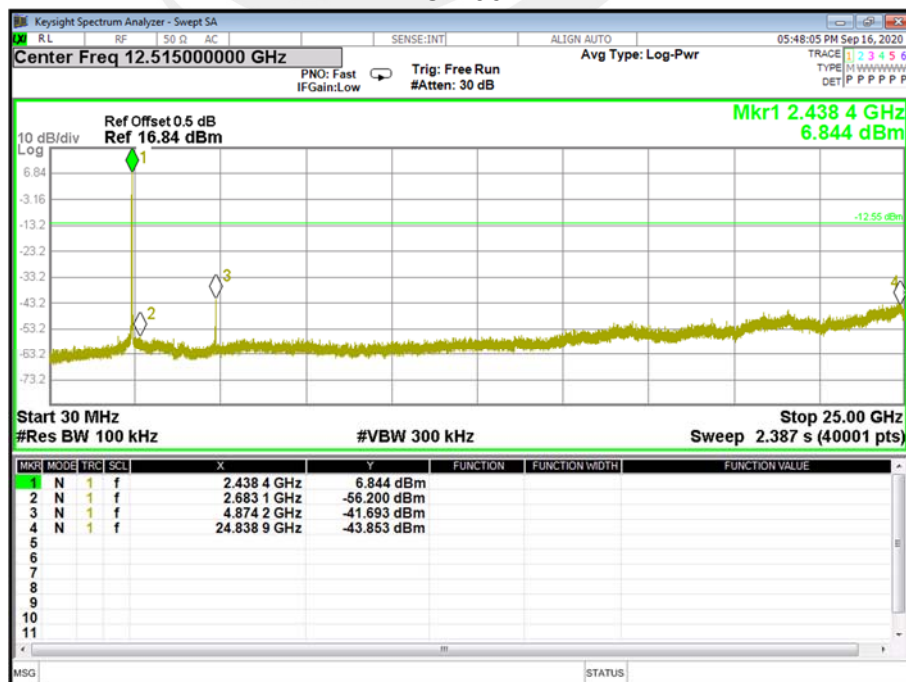




## CH 11

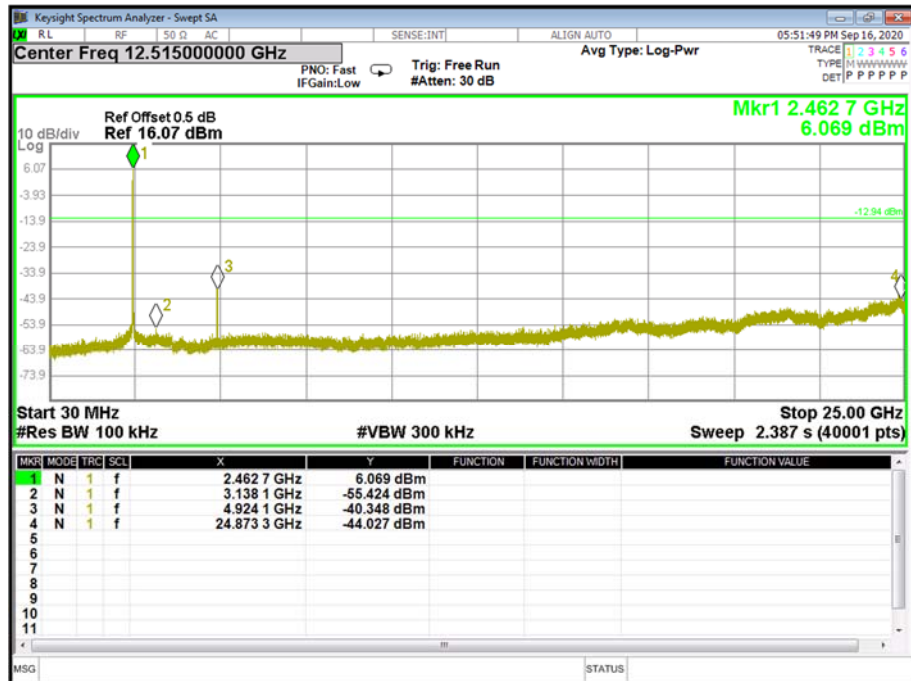




Band edge(it's also the reference level for conducted spurious emission)

CH 01

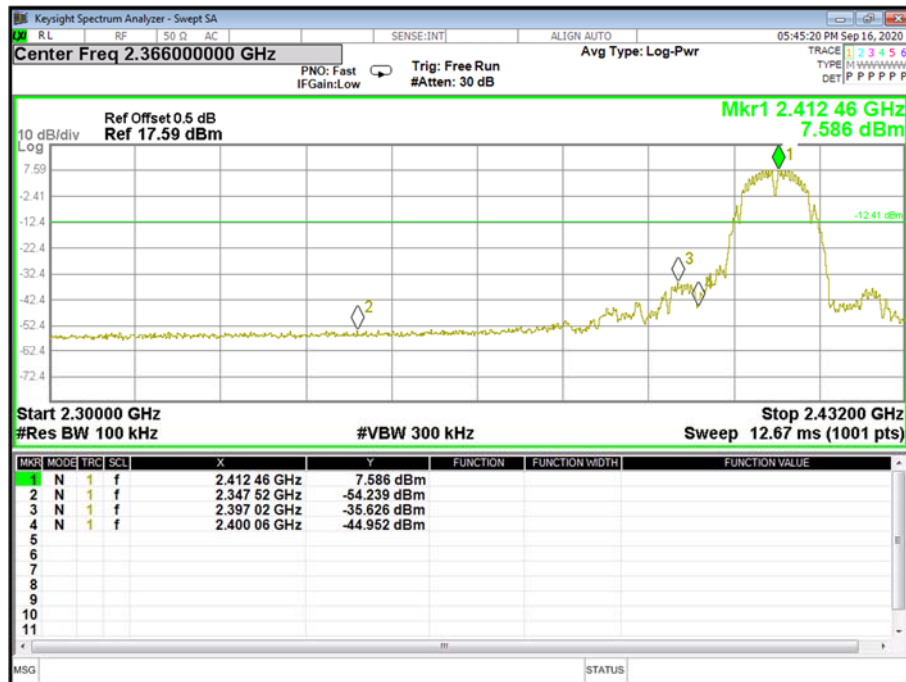


CH 06

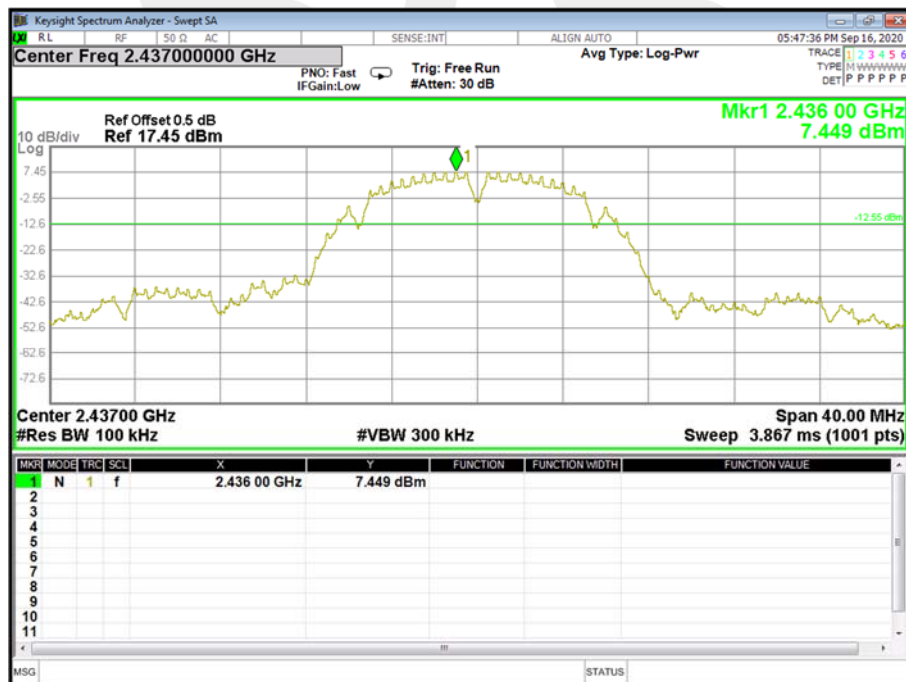



## CH 11

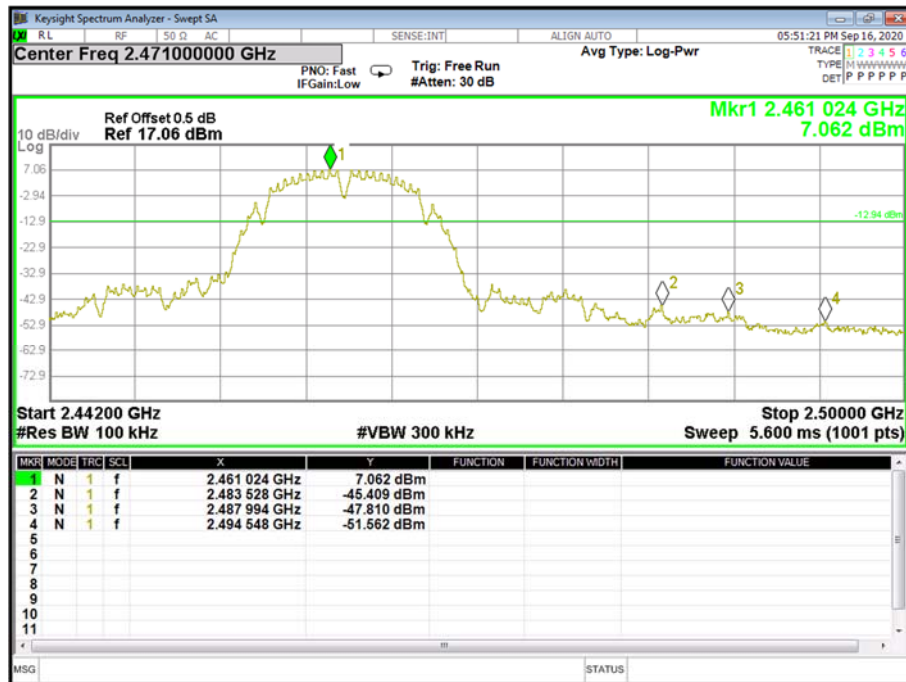





|               |         |                    |                             |
|---------------|---------|--------------------|-----------------------------|
| Temperature:  | 25°C    | Relative Humidity: | 60%                         |
| Test Voltage: | DC 3.8V | Test Mode:         | TX g Mode /CH01, CH06, CH11 |

Antenna A

CH 01

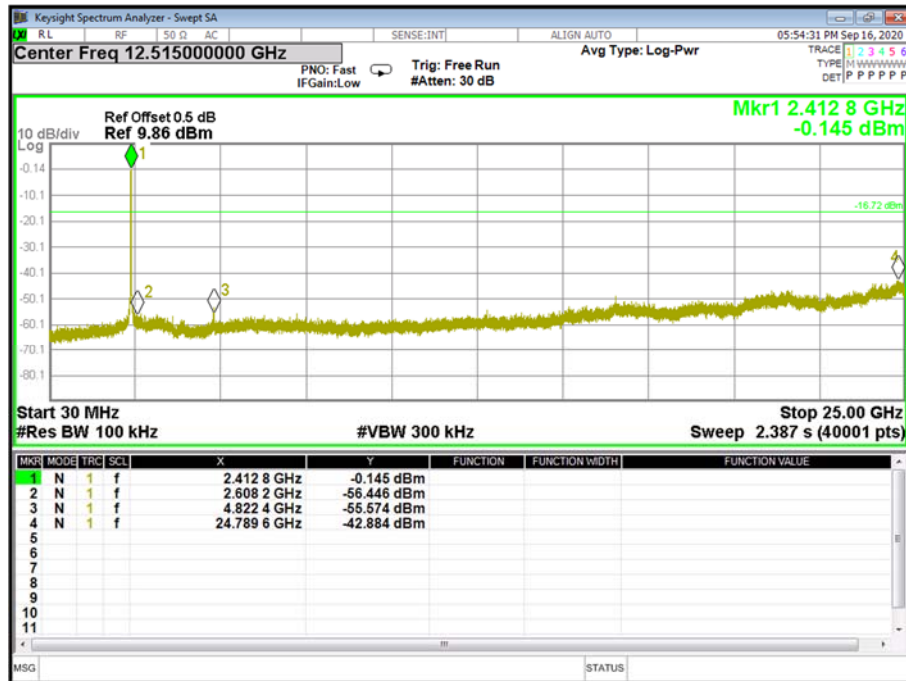


CH06

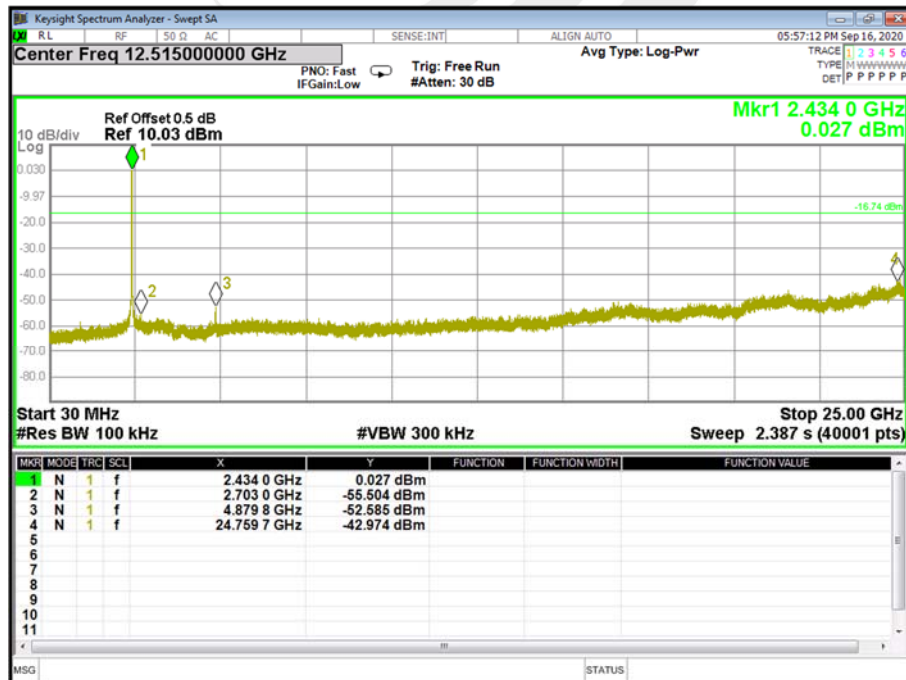




## CH 11

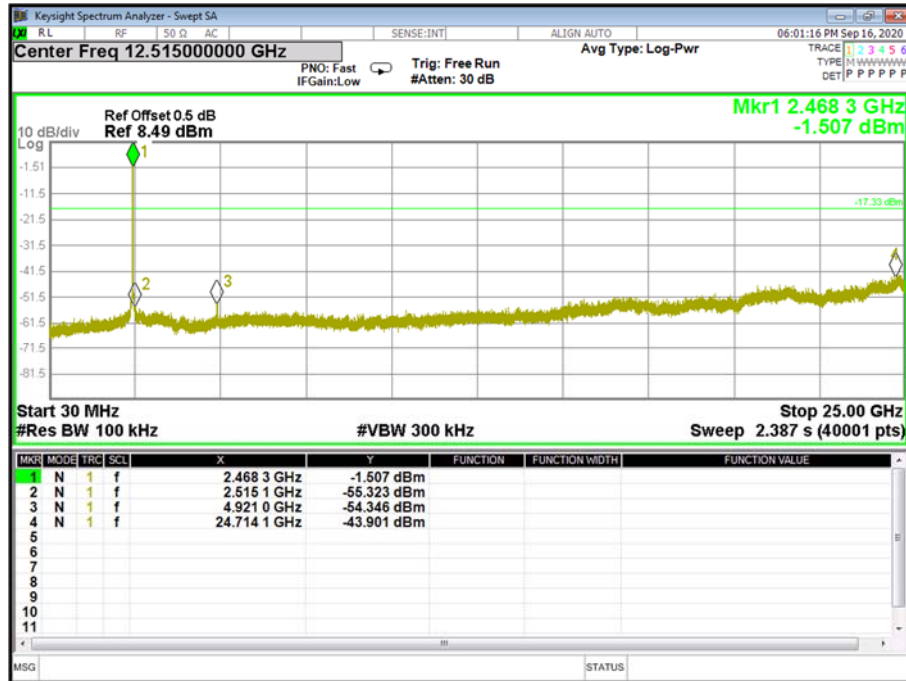




Band edge(it's also the reference level for conducted spurious emission)

CH 01

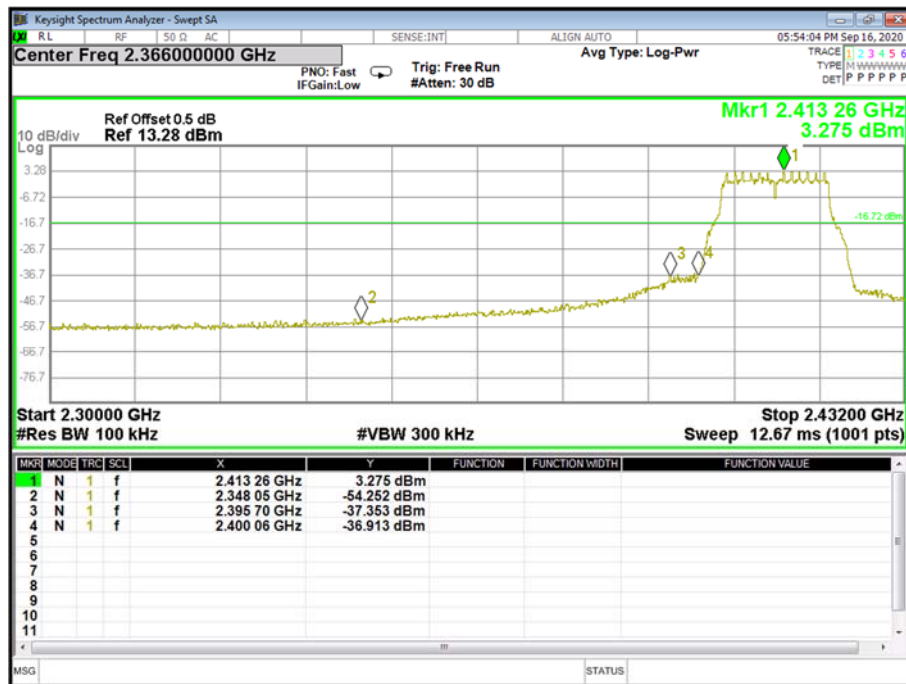


CH06

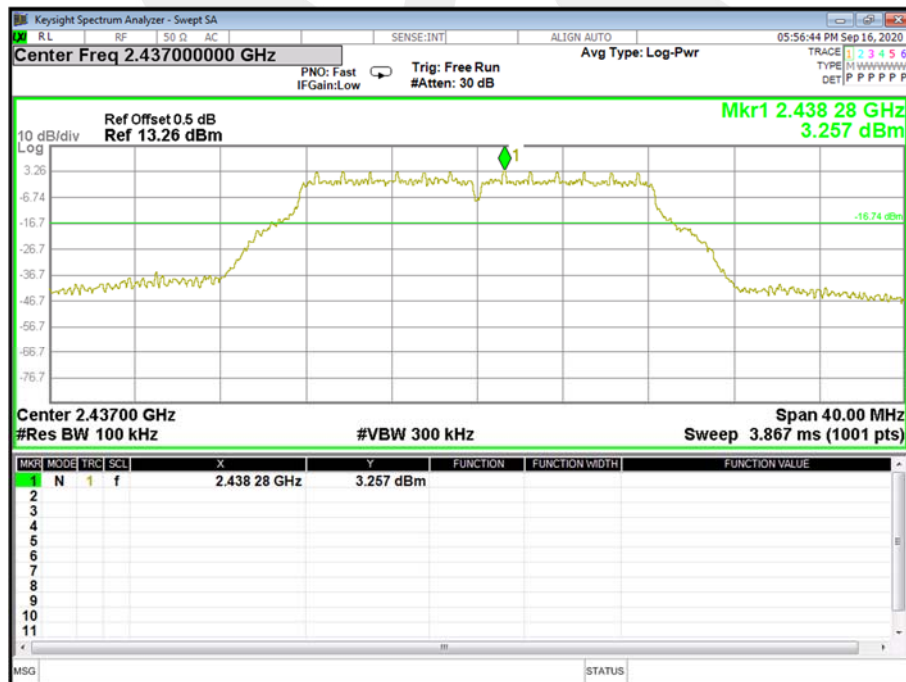



## CH11

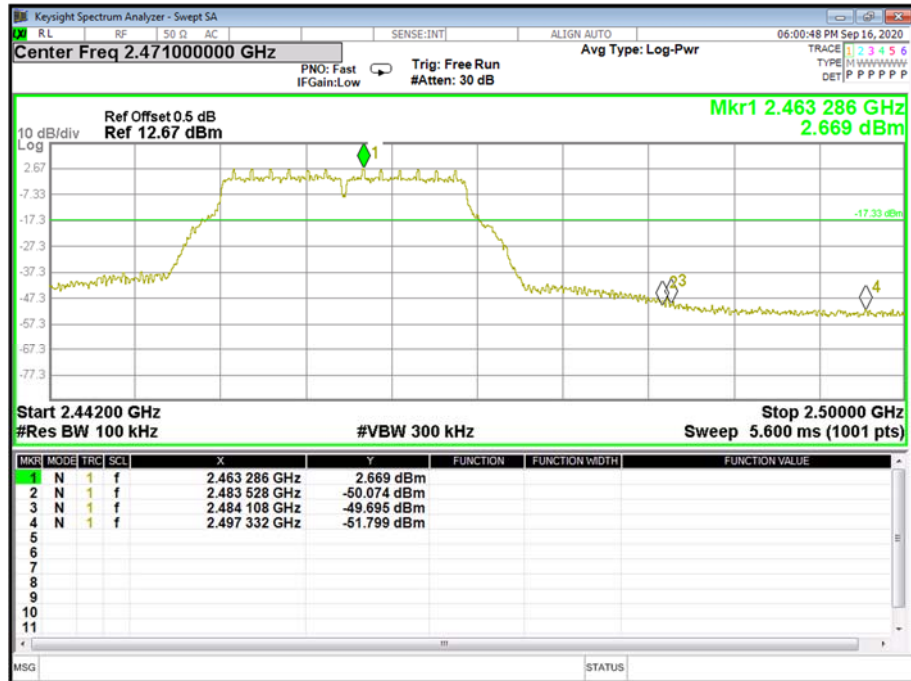





|               |         |                    |                                  |
|---------------|---------|--------------------|----------------------------------|
| Temperature:  | 25°C    | Relative Humidity: | 60%                              |
| Test Voltage: | DC 3.8V | Test Mode:         | TX n Mode(20M) /CH01, CH06, CH11 |

Antenna A

CH 01

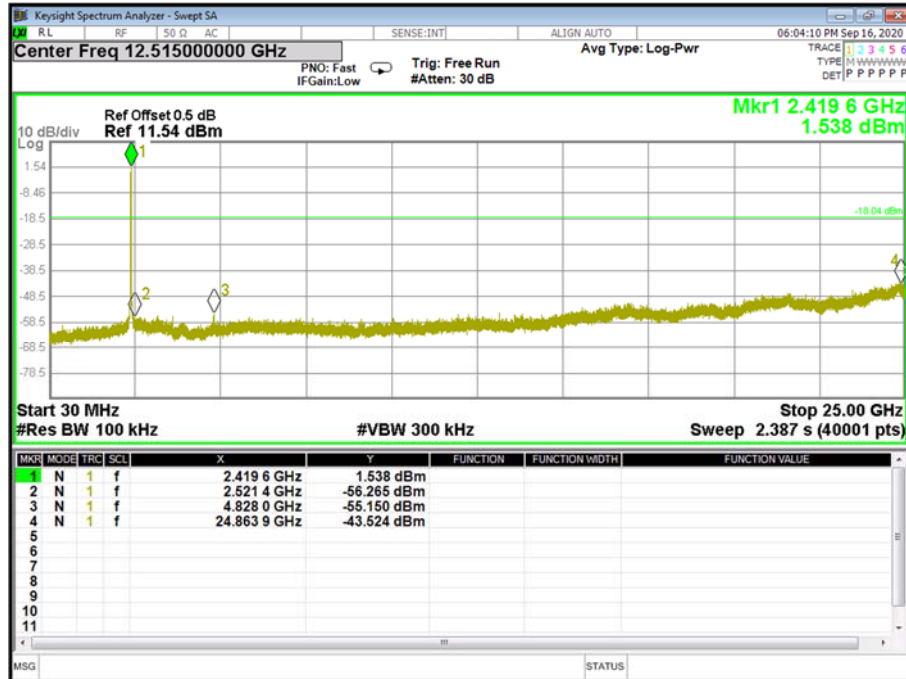


CH 06

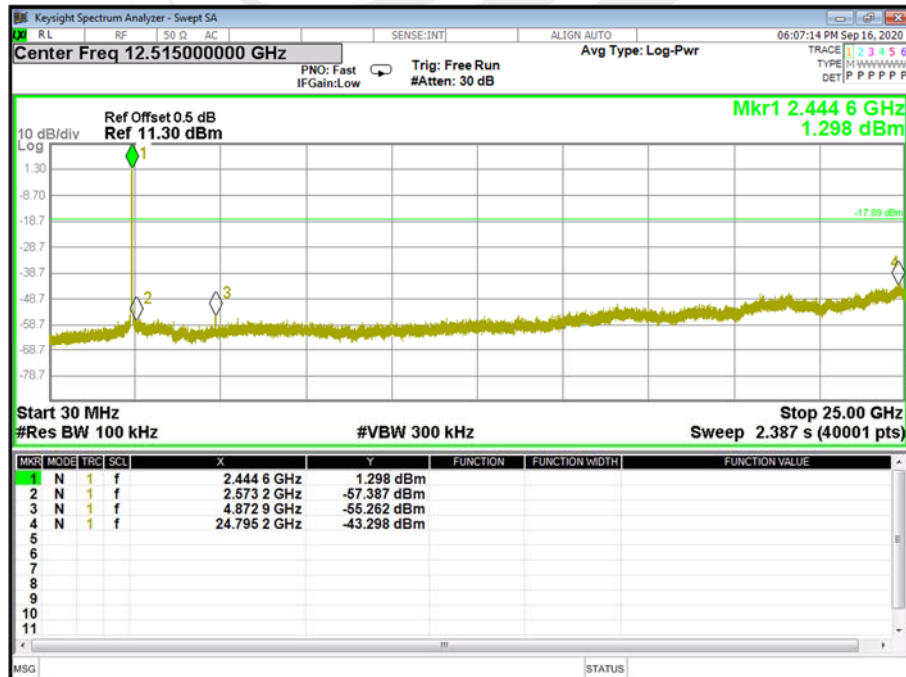




## CH 11

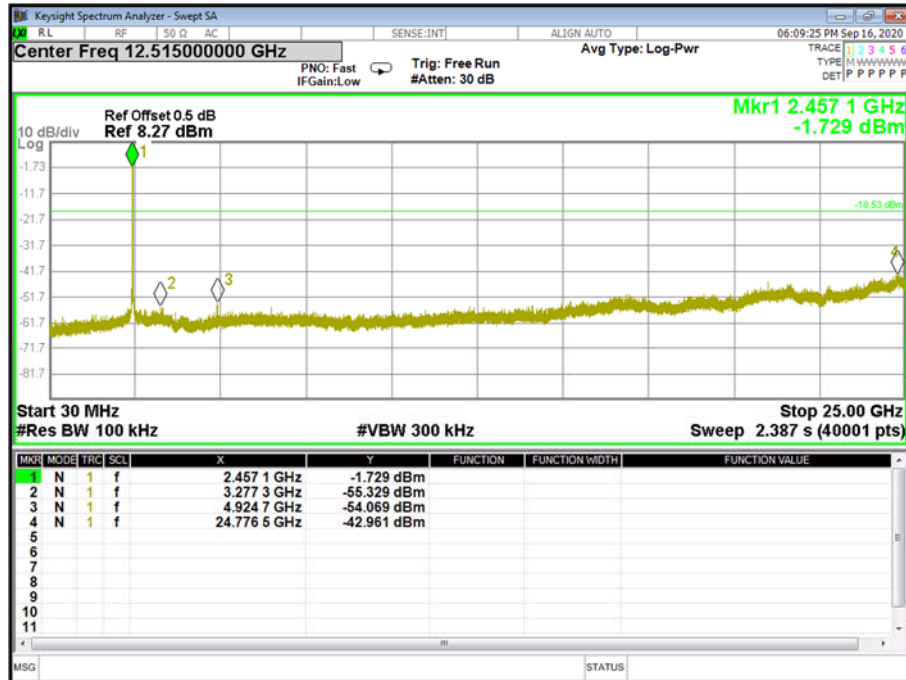




Band edge(it's also the reference level for conducted spurious emission)

## CH 01

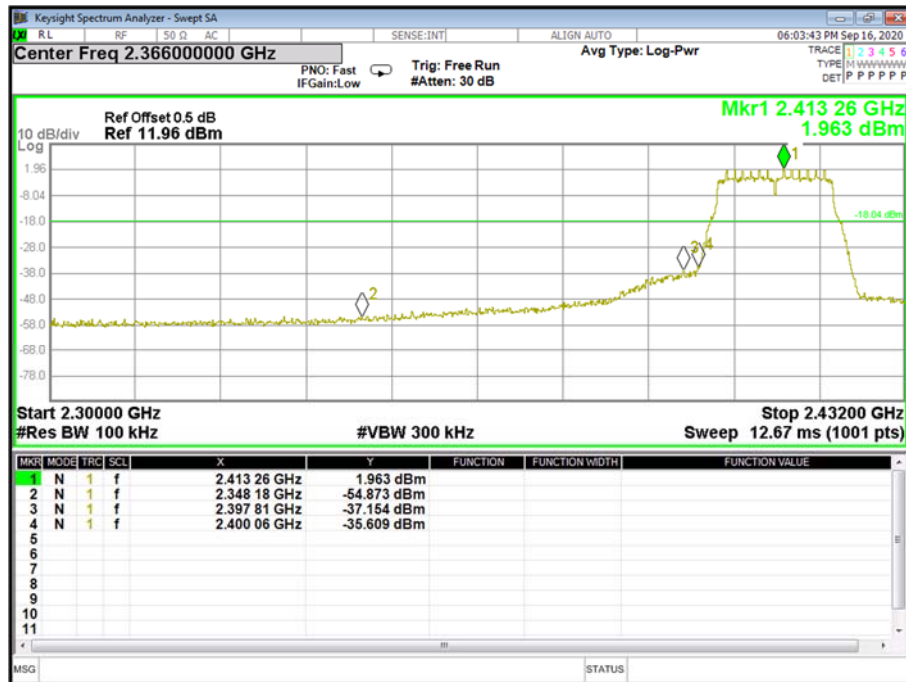

## CH 06

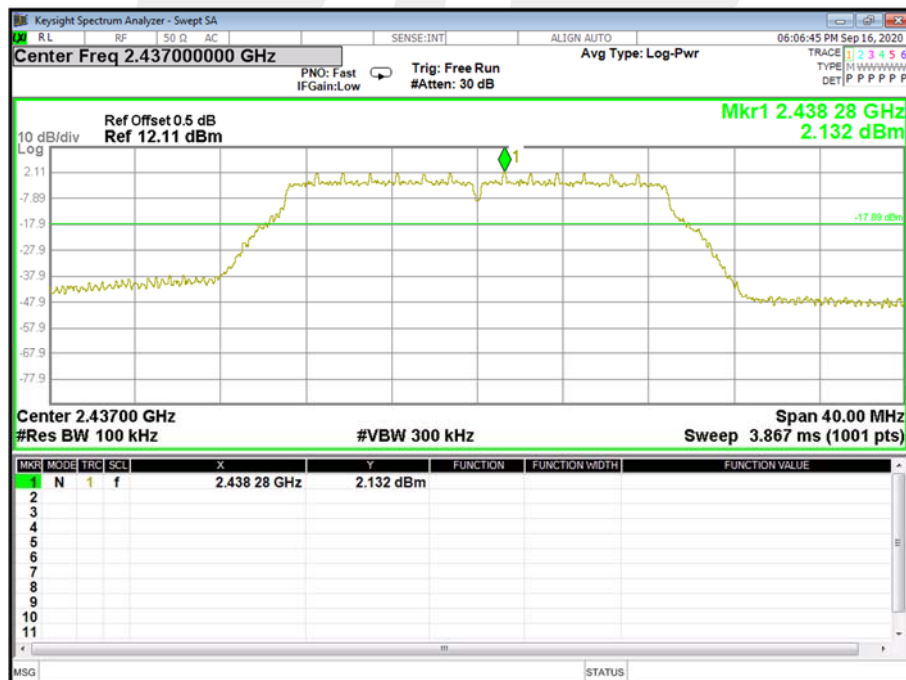



## CH 11

