

# FCC LTE REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

March 29, 2021

**Location:**

HCT CO., LTD.,  
 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Address:**

129, Samsung-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Report No.:** HCT-RF-2103-FC017

**FCC ID:** A3LNP345XLA

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): NP345XLA  
 EUT Type: Notebook Computer  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 FCC Rule Part(s): §22, §2

| Mode<br>(MHz)      | Tx Frequency<br>(MHz) | Emission<br>Designator | Modulation | ERP               |                     |
|--------------------|-----------------------|------------------------|------------|-------------------|---------------------|
|                    |                       |                        |            | Max. Power<br>(W) | Max. Power<br>(dBm) |
| LTE – Band26 (1.4) | 824.7 – 848.3         | 1M09G7D                | QPSK       | 0.249             | 23.97               |
|                    |                       | 1M09W7D                | 16QAM      | 0.209             | 23.21               |
|                    |                       | 1M09W7D                | 64QAM      | 0.165             | 22.17               |
| LTE – Band26 (3)   | 825.5 – 847.5         | 2M71G7D                | QPSK       | 0.250             | 23.98               |
|                    |                       | 2M70W7D                | 16QAM      | 0.210             | 23.23               |
|                    |                       | 2M70W7D                | 64QAM      | 0.164             | 22.15               |
| LTE – Band26 (5)   | 826.5 – 846.5         | 4M52G7D                | QPSK       | 0.251             | 23.99               |
|                    |                       | 4M49W7D                | 16QAM      | 0.210             | 23.22               |
|                    |                       | 4M51W7D                | 64QAM      | 0.165             | 22.18               |
| LTE – Band26 (10)  | 829.0 – 844.0         | 8M95G7D                | QPSK       | 0.261             | 24.17               |
|                    |                       | 8M97W7D                | 16QAM      | 0.219             | 23.40               |
|                    |                       | 8M96W7D                | 64QAM      | 0.171             | 22.33               |
| LTE – Band26 (15)  | 831.5 – 841.5         | 13M4G7D                | QPSK       | 0.264             | 24.21               |
|                    |                       | 13M4W7D                | 16QAM      | 0.221             | 23.45               |
|                    |                       | 13M4W7D                | 64QAM      | 0.174             | 22.41               |

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2103-FC017

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

| TEST REPORT NO.   | DATE           | DESCRIPTION             |
|-------------------|----------------|-------------------------|
| HCT-RF-2103-FC017 | March 29, 2021 | - First Approval Report |

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## **Table of Contents**

|                                                                  |    |
|------------------------------------------------------------------|----|
| REVIEWED BY .....                                                | 2  |
| 1. GENERAL INFORMATION .....                                     | 5  |
| 2. INTRODUCTION .....                                            | 6  |
| 2.1. DESCRIPTION OF EUT .....                                    | 6  |
| 2.2. MEASURING INSTRUMENT CALIBRATION .....                      | 6  |
| 2.3. TEST FACILITY .....                                         | 6  |
| 3. DESCRIPTION OF TESTS .....                                    | 7  |
| 3.1 TEST PROCEDURE .....                                         | 7  |
| 3.2 RADIATED POWER.....                                          | 8  |
| 3.3 RADIATED SPURIOUS EMISSIONS .....                            | 9  |
| 3.4 OCCUPIED BANDWIDTH. ....                                     | 10 |
| 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....    | 11 |
| 3.6 BAND EDGE .....                                              | 12 |
| 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... | 13 |
| 3.8 WORST CASE(RADIATED TEST) .....                              | 14 |
| 3.9 WORST CASE(CONDUCTED TEST) .....                             | 15 |
| 4. LIST OF TEST EQUIPMENT .....                                  | 16 |
| 5. MEASUREMENT UNCERTAINTY .....                                 | 17 |
| 6. SUMMARY OF TEST RESULTS .....                                 | 18 |
| 7. SAMPLE CALCULATION .....                                      | 19 |
| 8. TEST DATA .....                                               | 21 |
| 8.1 EFFECTIVE RADIATED POWER.....                                | 21 |
| 8.2 RADIATED SPURIOUS EMISSIONS .....                            | 24 |
| 8.3 OCCUPIED BANDWIDTH .....                                     | 25 |
| 8.4 CONDUCTED SPURIOUS EMISSIONS .....                           | 26 |
| 8.5 BAND EDGE .....                                              | 26 |
| 8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... | 27 |
| 9. TEST PLOTS.....                                               | 32 |
| 10. ANNEX A_ TEST SETUP PHOTO.....                               | 93 |

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

|                            |                                                                                                                                                                                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant Name:</b>     | SAMSUNG Electronics Co., Ltd.                                                                                                                                                                                                                         |
| <b>Address:</b>            | 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea                                                                                                                                                                            |
| <b>FCC ID:</b>             | A3LNP345XLA                                                                                                                                                                                                                                           |
| <b>Application Type:</b>   | Certification                                                                                                                                                                                                                                         |
| <b>FCC Classification:</b> | PCS Licensed Transmitter (PCB)                                                                                                                                                                                                                        |
| <b>FCC Rule Part(s):</b>   | §22, §2                                                                                                                                                                                                                                               |
| <b>EUT Type:</b>           | Notebook Computer                                                                                                                                                                                                                                     |
| <b>Model(s):</b>           | NP345XLA                                                                                                                                                                                                                                              |
| <b>Tx Frequency:</b>       | 824.7 MHz – 848.3 MHz (LTE – Band 26 (1.4 MHz))<br>825.5 MHz – 847.5 MHz (LTE – Band 26 (3 MHz))<br>826.5 MHz – 846.5 MHz (LTE – Band 26 (5 MHz))<br>829.0 MHz – 844.0 MHz (LTE – Band 26 (10 MHz))<br>831.5 MHz – 841.5 MHz (LTE – Band 26 (15 MHz)) |
| <b>Date(s) of Tests:</b>   | March 03, 2021 ~ March 18, 2021                                                                                                                                                                                                                       |
| <b>Serial number:</b>      | Radiated: FCMR01R1400345<br>Conducted: FCMR01R1400353                                                                                                                                                                                                 |

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Notebook Computer with UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

| Test Description                                                | Test Procedure Used                                                                   |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Occupied Bandwidth                                              | - KDB 971168 D01 v03r01 – Section 4.3<br>- ANSI C63.26-2015 – Section 5.4.4           |
| Band Edge                                                       | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7             |
| Spurious and Harmonic Emissions at Antenna Terminal             | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7             |
| Conducted Output Power                                          | - N/A (See SAR Report)                                                                |
| Frequency stability                                             | - ANSI C63.26-2015 – Section 5.6                                                      |
| Effective Radiated Power/<br>Effective Isotropic Radiated Power | - KDB 971168 D01 v03r01 – Section 5.2 & 5.8<br>- ANSI/TIA-603-E-2016 – Section 2.2.17 |
| Radiated Spurious and Harmonic Emissions                        | - KDB 971168 D01 v03r01 – Section 6.2<br>- ANSI/TIA-603-E-2016 – Section 2.2.12       |

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser  
if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit)  
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.  
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 OCCUPIED BANDWIDTH.

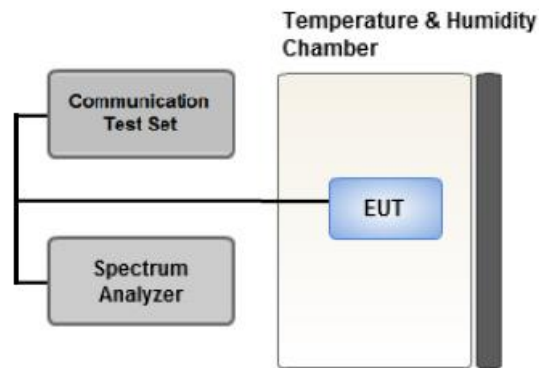

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

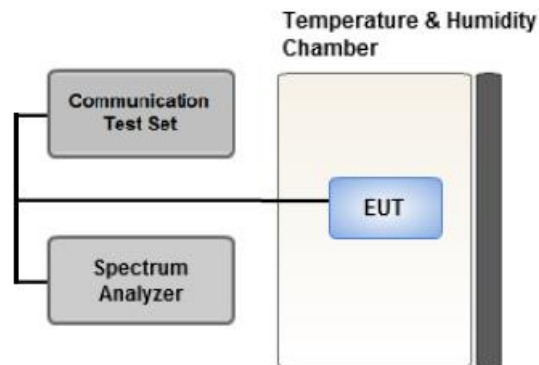

**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

### 3.6 BAND EDGE

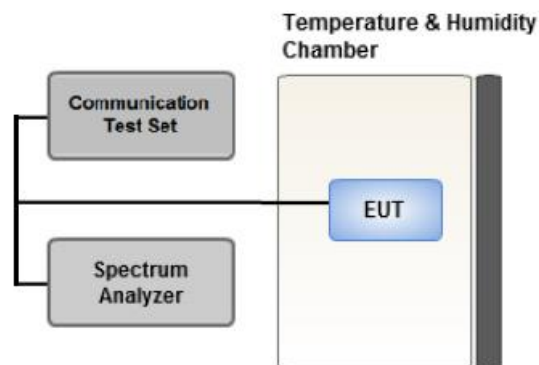

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### **Test Notes**


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

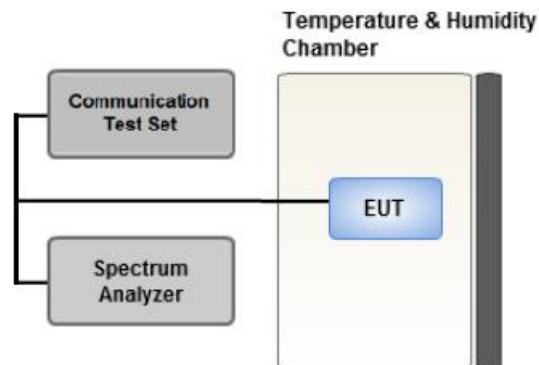

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

##### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.8 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
(In the case of radiated spurious emissions, only the B.W result that confirmed the maximum spurious emissions was reported.)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All co-location of operation were investigated and the worst case configuration results are reported.  
Mode : WWAN + BT + WLAN, WWAN + WLAN, Only WWAN  
Worst case : Only WWAN
- Please refer to the table below.

[ Worst case ]

| Test Description                         | Modulation               | RB size | RB offset | Axis           |
|------------------------------------------|--------------------------|---------|-----------|----------------|
| Effective Radiated Power                 | QPSK,<br>16QAM,<br>64QAM | 1       | 0         | Y (180 degree) |
| Radiated Spurious and Harmonic Emissions | QPSK                     | 1       | 0         | Z (0 degree)   |

### 3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

| Test Description                                       | Modulation               | Bandwidth<br>(MHz)   | Frequency            | RB size | RB offset |
|--------------------------------------------------------|--------------------------|----------------------|----------------------|---------|-----------|
| Occupied Bandwidth                                     | QPSK,<br>16QAM,<br>64QAM | 1.4, 3, 5, 10,<br>15 | Mid                  | Full RB | 0         |
| Band Edge                                              | QPSK                     | 1.4                  | Low                  | 1       | 0         |
|                                                        |                          |                      | High                 | 1       | 5         |
|                                                        |                          | 3                    | Low                  | 1       | 0         |
|                                                        |                          |                      | High                 | 1       | 14        |
|                                                        |                          | 5                    | Low                  | 1       | 0         |
|                                                        |                          |                      | High                 | 1       | 24        |
|                                                        |                          | 10                   | Low                  | 1       | 0         |
|                                                        |                          |                      | High                 | 1       | 49        |
|                                                        |                          | 15                   | Low                  | 1       | 0         |
|                                                        |                          |                      | High                 | 1       | 74        |
|                                                        |                          | 1.4, 3, 5, 10,<br>15 | Low,<br>High         | Full RB | 0         |
| Spurious and Harmonic Emissions at<br>Antenna Terminal | QPSK                     | 1.4, 3, 5, 10,<br>15 | Low,<br>Mid,<br>High | 1       | 0         |

#### 4. LIST OF TEST EQUIPMENT

| Manufacture      | Model/ Equipment                                     | Serial Number | Calibration Date | Calibration Interval | Calibration Due |
|------------------|------------------------------------------------------|---------------|------------------|----------------------|-----------------|
| T&M SYSTEM       | FBSR-02B(WHK1.2/15G-10EF)/H.P.F                      | -             | 03/02/2021       | Annual               | 03/02/2022      |
| T&M SYSTEM       | FBSR-02B(WHK3.3/18G-10EF)/H.P.F                      | -             | 03/02/2021       | Annual               | 03/02/2022      |
| Hewlett Packard  | 11667B / Power Splitter(DC~26.5 GHz)                 | 11275         | 04/27/2020       | Annual               | 04/27/2021      |
| Hewlett Packard  | E3632A/DC Power Supply                               | MY40004427    | 09/16/2020       | Annual               | 09/16/2021      |
| Schwarzbeck      | UHAP/ Dipole Antenna                                 | 557           | 03/29/2019       | Biennial             | 03/29/2021      |
| Schwarzbeck      | UHAP/ Dipole Antenna                                 | 558           | 03/29/2019       | Biennial             | 03/29/2021      |
| ESPEC            | SU-642 / Chamber                                     | 93008124      | 03/15/2021       | Annual               | 03/15/2022      |
| Schwarzbeck      | BBHA 9120D/ Horn Antenna(1~18GHz)                    | 147           | 08/29/2019       | Biennial             | 08/29/2021      |
| Schwarzbeck      | BBHA 9120D/ Horn Antenna(1~18GHz)                    | 9120D-1298    | 09/25/2019       | Biennial             | 09/25/2021      |
| Schwarzbeck      | BBHA 9170/ Horn Antenna(15~40GHz)                    | BBHA9170342   | 04/29/2019       | Biennial             | 04/29/2021      |
| Schwarzbeck      | BBHA 9170/ Horn Antenna(15~40GHz)                    | BBHA9170124   | 02/11/2020       | Biennial             | 02/11/2022      |
| Agilent          | N9020A/Signal Analyzer(10Hz~26.5GHz)                 | MY51110063    | 04/27/2020       | Annual               | 04/27/2021      |
| Hewlett Packard  | 8493C/ATTENUATOR(20dB)                               | 17280         | 06/04/2020       | Annual               | 06/04/2021      |
| REOHDE & SCHWARZ | FSV40/Spectrum Analyzer(10Hz~40GHz)                  | 100931        | 10/14/2020       | Annual               | 10/14/2021      |
| Agilent          | 8960 (E5515C)/ Base Station                          | MY48360800    | 08/26/2020       | Annual               | 08/26/2021      |
| Schwarzbeck      | FMZB1513/ Loop Antenna(9kHz~30MHz)                   | 1513-333      | 03/19/2020       | Biennial             | 03/19/2022      |
| Schwarzbeck      | VULB9160/ Bilog Antenna                              | 3150          | 03/03/2021       | Biennial             | 03/03/2023      |
| Schwarzbeck      | VULB9168/ Hybrid Antenna                             | 760           | 02/22/2021       | Biennial             | 02/22/2023      |
| Anritsu Corp.    | MT8821C/Wideband Radio Communication Tester          | 6262116770    | 07/22/2020       | Annual               | 07/22/2021      |
| Anritsu Corp.    | MT8820C/Wideband Radio Communication Tester          | 6201026545    | 01/07/2021       | Annual               | 01/07/2022      |
| REOHDE & SCHWARZ | SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)             | 177633        | 07/13/2020       | Annual               | 07/13/2021      |
| KEYSIGHT         | N9030B / Signal Analyzer(5Hz~40.0GHz)                | MY55480167    | 06/04/2020       | Annual               | 06/04/2021      |
| HCT CO., LTD.,   | FCC LTE Mobile Conducted RF Automation Test Software | -             | -                | -                    | -               |

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).
- Model : SU-642  
- Use date of chamber : March 08, 2021 ~ March 14, 2021



## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB) |
|------------------------------------------|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82                             |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 3.40                             |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 4.80                             |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.70                             |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.05                             |

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

| Test Description                                                 | FCC Part Section(s)    | Test Limit                                                                               | Test Result      |
|------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------|------------------|
| Occupied Bandwidth                                               | §2.1049                | N/A                                                                                      | PASS             |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | §2.1051,<br>§22.917(a) | $< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge<br>and for all out-of-band emissions | PASS             |
| Conducted Output Power                                           | §2.1046                | N/A                                                                                      | <u>See Note1</u> |
| Frequency stability / variation of ambient temperature           | §2.1055,<br>§22.355    | $< 2.5 \text{ ppm}$                                                                      | PASS             |

Note:

1. See SAR Report

### 6.2 Test Condition : Radiated Test

| Test Description                         | FCC Part Section(s)    | Test Limit                                                              | Test Result |
|------------------------------------------|------------------------|-------------------------------------------------------------------------|-------------|
| Effective Radiated Power                 | §22.913(a)(5)          | $< 7 \text{ Watts max. ERP}$                                            | PASS        |
| Radiated Spurious and Harmonic Emissions | §2.1053,<br>§22.917(a) | $< 43 + 10\log_{10} (P[\text{Watts}])$ for<br>all out-of band emissions | PASS        |

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

| Ch./ Freq. |            | Measured Level(dBm) | Substitute Level(dBm) | Ant. Gain (dBd) | C.L  | Pol. | ERP   |       |
|------------|------------|---------------------|-----------------------|-----------------|------|------|-------|-------|
| channel    | Freq.(MHz) |                     |                       |                 |      |      | W     | dBm   |
| 128        | 824.20     | -21.37              | 38.40                 | -10.61          | 0.95 | H    | 0.483 | 26.84 |

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

| Ch./ Freq. |            | Measured Level(dBm) | Substitute Level(dBm) | Ant. Gain (dBi) | C.L  | Pol. | EIRP  |       |
|------------|------------|---------------------|-----------------------|-----------------|------|------|-------|-------|
| channel    | Freq.(MHz) |                     |                       |                 |      |      | W     | dBm   |
| 20175      | 1,732.50   | -15.75              | 18.45                 | 9.90            | 1.76 | H    | 0.456 | 26.59 |

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

| Freq<br>(MHz) | Mod/<br>Bandwidth   | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBd) | C.L  | Pol | Limit  | ERP   |       |
|---------------|---------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                     |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 824.7         | LTE 26<br>(1.4 MHz) | QPSK       | -28.10                  | 35.40                     | -10.24            | 1.40 | H   | < 7.00 | 0.238 | 23.76 |
|               |                     | 16-QAM     | -28.88                  | 34.62                     | -10.24            | 1.40 | H   |        | 0.198 | 22.98 |
|               |                     | 64-QAM     | -29.91                  | 33.59                     | -10.24            | 1.40 | H   |        | 0.157 | 21.95 |
| 836.5         |                     | QPSK       | -28.48                  | 35.45                     | -10.19            | 1.41 | H   |        | 0.243 | 23.85 |
|               |                     | 16-QAM     | -29.26                  | 34.67                     | -10.19            | 1.41 | H   |        | 0.203 | 23.07 |
|               |                     | 64-QAM     | -30.29                  | 33.64                     | -10.19            | 1.41 | H   |        | 0.160 | 22.04 |
| 848.3         |                     | QPSK       | -28.61                  | 35.53                     | -10.14            | 1.42 | H   |        | 0.249 | 23.97 |
|               |                     | 16-QAM     | -29.37                  | 34.77                     | -10.14            | 1.42 | H   |        | 0.209 | 23.21 |
|               |                     | 64-QAM     | -30.41                  | 33.73                     | -10.14            | 1.42 | H   |        | 0.165 | 22.17 |

| Freq<br>(MHz) | Mod/<br>Bandwidth | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBd) | C.L  | Pol | Limit  | ERP   |       |
|---------------|-------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                   |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 825.5         | LTE 26<br>(3 MHz) | QPSK       | -28.01                  | 35.50                     | -10.24            | 1.40 | H   | < 7.00 | 0.243 | 23.86 |
|               |                   | 16-QAM     | -28.79                  | 34.72                     | -10.24            | 1.40 | H   |        | 0.203 | 23.08 |
|               |                   | 64-QAM     | -29.81                  | 33.70                     | -10.24            | 1.40 | H   |        | 0.161 | 22.06 |
| 836.5         |                   | QPSK       | -28.38                  | 35.55                     | -10.19            | 1.41 | H   |        | 0.248 | 23.95 |
|               |                   | 16-QAM     | -29.17                  | 34.76                     | -10.19            | 1.41 | H   |        | 0.207 | 23.16 |
|               |                   | 64-QAM     | -30.20                  | 33.73                     | -10.19            | 1.41 | H   |        | 0.163 | 22.13 |
| 847.5         |                   | QPSK       | -28.55                  | 35.55                     | -10.15            | 1.42 | H   |        | 0.250 | 23.98 |
|               |                   | 16-QAM     | -29.30                  | 34.80                     | -10.15            | 1.42 | H   |        | 0.210 | 23.23 |
|               |                   | 64-QAM     | -30.38                  | 33.72                     | -10.15            | 1.42 | H   |        | 0.164 | 22.15 |

| Freq<br>(MHz) | Mod/<br>Bandwidth | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBd) | C.L  | Pol | Limit  | ERP   |       |
|---------------|-------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                   |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 826.5         | LTE 26<br>(5 MHz) | QPSK       | -27.99                  | 35.59                     | -10.24            | 1.40 | H   | < 7.00 | 0.248 | 23.95 |
|               |                   | 16-QAM     | -28.77                  | 34.81                     | -10.24            | 1.40 | H   |        | 0.207 | 23.17 |
|               |                   | 64-QAM     | -29.79                  | 33.79                     | -10.24            | 1.40 | H   |        | 0.164 | 22.15 |
| 836.5         |                   | QPSK       | -28.34                  | 35.59                     | -10.19            | 1.41 | H   |        | 0.251 | 23.99 |
|               |                   | 16-QAM     | -29.11                  | 34.82                     | -10.19            | 1.41 | H   |        | 0.210 | 23.22 |
|               |                   | 64-QAM     | -30.15                  | 33.78                     | -10.19            | 1.41 | H   |        | 0.165 | 22.18 |
| 846.5         |                   | QPSK       | -28.52                  | 35.48                     | -10.15            | 1.42 | H   |        | 0.246 | 23.91 |
|               |                   | 16-QAM     | -29.31                  | 34.69                     | -10.15            | 1.42 | H   |        | 0.205 | 23.12 |
|               |                   | 64-QAM     | -30.34                  | 33.66                     | -10.15            | 1.42 | H   |        | 0.162 | 22.09 |

| Freq<br>(MHz) | Mod/<br>Bandwidth  | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBd) | C.L  | Pol | Limit  | ERP   |       |
|---------------|--------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                    |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 829.0         | LTE 26<br>(10 MHz) | QPSK       | -27.98                  | 35.73                     | -10.22            | 1.40 | H   | < 7.00 | 0.258 | 24.11 |
|               |                    | 16-QAM     | -28.75                  | 34.96                     | -10.22            | 1.40 | H   |        | 0.216 | 23.34 |
|               |                    | 64-QAM     | -29.81                  | 33.90                     | -10.22            | 1.40 | H   |        | 0.169 | 22.28 |
| 836.5         |                    | QPSK       | -28.16                  | 35.77                     | -10.19            | 1.41 | H   |        | 0.261 | 24.17 |
|               |                    | 16-QAM     | -28.93                  | 35.00                     | -10.19            | 1.41 | H   |        | 0.219 | 23.40 |
|               |                    | 64-QAM     | -30.00                  | 33.93                     | -10.19            | 1.41 | H   |        | 0.171 | 22.33 |
| 844.0         |                    | QPSK       | -28.46                  | 35.40                     | -10.16            | 1.41 | H   |        | 0.242 | 23.83 |
|               |                    | 16-QAM     | -29.23                  | 34.63                     | -10.16            | 1.41 | H   |        | 0.202 | 23.06 |
|               |                    | 64-QAM     | -30.30                  | 33.56                     | -10.16            | 1.41 | H   |        | 0.158 | 21.99 |

| Freq<br>(MHz) | Mod/<br>Bandwidth   | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBd) | C.L  | Pol | Limit  | ERP   |       |
|---------------|---------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                     |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 831.5         | LTE B26<br>(15 MHz) | QPSK       | -28.02                  | 35.81                     | -10.21            | 1.40 | H   | < 7.00 | 0.263 | 24.20 |
|               |                     | 16-QAM     | -28.77                  | 35.06                     | -10.21            | 1.40 | H   |        | 0.221 | 23.45 |
|               |                     | 64-QAM     | -29.81                  | 34.02                     | -10.21            | 1.40 | H   |        | 0.174 | 22.41 |
| 836.5         |                     | QPSK       | -28.12                  | 35.81                     | -10.19            | 1.41 | H   |        | 0.264 | 24.21 |
|               |                     | 16-QAM     | -28.91                  | 35.02                     | -10.19            | 1.41 | H   |        | 0.220 | 23.42 |
|               |                     | 64-QAM     | -29.94                  | 33.99                     | -10.19            | 1.41 | H   |        | 0.173 | 22.39 |
| 841.5         |                     | QPSK       | -28.41                  | 35.49                     | -10.17            | 1.41 | H   |        | 0.246 | 23.91 |
|               |                     | 16-QAM     | -29.18                  | 34.72                     | -10.17            | 1.41 | H   |        | 0.206 | 23.14 |
|               |                     | 64-QAM     | -30.21                  | 33.69                     | -10.17            | 1.41 | H   |        | 0.163 | 22.11 |

## 8.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B26  
 MODULATION SIGNAL: 15 MHz QPSK  
 DISTANCE: 3 meters

| Ch               | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBd) | Substitute Level (dBm) | C.L  | Pol | Result (dBm) | Limit  |
|------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|--------|
| 26865<br>(831.5) | 1663.00    | -52.87               | 9.58            | -62.87                 | 2.01 | H   | -55.30       | -13.00 |
|                  | 2494.50    | -49.64               | 10.67           | -53.80                 | 2.49 | H   | -45.62       | -13.00 |
|                  | 3326.00    | -57.61               | 12.40           | -58.65                 | 2.91 | H   | -49.16       | -13.00 |
| 26915<br>(836.5) | 1673.00    | -53.39               | 9.65            | -63.16                 | 2.01 | H   | -55.52       | -13.00 |
|                  | 2509.50    | -55.11               | 10.75           | -58.83                 | 2.50 | H   | -50.58       | -13.00 |
|                  | 3346.00    | -57.64               | 12.48           | -58.63                 | 2.92 | H   | -49.07       | -13.00 |
| 26965<br>(841.5) | 1683.00    | -52.33               | 9.65            | -62.11                 | 2.02 | H   | -54.48       | -13.00 |
|                  | 2524.50    | -51.71               | 10.80           | -55.30                 | 2.50 | H   | -47.00       | -13.00 |
|                  | 3366.00    | -57.74               | 12.58           | -58.77                 | 2.92 | H   | -49.11       | -13.00 |



### 8.3 OCCUPIED BANDWIDTH

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data ( MHz ) |
|------|------------|-----------------|------------|---------------------|-----------------------|--------------|
| 26   | 1.4 MHz    | 836.5           | QPSK       | 6                   | 0                     | 1.0925       |
|      |            |                 | 16-QAM     |                     |                       | 1.0907       |
|      |            |                 | 64-QAM     |                     |                       | 1.0900       |
|      | 3 MHz      |                 | QPSK       | 15                  |                       | 2.7118       |
|      |            |                 | 16-QAM     |                     |                       | 2.7004       |
|      |            |                 | 64-QAM     |                     |                       | 2.6991       |
|      | 5 MHz      |                 | QPSK       | 25                  |                       | 4.5158       |
|      |            |                 | 16-QAM     |                     |                       | 4.4891       |
|      |            |                 | 64-QAM     |                     |                       | 4.5068       |
|      | 10 MHz     |                 | QPSK       | 50                  |                       | 8.9447       |
|      |            |                 | 16-QAM     |                     |                       | 8.9719       |
|      |            |                 | 64-QAM     |                     |                       | 8.9596       |
|      | 15 MHz     |                 | QPSK       | 75                  |                       | 13.347       |
|      |            |                 | 16-QAM     |                     |                       | 13.370       |
|      |            |                 | 64-QAM     |                     |                       | 13.355       |

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 33 ~ 47.

## 8.4 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result (dBm) | Limit (dBm) |
|------|------------------|-----------------|-------------------------------------|-------------|--------------------------------|--------------|-------------|
| 26   | 1.4              | 824.7           | 3.6760                              | 27.976      | -67.161                        | -39.185      | -13.00      |
|      |                  | 836.5           | 3.7164                              | 27.976      | -67.147                        | -39.171      |             |
|      |                  | 848.3           | 3.7015                              | 27.976      | -67.320                        | -39.344      |             |
|      | 3                | 825.5           | 3.6755                              | 27.976      | -67.086                        | -39.110      |             |
|      |                  | 836.5           | 3.1855                              | 27.976      | -67.334                        | -39.358      |             |
|      |                  | 847.5           | 3.7005                              | 27.976      | -67.213                        | -39.237      |             |
|      | 5                | 826.5           | 3.6710                              | 27.976      | -67.328                        | -39.352      |             |
|      |                  | 836.5           | 3.7039                              | 27.976      | -67.070                        | -39.094      |             |
|      |                  | 846.5           | 3.6780                              | 27.976      | -67.337                        | -39.361      |             |
|      | 10               | 829.0           | 3.6950                              | 27.976      | -67.315                        | -39.339      |             |
|      |                  | 836.5           | 3.6835                              | 27.976      | -67.137                        | -39.161      |             |
|      |                  | 844.0           | 3.7074                              | 27.976      | -67.083                        | -39.107      |             |
|      | 15               | 831.5           | 3.6865                              | 27.976      | -67.162                        | -39.186      |             |
|      |                  | 836.5           | 3.7099                              | 27.976      | -67.087                        | -39.111      |             |
|      |                  | 841.5           | 3.7109                              | 27.976      | -67.376                        | -39.400      |             |

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 78 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1              | 25.270      |
| 1 – 5                 | 27.976      |
| 5 – 10                | 28.591      |
| 10 – 15               | 29.116      |
| 15 – 20               | 29.489      |
| Above 20              | 30.131      |


## 8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 48 ~ 77.

## 8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


|                      |                                |
|----------------------|--------------------------------|
| MODE:                | <u>LTE 26</u>                  |
| OPERATING FREQUENCY: | <u>836,500,000 Hz</u>          |
| CHANNEL:             | <u>26915 (1.4 MHz)</u>         |
| REFERENCE VOLTAGE:   | <u>7.720 VDC</u>               |
| DEVIATION LIMIT:     | <u>± 0.000 25 % or 2.5 ppm</u> |

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 7.720       | +20(Ref)   | 836 499 993    | 0.0                  | 0.000 000     | 0.000  |
| 100%           |             | -30        | 836 499 980    | -12.5                | -0.000 001    | -0.015 |
| 100%           |             | -20        | 836 499 982    | -11.4                | -0.000 001    | -0.014 |
| 100%           |             | -10        | 836 499 998    | 4.6                  | 0.000 001     | 0.005  |
| 100%           |             | 0          | 836 499 978    | -14.5                | -0.000 002    | -0.017 |
| 100%           |             | +10        | 836 499 986    | -7.4                 | -0.000 001    | -0.009 |
| 100%           |             | +30        | 836 499 975    | -17.7                | -0.000 002    | -0.021 |
| 100%           |             | +40        | 836 499 989    | -4.4                 | -0.000 001    | -0.005 |
| 100%           |             | +50        | 836 499 984    | -9.1                 | -0.000 001    | -0.011 |
| Batt. Endpoint | 5.500       | +20        | 836 499 984    | -8.7                 | -0.000 001    | -0.010 |

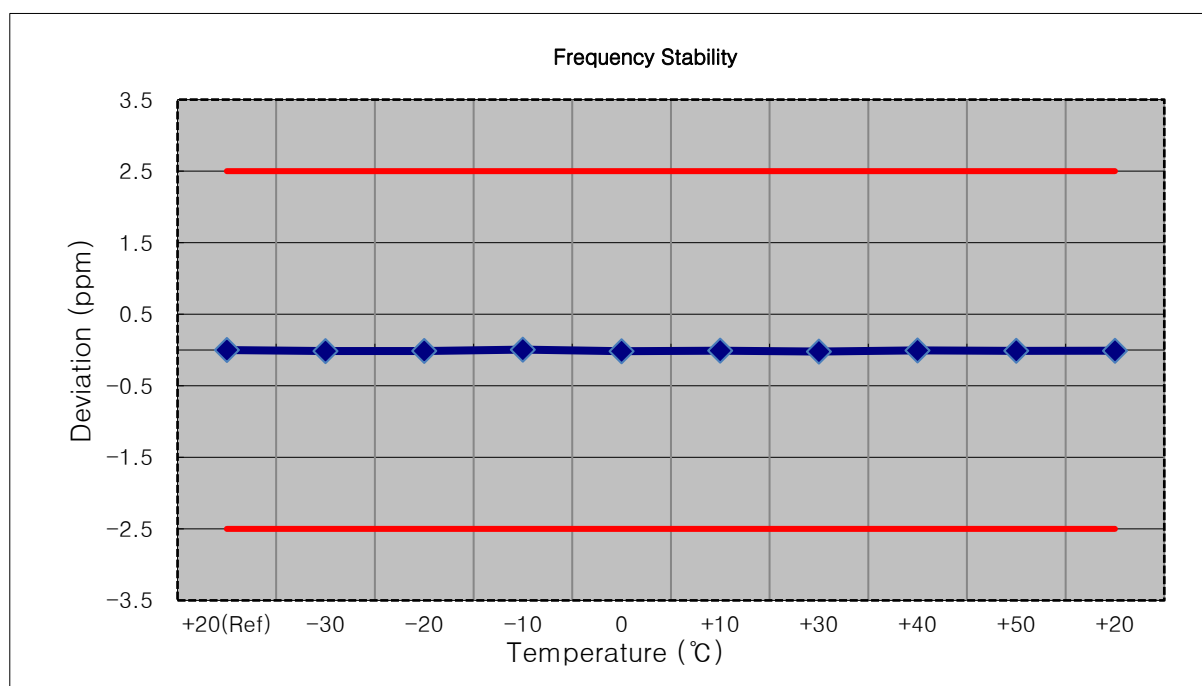


☐ MODE: LTE 26  
☐ OPERATING FREQUENCY: 836,500,000 Hz  
☐ CHANNEL: 26915 (3 MHz)  
☐ REFERENCE VOLTAGE: 7.720 VDC  
☐ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 7.720       | +20(Ref)   | 836 500 005    | 0.0                  | 0.000 000     | 0.000  |
| 100%           |             | -30        | 836 499 998    | -7.8                 | -0.000 001    | -0.009 |
| 100%           |             | -20        | 836 499 998    | -7.3                 | -0.000 001    | -0.009 |
| 100%           |             | -10        | 836 500 010    | 4.9                  | 0.000 001     | 0.006  |
| 100%           |             | 0          | 836 500 002    | -3.5                 | 0.000 000     | -0.004 |
| 100%           |             | +10        | 836 499 996    | -9.2                 | -0.000 001    | -0.011 |
| 100%           |             | +30        | 836 500 012    | 7.0                  | 0.000 001     | 0.008  |
| 100%           |             | +40        | 836 499 997    | -8.2                 | -0.000 001    | -0.010 |
| 100%           |             | +50        | 836 499 991    | -14.6                | -0.000 002    | -0.017 |
| Batt. Endpoint | 5.500       | +20        | 836 499 991    | -14.6                | -0.000 002    | -0.017 |

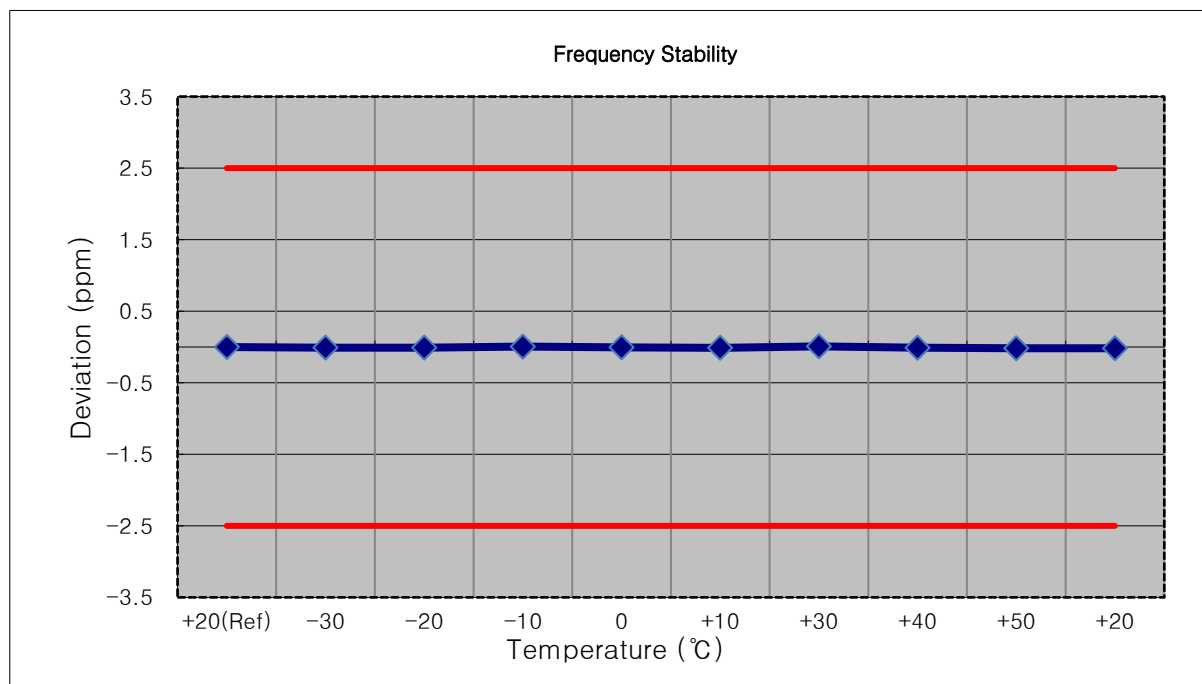


☐ MODE: LTE 26  
☐ OPERATING FREQUENCY: 836,500,000 Hz  
☐ CHANNEL: 26915 (5 MHz)  
☐ REFERENCE VOLTAGE: 7.720 VDC  
☐ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 7.720       | +20(Ref)   | 836 499 997    | 0.0                  | 0.000 000     | 0.000  |
| 100%           |             | -30        | 836 499 990    | -6.9                 | -0.000 001    | -0.008 |
| 100%           |             | -20        | 836 499 992    | -4.8                 | -0.000 001    | -0.006 |
| 100%           |             | -10        | 836 499 989    | -8.0                 | -0.000 001    | -0.010 |
| 100%           |             | 0          | 836 499 985    | -11.6                | -0.000 001    | -0.014 |
| 100%           |             | +10        | 836 499 992    | -4.9                 | -0.000 001    | -0.006 |
| 100%           |             | +30        | 836 499 991    | -6.2                 | -0.000 001    | -0.007 |
| 100%           |             | +40        | 836 499 976    | -20.5                | -0.000 002    | -0.025 |
| 100%           |             | +50        | 836 499 985    | -11.6                | -0.000 001    | -0.014 |
| Batt. Endpoint | 5.500       | +20        | 836 499 991    | -5.4                 | -0.000 001    | -0.006 |

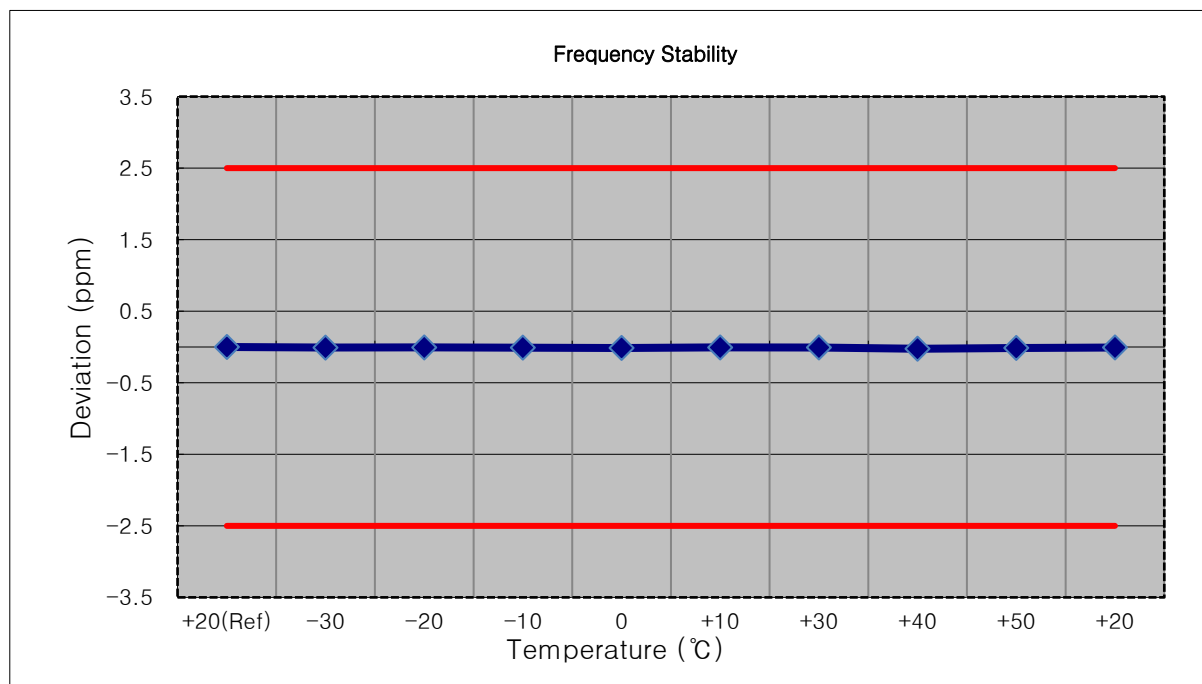


MODE: LTE 26  
 OPERATING FREQUENCY: 836,500,000 Hz  
 CHANNEL: 26915 (10 MHz)  
 REFERENCE VOLTAGE: 7.720 VDC  
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 7.720       | +20(Ref)   | 836 499 986    | 0.0                  | 0.000 000     | 0.000  |
| 100%           |             | -30        | 836 499 978    | -8.6                 | -0.000 001    | -0.010 |
| 100%           |             | -20        | 836 499 970    | -16.7                | -0.000 002    | -0.020 |
| 100%           |             | -10        | 836 499 973    | -13.1                | -0.000 002    | -0.016 |
| 100%           |             | 0          | 836 499 978    | -8.7                 | -0.000 001    | -0.010 |
| 100%           |             | +10        | 836 499 975    | -11.2                | -0.000 001    | -0.013 |
| 100%           |             | +30        | 836 499 975    | -11.6                | -0.000 001    | -0.014 |
| 100%           |             | +40        | 836 499 971    | -15.3                | -0.000 002    | -0.018 |
| 100%           |             | +50        | 836 499 975    | -11.3                | -0.000 001    | -0.014 |
| Batt. Endpoint | 5.500       | +20        | 836 500 001    | 14.4                 | 0.000 002     | 0.017  |

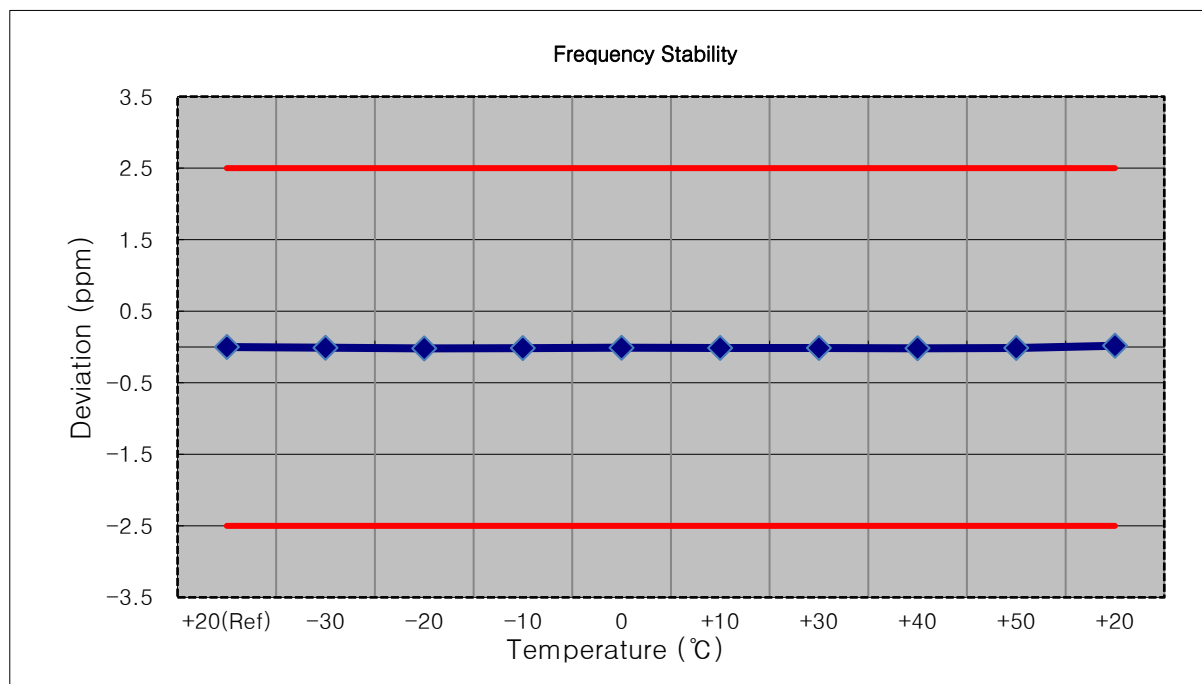

MODE: LTE B26  
 OPERATING FREQUENCY: 836,500,000 Hz  
 CHANNEL: 26915 (15 MHz)  
 REFERENCE VOLTAGE: 7.720 VDC  
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 7.720       | +20(Ref)   | 836 499 986    | 0.0                  | 0.000 000     | 0.000  |
| 100%           |             | -30        | 836 499 976    | -10.1                | -0.000 001    | -0.012 |
| 100%           |             | -20        | 836 499 970    | -16.3                | -0.000 002    | -0.019 |
| 100%           |             | -10        | 836 499 973    | -13.1                | -0.000 002    | -0.016 |
| 100%           |             | 0          | 836 499 977    | -9.5                 | -0.000 001    | -0.011 |
| 100%           |             | +10        | 836 499 972    | -14.8                | -0.000 002    | -0.018 |
| 100%           |             | +30        | 836 499 968    | -18.4                | -0.000 002    | -0.022 |
| 100%           |             | +40        | 836 499 972    | -14.0                | -0.000 002    | -0.017 |
| 100%           |             | +50        | 836 499 972    | -14.4                | -0.000 002    | -0.017 |
| Batt. Endpoint | 5.500       | +20        | 836 499 970    | -16.5                | -0.000 002    | -0.020 |

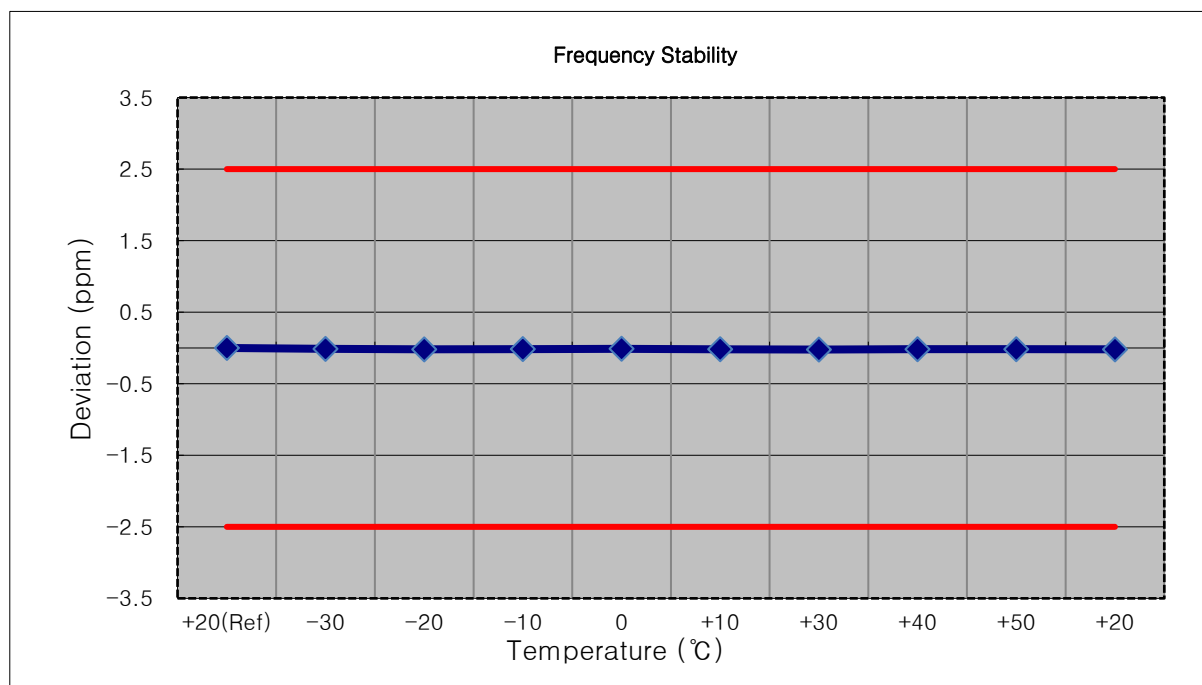


## 9. TEST PLOTS




BAND26. Occupied Bandwidth Plot (1.4M BW Ch.26915 QPSK\_RB6\_0)

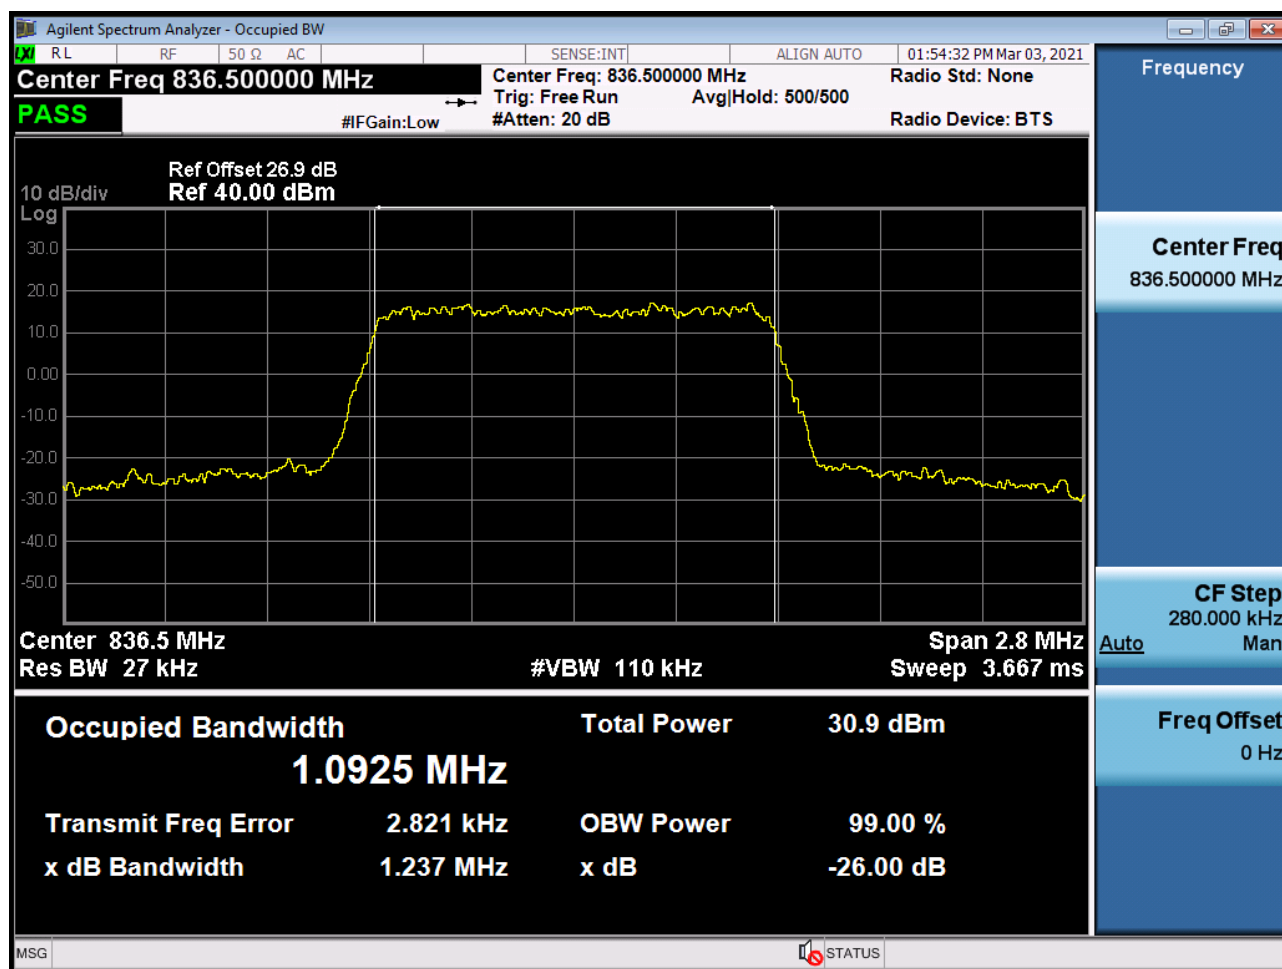


BAND26. Occupied Bandwidth Plot (1.4M BW Ch.26915 16QAM\_RB6\_0)

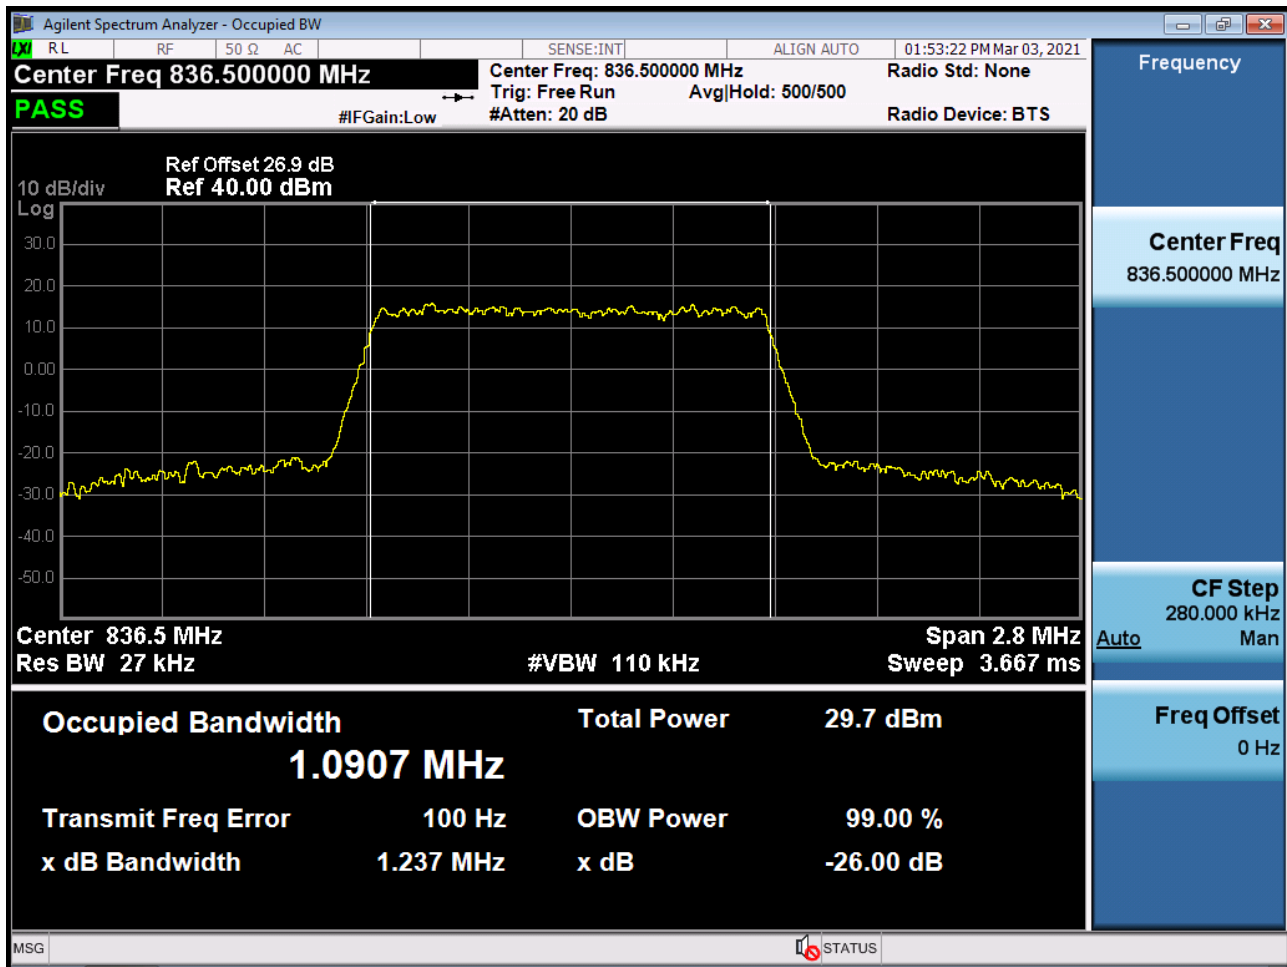


BAND26. Occupied Bandwidth Plot (1.4M BW Ch.26915 64QAM\_RB6\_0)

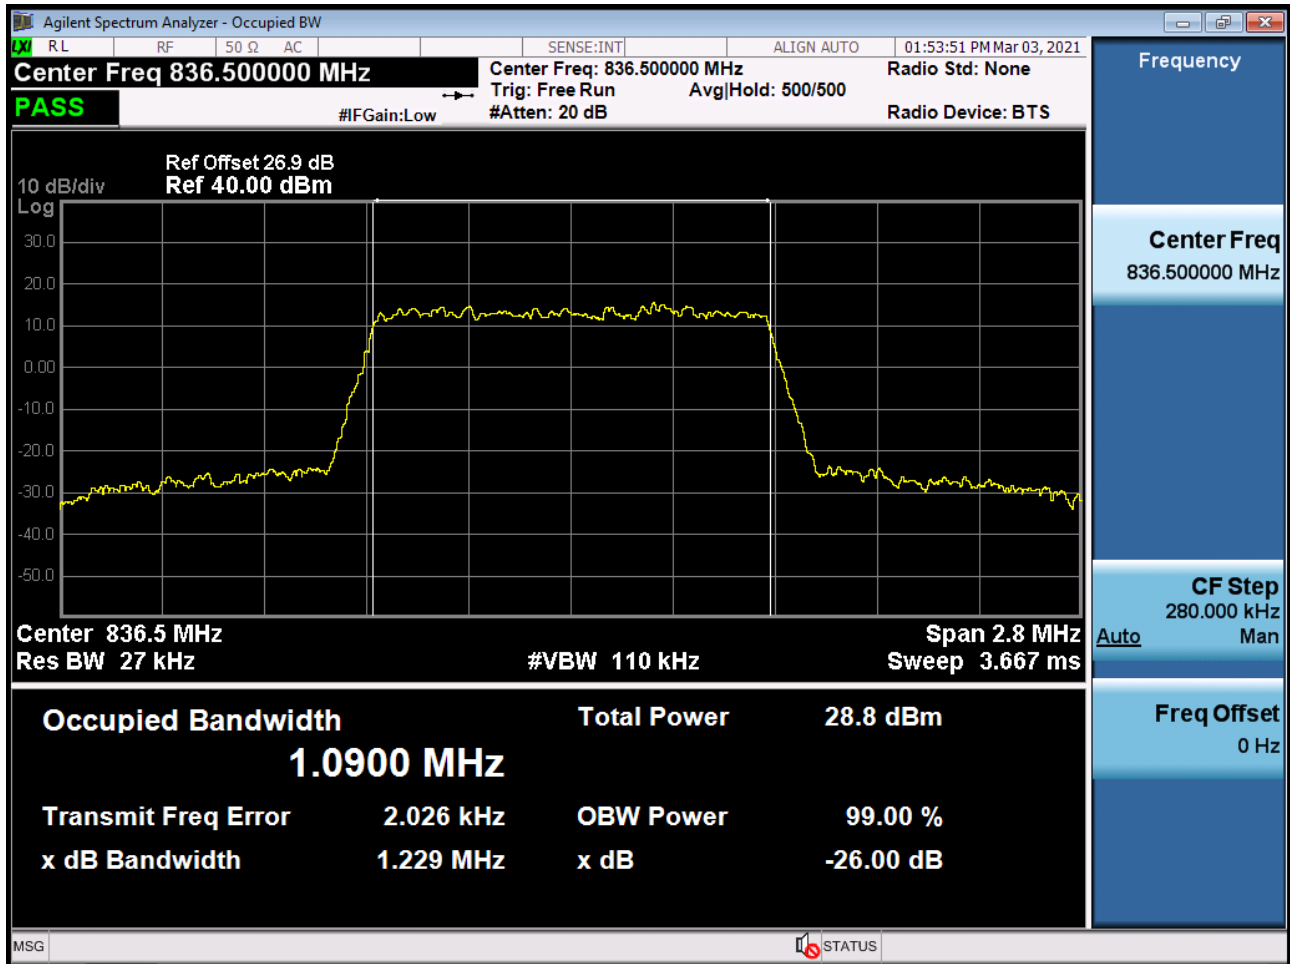


BAND26. Occupied Bandwidth Plot (3M BW Ch.26915 QPSK\_RB15\_0)

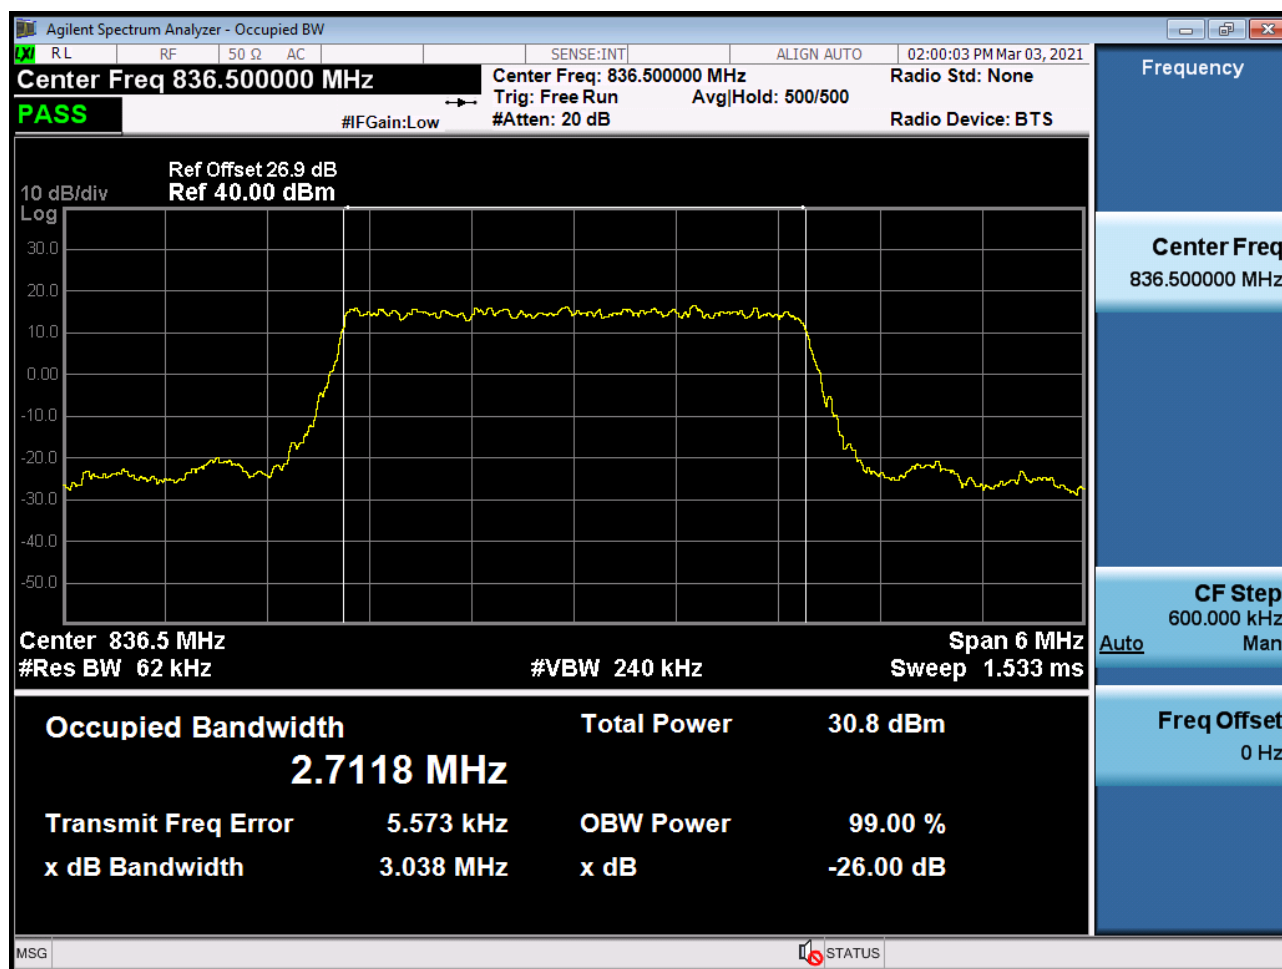


BAND26. Occupied Bandwidth Plot (3M BW Ch.26915 16QAM\_RB15\_0)

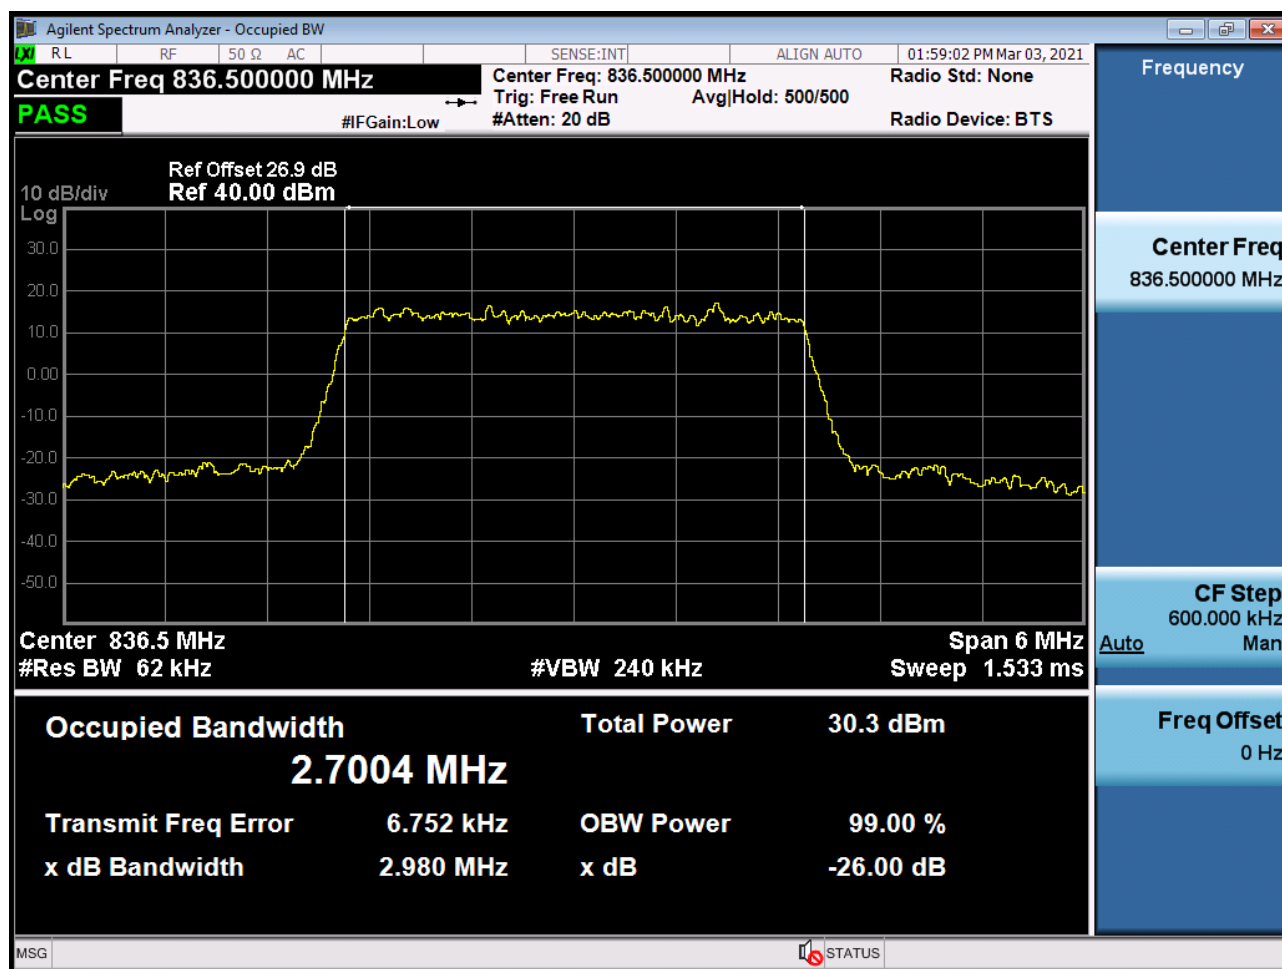


BAND26. Occupied Bandwidth Plot (3M BW Ch.26915 64QAM\_RB15\_0)

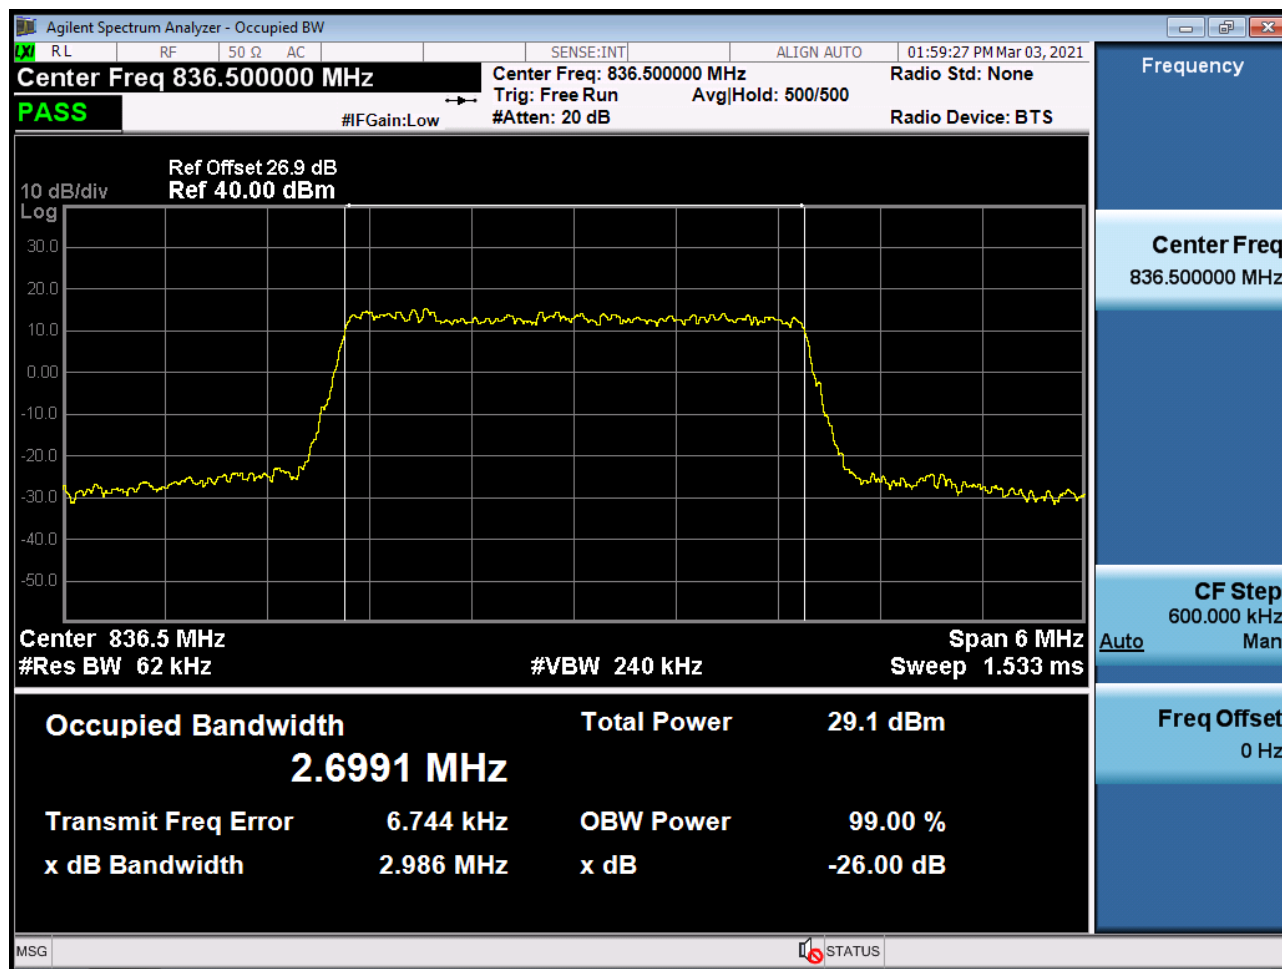

BAND26. Occupied Bandwidth Plot (5M BW Ch.26915 QPSK\_RB25\_0)

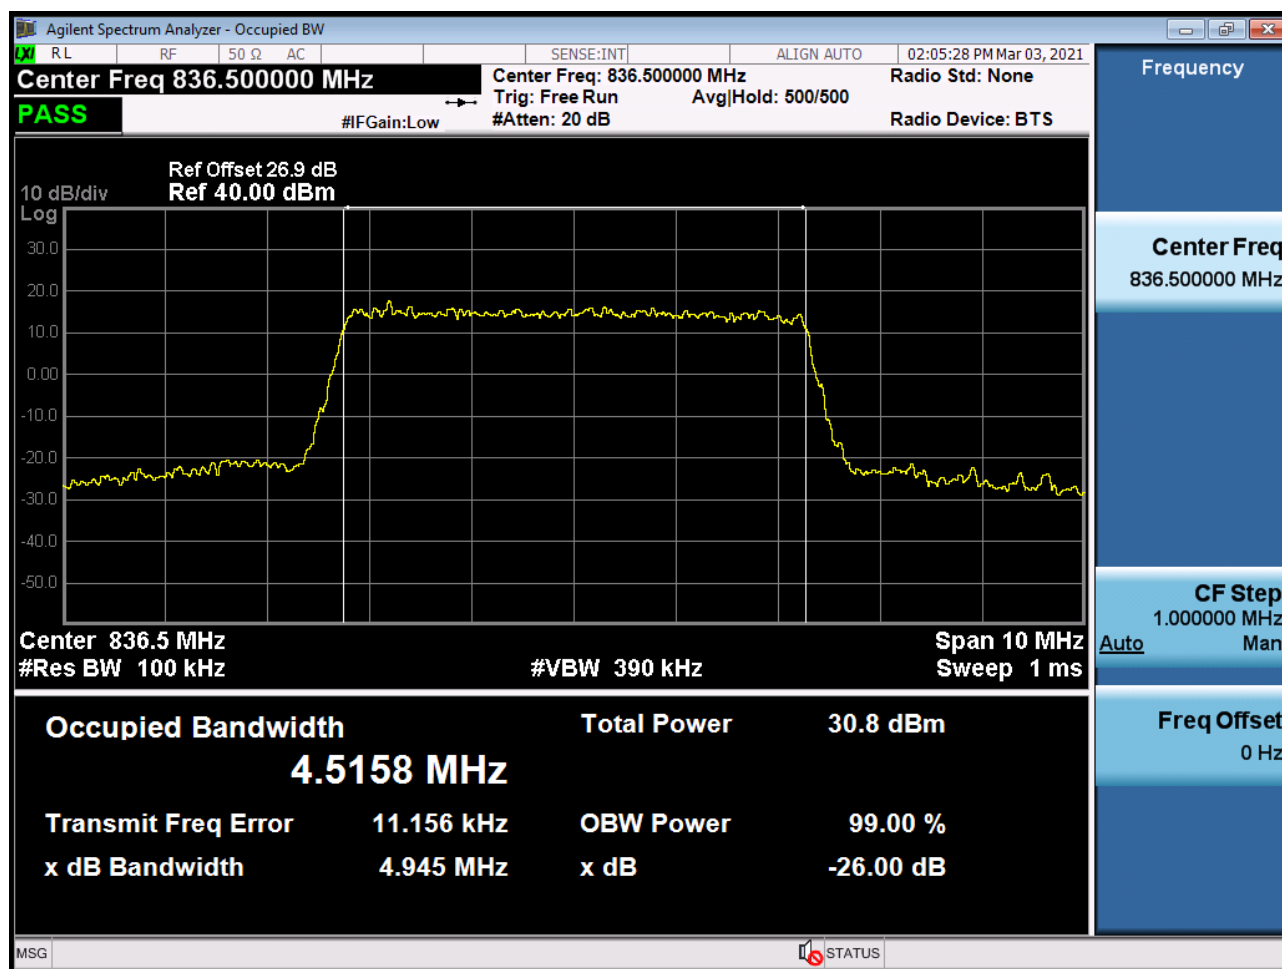


BAND26. Occupied Bandwidth Plot (5M BW Ch.26915 16QAM\_RB25\_0)

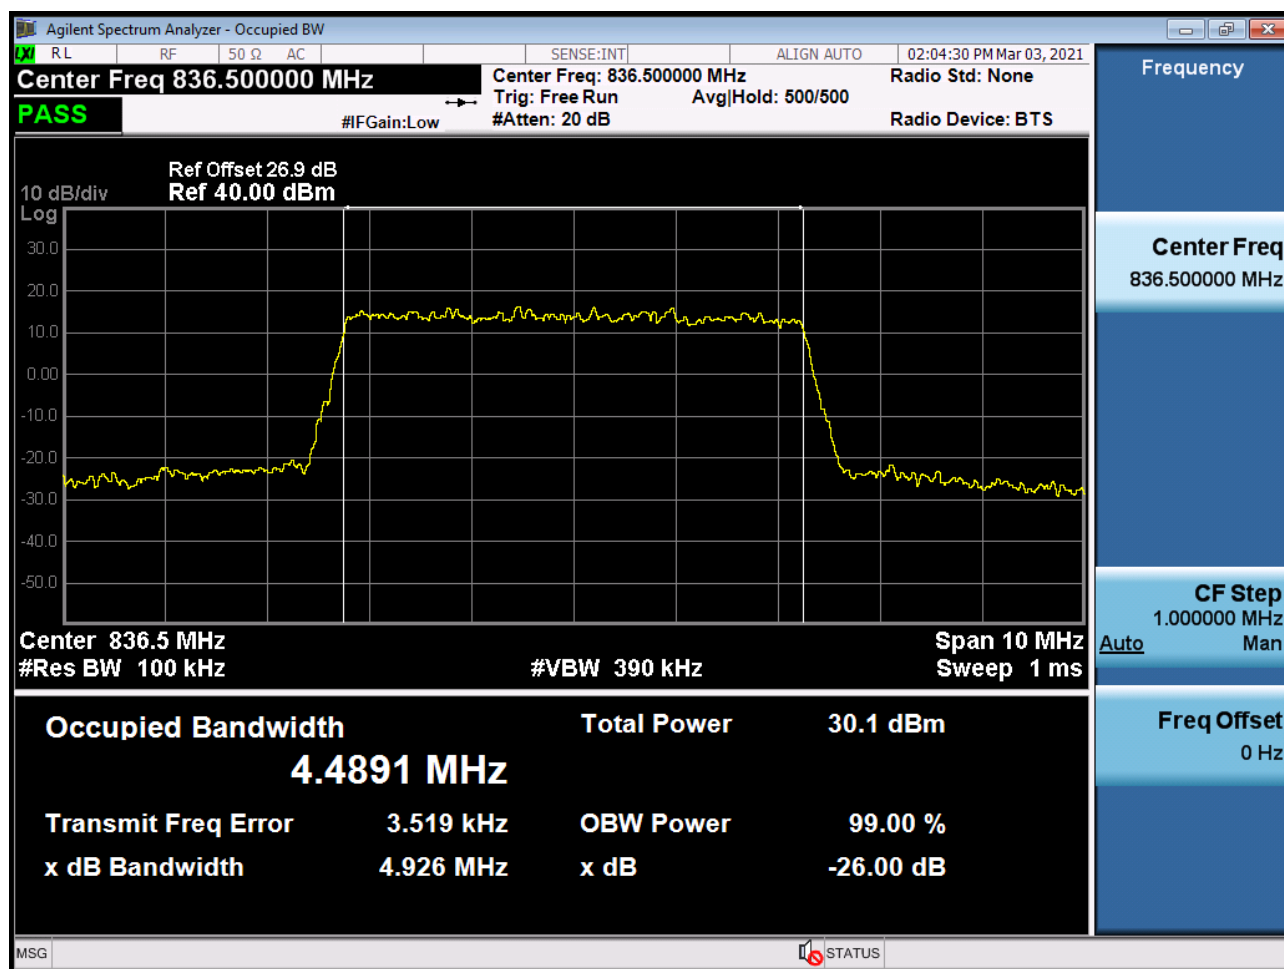





BAND26. Occupied Bandwidth Plot (5M BW Ch.26915 64QAM\_RB25\_0)

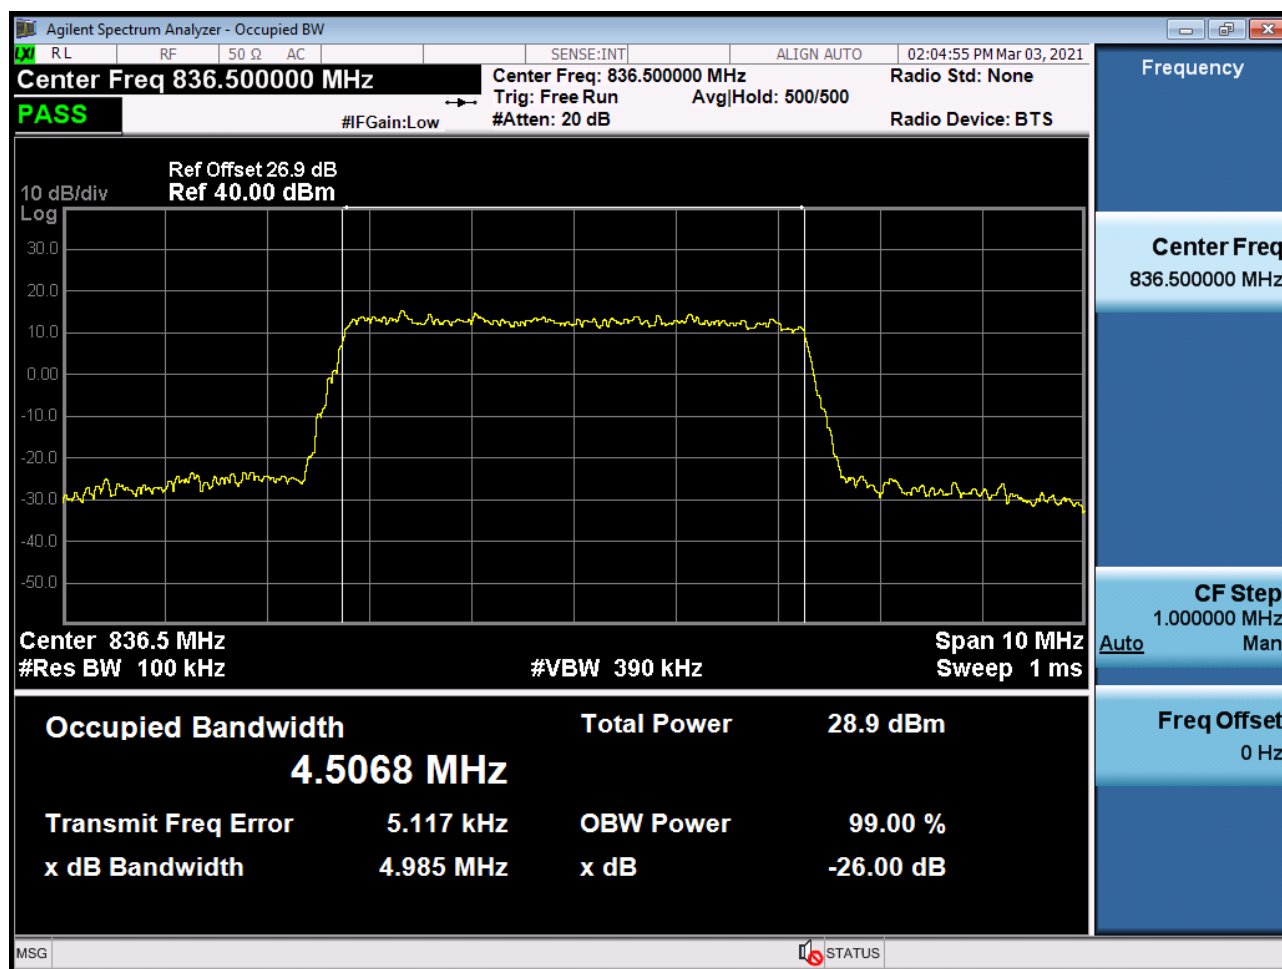


BAND26. Occupied Bandwidth Plot (10M BW Ch.26915 QPSK\_RB50\_0)

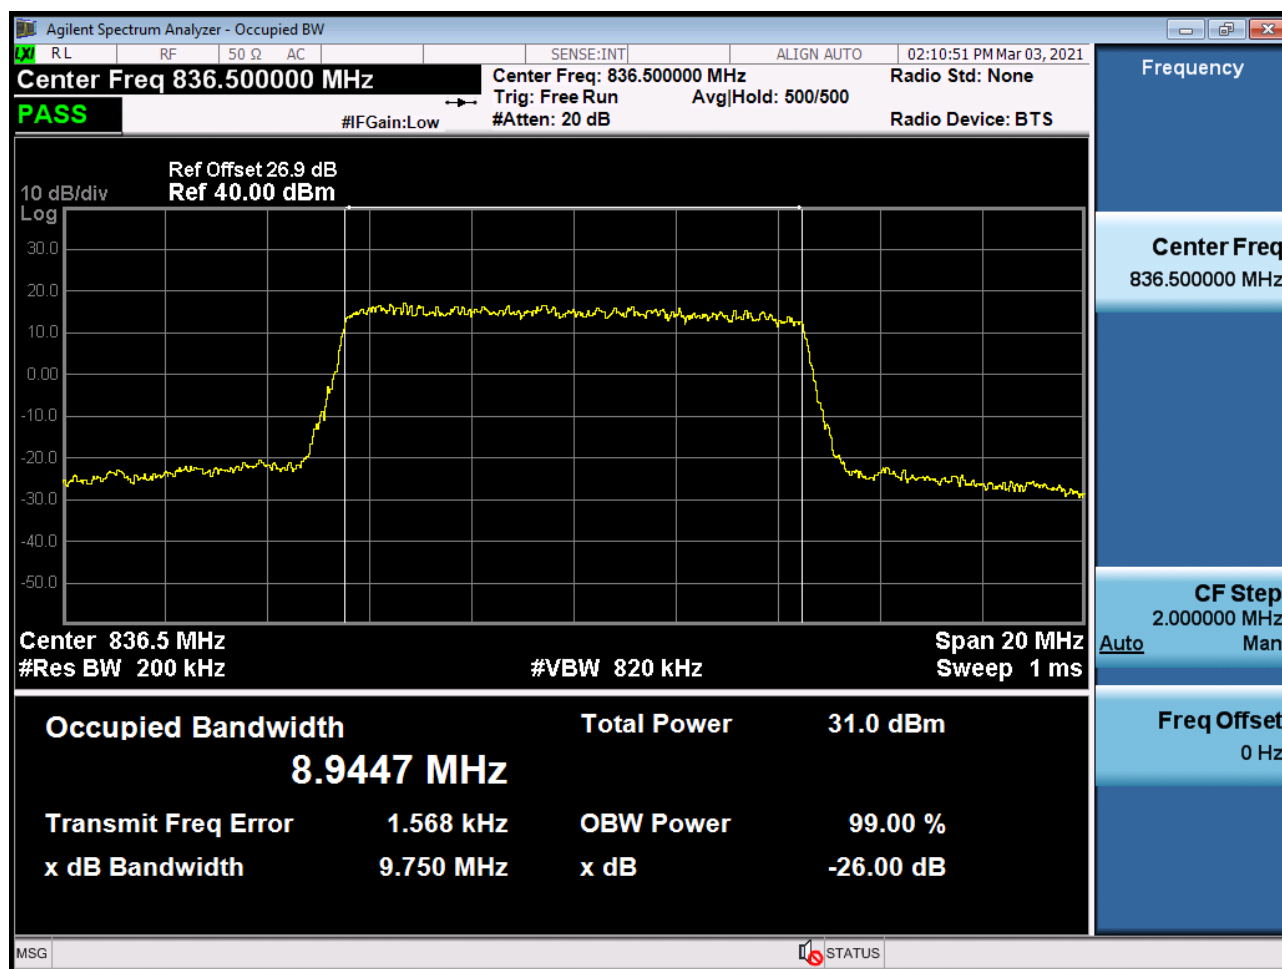


BAND26. Occupied Bandwidth Plot (10M BW Ch.26915 16QAM\_RB50\_0)

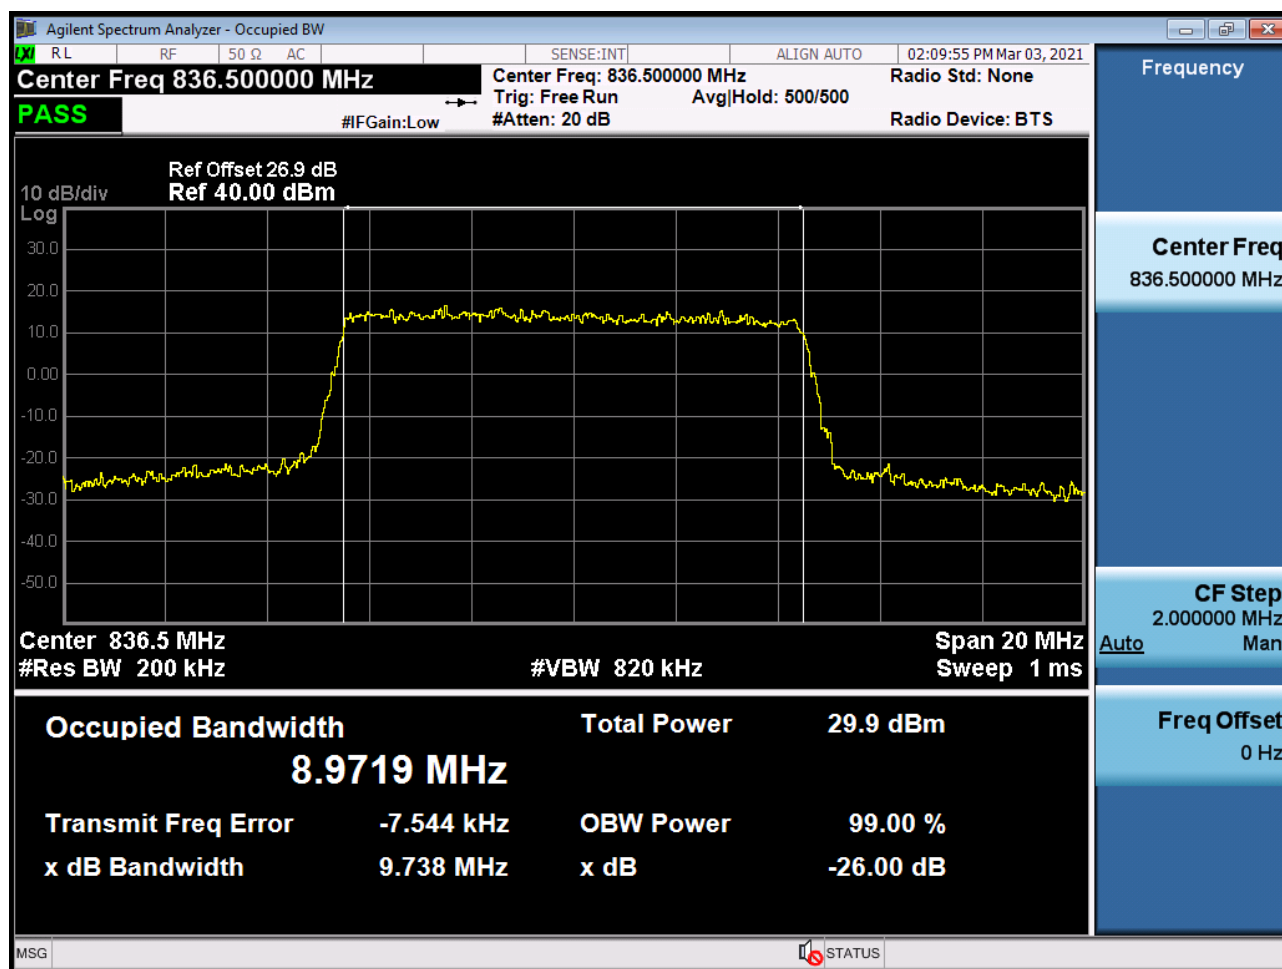


BAND26. Occupied Bandwidth Plot (10M BW Ch.26915 64QAM\_RB50\_0)

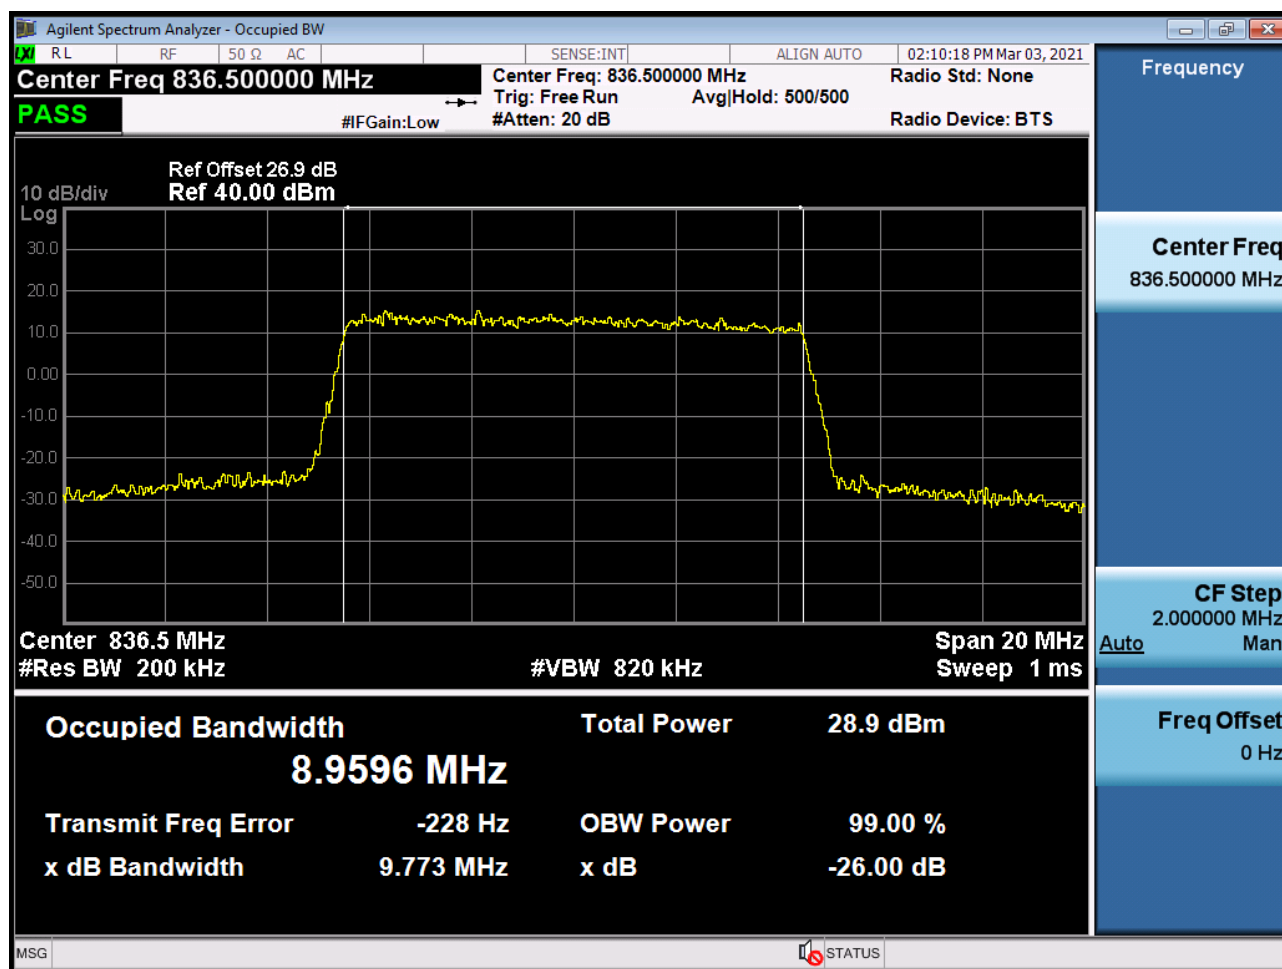


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 QPSK RB 75\_0)

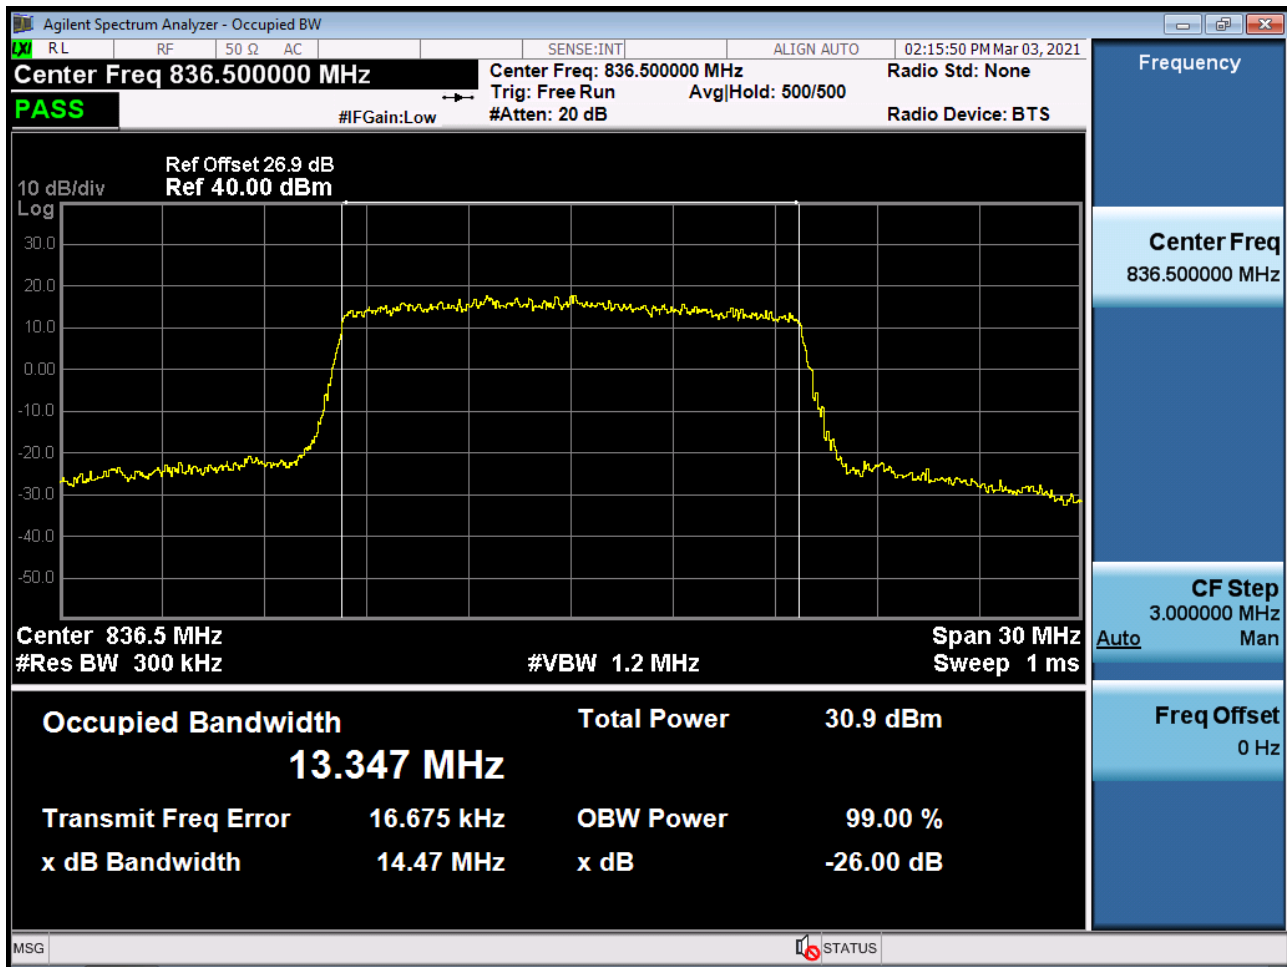


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 16QAM RB 75\_0)

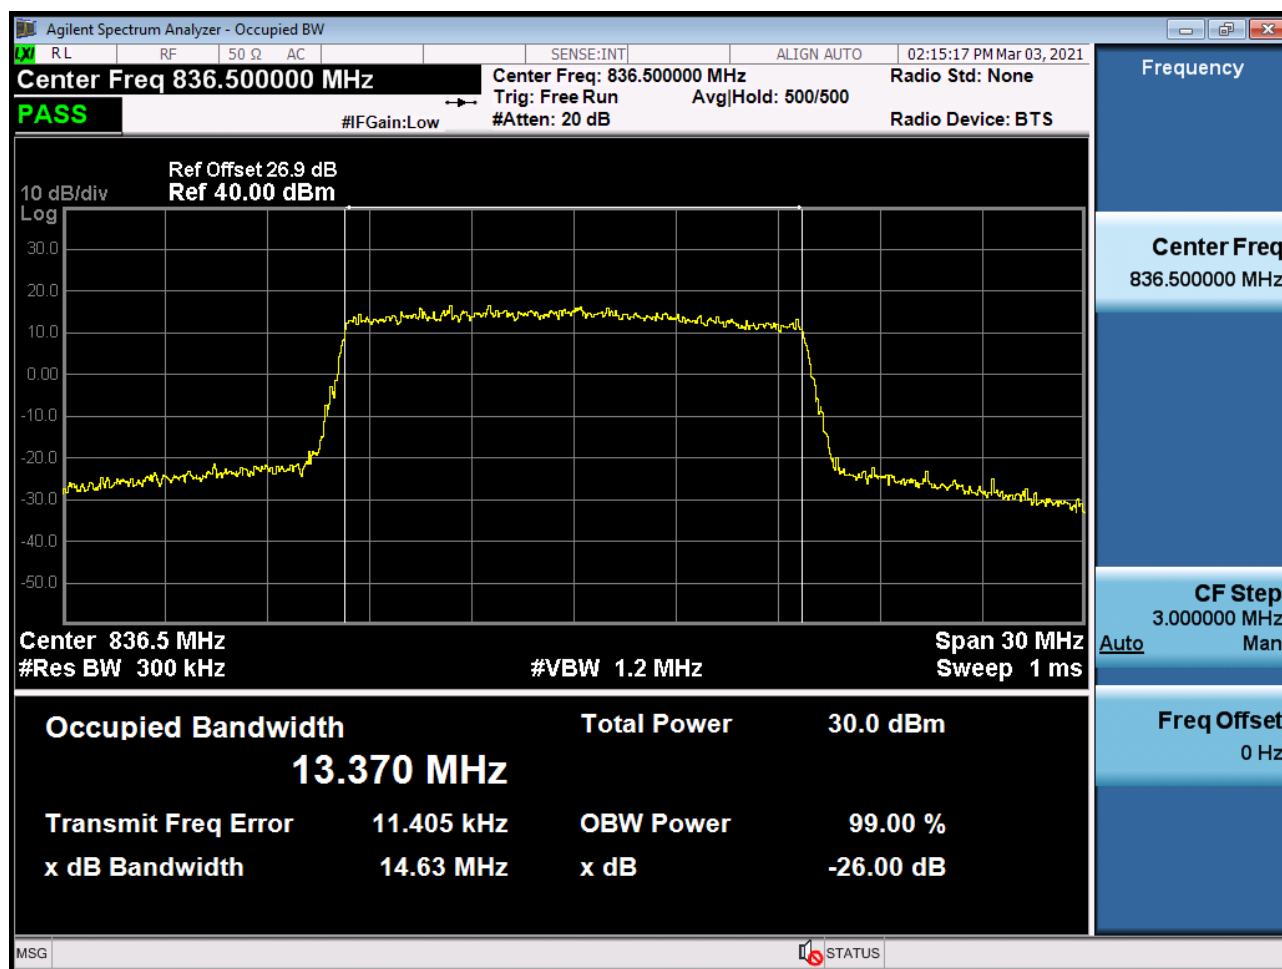

BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 64QAM RB 75\_0)

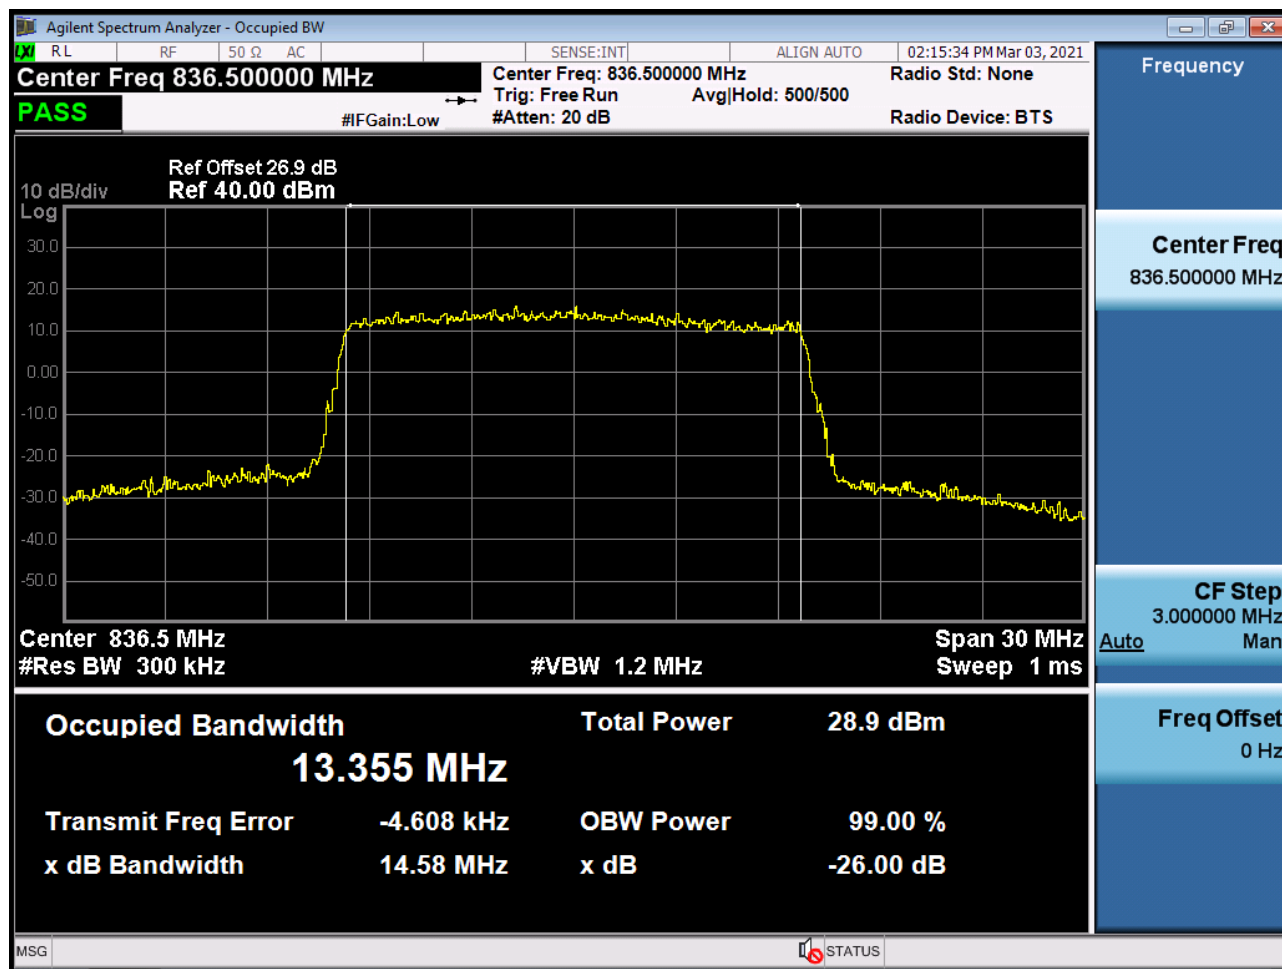


BAND26. Lower Band Edge Plot (1.4M BW Ch.26797 QPSK\_RB1\_Offset 0)

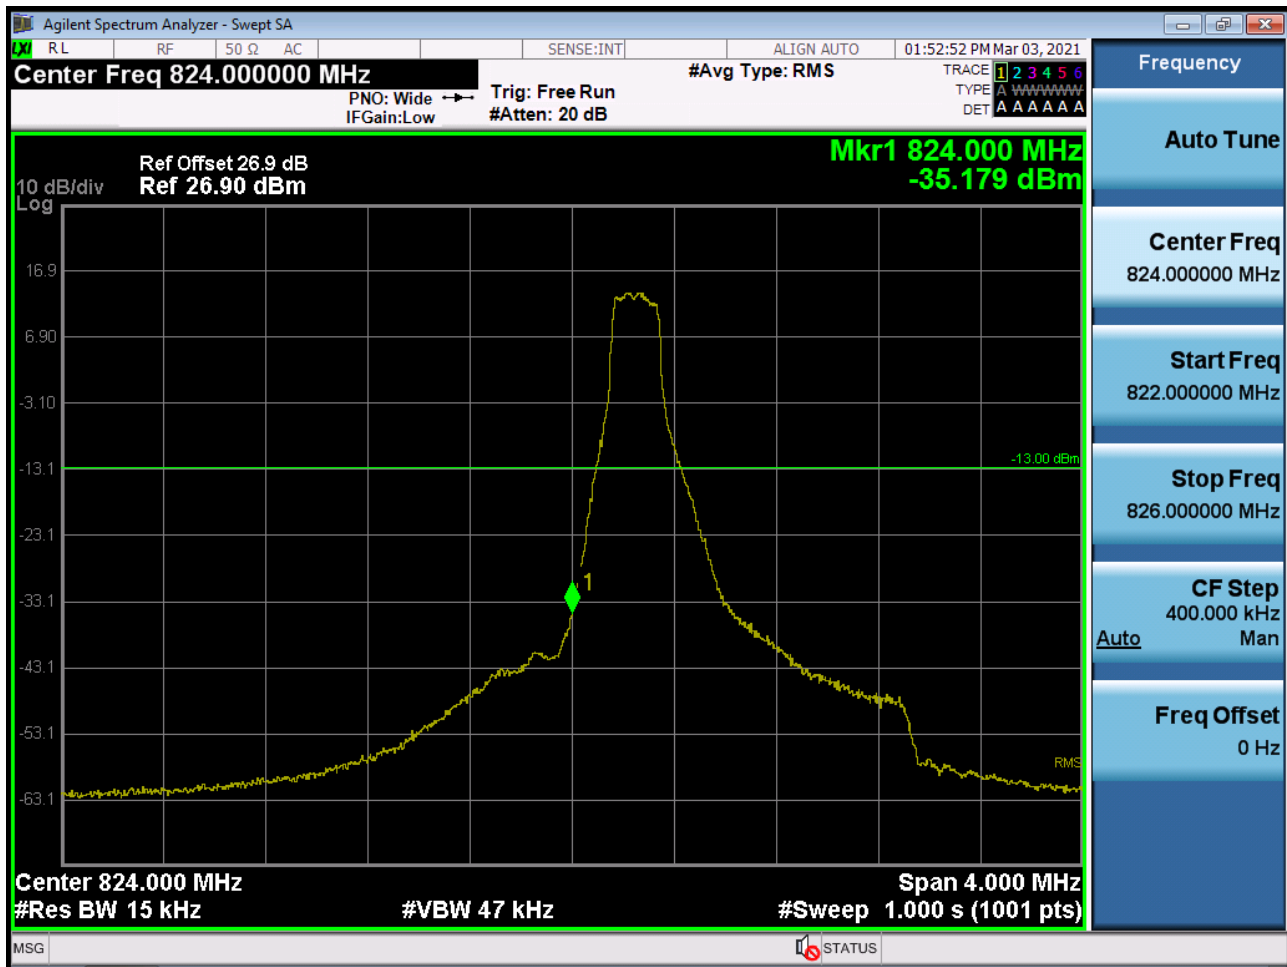




BAND26. Lower Band Edge Plot (1.4M BW Ch.26797 QPSK\_RB6\_Offset 0)

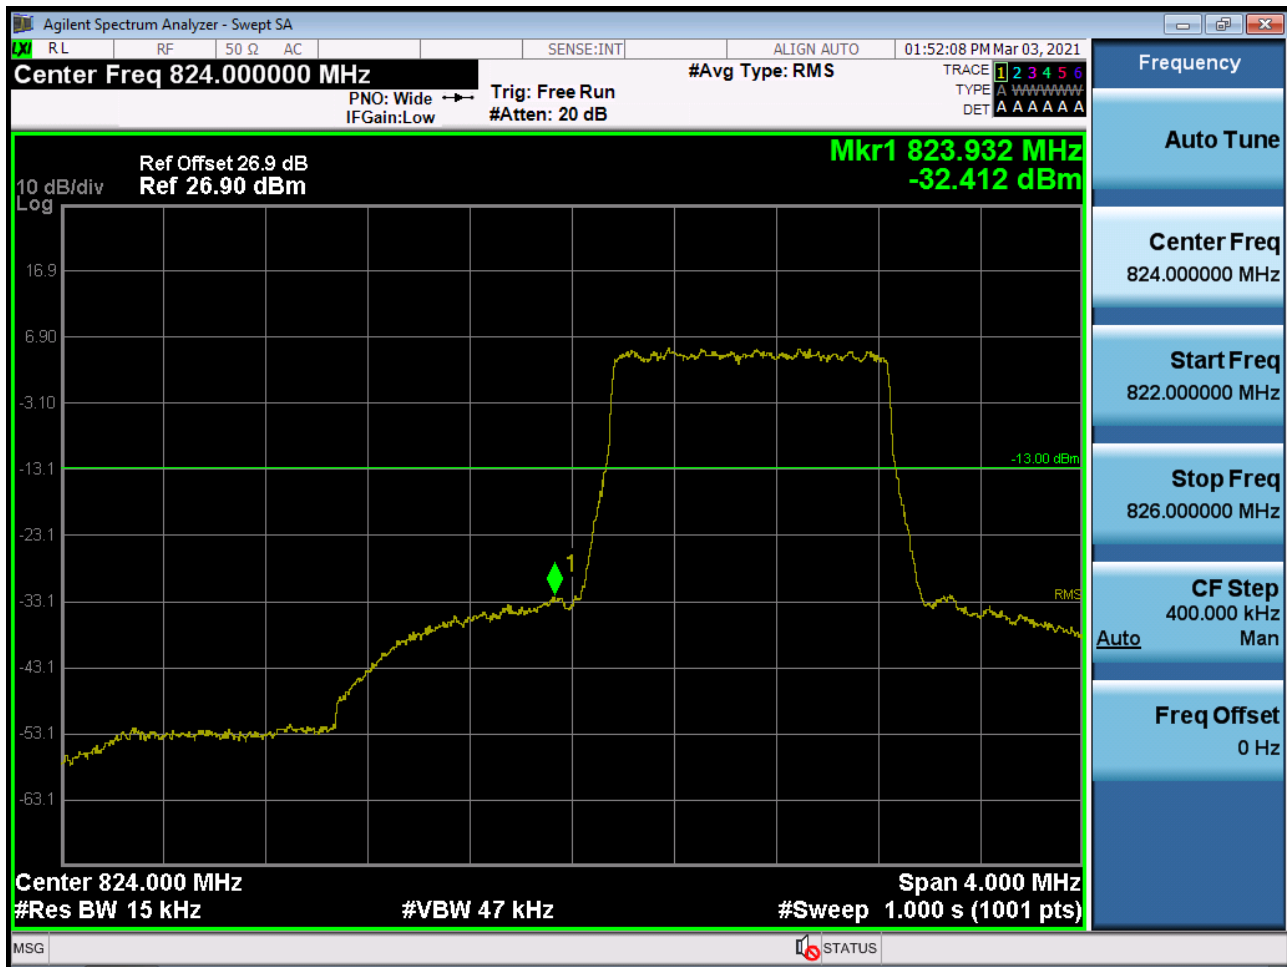

BAND26. Lower Extended Band Edge Plot (1.4M BW Ch.26797 QPSK\_RB6\_0)



BAND26. Lower Band Edge Plot (3M BW Ch.26805 QPSK\_RB1\_Offset 0)

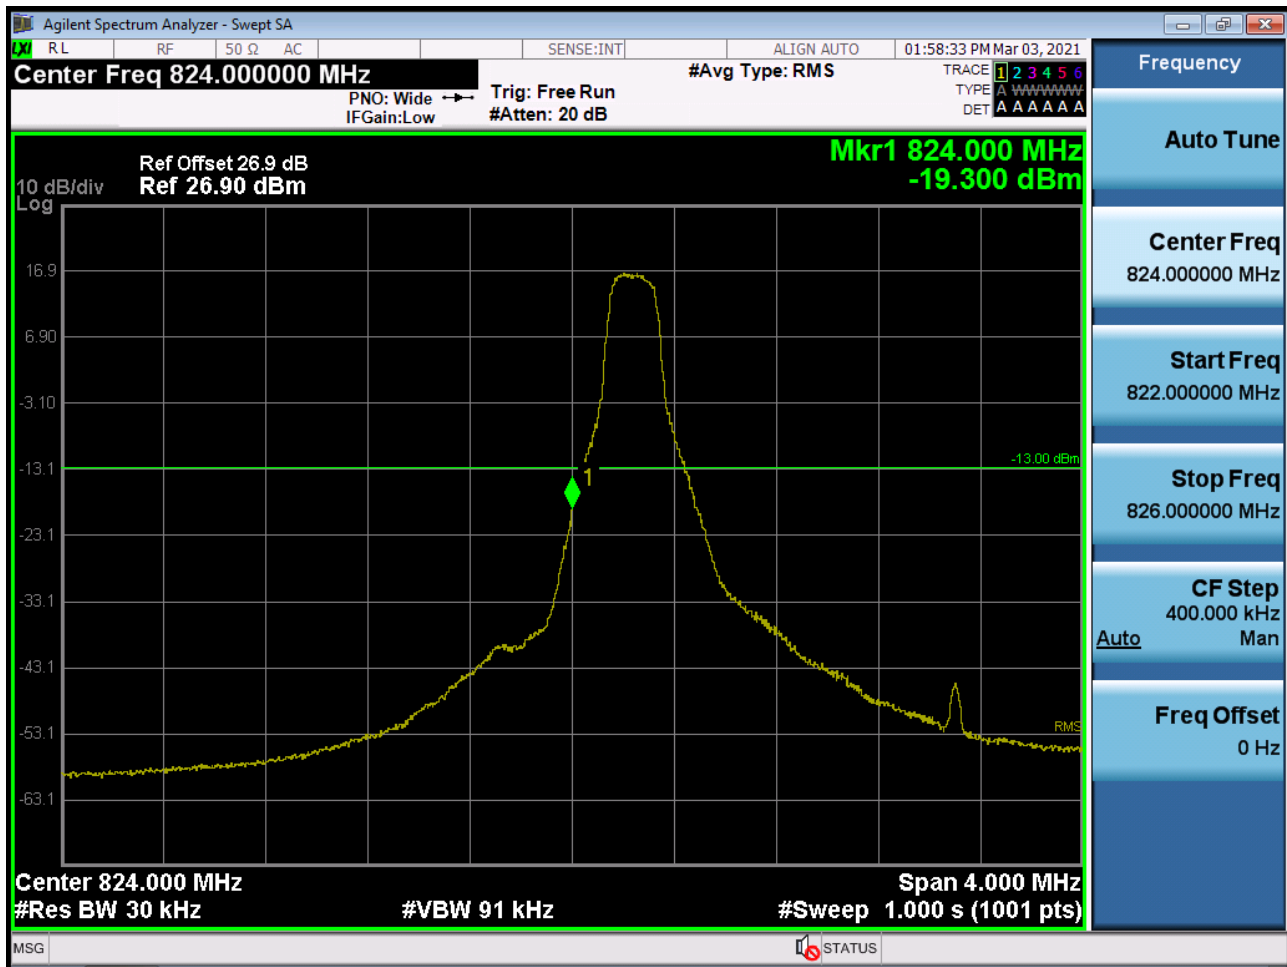


BAND26. Lower Band Edge Plot (3M BW Ch.26805 QPSK\_RB15\_Offset 0)



BAND26. Lower Extended Band Edge Plot (3M BW Ch.26805 QPSK\_RB15\_0)



BAND26. Lower Band Edge Plot (5M BW Ch.26815 QPSK\_RB1\_Offset 0)

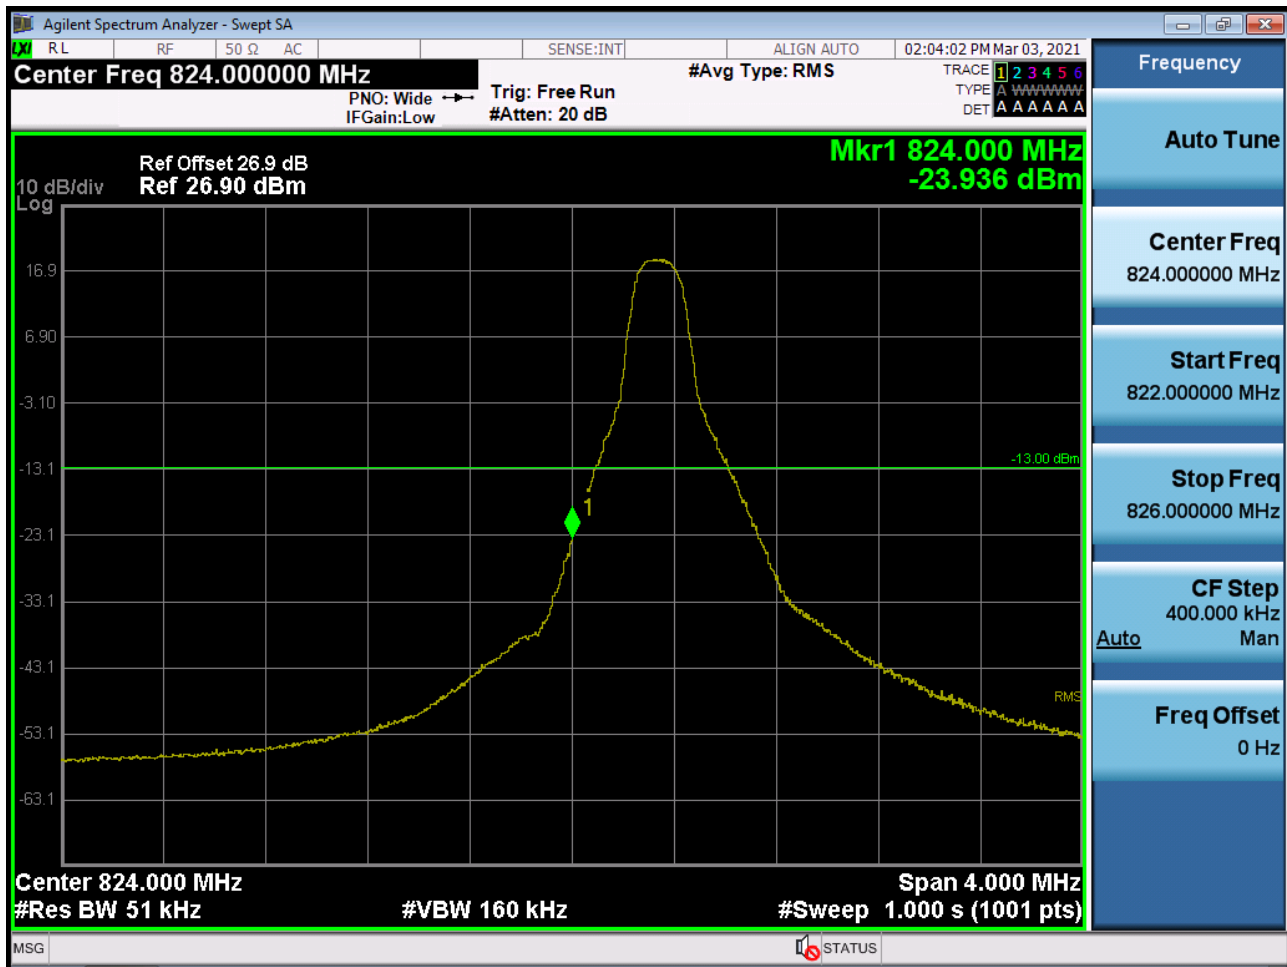

BAND26. Lower Band Edge Plot (5M BW Ch.26815 QPSK\_RB25\_Offset 0)



BAND26. Lower Extended Band Edge Plot (5M BW Ch.26815 QPSK\_RB25\_0)






BAND26. Lower Band Edge Plot (10M BW Ch.26840 QPSK\_RB1\_Offset 0)



BAND26. Lower Band Edge Plot (10M BW Ch.26840 QPSK\_RB50\_Offset 0)



BAND26. Lower Extended Band Edge Plot (10M BW Ch.26840 QPSK\_RB50\_0)

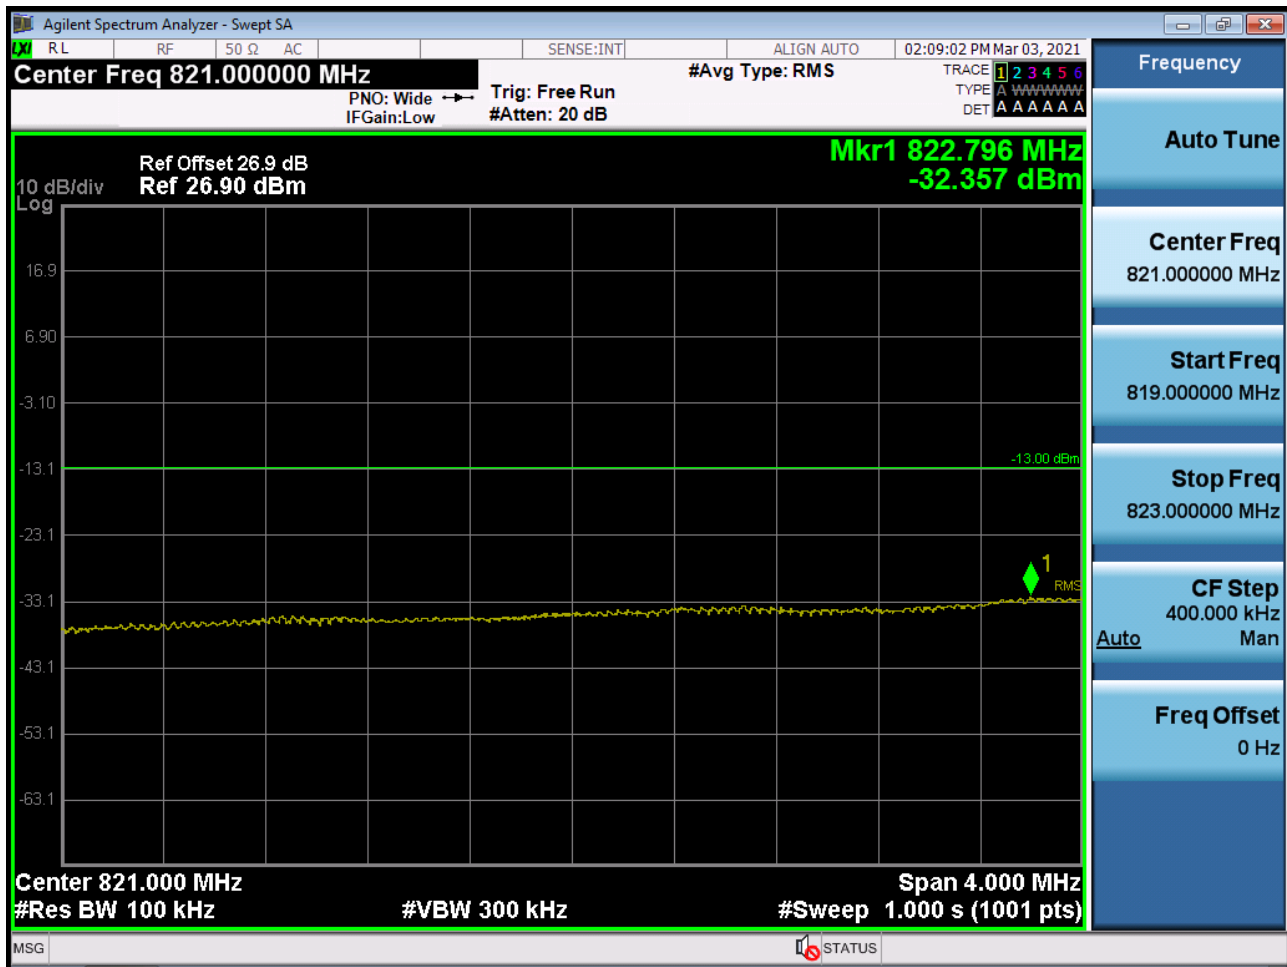

BAND 26. Lower Band Edge Plot (15M BW Ch.26865 QPSK\_RB1\_Offset 0)



BAND 26. Lower Band Edge Plot (15M BW Ch.26865 QPSK\_RB75\_Offset 0)



BAND 26. Lower Extended Band Edge Plot (15M BW Ch.26865 QPSK\_RB75\_0)



BAND26. Upper Band Edge Plot (1.4M BW Ch.27033 QPSK\_RB1\_Offset 5)



BAND26. Upper Band Edge Plot (1.4M BW Ch.27033 QPSK\_RB6\_Offset 0)






BAND26. Upper Extended Band Edge Plot (1.4M BW Ch.27033 QPSK\_RB6\_0)




BAND26. Upper Band Edge Plot (3M BW Ch.27025 QPSK\_RB1\_Offset 14)

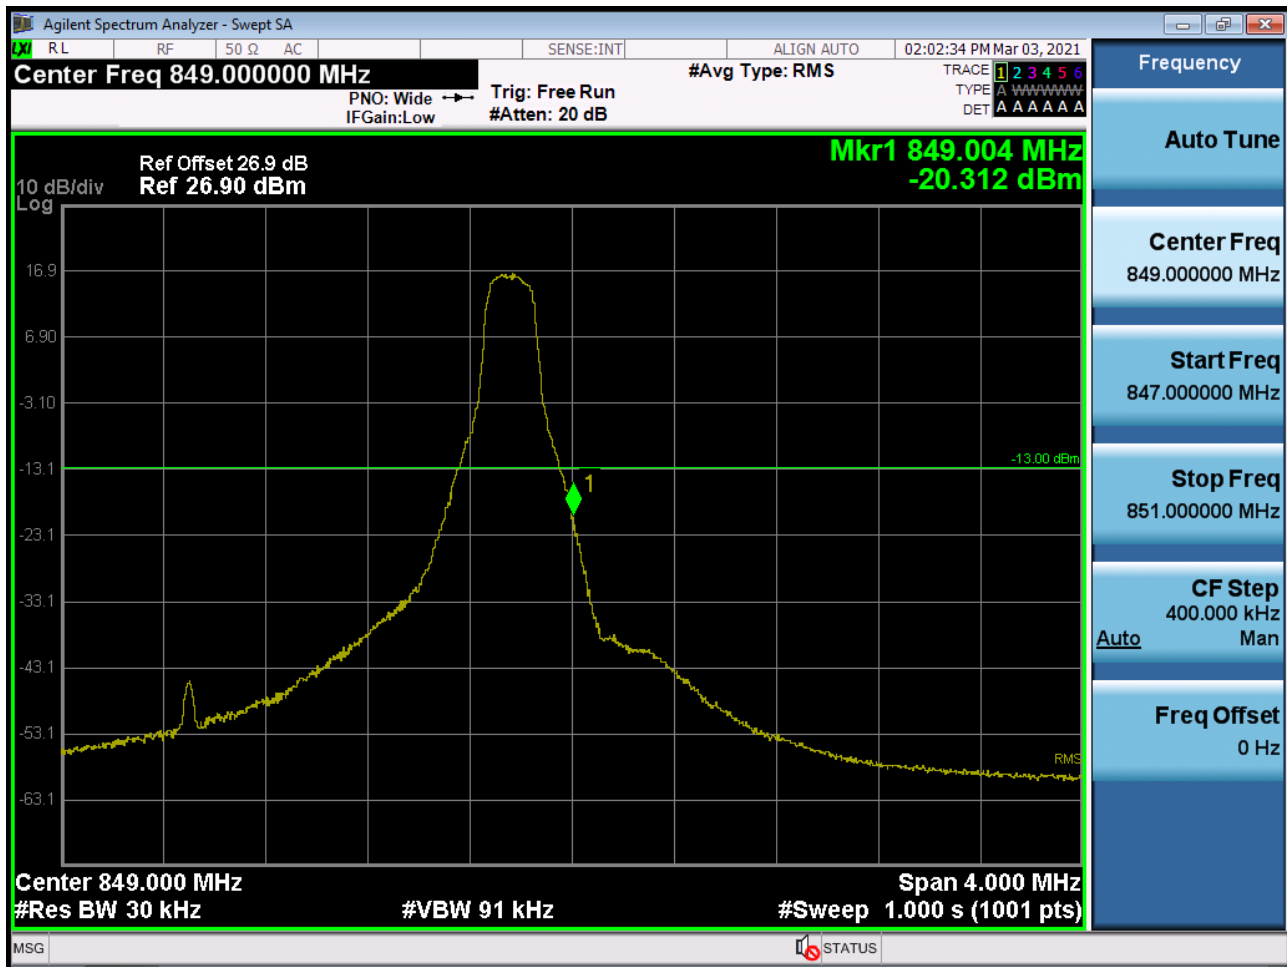

BAND26. Upper Band Edge Plot (3M BW Ch.27025 QPSK\_RB15\_Offset 0)



BAND26. Upper Extended Band Edge Plot (3M BW Ch.27025 QPSK\_RB15\_0)

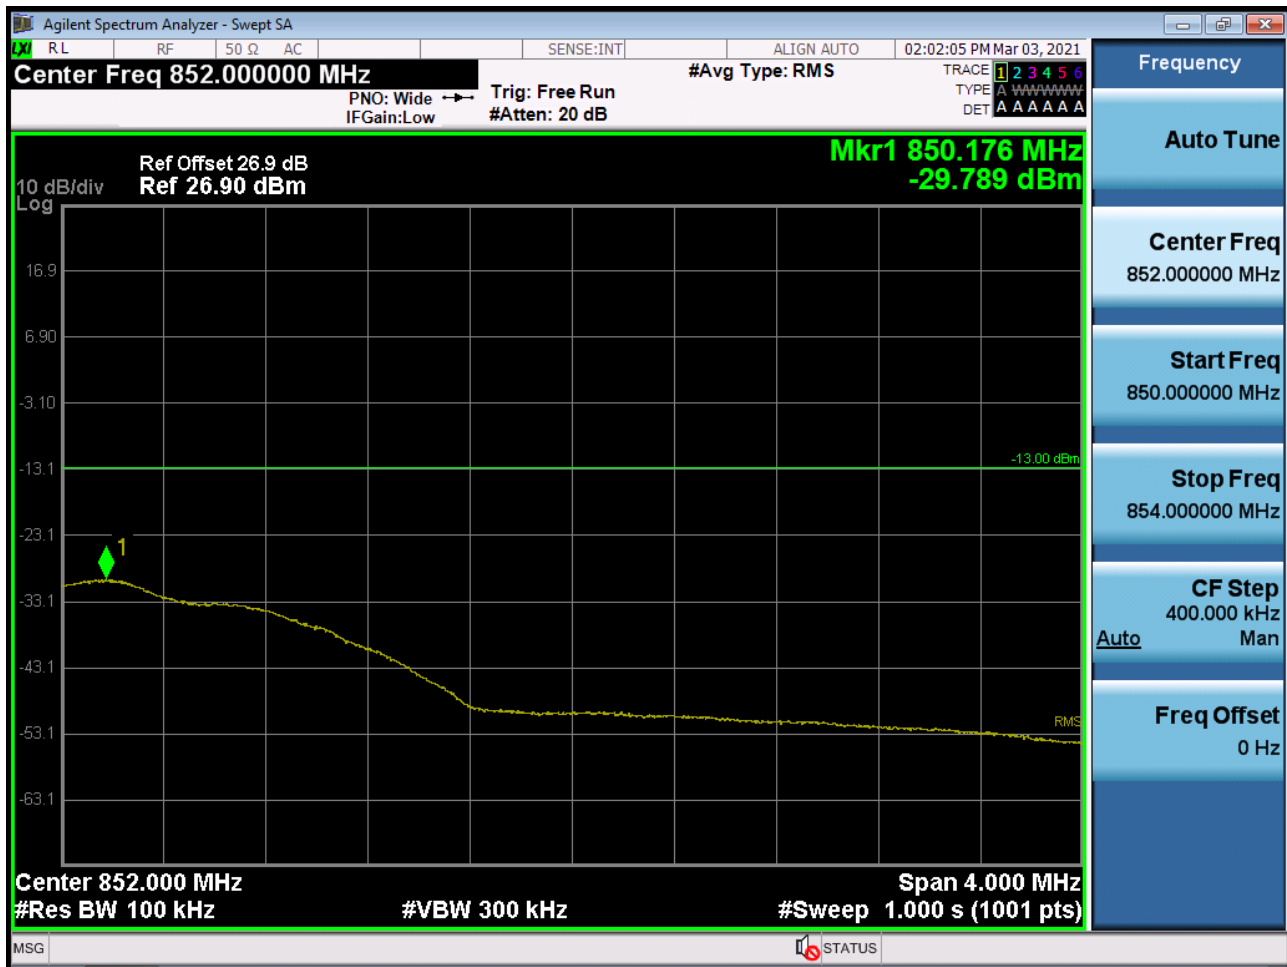

BAND26. Upper Band Edge Plot (5M BW Ch.27015 QPSK\_RB1\_Offset 24)



BAND26. Upper Band Edge Plot (5M BW Ch.27015 QPSK\_RB25\_Offset 0)



BAND26. Upper Extended Band Edge Plot (5M BW Ch.27015 QPSK\_RB25\_0)



BAND26. Upper Band Edge Plot (10M BW Ch.26990 QPSK\_RB1\_Offset 49)





Agilent Spectrum Analyzer - Swept SA

RL RF 50  $\Omega$  AC SENSE:INT ALIGN AUTO 02:12:32 PM Mar 03, 2021

Center Freq 849.000000 MHz #Avg Type: RMS

PNO: Wide Trg: Free Run  
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6  
TYPE A WAAAAAAAAA  
DET A A A A A A

Ref Offset 26.9 dB  
Ref 26.90 dBm

Mkr1 849.000 MHz  
-28.176 dBm

10 dB/div  
Log

16.9  
6.90  
-3.10  
-13.1  
-23.1  
-33.1  
-43.1  
-53.1  
-63.1

-13.00 dBm

RMS

Center 849.000 MHz  
#Res BW 100 kHz

#VBW 300 kHz

Span 4.000 MHz  
#Sweep 1.000 s (1001 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq  
849.000000 MHz


Start Freq  
847.000000 MHz

Stop Freq  
851.000000 MHz

CF Step  
400.000 kHz  
Auto Man

Freq Offset  
0 Hz

BAND26. Upper Extended Band Edge Plot (10M BW Ch.26990 QPSK\_RB50\_0)

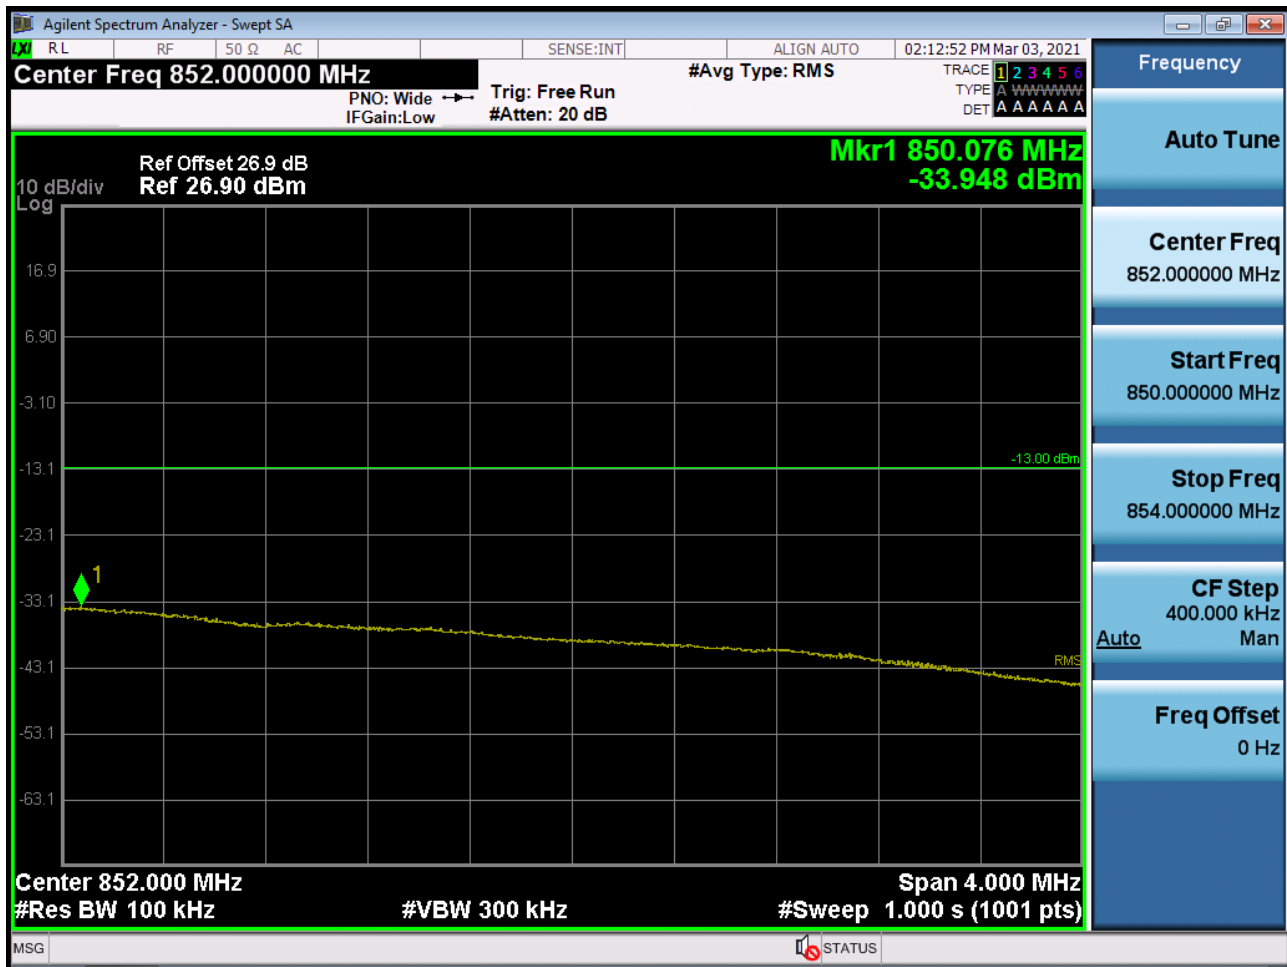

BAND 26. Upper Band Edge Plot (15M BW Ch.26965 QPSK\_RB1\_Offset 74)




BAND 26. Upper Band Edge Plot (15M BW Ch.26965 QPSK\_RB75\_Offset 0)




BAND 26. Upper Extended Band Edge Plot (15M BW Ch.26965 QPSK\_RB75\_0)




BAND26. Conducted Spurious Plot (26797ch\_1.4MHz\_QPSK\_RB 1\_0)

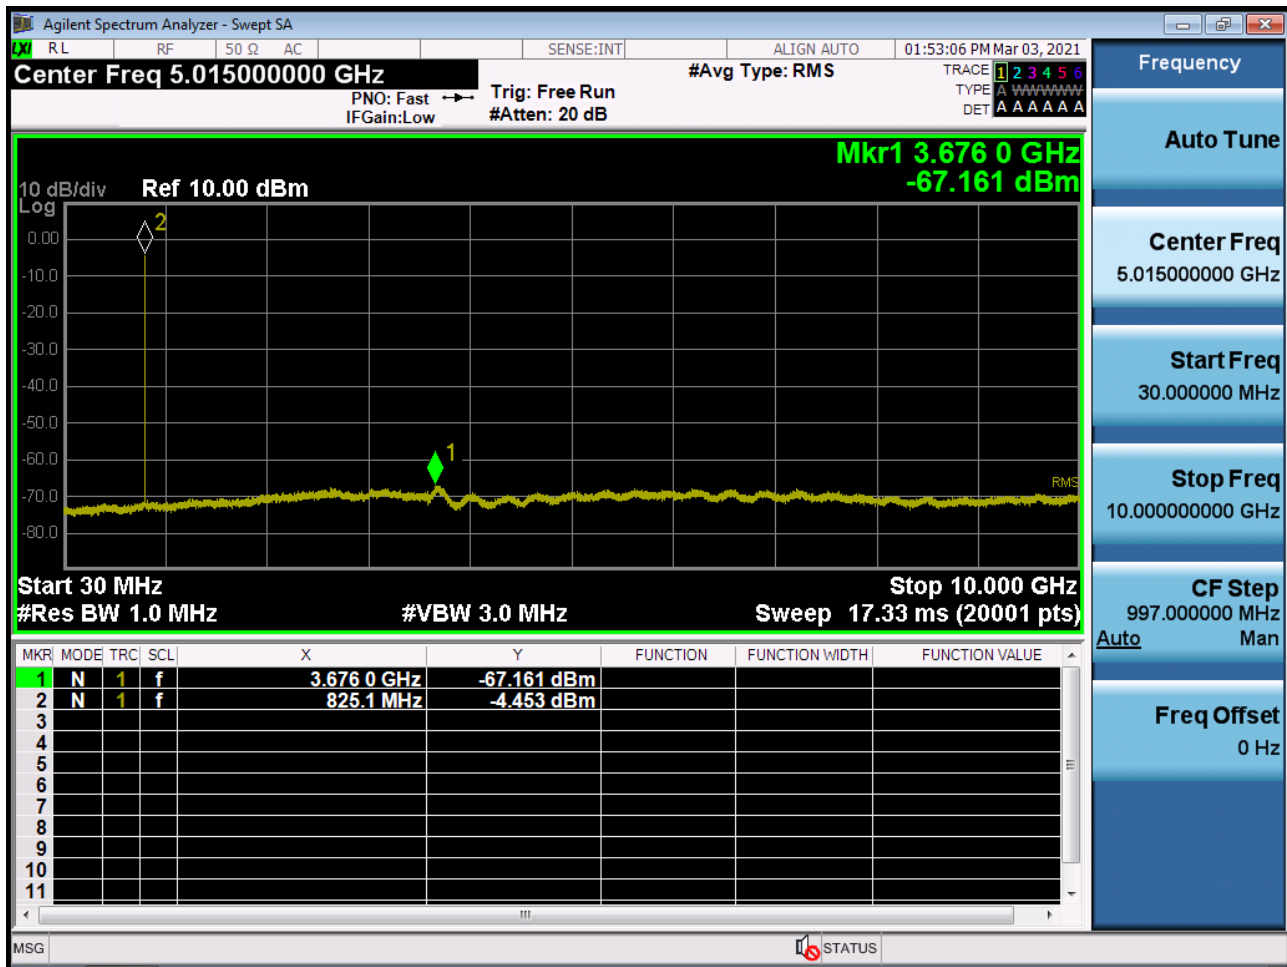

BAND26. Conducted Spurious Plot (26915ch\_1.4MHz\_QPSK\_RB 1\_0)

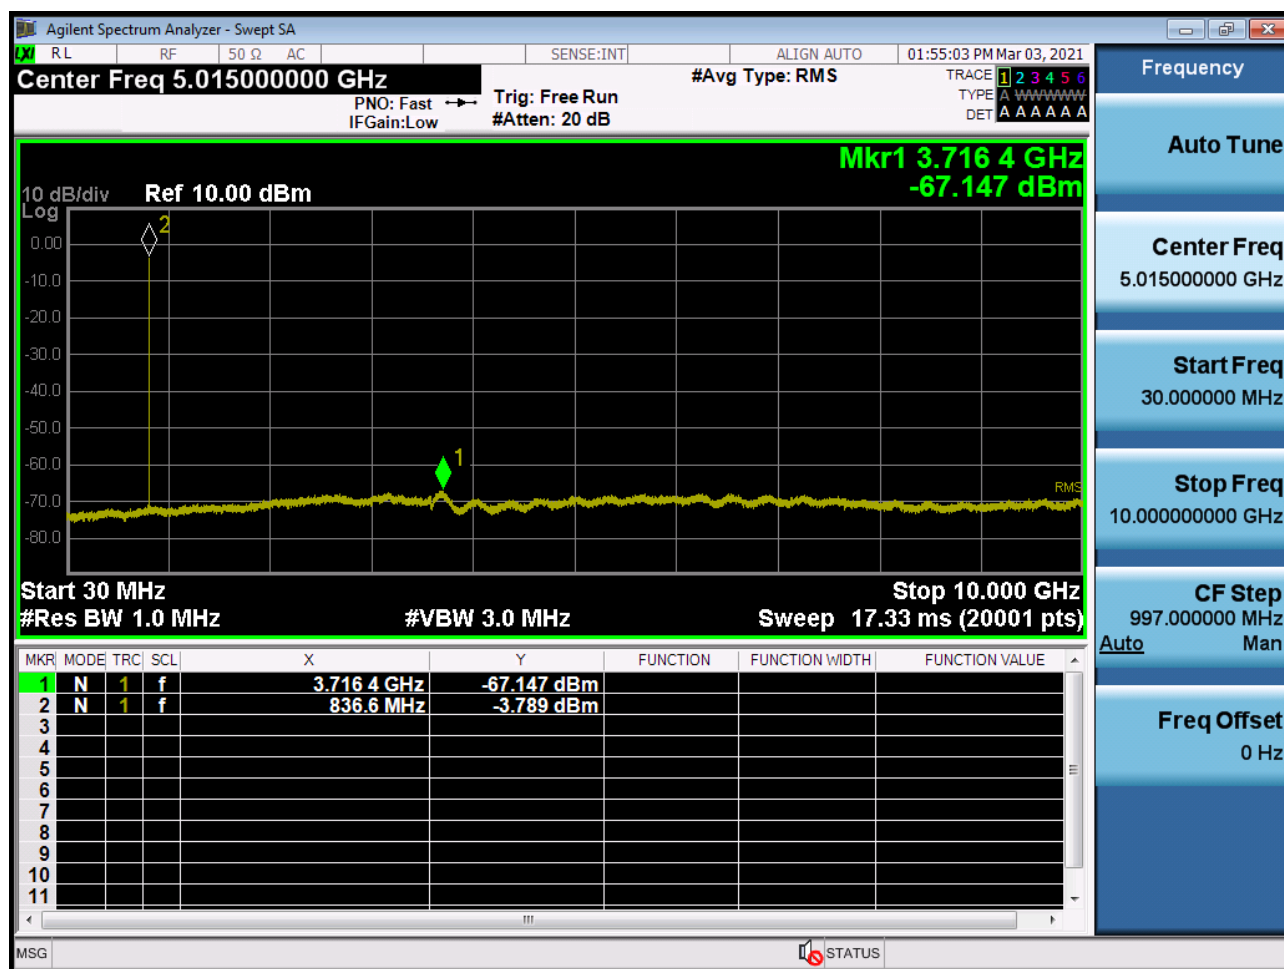


BAND26. Conducted Spurious Plot (27033ch\_1.4MHz\_QPSK\_RB 1\_0)

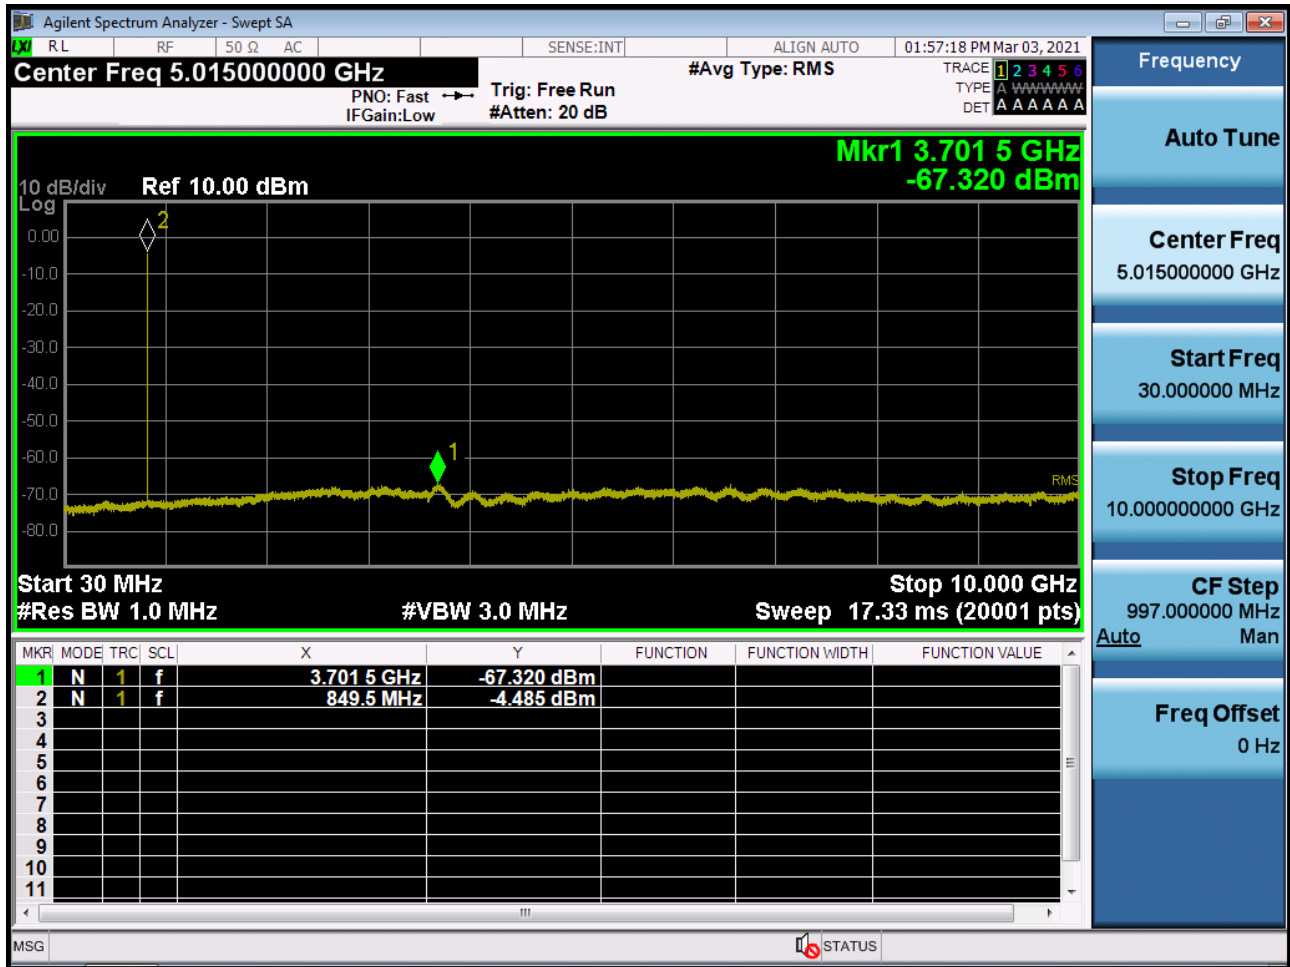





BAND26. Conducted Spurious Plot (26805ch\_3MHz\_QPSK\_RB 1\_0)

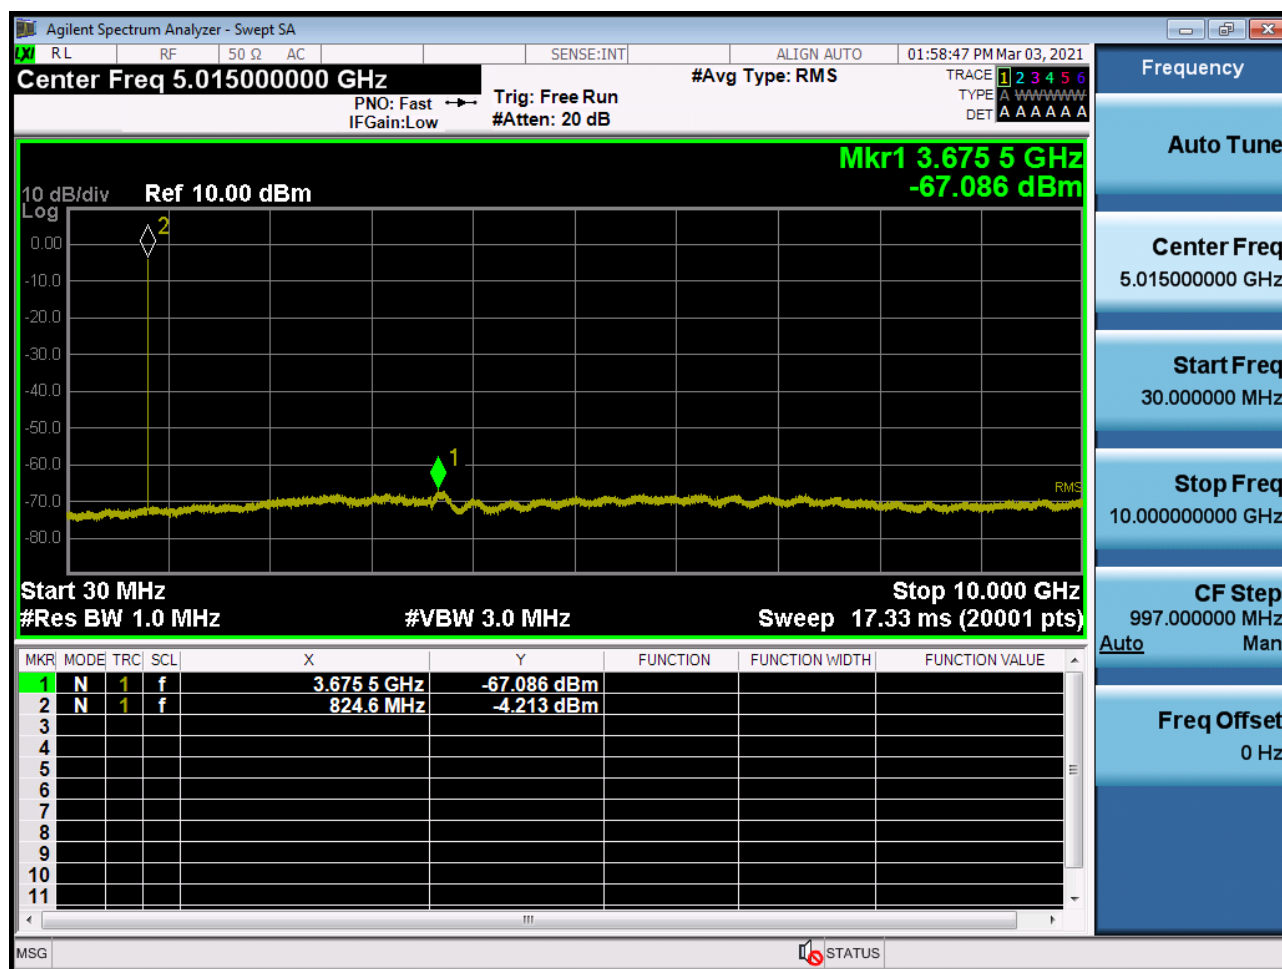


BAND26. Conducted Spurious Plot (26915ch\_3MHz\_QPSK\_RB 1\_0)

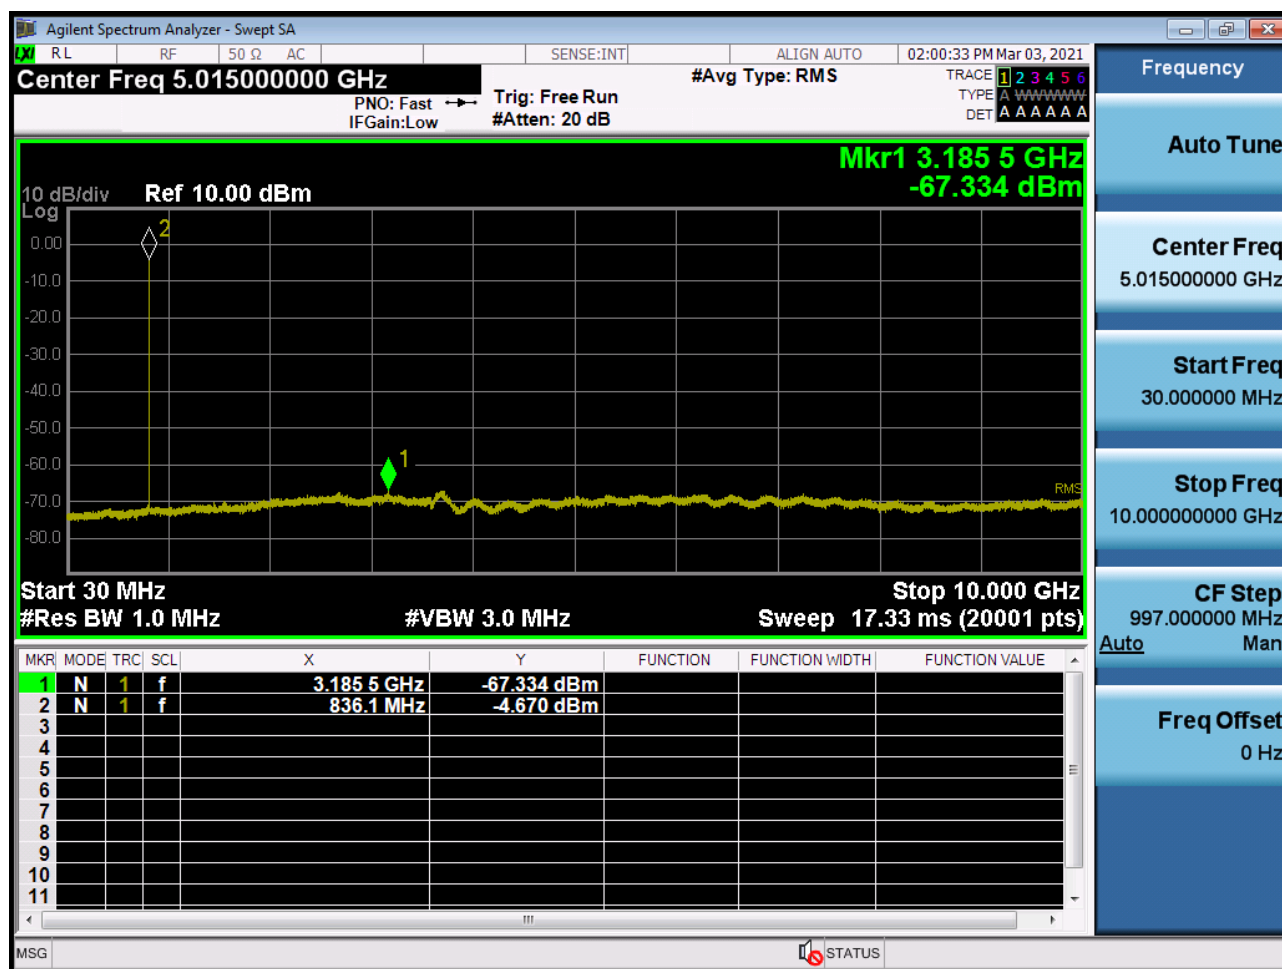


BAND26. Conducted Spurious Plot (27025ch\_3MHz\_QPSK\_RB 1\_0)

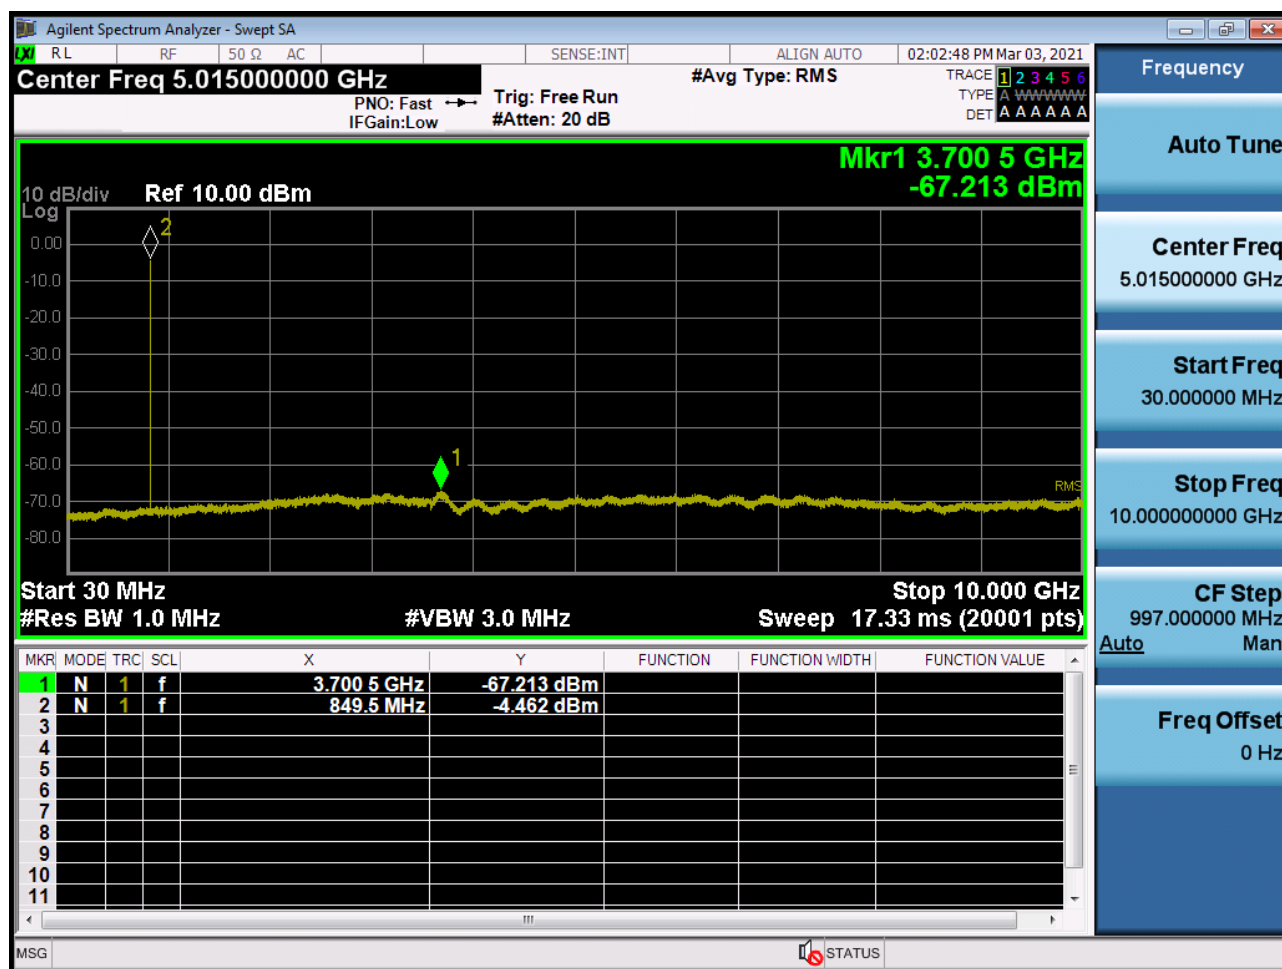


BAND26. Conducted Spurious Plot (26815ch\_5MHz\_QPSK\_RB 1\_0)

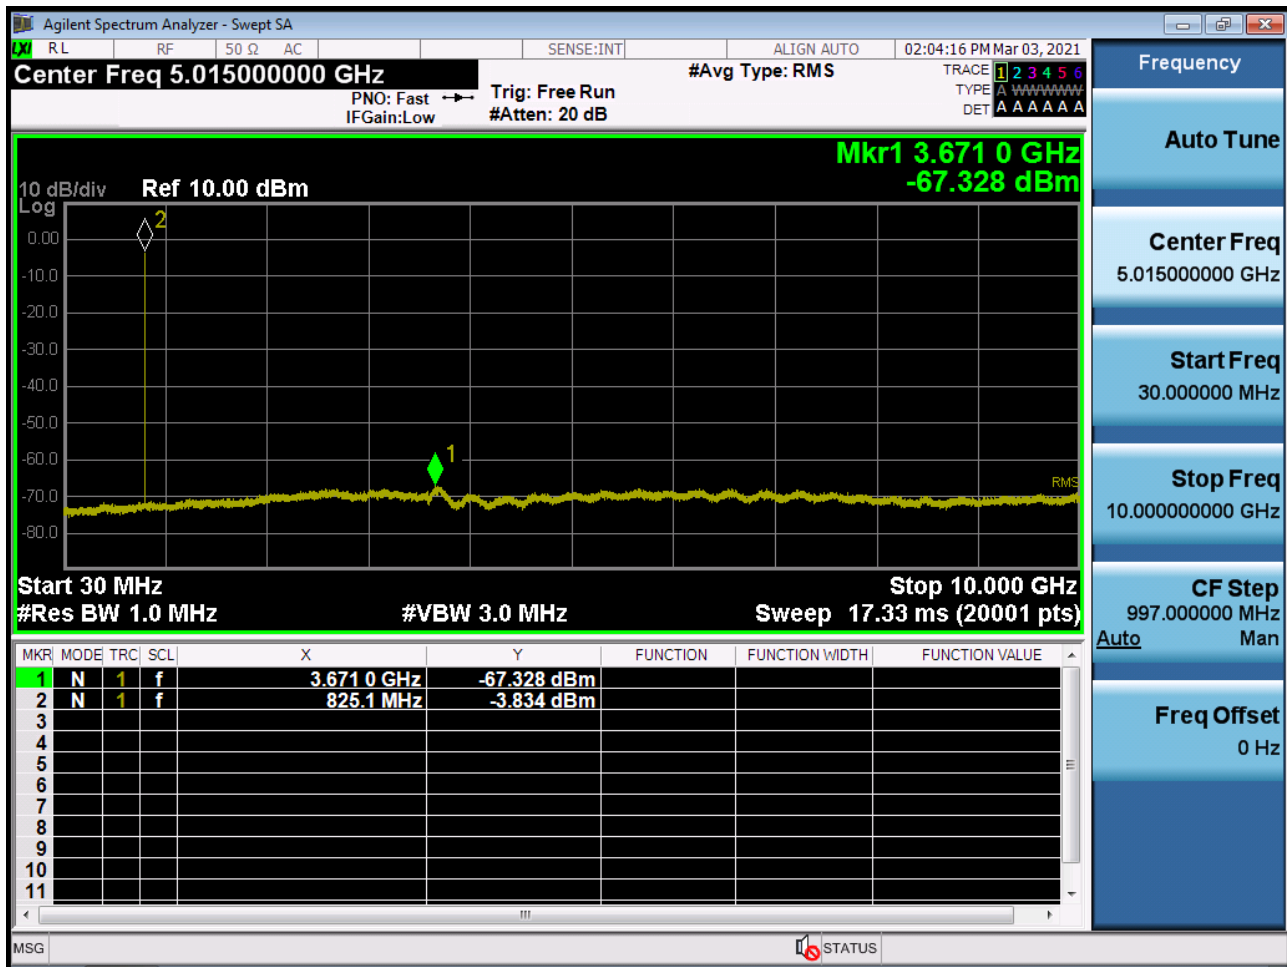


BAND26. Conducted Spurious Plot (26915ch\_5MHz\_QPSK\_RB 1\_0)

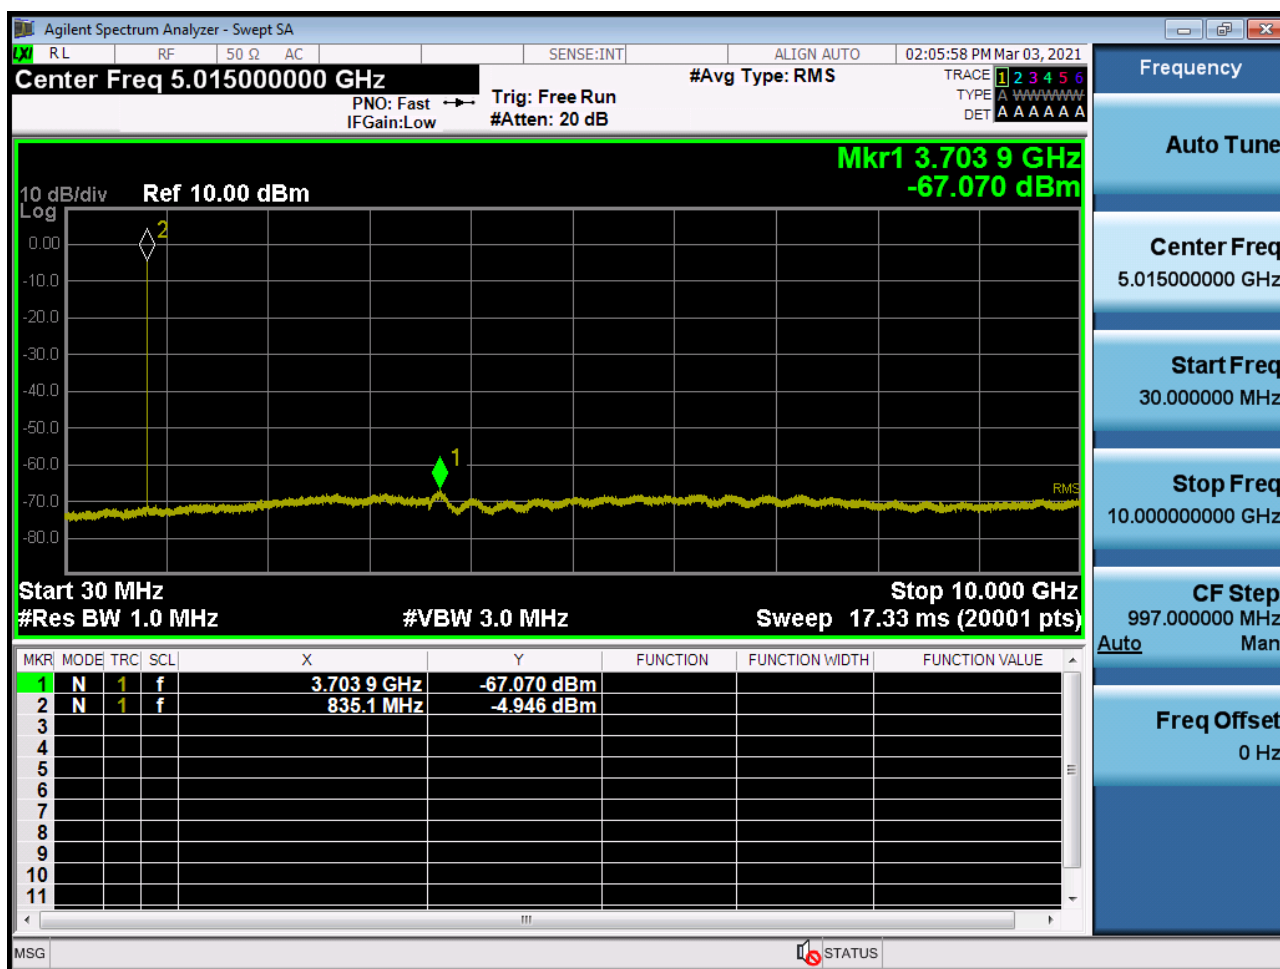


BAND26. Conducted Spurious Plot (27015ch\_5MHz\_QPSK\_RB 1\_0)

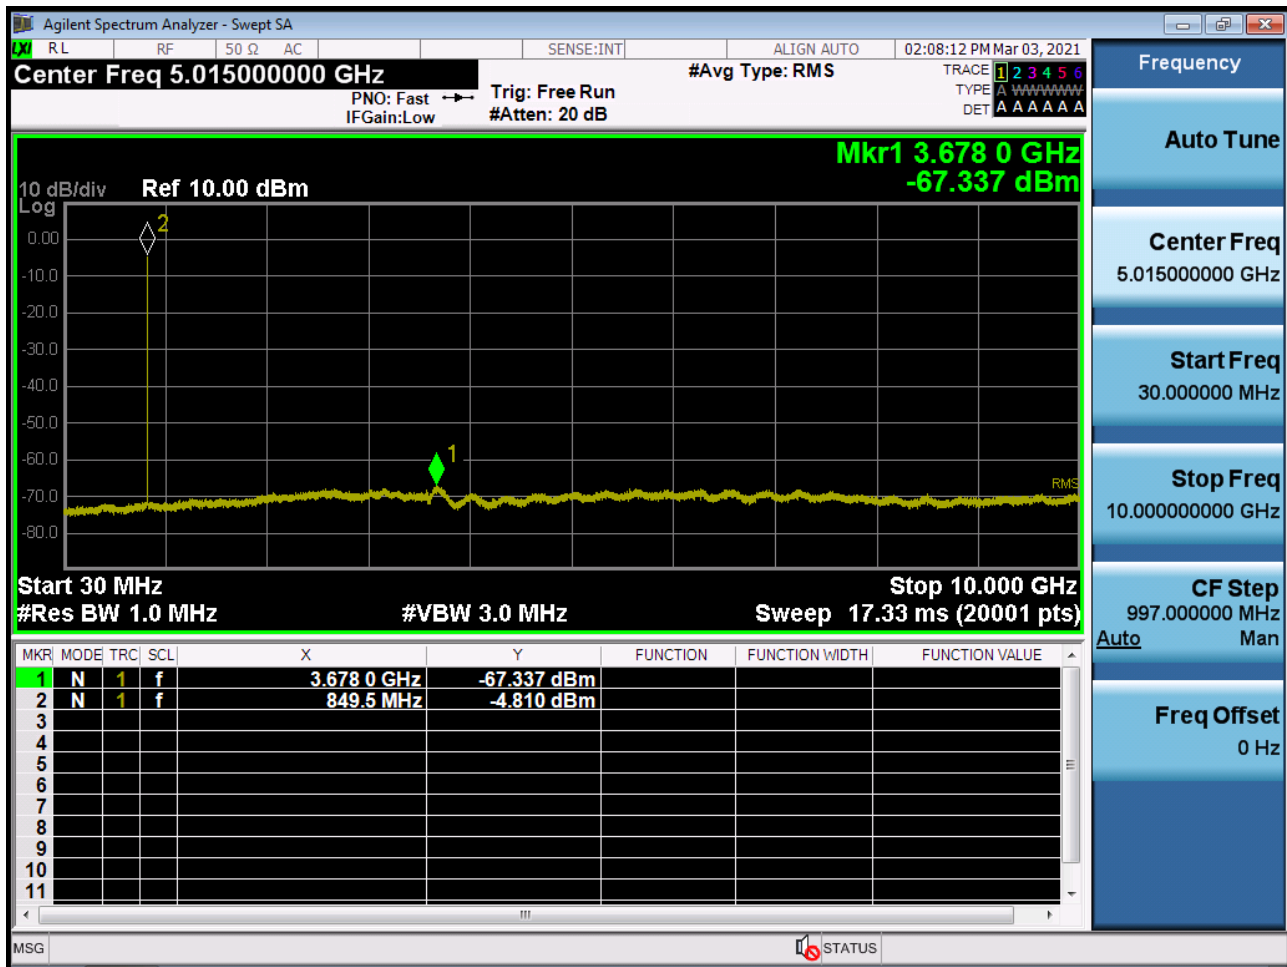

BAND26. Conducted Spurious Plot (26840ch\_10MHz\_QPSK\_RB 1\_0)

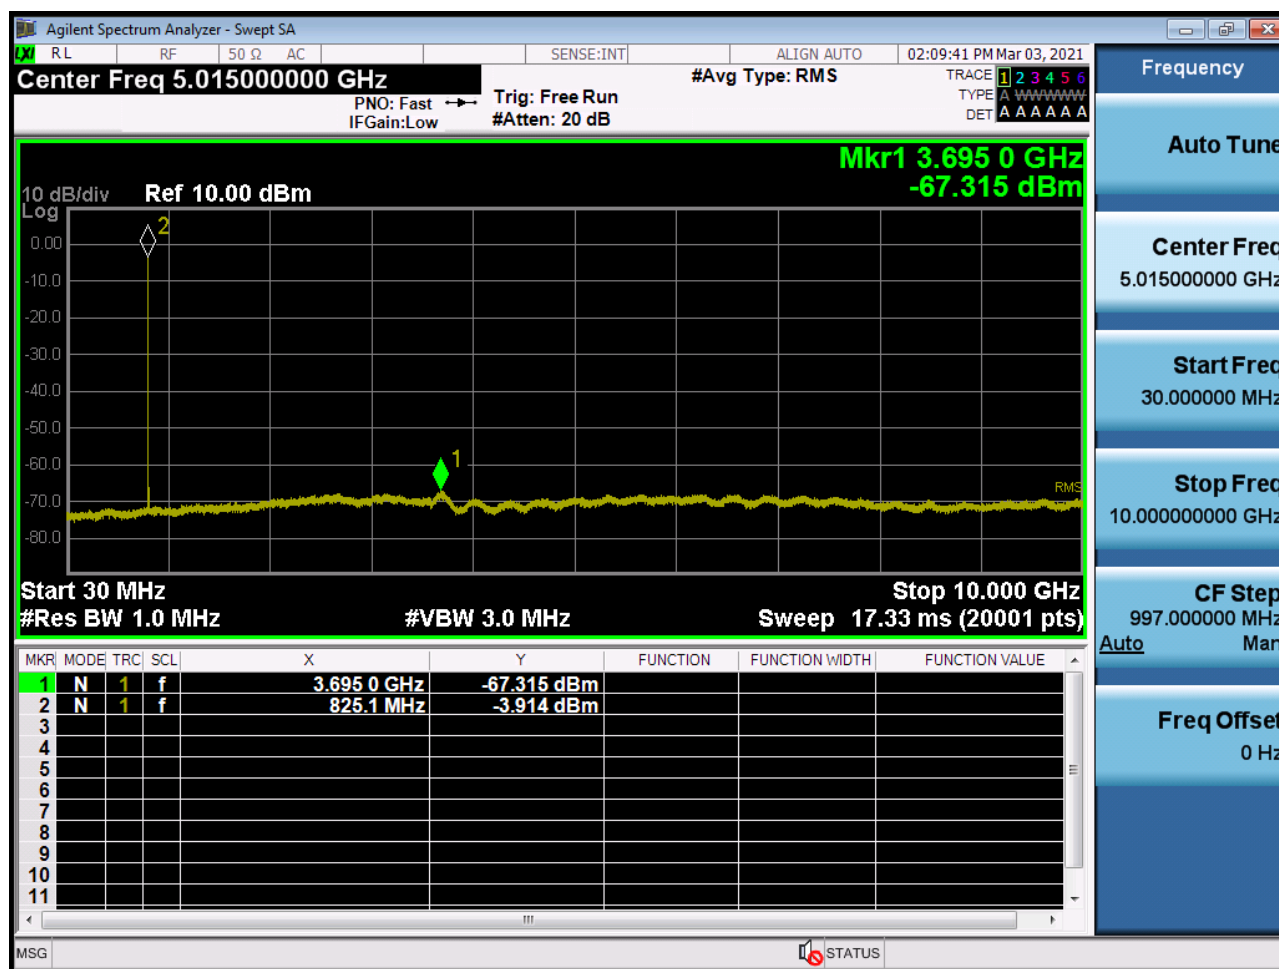


BAND26. Conducted Spurious Plot (26915ch\_10MHz\_QPSK\_RB 1\_0)

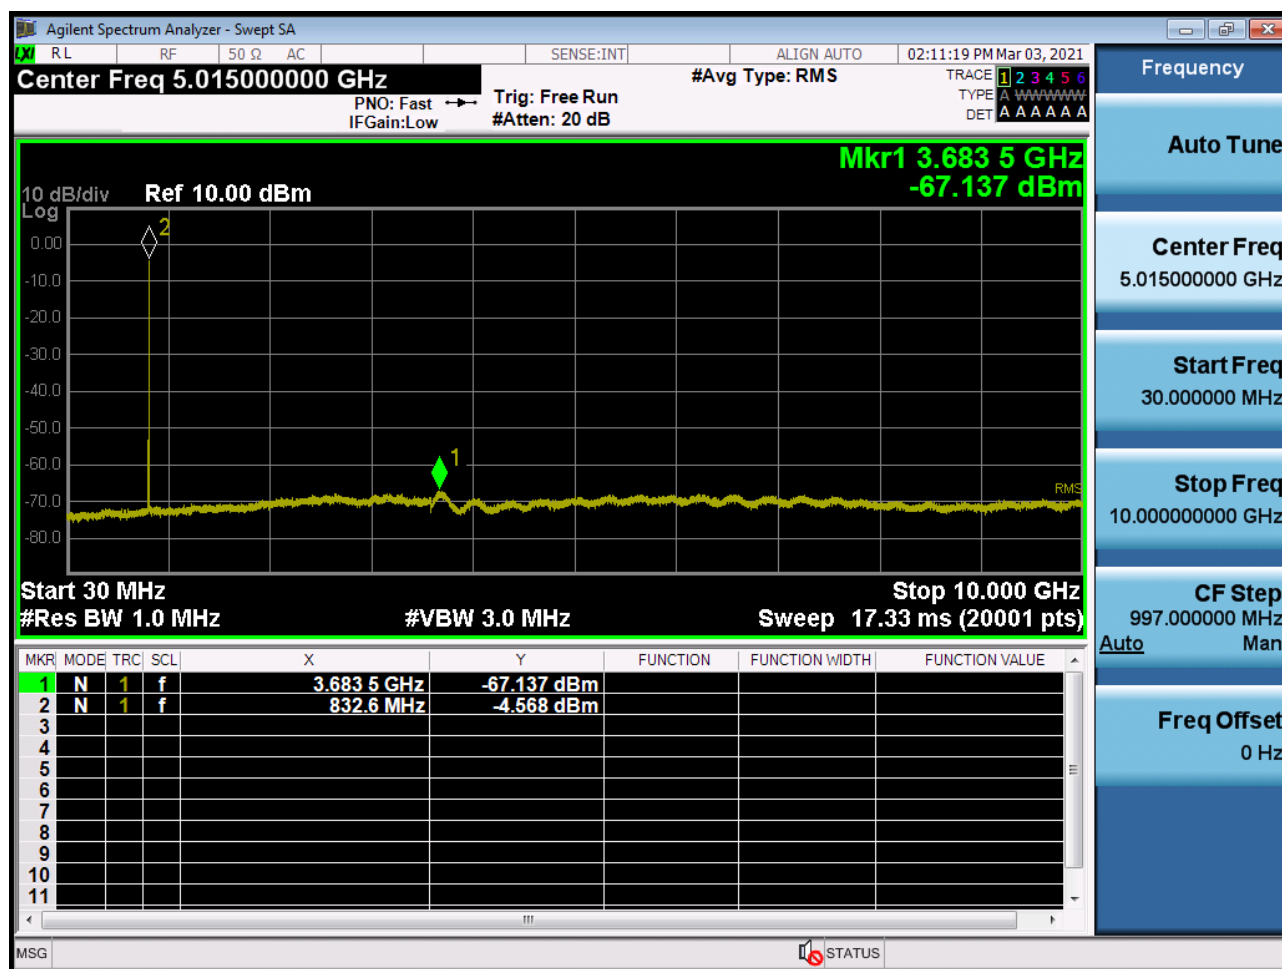





BAND26. Conducted Spurious Plot (26990ch\_10MHz\_QPSK\_RB 1\_0)

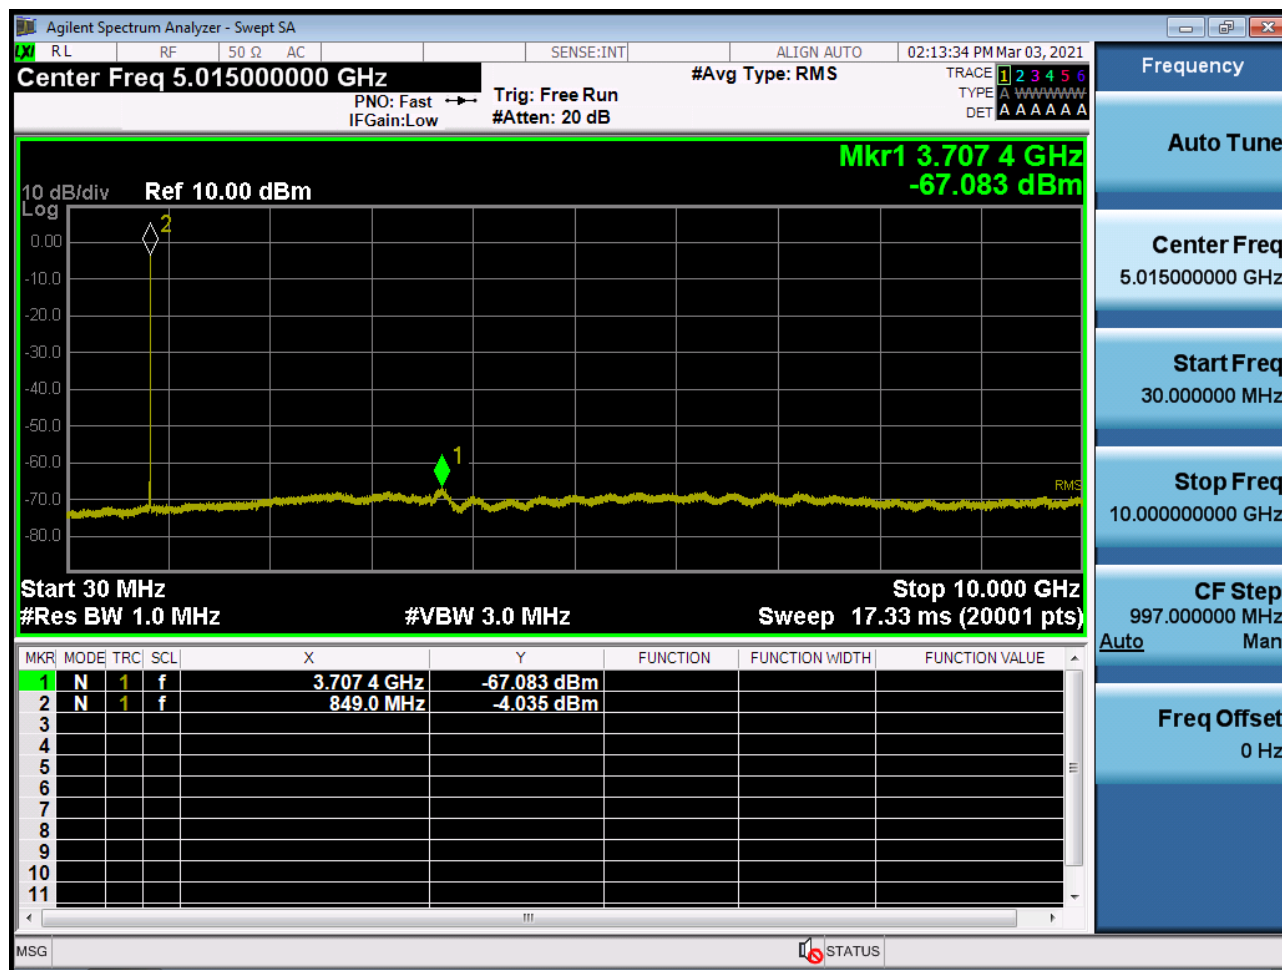


BAND 26. Conducted Spurious (26865ch\_15MHz\_QPSK\_RB 1\_0)

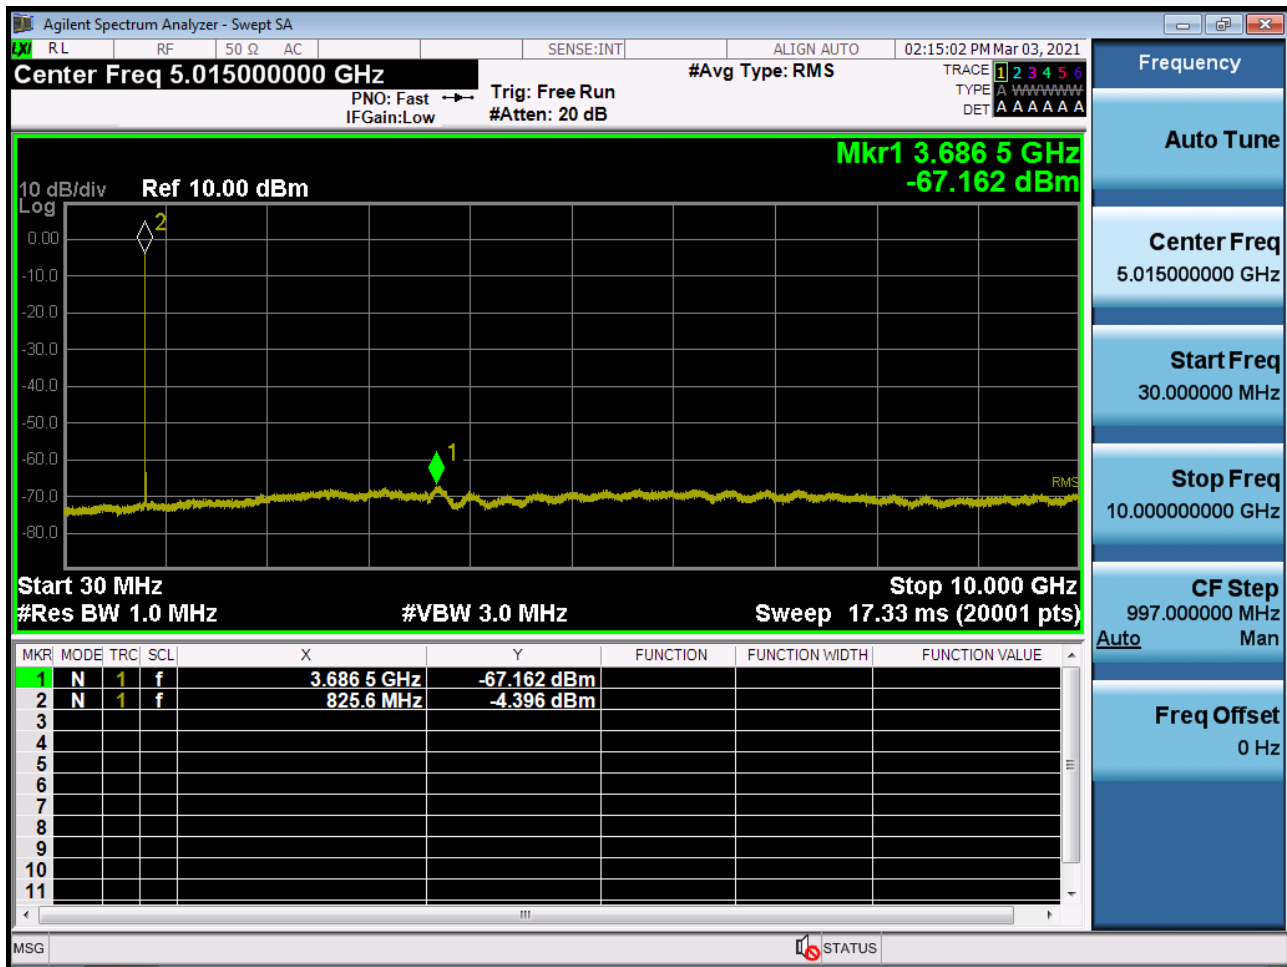

BAND 26. Conducted Spurious (26915ch\_15MHz\_QPSK\_RB 1\_0)

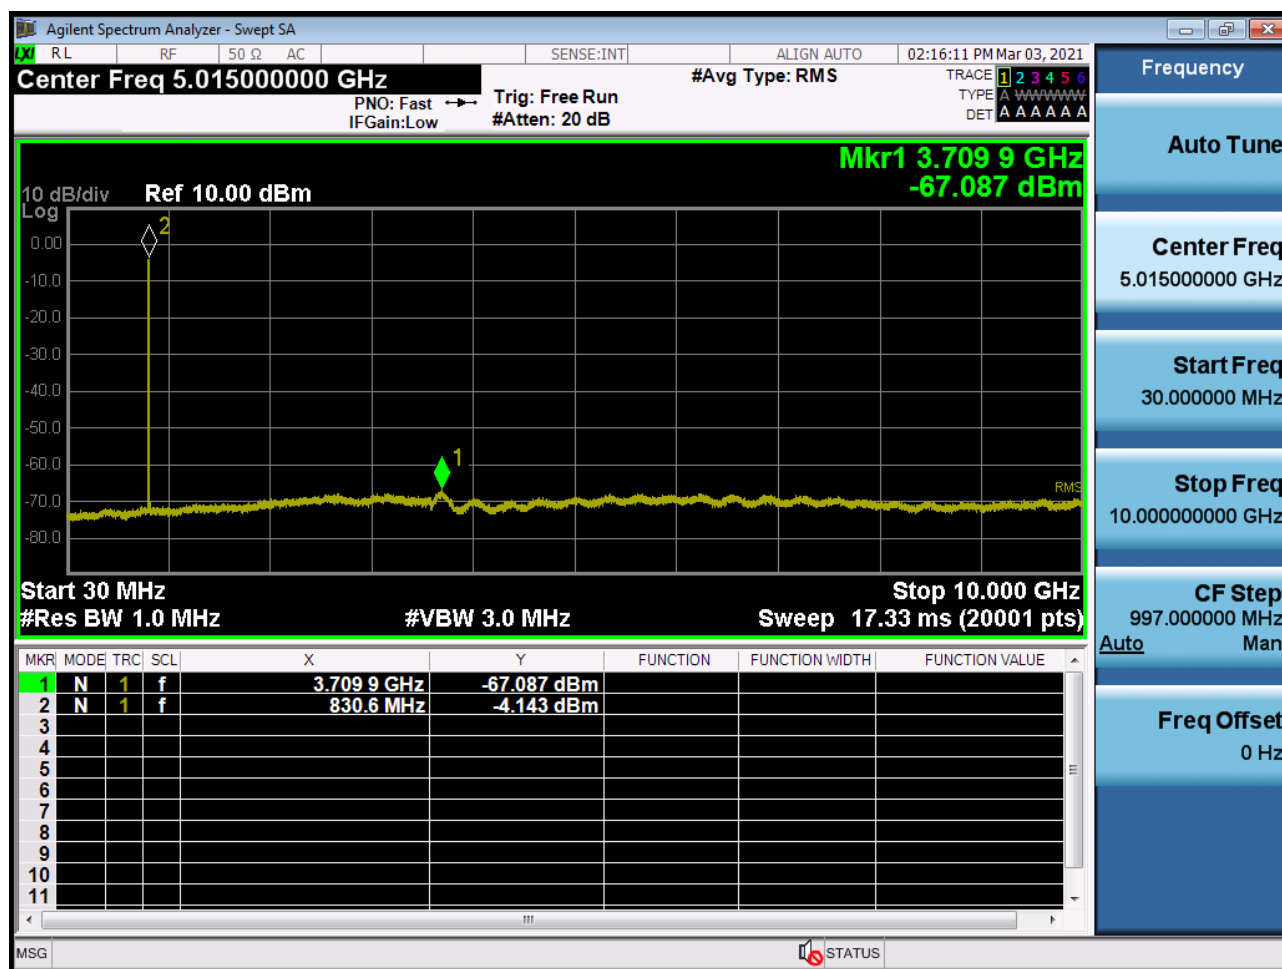

BAND 26. Conducted Spurious (26965ch\_15MHz\_QPSK\_RB 1\_0)

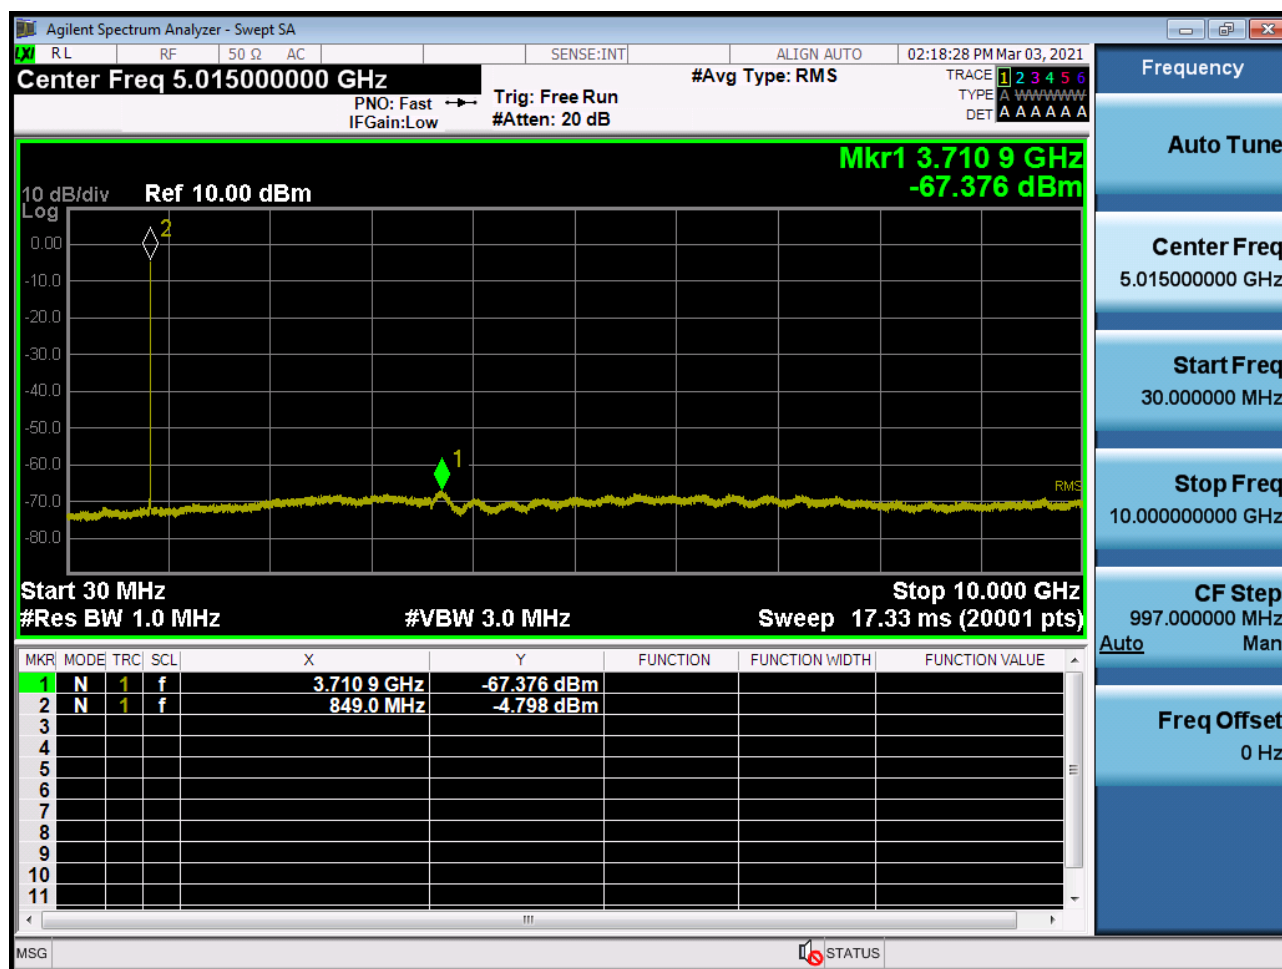

## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2103-FC017-P |