

# FCC and ISED Test Report

Apple Inc  
Model: A2686

In accordance with FCC 47 CFR Part 15C, ISED  
RSS-247 and ISED RSS-GEN  
(2.4 GHz Bluetooth)

Prepared for: Apple Inc  
One Apple Park Way  
Cupertino, California  
95014, USA



Add value.  
Inspire trust.

FCC ID: BCGA2686

IC: 579C-A2686

## COMMERCIAL-IN-CONFIDENCE

Document 75954423-12 Issue 01

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve Marshall	Senior Engineer	Authorised Signatory	26 October 2022

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Lauren Walters	26 October 2022	

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

ISED Accreditation  
12669A Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2020, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2022 TÜV SÜD. This report relates only to the actual item/items tested.

### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuvsud.com/en](http://www.tuvsud.com/en)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom

TÜV SÜD

TÜV®



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Product Information .....	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record .....	5
1.7	Test Location .....	6
<b>2</b>	<b>Test Details .....</b>	<b>7</b>
2.1	Restricted Band Edges.....	7
2.2	Frequency Hopping Systems - Average Time of Occupancy .....	27
2.3	Frequency Hopping Systems - Channel Separation.....	42
2.4	Frequency Hopping Systems - Number of Hopping Channels .....	57
2.5	Frequency Hopping Systems - 20 dB Bandwidth .....	72
2.6	Maximum Conducted Output Power .....	118
2.7	Spurious Radiated Emissions .....	133
2.8	Authorised Band Edges .....	149
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>169</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	26-October-2022

**Table 1**

## 1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2686
Serial Number(s)	XH696VW7R0, FP3F23QFHX and XVFXG6M544
Hardware Version(s)	REV 1.0
Software Version(s)	22A12310t, 22A12310s and 22A12310t
Number of Samples Tested	3
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2020 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Order Number	0540246998
Date of Receipt of EUT	05-April-2022
Start of Test	13-June-2022
Finish of Test	05-October-2022
Name of Engineer(s)	Danial Shafique, Taha Shafique, Elliot Callender, Thomas Randall, Ioan-Alexandru Bogatu and Daniel Cameron
Related Document(s)	KDB 662911 D01 v02r01 ANSI C63.10 (2013) ANSI C63.10 (2020) ANSI C63.4 (2014)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz Bluetooth - FHSS						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.1	8.10	Restricted Band Edges	Pass	
2.2	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Average Time of Occupancy	Pass	
2.3	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Channel Separation	Pass	
2.4	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Number of Hopping Channels	Pass	
2.5	15.247 (a)(1)	5.1	6.7	Frequency Hopping Systems - 20 dB Bandwidth	Pass	
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.7	15.247 (d) and 15.209	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	
2.8	15.247 (d)	5.5	-	Authorised Band Edges	Pass	

**Table 2**



## 1.4 Product Information

### 1.4.1 Technical Description

The Equipment under test (EUT) was an Apple desktop computer with Bluetooth® and IEEE 802.11 a/b/g/n/ac/ax Wi-Fi in the 2.4GHz, 5GHz and 6GHz bands.

### 1.4.2 Test Setup

For conducted tests, a conducted test point was provided by the manufacturer via a UFL connector and cable. The loss of these test cables were known and compensated for in any conducted measurements.

For tests in SISO operation, conducted tests were performed on the BT Dedicated Core (BT Core 2) as well as the Core from the main radio with the highest antenna gain as Core 0 and Core 1 are identical but with unequal antenna gains.

Bluetooth BDR/EDR was assessed as a FHSS system. The EUT supports Bluetooth on the following mode of operations across its antenna ports:

BT Core 0 (SISO) – iPA BDR/EDR and ePA EDR  
BT Core 1 (SISO) – iPA BDR/EDR and ePA EDR  
BT Core 0 + BT Core 1 (TxBF) – iPA BDR/EDR and ePA EDR  
BT Core 2 (SISO) – iPA BDR/EDR

For all tests, the EUT was put into a continuous transmit test mode with the manufacturer's test commands via a script running in the EUTs terminal application. The EUT then transmitted the required type of modulation/packet type on either a static channel selected within the test script or frequency hopping over the maximum number of supported channels.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

### 1.4.3 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
BT Core 0	2400 to 2480	2.58	0.7
BT Core 1	2400 to 2480	6.24	0.7
BT Core 2	2400 to 2480	2.05	0.7

**Table 3**

## 1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



## 1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2686, Serial Number: XH696VW7R0			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2686, Serial Number: FP3F23QFHX			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2686, Serial Number: XVFXG6M544			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 4**



## 1.7 Test Location

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - FHSS		
Restricted Band Edges	Danial Shafique, Taha Shafique and Elliot Callender	UKAS
Frequency Hopping Systems - Average Time of Occupancy	Daniel Cameron	UKAS
Frequency Hopping Systems - Channel Separation	Daniel Cameron	UKAS
Frequency Hopping Systems - Number of Hopping Channels	Daniel Cameron	UKAS
Frequency Hopping Systems - 20 dB Bandwidth	Daniel Cameron	UKAS
Maximum Conducted Output Power	Daniel Cameron	UKAS
Authorised Band Edges	Danial Shafique, Taha Shafique and Elliot Callender	UKAS

**Table 5**

Office Address:

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - FHSS		
Spurious Radiated Emissions	Danial Shafique, Thomas Randall and Ioan-Alexandru Bogatu	UKAS

**Table 6**

Office Address:

TÜV SÜD  
Concorde Park  
Concorde Way  
Fareham  
Hampshire  
PO15 5FG  
United Kingdom



## 2 Test Details

### 2.1 Restricted Band Edges

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205  
ISED RSS-247, Clause 3.1  
ISED RSS-GEN, Clause 8.10

#### 2.1.2 Equipment Under Test and Modification State

A2686, S/N: FP3F23QFHX - Modification State 0

#### 2.1.3 Date of Test

13-June-2022 to 16-June-2022

#### 2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:

$10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

#### 2.1.5 Environmental Conditions

Ambient Temperature	19.9 - 21.1 °C
Relative Humidity	45.0 - 54.1 %



## 2.1.6 Test Results

### 2.4 GHz Bluetooth - FHSS

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	1	DH5	2402	2390.0	54.26	39.38
Static	$\pi/4$ DQPSK	1	2DH5	2402	2390.0	53.78	39.44
Static	8-DPSK	1	3DH5	2402	2390.0	54.29	39.46
Static	GFSK	1	DH5	2480	2483.5	53.00	40.80
Static	$\pi/4$ DQPSK	1	2DH5	2480	2483.5	53.21	41.19
Static	8-DPSK	1	3DH5	2480	2483.5	53.62	41.32

Table 7 - Restricted Band Edge Results

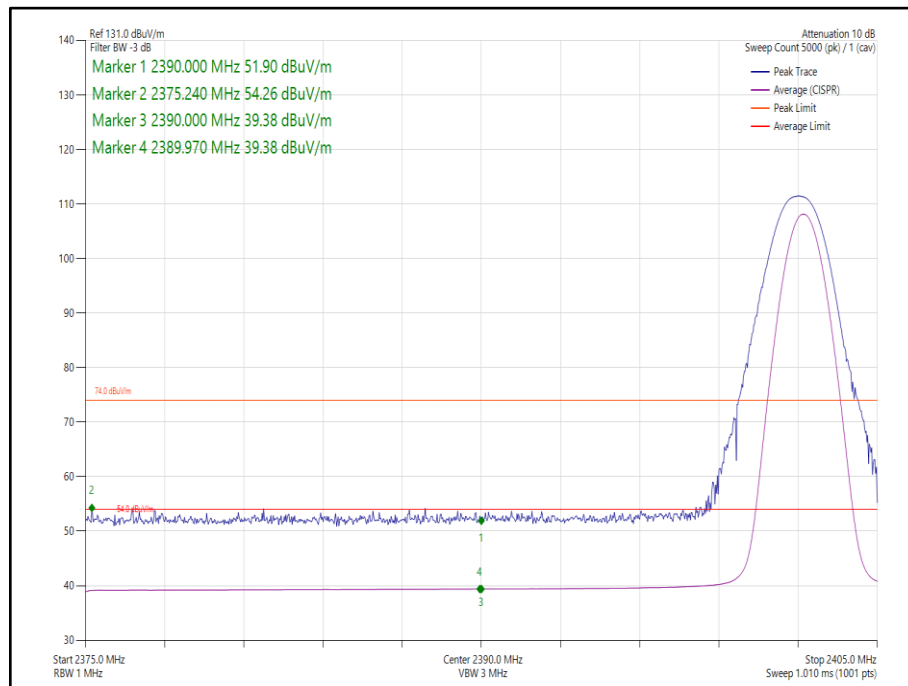


Figure 1 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

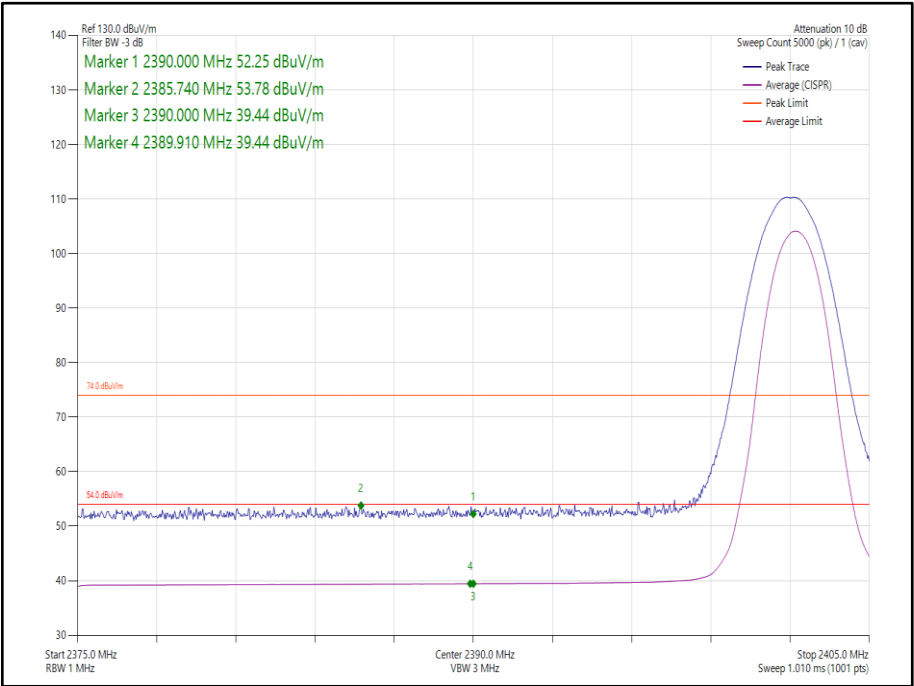


Figure 2 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

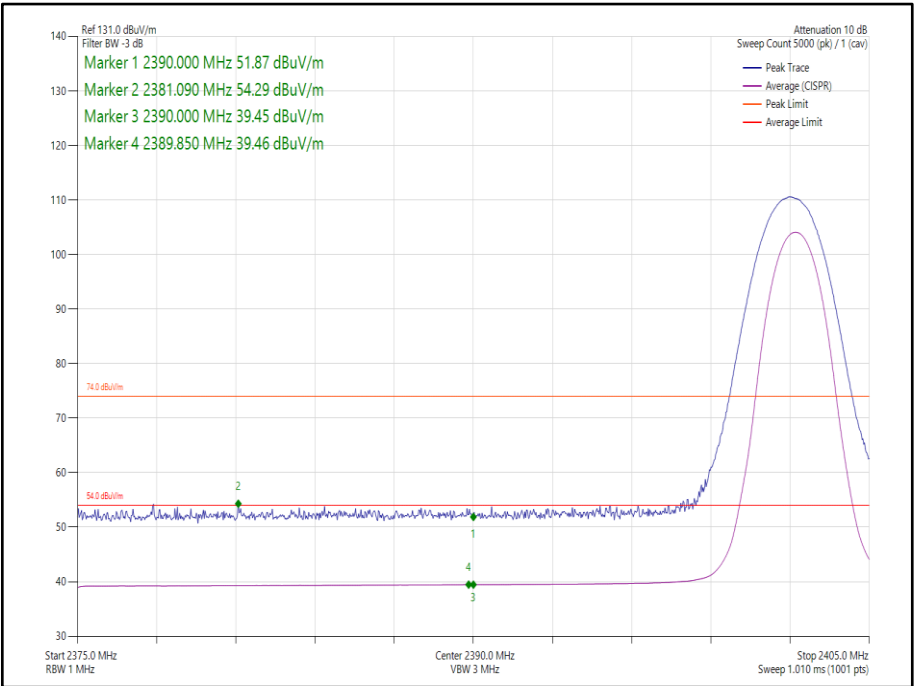


Figure 3 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

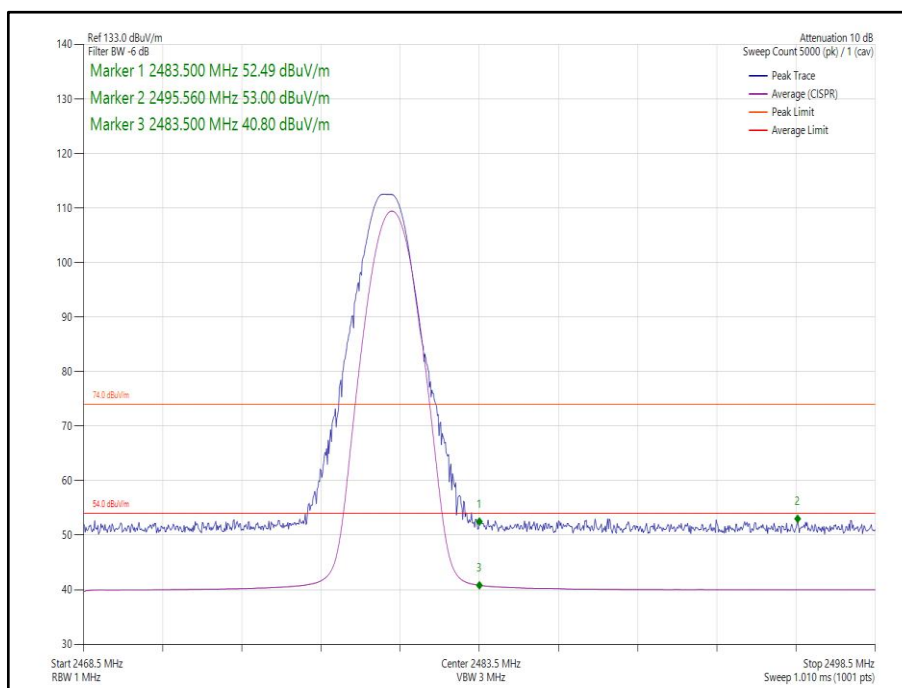


Figure 4 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

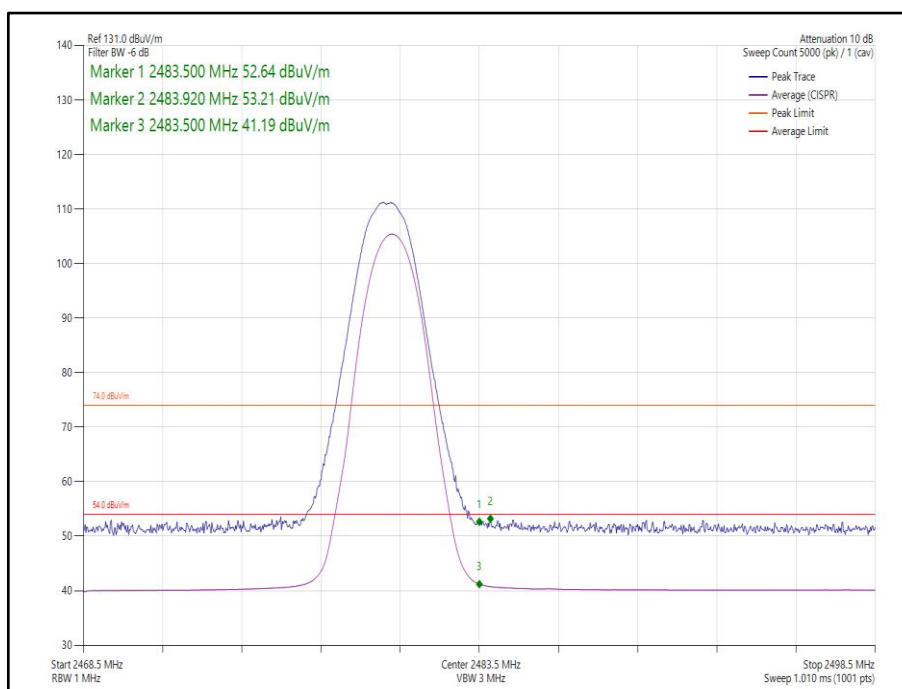


Figure 5 - Static -  $\pi/4$  DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

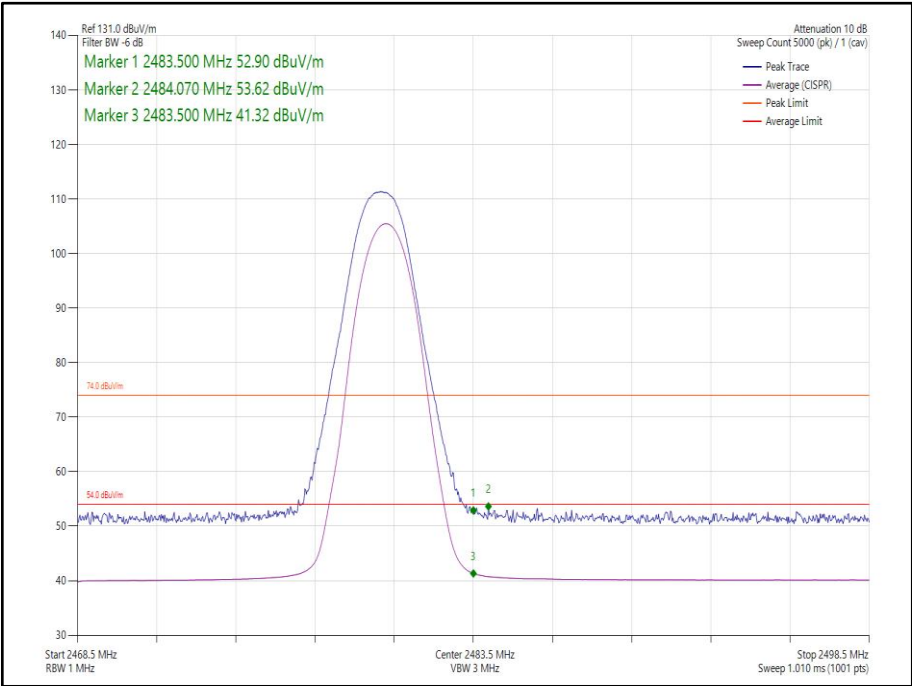



Figure 6 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

## 2.4 GHz Bluetooth (FHSS)

### ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	$\pi/4$ DQPSK	1	2DH5	2402	2390.0	53.83	39.45
Static	8-DPSK	1	3DH5	2402	2390.0	54.02	39.43
Static	$\pi/4$ DQPSK	1	2DH5	2480	2483.5	54.02	41.32
Static	8-DPSK	1	3DH5	2480	2483.5	53.42	41.36

**Table 8 - Restricted Band Edge Results**

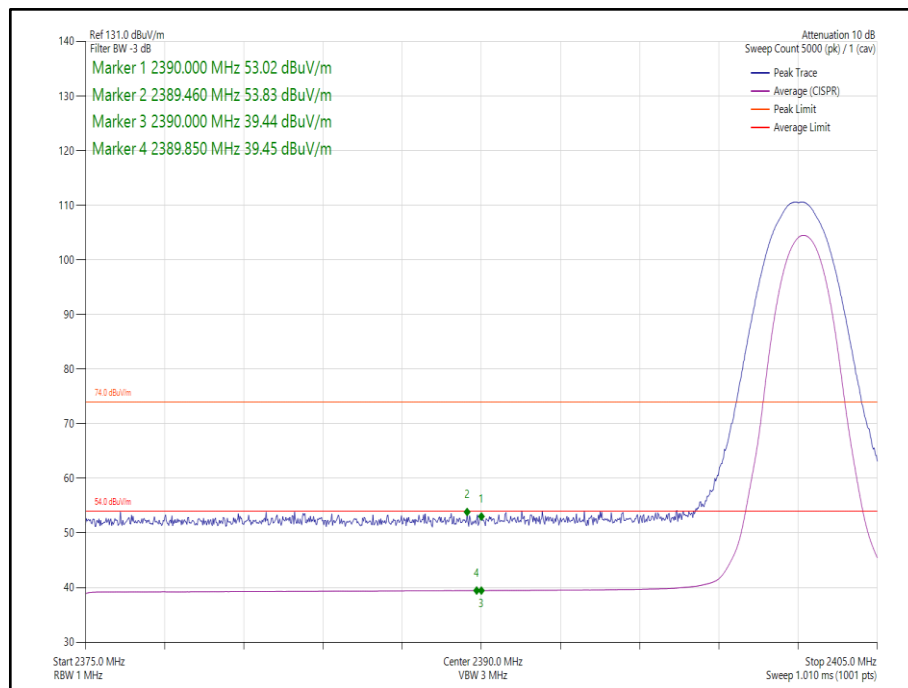

**Figure 7 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz**

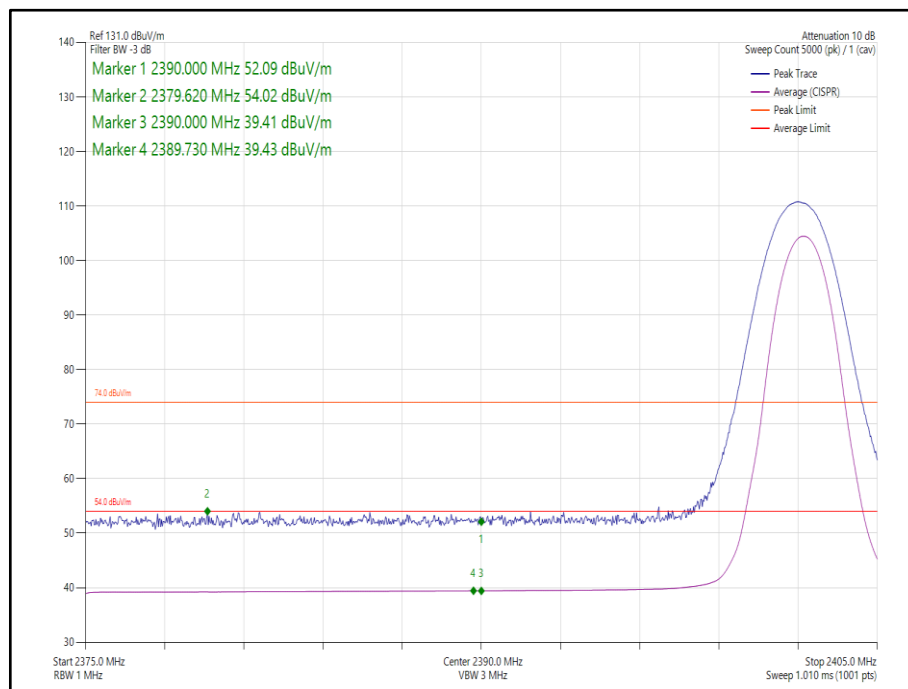


Figure 8 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

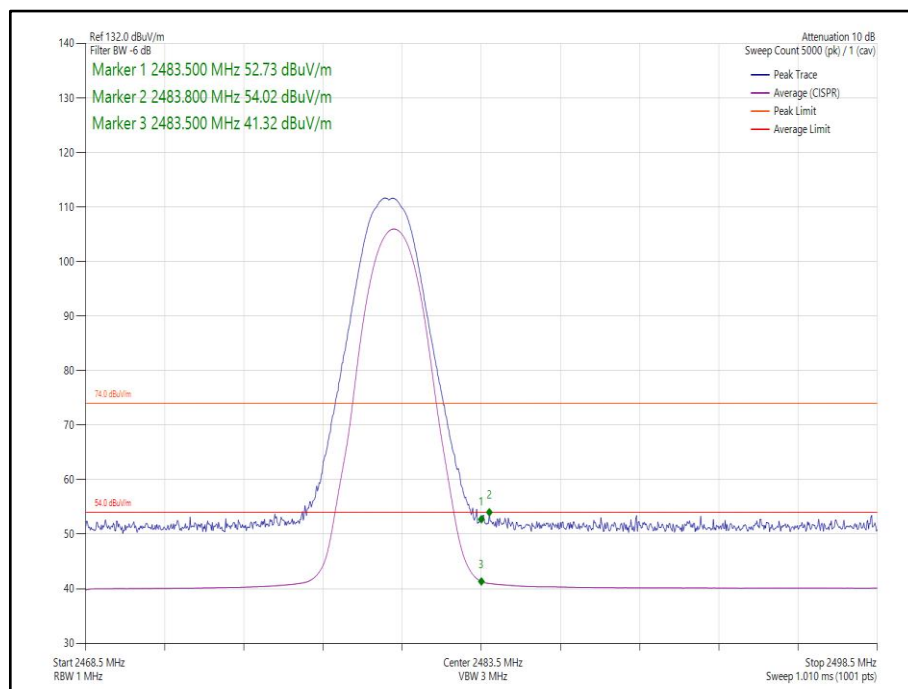


Figure 9 - Static -  $\pi/4$  DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

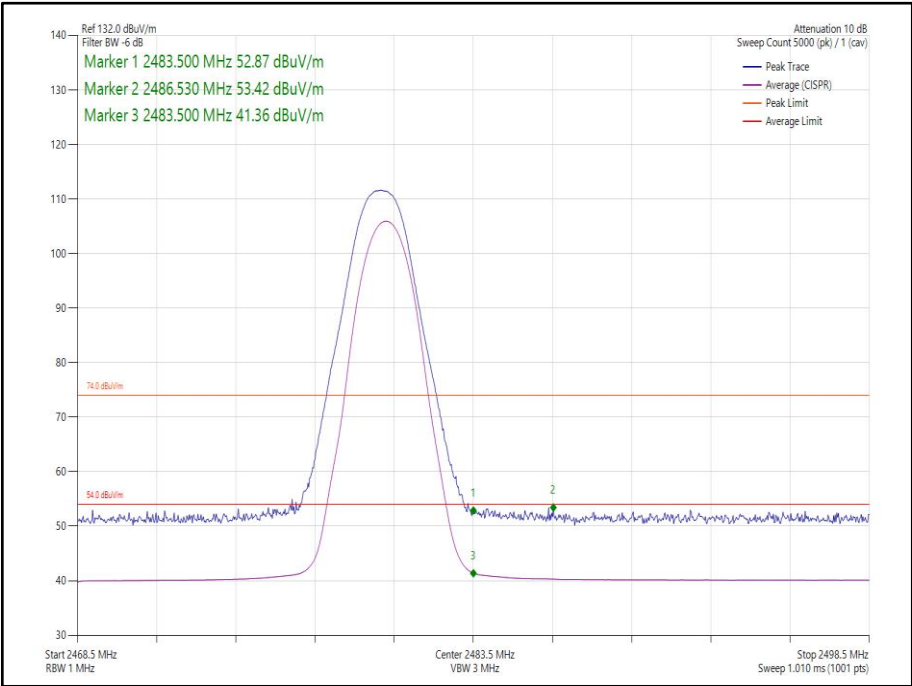



Figure 10 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

## 2.4 GHz Bluetooth (FHSS)

### iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	2	DH5	2402	2390.0	53.67	39.40
Static	$\pi/4$ DQPSK	2	2DH5	2402	2390.0	53.83	39.45
Static	8-DPSK	2	3DH5	2402	2390.0	54.22	39.44
Static	GFSK	2	DH5	2480	2483.5	54.29	40.42
Static	$\pi/4$ DQPSK	2	2DH5	2480	2483.5	53.21	40.68
Static	8-DPSK	2	3DH5	2480	2483.5	53.09	40.76

**Table 9 - Restricted Band Edge Results**

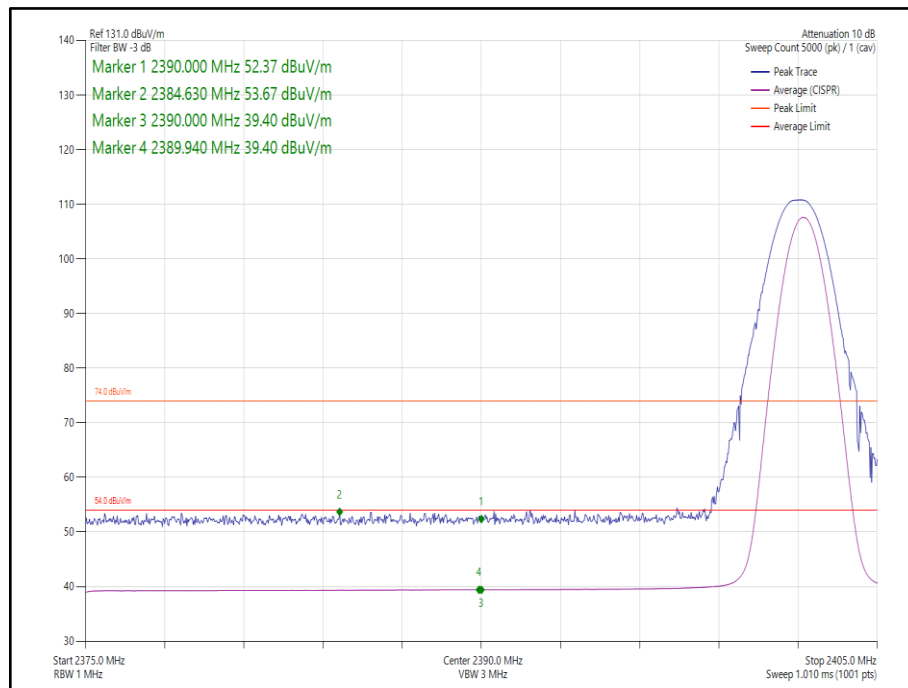

**Figure 11 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz**



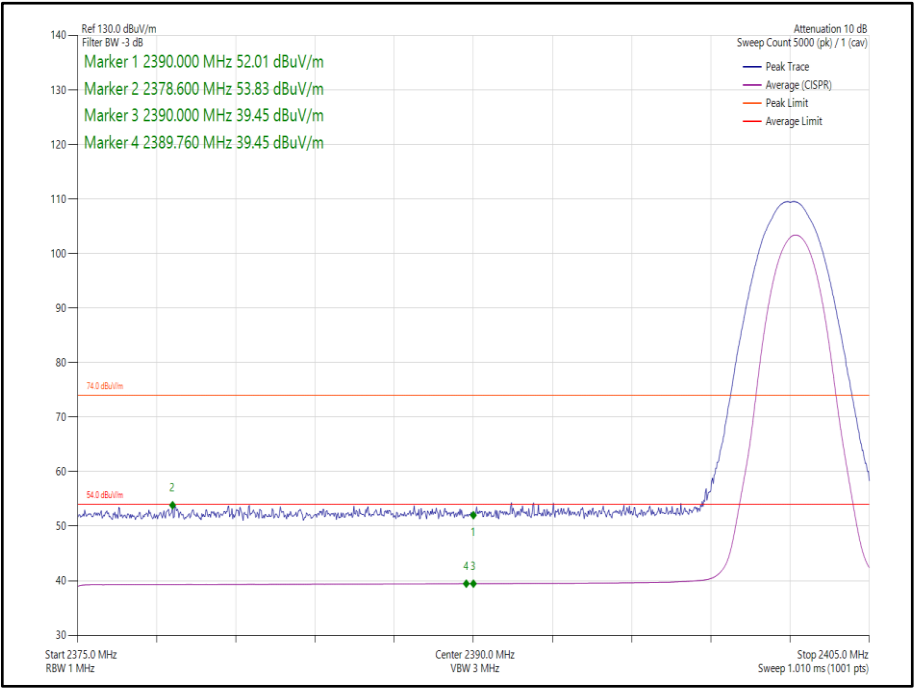


Figure 12 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

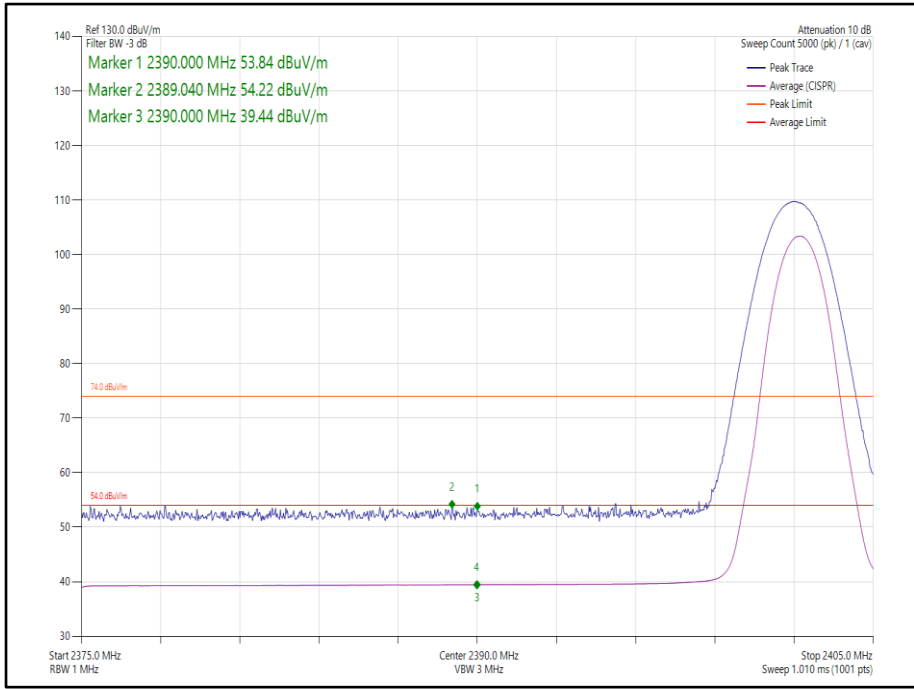


Figure 13 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

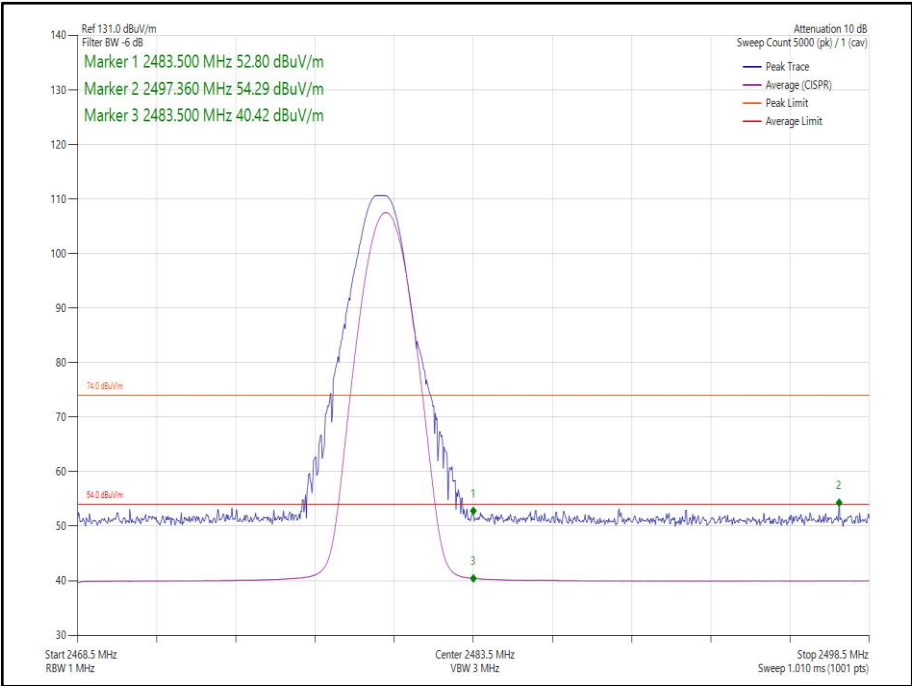


Figure 14 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

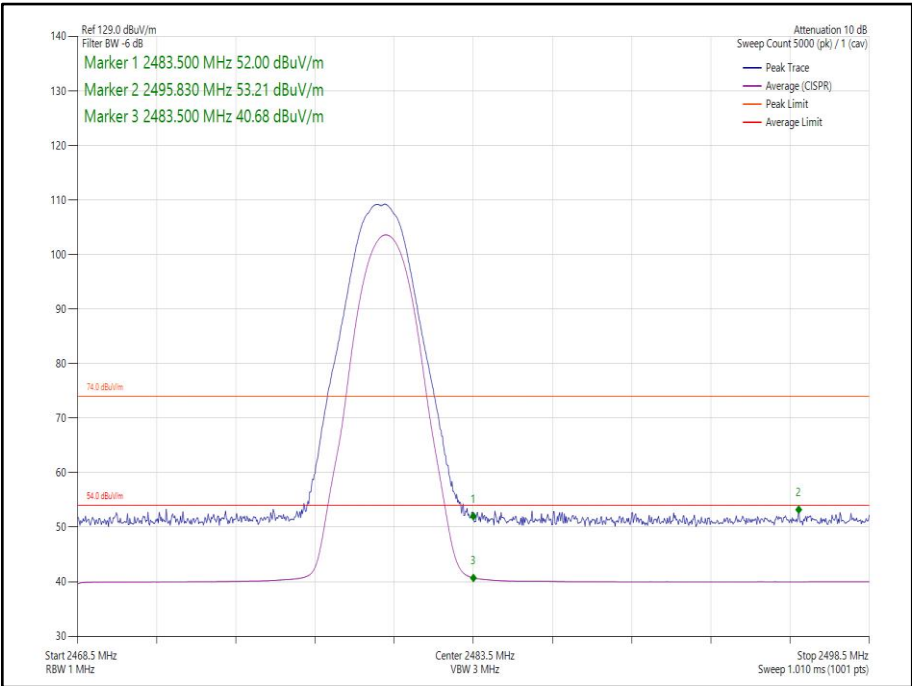


Figure 15 - Static -  $\pi/4$  DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

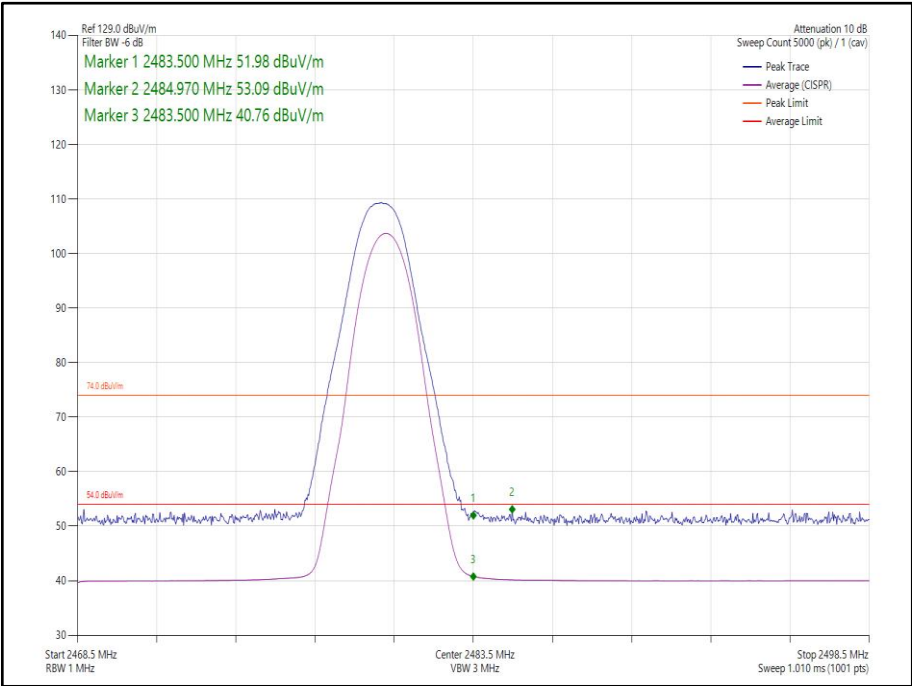



Figure 16 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

## 2.4 GHz Bluetooth (FHSS)

### iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	0-1	DH5	2402	2390.0	54.46	39.39
Static	$\pi/4$ DQPSK	0-1	2DH5	2402	2390.0	54.27	39.41
Static	8-DPSK	0-1	3DH5	2402	2390.0	54.10	39.42
Static	GFSK	0-1	DH5	2480	2483.5	53.13	40.34
Static	$\pi/4$ DQPSK	0-1	2DH5	2480	2483.5	53.72	40.93
Static	8-DPSK	0-1	3DH5	2480	2483.5	53.29	40.93

**Table 10 - Restricted Band Edge Results**

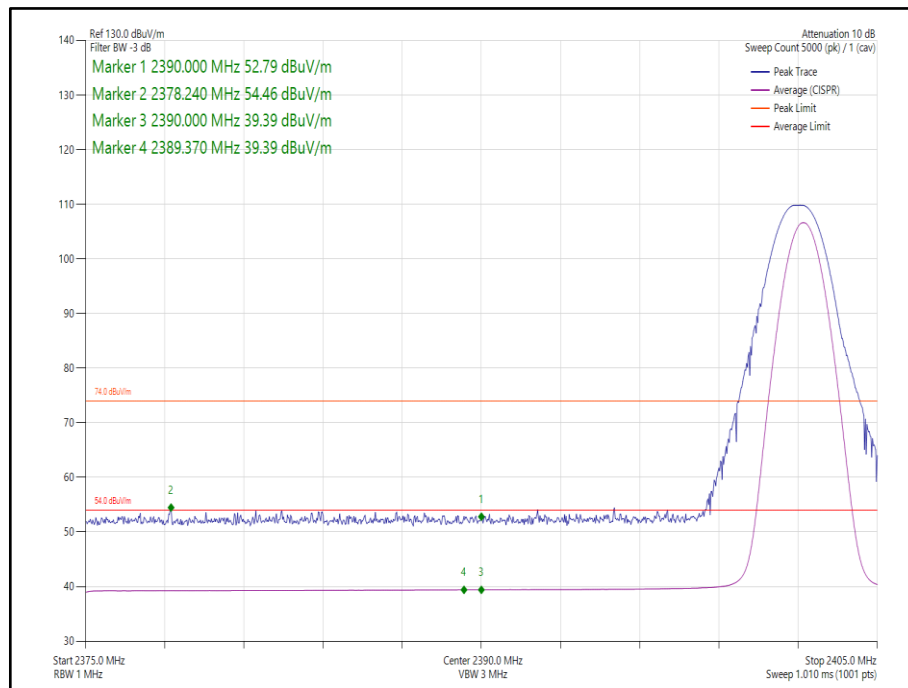

**Figure 17 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz**

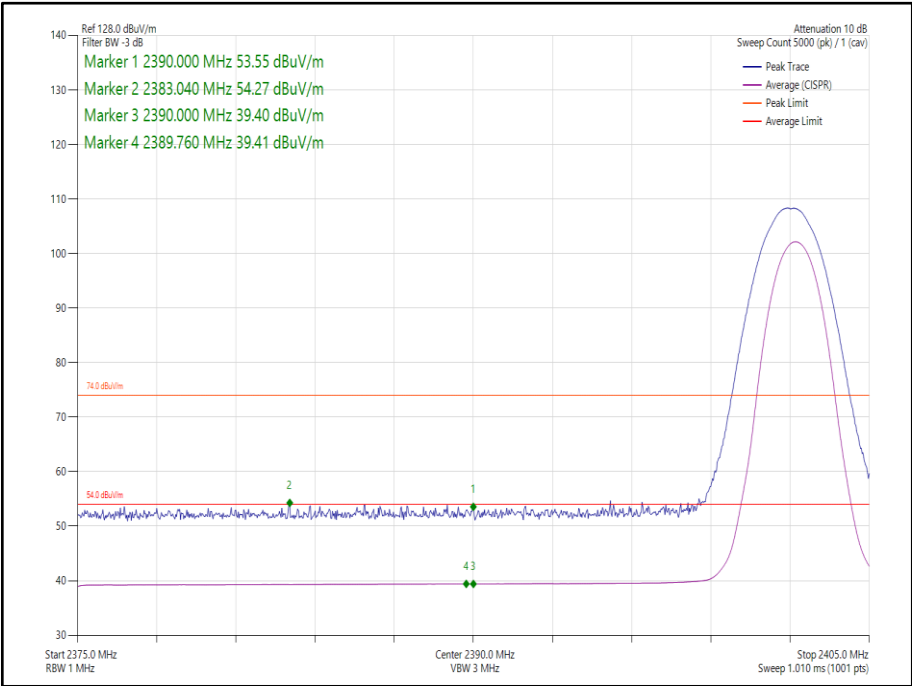


Figure 18 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

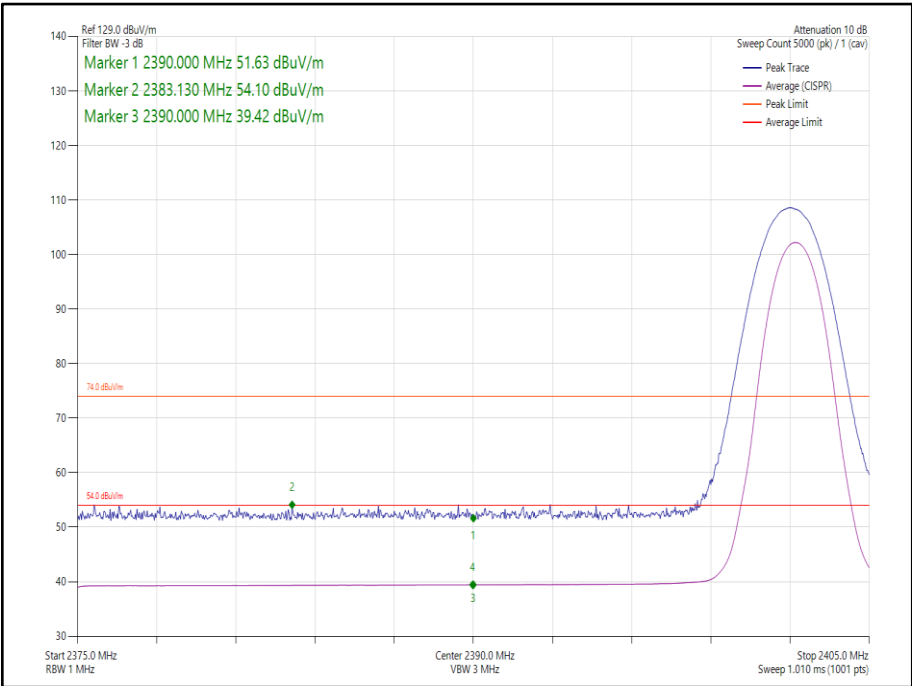


Figure 19 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

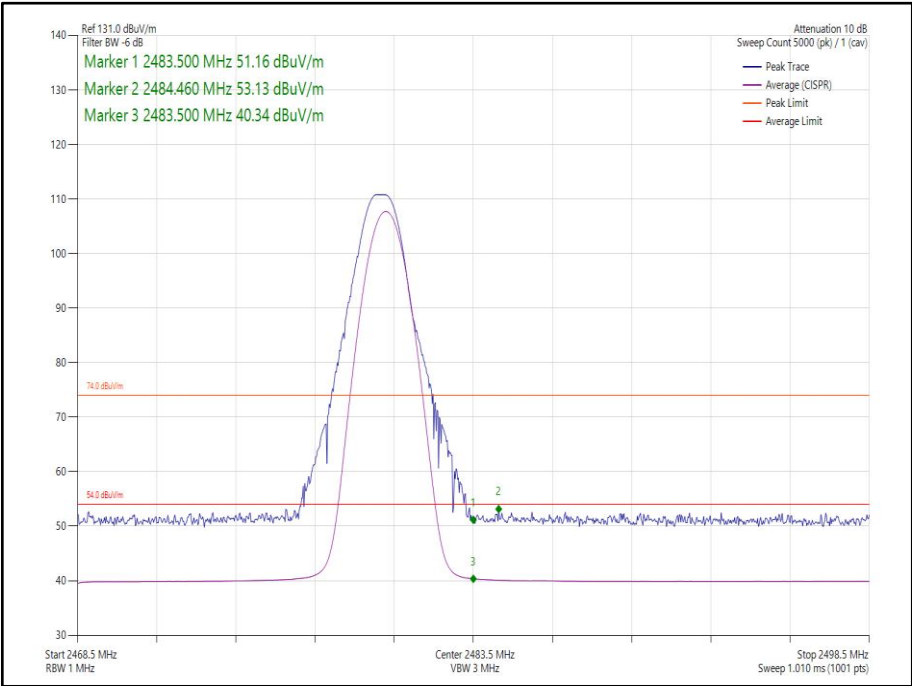


Figure 20 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

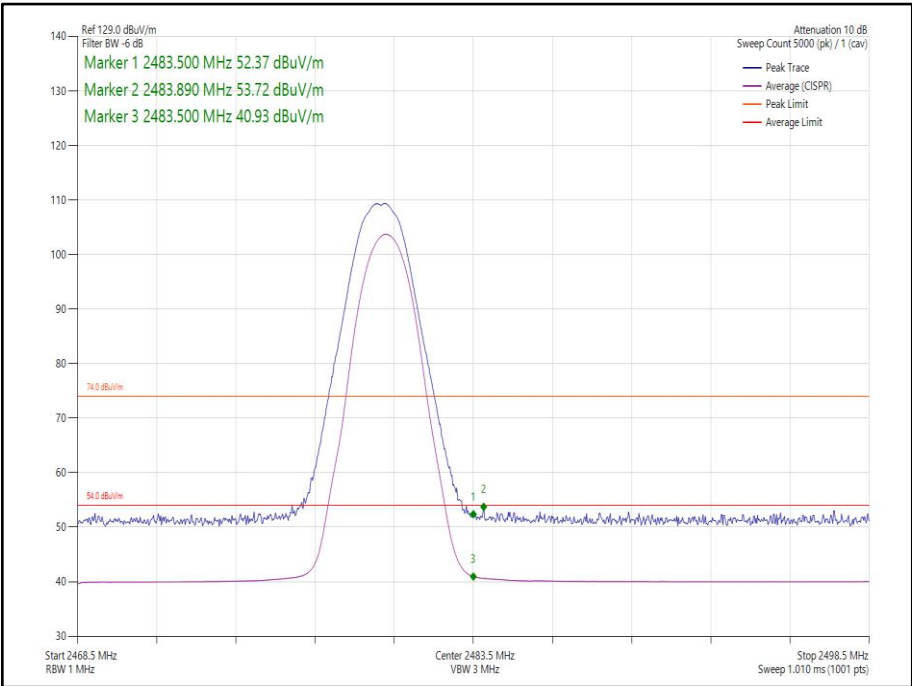


Figure 21 - Static -  $\pi/4$  DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

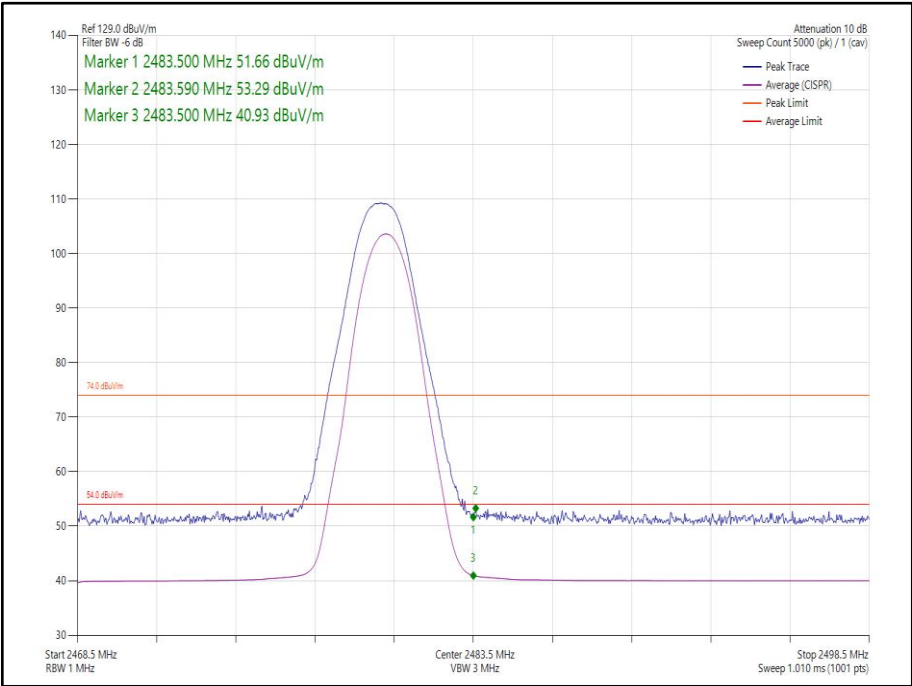



Figure 22 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

## 2.4 GHz Bluetooth (FHSS)

### ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	$\pi/4$ DQPSK	0-1	2DH5	2402	2390.0	57.77	42.59
Static	8-DPSK	0-1	3DH5	2402	2390.0	56.50	41.76
Static	$\pi/4$ DQPSK	0-1	2DH5	2480	2483.5	61.95	48.15
Static	8-DPSK	0-1	3DH5	2480	2483.5	62.03	47.49

**Table 11 - Restricted Band Edge Results**

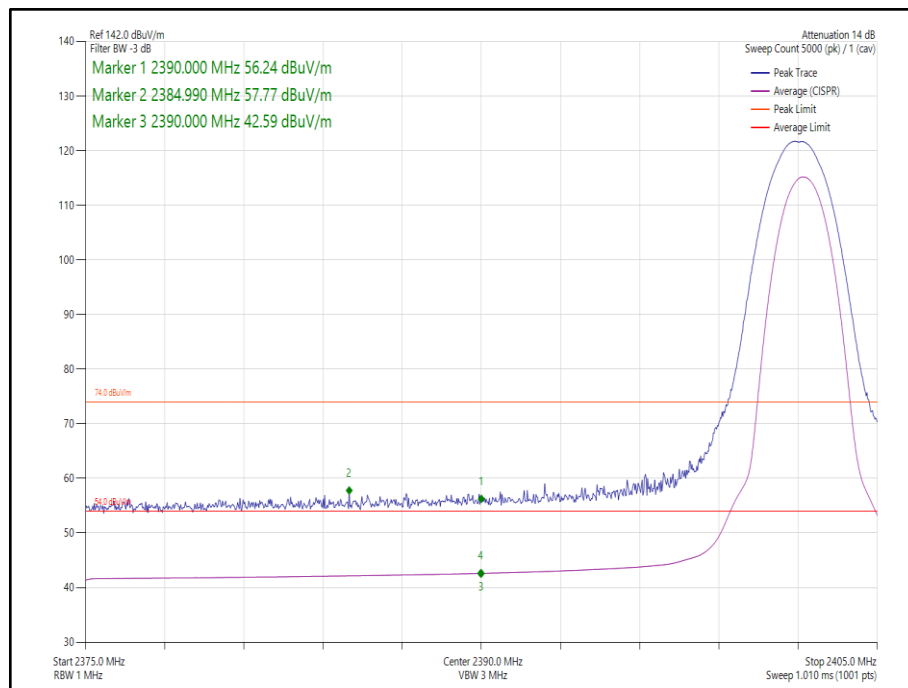

**Figure 23 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz**



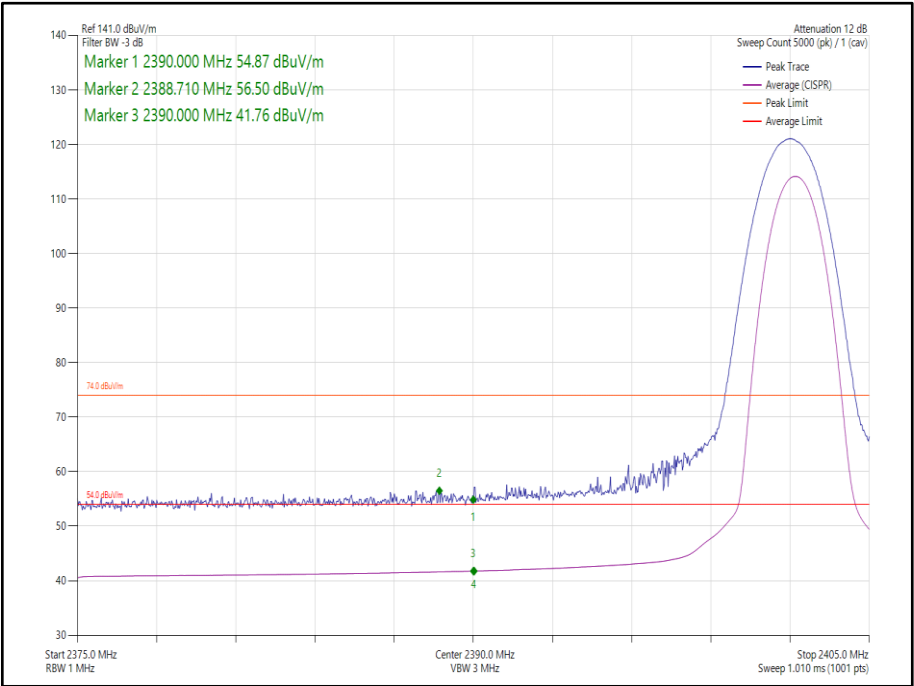


Figure 24 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

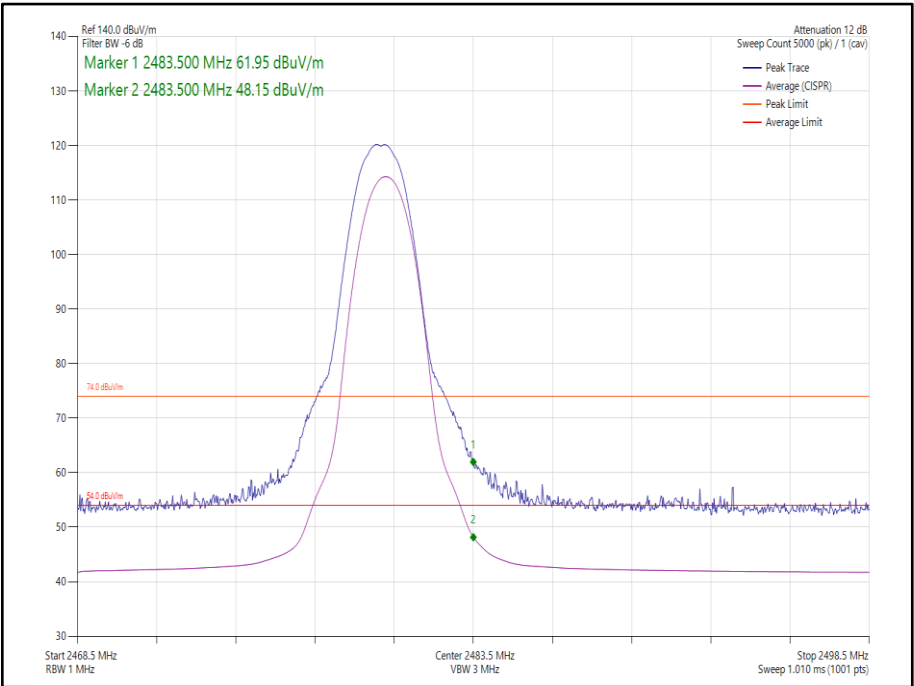


Figure 25 - Static -  $\pi/4$  DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

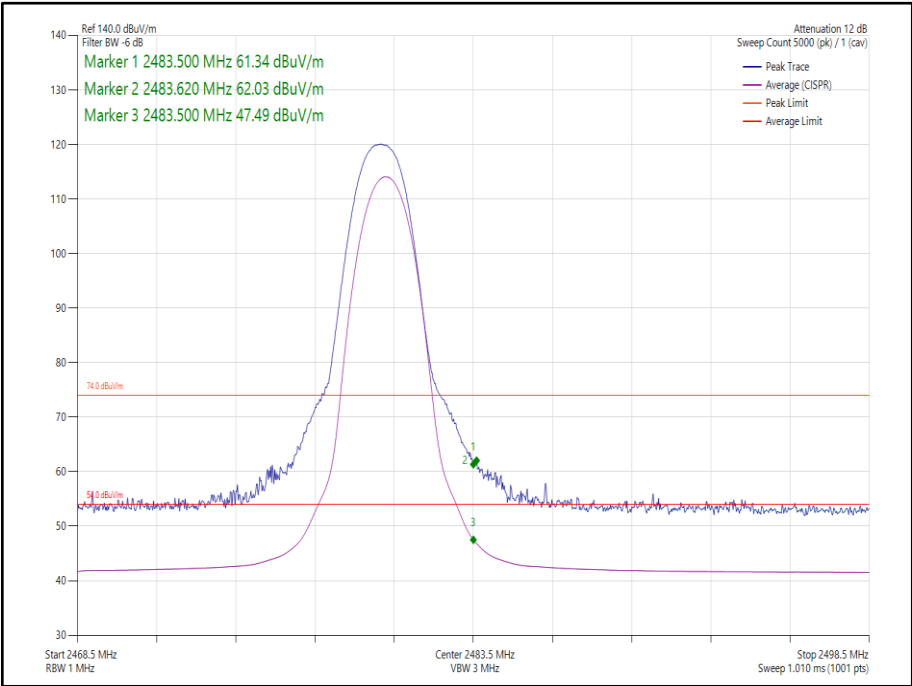


Figure 26 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 12

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 13

\*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



### 2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	17-May-2023
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	24-Nov-2024
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	5215	12	28-May-2023
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	12-Apr-2023
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2023
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB 40	5604	12	22-Sep-2022

**Table 14**

TU - Traceability Unscheduled



## **2.2 Frequency Hopping Systems - Average Time of Occupancy**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)  
ISED RSS-247, Clause 5.1

### **2.2.2 Equipment Under Test and Modification State**

A2686, S/N: XH696VW7R0 - Modification State 0

### **2.2.3 Date of Test**

25-August-2022 to 31-August-2022

### **2.2.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

### **2.2.5 Environmental Conditions**

Ambient Temperature	21.6 - 22.4 °C
Relative Humidity	51.6 - 58.3 %



## 2.2.6 Test Results

### 2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	115	332.5	400.0

Table 15 - Time of Occupancy Results



Figure 27 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa 8-DPSK (3-DH5)	Duty Cycle (%):	77.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.894	99	286.5	400.0

Table 16 - Time of Occupancy Results

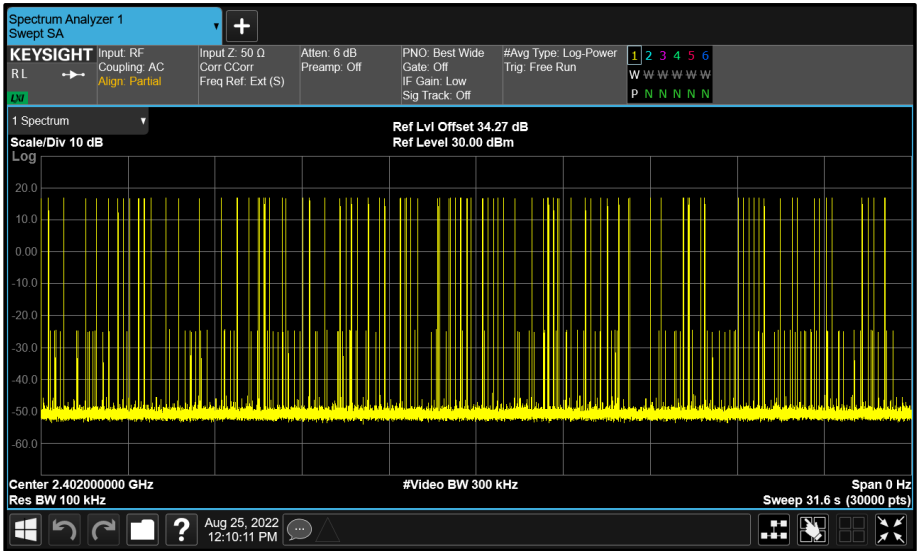


Figure 28 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	103	297.5	400.0

Table 17 - Time of Occupancy Results

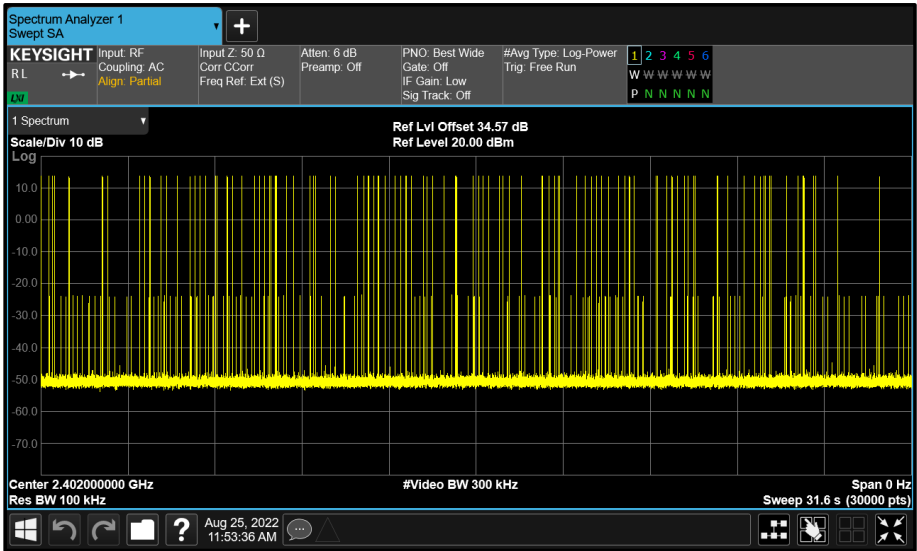


Figure 29 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.891	115	332.5	400.0

Table 18 - Time of Occupancy Results

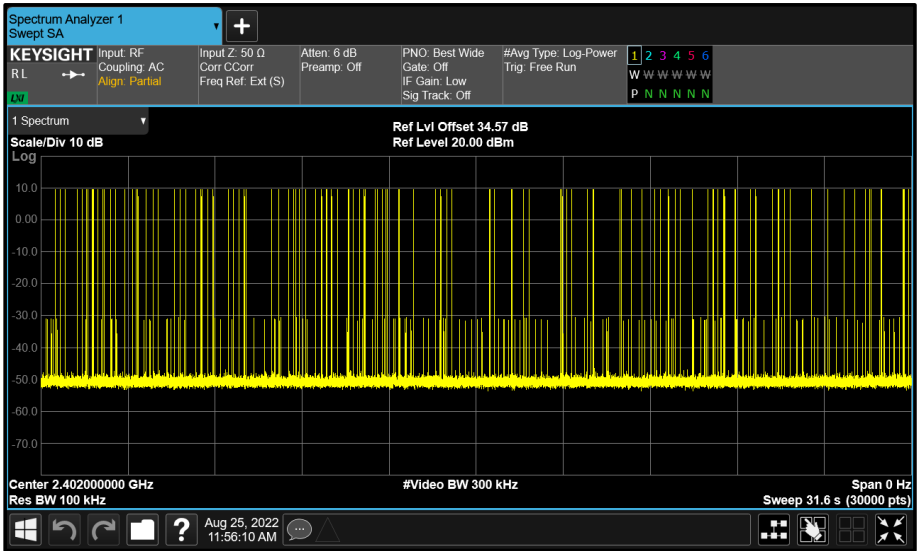


Figure 30 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	77.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	112	324.0	400.0

Table 19 - Time of Occupancy Results

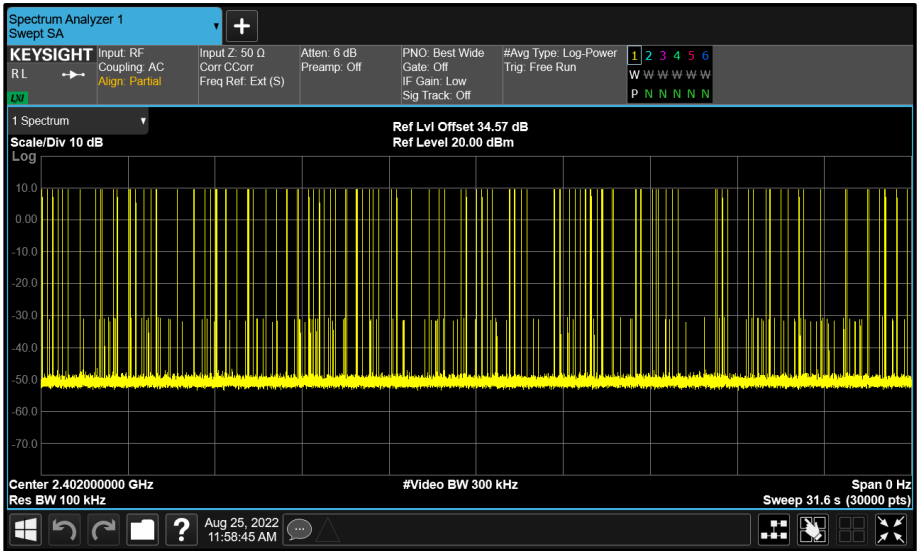


Figure 31 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	102	294.6	400.0

Table 20 - Time of Occupancy Results

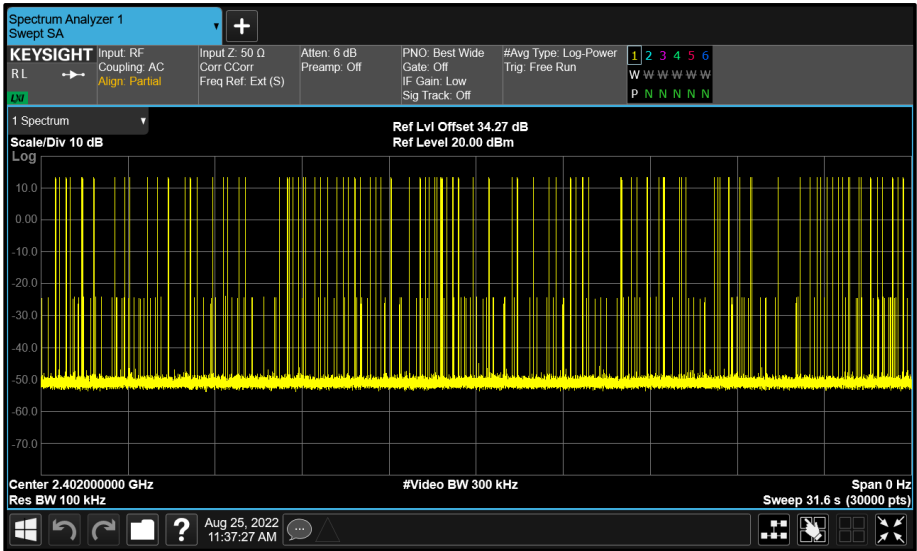


Figure 32 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.891	113	326.7	400.0

Table 21 - Time of Occupancy Results

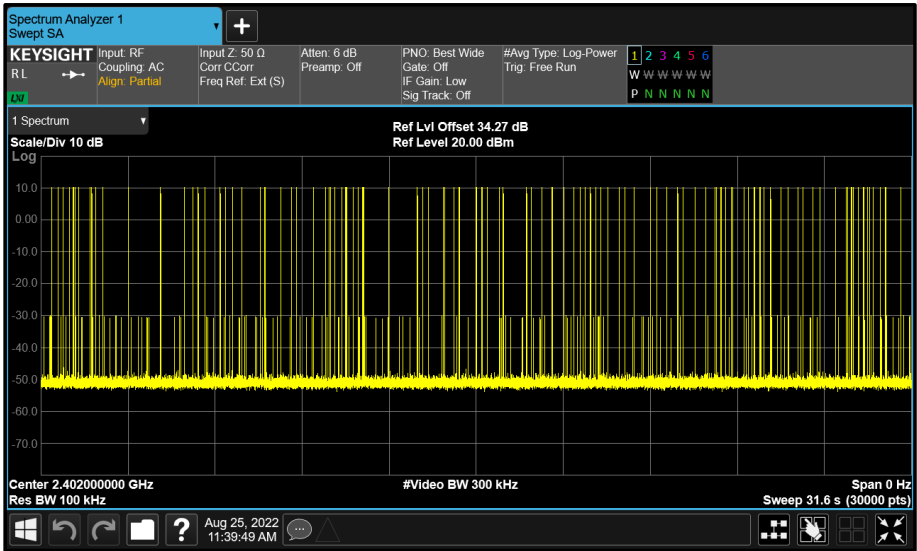


Figure 33 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	112	324.0	400.0

Table 22 - Time of Occupancy Results

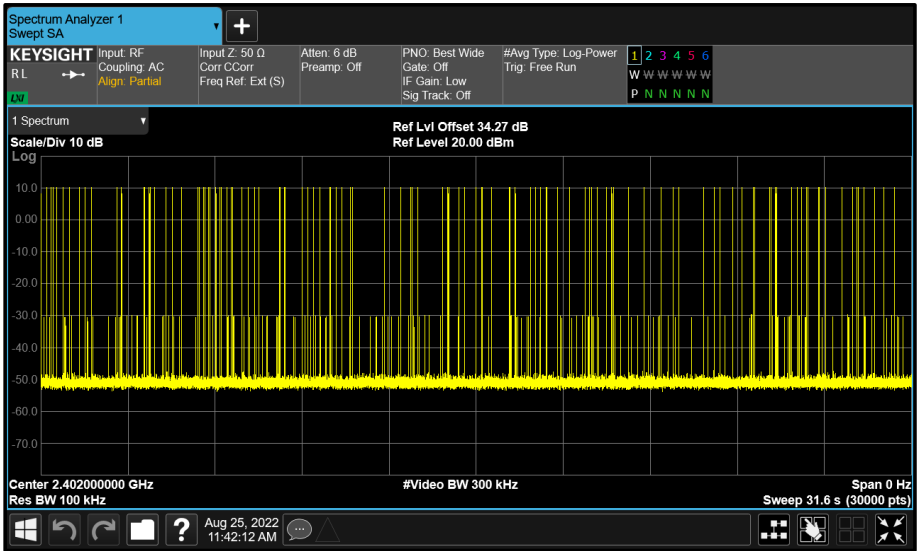


Figure 34 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	52.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	1.981	110	218.0	400.0

Table 23 - Time of Occupancy Results

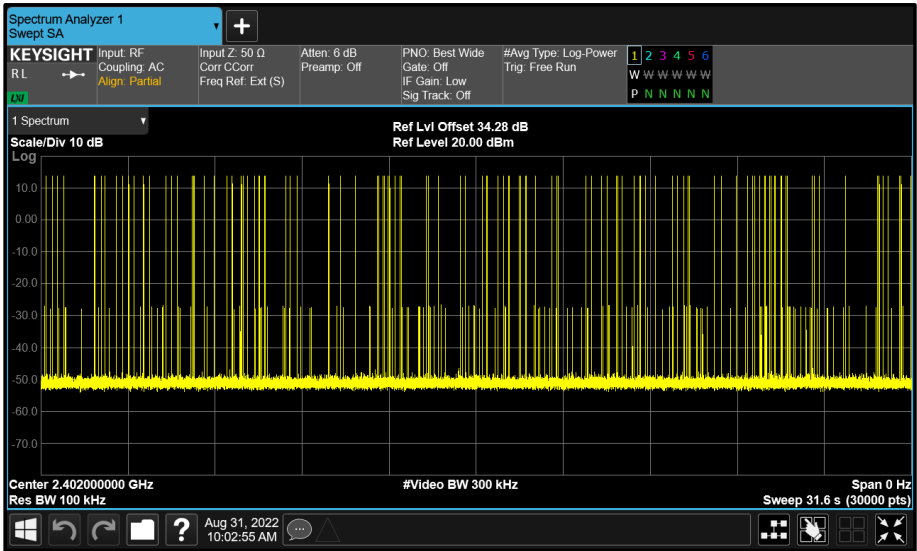


Figure 35 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	105	303.8	400.0

Table 24 - Time of Occupancy Results

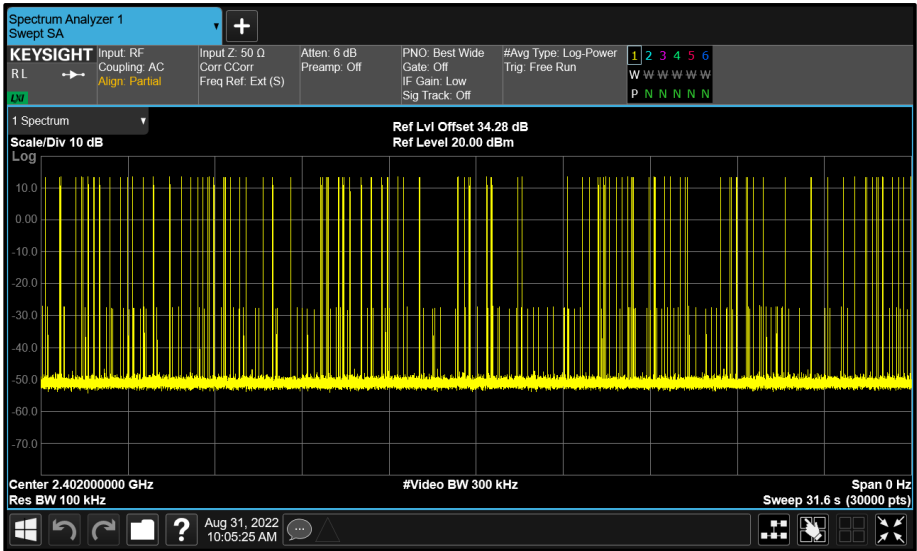


Figure 36 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	106	306.1	400.0

Table 25 - Time of Occupancy Results

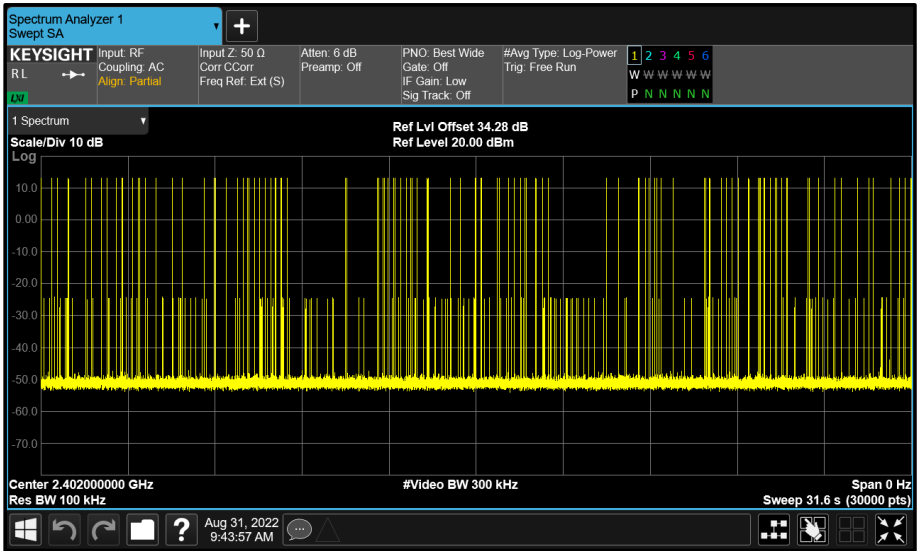


Figure 37 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	52.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	1.981	108	214.0	400.0

Table 26 - Time of Occupancy Results

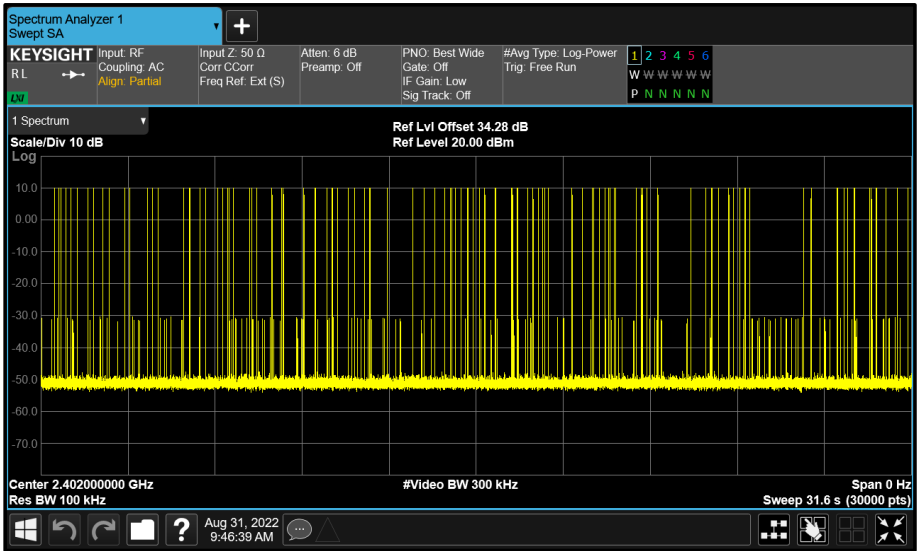


Figure 38 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	96	277.7	400.0

Table 27 - Time of Occupancy Results

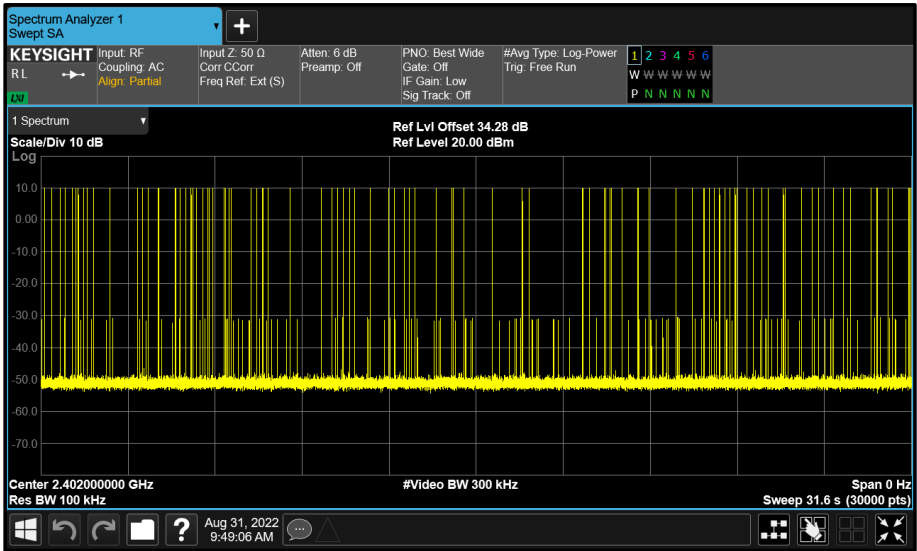


Figure 39 - 8-DPSK - 2402 MHz Accumulated Transmit Time



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Industry Canada RSS-247, Limit Clause 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

**2.2.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	21-Mar-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	06-Apr-2023

**Table 28**

O/P Mon – Output Monitored using calibrated equipment



## **2.3 Frequency Hopping Systems - Channel Separation**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)  
ISED RSS-247, Clause 5.1

### **2.3.2 Equipment Under Test and Modification State**

A2686, S/N: XH696VW7R0 - Modification State 0

### **2.3.3 Date of Test**

25-August-2022 to 31-August-2022

### **2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

### **2.3.5 Environmental Conditions**

Ambient Temperature	21.6 - 22.4 °C
Relative Humidity	51.6 - 58.3 %



2.3.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.353	2440.991	2441.990	0.999	$\geq 901.9$

Table 29 - Carrier Frequency Separation Results

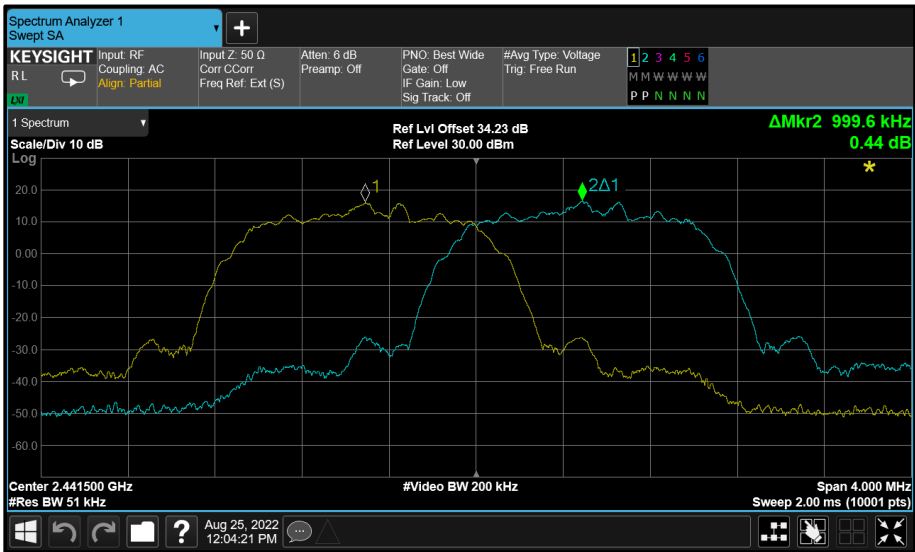


Figure 40 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.320	2440.998	2441.998	1.000	≥880.3

Table 30 - Carrier Frequency Separation Results

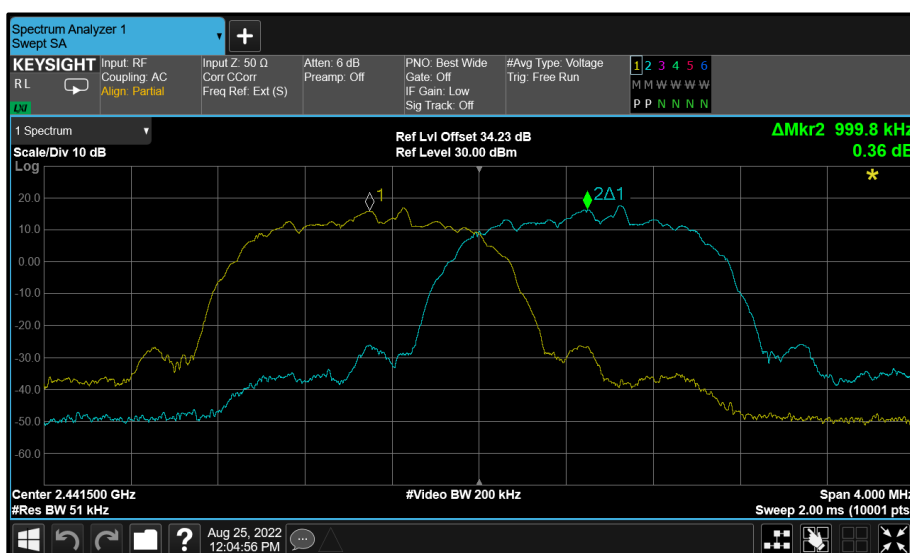


Figure 41 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.927	2441.011	2442.009	0.998	≥618.2

Table 31 - Carrier Frequency Separation Results

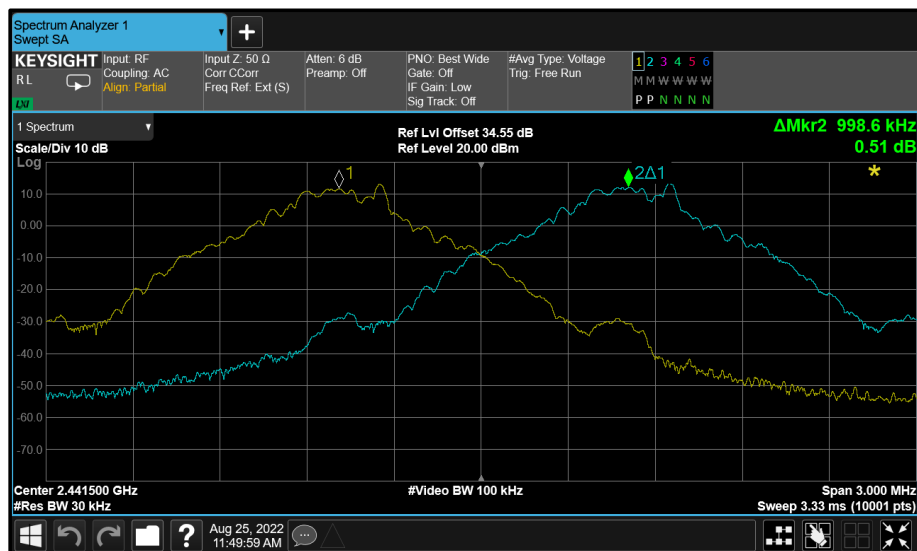


Figure 42 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.346	2440.994	2441.993	0.999	$\geq 897.6$

Table 32 - Carrier Frequency Separation Results

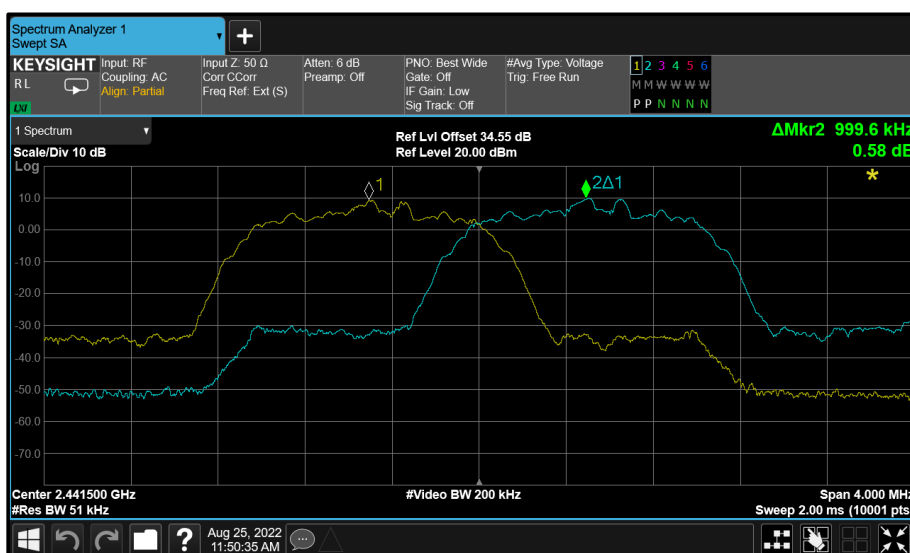


Figure 43 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2441.000	2442.000	1.000	≥881.3

Table 33 - Carrier Frequency Separation Results

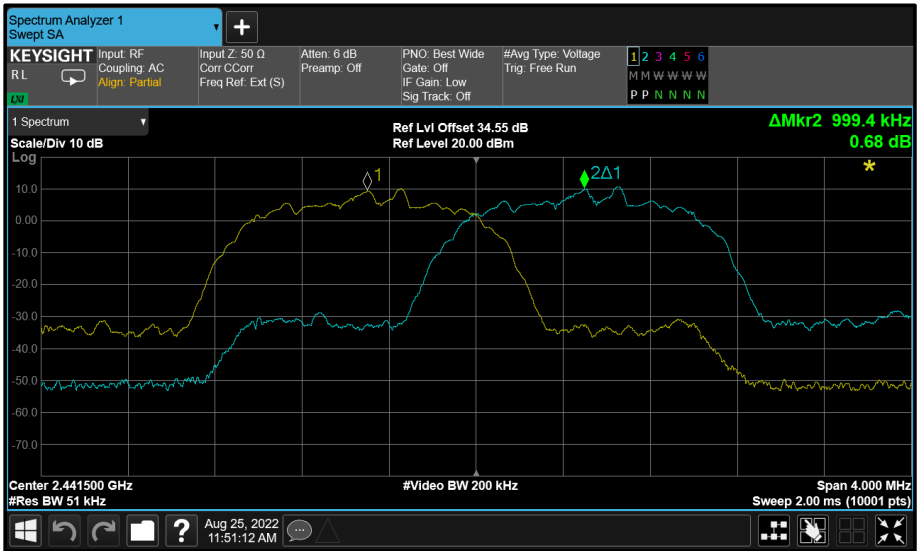


Figure 44 - 8-DPSK - 2441 MHz (CH39)





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.931	2441.012	2442.012	1.000	≥620.4

Table 34 - Carrier Frequency Separation Results



Figure 45 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.353	2440.992	2441.993	1.001	$\geq 901.9$

Table 35 - Carrier Frequency Separation Results

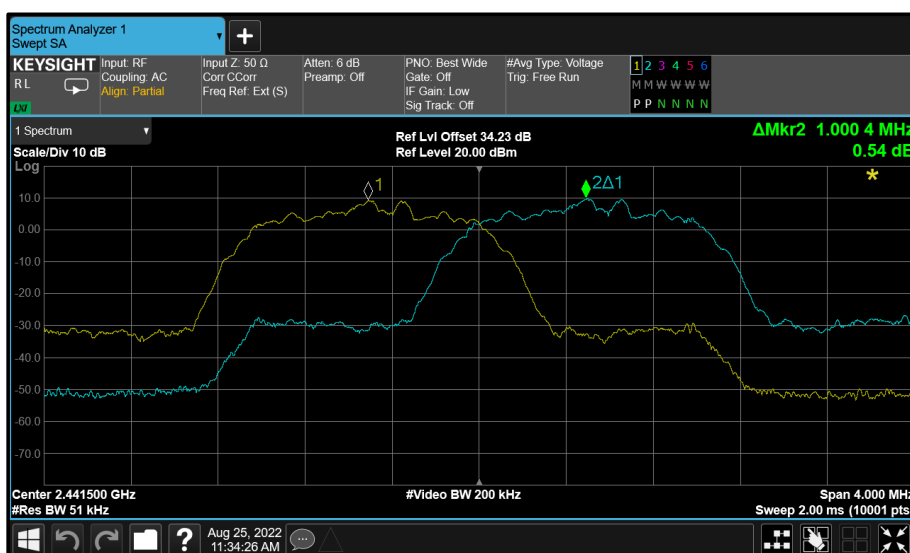


Figure 46 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.323	2441.000	2441.999	0.999	≥882.1

Table 36 - Carrier Frequency Separation Results

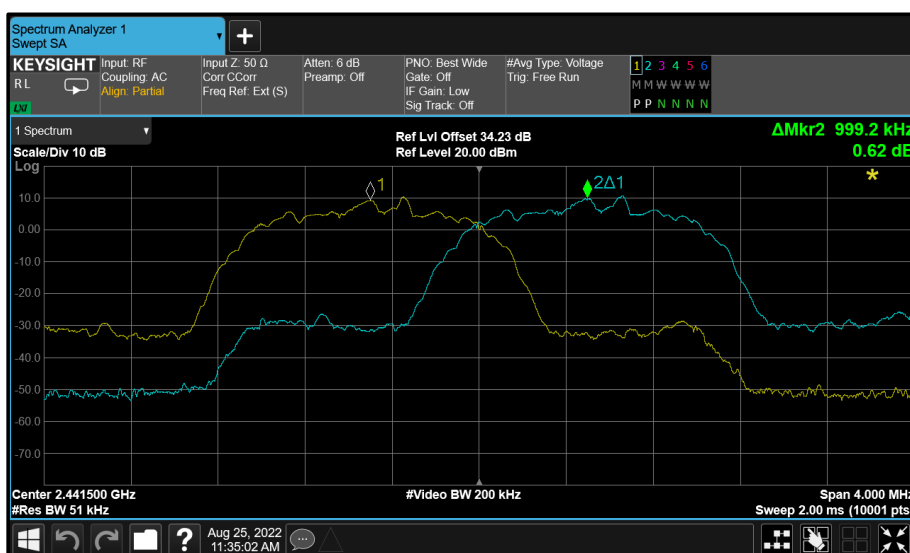


Figure 47 - 8-DPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.350	2440.991	2441.991	1.000	$\geq 900.0$

Table 37 - Carrier Frequency Separation Results



Figure 48 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.327	2440.998	2441.998	1.000	≥884.8

Table 38 - Carrier Frequency Separation Results



Figure 49 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.918	2441.009	2442.010	1.001	≥611.8

Table 39 - Carrier Frequency Separation Results

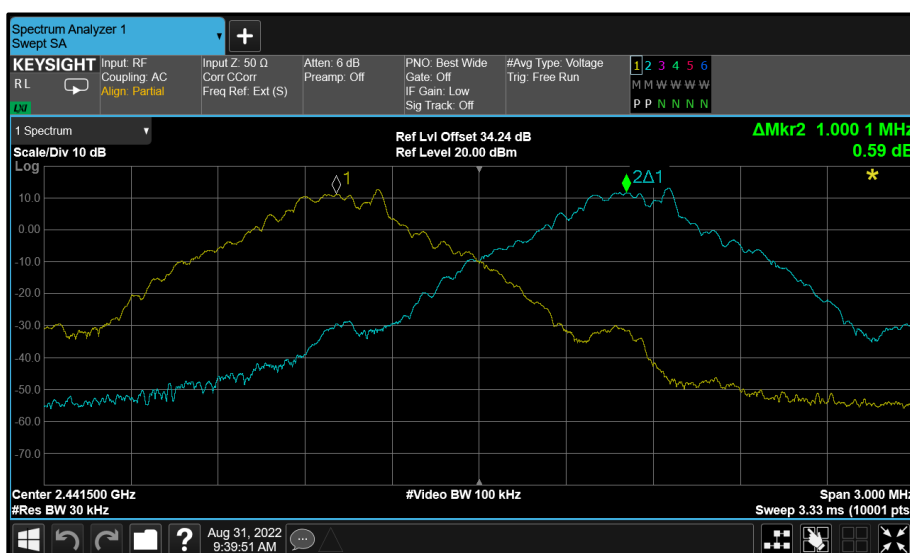


Figure 50 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.353	2440.992	2441.992	1.000	$\geq 901.9$

Table 40 - Carrier Frequency Separation Results

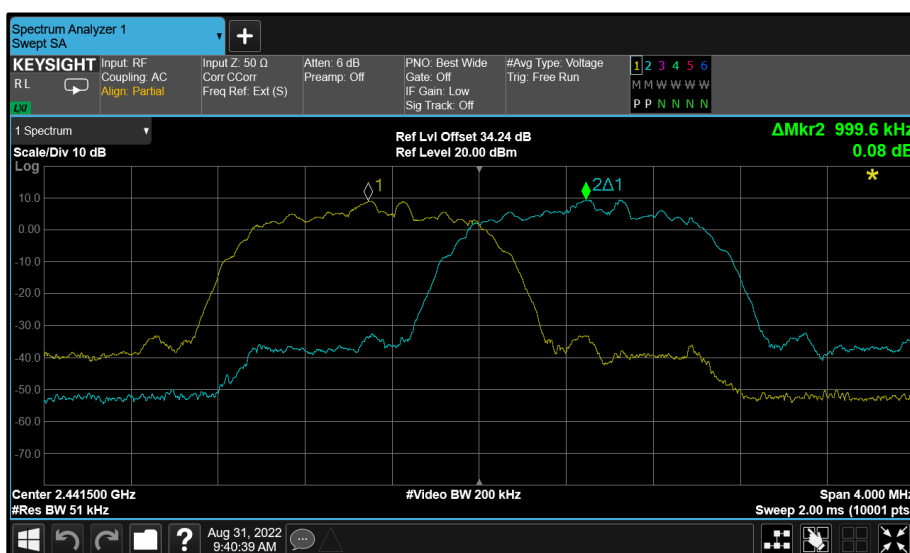


Figure 51 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2441.001	2442.001	1.000	≥881.6

**Table 41 - Carrier Frequency Separation Results**



**Figure 52 - 8-DPSK - 2441 MHz (CH39)**