

FCC TEST REPORT

REPORT NO.: RF940827L02A

MODEL NO.: TEW-603PI

RECEIVED: Aug. 29, 2005

TESTED: Aug. 31 ~ Sep. 06, 2005

ISSUED: Sep. 14, 2005

APPLICANT : TRENDware International Inc.

ADDRESS : 3135 Kashiwa street, Torrance, CA 90505, U.S.A.

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	9
3.4	DESCRIPTION OF SUPPORT UNITS	10
4	TEST TYPES AND RESULTS.....	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS.....	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	21
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS	24
4.2.7	TEST RESULTS	25
4.3	6dB BANDWIDTH MEASUREMENT	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	35
4.3.2	TEST INSTRUMENTS.....	35
4.3.3	TEST PROCEDURE.....	35
4.3.4	DEVIATION FROM TEST STANDARD	35
4.3.5	TEST SETUP	36
4.3.6	EUT OPERATING CONDITIONS	36
4.3.7	TEST RESULTS	37
4.4	MAXIMUM PEAK OUTPUT POWER.....	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45
4.4.2	TEST INSTRUMENTS.....	45
4.4.3	TEST PROCEDURES	46
4.4.4	DEVIATION FROM TEST STANDARD	46
4.4.5	TEST SETUP	46
4.4.6	EUT OPERATING CONDITIONS	46



4.4.7	TEST RESULTS	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURE.....	49
4.5.4	DEVIATION FROM TEST STANDARD	49
4.5.5	TEST SETUP	49
4.5.6	EUT OPERATING CONDITIONS	49
4.5.7	TEST RESULTS	50
4.6	BAND EDGES MEASUREMENT.....	58
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	58
4.6.2	TEST INSTRUMENTS.....	58
4.6.3	TEST PROCEDURE.....	58
4.6.4	DEVIATION FROM TEST STANDARD	58
4.6.5	EUT OPERATING CONDITION.....	58
4.6.6	TEST RESULTS	59
4.7	ANTENNA REQUIREMENT	71
4.7.1	STANDARD APPLICABLE.....	71
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	71
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	72
6	INFORMATION ON THE TESTING LABORATORIES	74



1 CERTIFICATION

PRODUCT: 108Mbps 802.11g MIMO Wireless PCI Adapter

MODEL: TEW-603PI

BRAND: TRENDnet

APPLICANT: TRENDware International Inc.

TESTED: Aug. 31 ~ Sep. 06, 2005

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Rennie Wang , **DATE:** Sep. 14, 2005
Rennie Wang

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Sep. 14, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Sep. 14, 2005
Cody Chang / Deputy Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.55dB at 0.638MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.07dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
	30MHz ~ 200MHz	3.47 dB
Radiated emissions	200MHz ~ 1000MHz	3.62 dB
	1GHz ~ 18GHz	3.64 dB
	18GHz ~ 40GHz	3.62 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	108Mbps 802.11g MIMO Wireless PCI Adapter
MODEL NO.	TEW-603PI
POWER SUPPLY	5Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (*up to 108Mbps for turbo mode)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	63.826mW
ANTENNA TYPE	Dipole antenna with 5dBi & 2dBi gain
DATA CABLE	NA
I/O PORTS	NA

NOTE:

1. There are two antennas. One is with 2.0dBi gain, and the other is 5.0dBi. The antenna with 5.0dBi gain has been found to be the worst, therefore the EUT only tested with this antenna, and presented in the report.
2. The EUT is an 108Mbps 802.11g MIMO Wireless PCI Adapter.
3. Physically, the card provides two RF chains. The chain 0 complete transmit and receive functions. The chain 1 provides one RF input that only operating in receiving condition.
4. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
5. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
6. This EUT is capable of providing data rates of up to 108Mbps in Turbo mode depending upon reception quality.
7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


11 channels are provided to this EUT for normal mode.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

1 channel is provided to this EUT for turbo mode.

Channel	Frequency
6	2437 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

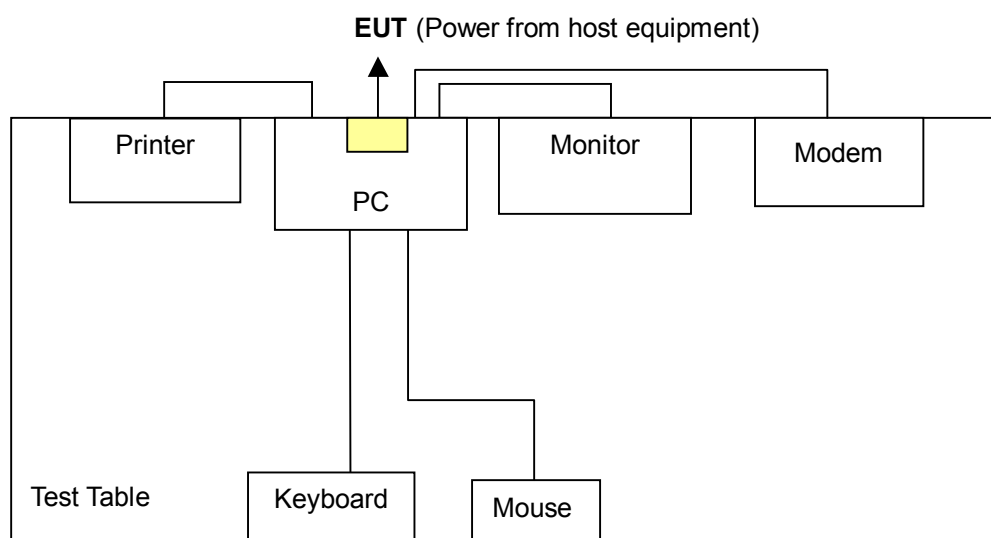

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT Configure Mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

**Antenna Port Conducted Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 108Mbps 802.11g MIMO Wireless PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	MSI	Hetis 865G	380125734	FCC DoC Approved
2	LCD MONITOR	ACER	AL1721	ET.L0408.01040 4001E6PK00	FCC DoC Approved
3	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
4	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414
5	KEYBOARD	HP	SK-1688	C0306114659	GYUR84SK
6	MOUSE	HP	M-S69	M4-010565	INZ211443

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	1.2m shielded cable
4	1.2m shielded cable
5	1.3m shielded cable
6	1.8m shielded cable

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 06, 2005
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 20, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

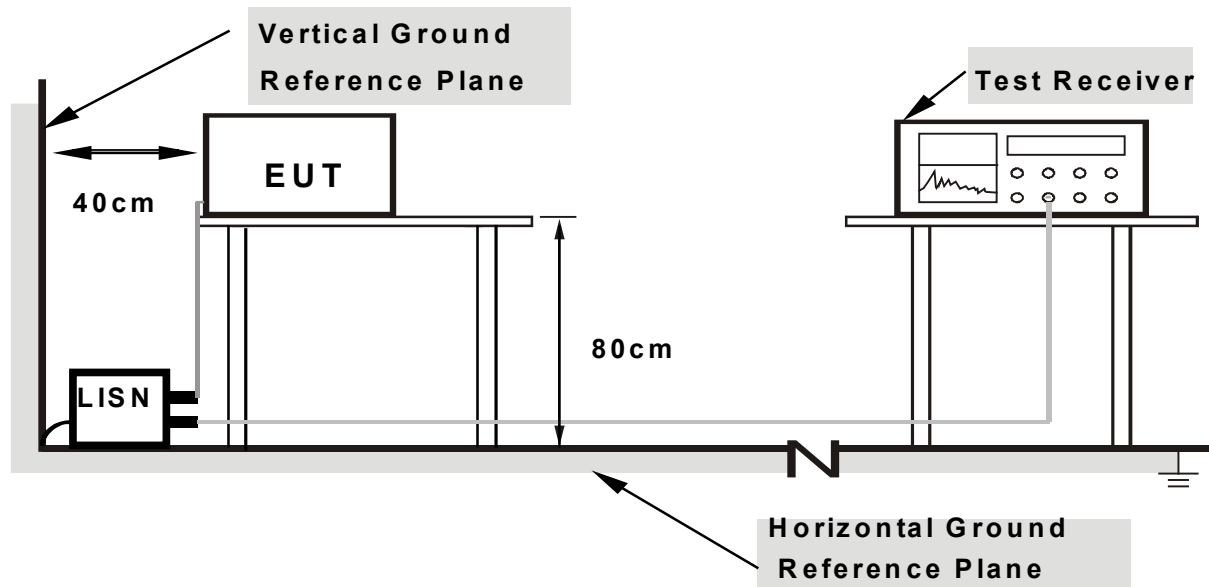

Note: 1.Support units were connected to second LISN.

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT into personal computer system placed on the testing table.
- b. The personal computer system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The personal computer system displayed "H" pattern to monitor and the monitor displayed it on its screen.
- d. The personal computer system sent "H" messages to the printer, and the printer printed them out.
- e. The personal computer system sent "H" messages to the modem.
- f. Step c ~ e were repeated.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	45.11	-	45.22	-	64.08	54.08	-18.86	-
2	0.255	0.11	38.43	-	38.54	-	61.58	51.58	-23.03	-
3	0.447	0.13	36.87	-	37.00	-	56.93	46.93	-19.93	-
4	1.020	0.23	36.00	-	36.23	-	56.00	46.00	-19.77	-
5	3.500	0.28	35.60	-	35.88	-	56.00	46.00	-20.12	-
6	20.488	1.01	30.95	-	31.96	-	60.00	50.00	-28.04	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

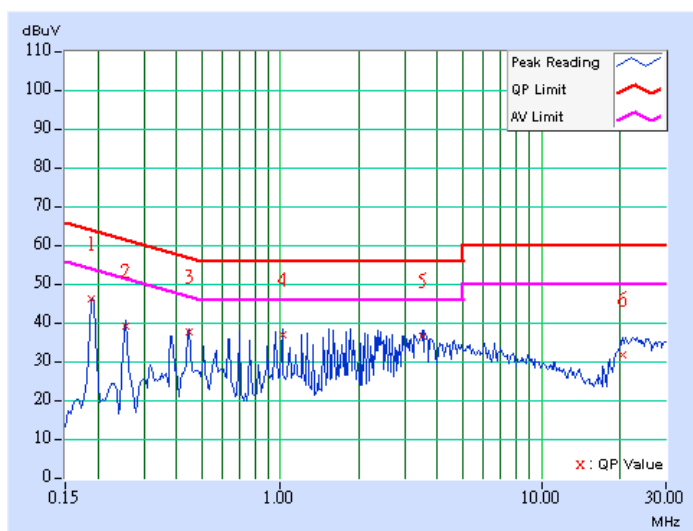

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	43.10	-	43.21	-	64.08	54.08	-20.87	-
2	0.380	0.12	39.65	-	39.77	-	58.27	48.27	-18.50	-
3	0.447	0.13	39.50	-	39.63	-	56.93	46.93	-17.30	-
4	0.638	0.16	39.19	-	39.35	-	56.00	46.00	-16.65	-
5	0.955	0.22	39.16	-	39.38	-	56.00	46.00	-16.62	-
6	20.688	1.01	29.85	-	30.86	-	60.00	50.00	-29.14	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

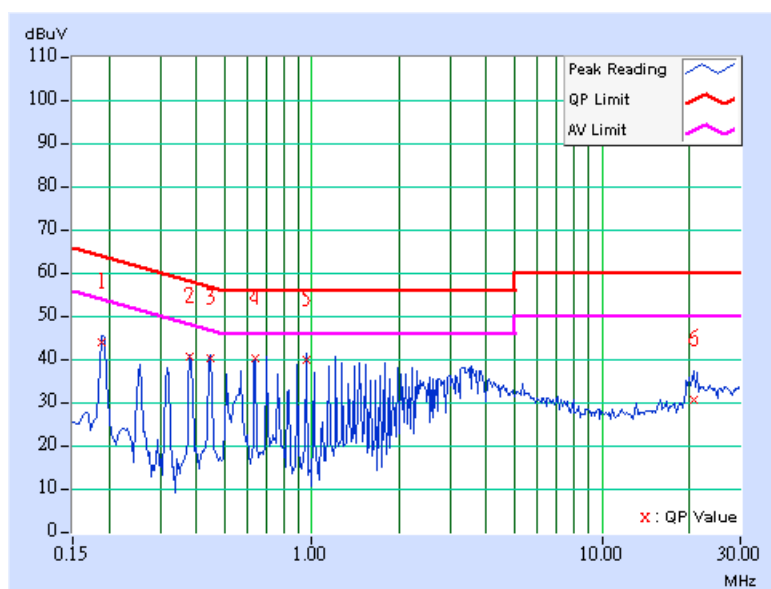

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	45.43	-	45.54	-	63.91	53.91	-18.37	-
2	0.255	0.11	38.59	-	38.70	-	61.58	51.58	-22.87	-
3	0.447	0.13	37.15	-	37.28	-	56.93	46.93	-19.65	-
4	0.955	0.22	36.14	-	36.36	-	56.00	46.00	-19.64	-
5	2.422	0.26	35.39	-	35.65	-	56.00	46.00	-20.35	-
6	21.297	1.07	31.46	-	32.53	-	60.00	50.00	-27.47	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

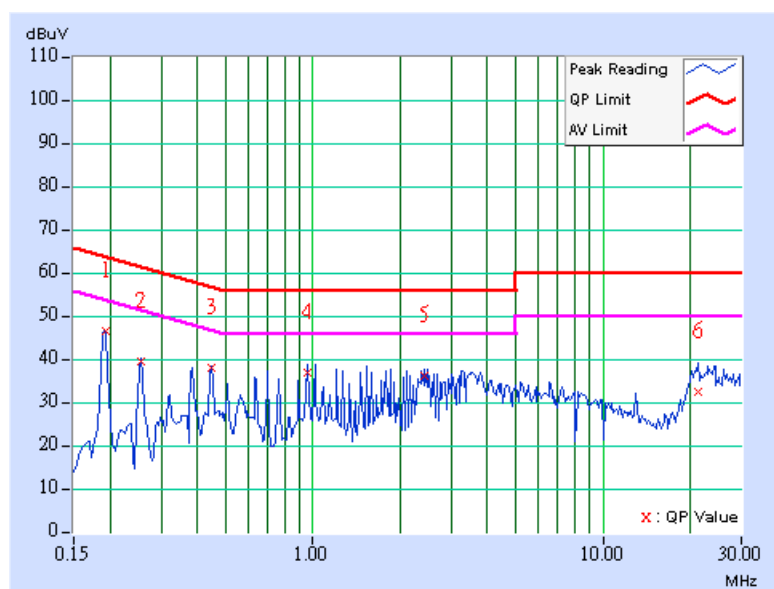

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	43.25	-	43.36	-	63.91	53.91	-20.55	-
2	0.384	0.12	39.47	-	39.59	-	58.18	48.18	-18.60	-
3	0.638	0.16	39.29	-	39.45	-	56.00	46.00	-16.55	-
4	0.955	0.22	38.80	-	39.02	-	56.00	46.00	-16.98	-
5	3.508	0.28	35.71	-	35.99	-	56.00	46.00	-20.01	-
6	20.387	1.00	25.28	-	26.28	-	60.00	50.00	-33.72	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

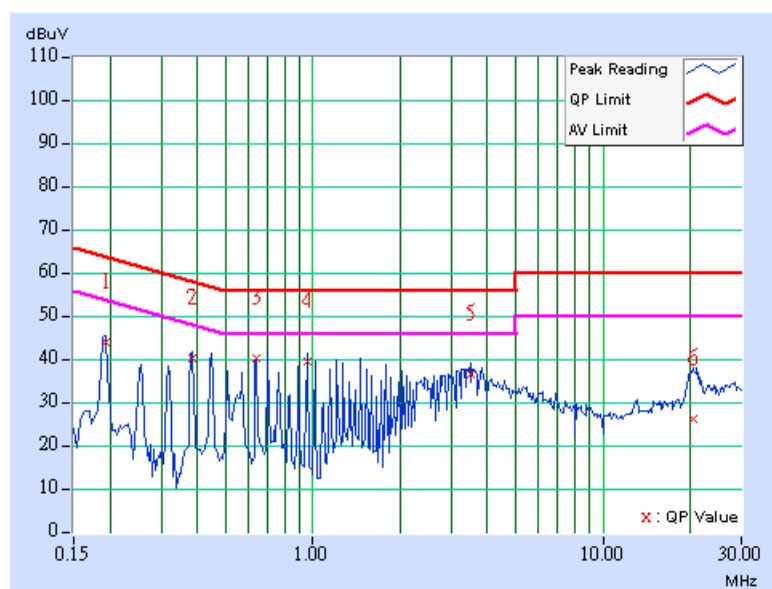

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	45.57	-	45.68	-	63.91	53.91	-18.23	-
2	0.255	0.11	38.67	-	38.78	-	61.58	51.58	-22.79	-
3	0.447	0.13	37.25	-	37.38	-	56.93	46.93	-19.55	-
4	1.531	0.24	37.12	-	37.36	-	56.00	46.00	-18.64	-
5	3.508	0.28	35.41	-	35.69	-	56.00	46.00	-20.31	-
6	23.668	1.22	31.09	-	32.31	-	60.00	50.00	-27.69	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

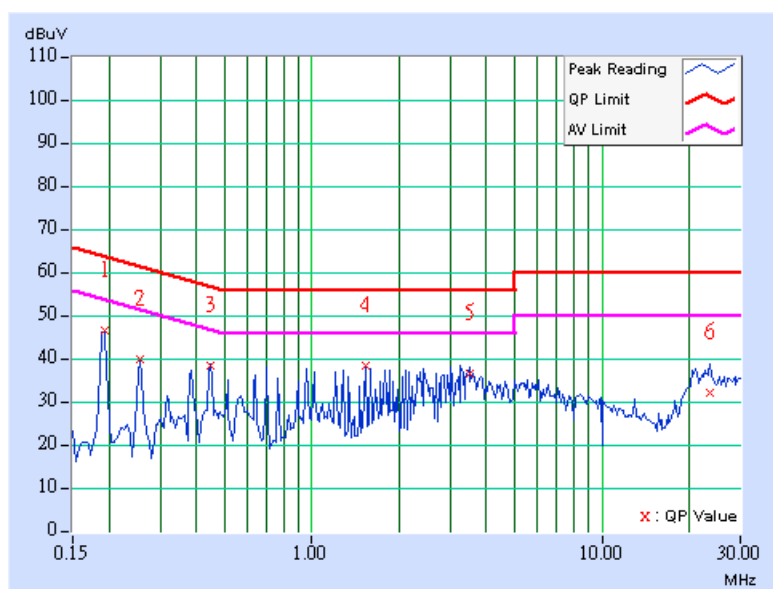

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	43.55	-	43.66	-	63.91	53.91	-20.25	-
2	0.384	0.12	39.89	-	40.01	-	58.18	48.18	-18.18	-
3	0.892	0.21	38.35	-	38.56	-	56.00	46.00	-17.44	-
4	3.508	0.28	35.19	-	35.47	-	56.00	46.00	-20.53	-
5	5.363	0.35	30.44	-	30.79	-	60.00	50.00	-29.21	-
6	21.120	1.03	27.52	-	28.55	-	60.00	50.00	-31.45	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

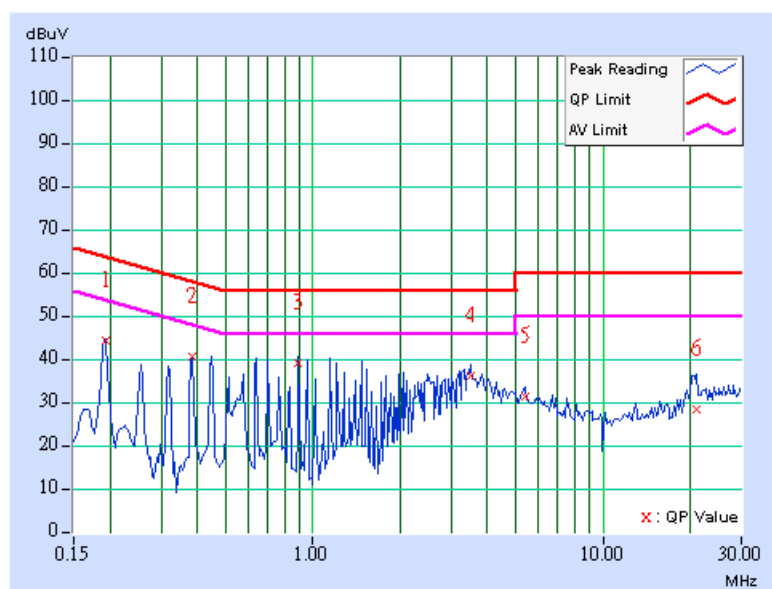

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 07, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10631	Nov. 17, 2005
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

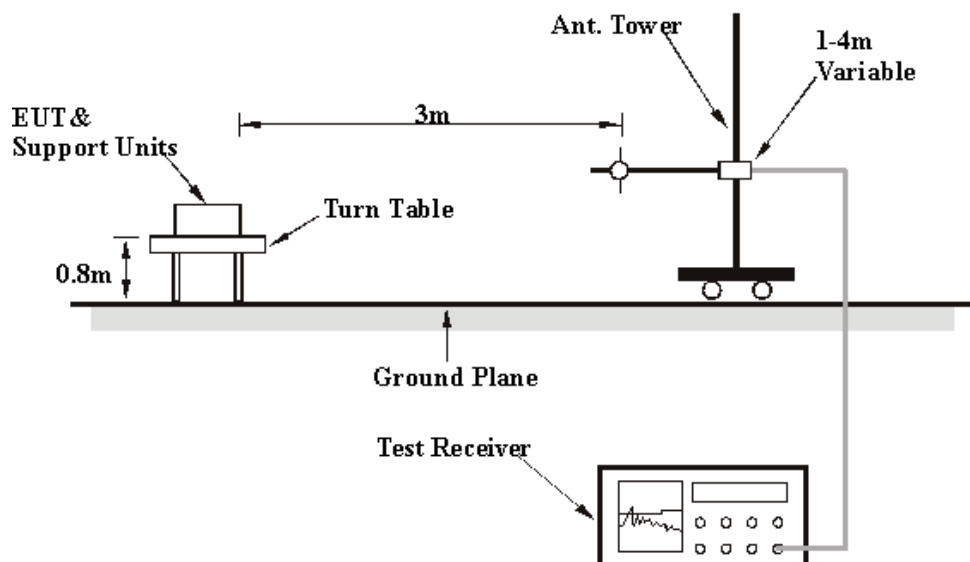

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	276.87	30.10 QP	46.00	-15.90	1.25 H	292	16.14	13.96
2	368.24	34.43 QP	46.00	-11.57	1.00 H	139	18.47	15.96
3	453.77	31.44 QP	46.00	-14.56	2.50 H	70	13.40	18.04
4	496.53	42.62 QP	46.00	-3.38	1.50 H	337	24.09	18.53
5	552.91	30.14 QP	46.00	-15.86	1.75 H	145	10.60	19.54
6	920.30	34.09 QP	46.00	-11.91	1.50 H	91	9.07	25.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.27	28.90 QP	40.00	-11.10	2.50 V	70	14.82	14.08
2	278.82	29.55 QP	46.00	-16.45	1.50 V	337	15.50	14.05
3	368.24	33.69 QP	46.00	-12.31	1.00 V	331	17.73	15.96
4	496.53	39.45 QP	46.00	-6.55	1.75 V	358	20.92	18.53
5	875.59	32.34 QP	46.00	-13.66	1.25 V	148	7.97	24.37
6	920.30	36.92 QP	46.00	-9.08	1.50 V	58	11.90	25.02

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

**802.11b DSSS modulation**

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	42.23 PK	87.98	-45.75	1.01 H	44	13.89	28.34
2	2390.00	49.48 PK	74.00	-24.52	1.13 H	44	17.61	31.87
3	*2412.00	107.98 PK			1.13 H	44	76.02	31.96
3	*2412.00	99.67 AV			1.13 H	44	67.71	31.96
4	2688.00	65.62 PK	87.98	-22.36	1.06 H	58	32.77	32.85
4	2688.00	62.18 AV	79.67	-17.49	1.06 H	58	29.33	32.85
5	4824.00	55.95 PK	74.00	-18.05	1.02 H	333	18.12	37.83
5	4824.00	41.29 AV	54.00	-12.71	1.02 H	333	3.46	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	44.29 PK	96.79	-52.50	1.03 V	27	15.95	28.34
2	2390.00	58.29 PK	74.00	-15.71	1.00 V	328	26.42	31.87
2	2390.00	49.99 AV	54.00	-4.01	1.00 V	328	18.12	31.87
3	*2412.00	116.79 PK			1.00 V	328	84.83	31.96
3	*2412.00	108.49 AV			1.00 V	328	76.53	31.96
4	2688.00	69.85 PK	96.79	-26.94	1.01 V	356	37.00	32.85
4	2688.00	67.51 AV	88.49	-20.98	1.01 V	356	34.66	32.85
5	4824.00	60.24 PK	74.00	-13.76	1.14 V	26	22.41	37.83
5	4824.00	45.32 AV	54.00	-8.68	1.14 V	26	7.49	37.83

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	42.54 PK	88.36	-45.82	1.06 H	208	14.20	28.34
2	*2437.00	108.36 PK			1.11 H	52	76.30	32.06
2	*2437.00	100.01 AV			1.11 H	52	67.95	32.06
3	2688.00	65.19 PK	88.36	-23.17	1.03 H	64	32.34	32.85
3	2688.00	61.77 AV	80.01	-18.24	1.03 H	64	28.92	32.85
4	4874.00	55.87 PK	74.00	-18.13	1.00 H	329	17.89	37.98
4	4874.00	41.11 AV	54.00	-12.89	1.00 H	329	3.13	37.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	44.61 PK	97.18	-52.57	1.06 V	39	16.27	28.34
2	*2437.00	117.18 PK			1.01 V	329	85.12	32.06
2	*2437.00	108.87 AV			1.01 V	329	76.81	32.06
3	2688.00	69.75 PK	97.18	-27.43	1.06 V	321	36.90	32.85
3	2688.00	67.38 AV	88.87	-21.49	1.06 V	321	34.53	32.85
4	4874.00	60.15 PK	74.00	-13.85	1.16 V	30	22.17	37.98
4	4874.00	45.21 AV	54.00	-8.79	1.16 V	30	7.23	37.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	44.79 PK	88.95	-44.16	1.06 H	38	16.45	28.34
2	*2462.00	108.95 PK			1.15 H	59	76.79	32.16
2	*2462.00	100.62 AV			1.15 H	59	68.46	32.16
3	2483.50	48.99 PK	74.00	-25.01	1.15 H	59	16.75	32.24
4	2688.00	65.78 PK	88.95	-23.17	1.07 H	68	32.93	32.85
4	2688.00	62.36 AV	80.62	-18.26	1.07 H	68	29.51	32.85
5	4924.00	56.14 PK	74.00	-17.86	1.03 H	357	18.00	38.14
5	4924.00	41.87 AV	54.00	-12.13	1.03 H	357	3.73	38.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	44.56 PK	97.60	-53.04	1.01 V	29	16.22	28.34
2	*2462.00	117.60 PK			1.00 V	328	85.44	32.16
2	*2462.00	109.17 AV			1.00 V	328	77.01	32.16
3	2483.50	57.64 PK	74.00	-16.36	1.00 V	328	25.40	32.24
3	2483.50	49.21 AV	54.00	-4.79	1.00 V	328	16.97	32.24
4	2688.00	69.79 PK	97.60	-27.81	1.00 V	343	36.94	32.85
4	2688.00	67.42 AV	89.17	-21.75	1.00 V	343	34.57	32.85
5	4924.00	60.17 PK	74.00	-13.83	1.12 V	33	22.03	38.14
5	4924.00	45.26 AV	54.00	-8.74	1.12 V	33	7.12	38.14

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.



802.11g OFDM modulation_Normal mode

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	41.67 PK	81.09	-39.40	1.06 H	39	13.33	28.34
2	2390.00	51.16 PK	74.00	-22.84	1.00 H	61	19.29	31.87
2	2390.00	41.05 AV	54.00	-12.95	1.00 H	61	9.18	31.87
3	*2412.00	101.09 PK			1.00 H	61	69.13	31.96
3	*2412.00	90.98 AV			1.00 H	61	59.02	31.96
4	2688.00	65.69 PK	81.09	-15.40	1.08 H	62	32.84	32.85
4	2688.00	62.25 AV	70.98	-8.73	1.08 H	62	29.40	32.85
5	4824.00	50.00 PK	74.00	-24.00	1.00 H	215	12.17	37.83
5	4824.00	36.91 AV	54.00	-17.09	1.00 H	215	-0.92	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	43.12 PK	92.03	-48.91	1.00 V	18	14.78	28.34
2	2390.00	62.10 PK	74.00	-11.90	1.13 V	0	30.23	31.87
2	2390.00	51.07 AV	54.00	-2.93	1.13 V	0	19.20	31.87
3	*2412.00	112.03 PK			1.13 V	0	80.07	31.96
3	*2412.00	101.00 AV			1.13 V	0	69.04	31.96
4	2688.00	69.56 PK	92.03	-22.47	1.03 V	348	36.71	32.85
4	2688.00	67.18 AV	81.00	-13.82	1.03 V	348	34.33	32.85
5	4824.00	52.95 PK	74.00	-21.05	1.02 V	20	15.12	37.83
5	4824.00	39.47 AV	54.00	-14.53	1.02 V	20	1.64	37.83

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	42.15 PK	82.35	-40.20	1.06 H	57	13.81	28.34
2	*2437.00	102.35 PK			1.01 H	64	70.29	32.06
2	*2437.00	92.28 AV			1.01 H	64	60.22	32.06
3	2688.00	65.59 PK	82.35	-16.76	1.06 H	69	32.74	32.85
3	2688.00	62.17 AV	72.28	-10.11	1.06 H	69	29.32	32.85
4	4874.00	49.57 PK	74.00	-24.43	1.01 H	232	11.59	37.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	44.15 PK	93.31	-49.16	1.06 V	73	15.81	28.34
2	*2437.00	113.31 PK			1.17 V	5	81.25	32.06
2	*2437.00	102.68 AV			1.17 V	5	70.62	32.06
3	2688.00	69.75 PK	93.31	-23.56	1.05 V	349	36.90	32.85
3	2688.00	67.28 AV	82.68	-15.40	1.05 V	349	34.43	32.85
4	4874.00	53.12 PK	74.00	-20.88	1.02 V	43	15.14	37.98
4	4874.00	39.71 AV	54.00	-14.29	1.02 V	43	1.73	37.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	41.76 PK	82.18	-40.42	1.02 H	48	13.42	28.34
2	*2462.00	102.18 PK			1.00 H	59	70.02	32.16
2	*2462.00	92.05 AV			1.00 H	59	59.89	32.16
3	2483.50	50.95 PK	74.00	-23.05	1.00 H	59	18.71	32.24
3	2483.50	40.82 AV	54.00	-13.18	1.00 H	59	8.58	32.24
4	2688.00	65.84 PK	82.18	-16.34	1.09 H	54	32.99	32.85
4	2688.00	62.41 AV	72.05	-9.64	1.09 H	54	29.56	32.85
5	4924.00	49.68 PK	74.00	-24.32	1.03 H	245	11.54	38.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1288.00	43.89 PK	93.23	-49.34	1.03 V	60	15.55	28.34
2	*2462.00	113.23 PK			1.10 V	5	81.07	32.16
2	*2462.00	102.52 AV			1.10 V	5	70.36	32.16
3	2483.50	62.00 PK	74.00	-12.00	1.10 V	5	29.76	32.24
3	2483.50	51.29 AV	54.00	-2.71	1.10 V	5	19.05	32.24
4	2688.00	69.83 PK	93.23	-23.40	1.04 V	351	36.98	32.85
4	2688.00	67.35 AV	82.52	-15.17	1.04 V	351	34.50	32.85
5	4924.00	53.07 PK	74.00	-20.93	1.01 V	27	14.93	38.14
5	4924.00	39.62 AV	54.00	-14.38	1.01 V	27	1.48	38.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g OFDM modulation_Turbo mode

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	485.90	40.88 QP	46.00	-5.12	1.00 H	28	22.88	18.00
2	508.53	29.71 QP	46.00	-16.29	1.00 H	34	11.19	18.52
3	535.48	28.97 QP	46.00	-17.03	1.00 H	298	10.05	18.92
4	675.59	26.94 QP	46.00	-19.06	1.00 H	58	5.53	21.40
5	811.39	31.72 QP	46.00	-14.28	1.00 H	298	8.20	23.52
6	878.21	31.21 QP	46.00	-14.79	1.00 H	298	6.57	24.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	485.90	42.30 QP	46.00	-3.70	1.00 V	274	24.30	18.00
2	498.83	42.08 QP	46.00	-3.92	1.00 V	256	23.72	18.36
3	522.54	33.34 QP	46.00	-12.66	1.50 V	244	14.61	18.72
4	680.98	34.99 QP	46.00	-11.01	1.00 V	190	13.58	21.41
5	812.47	33.79 QP	46.00	-12.21	1.50 V	274	10.24	23.55
6	877.13	31.31 QP	46.00	-14.69	1.00 V	292	6.67	24.64
7	936.41	32.52 QP	46.00	-13.48	1.00 V	280	7.19	25.33

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	48.38 PK	74.00	-25.62	1.00 H	259	19.10	29.28
2	2390.00	52.33 PK	74.00	-21.67	1.24 H	37	21.72	30.61
2	2390.00	42.80 AV	54.00	-11.20	1.24 H	37	12.19	30.61
3	*2437.00	100.53 PK			1.24 H	37	69.76	30.77
3	*2437.00	91.00 AV			1.24 H	37	60.23	30.77
4	2483.50	49.99 PK	74.00	-24.01	1.24 H	37	19.07	30.92
4	2483.50	40.46 AV	54.00	-13.54	1.24 H	37	9.54	30.92
5	2688.00	63.18 PK	80.53	-17.35	1.11 H	309	31.72	31.46
5	2688.00	59.53 AV	71.00	-11.47	1.11 H	309	28.07	31.46
6	4874.00	42.17 PK	74.00	-31.83	1.00 H	27	6.14	36.03
7	7311.00	51.65 PK	74.00	-22.35	1.00 H	295	9.69	41.96
7	7311.00	38.74 AV	54.00	-15.26	1.00 H	295	-3.22	41.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MEASUREMENT DETAIL	
MODEL	TEW-603PI	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	56.58 PK	74.00	-17.42	1.64 V	351	27.30	29.28
1	2016.00	46.88 AV	54.00	-7.12	1.64 V	351	17.60	29.28
2	2390.00	61.10 PK	74.00	-12.90	1.00 V	316	30.50	30.61
2	2390.00	51.93 AV	54.00	-2.07	1.00 V	316	21.32	30.61
3	*2437.00	109.30 PK			1.00 V	316	78.62	30.68
3	*2437.00	100.13 AV			1.00 V	316	69.45	30.68
4	2483.50	58.76 PK	74.00	-15.24	1.00 V	316	27.84	30.92
4	2483.50	49.59 AV	54.00	-4.41	1.00 V	316	18.67	30.92
5	2688.00	68.48 PK	89.30	-20.82	1.09 V	313	37.02	31.46
5	2688.00	67.18 AV	80.13	-12.95	1.09 V	313	35.72	31.46
6	4874.00	44.20 PK	74.00	-29.80	1.00 V	109	8.17	36.03
7	7311.00	54.33 PK	74.00	-19.67	1.16 V	334	12.37	41.96
7	7311.00	41.58 AV	54.00	-12.42	1.16 V	334	-0.38	41.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS modulation


EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.88	0.5	PASS
6	2437	11.40	0.5	PASS
11	2462	11.36	0.5	PASS


CH1

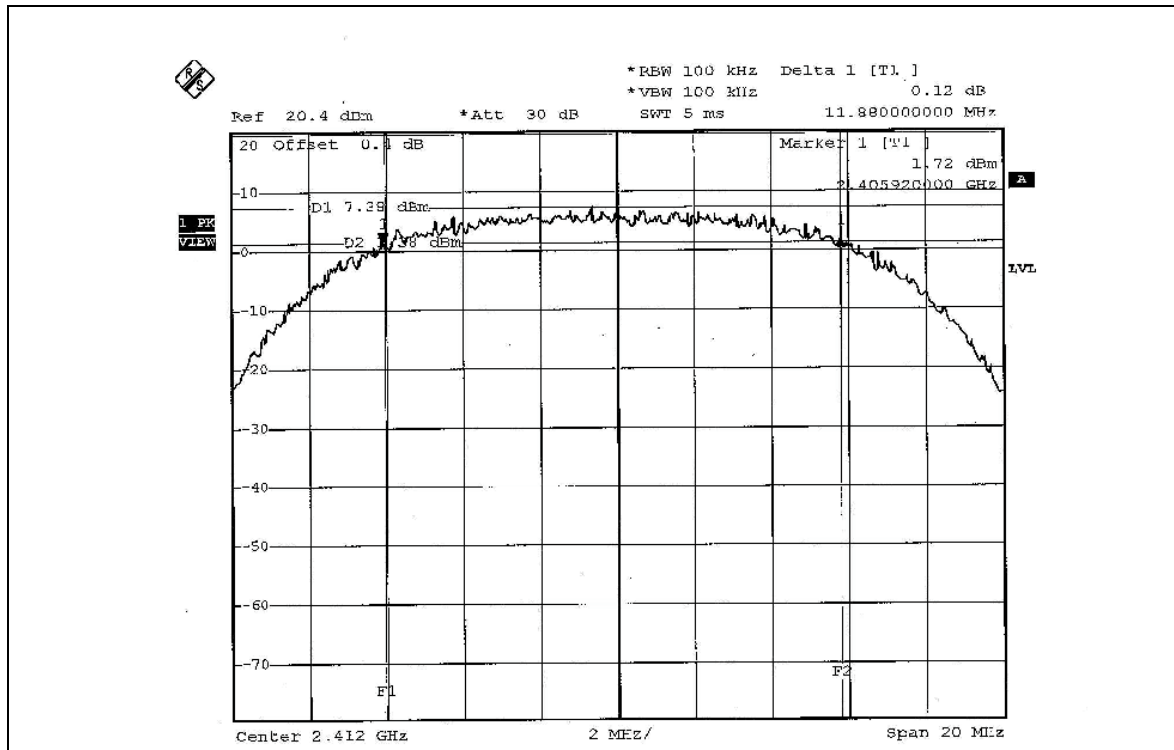

CH6

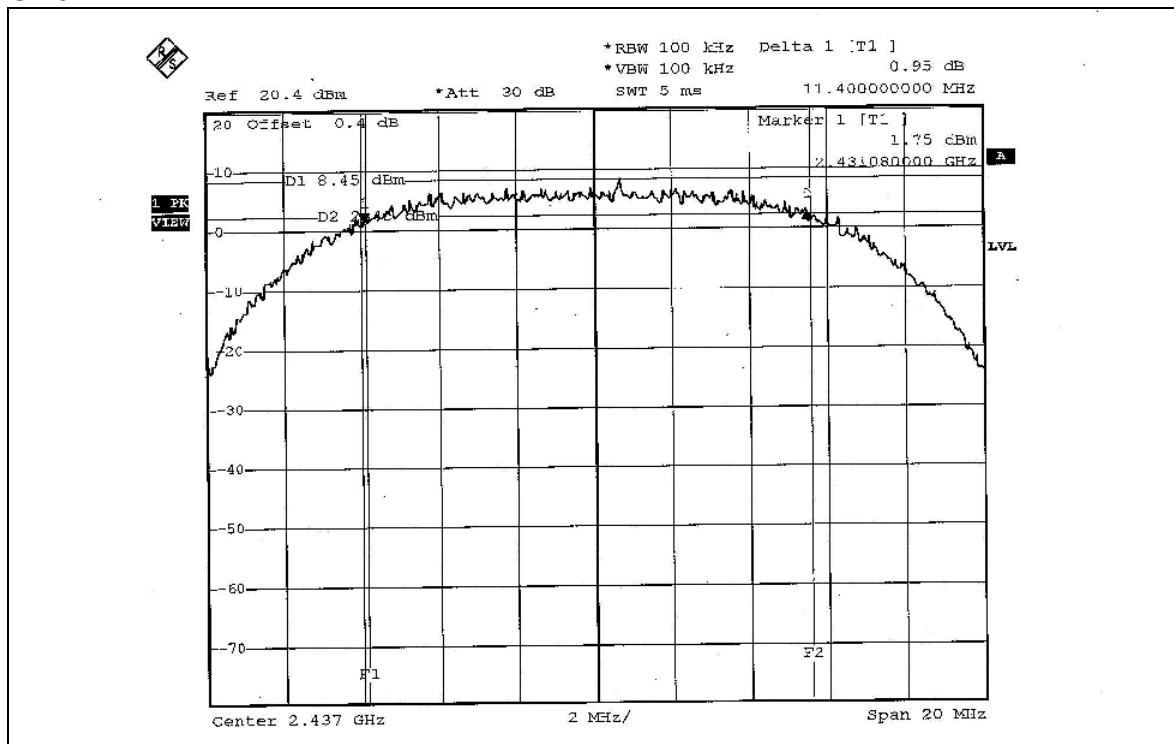

CH11

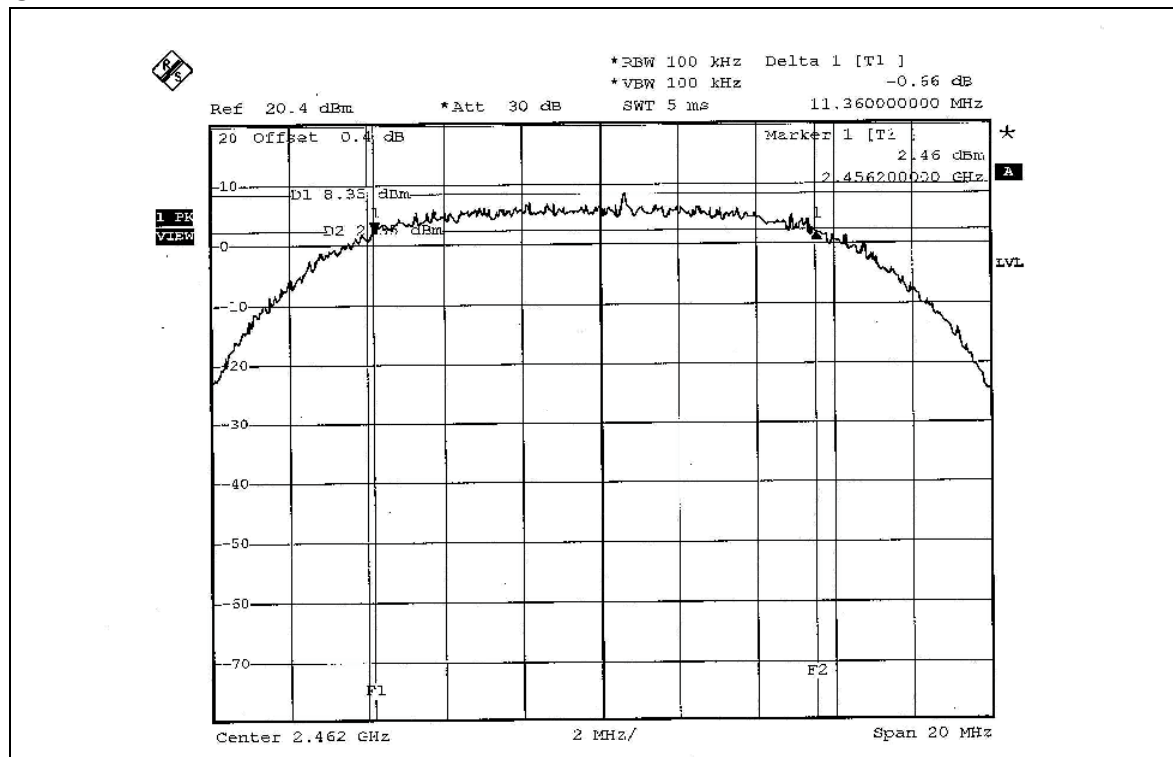


**802.11g OFDM modulation_Normal mode**


EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.44	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.44	0.5	PASS


CH1

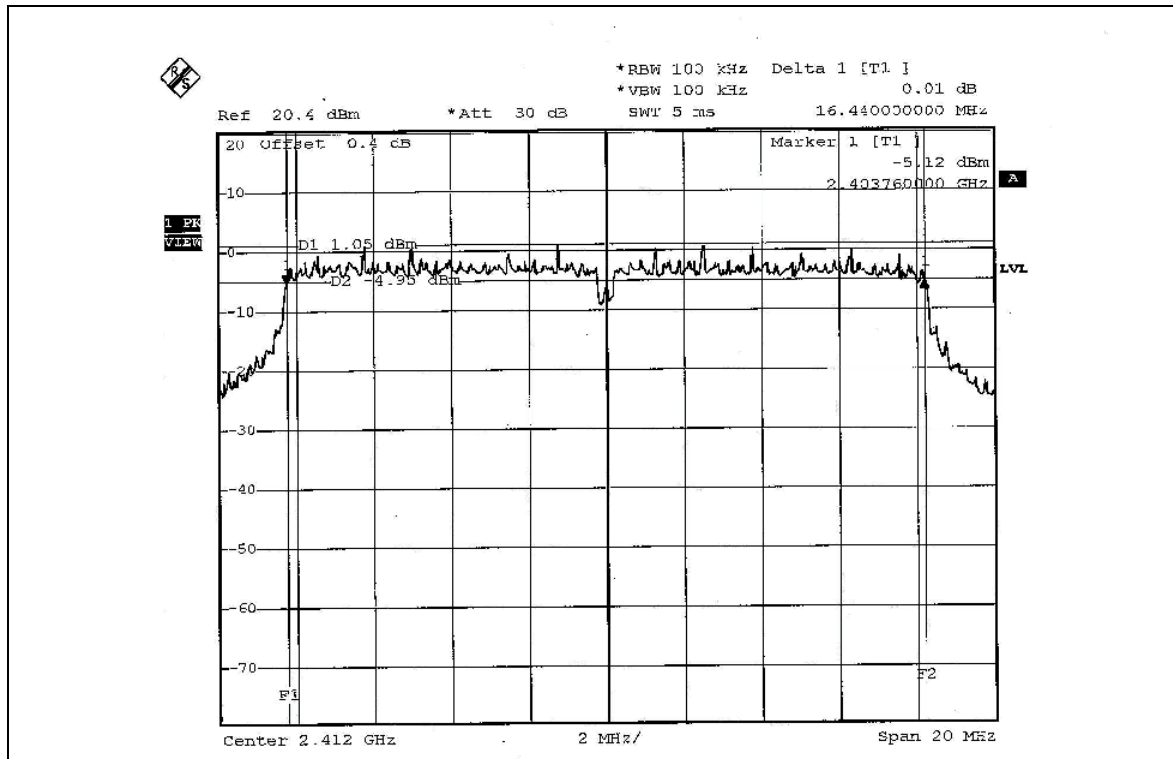

CH6

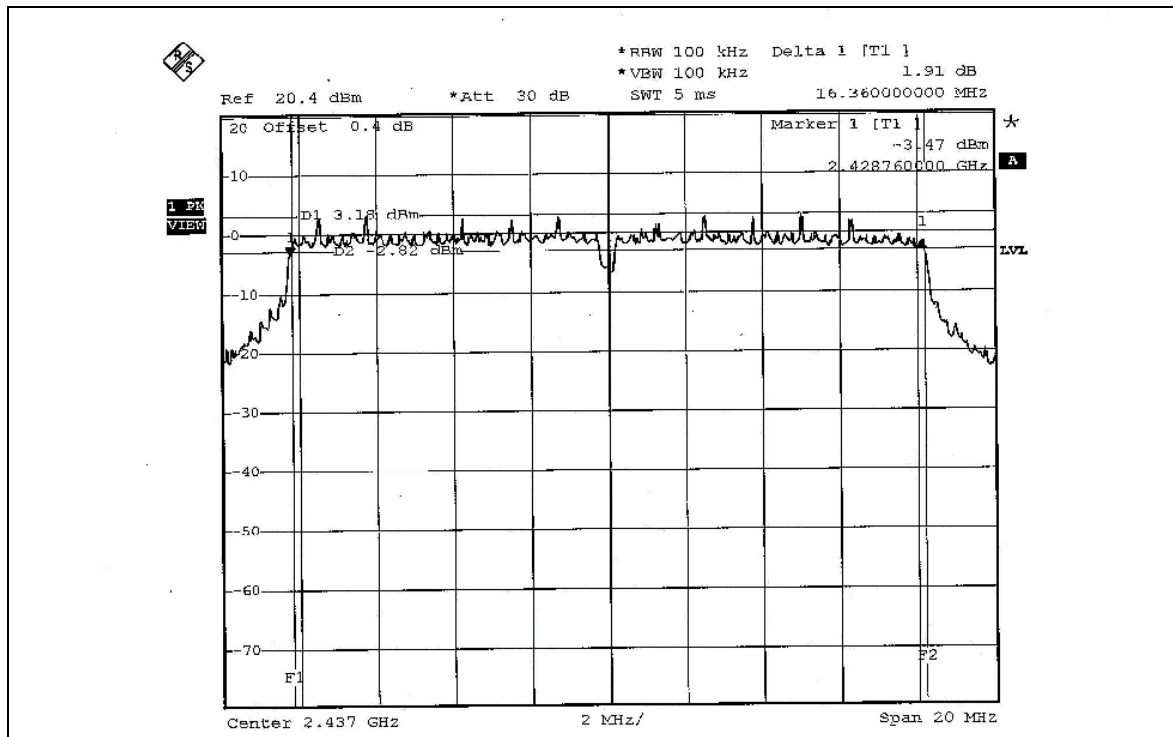

CH11

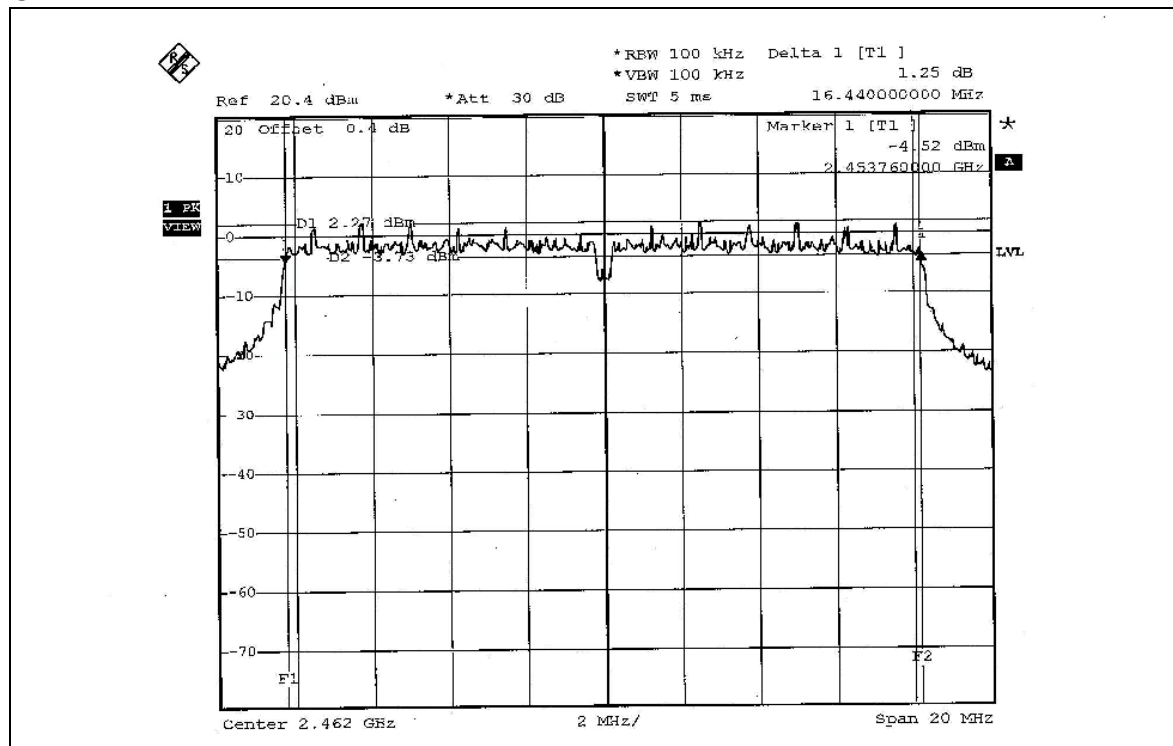


802.11g OFDM modulation_Turbo mode

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	31.36	0.5	PASS

CH6

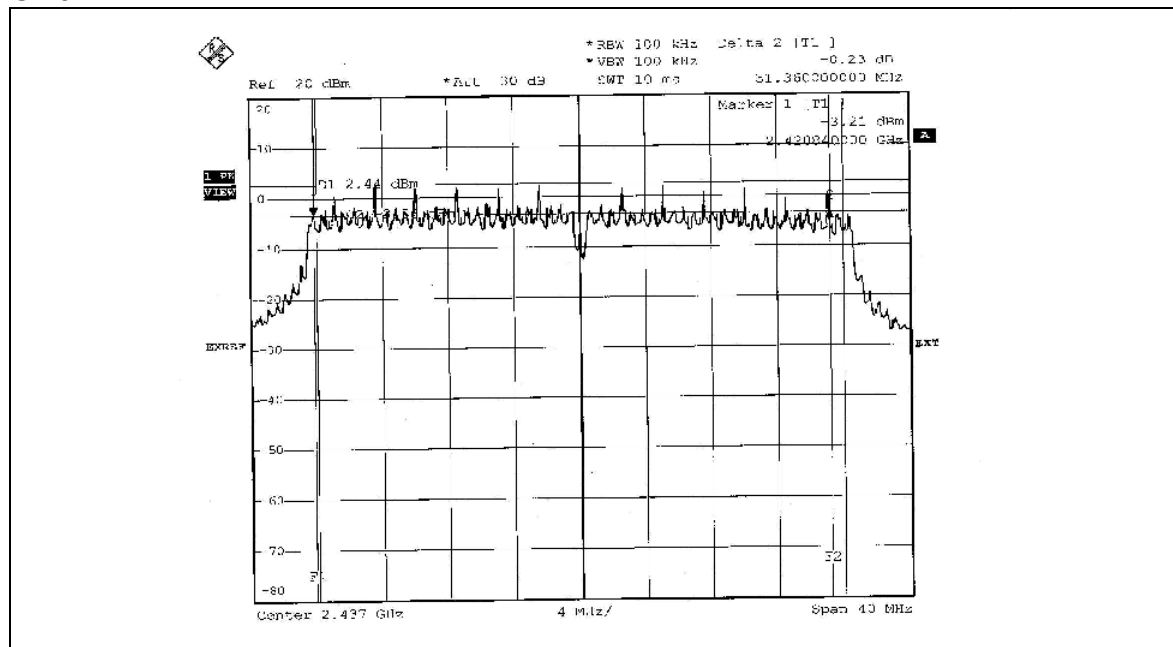

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b DSSS modulation

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	63.826	18.05	30	PASS
6	2437	63.680	18.04	30	PASS
11	2462	63.387	18.02	30	PASS

**802.11g OFDM modulation_Normal Mode**

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	44.668	16.50	30	PASS
6	2437	51.286	17.10	30	PASS
11	2462	50.699	17.05	30	PASS

802.11g OFDM modulation_Turbo Mode

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	50.466	17.03	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-2.04	8	PASS
6	2437	-2.09	8	PASS
11	2462	-1.82	8	PASS


CH1

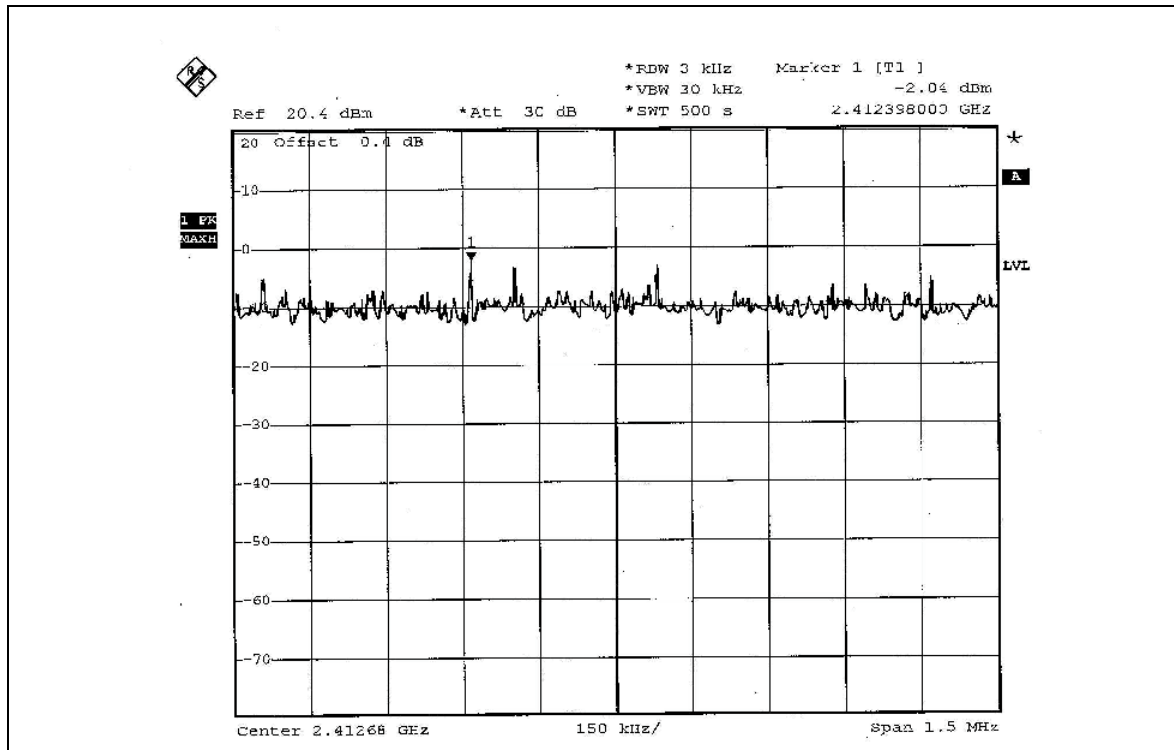

CH6

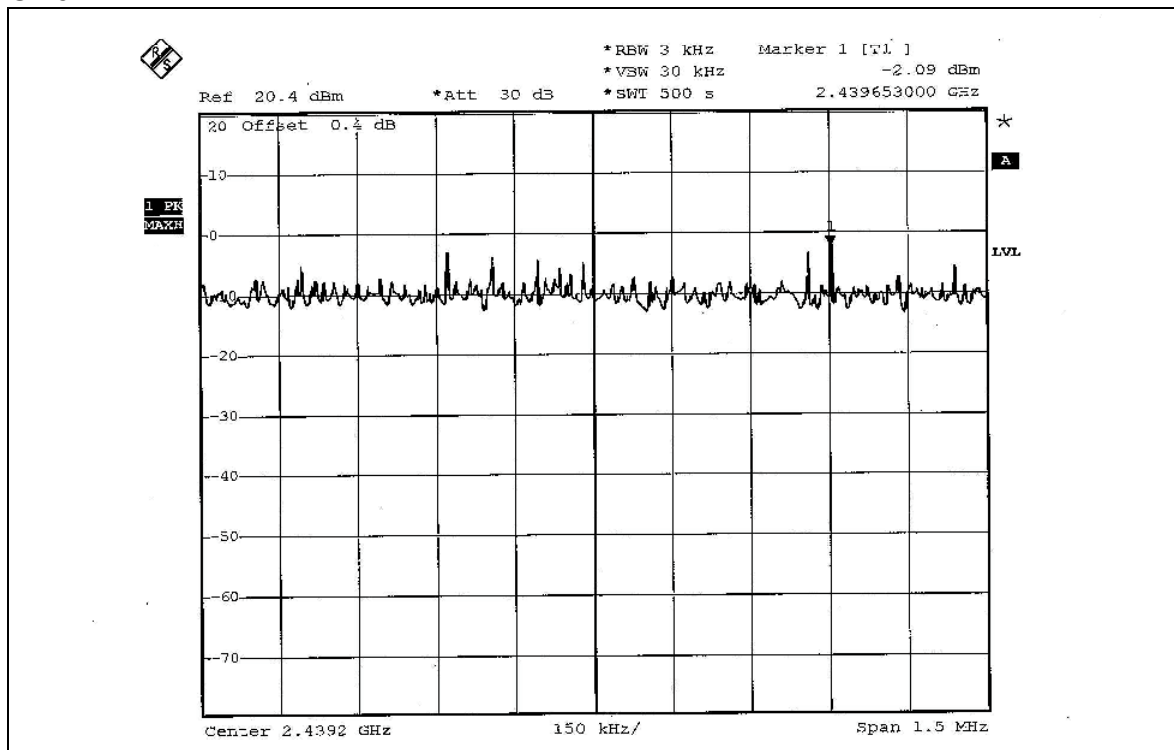

CH11

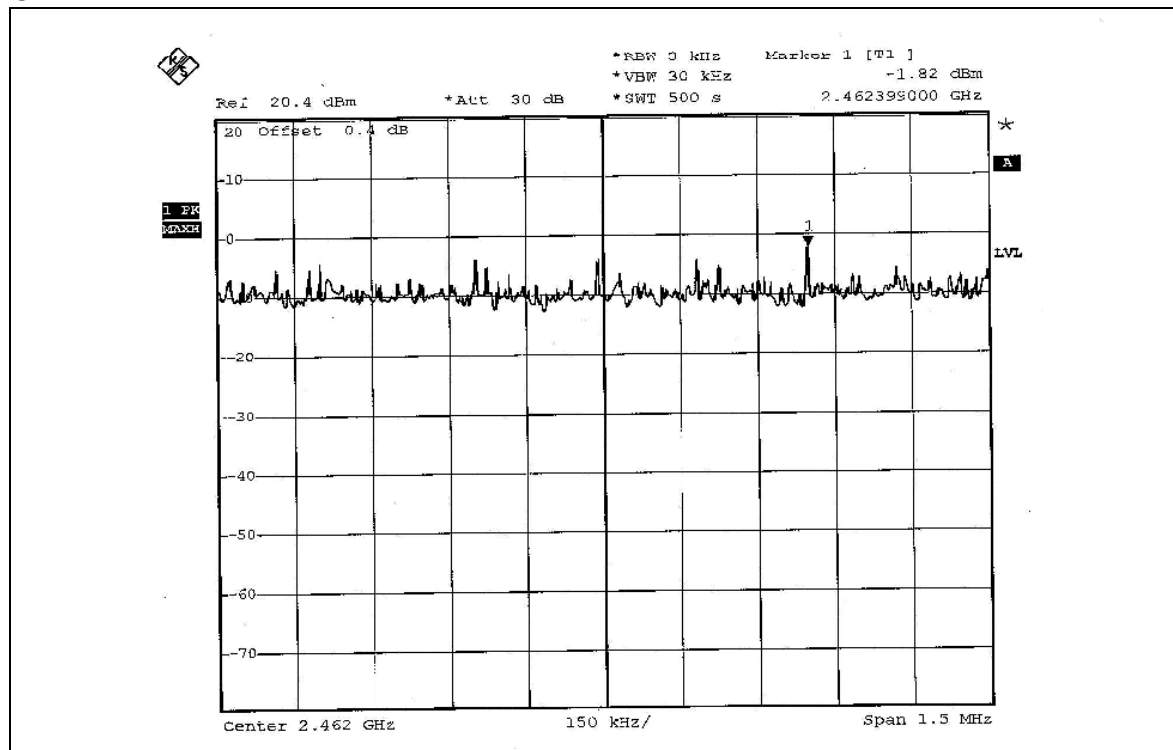


802.11g OFDM modulation_Normal mode


EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.44	8	PASS
6	2437	-10.50	8	PASS
11	2462	-11.20	8	PASS


CH1

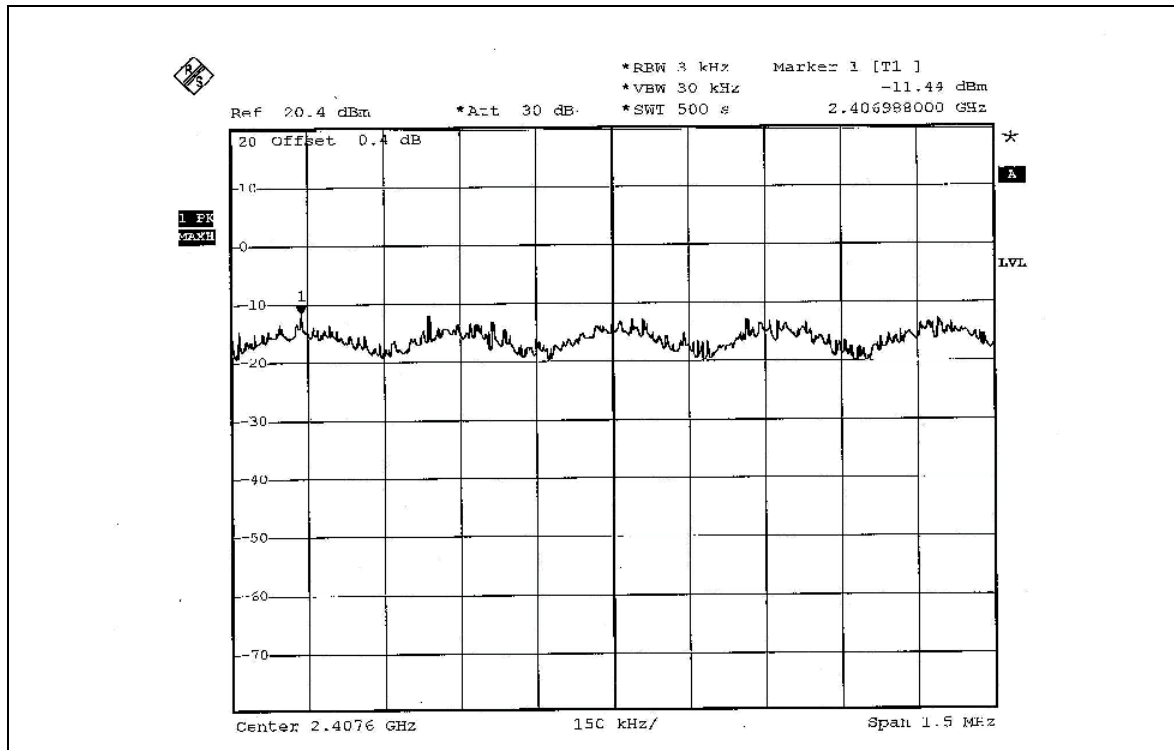

CH6

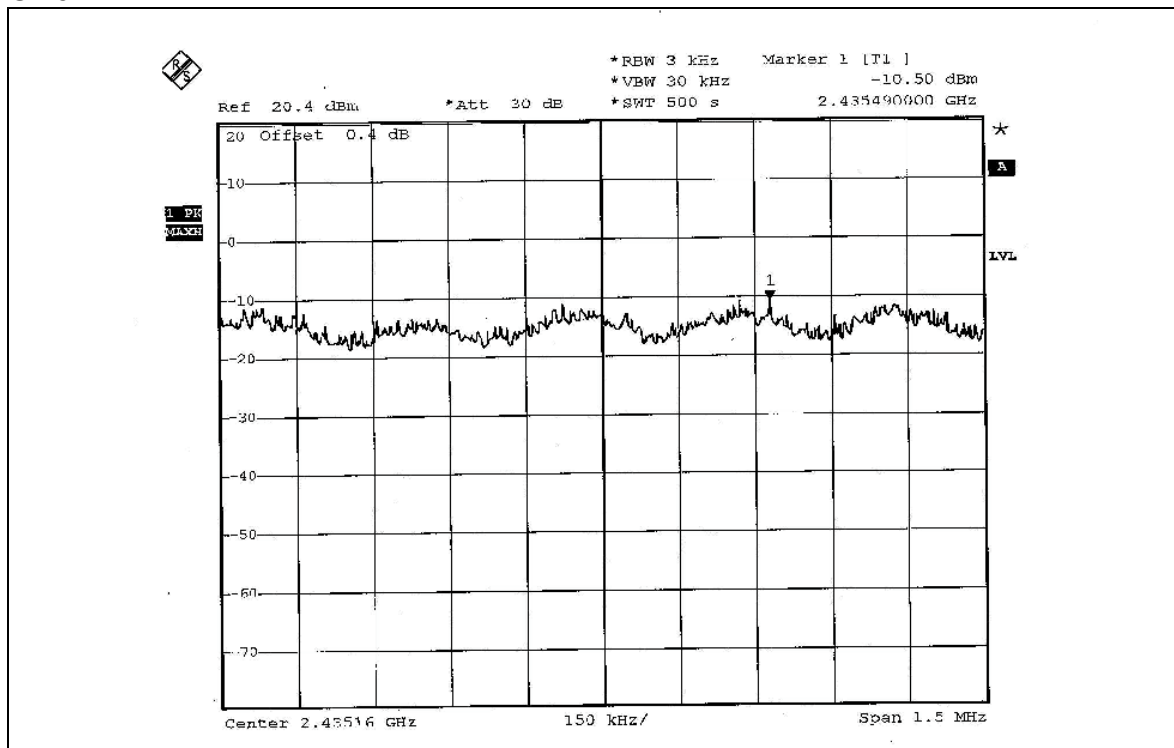

CH11

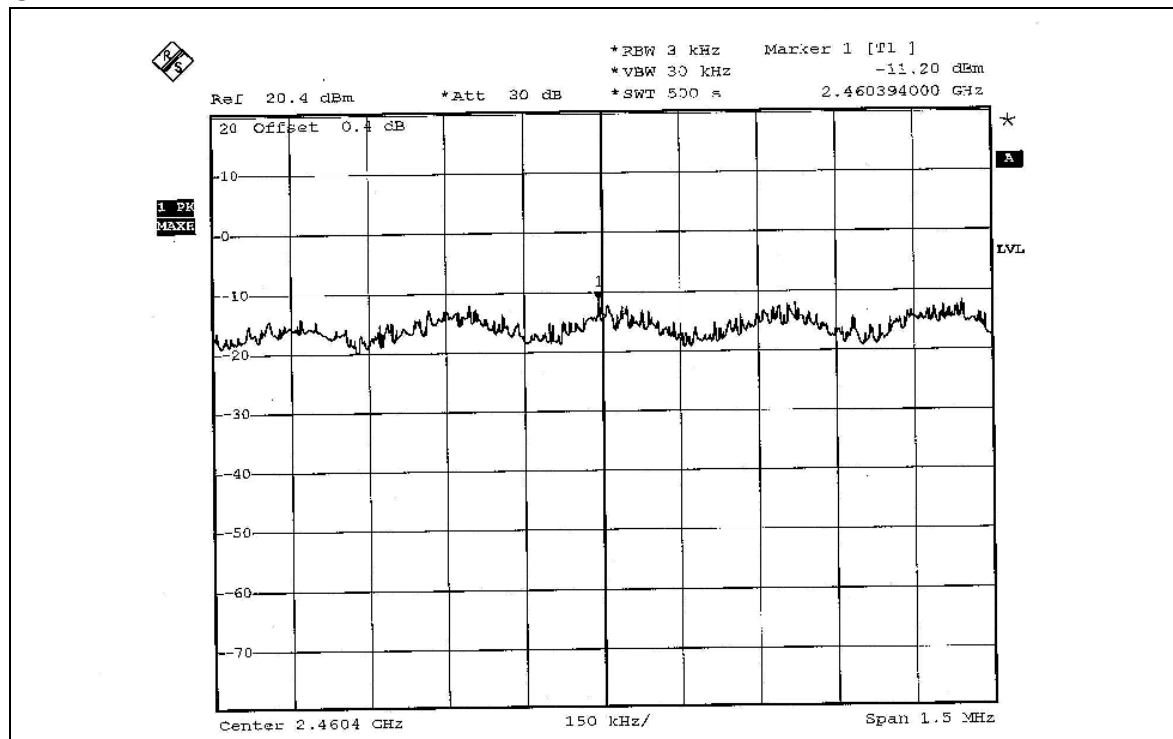


**802.11g OFDM modulation_Turbo mode**

EUT	108Mbps 802.11g MIMO Wireless PCI Adapter	MODEL	TEW-603PI
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-14.44	8	PASS

CH6

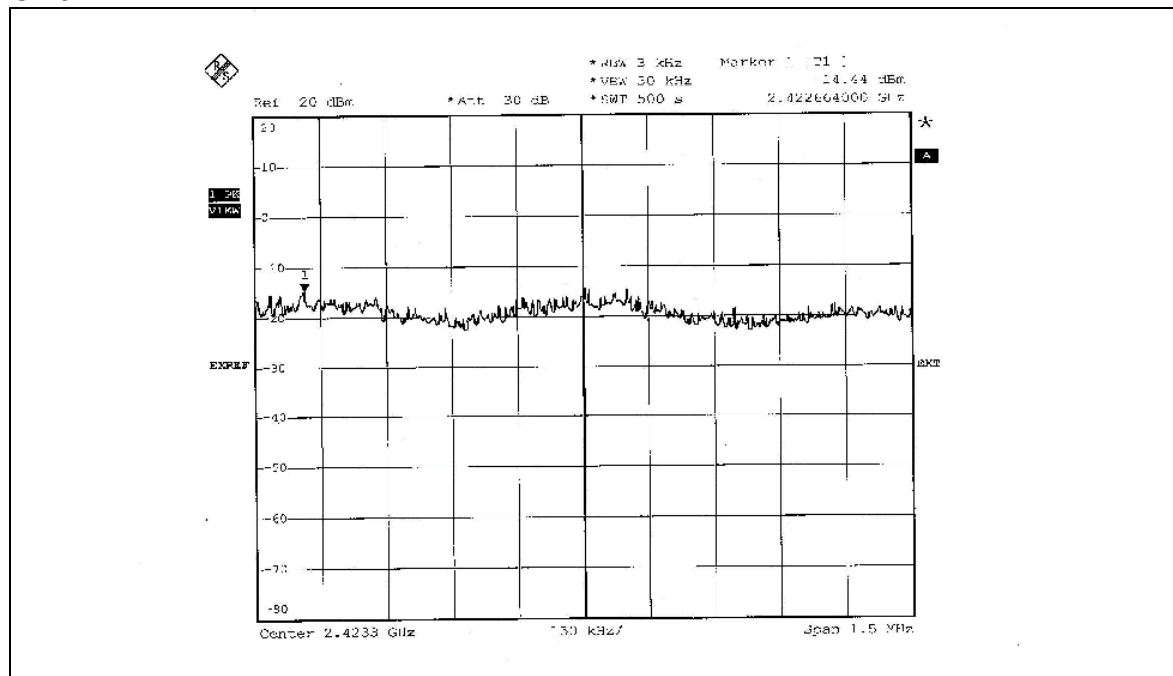

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation

NOTE 1:



The band edge emission plot on page 60 shows 52.24dBc between carrier maximum power and local maximum emission in restrict band (2.31988GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 116.79dBuV/m (Peak), so the maximum field strength in restrict band is $116.79 - 52.24 = 64.55$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 60 shows 57.90dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.49dBuV/m (Average), so the maximum field strength in restrict band is $108.49 - 57.90 = 50.59$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on page 61 shows 55.11dBc between carrier maximum power and local maximum emission in restrict band (2.4856GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 117.60dBuV/m (Peak), so the maximum field strength in restrict band is $117.60 - 55.11 = 62.49$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 62 shows 60.42dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.17dBuV/m (Average), so the maximum field strength in restrict band is $109.17 - 60.42 = 48.75$ dBuV/m which is under 54dBuV/m limit.

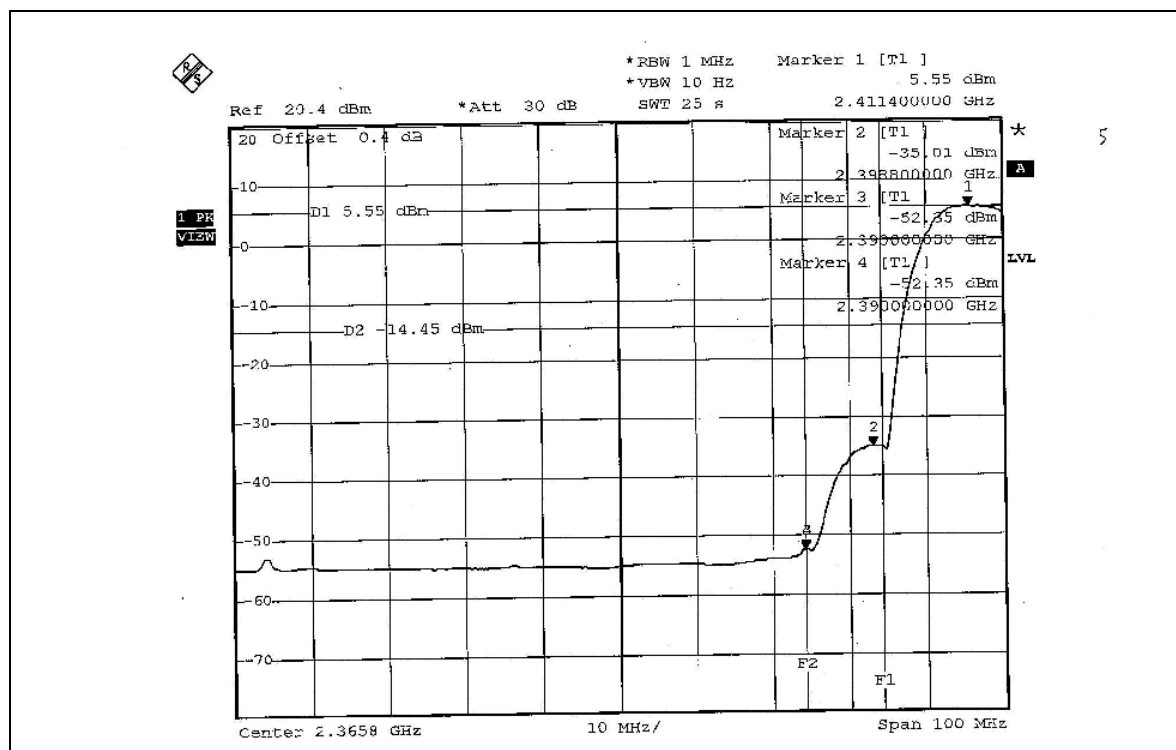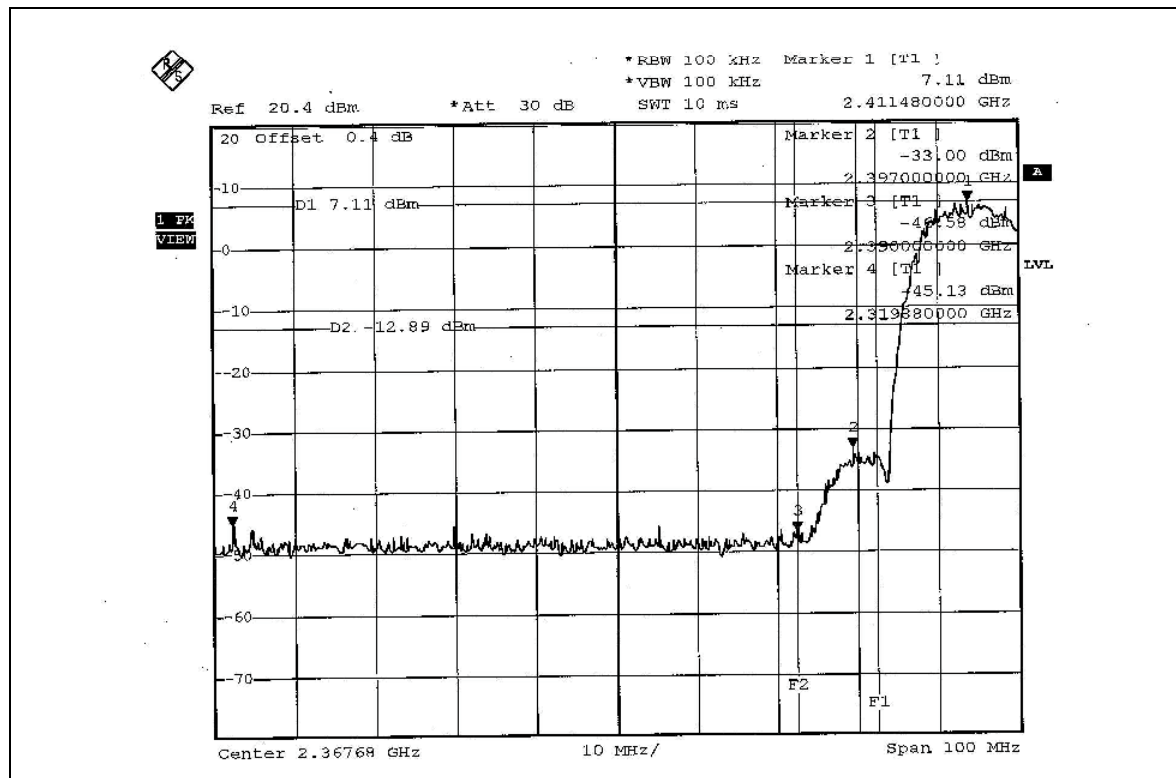

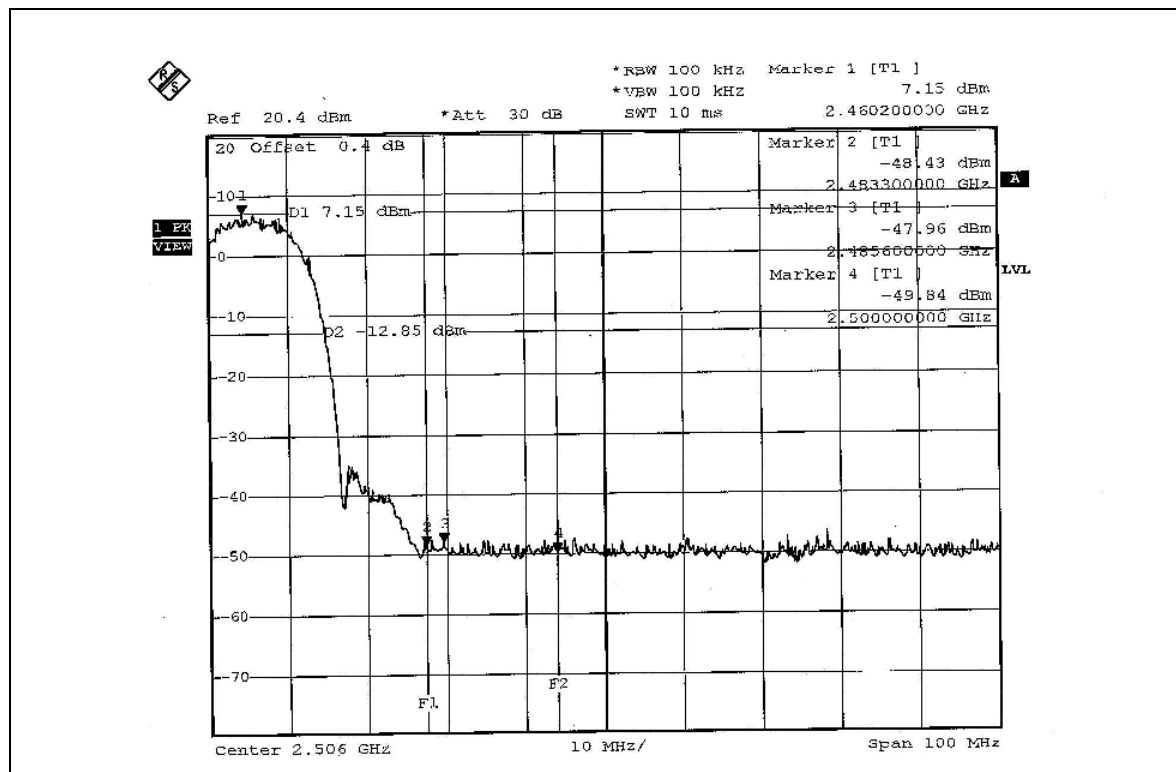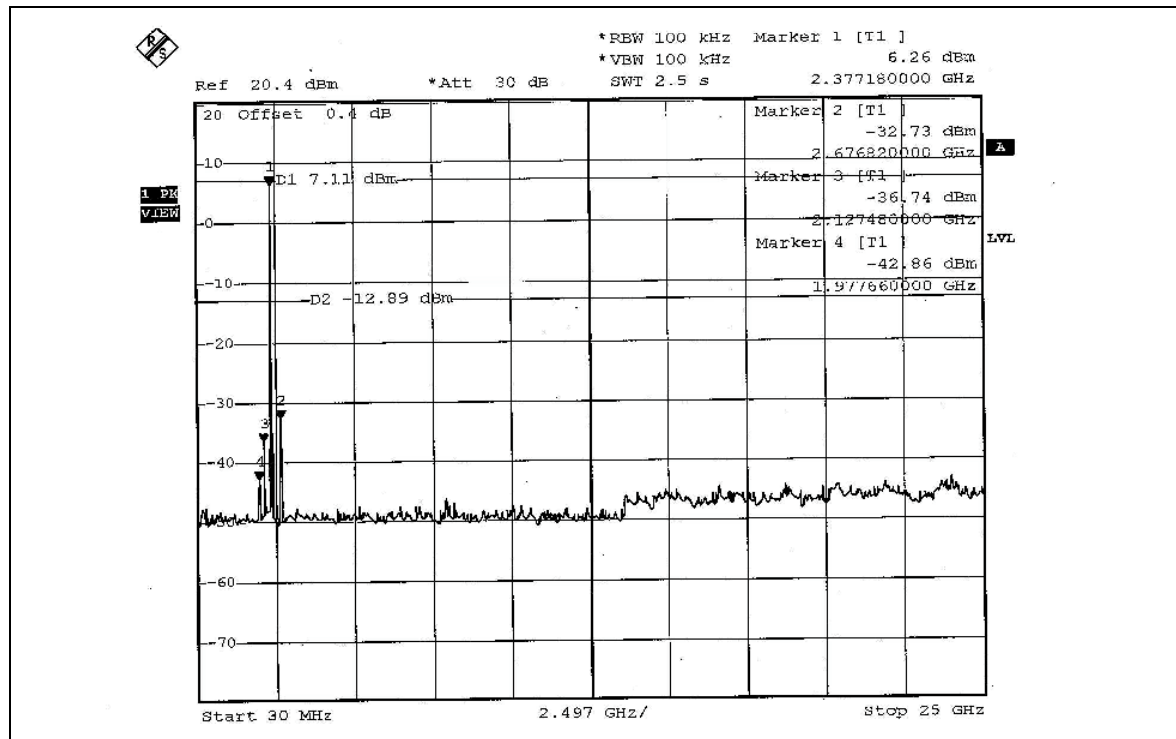

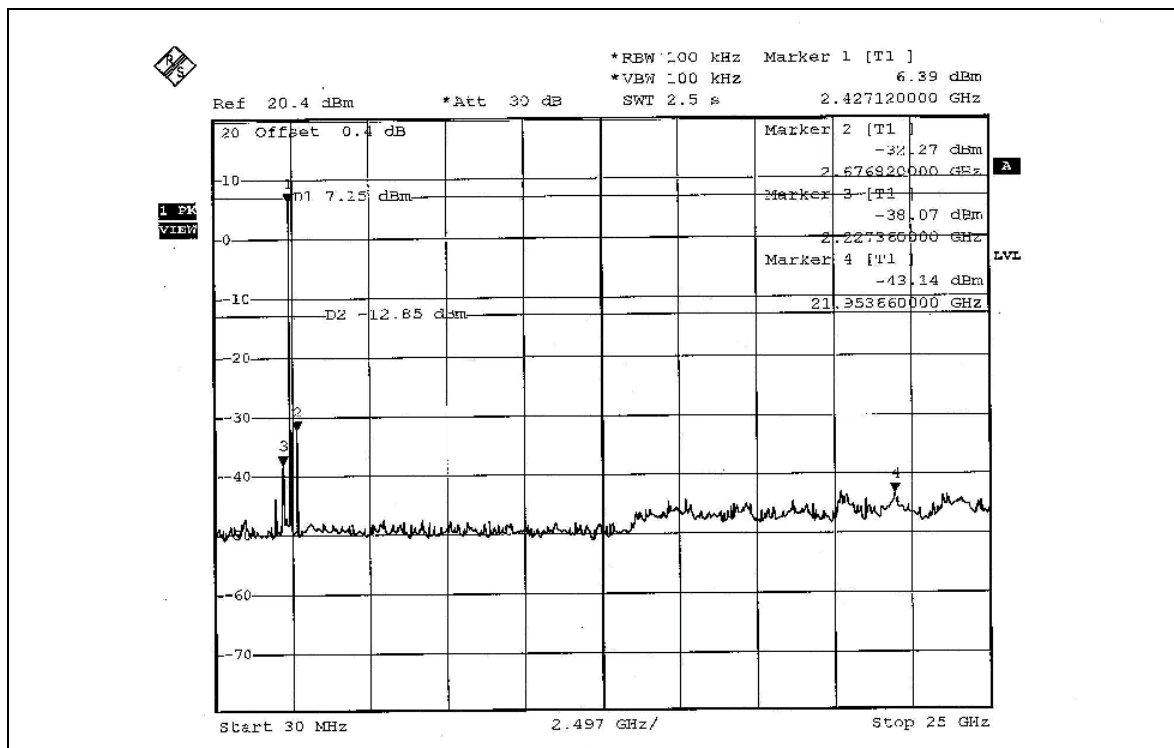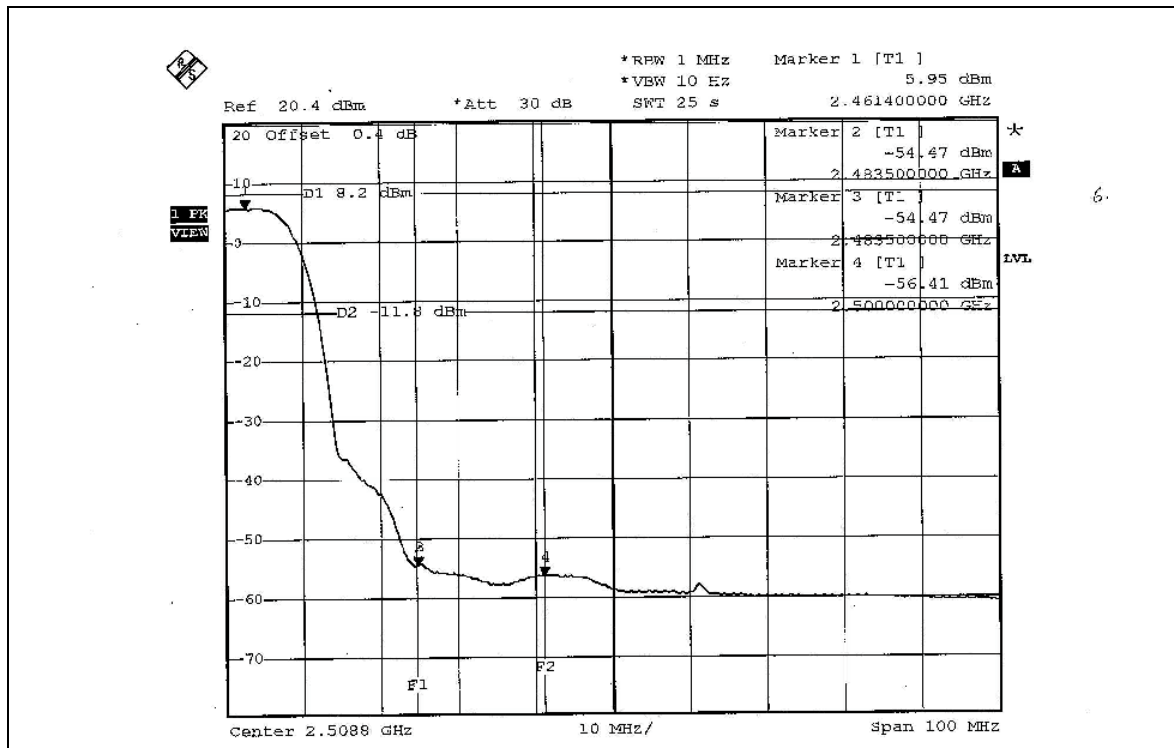

802.11g OFDM modulation_Normal mode**NOTE 1:**



The band edge emission plot on page 64 shows 47.10dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.03dBuV/m (Peak), so the maximum field strength in restrict band is $112.03 - 47.10 = 64.93$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 64 shows 50.19dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.00dBuV/m (Average), so the maximum field strength in restrict band is $101.00 - 50.19 = 50.81$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on page 65 shows 46.62dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 113.23dBuV/m (Peak), so the maximum field strength in restrict band is $113.23 - 46.62 = 66.61$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 66 shows 52.76dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 102.52dBuV/m (Average), so the maximum field strength in restrict band is $102.52 - 52.76 = 49.76$ dBuV/m which is under 54dBuV/m limit.

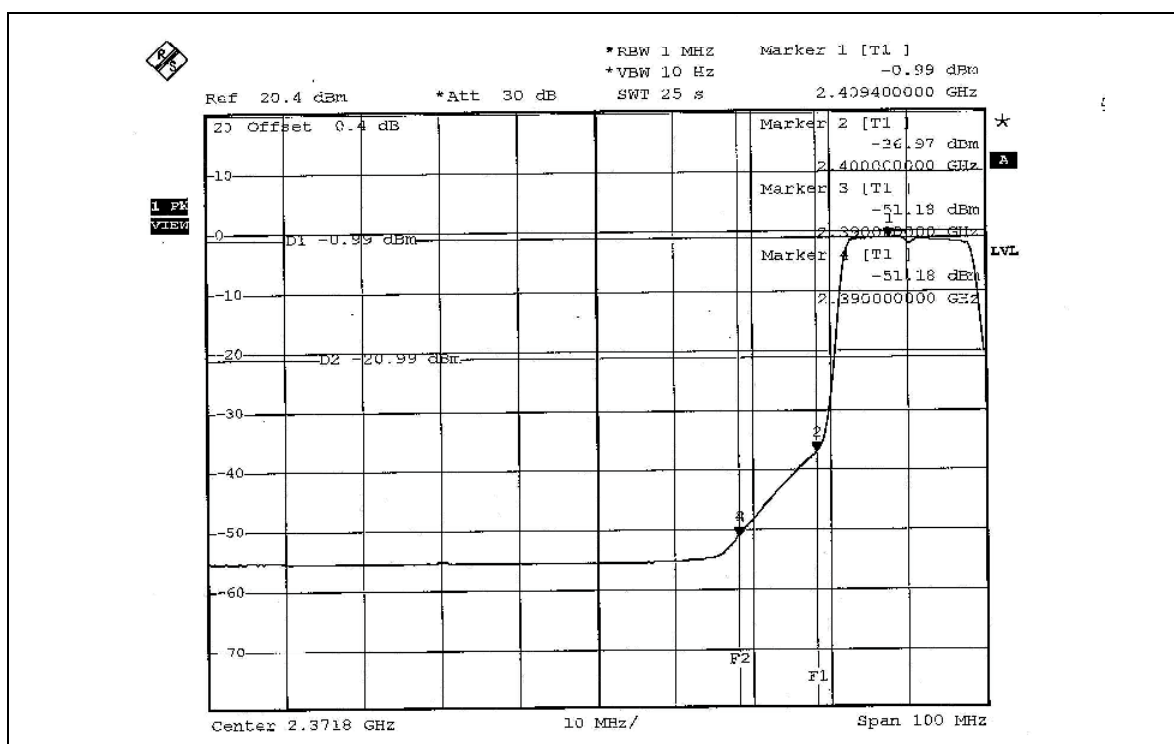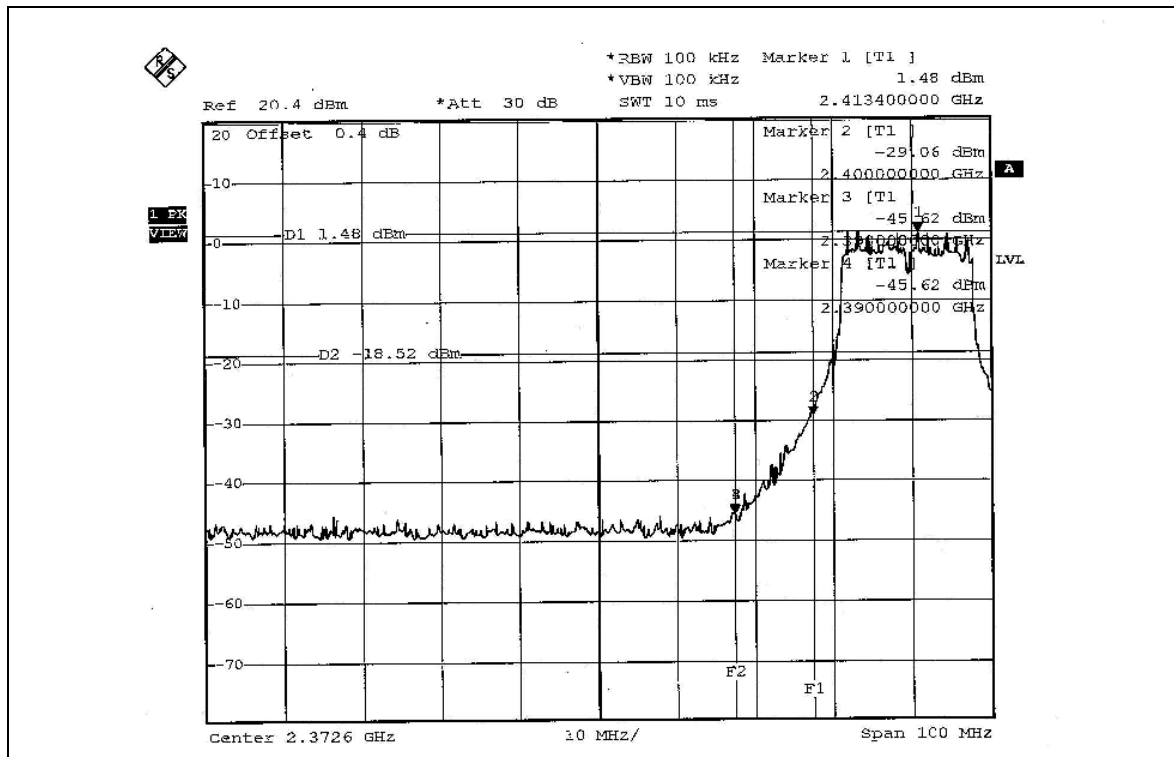

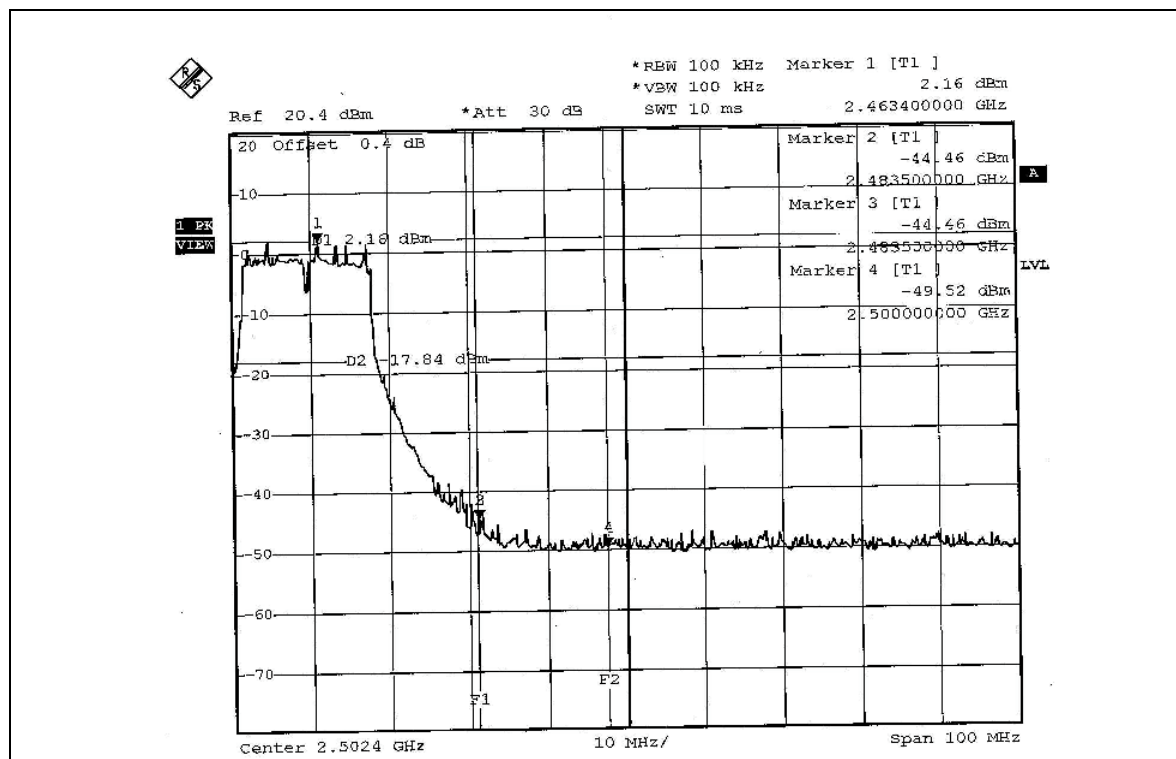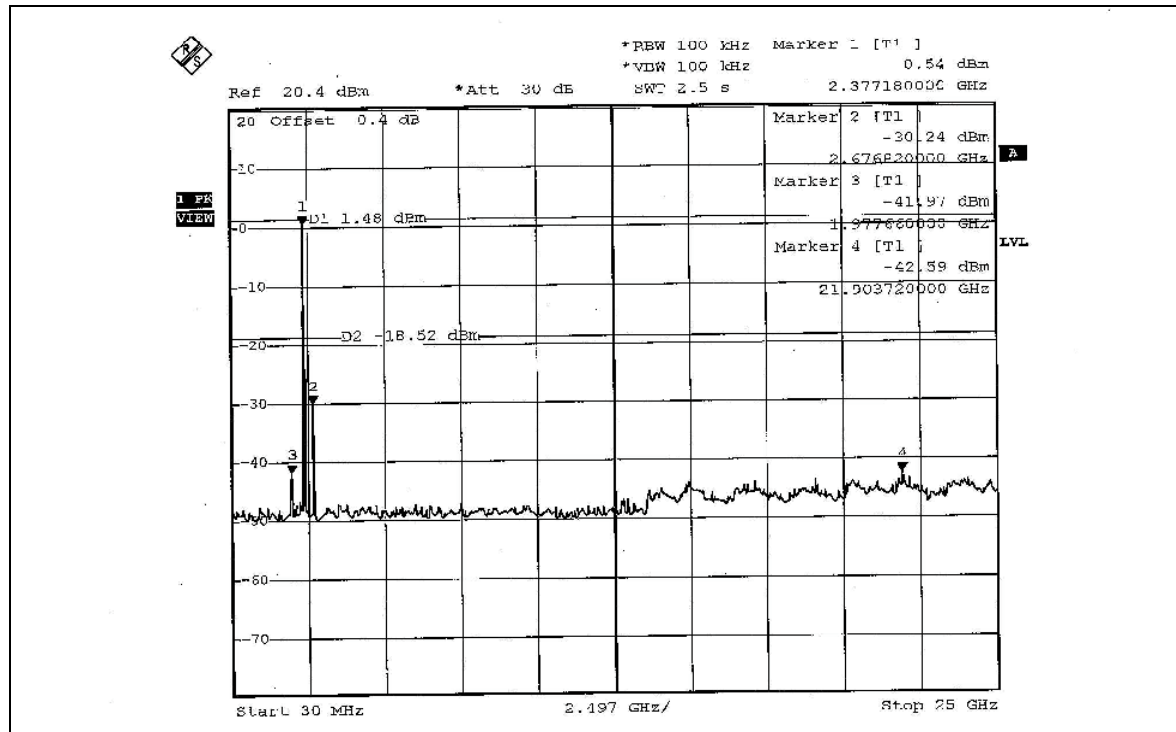

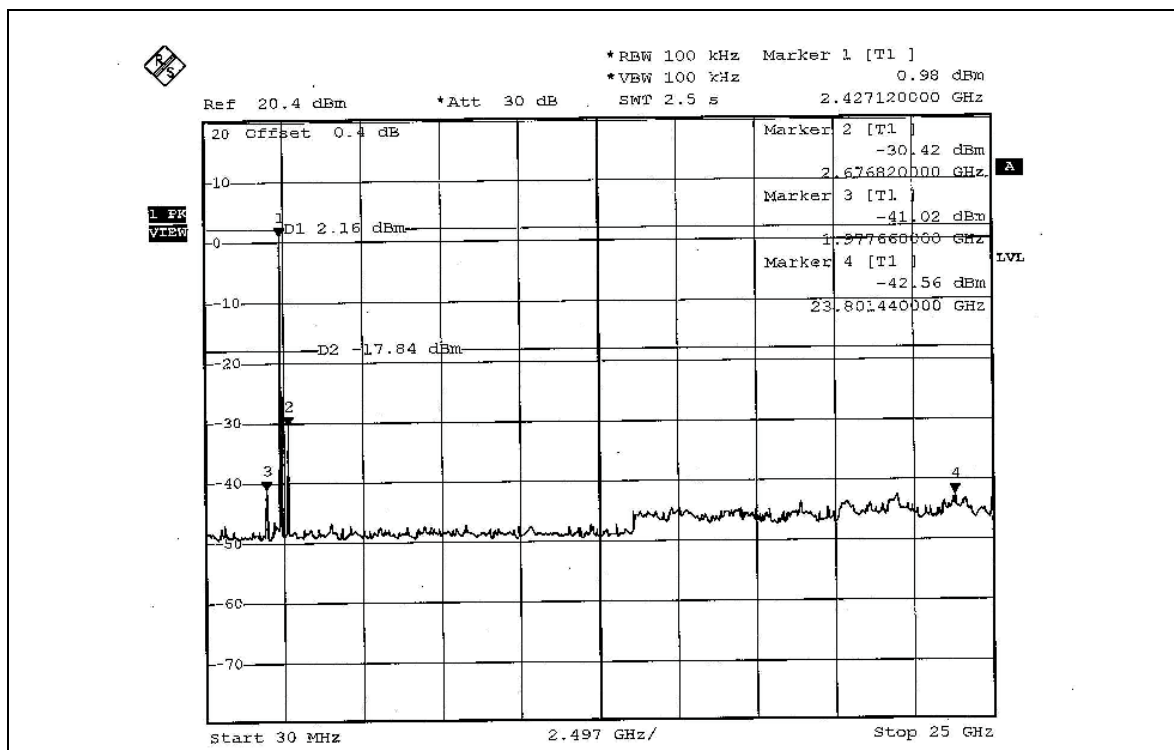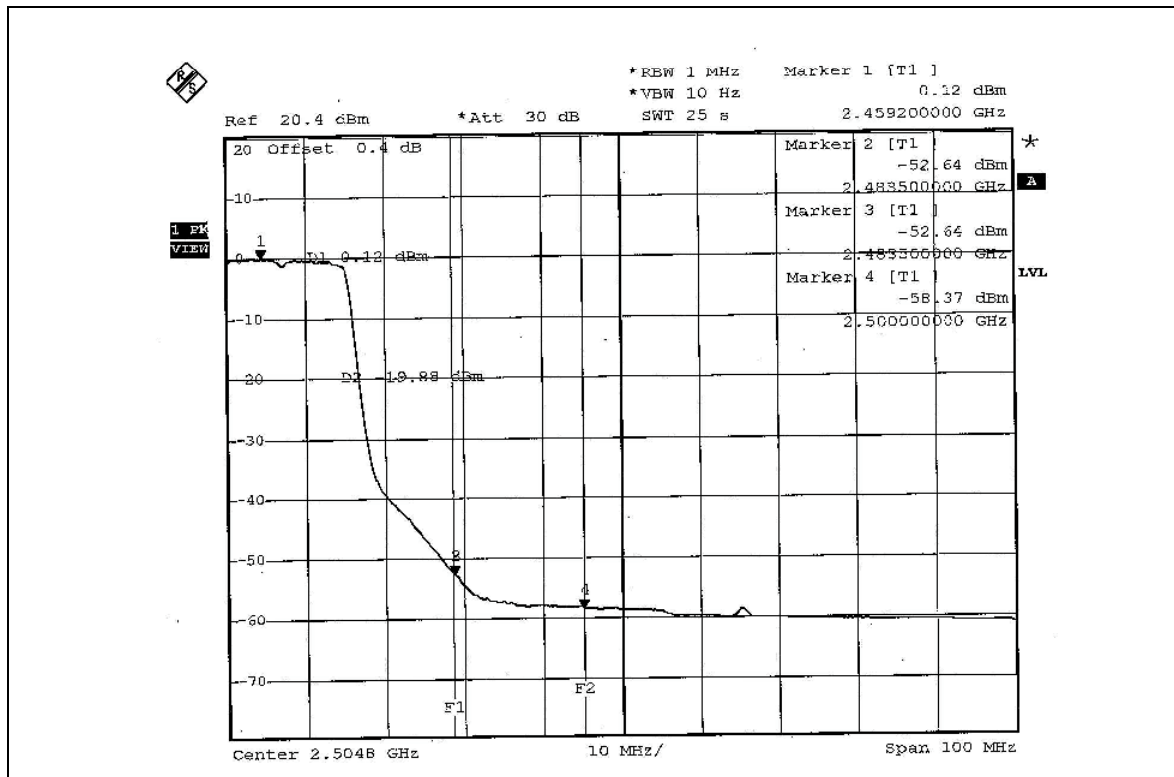

802.11g OFDM modulation_Turbo mode**NOTE 1:**



The band edge emission plot on page 68 shows 48.16dBc between carrier maximum power and local maximum emission in restrict band (2.3884GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.30dBuV/m (Peak), so the maximum field strength in restrict band is $109.30 - 48.16 = 61.14$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 68 shows 49.75dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.13dBuV/m (Average), so the maximum field strength in restrict band is $100.13 - 49.75 = 50.38$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on page 69 shows 48.99dBc between carrier maximum power and local maximum emission in restrict band (2.4847GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.30dBuV/m (Peak), so the maximum field strength in restrict band is $109.30 - 48.99 = 60.31$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 70 shows 52.97dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.13dBuV/m (Average), so the maximum field strength in restrict band is $100.13 - 52.97 = 47.16$ dBuV/m which is under 54dBuV/m limit.

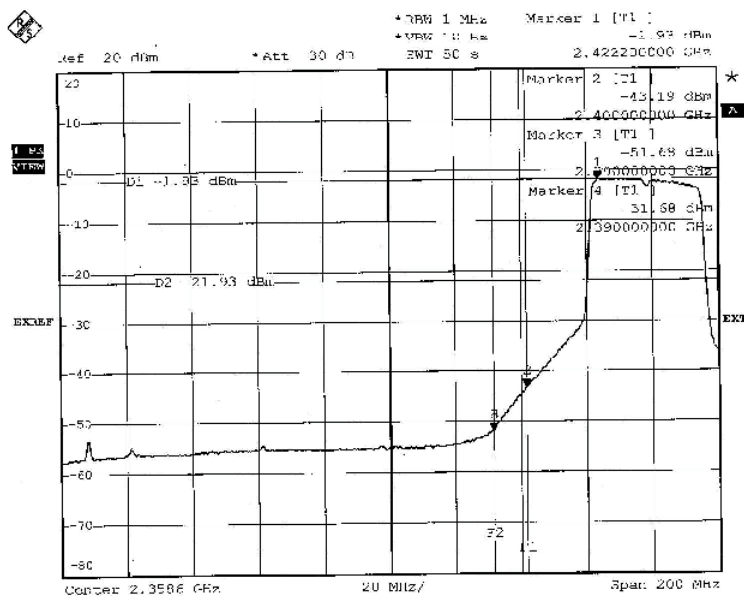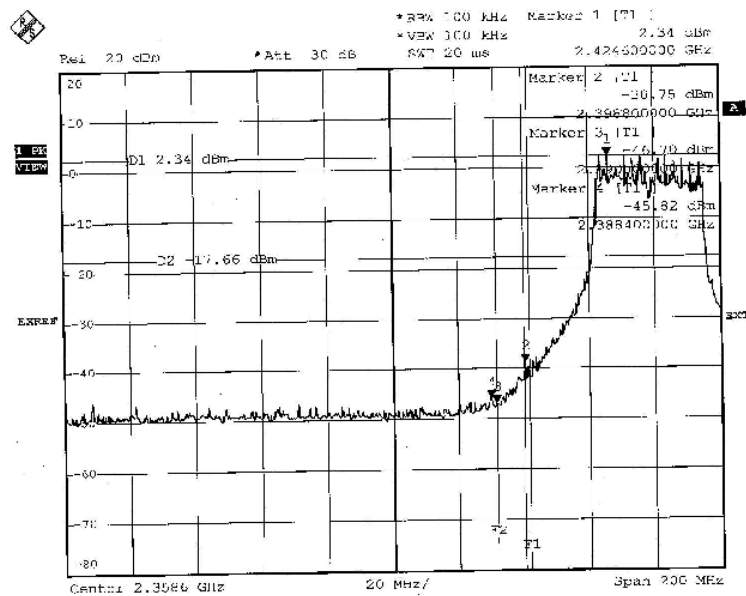

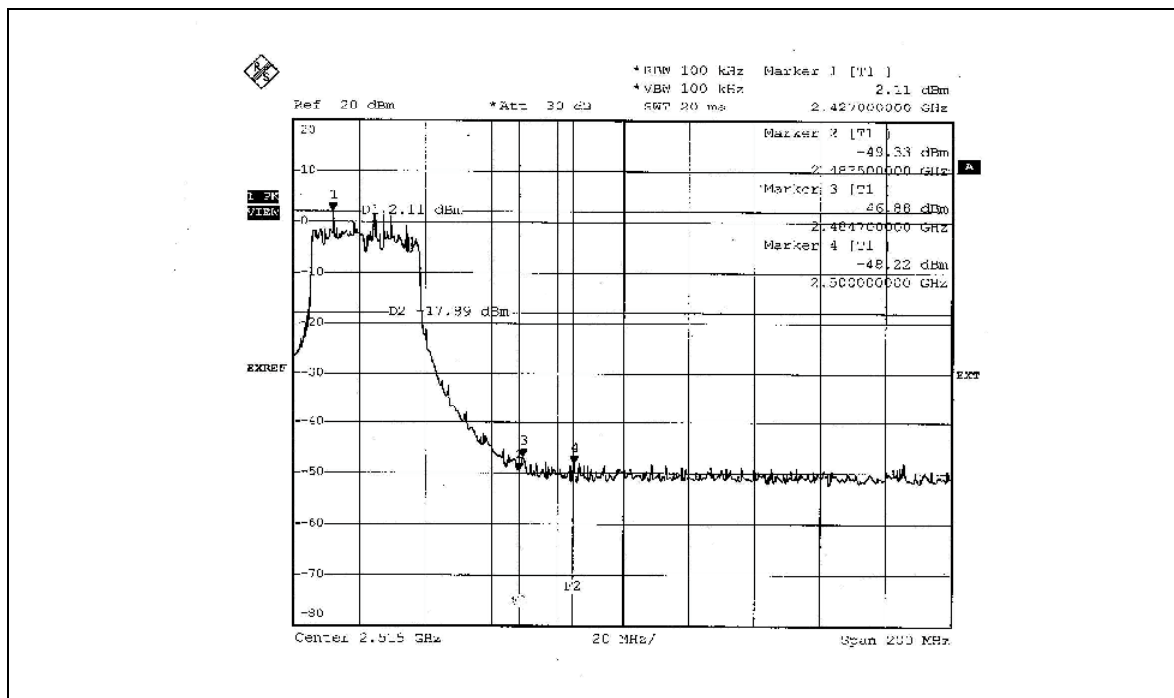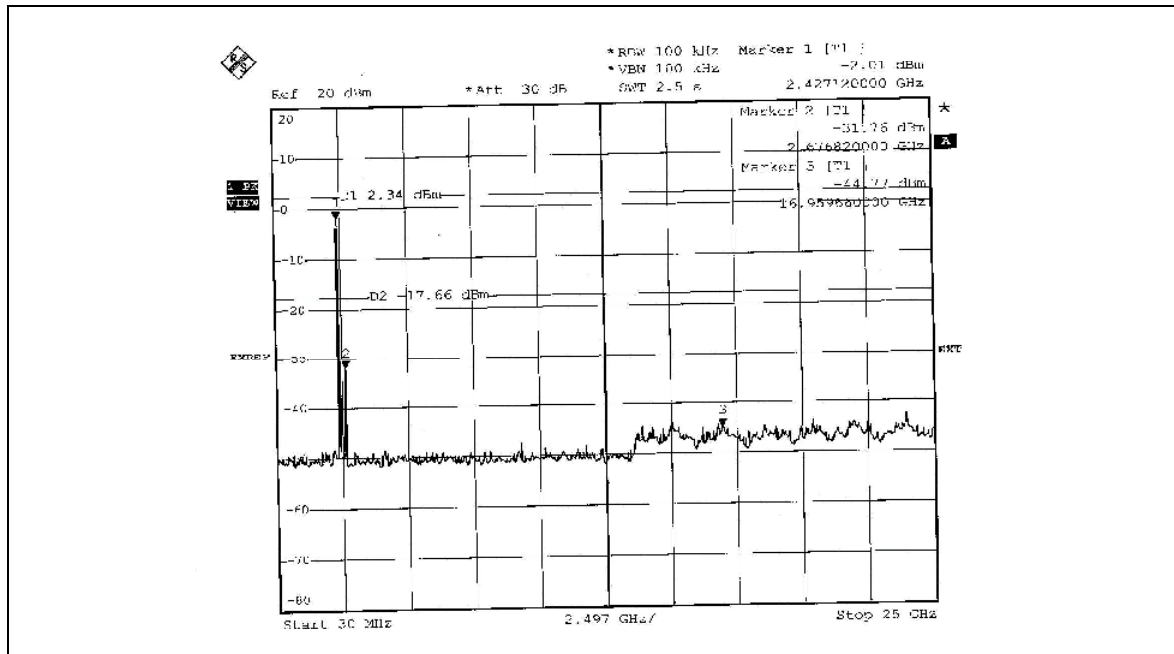

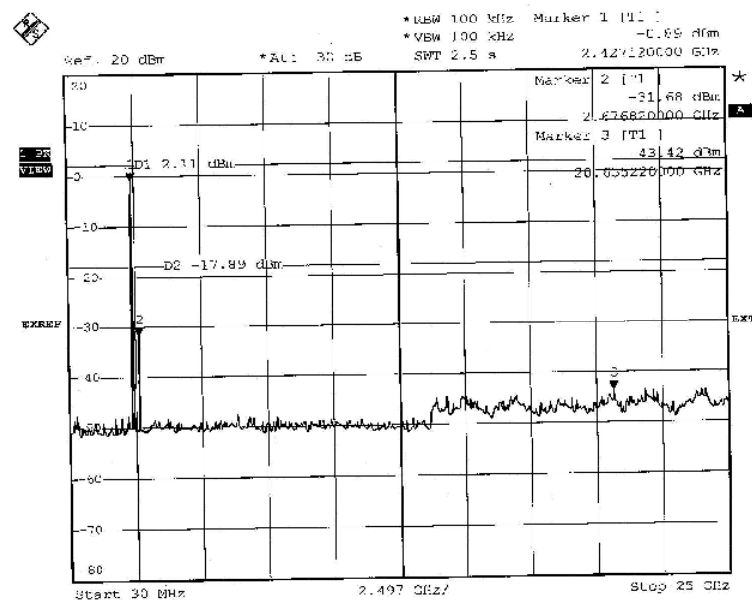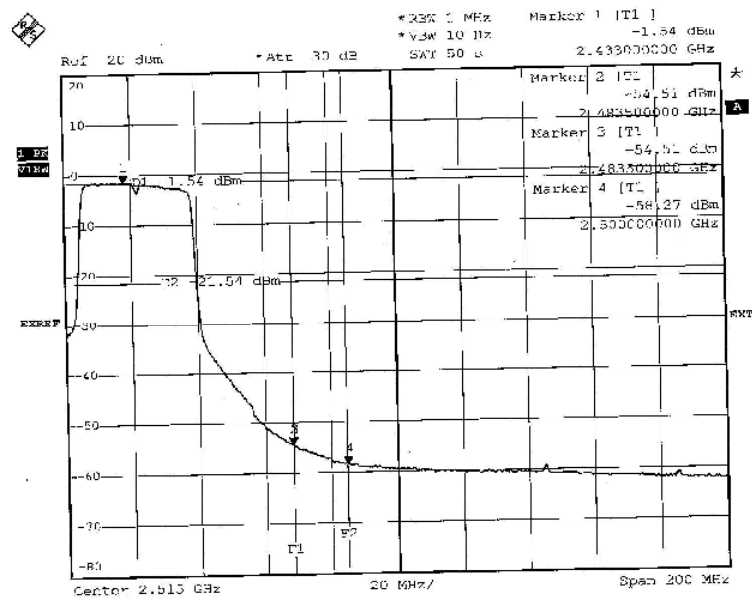



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna type used in this product is Dipole antenna with R-SMA antenna connector. The maximum Gain of the antenna is 5dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

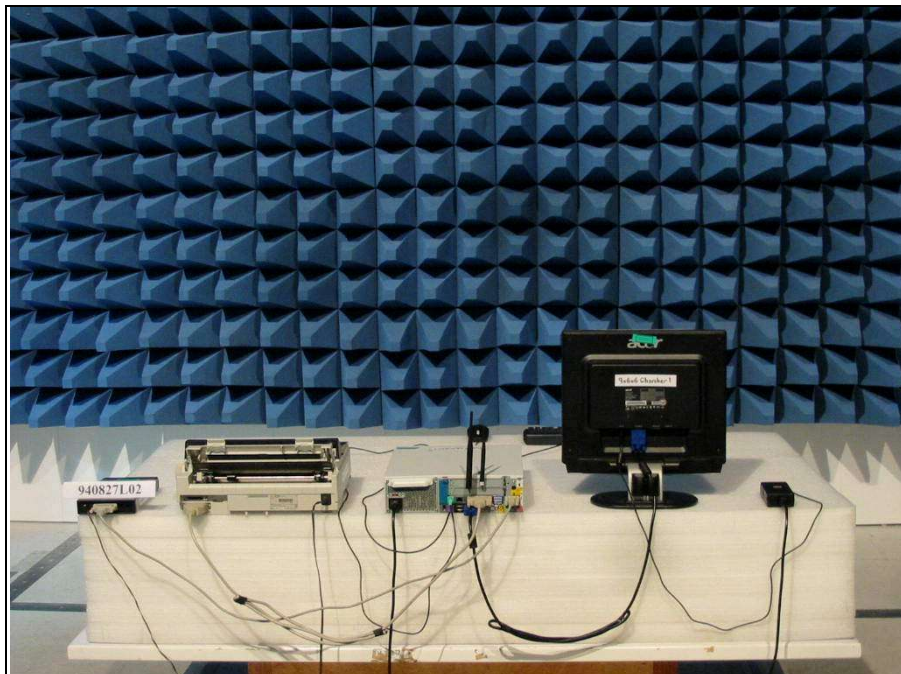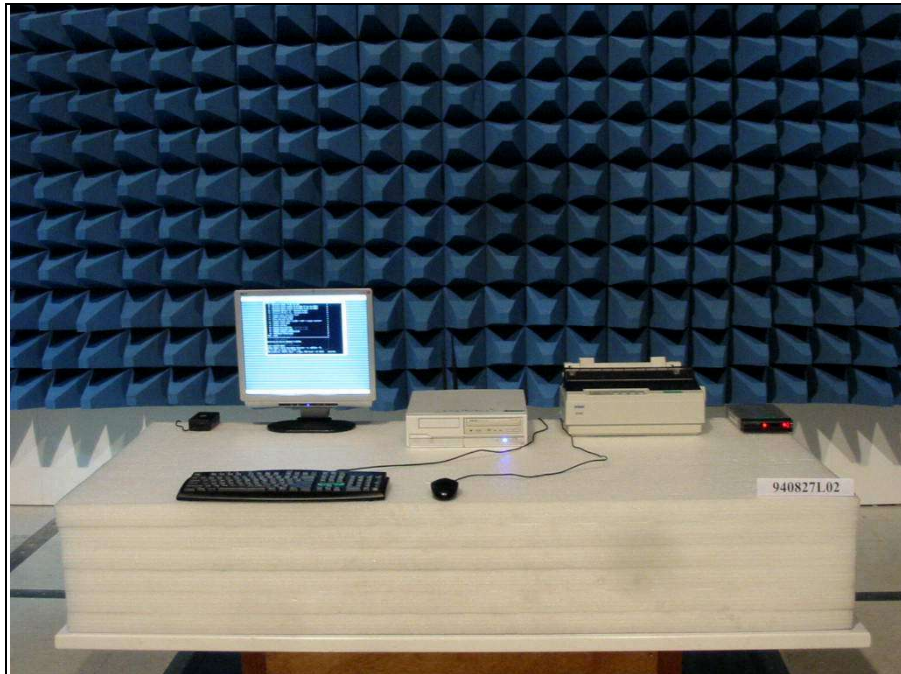



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.