

TEST REPORT

Report No.: BCTC2408319656-1E

Applicant: Radxa Computer (Shenzhen) Co.,Ltd.

Product Name: Radxa ROCK 5C

Test Model: Radxa ROCK 5C D16R26

Tested Date: 2024-08-21 to 2024-08-30

Issued Date: 2024-09-02

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BC6T-ROCK5C

Product Name: Radxa ROCK 5C

Trademark: 

Model/Type Reference: Radxa ROCK 5C D16R26
Radxa ROCK 5C D1R26, Radxa ROCK 5C D2R26, Radxa ROCK 5C D4R26,
Radxa ROCK 5C D8R26, Radxa ROCK 5C D32R26, Radxa ROCK 5C D1R27,
Radxa ROCK 5C D2R27, Radxa ROCK 5C D4R27, Radxa ROCK 5C D8R27,
Radxa ROCK 5C D16R27, Radxa ROCK 5C D32R27

Prepared For: Radxa Computer (Shenzhen) Co.,Ltd.

Address: 1602, Smart Valley, tiezai Road, Gongle community, Xixiang, Baoan, Shenzhen

Manufacturer: Radxa Computer (Shenzhen) Co.,Ltd.

Address: 1602, Smart Valley, tiezai Road, Gongle community, Xixiang, Baoan, Shenzhen

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-08-21

Sample tested Date: 2024-08-21 to 2024-08-30

Issue Date: 2024-09-02


Report No.: BCTC2408319656-1E

Test Standards: FCC Part15.247
ANSI C63.10-2013

Test Results: PASS


Remark: This is Bluetooth Classic radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
4.6 Table Of Parameters Of Text Software Setting	11
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result	15
7. Radiated emissions	19
7.1 Block Diagram Of Test Setup	19
7.2 Limit	20
7.3 Test procedure	21
7.4 EUT operating Conditions	22
7.5 Test Result	22
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	30
8.1 Block Diagram Of Test Setup	30
8.2 Limit	30
8.3 Test procedure	31
8.4 EUT operating Conditions	31
8.5 Test Result	32
9. Spurious RF Conducted Emissions	33
9.1 Block Diagram Of Test Setup	33
9.2 Limit	33
9.3 Test procedure	33
9.4 Test Result	34
10. 20 dB Bandwidth	55
10.1 Block Diagram Of Test Setup	55
10.2 Limit	55
10.3 Test procedure	55
10.4 Test Result	55
11. Maximum Peak Output Power	61
11.1 Block Diagram Of Test Setup	61
11.2 Limit	61

11.3	Test procedure	61
11.4	Test Result	61
12.	Hopping Channel Separation	67
12.1	Block Diagram Of Test Setup.....	67
12.2	Limit	67
12.3	Test procedure	67
12.4	Test Result	67
13.	Number Of Hopping Frequency.....	73
13.1	Block Diagram Of Test Setup.....	73
13.2	Limit	73
13.3	Test procedure	73
13.4	Test Result	73
14.	Dwell Time.....	76
14.1	Block Diagram Of Test Setup.....	76
14.2	Limit	76
14.3	Test procedure	76
14.4	Test Result	77
15.	Antenna Requirement	87
15.1	Limit	87
15.2	Test Result	87
16.	EUT Photographs	88
17.	EUT Test Setup Photographs.....	89

(Note: N/A Means Not Applicable)

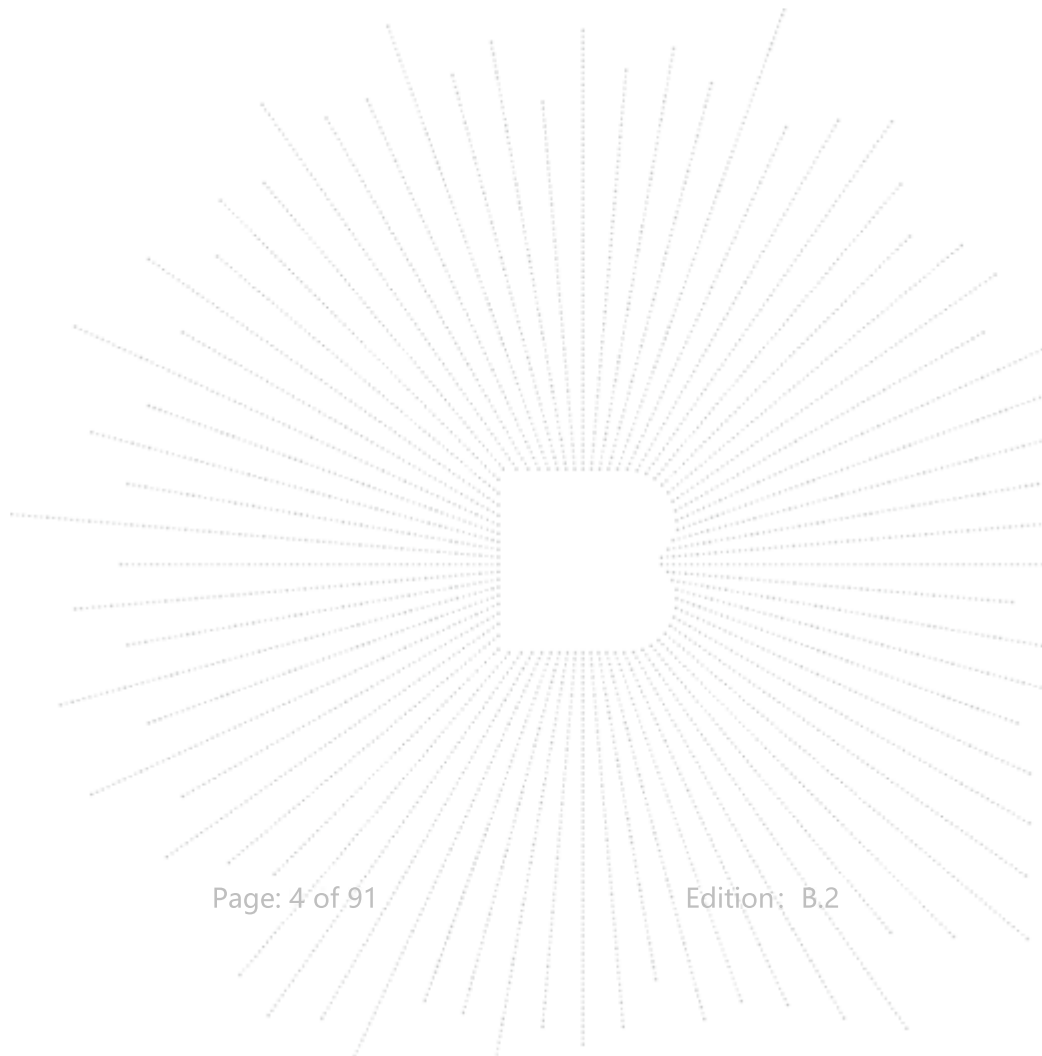

1. Version

Report No.	Issue Date	Description	Approved
BCTC2408319656-1E	2024-09-02	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted emission AC power port	§15.207	PASS
2	Conducted peak output power for FHSS	§15.247(b)(1)	PASS
3	20dB Occupied bandwidth	§15.247(a)(1)	PASS
4	Hopping channel separation	§15.247(a)(1)	PASS
5	Number of hopping frequencies	§15.247(a)(1)(iii)	PASS
6	Dwell Time	§15.247(a)(1)(iii)	PASS
7	Spurious RF conducted emissions	§15.247(d)	PASS
8	Band edge	§15.247(d)	PASS
9	Spurious radiated emissions for transmitter	§15.247(d) & §15.209 & §15.205	PASS
10	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup

4.1 Product Information

Model/Type reference:	Radxa ROCK 5C D16R26 Radxa ROCK 5C D1R26, Radxa ROCK 5C D2R26, Radxa ROCK 5C D4R26, Radxa ROCK 5C D8R26, Radxa ROCK 5C D32R26, Radxa ROCK 5C D1R27, Radxa ROCK 5C D2R27, Radxa ROCK 5C D4R27, Radxa ROCK 5C D8R27, Radxa ROCK 5C D16R27, Radxa ROCK 5C D32R27
Model differences:	All models are the same circuit and RF module, only the model name and memory size, and the SoC model are different.
Bluetooth Version:	5.0
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number Of Channel	79CH
Antenna installation:	FPC antenna 1.73 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 5V from adapter

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Adapter	HP	TPN-LA22	---	---
2.	keyboard	Logitech	1641MG01DLZ8	---	---
3.	Mouse	Logitech	M-U0026	---	---
4.	Earphone	IHIP	SBGE1	---	---
5.	U disk	SanDisk	32G	---	---
6.	Router	HUAWEI	WS318	---	---
7.	HDMI Cable	Belkin	HDMI2.0	---	---
8.	Display	ChangHong	55DBK	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	3M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Test mode	Low channel	Middle channel	High channel
1	Transmitting(GFSK)	2402MHz	2441MHz	2480MHz
2	Transmitting($\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
3	Transmitting(8DPSK)	2402MHz	2441MHz	2480MHz
4	BT+WIFI+HDMI+RJ45+keyboard+Mouse+USB+Earphone (Conducted emission & Radiated emission)			

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) Fully-charged battery is used during the test

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

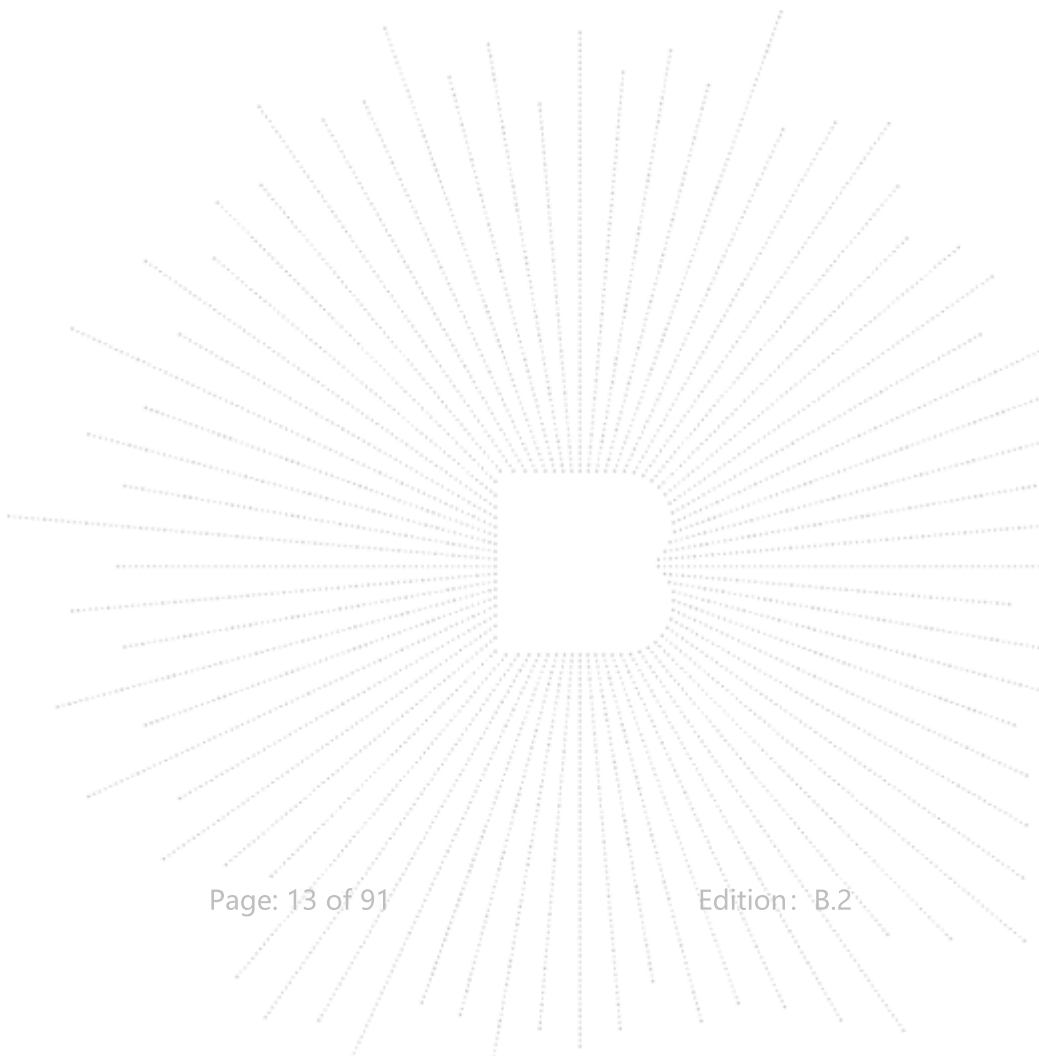

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

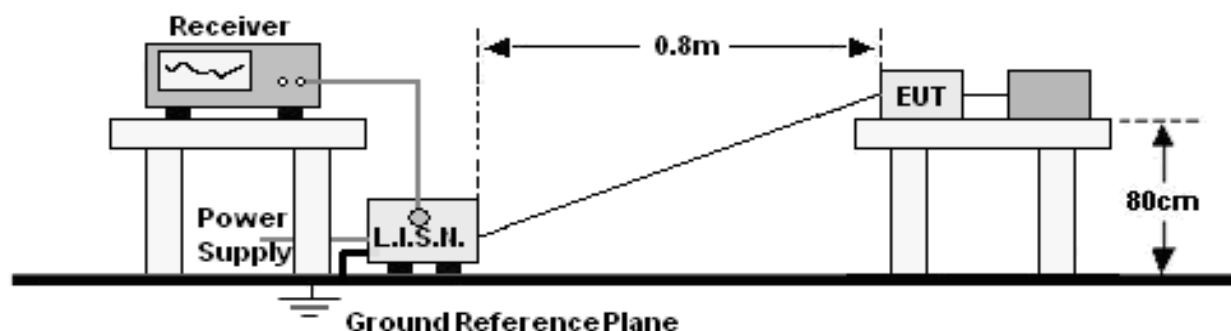

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

RK3582

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

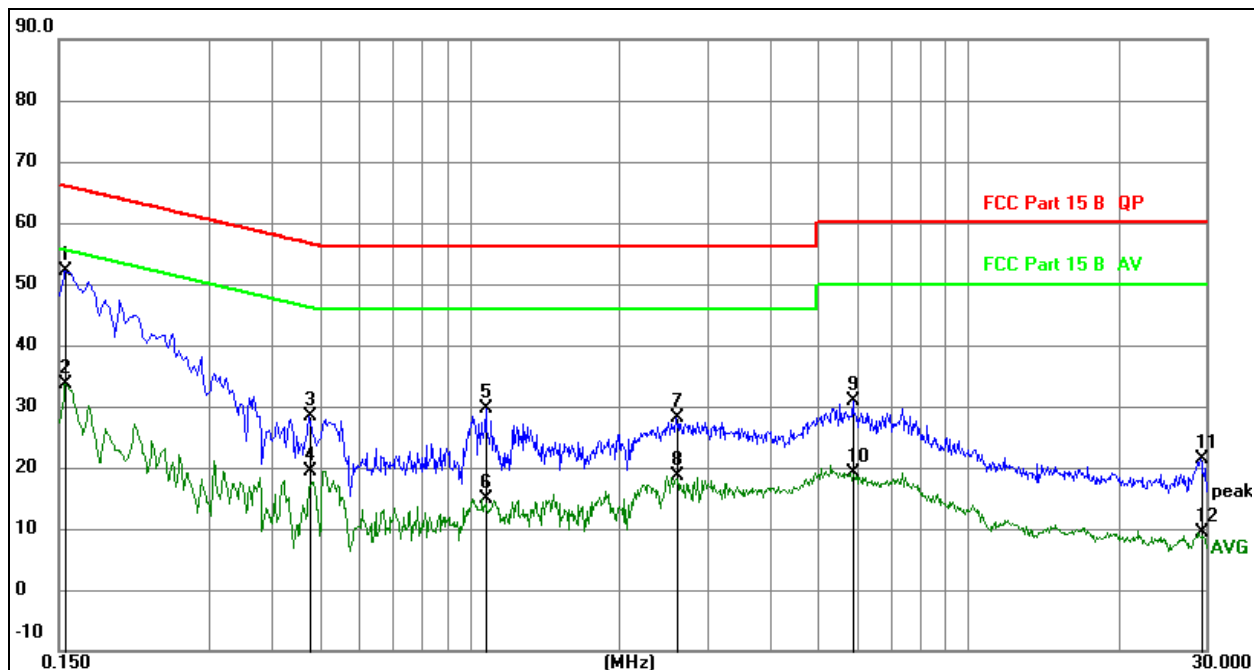


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1545	31.97	20.07	52.04	65.75	-13.71	QP
2		0.1545	13.52	20.07	33.59	55.75	-22.16	AVG
3		0.4785	8.22	20.08	28.30	56.37	-28.07	QP
4		0.4785	-0.62	20.08	19.46	46.37	-26.91	AVG
5		1.0770	9.54	20.09	29.63	56.00	-26.37	QP
6		1.0770	-5.33	20.09	14.76	46.00	-31.24	AVG
7		2.6070	8.09	20.11	28.20	56.00	-27.80	QP
8		2.6070	-1.51	20.11	18.60	46.00	-27.40	AVG
9		5.8830	10.80	20.15	30.95	60.00	-29.05	QP
10		5.8830	-1.01	20.15	19.14	50.00	-30.86	AVG
11		29.3505	1.16	20.27	21.43	60.00	-38.57	QP
12		29.3505	-10.98	20.27	9.29	50.00	-40.71	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

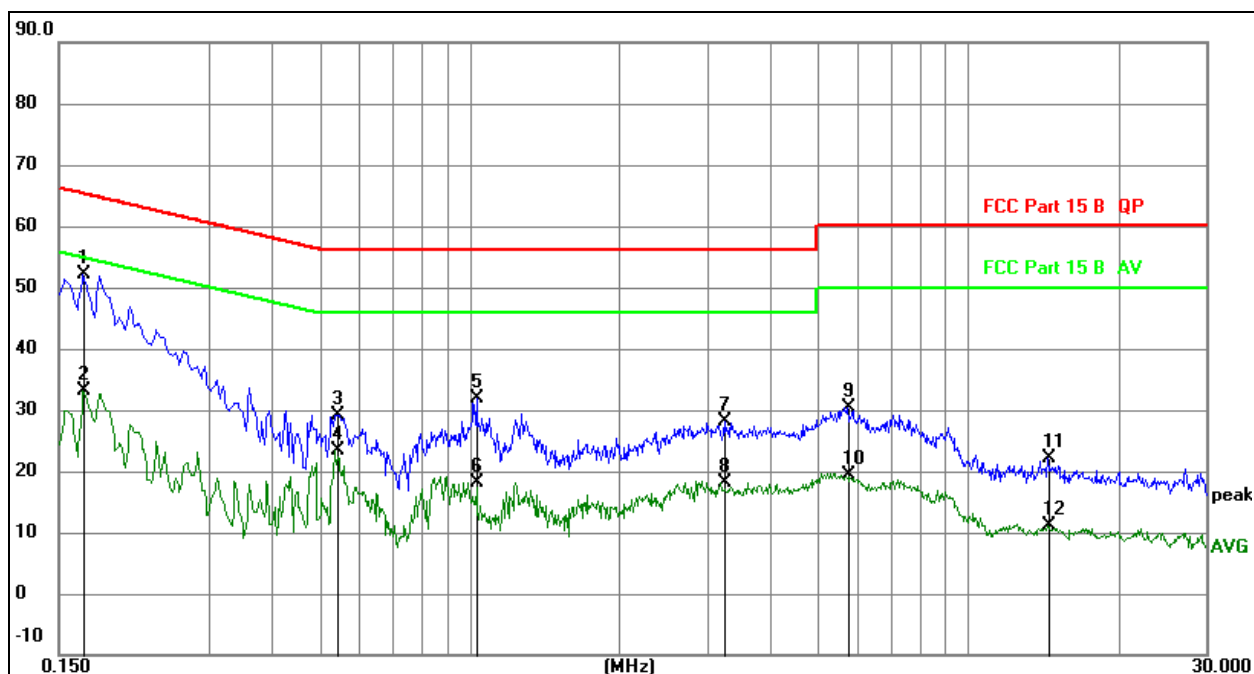


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1680	31.95	20.07	52.02	65.06	-13.04	QP
2		0.1680	13.16	20.07	33.23	55.06	-21.83	AVG
3		0.5415	9.14	20.08	29.22	56.00	-26.78	QP
4		0.5415	3.33	20.08	23.41	46.00	-22.59	AVG
5		1.0320	11.90	20.09	31.99	56.00	-24.01	QP
6		1.0320	-1.86	20.09	18.23	46.00	-27.77	AVG
7		3.2505	7.90	20.13	28.03	56.00	-27.97	QP
8		3.2505	-2.10	20.13	18.03	46.00	-27.97	AVG
9		5.7390	10.31	20.15	30.46	60.00	-29.54	QP
10		5.7390	-0.88	20.15	19.27	50.00	-30.73	AVG
11		14.4645	1.79	20.29	22.08	60.00	-37.92	QP
12		14.4645	-9.27	20.29	11.02	50.00	-38.98	AVG

RK3588S2


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

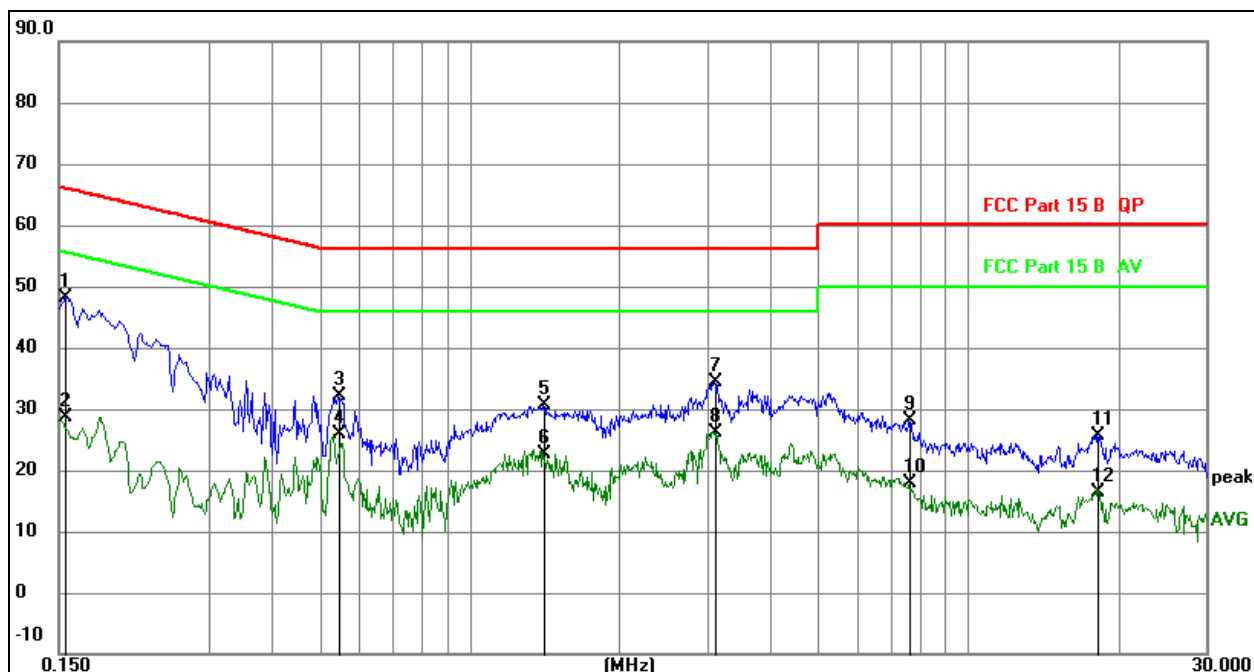
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1	*	0.1544	28.16	20.07	48.23	65.76	-17.53	QP
2		0.1544	8.52	20.07	28.59	55.76	-27.17	AVG
3		0.5459	12.06	20.08	32.14	56.00	-23.86	QP
4		0.5459	5.81	20.08	25.89	46.00	-20.11	AVG
5		1.4100	10.50	20.09	30.59	56.00	-25.41	QP
6		1.4100	2.55	20.09	22.64	46.00	-23.36	AVG
7		3.1065	14.33	20.12	34.45	56.00	-21.55	QP
8		3.1065	6.13	20.12	26.25	46.00	-19.75	AVG
9		7.6333	7.91	20.16	28.07	60.00	-31.93	QP
10		7.6333	-2.26	20.16	17.90	50.00	-32.10	AVG
11		18.1453	5.28	20.32	25.60	60.00	-34.40	QP
12		18.1453	-3.96	20.32	16.36	50.00	-33.64	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

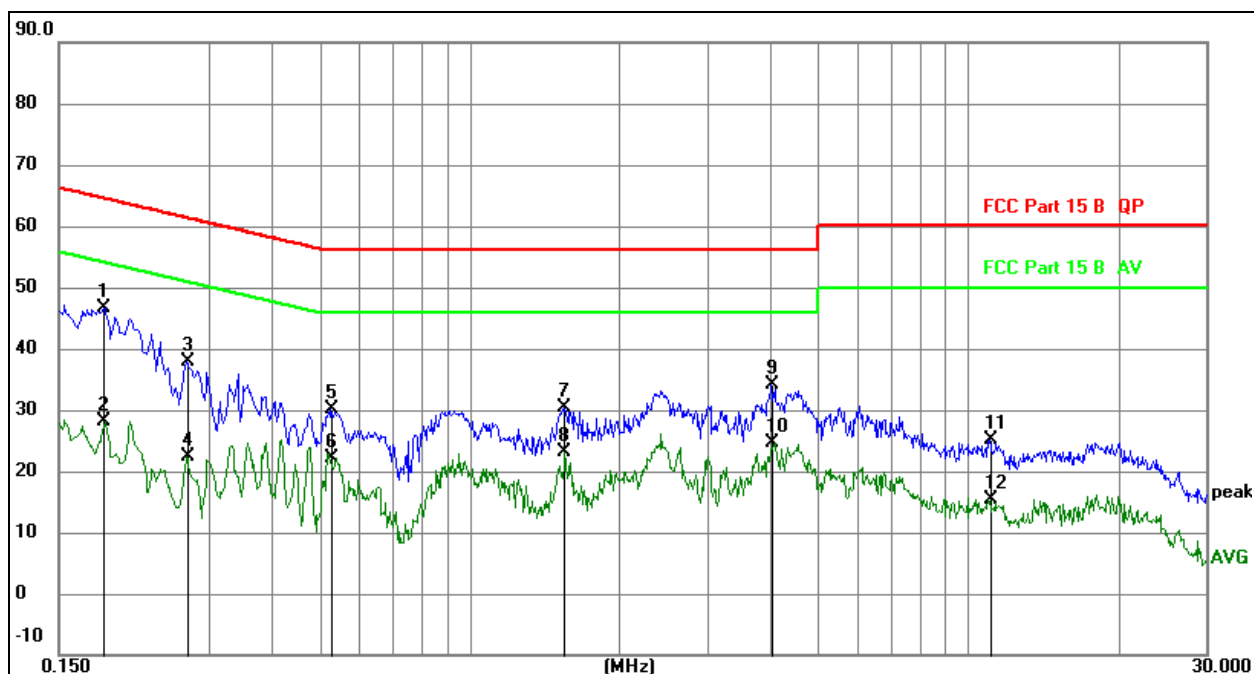

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1844	26.60	20.07	46.67	64.29	-17.62	QP
2		0.1844	8.15	20.07	28.22	54.29	-26.07	AVG
3		0.2714	17.73	20.07	37.80	61.07	-23.27	QP
4		0.2714	2.19	20.07	22.26	51.07	-28.81	AVG
5		0.5279	10.04	20.08	30.12	56.00	-25.88	QP
6		0.5279	2.15	20.08	22.23	46.00	-23.77	AVG
7		1.5494	10.27	20.10	30.37	56.00	-25.63	QP
8		1.5494	2.92	20.10	23.02	46.00	-22.98	AVG
9		4.0425	13.87	20.14	34.01	56.00	-21.99	QP
10		4.0425	4.58	20.14	24.72	46.00	-21.28	AVG
11		11.0265	4.85	20.20	25.05	60.00	-34.95	QP
12		11.0265	-4.70	20.20	15.50	50.00	-34.50	AVG


7. Radiated emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

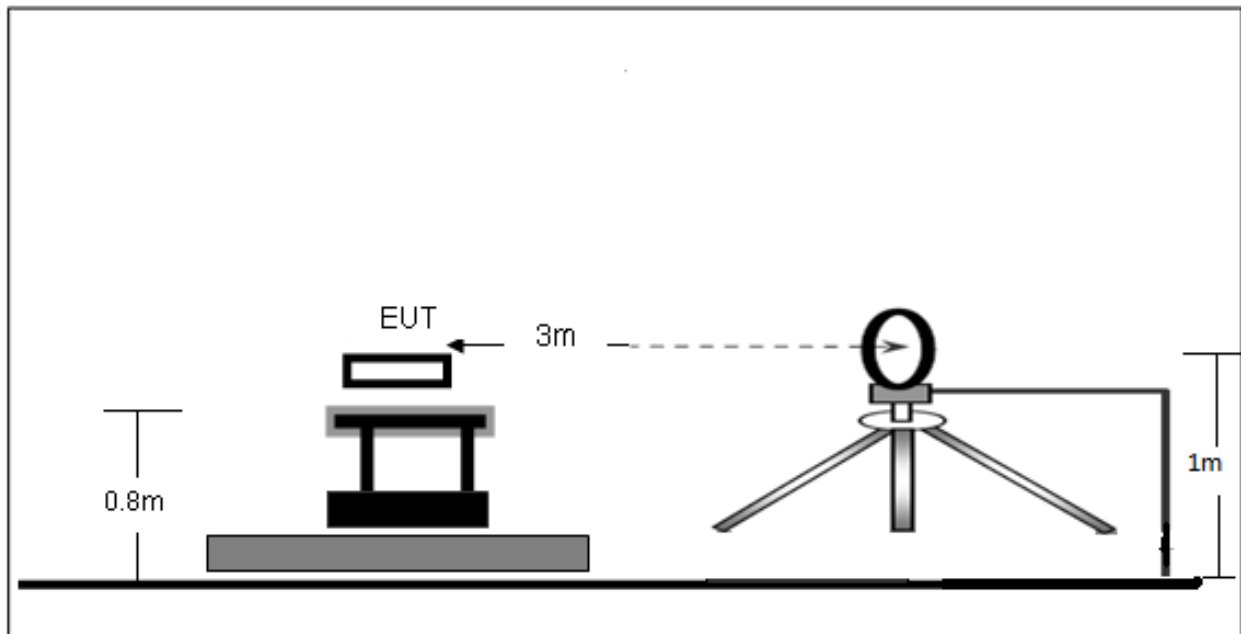

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

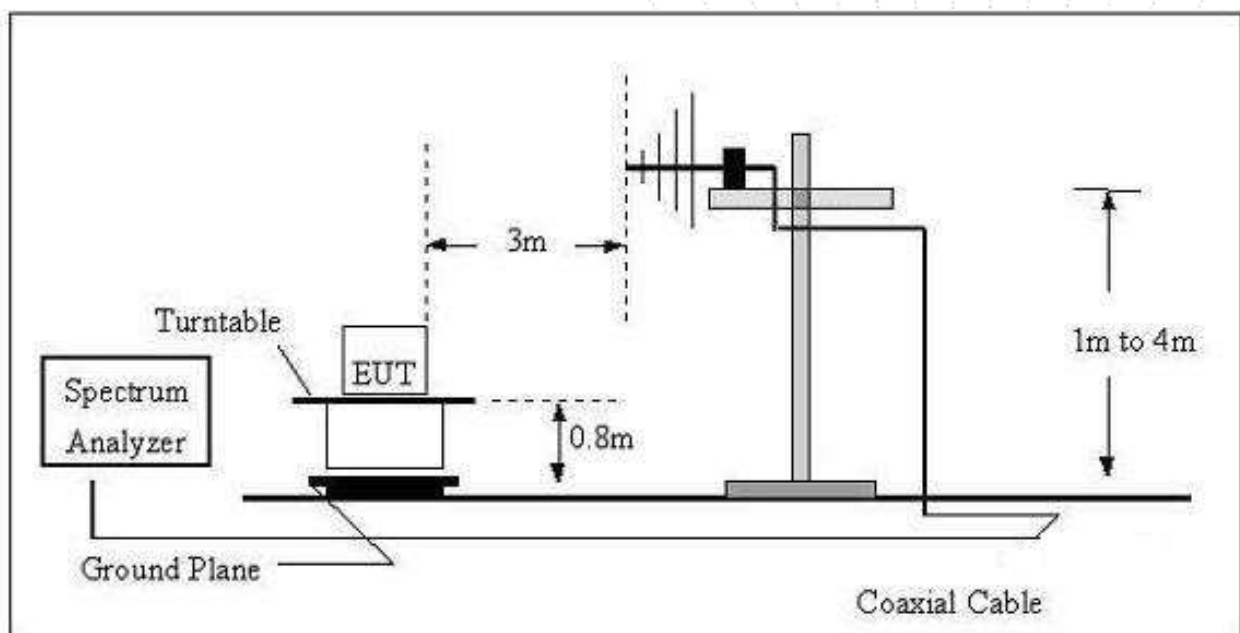

(C) Radiated Emission Test-Up Frequency Above 1GHz

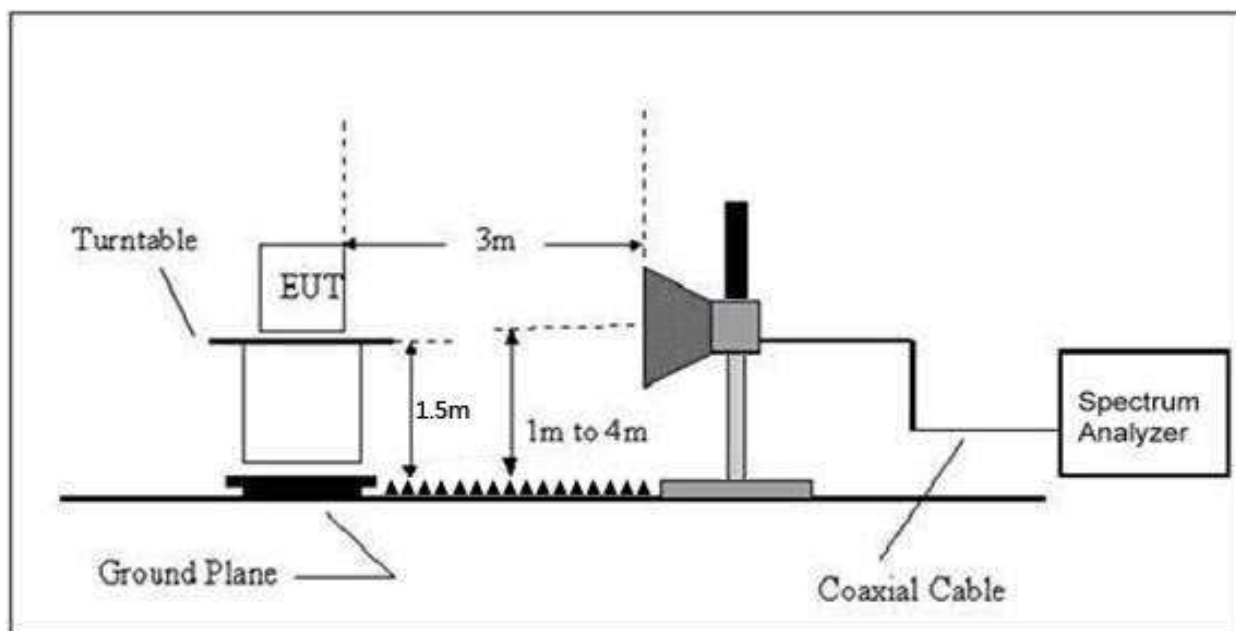

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

RK3582

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

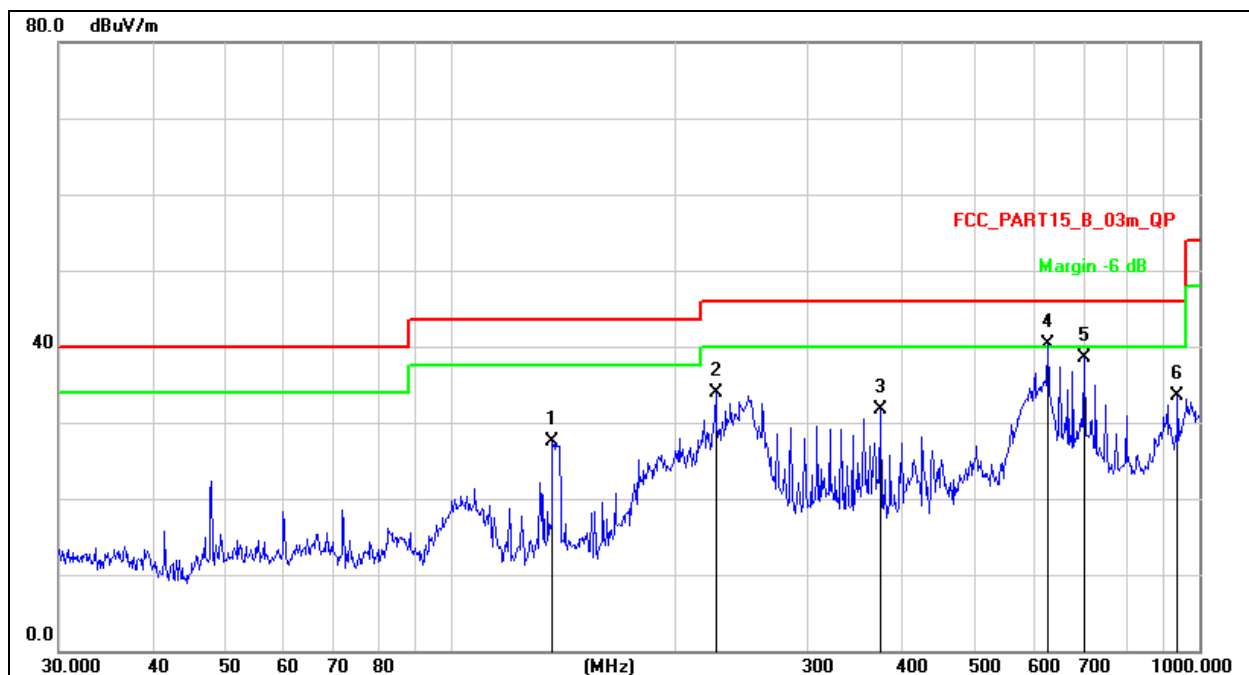


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		136.9391	46.01	-18.52	27.49	43.50	-16.01	QP
2		226.0994	48.97	-14.97	34.00	46.00	-12.00	QP
3		375.9385	42.77	-11.15	31.62	46.00	-14.38	QP
4	*	627.2738	46.76	-6.55	40.21	46.00	-5.79	QP
5		701.7610	44.21	-5.68	38.53	46.00	-7.47	QP
6		935.5463	36.50	-2.99	33.51	46.00	-12.49	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

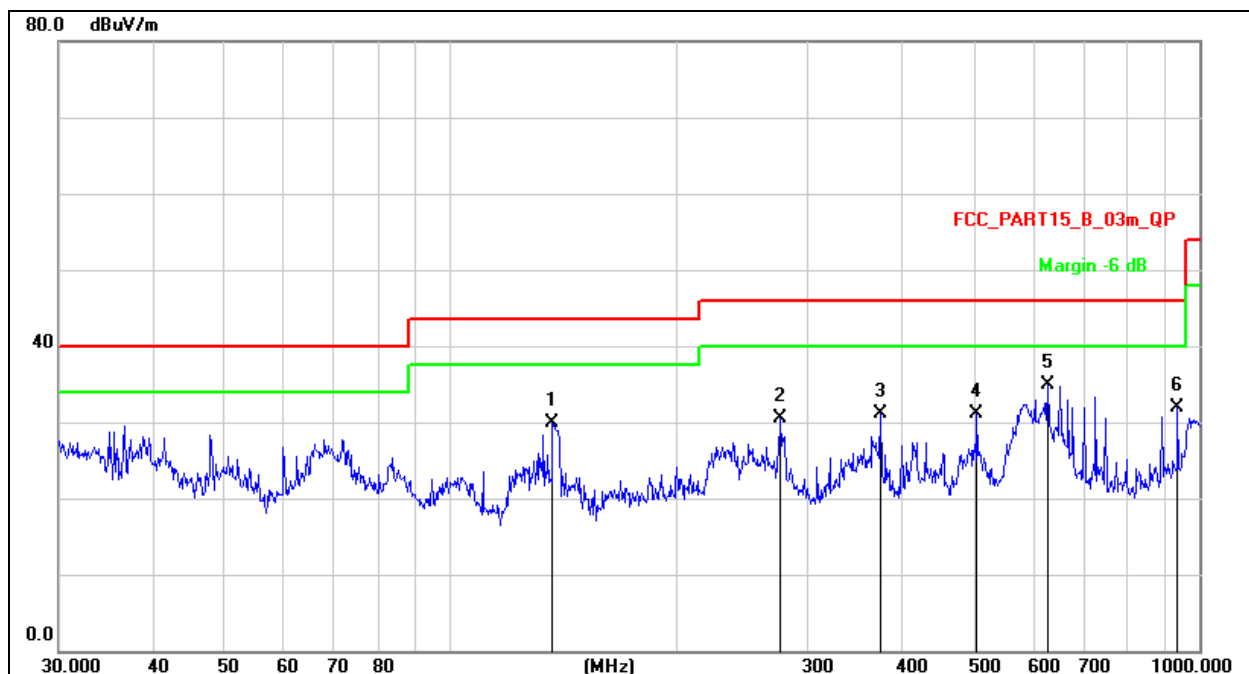


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		136.9391	48.41	-18.52	29.89	43.50	-13.61	QP
2		276.1235	44.27	-13.74	30.53	46.00	-15.47	QP
3		375.9385	42.19	-11.15	31.04	46.00	-14.96	QP
4		504.7062	39.81	-8.78	31.03	46.00	-14.97	QP
5	*	627.2738	41.40	-6.55	34.85	46.00	-11.15	QP
6		935.5463	34.98	-2.99	31.99	46.00	-14.01	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

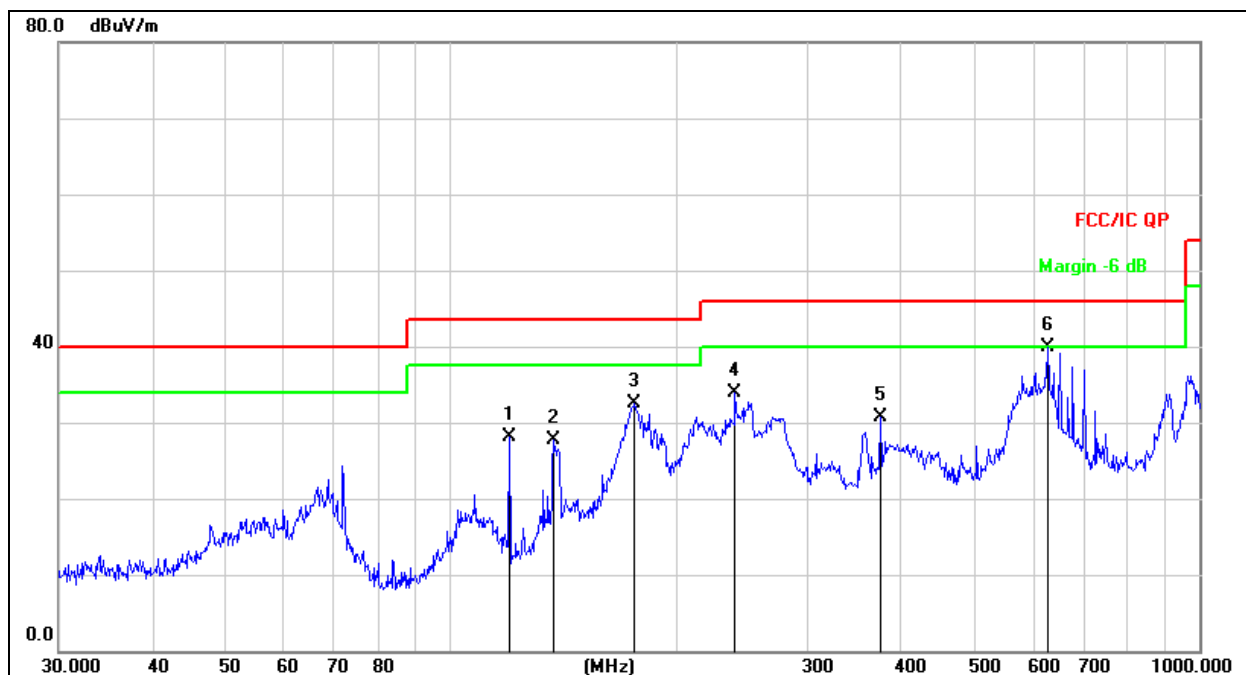


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		119.8556	45.43	-17.32	28.11	43.50	-15.39	QP
2		137.4202	46.22	-18.55	27.67	43.50	-15.83	QP
3		176.2686	49.97	-17.48	32.49	43.50	-11.01	QP
4		239.9874	48.50	-14.58	33.92	46.00	-12.08	QP
5		375.9385	41.92	-11.15	30.77	46.00	-15.23	QP
6	*	627.2738	46.36	-6.55	39.81	46.00	-6.19	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

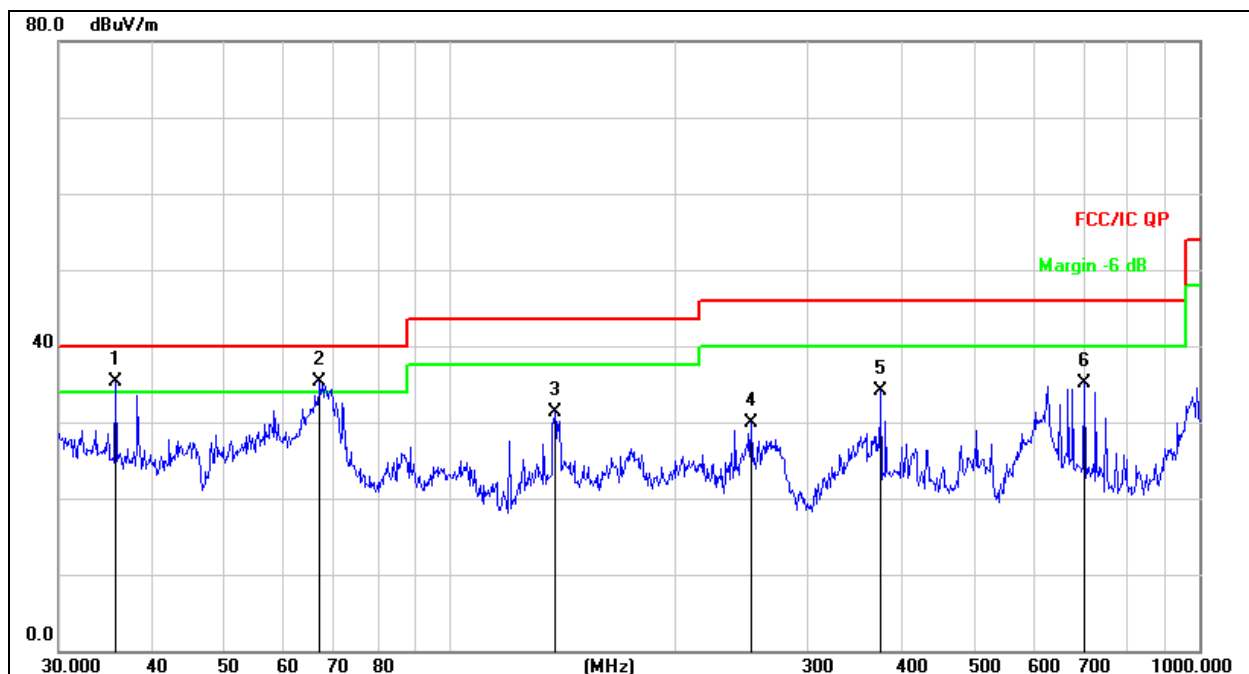

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	35.7490	50.85	-15.54	35.31	40.00	-4.69	QP
2	!	66.9669	52.45	-17.17	35.28	40.00	-4.72	QP
3		137.9028	49.98	-18.58	31.40	43.50	-12.10	QP
4		252.0627	44.24	-14.25	29.99	46.00	-16.01	QP
5		375.9385	45.24	-11.15	34.09	46.00	-11.91	QP
6		701.7610	40.71	-5.68	35.03	46.00	-10.97	QP

Between 1GHz – 25GHz

Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
GFSK Low channel							
V	4804.00	75.18	-19.99	55.19	74.00	-18.81	PK
V	4804.00	66.98	-19.99	46.99	54.00	-7.01	AV
V	7206.00	65.23	-14.22	51.01	74.00	-22.99	PK
V	7206.00	54.66	-14.22	40.44	54.00	-13.56	AV
H	4804.00	74.06	-19.99	54.07	74.00	-19.93	PK
H	4804.00	64.87	-19.99	44.88	54.00	-9.12	AV
H	7206.00	63.59	-14.22	49.37	74.00	-24.63	PK
H	7206.00	54.82	-14.22	40.60	54.00	-13.40	AV
GFSK Middle channel							
V	4882.00	72.94	-19.84	53.10	74.00	-20.90	PK
V	4882.00	65.26	-19.84	45.42	54.00	-8.58	AV
V	7323.00	63.26	-13.90	49.36	74.00	-24.64	PK
V	7323.00	53.73	-13.90	39.83	54.00	-14.17	AV
H	4882.00	69.52	-19.84	49.68	74.00	-24.32	PK
H	4882.00	59.25	-19.84	39.41	54.00	-14.59	AV
H	7323.00	62.26	-13.90	48.36	74.00	-25.64	PK
H	7323.00	54.73	-13.90	40.83	54.00	-13.17	AV
GFSK High channel							
V	4960.00	75.88	-19.68	56.20	74.00	-17.80	PK
V	4960.00	65.38	-19.68	45.70	54.00	-8.30	AV
V	7440.00	66.97	-13.57	53.40	74.00	-20.60	PK
V	7440.00	56.14	-13.57	42.57	54.00	-11.43	AV
H	4960.00	74.07	-19.68	54.39	74.00	-19.61	PK
H	4960.00	64.96	-19.68	45.28	54.00	-8.72	AV
H	7440.00	64.98	-13.57	51.41	74.00	-22.59	PK
H	7440.00	57.03	-13.57	43.46	54.00	-10.54	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
π /4DQPSK Low channel							
V	4804.00	74.52	-19.99	54.53	74.00	-19.47	PK
V	4804.00	63.54	-19.99	43.55	54.00	-10.45	AV
V	7206.00	64.28	-14.22	50.06	74.00	-23.94	PK
V	7206.00	53.54	-14.22	39.32	54.00	-14.68	AV
H	4804.00	69.70	-19.99	49.71	74.00	-24.29	PK
H	4804.00	59.94	-19.99	39.95	54.00	-14.05	AV
H	7206.00	61.97	-14.22	47.75	74.00	-26.25	PK
H	7206.00	53.34	-14.22	39.12	54.00	-14.88	AV
π /4DQPSK Middle channel							
V	4882.00	73.48	-19.84	53.64	74.00	-20.36	PK
V	4882.00	67.25	-19.84	47.41	54.00	-6.59	AV
V	7323.00	63.64	-13.90	49.74	74.00	-24.26	PK
V	7323.00	55.40	-13.90	41.50	54.00	-12.50	AV
H	4882.00	72.23	-19.84	52.39	74.00	-21.61	PK
H	4882.00	62.41	-19.84	42.57	54.00	-11.43	AV
H	7323.00	60.82	-13.90	46.92	74.00	-27.08	PK
H	7323.00	53.72	-13.90	39.82	54.00	-14.18	AV
π /4DQPSK High channel							
V	4960.00	74.61	-19.68	54.93	74.00	-19.07	PK
V	4960.00	64.72	-19.68	45.04	54.00	-8.96	AV
V	7440.00	67.14	-13.57	53.57	74.00	-20.43	PK
V	7440.00	56.66	-13.57	43.09	54.00	-10.91	AV
H	4960.00	73.32	-19.68	53.64	74.00	-20.36	PK
H	4960.00	63.83	-19.68	44.15	54.00	-9.85	AV
H	7440.00	64.70	-13.57	51.13	74.00	-22.87	PK
H	7440.00	56.05	-13.57	42.48	54.00	-11.52	AV

Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
- Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
8DPSK Low channel							
V	4804.00	75.56	-19.99	55.57	74.00	-18.43	PK
V	4804.00	66.77	-19.99	46.78	54.00	-7.22	AV
V	7206.00	64.60	-14.22	50.38	74.00	-23.62	PK
V	7206.00	55.40	-14.22	41.18	54.00	-12.82	AV
H	4804.00	72.35	-19.99	52.36	74.00	-21.64	PK
H	4804.00	61.63	-19.99	41.64	54.00	-12.36	AV
H	7206.00	61.70	-14.22	47.48	74.00	-26.52	PK
H	7206.00	54.01	-14.22	39.79	54.00	-14.21	AV
8DPSK Middle channel							
V	4882.00	71.88	-19.84	52.04	74.00	-21.96	PK
V	4882.00	64.58	-19.84	44.74	54.00	-9.26	AV
V	7323.00	64.32	-13.90	50.42	74.00	-23.58	PK
V	7323.00	55.70	-13.90	41.80	54.00	-12.20	AV
H	4882.00	68.12	-19.84	48.28	74.00	-25.72	PK
H	4882.00	58.99	-19.84	39.15	54.00	-14.85	AV
H	7323.00	62.53	-13.90	48.63	74.00	-25.37	PK
H	7323.00	54.93	-13.90	41.03	54.00	-12.97	AV
8DPSK High channel							
V	4960.00	74.55	-19.68	54.87	74.00	-19.13	PK
V	4960.00	64.73	-19.68	45.05	54.00	-8.95	AV
V	7440.00	66.97	-13.57	53.40	74.00	-20.60	PK
V	7440.00	57.59	-13.57	44.02	54.00	-9.98	AV
H	4960.00	72.17	-19.68	52.49	74.00	-21.51	PK
H	4960.00	62.69	-19.68	43.01	54.00	-10.99	AV
H	7440.00	65.44	-13.57	51.87	74.00	-22.13	PK
H	7440.00	57.65	-13.57	44.08	54.00	-9.92	AV


Remark:

1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,
Over= Measurement – Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

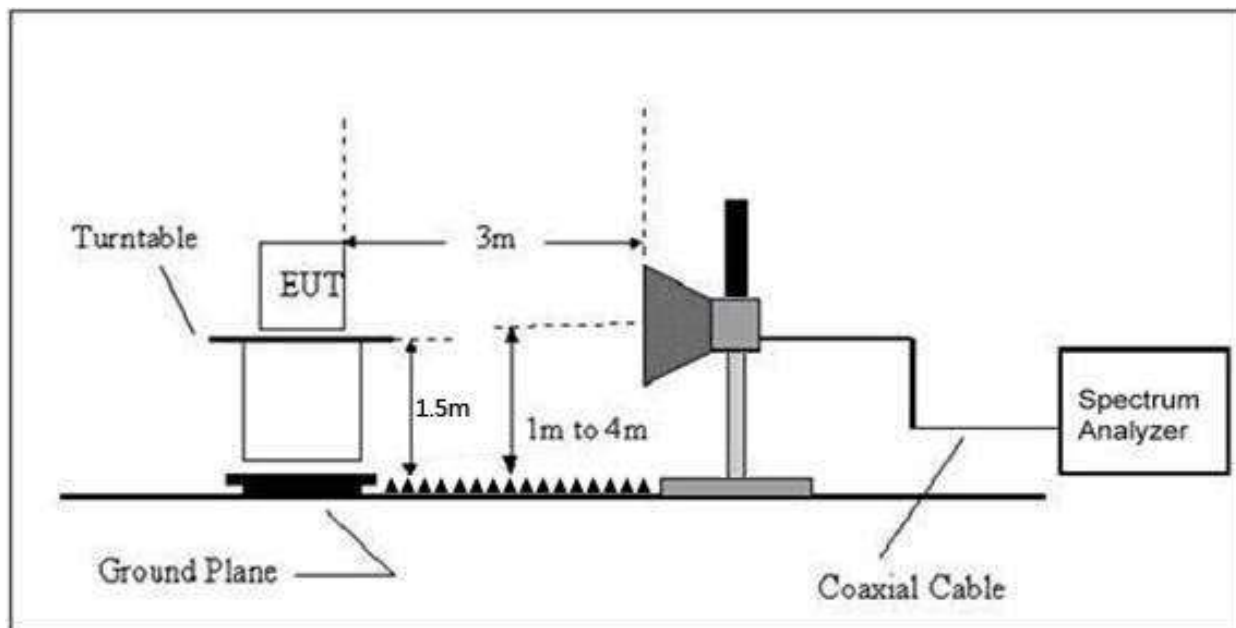

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(³)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (Emission In Restricted Band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

	Polar (H/V)	Fre- quency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
GFSK	Low Channel 2402MHz							
	H	2390.00	72.19	-25.43	46.76	74.00	54.00	PASS
	H	2400.00	75.34	-25.40	49.94	74.00	54.00	PASS
	V	2390.00	72.63	-25.43	47.20	74.00	54.00	PASS
	V	2400.00	77.05	-25.40	51.65	74.00	54.00	PASS
	High Channel 2480MHz							
	H	2483.50	74.83	-25.15	49.68	74.00	54.00	PASS
	H	2500.00	71.63	-25.10	46.53	74.00	54.00	PASS
	V	2483.50	75.16	-25.15	50.01	74.00	54.00	PASS
	V	2500.00	71.48	-25.10	46.38	74.00	54.00	PASS
π /4DQPSK	Low Channel 2402MHz							
	H	2390.00	72.86	-25.43	47.43	74.00	54.00	PASS
	H	2400.00	76.80	-25.40	51.40	74.00	54.00	PASS
	V	2390.00	73.81	-25.43	48.38	74.00	54.00	PASS
	V	2400.00	77.09	-25.40	51.69	74.00	54.00	PASS
	High Channel 2480MHz							
	H	2483.50	76.77	-25.15	51.62	74.00	54.00	PASS
	H	2500.00	70.23	-25.10	45.13	74.00	54.00	PASS
	V	2483.50	76.99	-25.15	51.84	74.00	54.00	PASS
	V	2500.00	72.63	-25.10	47.53	74.00	54.00	PASS
8DPSK	Low Channel 2402MHz							
	H	2390.00	71.67	-25.43	46.24	74.00	54.00	PASS
	H	2400.00	75.43	-25.40	50.03	74.00	54.00	PASS
	V	2390.00	70.97	-25.43	45.54	74.00	54.00	PASS
	V	2400.00	75.11	-25.40	49.71	74.00	54.00	PASS
	High Channel 2480MHz							
	H	2483.50	74.64	-25.15	49.49	74.00	54.00	PASS
	H	2500.00	69.37	-25.10	44.27	74.00	54.00	PASS
	V	2483.50	73.11	-25.15	47.96	74.00	54.00	PASS
	V	2500.00	68.69	-25.10	43.59	74.00	54.00	PASS
Remark:								
1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier, Over= Measurement - Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

9. Spurious RF Conducted Emissions

9.1 Block Diagram Of Test Setup



9.2 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

9.4 Test Result



Tx. Spurious NVNT 1-DH1 2441MHz




Tx. Spurious NVNT 1-DH1 2441MHz Emission



Tx. Spurious NVNT 1-DH1 2480MHz




Tx. Spurious NVNT 1-DH1 2480MHz Emission

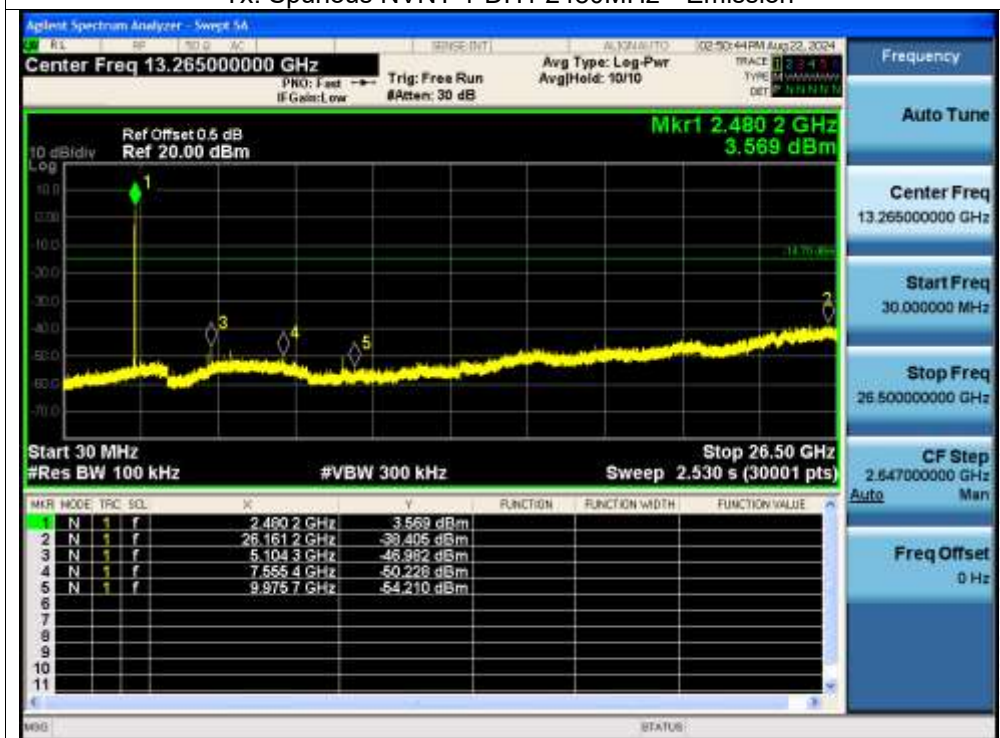

Tx. Spurious NVNT 2-DH1 2402MHz




Tx. Spurious NVNT 2-DH1 2402MHz Emission

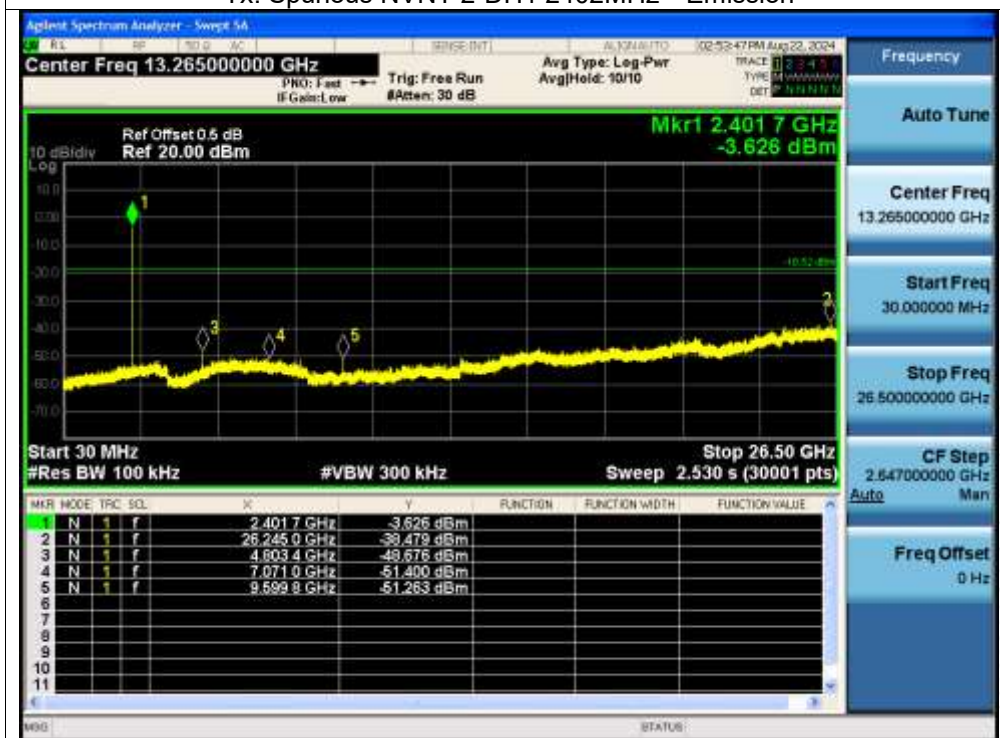

Tx. Spurious NVNT 2-DH1 2441MHz




Tx. Spurious NVNT 2-DH1 2441MHz Emission

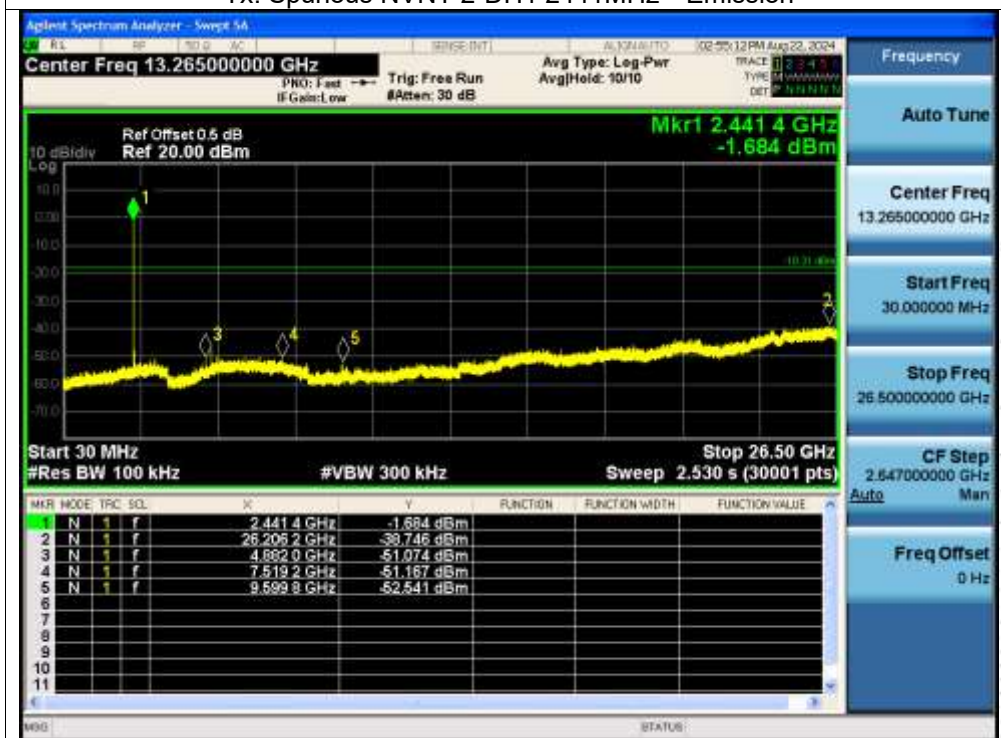

Tx. Spurious NVNT 2-DH1 2480MHz




Tx. Spurious NVNT 2-DH1 2480MHz Emission

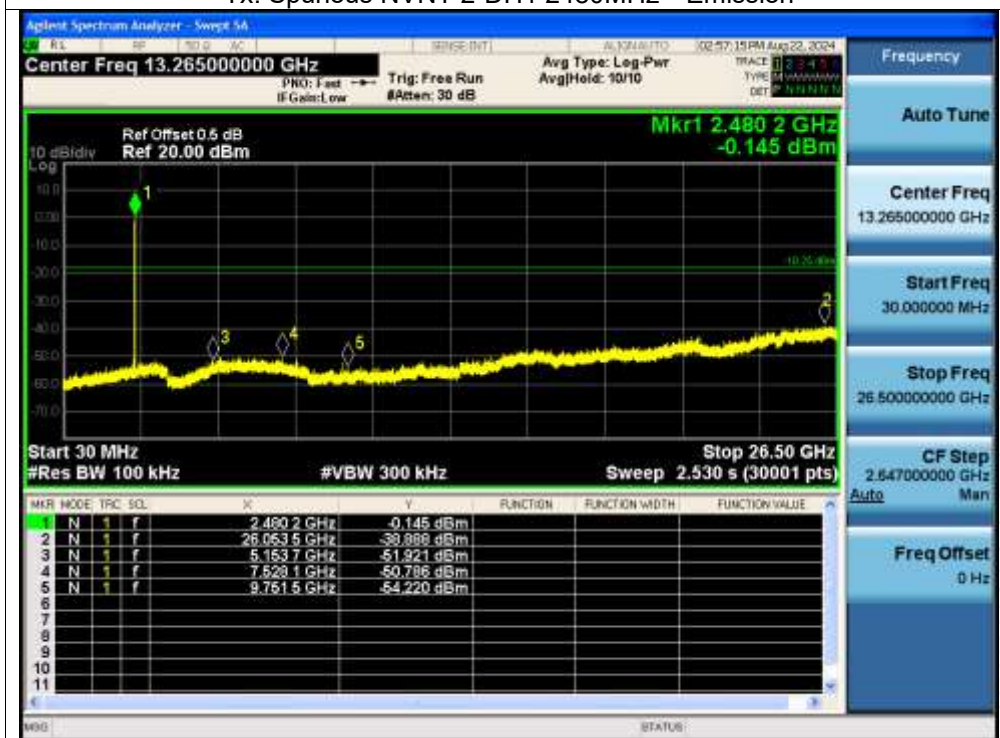

Tx. Spurious NVNT 3-DH1 2402MHz



Tx. Spurious NVNT 3-DH1 2402MHz Emission

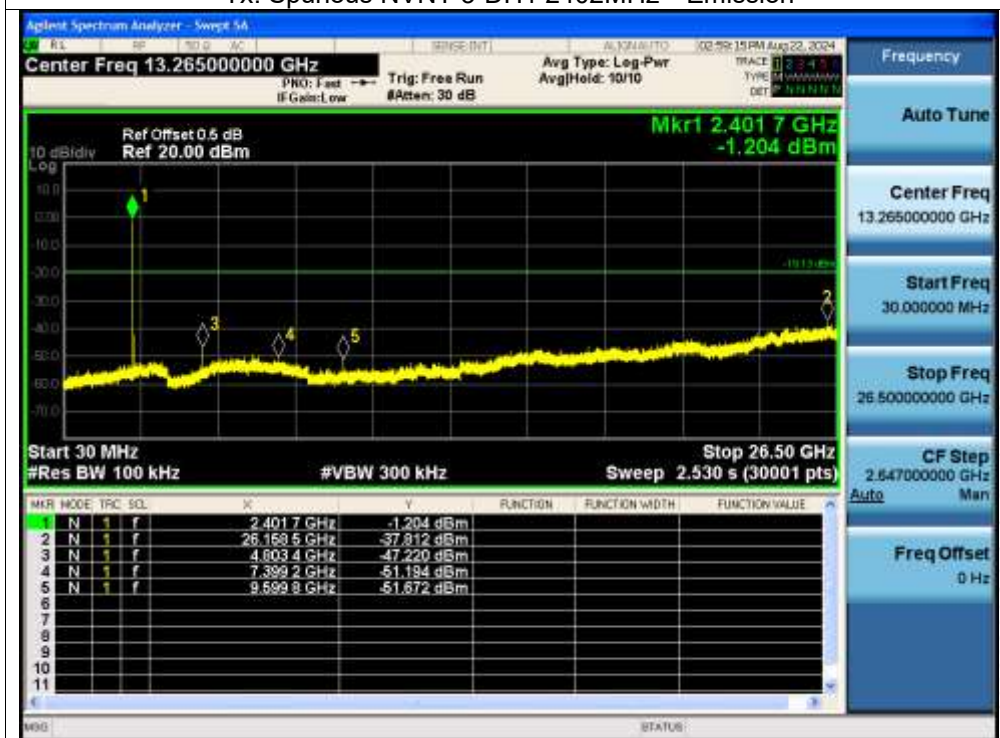

Tx. Spurious NVNT 3-DH1 2441MHz




Tx. Spurious NVNT 3-DH1 2441MHz Emission



Tx. Spurious NVNT 3-DH1 2480MHz




Tx. Spurious NVNT 3-DH1 2480MHz Emission

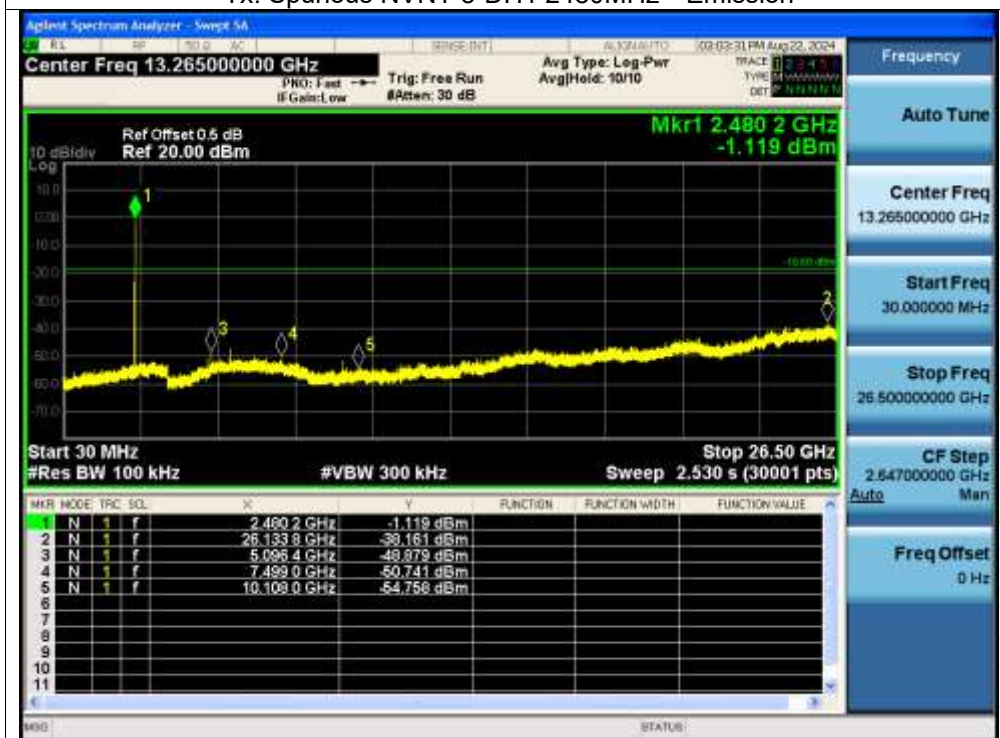


Test Graphs


Band Edge NVNT 1-DH1 2402MHz No-Hopping

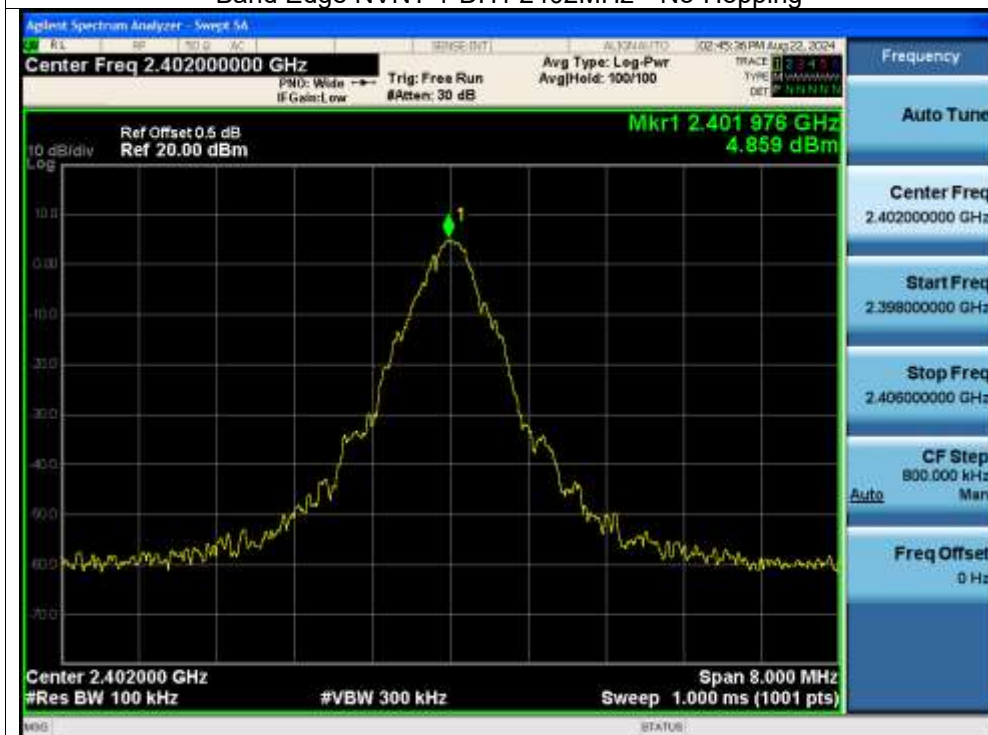


Band Edge NVNT 1-DH1 2402MHz No-Hopping Emission

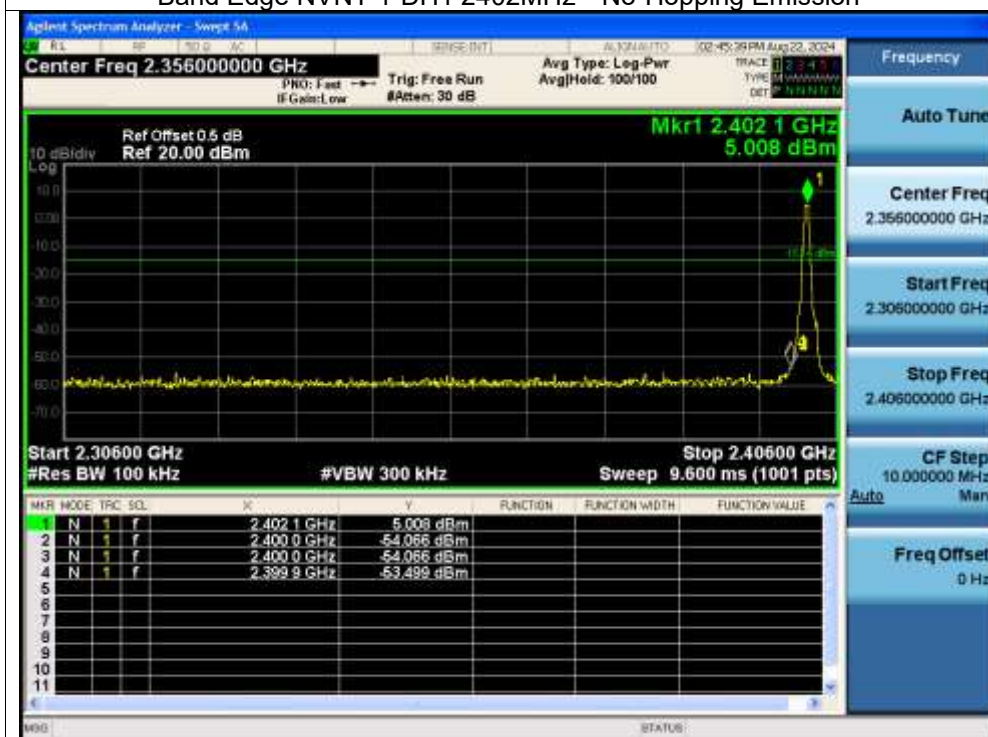

Band Edge NVNT 1-DH1 2480MHz No-Hopping

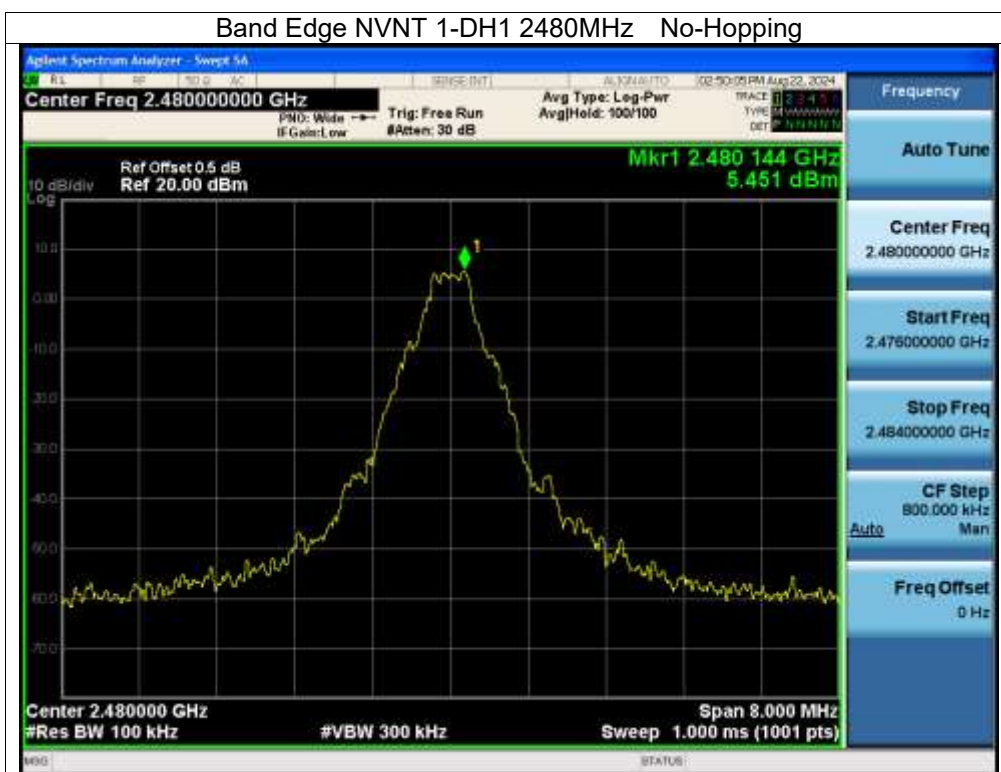


Band Edge NVNT 1-DH1 2480MHz No-Hopping Emission

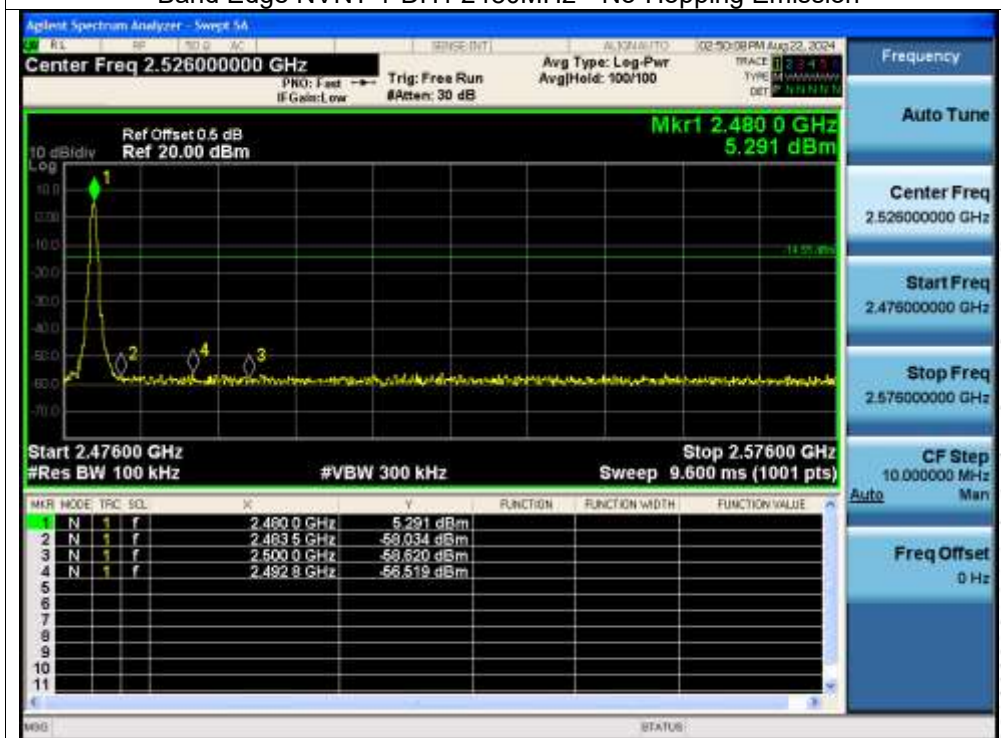


Band Edge NVNT 2-DH1 2402MHz No-Hopping




Band Edge NVNT 2-DH1 2402MHz No-Hopping Emission

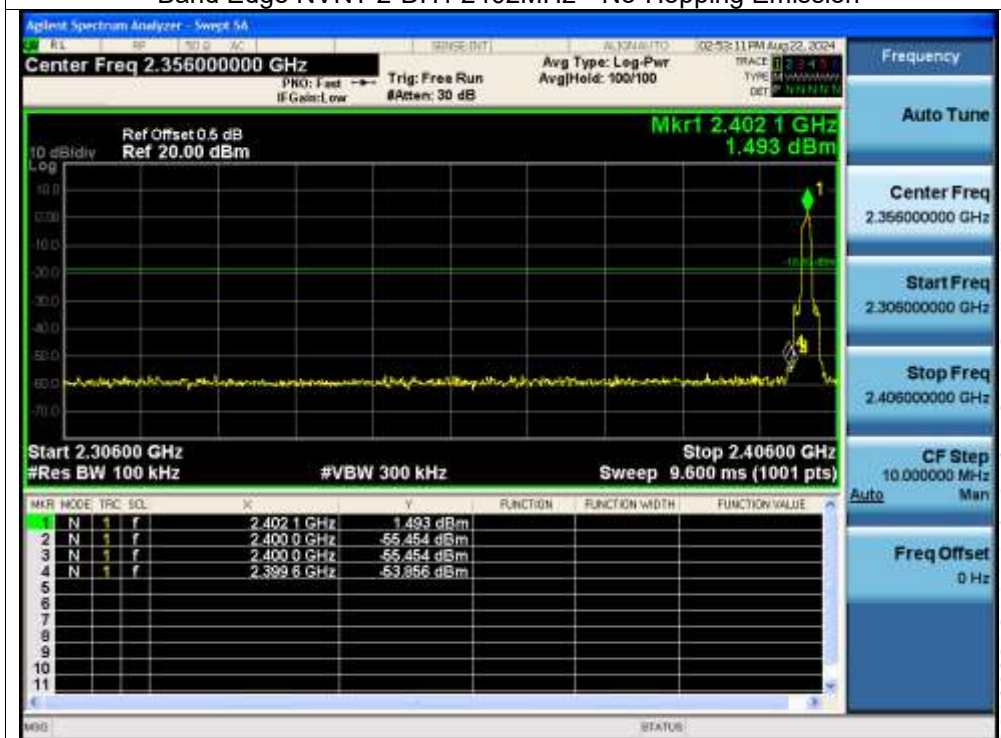


Band Edge NVNT 2-DH1 2480MHz No-Hopping

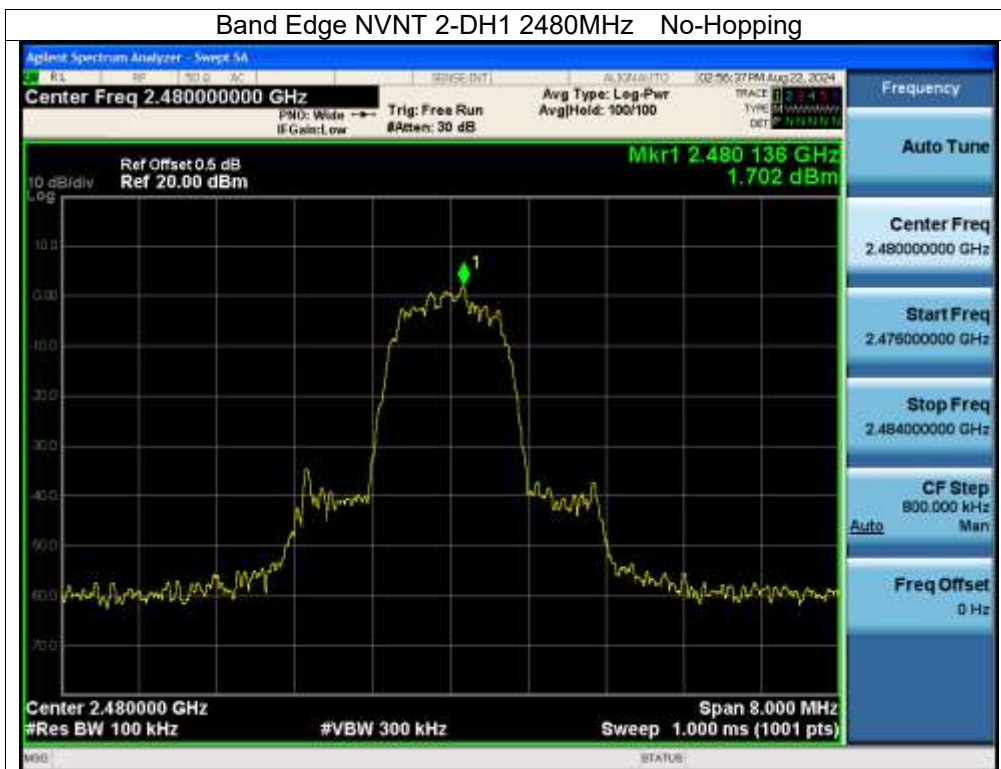


Band Edge NVNT 2-DH1 2480MHz No-Hopping Emission

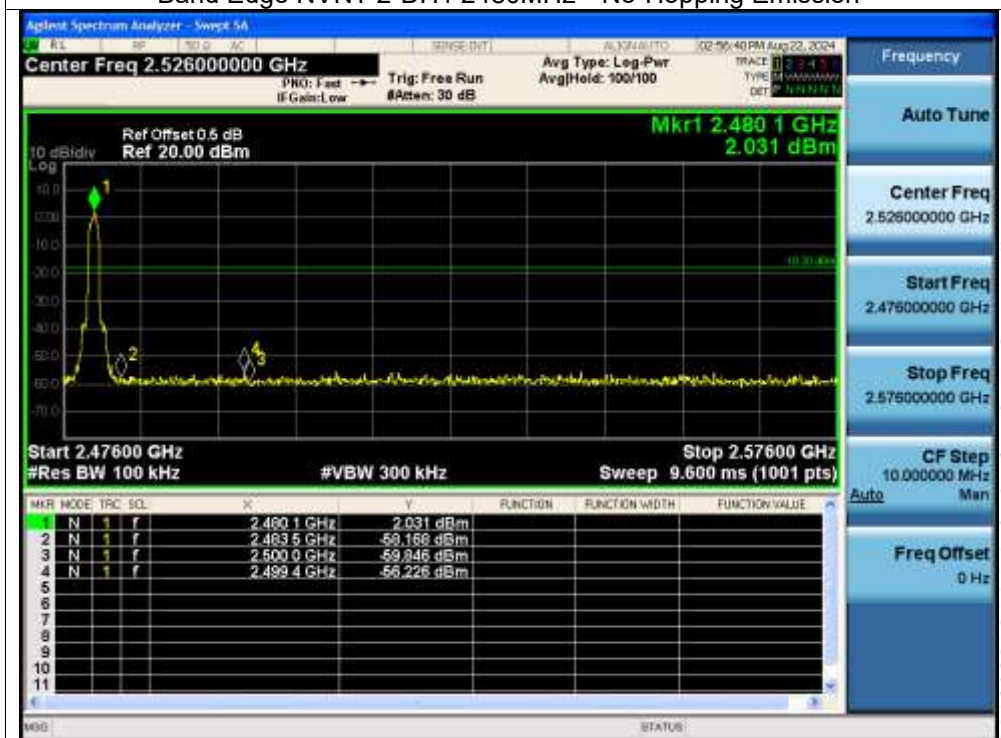


Band Edge NVNT 3-DH1 2402MHz No-Hopping

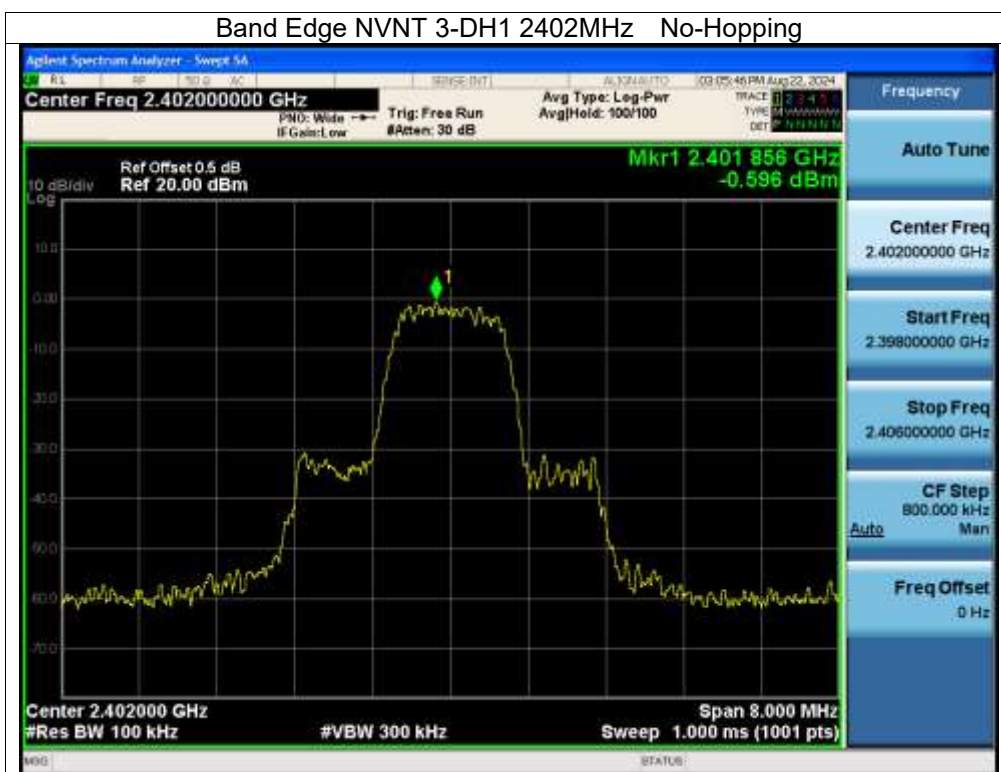


Band Edge NVNT 3-DH1 2402MHz No-Hopping Emission

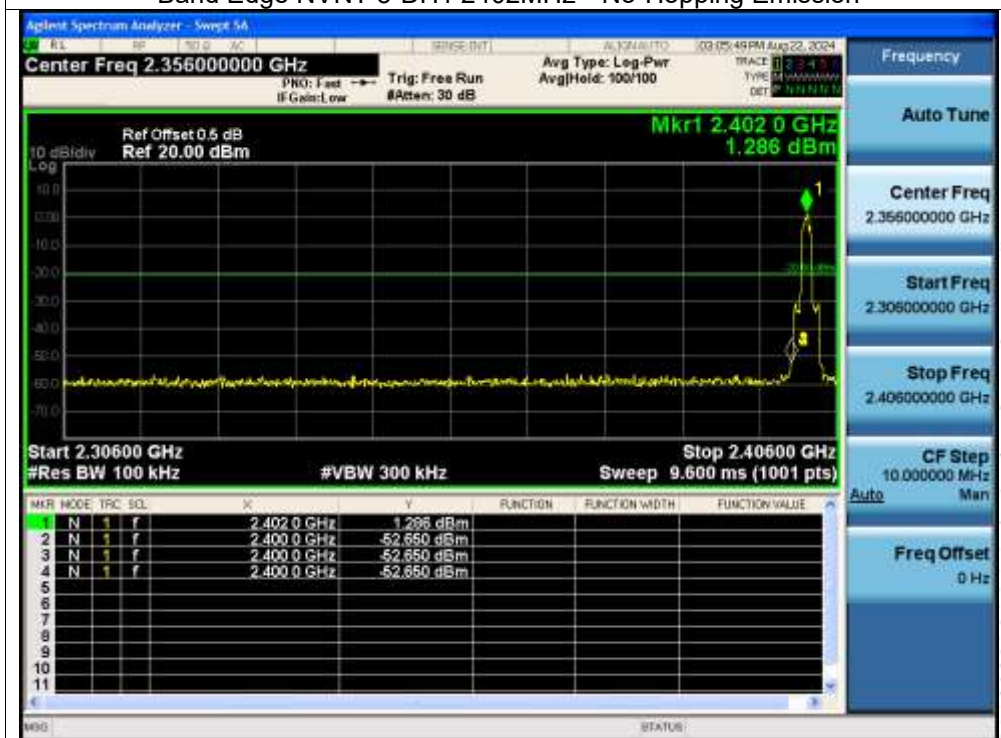

Band Edge NVNT 3-DH1 2480MHz No-Hopping

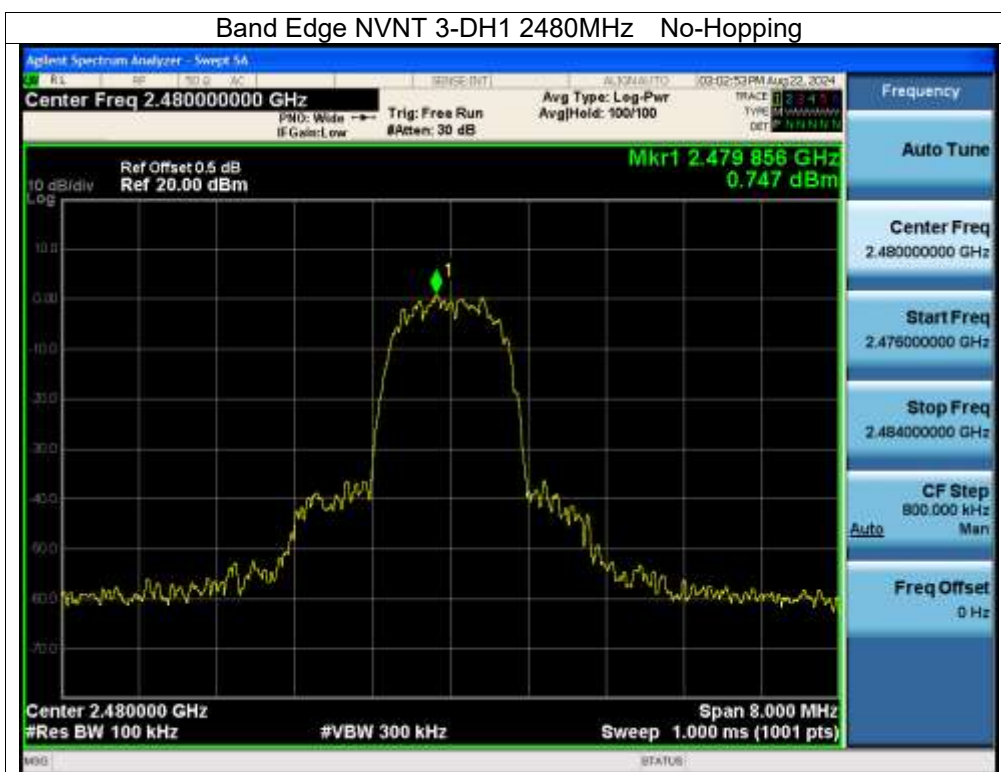

Band Edge NVNT 3-DH1 2480MHz No-Hopping Emission

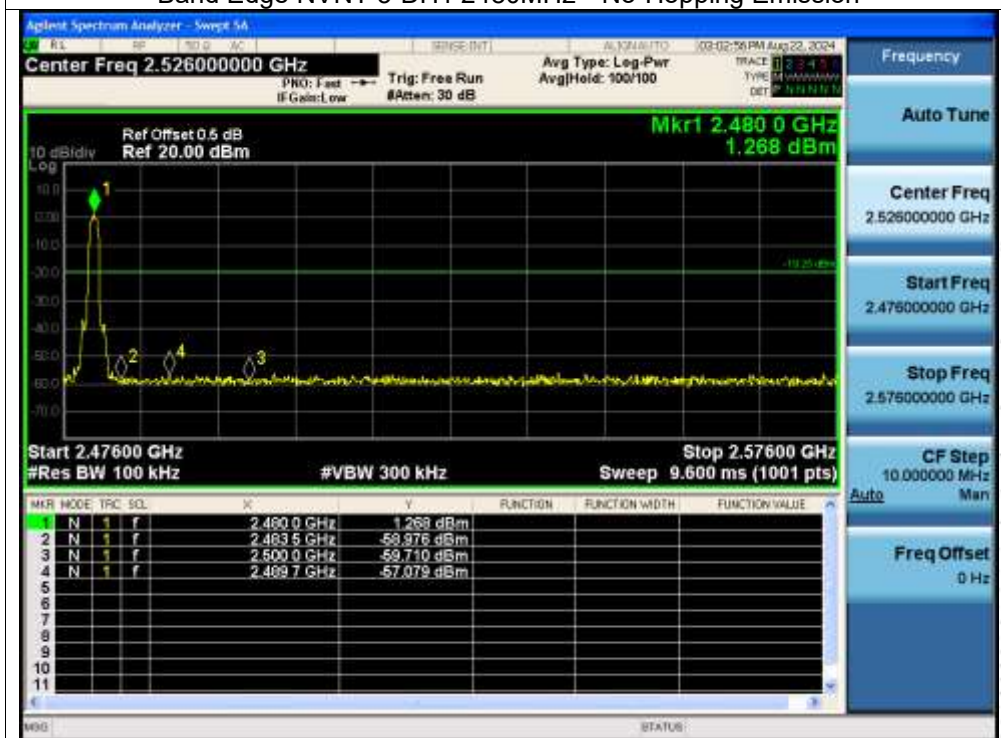


Test Graphs

Band Edge(Hopping) NVNT 1-DH1 2402MHz Hopping




Band Edge(Hopping) NVNT 1-DH1 2402MHz Hopping Emission

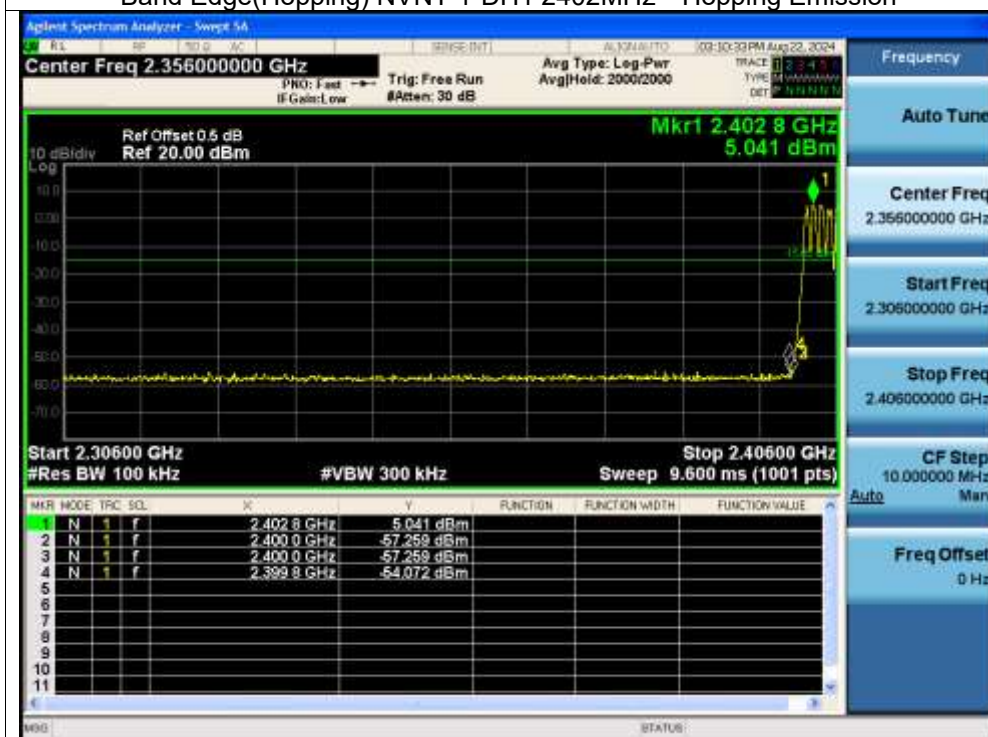

Band Edge(Hopping) NVNT 1-DH1 2480MHz Hopping




Band Edge(Hopping) NVNT 1-DH1 2480MHz Hopping Emission

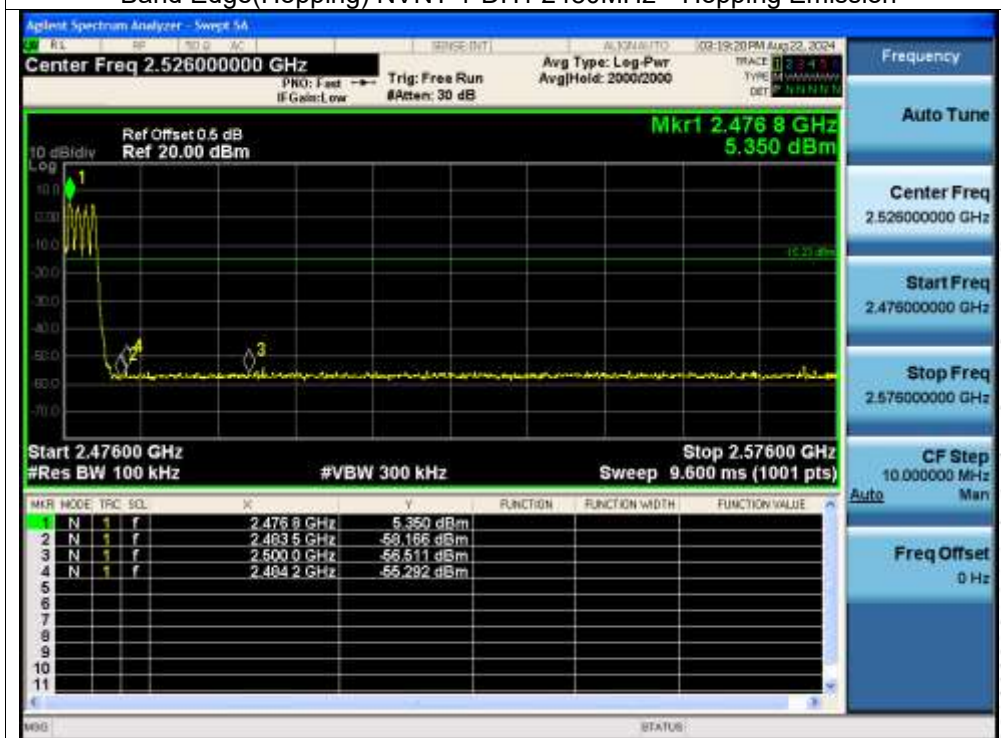

Band Edge(Hopping) NVNT 2-DH1 2402MHz Hopping




Band Edge(Hopping) NVNT 2-DH1 2402MHz Hopping Emission

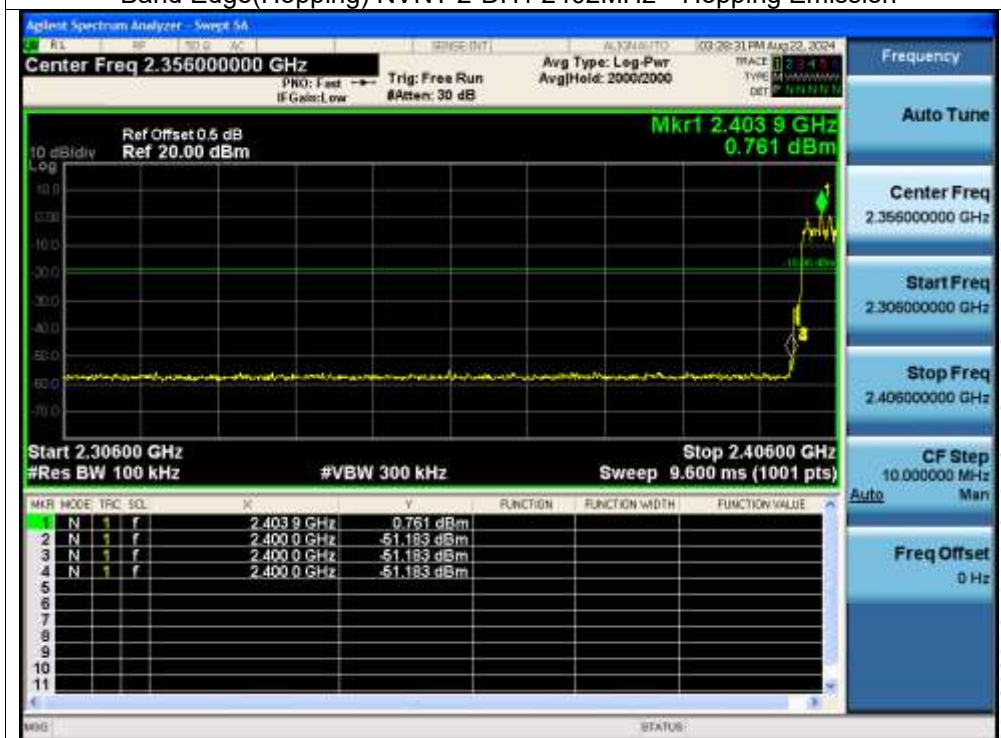

Band Edge(Hopping) NVNT 2-DH1 2480MHz Hopping




Band Edge(Hopping) NVNT 2-DH1 2480MHz Hopping Emission

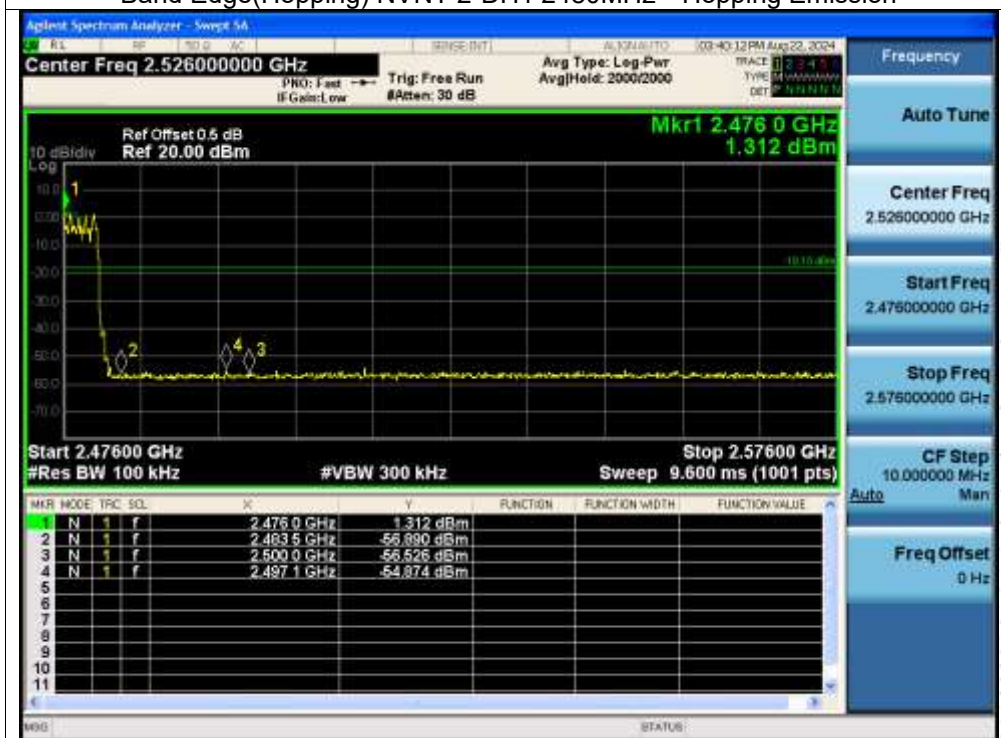

Band Edge(Hopping) NVNT 3-DH1 2402MHz Hopping




Band Edge(Hopping) NVNT 3-DH1 2402MHz Hopping Emission

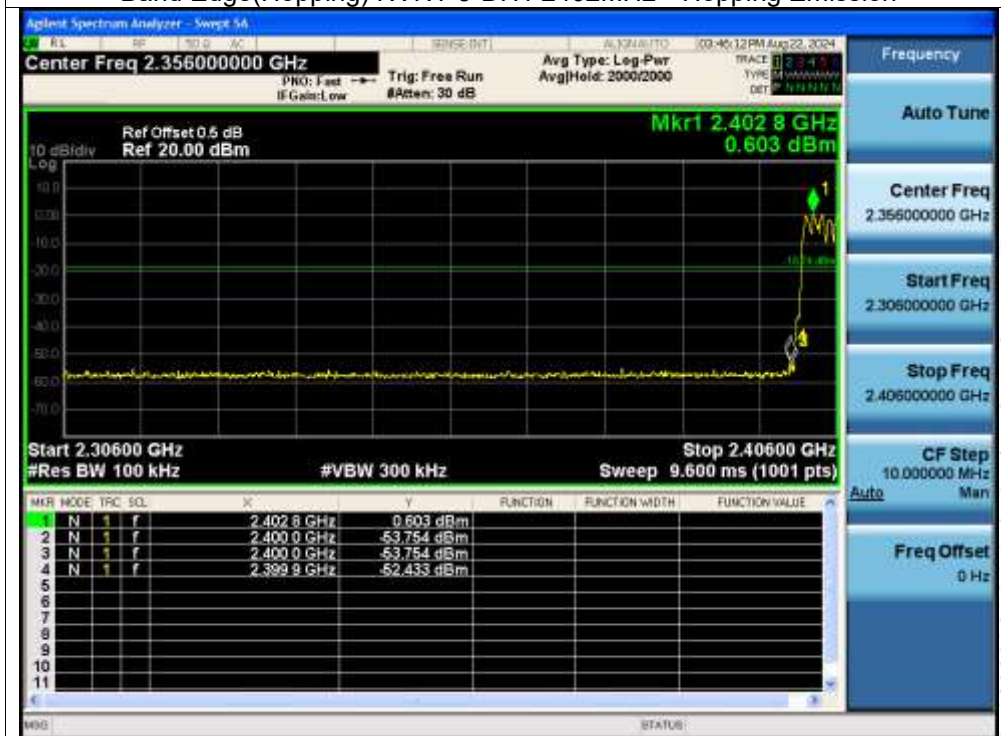

Band Edge(Hopping) NVNT 3-DH1 2480MHz Hopping



Band Edge(Hopping) NVNT 3-DH1 2480MHz Hopping Emission

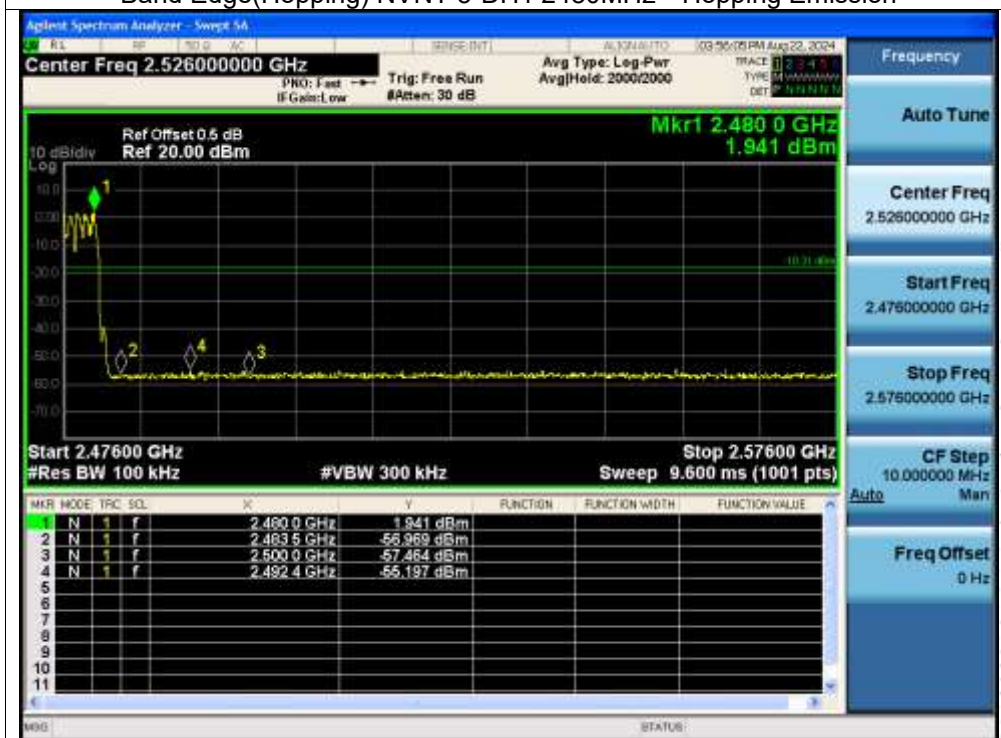

10. 20 dB Bandwidth

10.1 Block Diagram Of Test Setup



10.2 Limit

N/A

10.3 Test procedure

1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	DC 5V	Remark:	N/A

Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	0.944	Pass
NVNT	1-DH1	2441	0.919	Pass
NVNT	1-DH1	2480	0.912	Pass
NVNT	2-DH1	2402	1.282	Pass
NVNT	2-DH1	2441	1.287	Pass
NVNT	2-DH1	2480	1.256	Pass
NVNT	3-DH1	2402	1.277	Pass
NVNT	3-DH1	2441	1.305	Pass
NVNT	3-DH1	2480	1.294	Pass

Test Graphs

-20dB Bandwidth NVNT 1-DH1 2402MHz



-20dB Bandwidth NVNT 1-DH1 2441MHz



-20dB Bandwidth NVNT 1-DH1 2480MHz



-20dB Bandwidth NVNT 2-DH1 2402MHz




-20dB Bandwidth NVNT 2-DH1 2441MHz



-20dB Bandwidth NVNT 2-DH1 2480MHz




-20dB Bandwidth NVNT 3-DH1 2402MHz

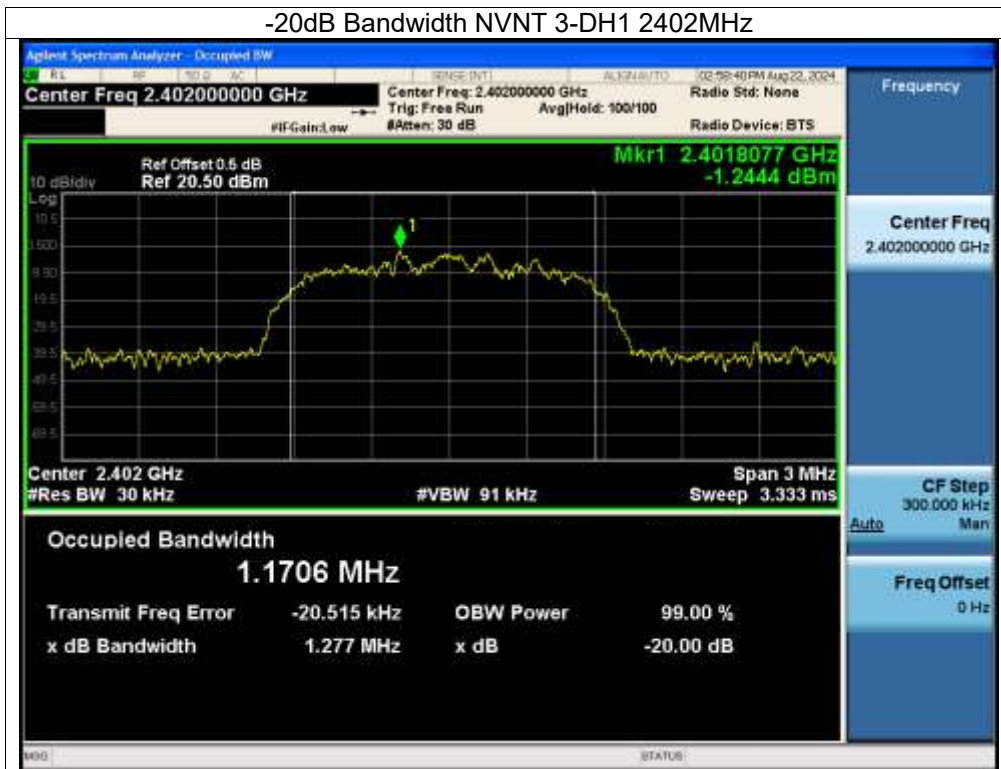

-20dB Bandwidth NVNT 3-DH1 2441MHz



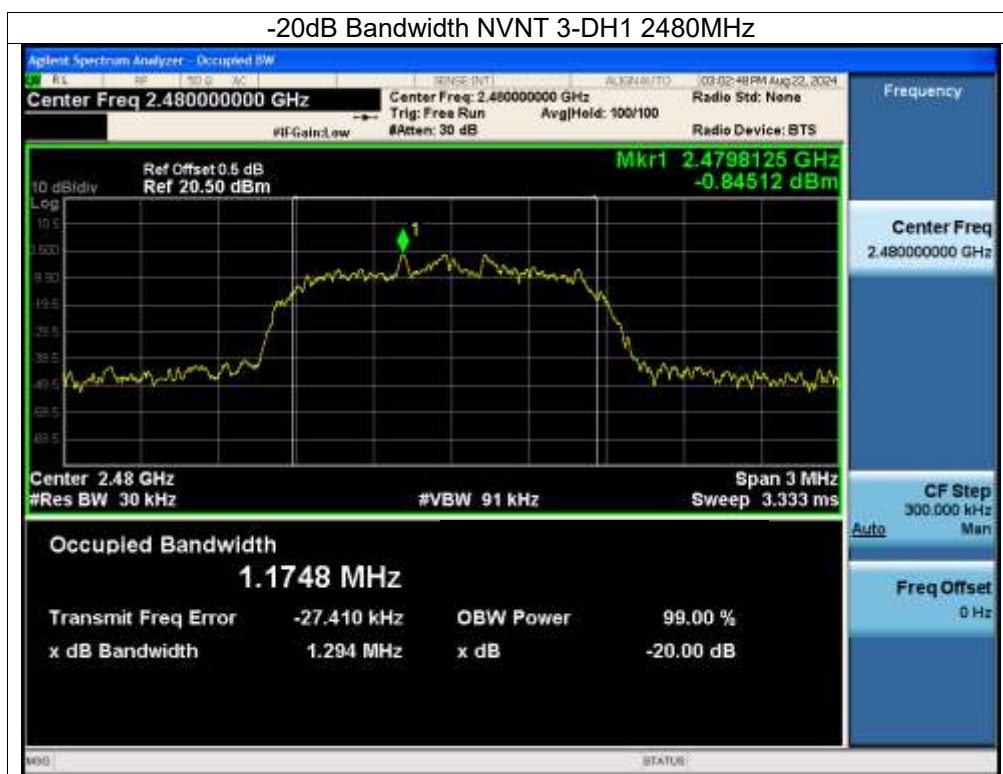

11. Maximum Peak Output Power

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.4 Test Result

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	DC 5V	Remark:	N/A


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	5.29	21	Pass
NVNT	1-DH1	2441	5.55	21	Pass
NVNT	1-DH1	2480	5.74	21	Pass
NVNT	2-DH1	2402	4.25	21	Pass
NVNT	2-DH1	2441	4.46	21	Pass
NVNT	2-DH1	2480	4.81	21	Pass
NVNT	3-DH1	2402	4.7	21	Pass
NVNT	3-DH1	2441	4.95	21	Pass
NVNT	3-DH1	2480	5.32	21	Pass

Test Graphs

Power NVNT 1-DH1 2402MHz



Power NVNT 1-DH1 2441MHz

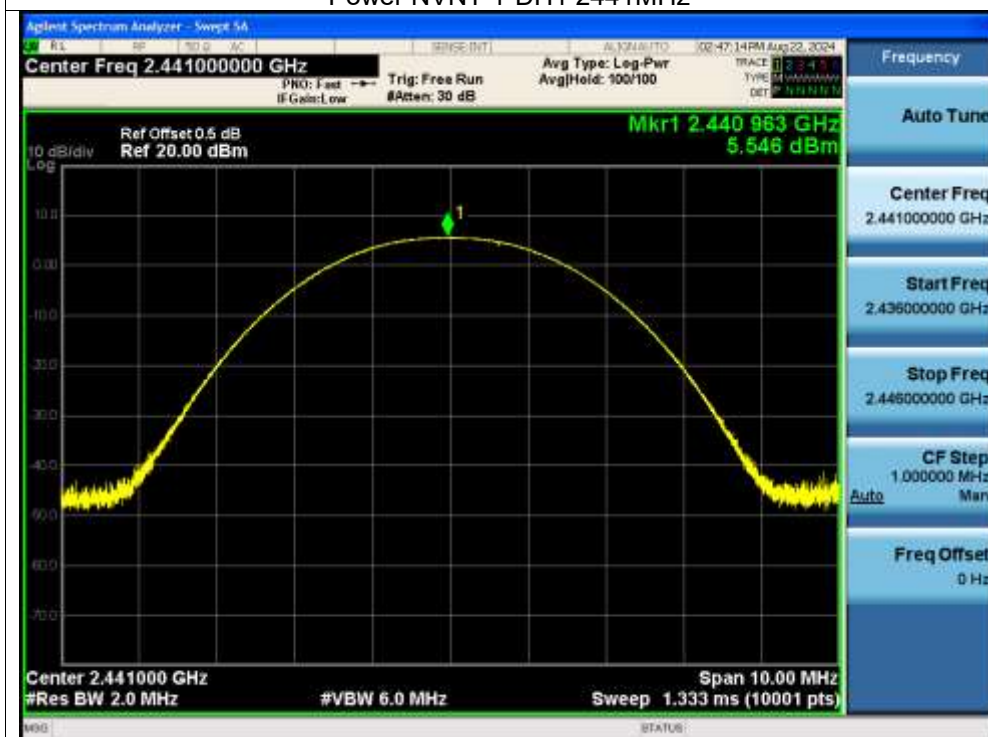

Power NVNT 1-DH1 2480MHz



Power NVNT 2-DH1 2402MHz



Power NVNT 2-DH1 2441MHz



Power NVNT 2-DH1 2480MHz



Power NVNT 3-DH1 2402MHz




Power NVNT 3-DH1 2441MHz





12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup

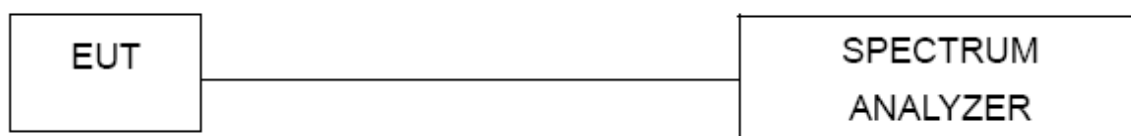

12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.4 Test Result

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2402.13	2403.132	1.002	0.629	Pass
NVNT	1-DH1	2440.982	2441.978	0.996	0.613	Pass
NVNT	1-DH1	2478.982	2479.982	1	0.608	Pass
NVNT	2-DH1	2401.98	2402.974	0.994	0.855	Pass
NVNT	2-DH1	2440.978	2441.978	1	0.858	Pass
NVNT	2-DH1	2478.988	2479.978	0.99	0.837	Pass
NVNT	3-DH1	2401.978	2402.98	1.002	0.851	Pass
NVNT	3-DH1	2440.98	2441.98	1	0.87	Pass
NVNT	3-DH1	2478.982	2479.984	1.002	0.863	Pass

Test Graphs

CFS NVNT 1-DH1 2402MHz




CFS NVNT 1-DH1 2441MHz




CFS NVNT 1-DH1 2480MHz



CFS NVNT 2-DH1 2402MHz

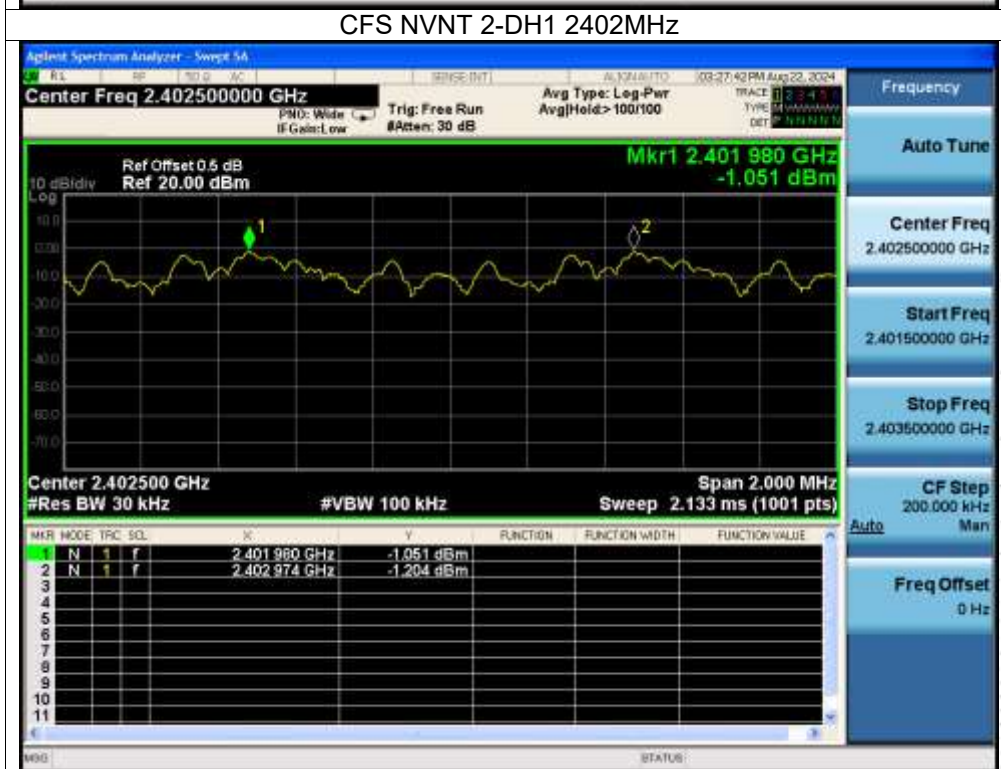


CFS NVNT 2-DH1 2441MHz

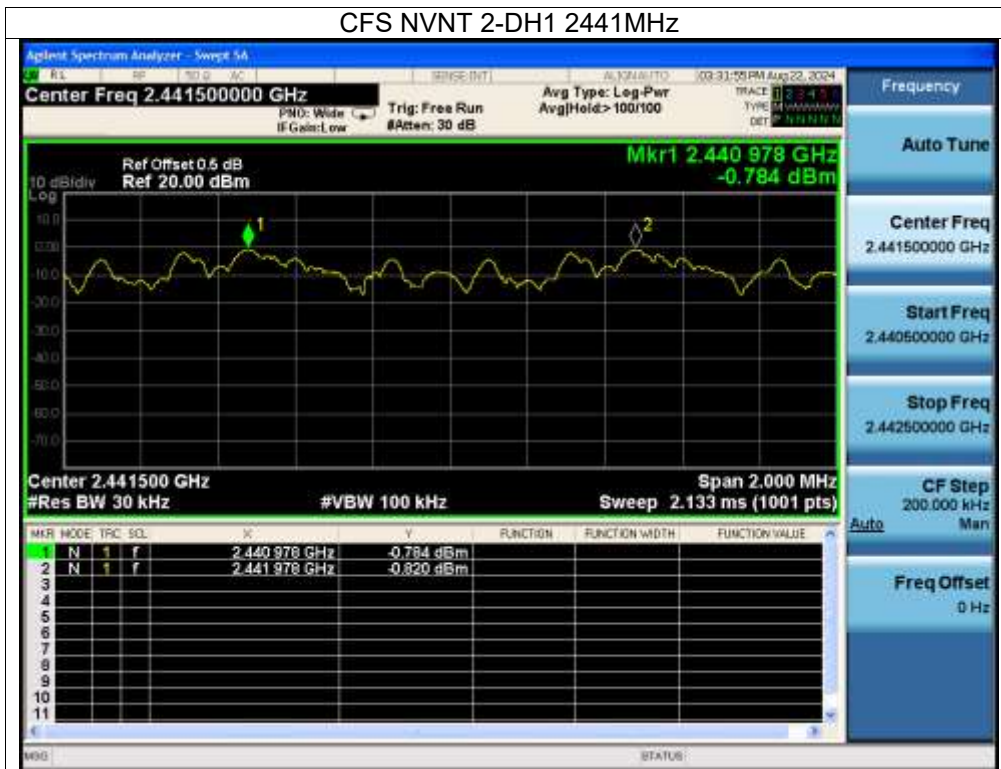


CFS NVNT 2-DH1 2480MHz



CFS NVNT 3-DH1 2402MHz

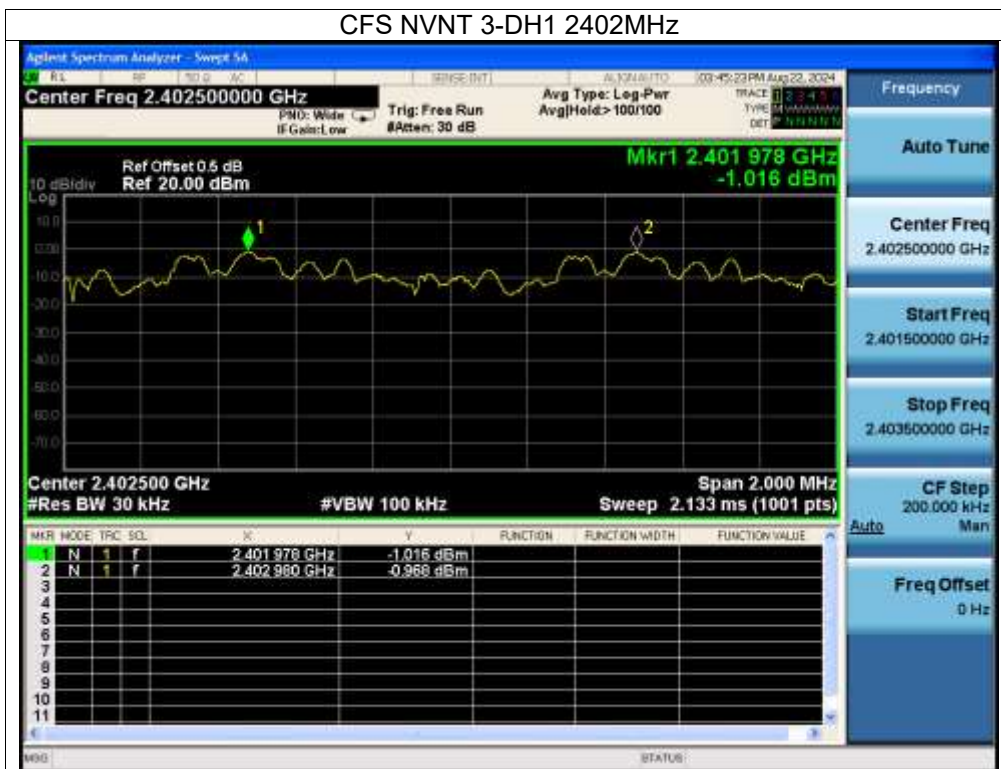

CFS NVNT 3-DH1 2441MHz

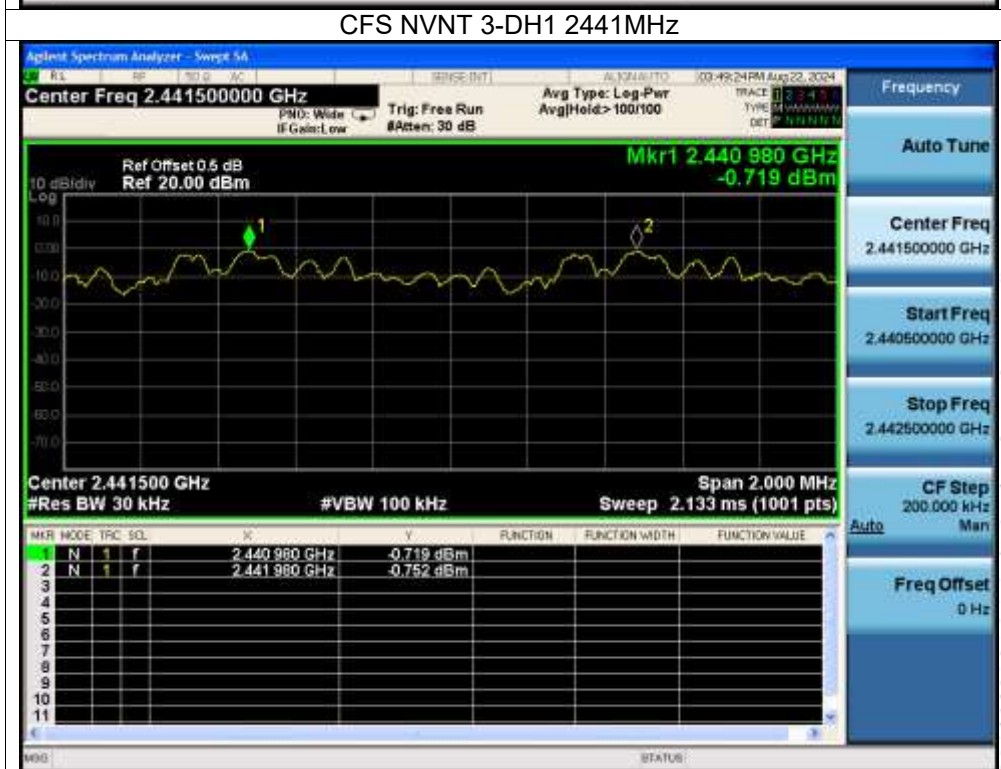



13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup



13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass


Test Graphs

Hopping No. NVNT 1-DH1 2441MHz

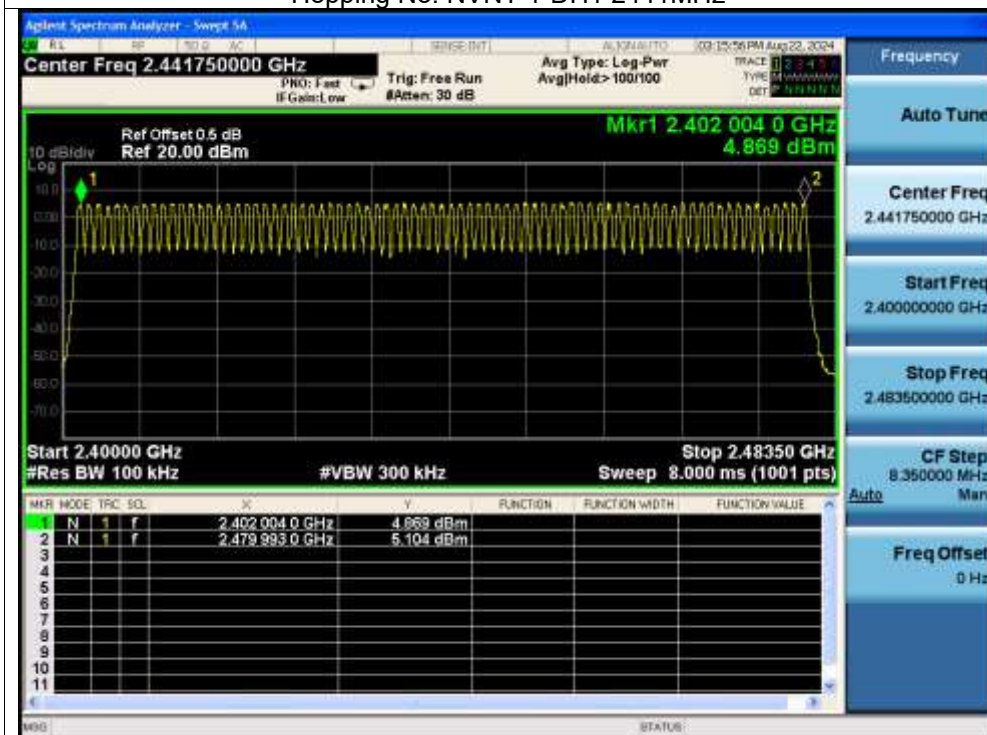

Hopping No. NVNT 2-DH1 2441MHz

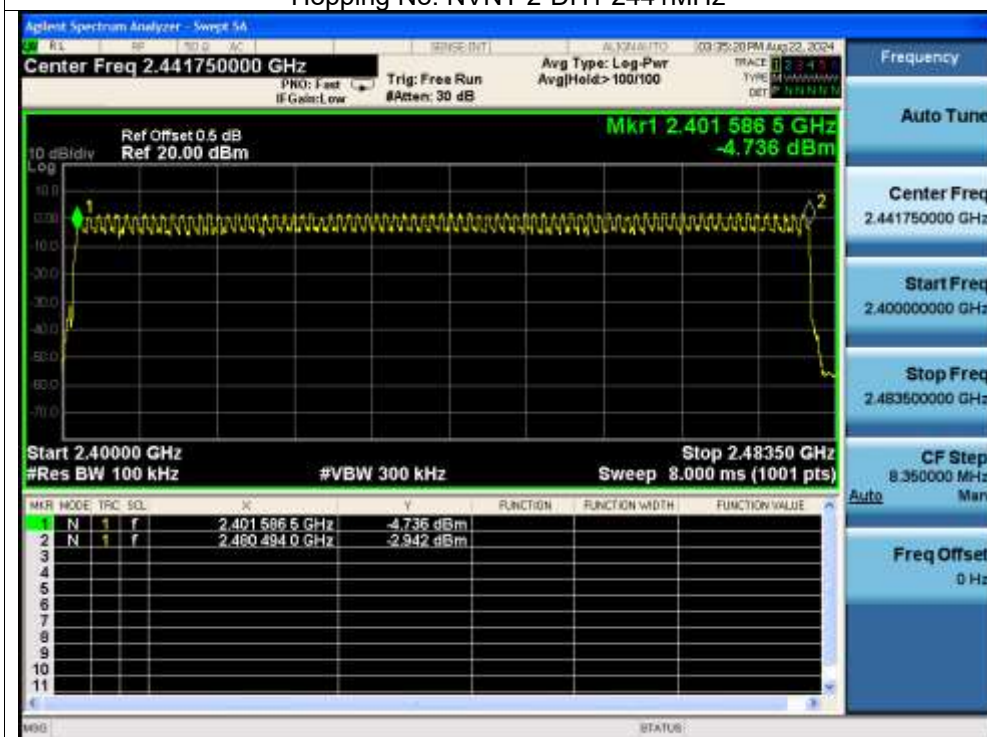

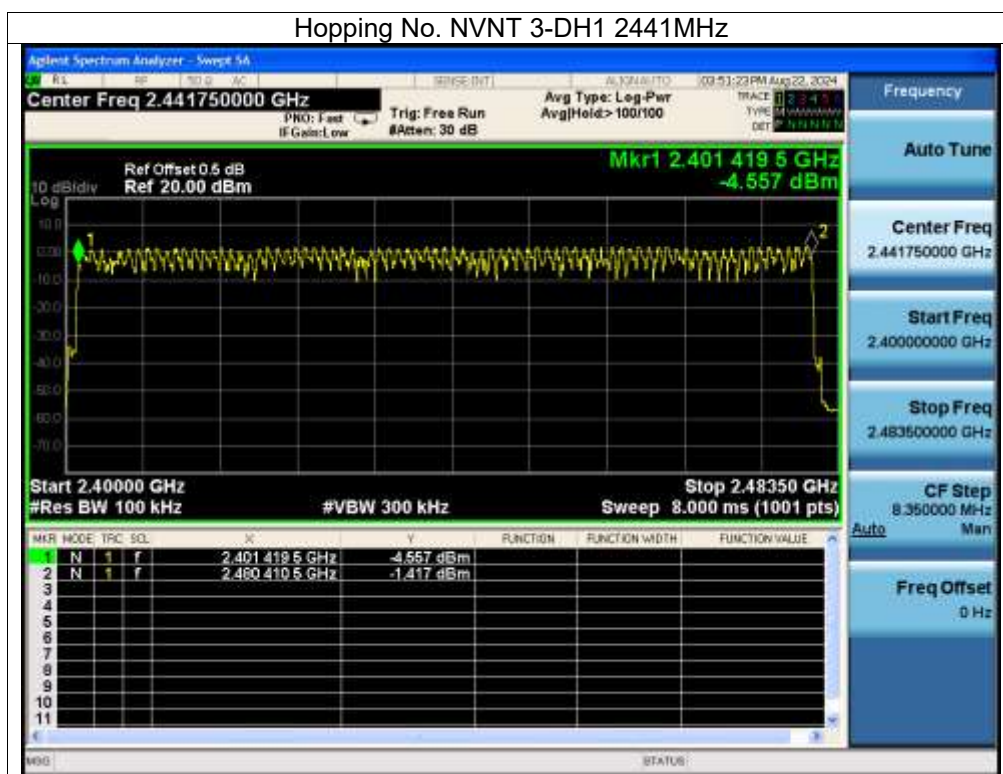

14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


14.4 Test Result

Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	0.368	117.76	320	31600	400	Pass
NVNT	1-DH3	2441	1.624	266.336	164	31600	400	Pass
NVNT	1-DH5	2441	2.872	330.28	115	31600	400	Pass
NVNT	2-DH1	2441	0.378	120.582	319	31600	400	Pass
NVNT	2-DH3	2441	1.629	249.237	153	31600	400	Pass
NVNT	2-DH5	2441	2.877	307.839	107	31600	400	Pass
NVNT	3-DH1	2441	0.377	120.263	319	31600	400	Pass
NVNT	3-DH3	2441	1.629	268.785	165	31600	400	Pass
NVNT	3-DH5	2441	2.879	308.053	107	31600	400	Pass


Note: Total Dwell Time (ms) = Pulse Time (ms)*Burst Count

Test Graphs


Dwell NVNT 1-DH1 2441MHz One Burst

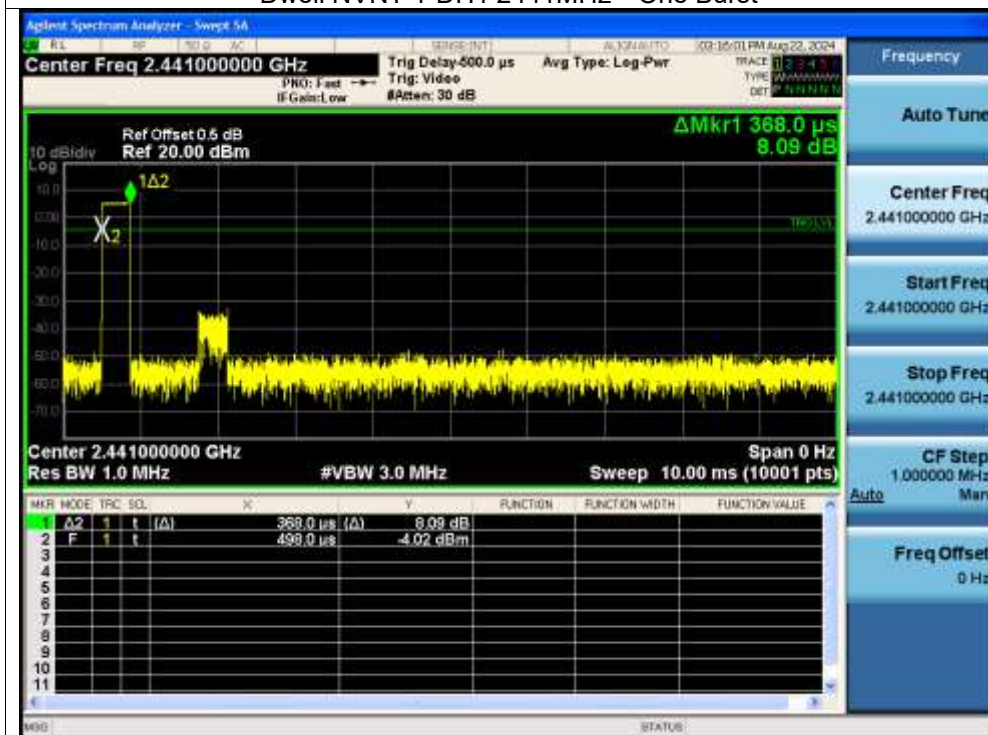


Dwell NVNT 1-DH1 2441MHz Accumulated

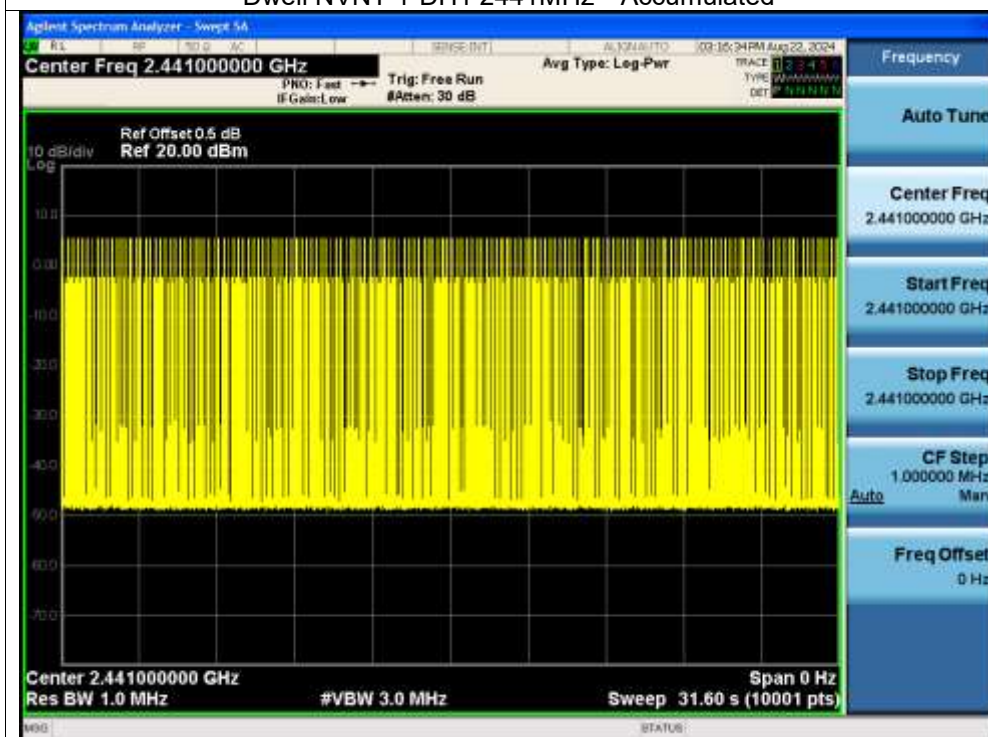


Dwell NVNT 1-DH3 2441MHz One Burst

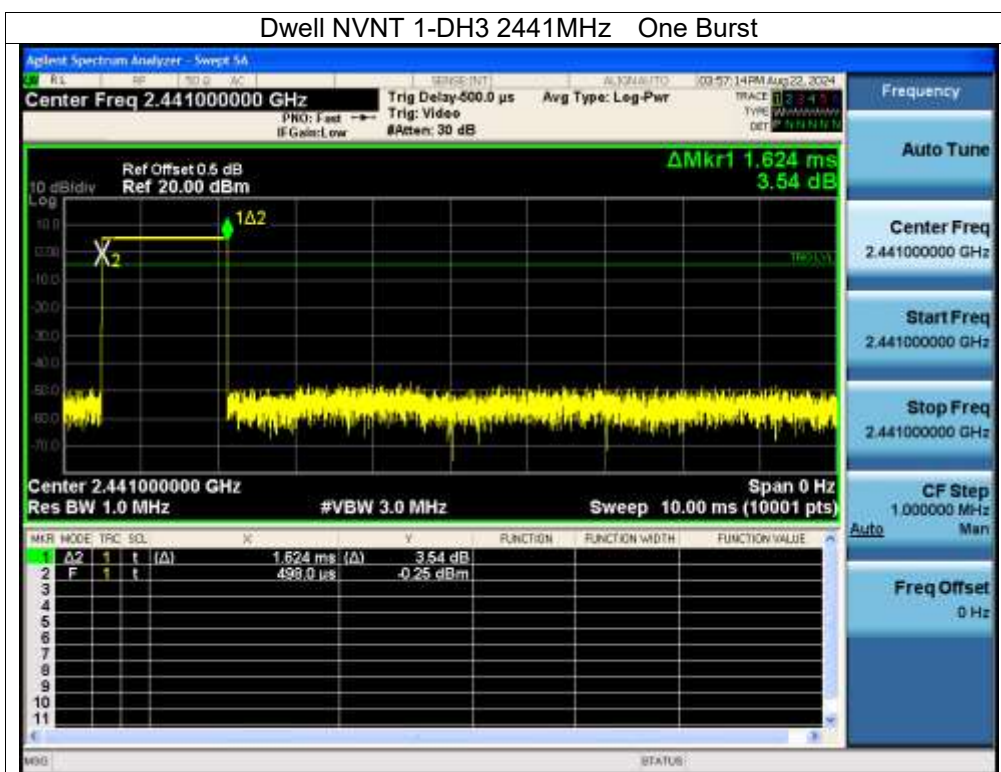


Dwell NVNT 1-DH3 2441MHz Accumulated

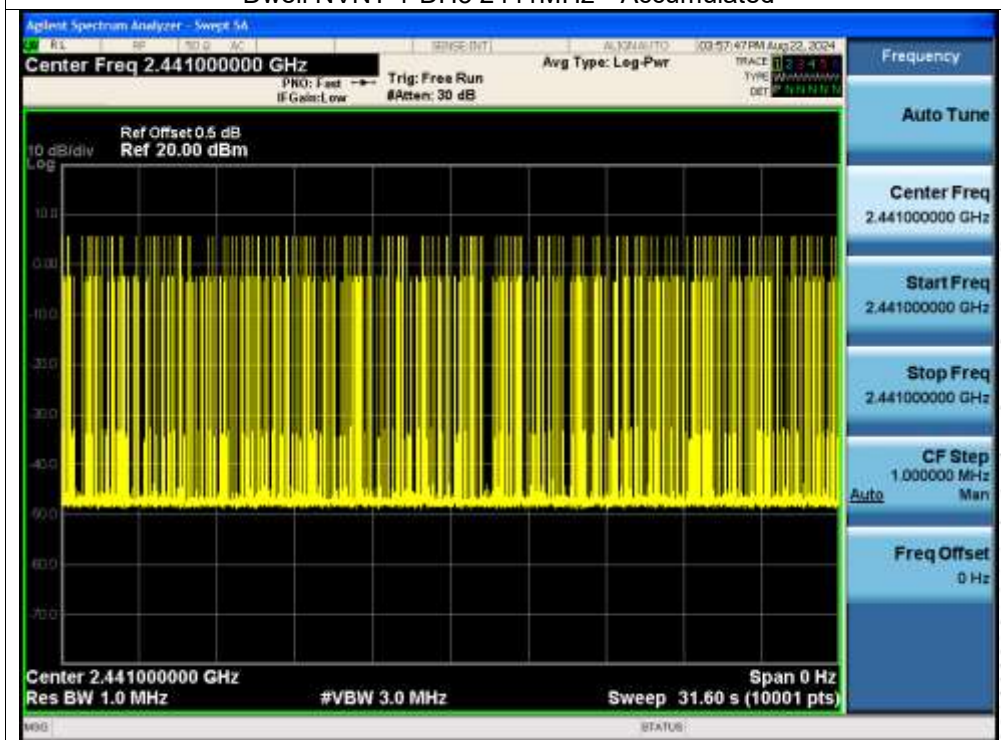


Dwell NVNT 1-DH5 2441MHz One Burst

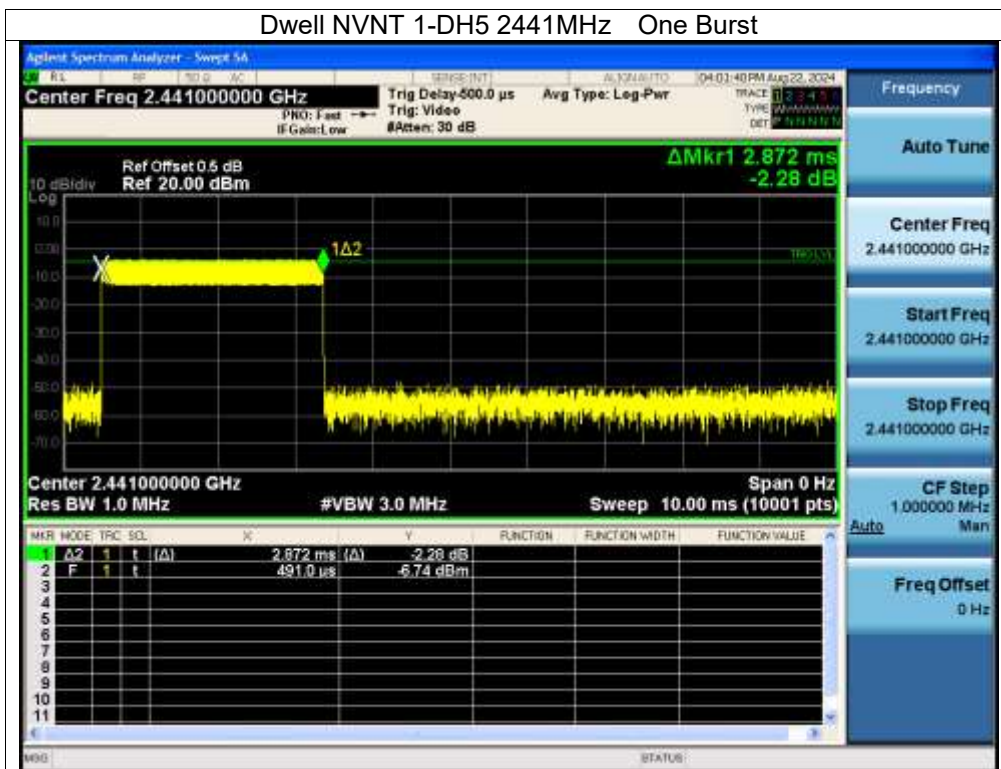


Dwell NVNT 1-DH5 2441MHz Accumulated

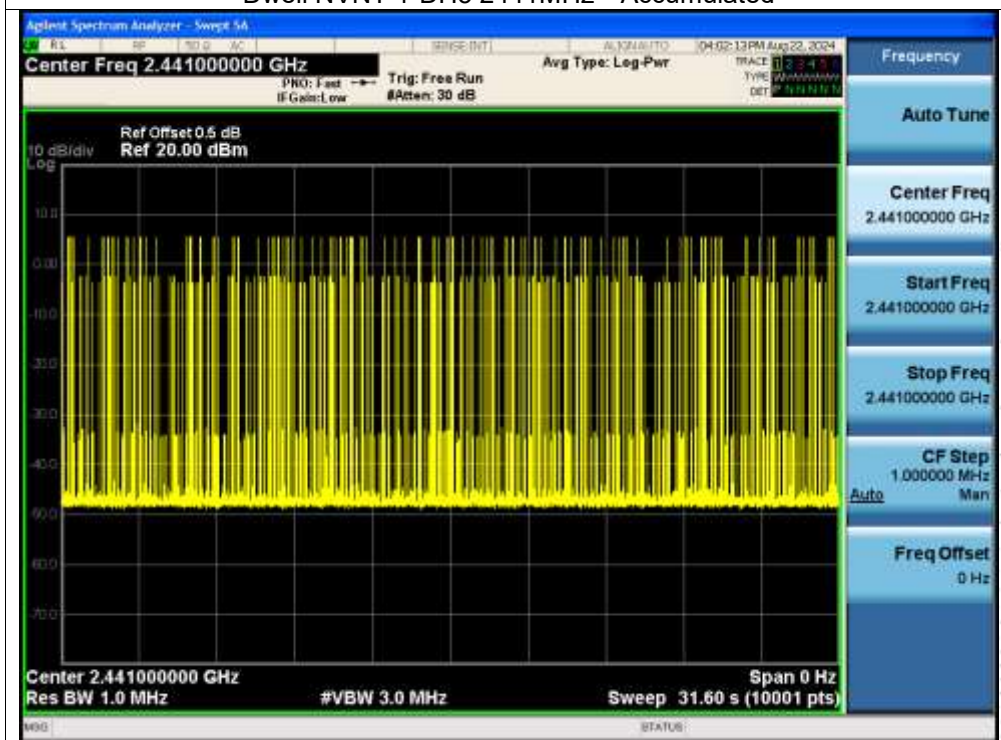


Dwell NVNT 2-DH1 2441MHz One Burst

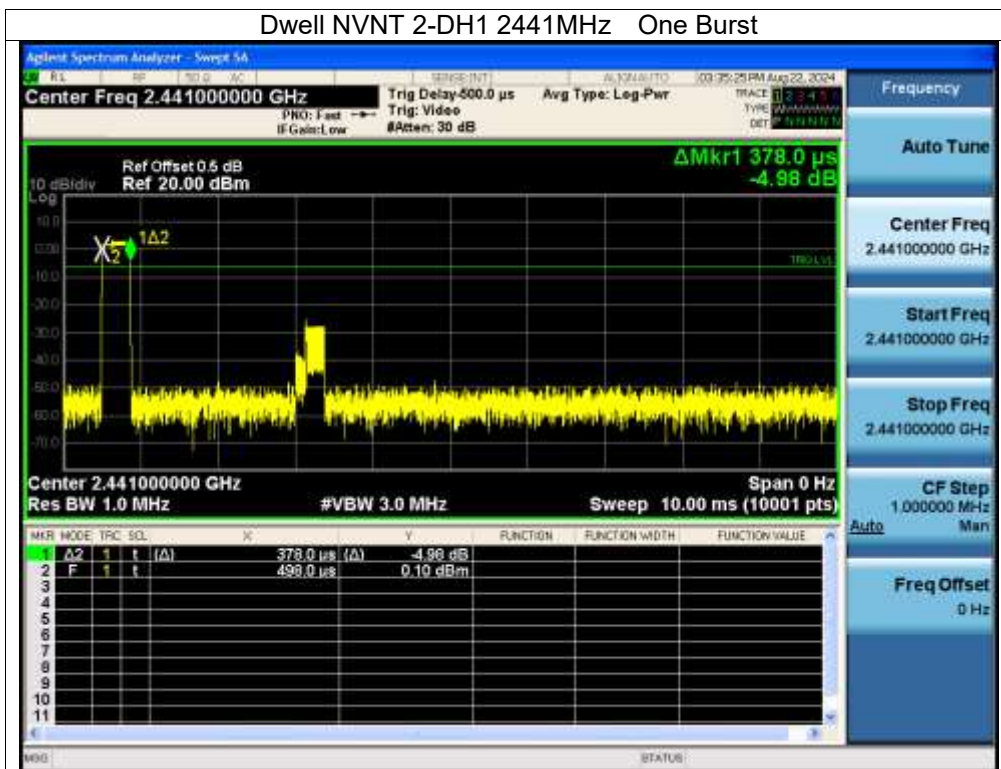


Dwell NVNT 2-DH1 2441MHz Accumulated


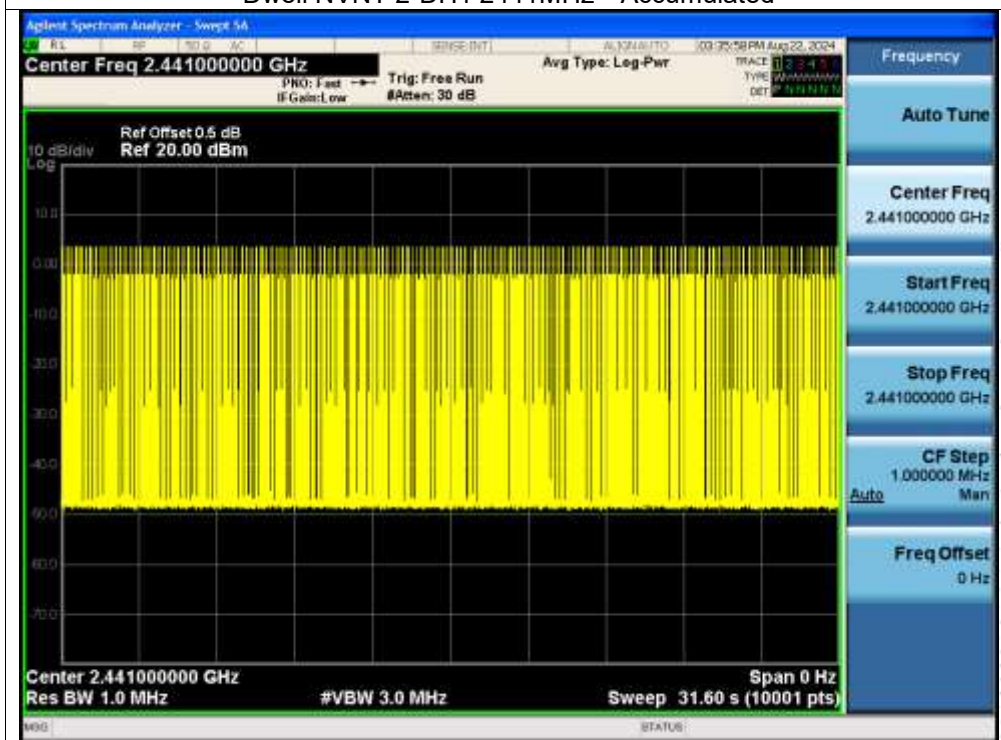


Dwell NVNT 2-DH3 2441MHz One Burst

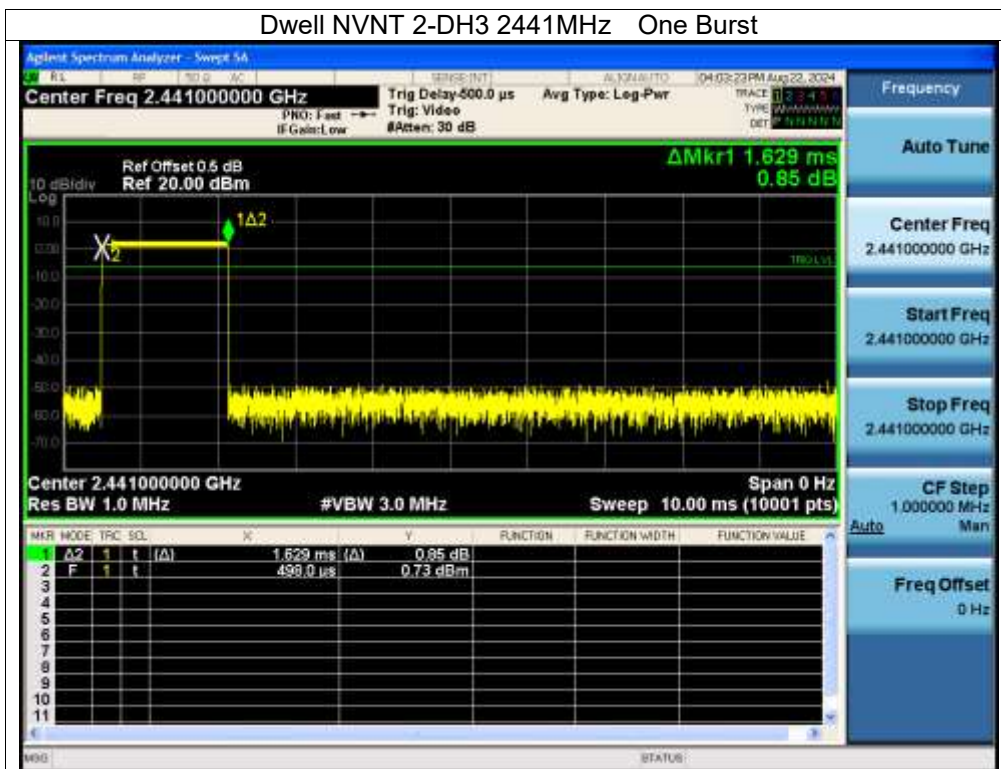


Dwell NVNT 2-DH3 2441MHz Accumulated

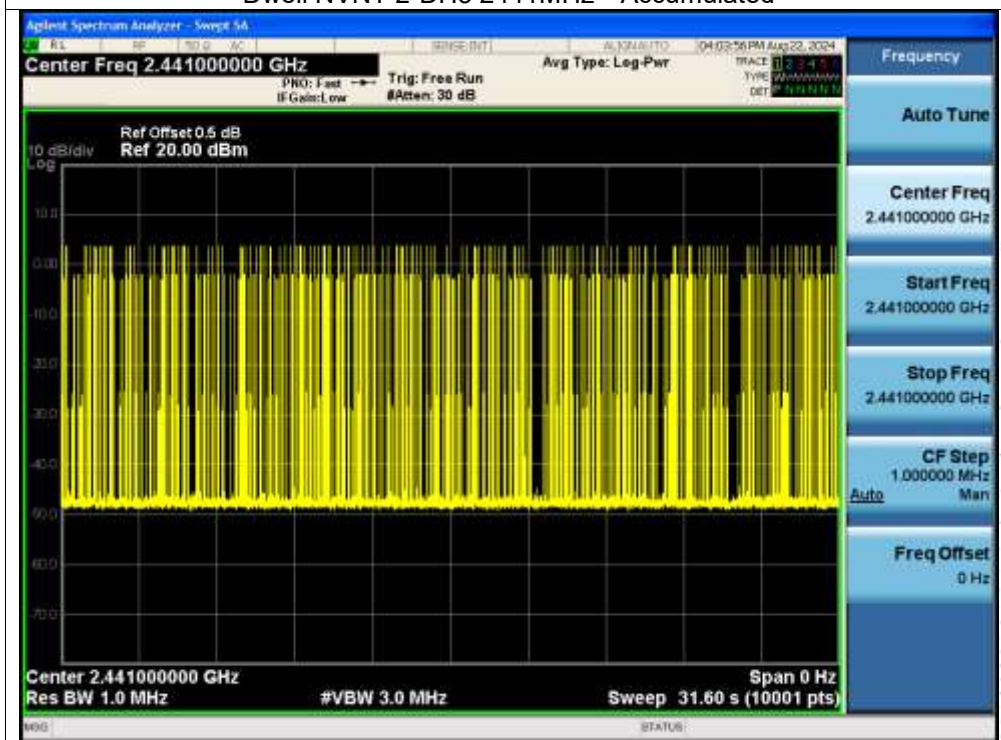


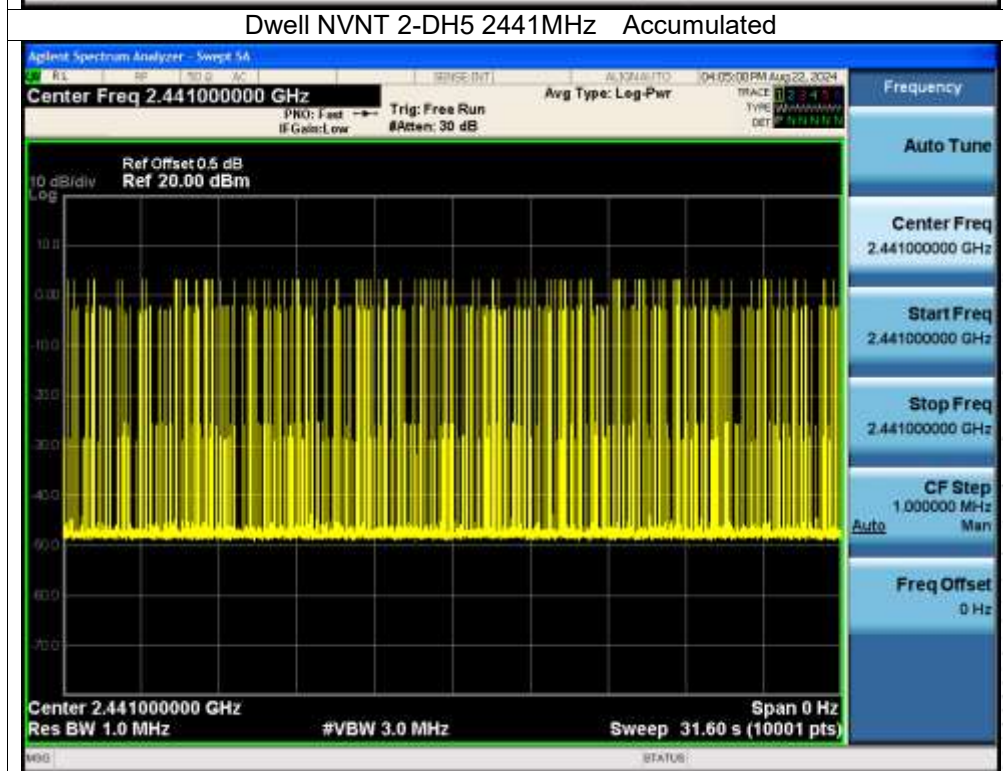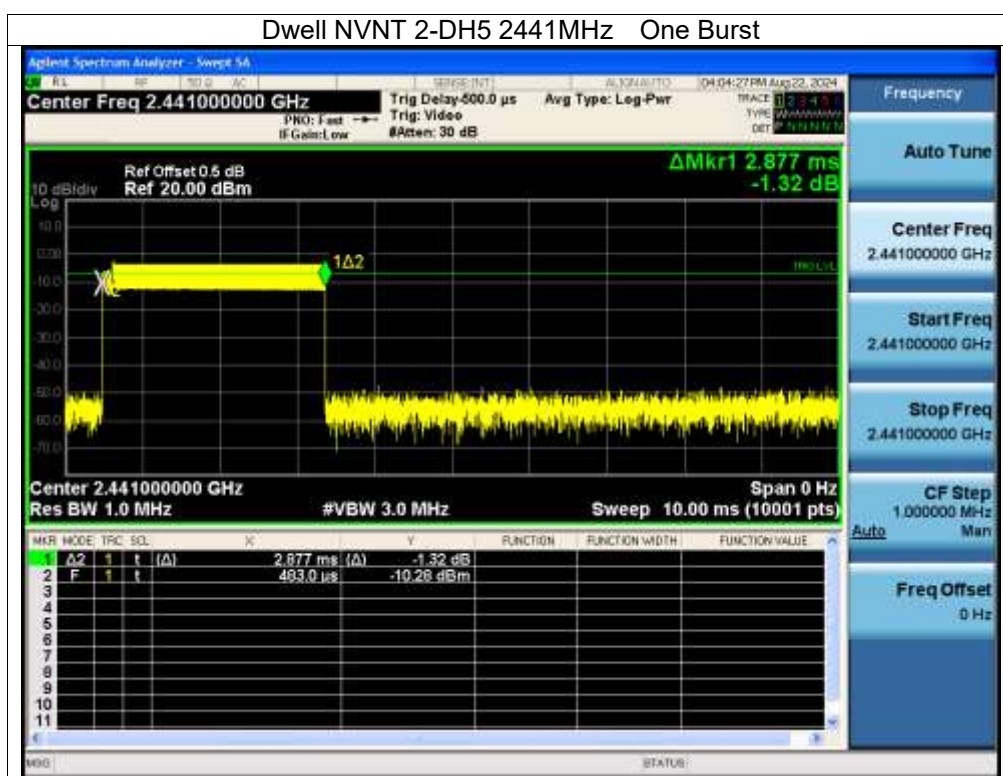


Dwell NVNT 3-DH1 2441MHz One Burst

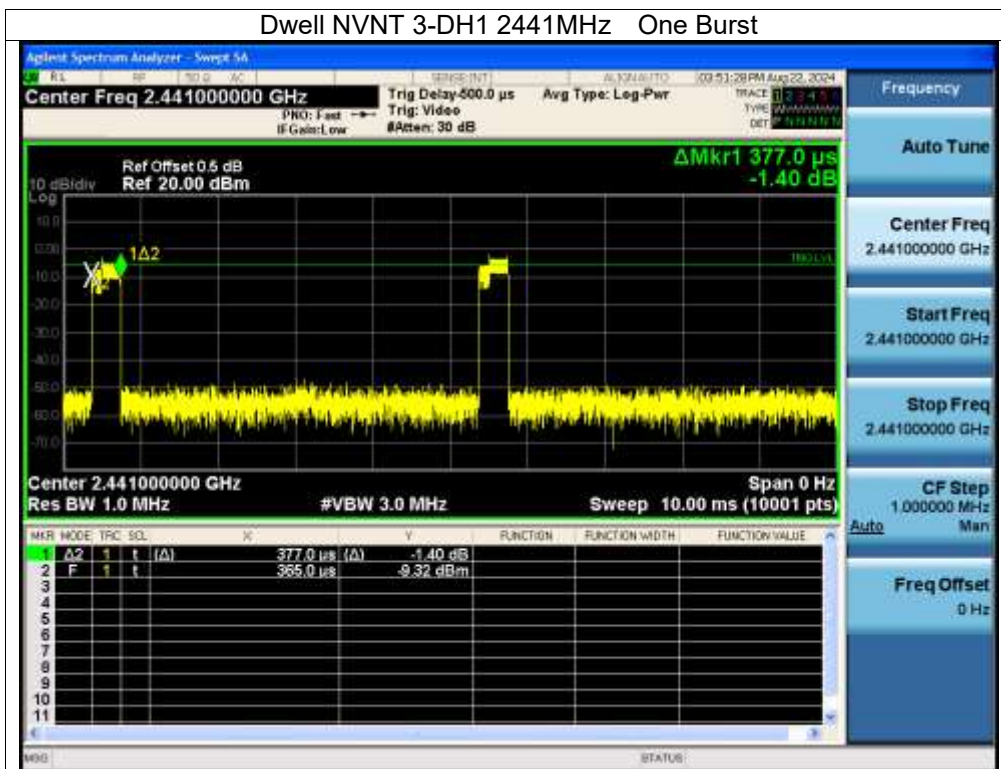


Dwell NVNT 3-DH1 2441MHz Accumulated

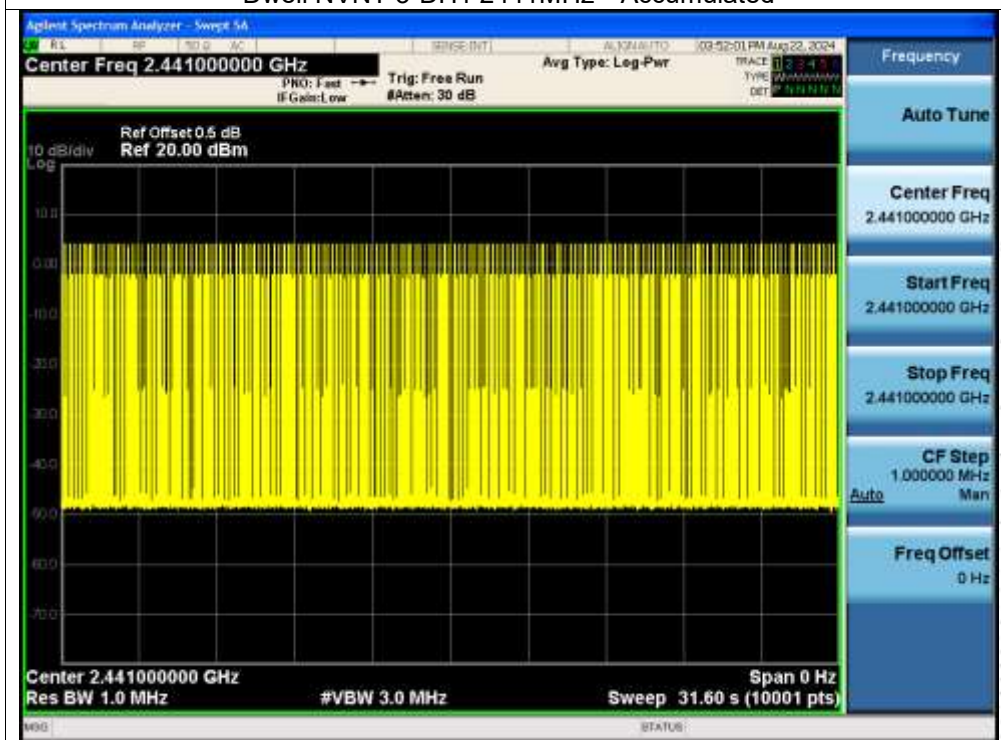


Dwell NVNT 3-DH3 2441MHz One Burst

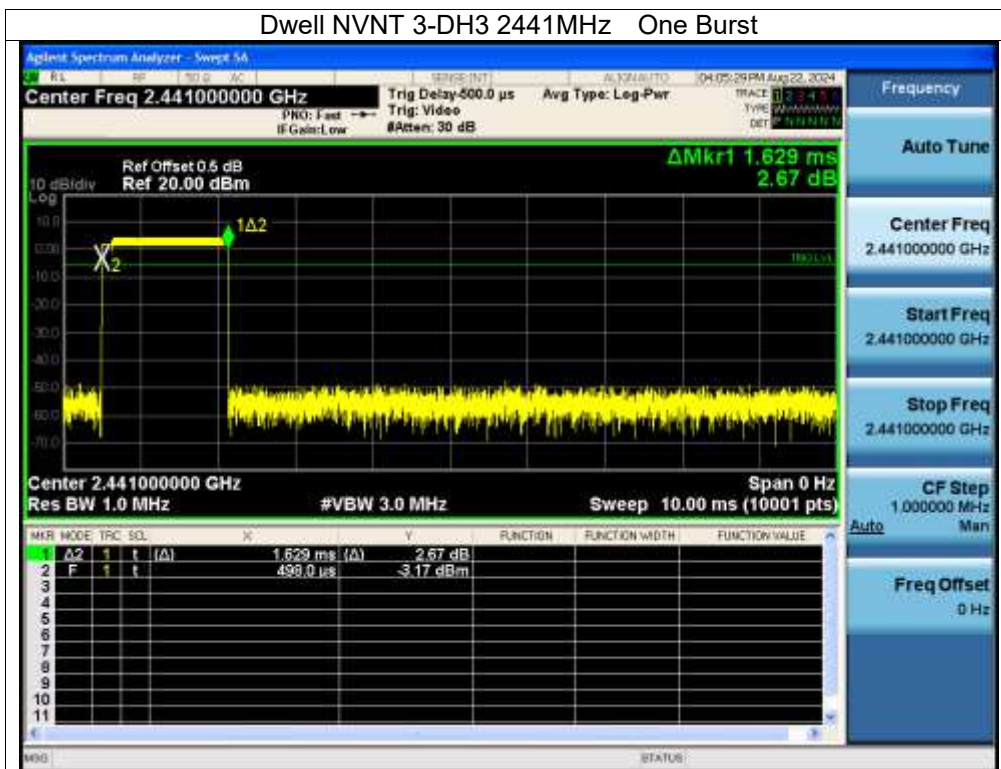


Dwell NVNT 3-DH3 2441MHz Accumulated

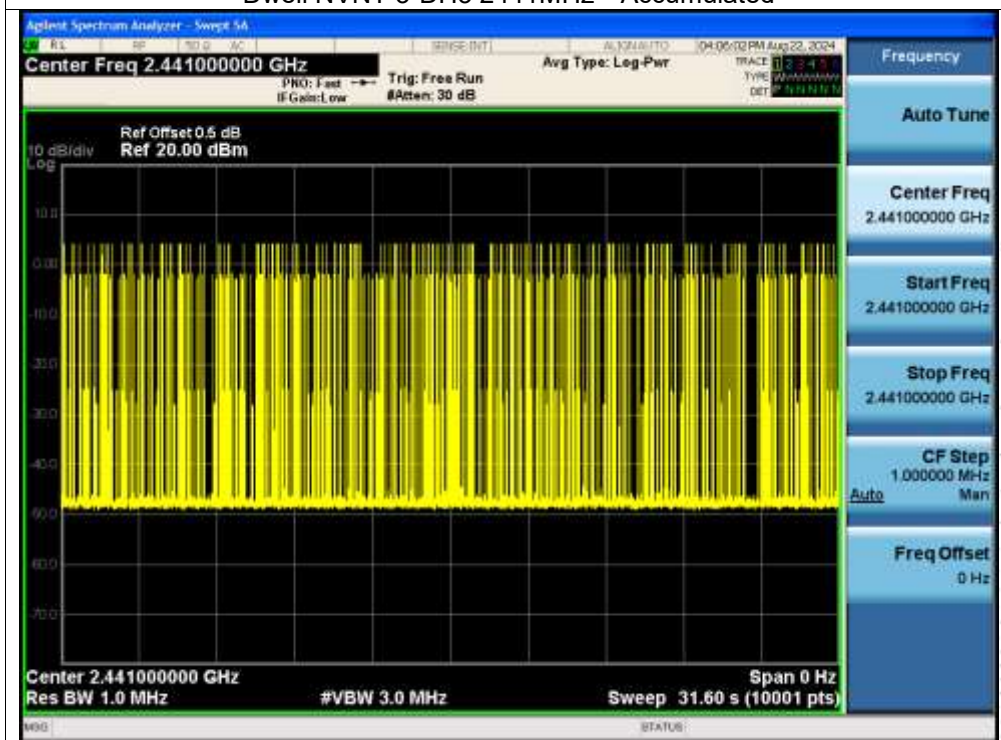

Dwell NVNT 3-DH5 2441MHz One Burst

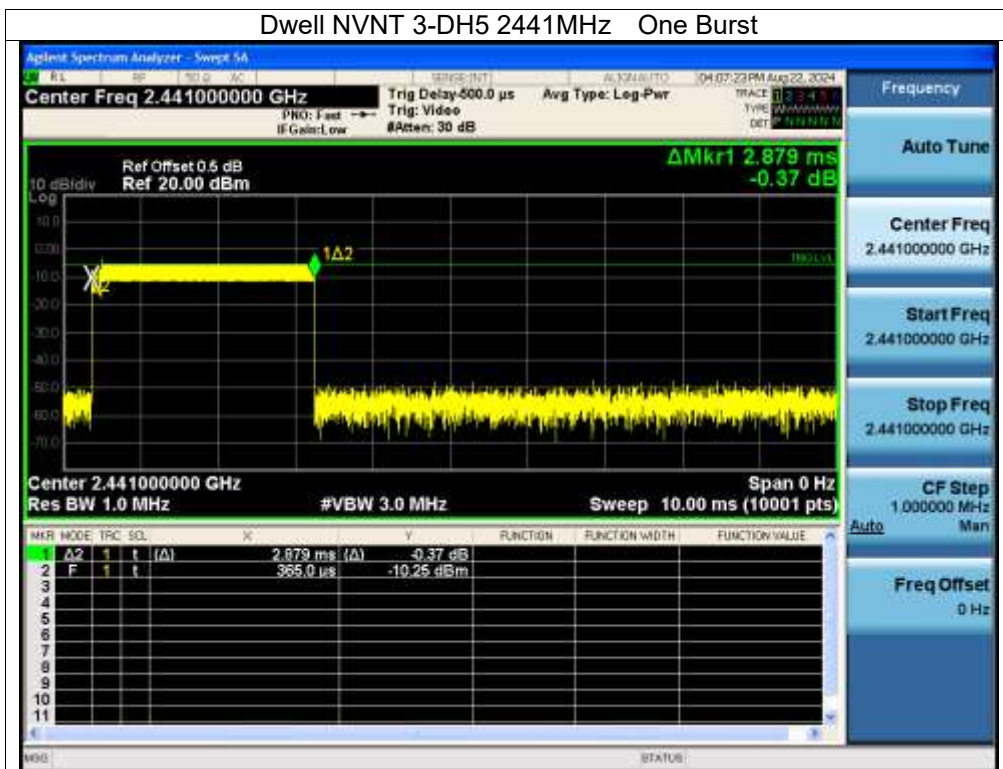

Dwell NVNT 3-DH5 2441MHz Accumulated

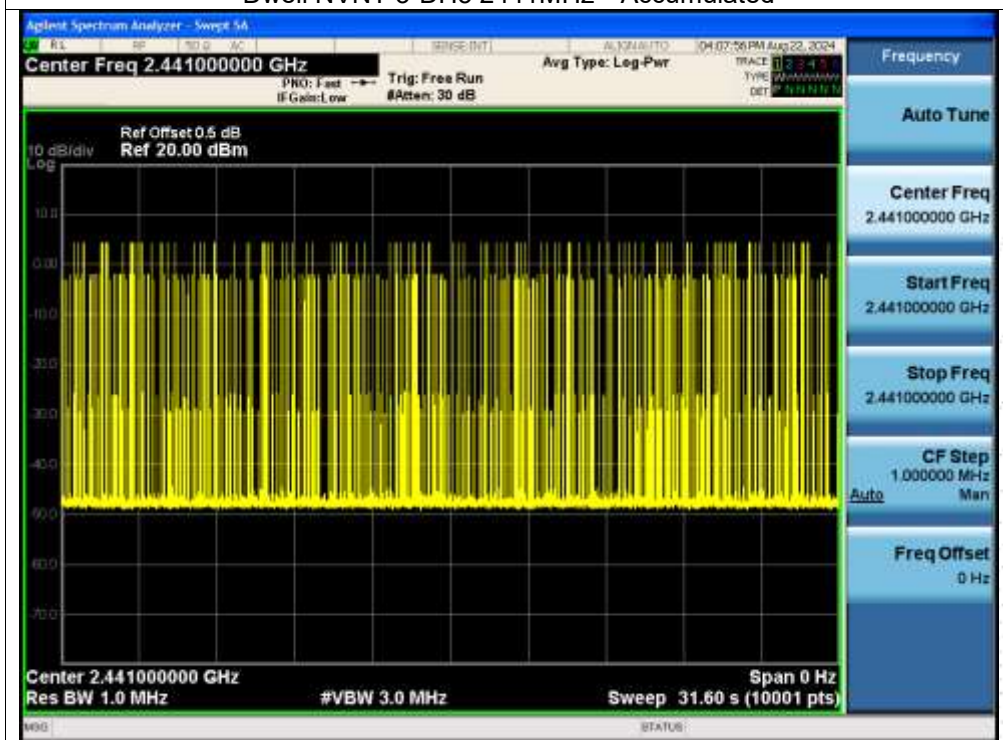

15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result


The EUT antenna is FPC antenna, The IPEX antenna connector is adopted.

16. EUT Photographs

EUT Photo 1



EUT Photo 2

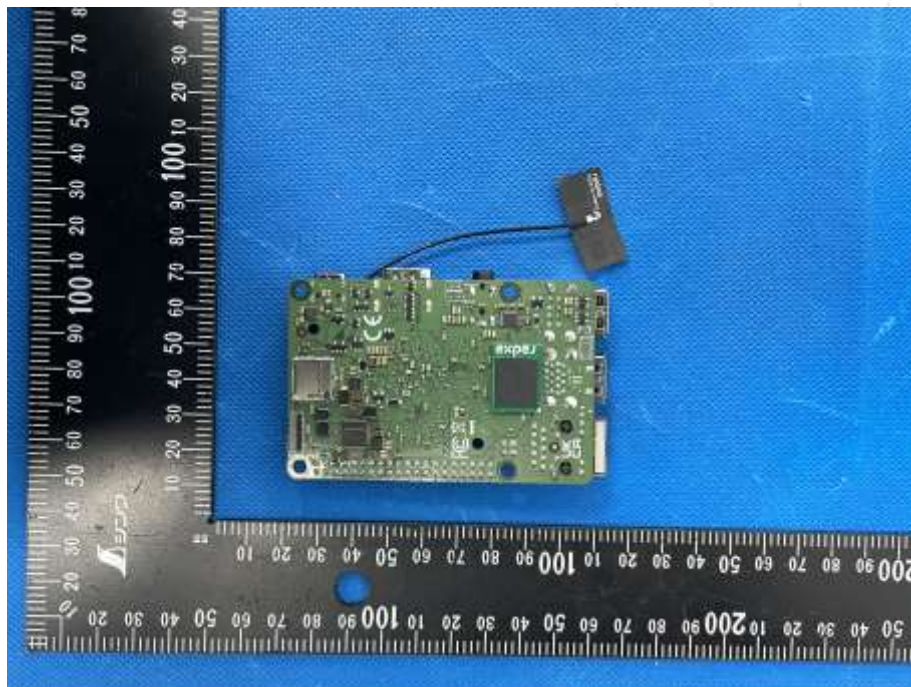


NOTE: Appendix-Photographs Of EUT Constructional Details.


17. EUT Test Setup Photographs

Conducted Emissions Photo



Radiated Measurement Photos

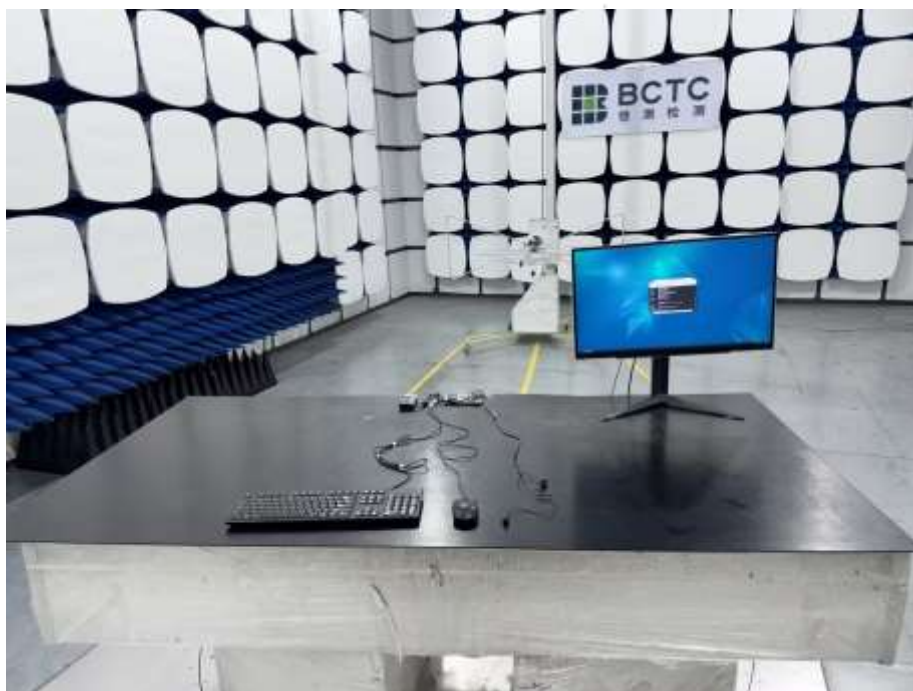

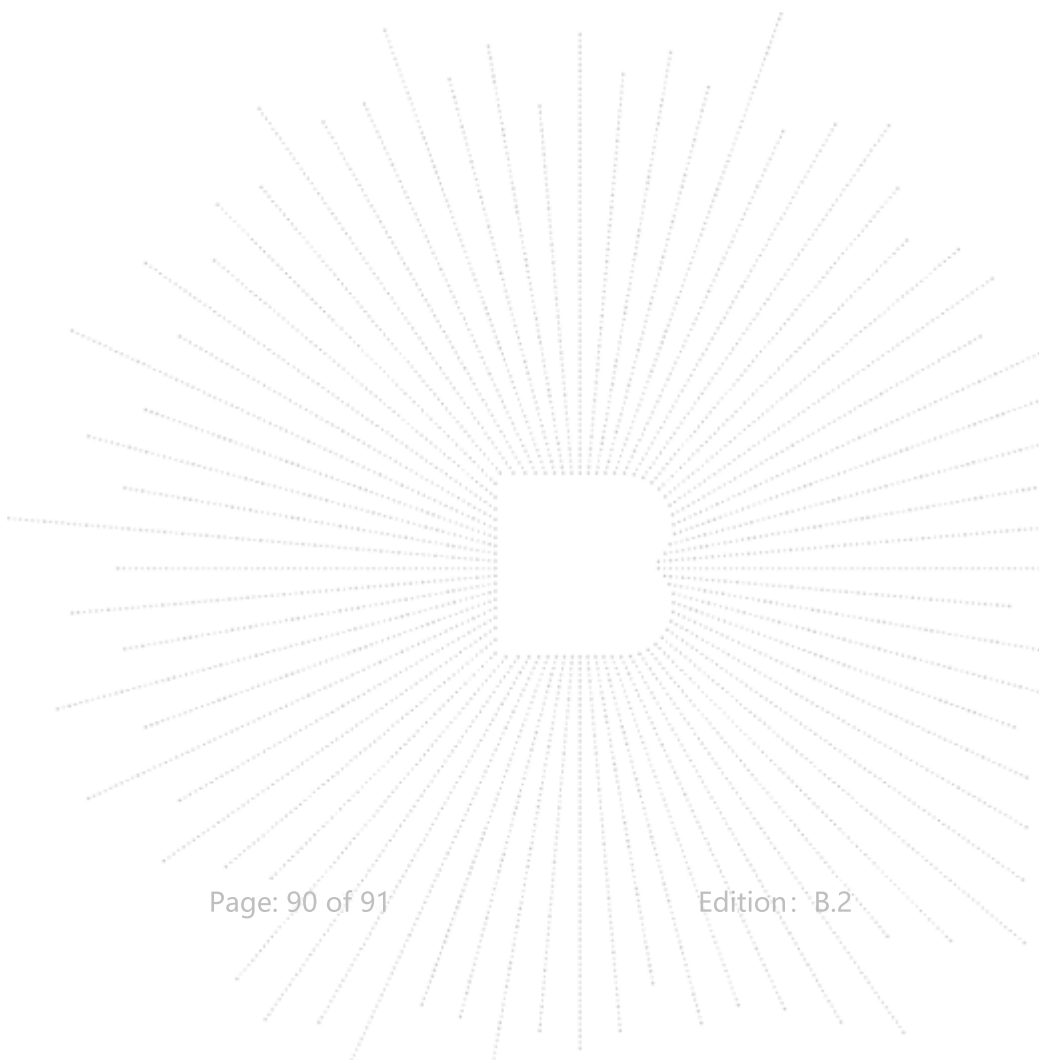

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****