



FCC Part 15C Measurement and Test Report

For

Satellite Electronic(Zhong shan)Ltd.

No.8, Chuang Ye Road, Torch Development Zone, Zhongshan,

Guangdong, China.

FCC ID: 2AQZU-18014

FCC Rule(s):	<u>FCC Part 15.231</u>
Product Description:	<u>CEILING FAN REMOTE CONTROLLER</u>
Tested Model:	<u>TR331A</u>
Report No.:	<u>WTH20X04019329W</u>
Sample Receipt Date:	<u>Apr.15, 2020</u>
Tested Date:	<u>Apr.15, 2020 to Apr.21, 2020</u>
Issued Date:	<u>Apr.21, 2020</u>
Tested By:	<u>Jack Huang / Engineer</u> <i>Jack Huang</i>
Reviewed By:	<u>Lion Cai / RF Manager</u> <i>Lion Cai</i>
Approved & Authorized By:	<u>Silin Chen / Manager</u> <i>Silin Chen</i>
Prepared By:	

Waltek Testing Group (Shenzhen) Co., Ltd.

1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Waltek Testing Group (Shenzhen) Co., Ltd.



TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY.....5
1.4 TEST FACILITY.....5
1.5 EUT SETUP AND TEST MODE.....6
1.6 MEASUREMENT UNCERTAINTY.....6
1.7 TEST EQUIPMENT LIST AND DETAILS.....7

2. SUMMARY OF TEST RESULTS8

3. ANTENNA REQUIREMENT9
3.1 STANDARD APPLICABLE.....9
3.2 TEST RESULT.....9

4. RADIATED EMISSIONS.....10
4.1 STANDARD APPLICABLE.....10
4.2 TEST PROCEDURE.....11
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12
4.4 SUMMARY OF TEST RESULTS/PLOTS.....12

5. 20DB BANDWIDTH15
5.1 STANDARD APPLICABLE.....15
5.1 TEST PROCEDURE.....15
5.2 SUMMARY OF TEST RESULTS/PLOTS.....15

6. TRANSMISSION TIME.....16
6.1 STANDARD APPLICABLE.....16
6.2 TEST PROCEDURE.....16
6.3 SUMMARY OF TEST RESULTS/PLOTS.....16

7. DUTY CYCLE.....17
7.1 STANDARD APPLICABLE.....17
7.2 TEST PROCEDURE.....17
7.3 SUMMARY OF TEST RESULTS/PLOTS.....17

8. CONDUCTED EMISSIONS19
8.1 TEST PROCEDURE.....19
8.2 BASIC TEST SETUP BLOCK DIAGRAM.....19
8.3 TEST RECEIVER SETUP.....19
8.4 SUMMARY OF TEST RESULTS/PLOTS.....19



Report version

Version No.	Date of issue	Description
Rev.00	Apr.21, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Satellite Electronic(Zhong shan)Ltd.
Address of applicant: No.8, Chuang Ye Road, Torch Development Zone, Zhongshan, Guangdong, China.

Manufacturer: Satellite Electronic(Zhong shan)Ltd.
Address of manufacturer: No.8, Chuang Ye Road, Torch Development Zone, Zhongshan, Guangdong, China.

General Description of EUT	
Product Name:	CEILING FAN REMOTE CONTROLLER
Trade Name:	/
Model No.:	TR331A
Adding Model(s):	/
Rated Voltage:	DC 3V
Power Adaptor :	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	304.25MHz
Max. Field Strength:	304.25MHz: 71.21dBuV/m(3m)
Modulation:	ASK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	304.25MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	± 1.5%
Conducted Spurious Emission	Conducted	± 2.17dB
Transmission Time	Conducted	± 5%
Conducted Emissions	Conducted	9-150kHz ± 3.74dB
		0.15-30MHz ± 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ± 4.52dB
		0.2-1GHz ± 5.56dB
		1-6GHz ± 3.84dB
		6-18GHz ± 3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-1087	Anechoic chamber	SAEMC	FSAC318	/	2017-04-28	2020-04-27

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing



2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(a)	Deactivation Testing	Compliant
§15.231(b)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant
§ 15.207(a)	Conducted Emission	N/A

N/A: not applicable



3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.



4. Radiated Emissions

4.1 Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations



The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.

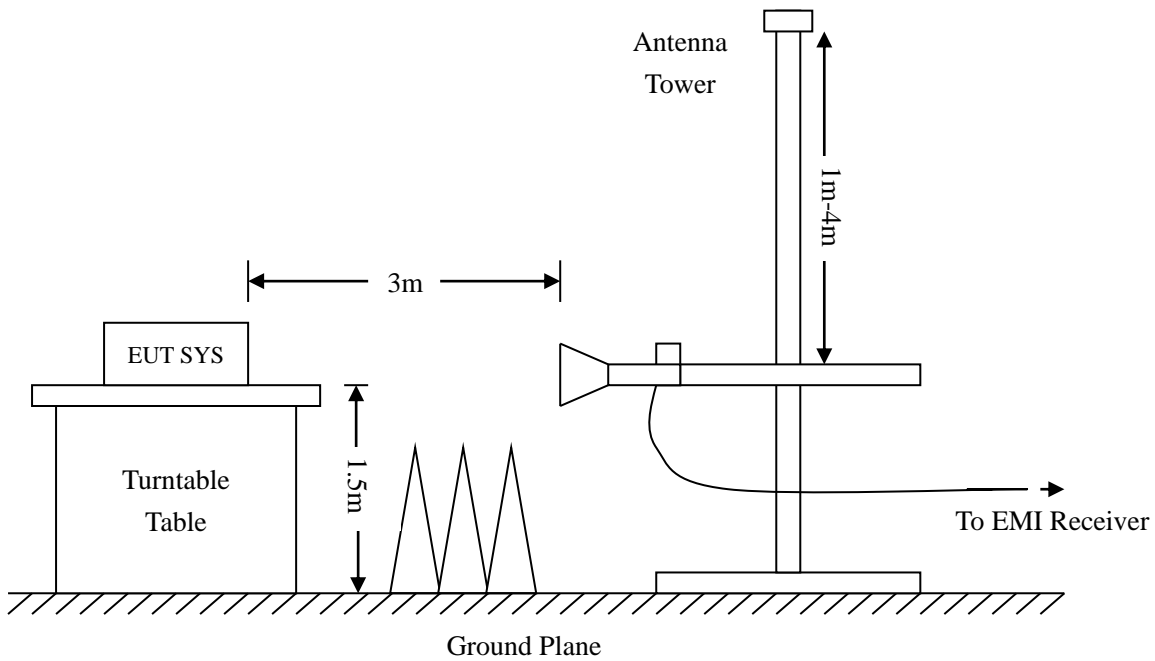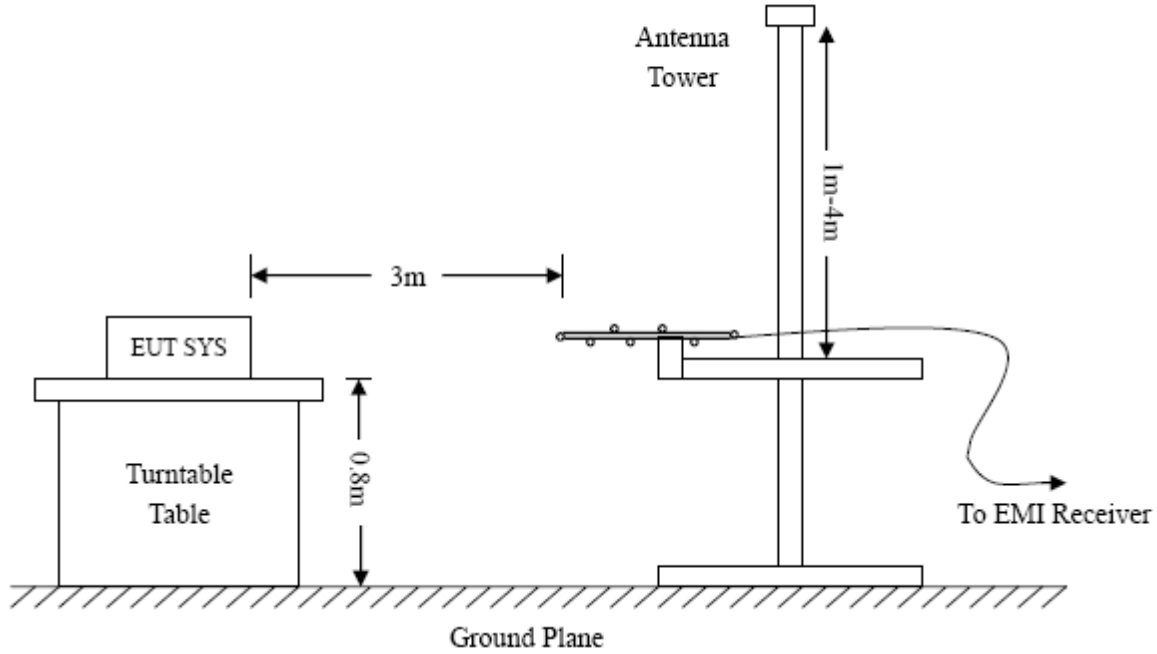



4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.



Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

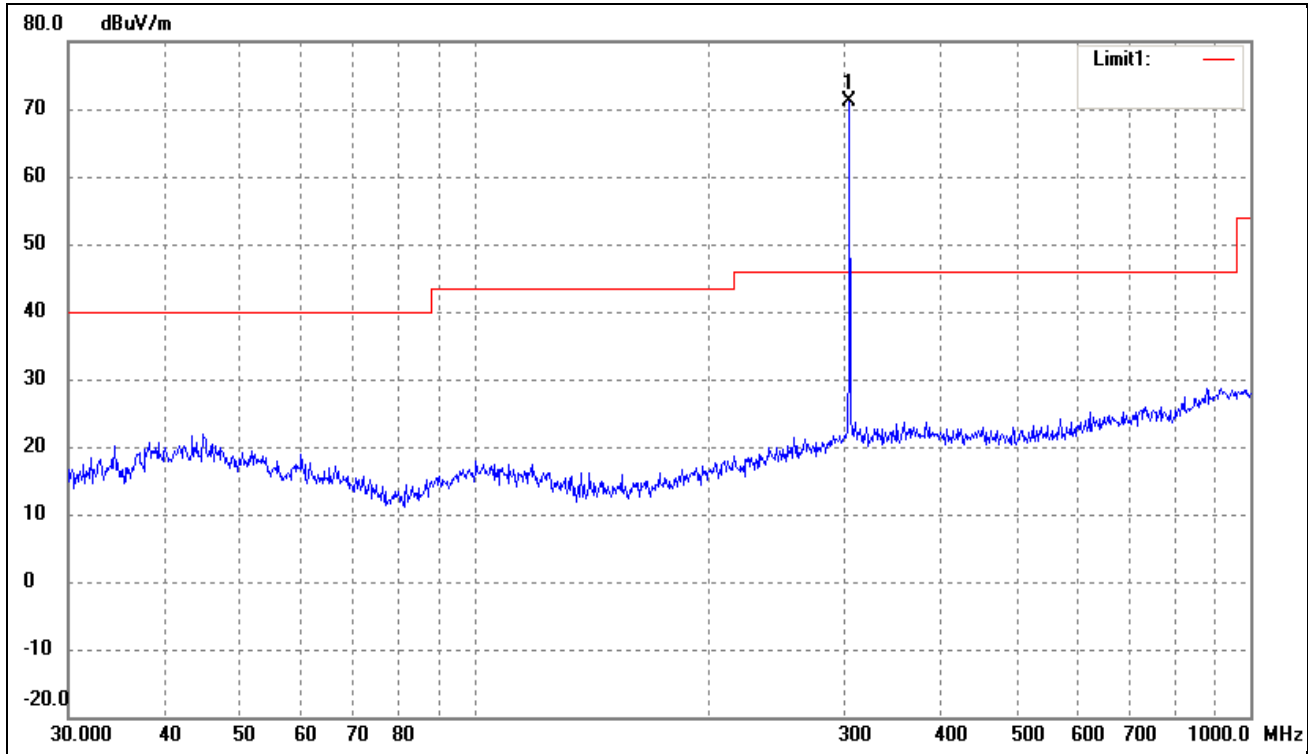


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	304.6099	79.16	-7.95	N/A	71.21	94.95	-23.74	58	100	peak
	304.6099	/	/	-7.36	63.85	74.95	-11.1	46	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1218.44	65.44	-10.11	N/A	55.33	74	-18.67	9	150	Peak
	1218.44	/	/	-7.36	47.97	54	-6.03	210	150	Ave
2	1523.05	66.87	-11.01	N/A	55.86	74	-18.14	25	150	Peak
	1523.05	/	/	-7.36	48.5	54	-5.5	36	150	Ave



Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

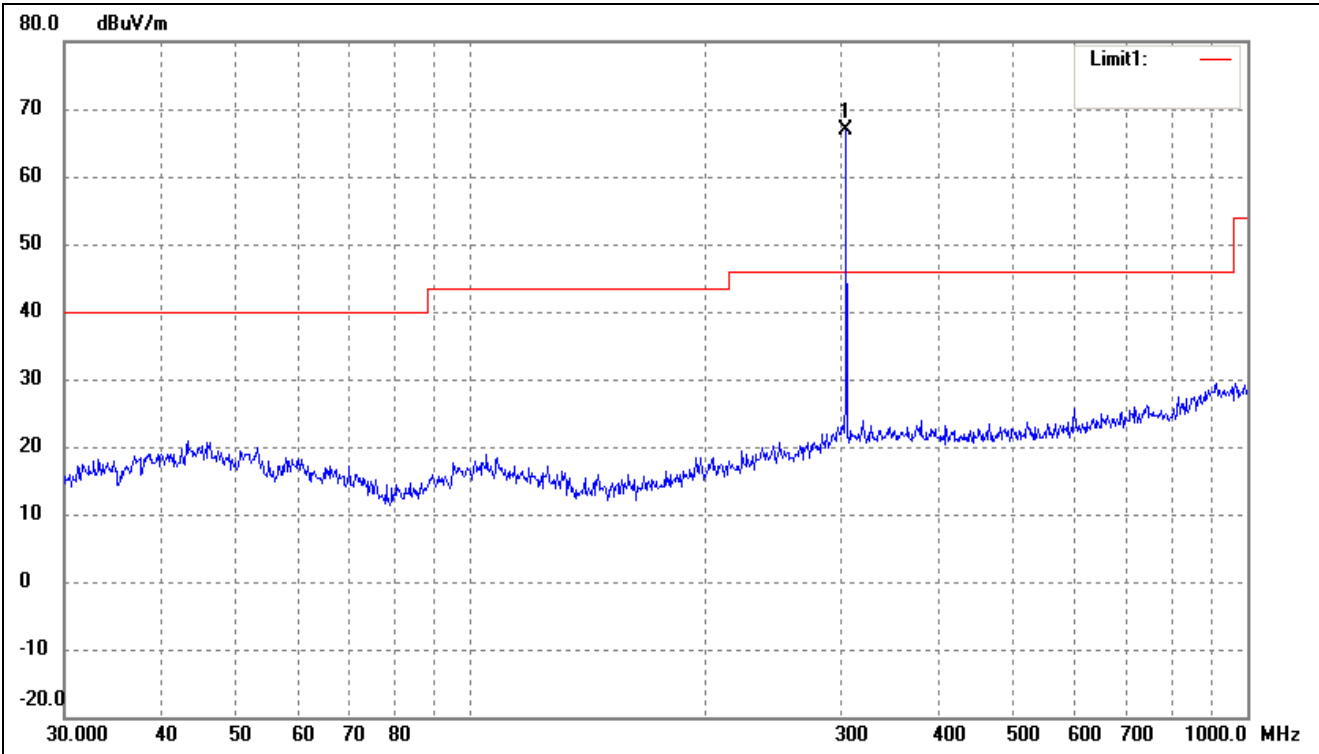

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	304.6099	74.78	-7.95	N/A	66.83	94.95	-28.12	77	100	peak
	304.6099	/	/	-7.36	59.47	74.95	-15.48	56	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1218.44	71.44	-13.11	N/A	58.33	74	-15.67	22	150	Peak
	1218.44	/	/	-7.36	50.97	54	-3.03	114	150	Ave
2	1523.05	70.05	-14.06	N/A	55.99	74	-18.01	300	150	Peak
	1523.05	/	/	-7.36	48.63	54	-5.37	46	150	Ave

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The fundamental frequency is 304.25MHz, so the fundamental and spurious emissions radiated limit base on the operating frequency 304.25MHz.



5. 20dB Bandwidth

5.1 Standard Applicable

According to FCC Part 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.1 Test Procedure


With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

5.2 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
304.25	6.647	760.6	Pass

Limit = Fundamental Frequency X 0.25% = 304.25MHz X 0.25% = 760.6 kHz

Please refer to the attached plots.

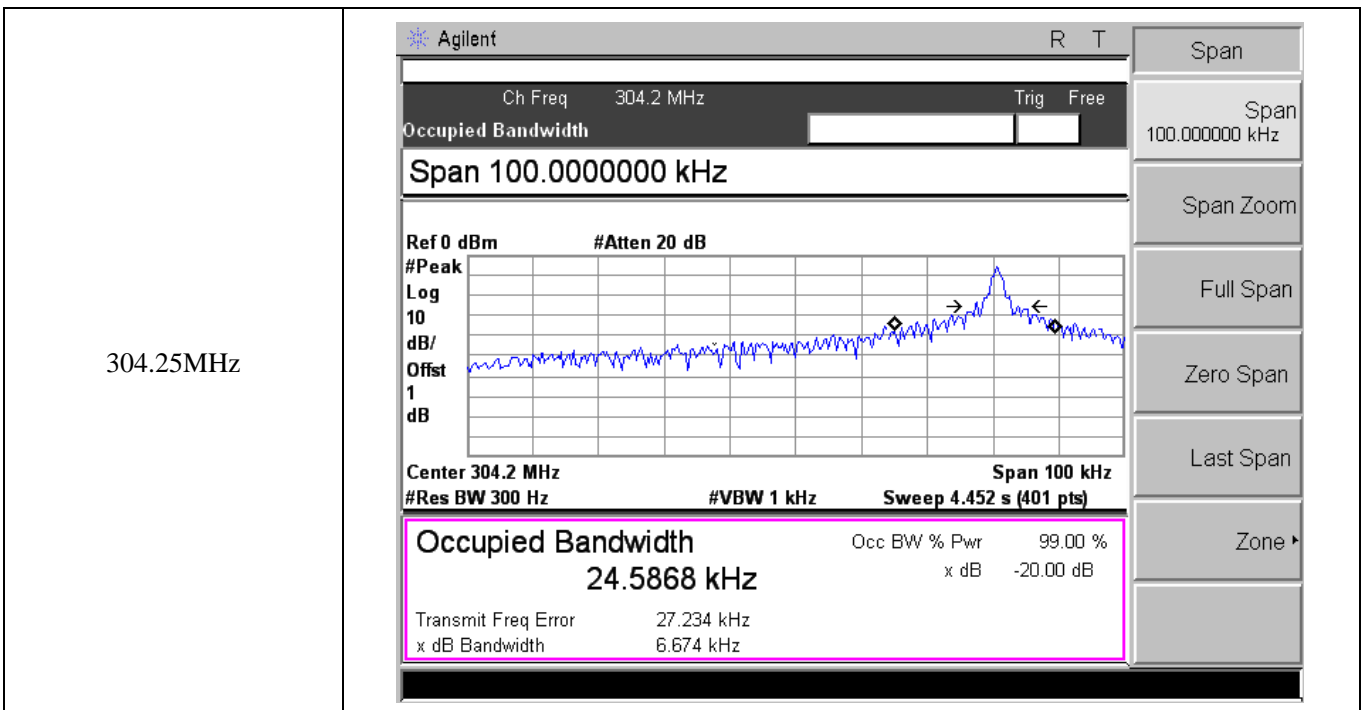



6. Transmission Time

6.1 Standard Applicable

According to FCC Part 15.231(a), the transmitter shall be complied the following requirements:

- 1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.


6.2 Test Procedure

With the EUT’s antenna attached, the EUT’s output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 304.25MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

6.3 Summary of Test Results/Plots

Transmission Type	Test Frequency(MHz)	Transmission Time(s)	Limit(s)	Result
Manually	304.25	0.225	5	Pass

Please refer to the attached plots.

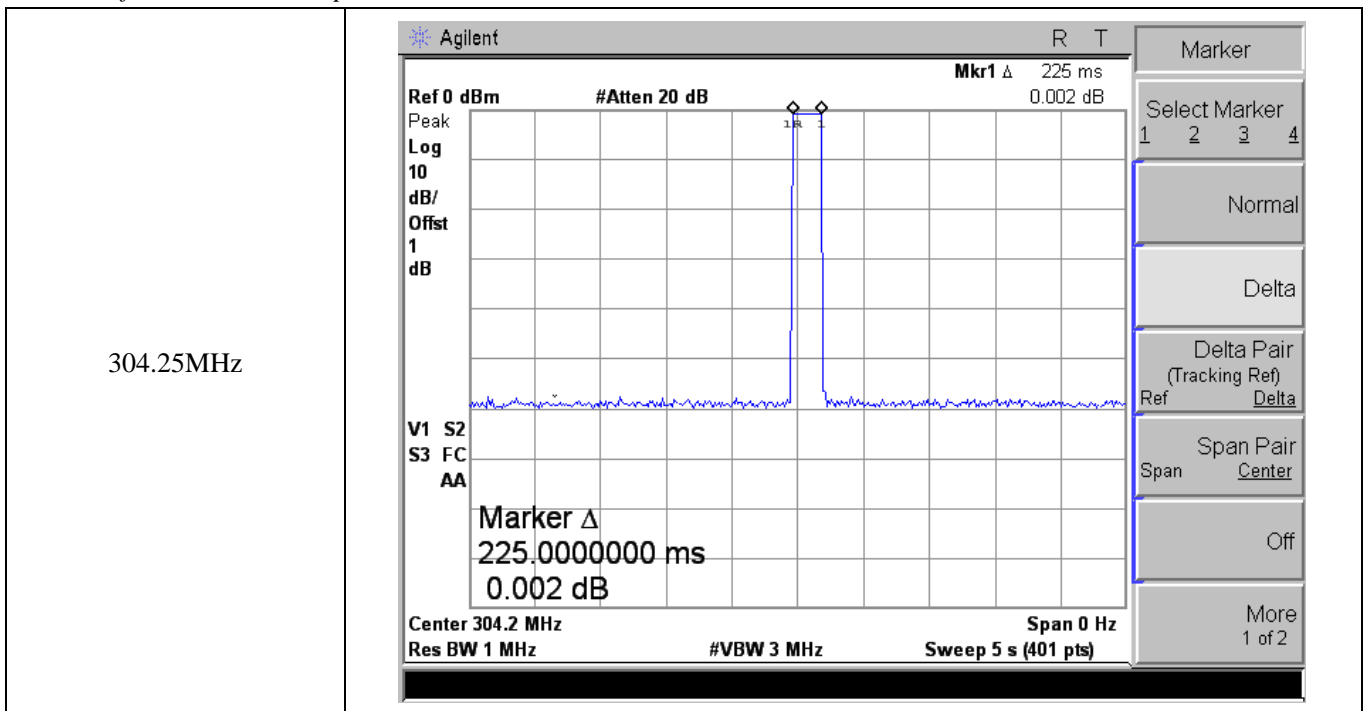



7. Duty Cycle

7.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 304.25MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

7.3 Summary of Test Results/Plots

304.25MHz:

Type of Pulse	Width of Pulse (ms)	Quantity of Pulse	Transmission Time (ms)	Total Time (T _{on}) (ms)
Pulse 1 (Wide)	0.788	17	13.40	16.60
Pulse 2 (Narrow)	0.400	8	3.2	

Test Period (T _p)	Total Time (T _{on})	Duty Cycle	Duty Cycle Factor
ms	ms	%	dB
38.75	16.60	42.84	-7.36

Remark: Duty Cycle Factor=20*log(Duty Cycle)

Please refer to the attached test plots



<p>304.25MHz</p> <p>Test Period</p>	<p>Agilent R T</p> <p>Ref 5 dBm #Atten 20 dB Mkr1 Δ 38.75 ms 0.011 dB</p> <p>Peak Log 10 dB/Offst 1 dB</p> <p>W1 S2 S3 VC AA</p> <p>Marker Δ 38.7500000 ms 0.011 dB</p> <p>Center 304.2 MHz Res BW 1 MHz #VBW 3 MHz Sweep 100 ms (401 pts) Span 0 Hz</p> <p>Marker: 1 2 3 4, Normal, Delta, Delta Pair (Tracking Ref) Delta, Span Pair Center, Off, More 1 of 2</p>																									
<p>Pulse Number</p>	<p>Agilent R T</p> <p>Ref 5 dBm #Atten 20 dB Mkr1 Δ 27.9 ms 0.005 dB</p> <p>Peak Log 10 dB/Offst 1 dB</p> <p>W1 S2 S3 VC AA</p> <p>Marker Δ 27.9000000 ms 0.005 dB</p> <p>Center 304.2 MHz Res BW 1 MHz #VBW 3 MHz Sweep 60 ms (401 pts) Span 0 Hz</p> <p>Marker: 1 2 3 4, Normal, Delta, Delta Pair (Tracking Ref) Delta, Span Pair Center, Off, More 1 of 2</p>																									
<p>Pulse 1 and Pulse 2</p>	<p>Agilent R T</p> <p>Ref 5 dBm #Atten 20 dB Mkr2 Δ 400 μs 0.018 dB</p> <p>Peak Log 10 dB/Offst 1 dB</p> <p>W1 S2 S3 VC AA</p> <p>Marker Δ 400.0000000 μs 0.018 dB</p> <p>Center 304.2 MHz Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts) Span 0 Hz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1R</td> <td>(1)</td> <td>Time</td> <td>2.975 ms</td> <td>-0.995 dBm</td> </tr> <tr> <td>1A</td> <td>(1)</td> <td>Time</td> <td>787.5 μs</td> <td>0.062 dB</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Time</td> <td>2.212 ms</td> <td>-0.827 dBm</td> </tr> <tr> <td>2A</td> <td>(1)</td> <td>Time</td> <td>400 μs</td> <td>0.018 dB</td> </tr> </tbody> </table> <p>Marker: 1 2 3 4, Normal, Delta, Delta Pair (Tracking Ref) Delta, Span Pair Center, Off, More 1 of 2</p>	Marker	Trace	Type	X Axis	Amplitude	1R	(1)	Time	2.975 ms	-0.995 dBm	1A	(1)	Time	787.5 μs	0.062 dB	2R	(1)	Time	2.212 ms	-0.827 dBm	2A	(1)	Time	400 μs	0.018 dB
Marker	Trace	Type	X Axis	Amplitude																						
1R	(1)	Time	2.975 ms	-0.995 dBm																						
1A	(1)	Time	787.5 μs	0.062 dB																						
2R	(1)	Time	2.212 ms	-0.827 dBm																						
2A	(1)	Time	400 μs	0.018 dB																						


8. Conducted Emissions

8.1 Test Procedure

The setup of EUT is according with per ANSI C63.10:2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

8.2 Basic Test Setup Block Diagram

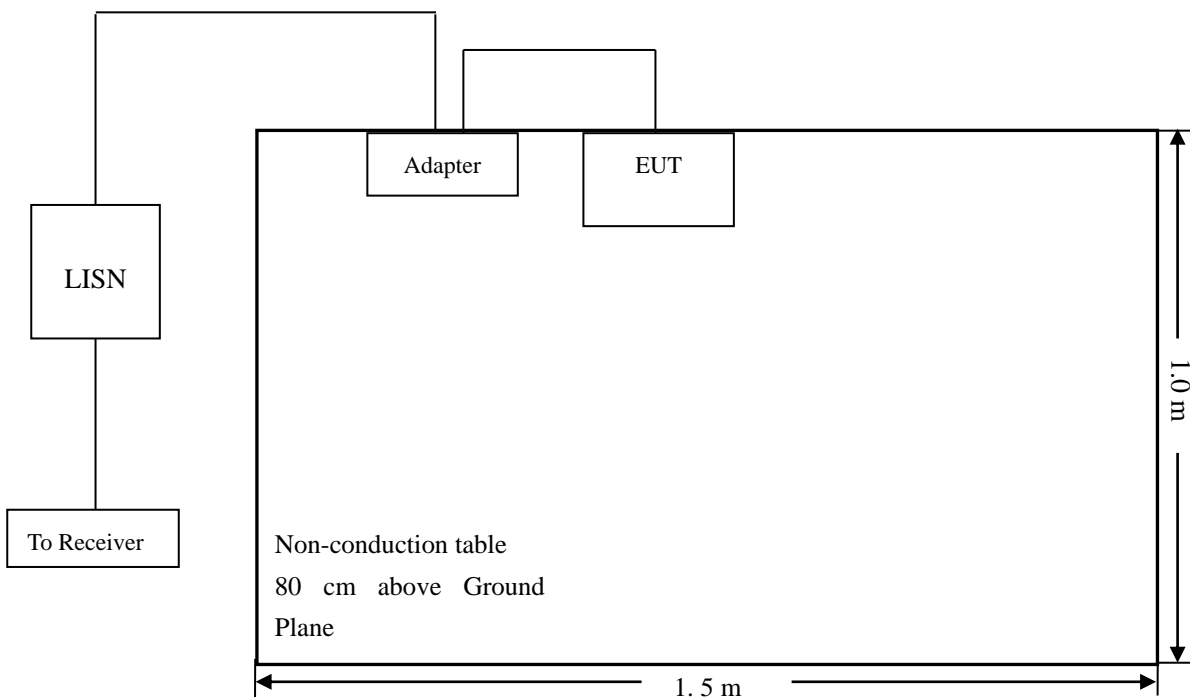

8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

- Start Frequency 150 kHz
- Stop Frequency 30 MHz
- Sweep Speed Auto
- IF Bandwidth..... 10 kHz
- Quasi-Peak Adapter Bandwidth 9 kHz
- Quasi-Peak Adapter Mode Normal

8.4 Summary of Test Results/Plots

Not applicable

***** END OF REPORT *****