

FCC Part 22H & 24E Measurement and Test Report

For

SWAGTEK

10205 NW 19th Street, STE 101, Miami, FL 33172, USA

FCC ID: O55502516

FCC Rules: FCC Part 22H, FCC Part 24E

Product Description: Smart Phone

Tested Model: ELITE 5R

Report No.: STR16078164I-1

Tested Date: 2016-07-18 to 2016-07-30

Issued Date: 2016-07-30

Tested By: Iven Guo / Engineer

Iven Guo

Reviewed By: Silin Chen / EMC Manager

Silin Chen

Approved & Authorized By: Jandy So / PSQ Manager

Jandy So

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
2. SUMMARY OF TEST RESULTS.....	8
3. RF EXPOSURE.....	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. RF OUTPUT POWER.....	10
4.1 STANDARD APPLICABLE.....	10
4.2 TEST PROCEDURE.....	10
4.3 ENVIRONMENTAL CONDITIONS.....	10
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	11
5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	19
5.1 STANDARD APPLICABLE.....	19
5.2 TEST PROCEDURE.....	19
5.3 ENVIRONMENTAL CONDITIONS.....	19
5.4 SUMMARY OF TEST RESULTS.....	20
6. EMISSION BANDWIDTH.....	21
6.1 STANDARD APPLICABLE.....	21
6.2 TEST PROCEDURE.....	21
6.3 ENVIRONMENTAL CONDITIONS.....	21
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	22
7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....	42
7.1 STANDARD APPLICABLE.....	42
7.2 TEST PROCEDURE.....	42
7.3 ENVIRONMENTAL CONDITIONS.....	42
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	43
8. SPURIOUS RADIATED EMISSIONS.....	91
8.1 STANDARD APPLICABLE.....	91
8.2 TEST PROCEDURE.....	91
8.3 ENVIRONMENTAL CONDITIONS.....	91
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	91
9. FREQUENCY STABILITY.....	102
9.1 STANDARD APPLICABLE.....	102
9.2 TEST PROCEDURE.....	102
9.3 ENVIRONMENTAL CONDITIONS.....	102
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	103

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SWAGTEK
Address of applicant: 10205 NW 19th Street, STE 101, Miami, FL 33172,
USA

Manufacturer: SWAGTEK
Address of manufacturer: 10205 NW 19th Street, STE 101, Miami, FL 33172,
USA

General Description of EUT:	
Product Name:	Smart Phone
Brand Name:	
Model No.:	ELITE 5R
Hardware version:	YK868_MB_V3.2
Software version:	lswag_part_number_bsa_v1.0+
Rated Voltage:	DC 3.7V by battery; DC 5V by Micro USB
Battery:	2000mAh
Device Category:	Portable Device
<i>Note: The test data is gathered from a production sample provided by the manufacturer. For more information see the following datasheet</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 31.89dBm, GSM1900: 28.52dBm EDGE850: 26.92dBm, EDGE1900: 24.71dBm
Type of Emission:	GSM850: 255KGXW, GSM1900: 261KGXW EDGE850: 263KG7W, EDGE1900: 260KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 0.7dBi, GSM1900: 1.7dBi,
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.77dBm WCDMA Band 5: 22.48dBm
Type of Emission:	WCDMA Band 2: 4M18F9W WCDMA Band 5: 4M23F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 5: 0.7dBi, WCDMA Band 2: 1.7dBi

1.2 Test Standards

The following report is prepared on behalf of the SWAGTEK in accordance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI/TIA-603-D: 2010 and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 971168 D01 Power Meas License Digital Systems v02r02 shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Adapter Cable	1.0	Shielded	Without Core
Earphone Cable	1.2	Unshielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2016-06-04	2017-06-03
SEMT-1034	GSM Tester	Rohde & Schwarz	CMU200	104036	2016-06-04	2017-06-03
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2016-06-04	2017-06-03
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2016-06-04	2017-06-03
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2016-06-04	2017-06-03
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2016-06-04	2017-06-03
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR report.

4. RF Output Power

4.1 Standard Applicable


According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

4.2 Test Procedure

Conducted output power test method:



Radiated power test method:

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

4.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For GSM Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	32.47	1.5	0	H	1.5	0	30.97	38.45
824.2	32.68	1.5	0	V	1.5	0	31.18	38.45
Middle Channel								
836.4	30.05	1.5	0	H	1.5	0	28.55	38.45
836.4	31.95	1.5	0	V	1.5	0	30.45	38.45
High Channel								
848.8	29.81	1.5	0	H	1.5	0	28.31	38.45
848.8	31.45	1.5	0	V	1.5	0	29.95	38.45

EIRP For GSM Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	DBm	dBm
Low Channel								
1850.2	20.51	1.5	0	H	1.9	7.7	26.31	33.00
1850.2	21.45	1.5	0	V	1.9	7.7	27.25	33.00
Middle Channel								
1880.0	21.73	1.5	0	H	1.9	7.7	27.53	33.00
1880.0	22.58	1.5	0	V	1.9	7.7	28.38	33.00
High Channel								
1909.8	21.21	1.5	0	H	1.9	7.7	27.01	33.00
1909.8	20.54	1.5	0	V	1.9	7.7	26.34	33.00

ERP For GPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	32.97	1.5	0	H	1.5	0	31.47	38.45
824.2	33.14	1.5	0	V	1.5	0	31.64	38.45
Middle Channel								
836.6	32.23	1.5	0	H	1.5	0	30.73	38.45
836.6	31.46	1.5	0	V	1.5	0	29.96	38.45
High Channel								
848.8	30.48	1.5	0	H	1.5	0	28.98	38.45
848.8	31.06	1.5	0	V	1.5	0	29.56	38.45

EIRP For GPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	21.85	1.5	0	H	1.9	7.7	27.65	33.00
1850.2	21.73	1.5	0	V	1.9	7.7	27.53	33.00
Middle Channel								
1880.0	20.57	1.5	0	H	1.9	7.7	26.37	33.00
1880.0	20.32	1.5	0	V	1.9	7.7	26.12	33.00
High Channel								
1909.8	19	1.5	0	H	1.9	7.7	24.8	33.00
1909.8	20.33	1.5	0	V	1.9	7.7	26.13	33.00

ERP For EDGE Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	26.18	1.5	0	H	1.5	0	24.68	38.45
824.2	26.17	1.5	0	V	1.5	0	24.67	38.45
Middle Channel								
836.6	26.8	1.5	0	H	1.5	0	25.3	38.45
836.6	27.32	1.5	0	V	1.5	0	25.82	38.45
High Channel								
848.8	26.58	1.5	0	H	1.5	0	25.08	38.45
848.8	26.24	1.5	0	V	1.5	0	24.74	38.45

EIRP For EDGE Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	15.95	1.5	0	H	1.9	7.7	21.75	33.00
1850.2	16.81	1.5	0	V	1.9	7.7	22.61	33.00
Middle Channel								
1880.0	15.85	1.5	0	H	1.9	7.7	21.65	33.00
1880.0	17.05	1.5	0	V	1.9	7.7	22.85	33.00
High Channel								
1909.8	15.73	1.5	0	H	1.9	7.7	21.53	33.00
1909.8	16.89	1.5	0	V	1.9	7.7	22.69	33.00

ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.75	1.5	0	H	1.5	0	20.25	38.45
826.4	22.58	1.5	0	V	1.5	0	21.08	38.45
Middle Channel								
836.6	22.01	1.5	0	H	1.5	0	20.51	38.45
836.6	22.18	1.5	0	V	1.5	0	20.68	38.45
High Channel								
846.6	20.83	1.5	0	H	1.5	0	19.33	38.45
846.6	22.86	1.5	0	V	1.5	0	21.36	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	19.84	1.5	0	H	1.5	0	18.34	38.45
826.4	22.55	1.5	0	V	1.5	0	21.05	38.45
Middle Channel								
836.6	20.05	1.5	0	H	1.5	0	18.55	38.45
836.6	22.49	1.5	0	V	1.5	0	20.99	38.45
High Channel								
846.6	19.63	1.5	0	H	1.5	0	18.13	38.45
846.6	20.97	1.5	0	V	1.5	0	19.47	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	19.54	1.5	0	H	1.5	0	18.04	38.45
826.4	21.98	1.5	0	V	1.5	0	20.48	38.45
Middle Channel								
836.6	20.43	1.5	0	H	1.5	0	18.93	38.45
836.6	22.56	1.5	0	V	1.5	0	21.06	38.45
High Channel								
846.6	20.05	1.5	0	H	1.5	0	18.55	38.45
846.6	22.07	1.5	0	V	1.5	0	20.57	38.45

EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	14.32	1.5	0	H	1.9	7.7	20.12	33
1852.4	16.07	1.5	0	V	1.9	7.7	21.87	33
Middle Channel								
1880.0	14.19	1.5	0	H	1.9	7.7	19.99	33
1880.0	16.29	1.5	0	V	1.9	7.7	22.09	33
High Channel								
1907.6	15.03	1.5	0	H	1.9	7.7	20.83	33
1907.6	15.55	1.5	0	V	1.9	7.7	21.35	33

EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	14.85	1.5	0	H	1.9	7.7	20.65	33
1852.4	13.71	1.5	0	V	1.9	7.7	19.51	33
Middle Channel								
1880.0	13.09	1.5	0	H	1.9	7.7	18.89	33
1880.0	15.01	1.5	0	V	1.9	7.7	20.81	33
High Channel								
1907.6	12.91	1.5	0	H	1.9	7.7	18.71	33
1907.6	13.99	1.5	0	V	1.9	7.7	19.79	33

EIRP For HSUPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	13.75	1.5	0	H	1.9	7.7	19.55	33
1852.4	15.38	1.5	0	V	1.9	7.7	21.18	33
Middle Channel								
1880.0	13.97	1.5	0	H	1.9	7.7	19.77	33
1880.0	14.37	1.5	0	V	1.9	7.7	20.17	33
High Channel								
1907.6	14.02	1.5	0	H	1.9	7.7	19.82	33
1907.6	13.84	1.5	0	V	1.9	7.7	19.64	33

Note: Result = Substitute - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM	Low Channel	824.2	31.83	38.45
	Middle Channel	836.6	31.89	38.45
	High Channel	848.8	31.44	38.45
GPRS(1 Slot)	Low Channel	824.2	31.89	38.45
	Middle Channel	836.6	31.76	38.45
	High Channel	848.8	31.49	38.45
EDGE(1 Slot)	Low Channel	824.2	26.91	38.45
	Middle Channel	836.6	26.87	38.45
	High Channel	848.8	26.92	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GSM	Low Channel	1850.2	28.39	33.0
	Middle Channel	1880.0	28.45	33.0
	High Channel	1909.8	28.33	33.0
GPRS(1 Slot)	Low Channel	1850.2	28.48	33.0
	Middle Channel	1880.0	28.52	33.0
	High Channel	1909.8	28.43	33.0
EDGE(1 Slot)	Low Channel	1850.2	24.42	33.0
	Middle Channel	1880.0	24.71	33.0
	High Channel	1909.8	24.39	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.38	38.45
	Middle Channel	836.6	22.48	38.45
	High Channel	846.6	22.45	38.45
HSDPA	Low Channel	826.4	21.29	38.45
	Middle Channel	836.6	21.23	38.45
	High Channel	846.6	21.48	38.45
HSUPA	Low Channel	826.4	21.35	38.45
	Middle Channel	836.6	21.26	38.45
	High Channel	846.6	21.52	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	22.77	33.00
	Middle Channel	1880.0	22.75	33.00
	High Channel	1907.6	22.29	33.00
HSDPA	Low Channel	1852.4	21.59	33.00
	Middle Channel	1880.0	21.23	33.00
	High Channel	1907.6	20.90	33.00
HSUPA	Low Channel	1852.4	21.53	33.00
	Middle Channel	1880.0	21.20	33.00
	High Channel	1907.6	20.96	33.00

5. Peak-to-average Ratio (PAR) of Transmitter

5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

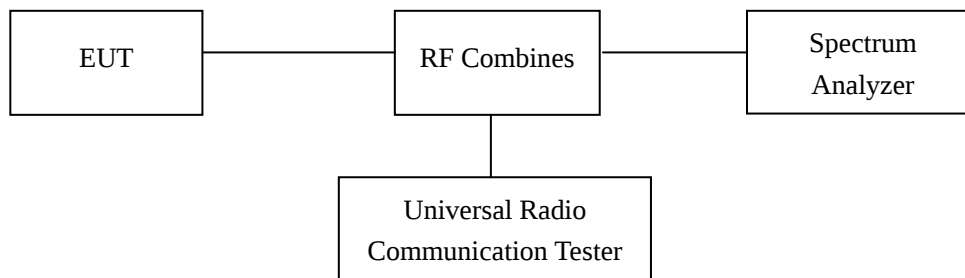

5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results

Only the worst case was selected to record

For PCS Band

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	512	1850.2	9.85	13
GPRS(1 Slot)	512	1850.2	9.91	13
EDGE(1 Slot)	512	1850.2	9.88	13

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	2.63	13
HSDPA	9262	1852.4	2.63	13
HSUPA	9262	1852.4	2.64	13

6. Emission Bandwidth

6.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

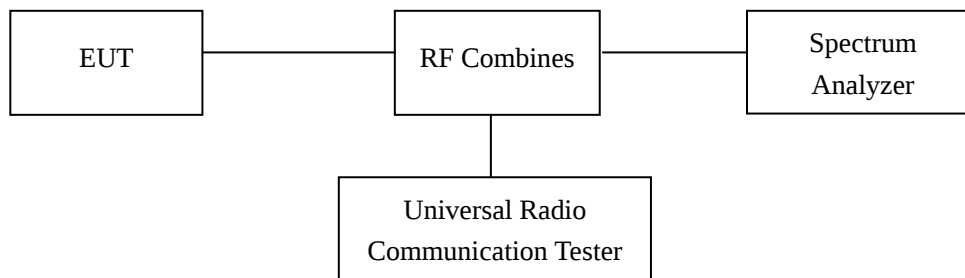

6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	252.0336	338.227
	190	836.6	254.2148	339.311
	251	848.8	253.4757	339.059
GPRS	128	824.2	252.5110	338..264
	190	836.6	252.9991	343.522
	251	848.8	254.5139	338.863
EDGE	128	824.2	257.9969	335.848
	190	836.6	263.4233	333.253
	251	848.8	259.1090	339.409

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	251.6496	339.960
	661	1880.0	260.6648	331.829
	810	1909.8	252.8174	337.427
GPRS	512	1850.2	254.8147	338.580
	661	1880.0	252.9499	339.518
	810	1909.8	255.5980	340.289
EDGE	512	1850.2	259.9393	331.395
	661	1880.0	255.8811	333.179
	810	1909.8	254.3840	330.435


For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	4132	826.4	4.1577	4.689
	4183	836.6	4.1379	4.708
	4233	846.6	4.1568	4.715
HSDPA	4132	826.4	4.1634	4.683
	4183	836.6	4.1336	4.680
	4233	846.6	4.1683	4.686
HSUPA	4132	826.4	4.1831	4.695
	4183	836.6	4.2315	4.927
	4233	846.6	4.1776	4.767


For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	9262	1852.4	4.1791	4.729
	9400	1880.0	4.1760	4.719
	9538	1907.6	4.1648	4.699
HSDPA	9262	1852.4	4.1525	4.705
	9400	1880.0	4.1716	4.717
	9538	1907.6	4.1651	4.727
HSUPA	9262	1852.4	4.1659	4.711
	9400	1880.0	4.1624	4.725
	9538	1907.6	4.1720	4.708


For Cellular Band
GSM Low Channel

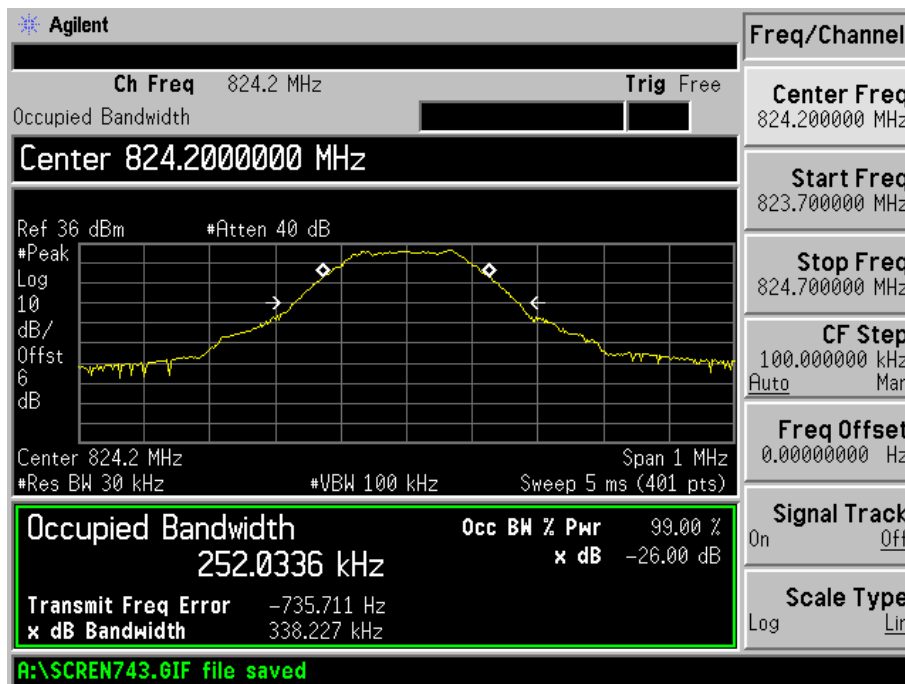


GSM Middle Channel

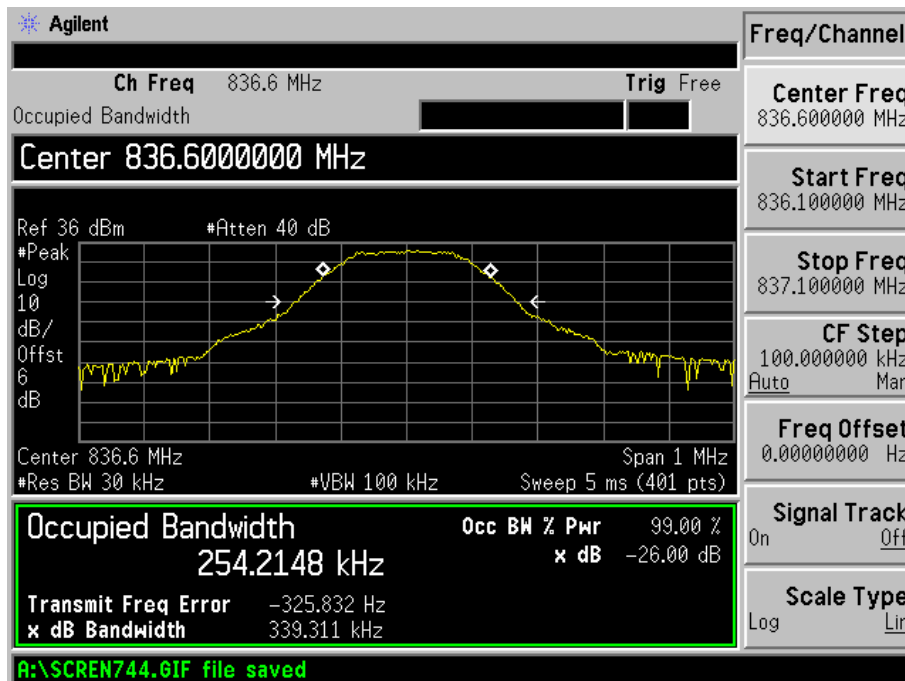


GSM High channel

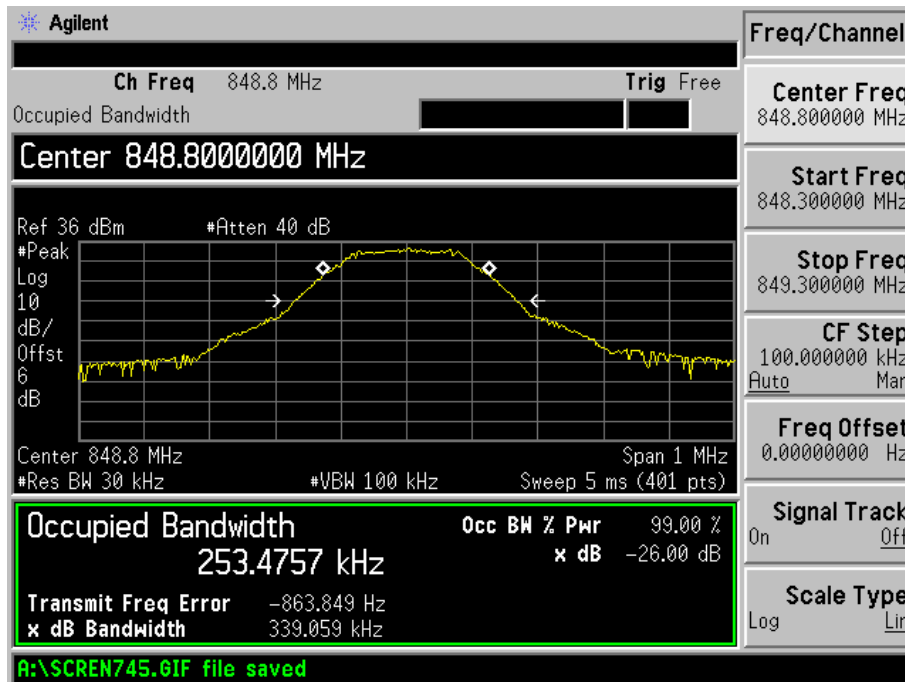


GPRS Low Channel

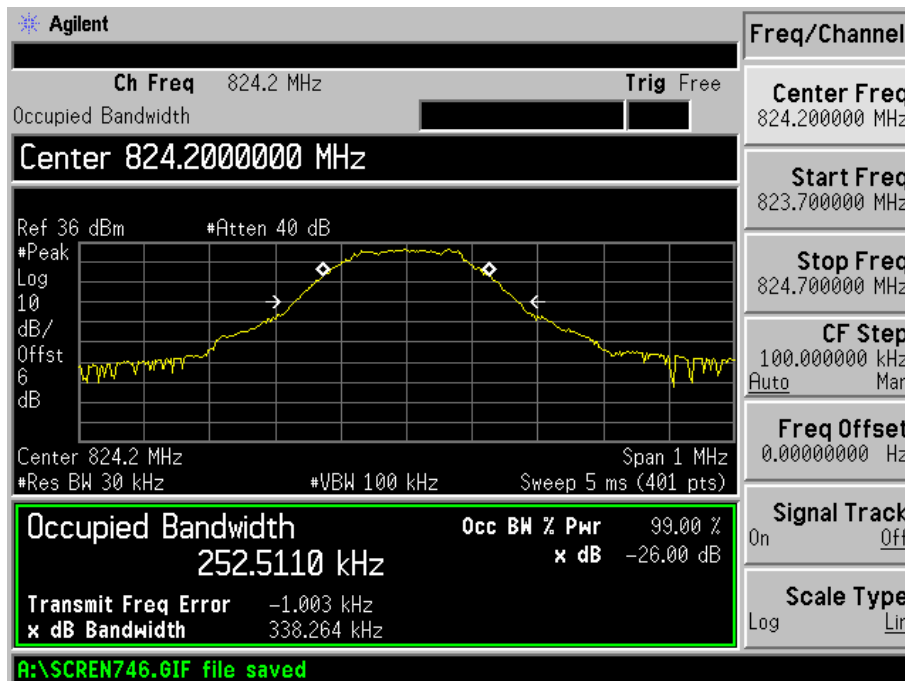


GPRS Middle Channel

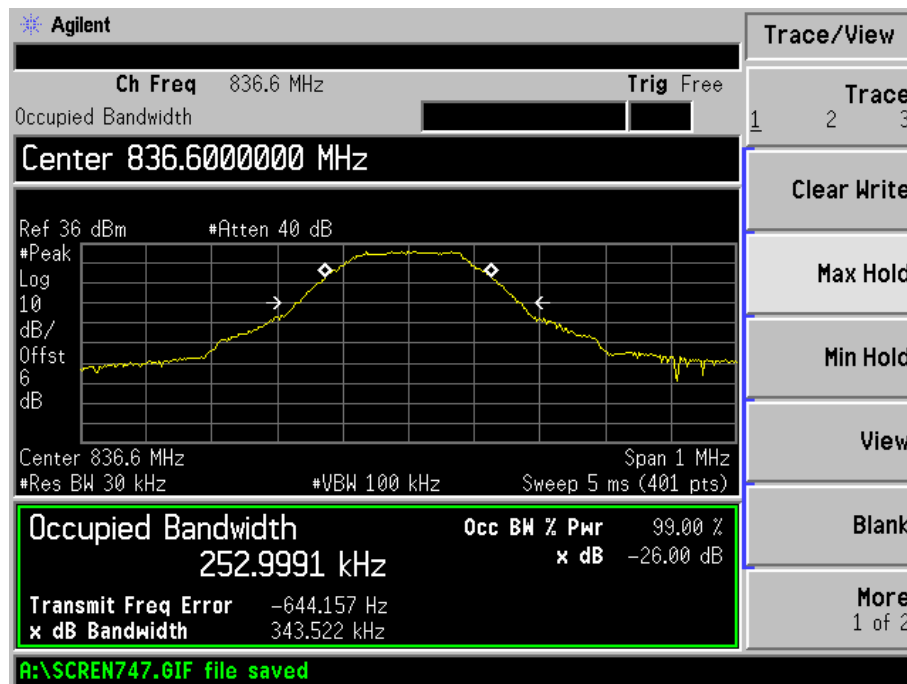


GPRS High Channel

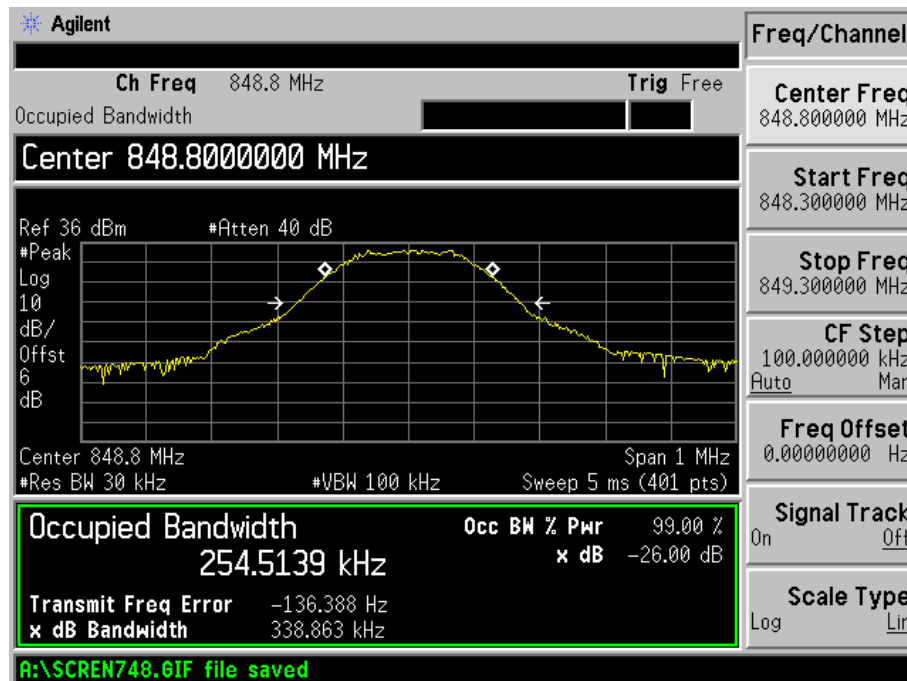


EDGE Low Channel

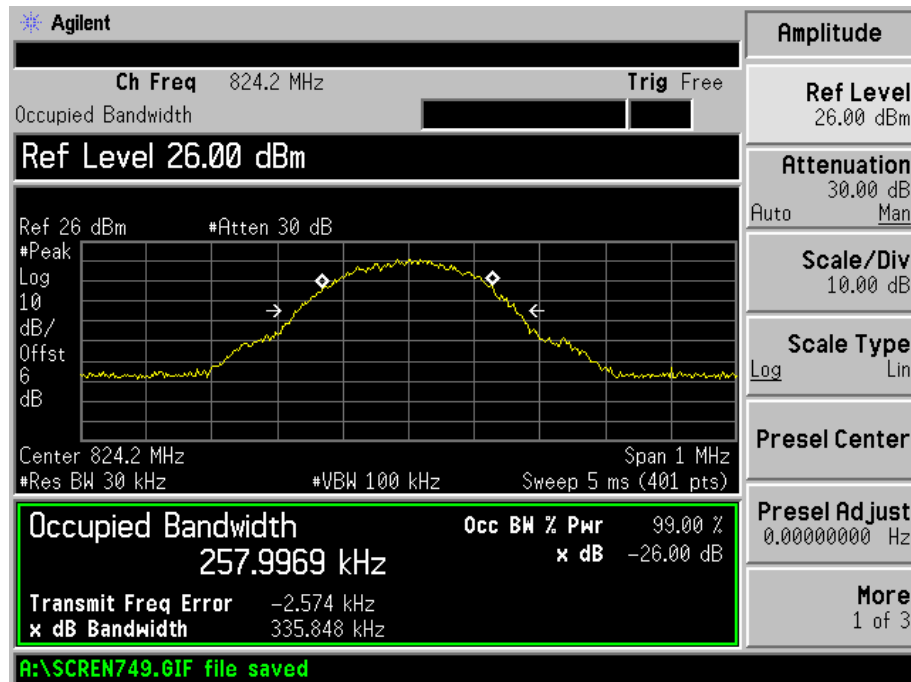

EDGE Middle Channel

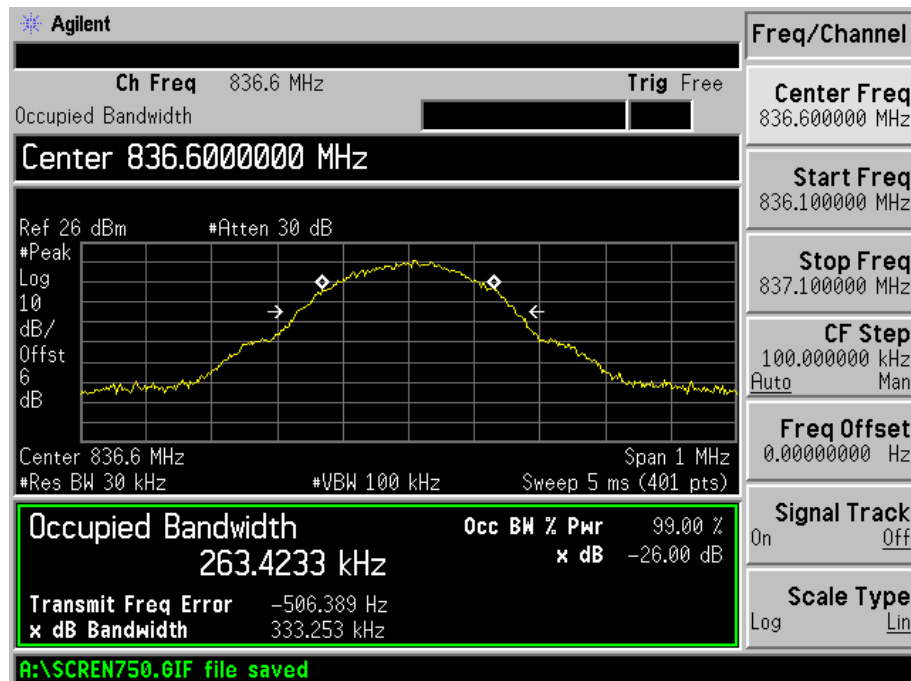


EDGE High Channel

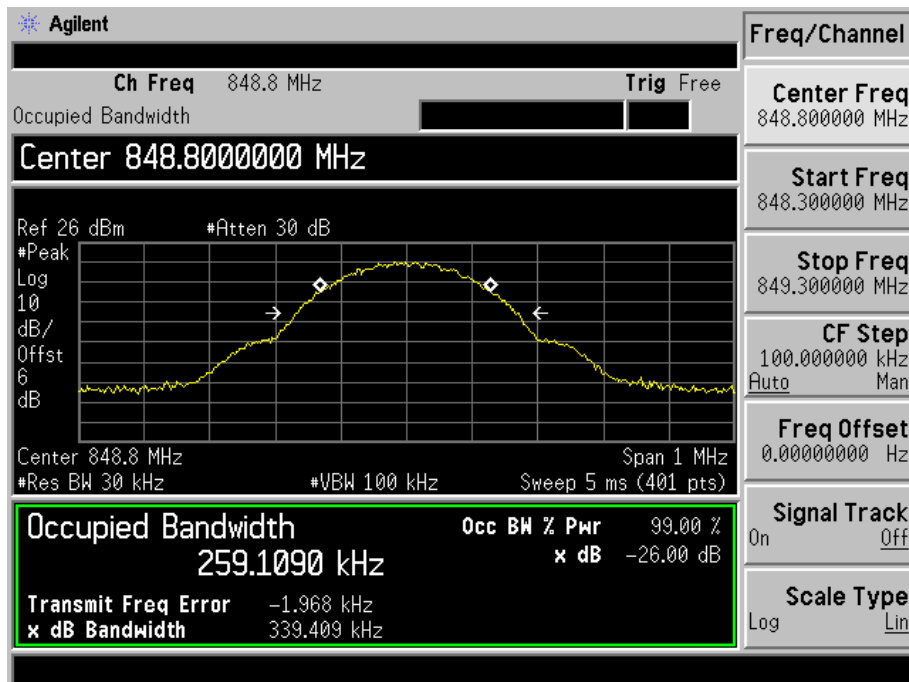


For PCS Band


GSM Low Channel

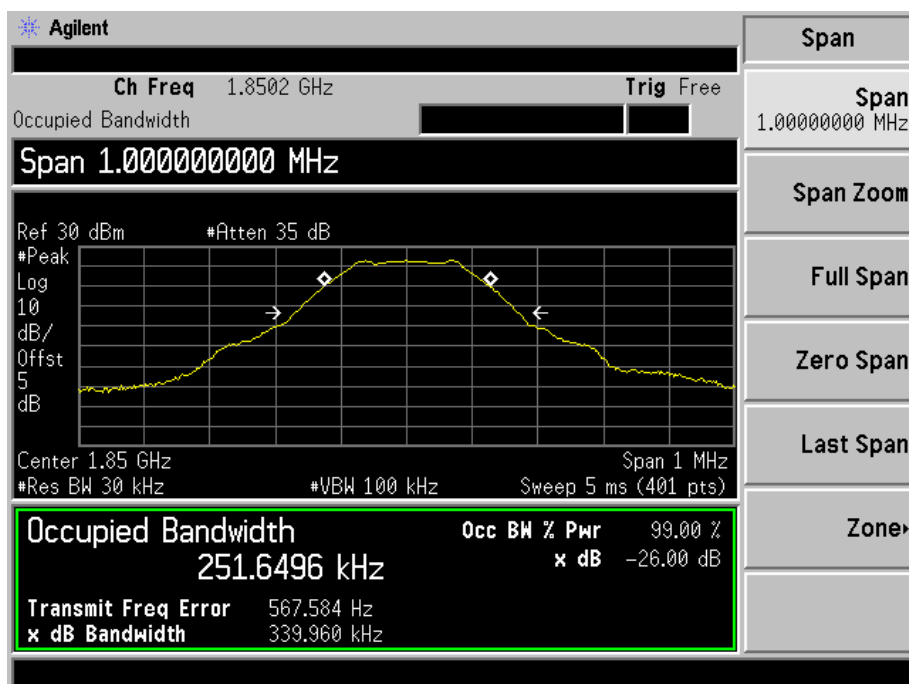


GSM Middle Channel

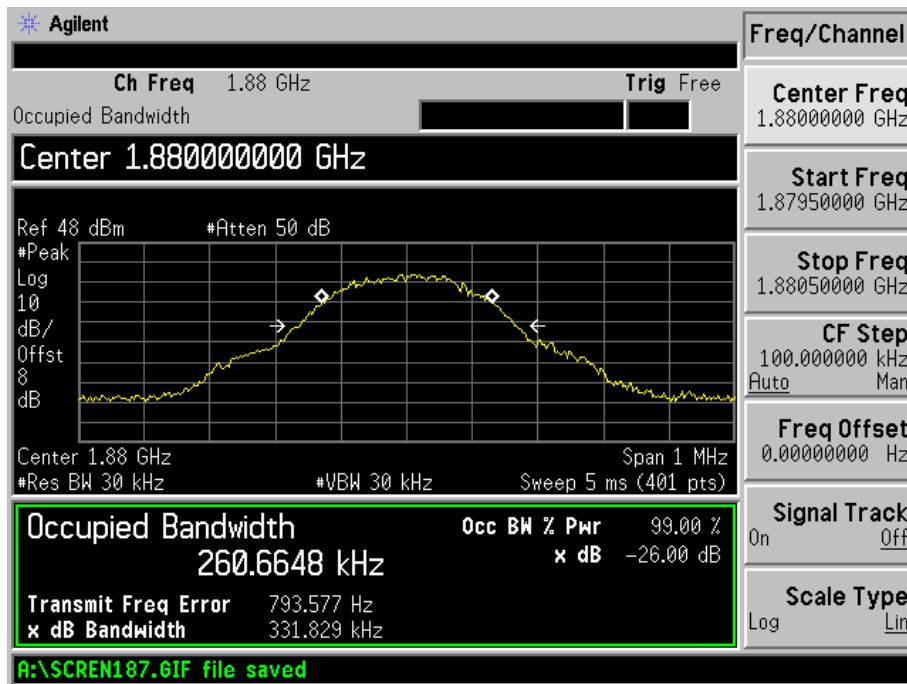


GSM High channel

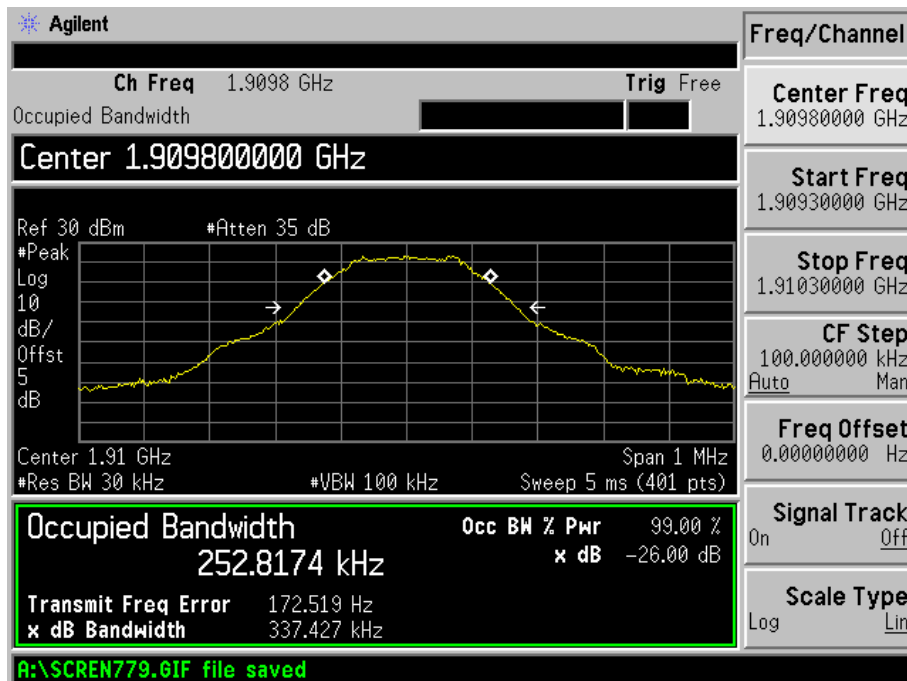


GPRS Low Channel

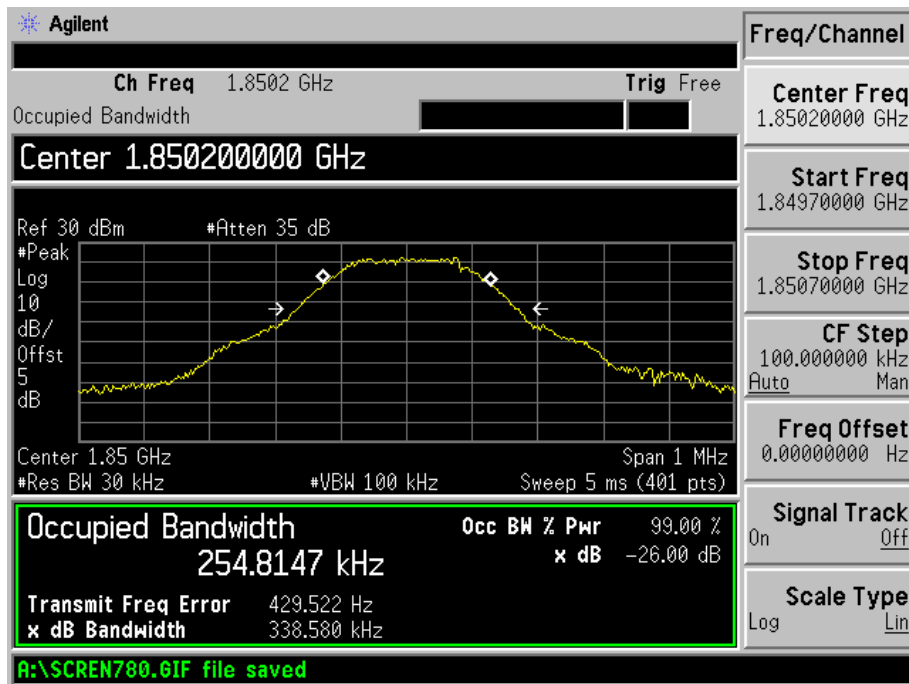


GPRS Middle Channel

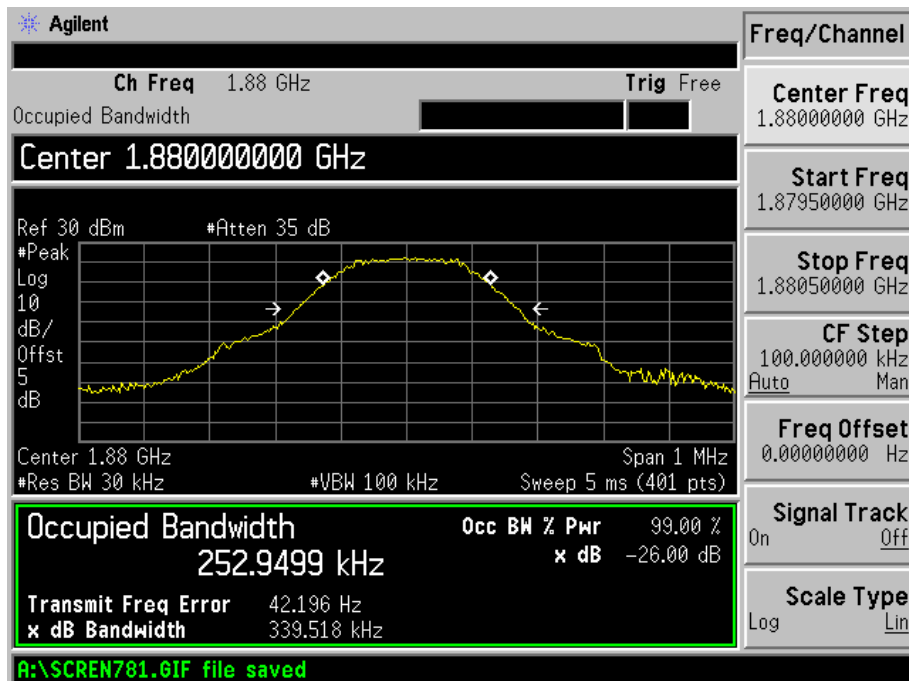


GPRS High Channel

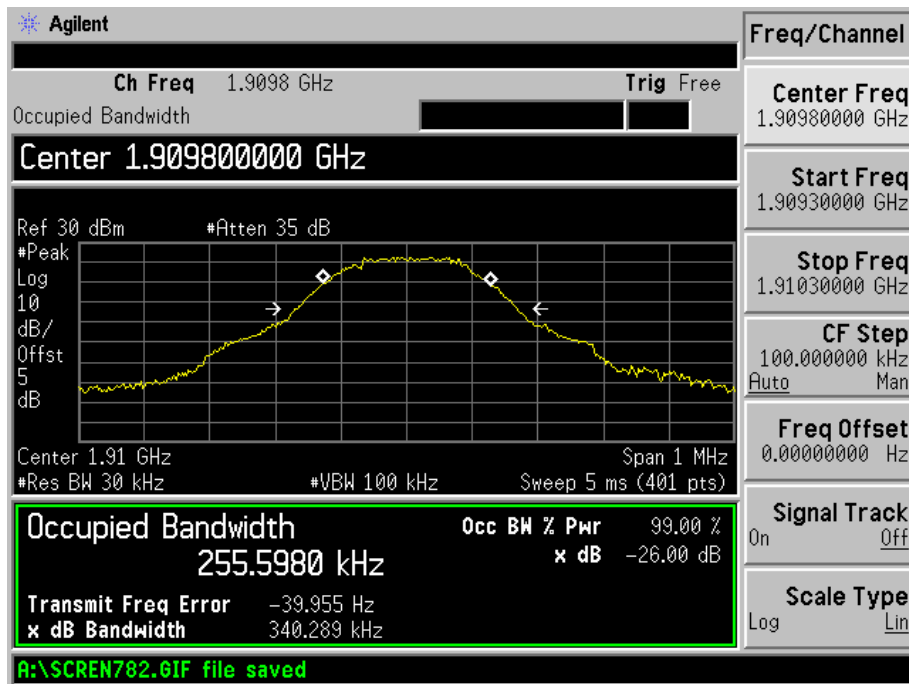


EDGE Low Channel

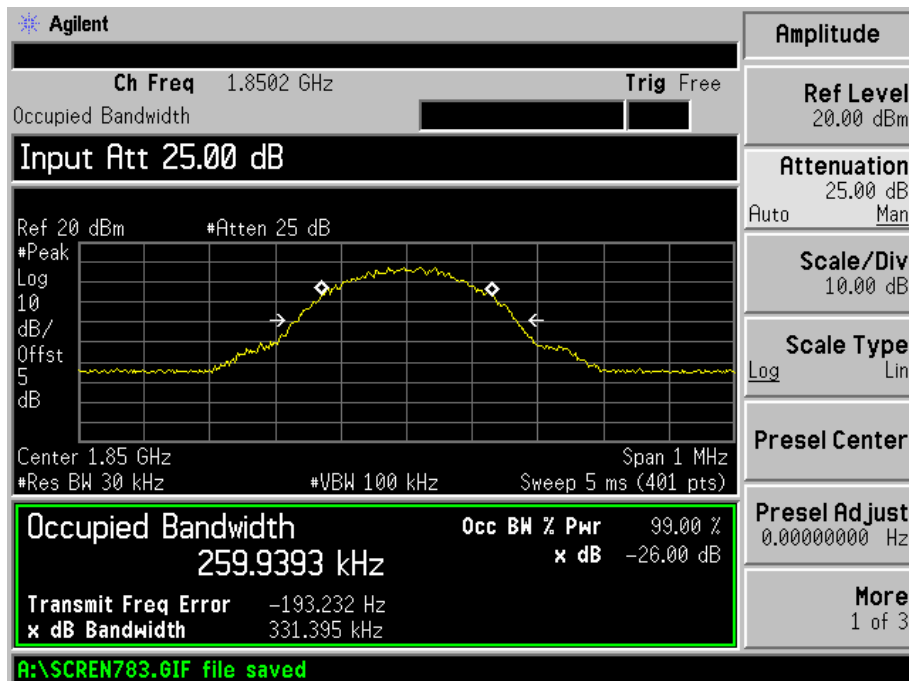


EDGE Middle Channel

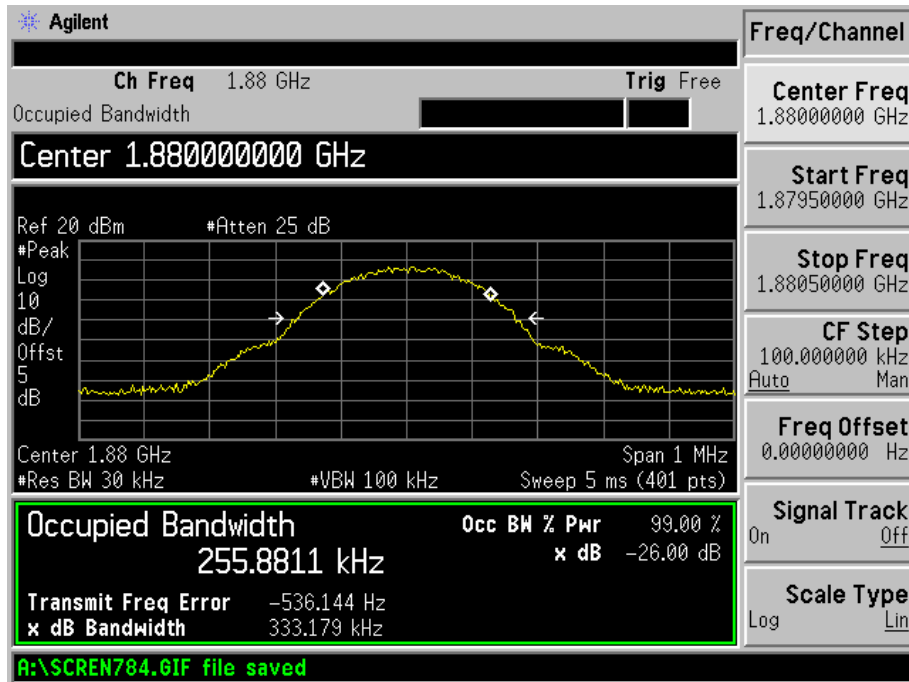


EDGE High Channel

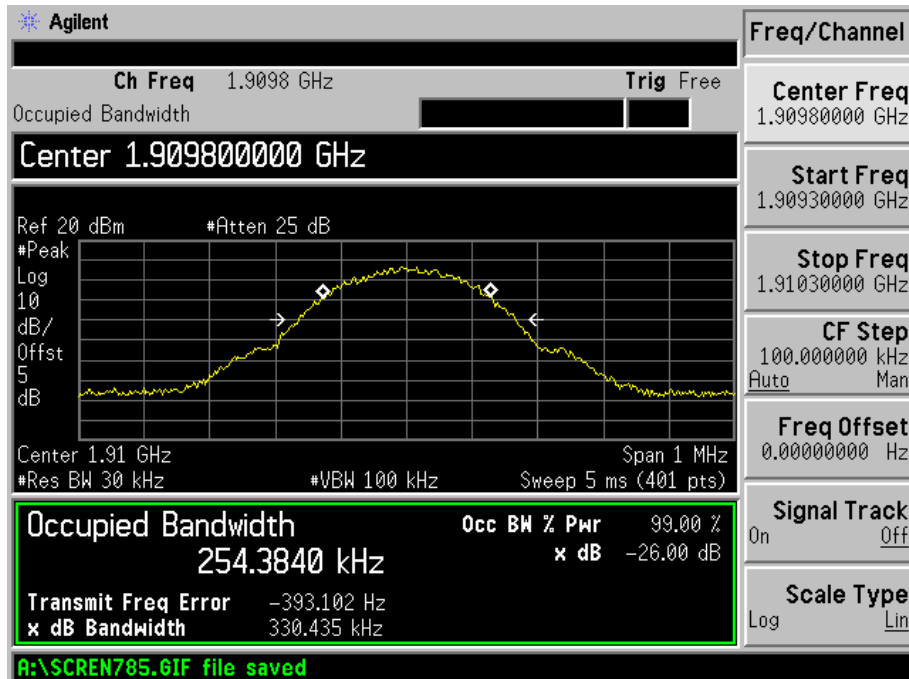


For Band V
WCDMA Low Channel

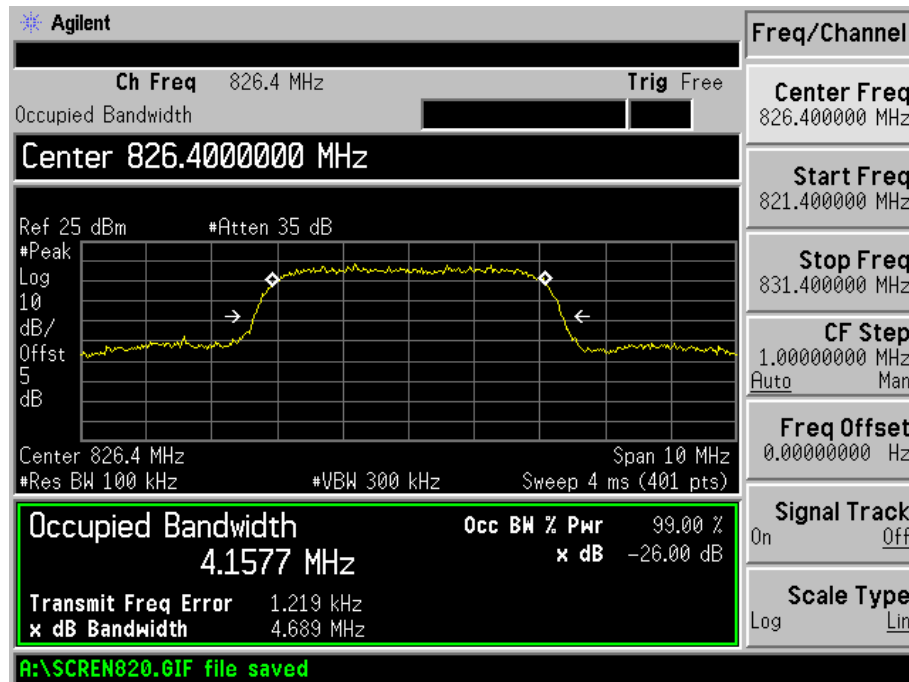


WCDMA Middle Channel

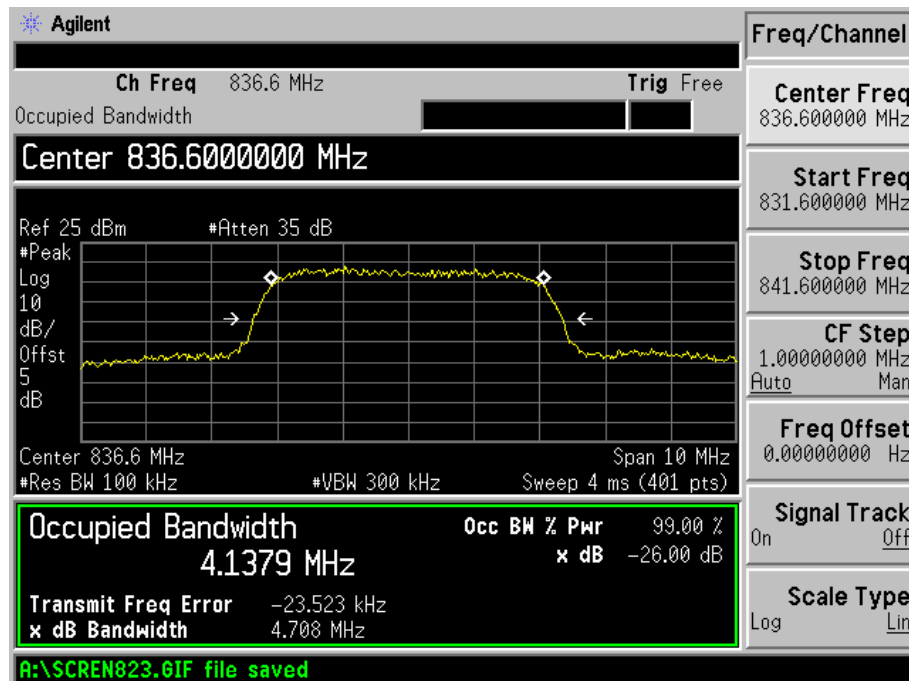


WCDMA High Channel

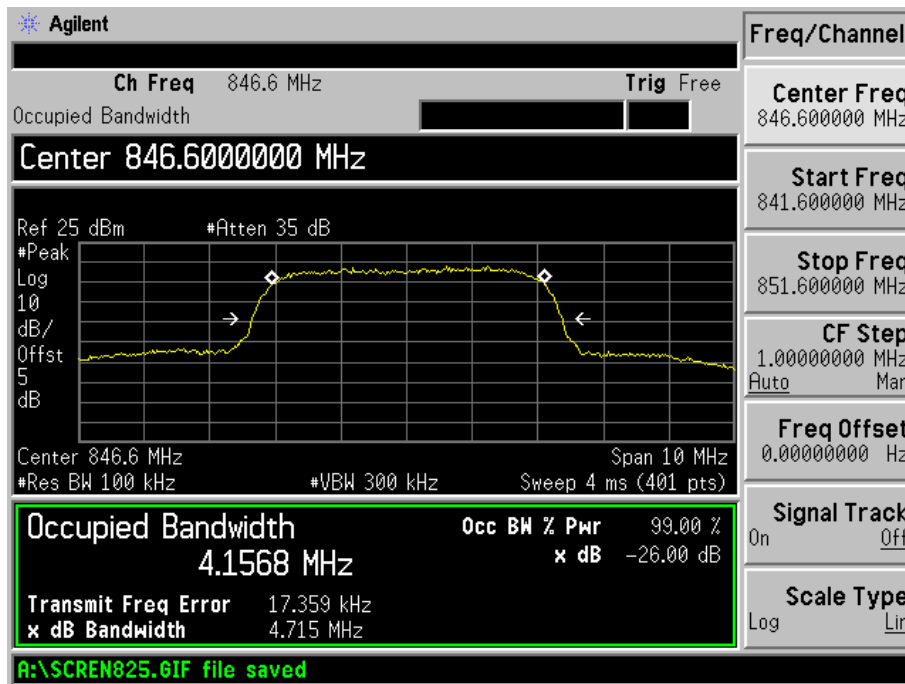


HSDPA Low Channel

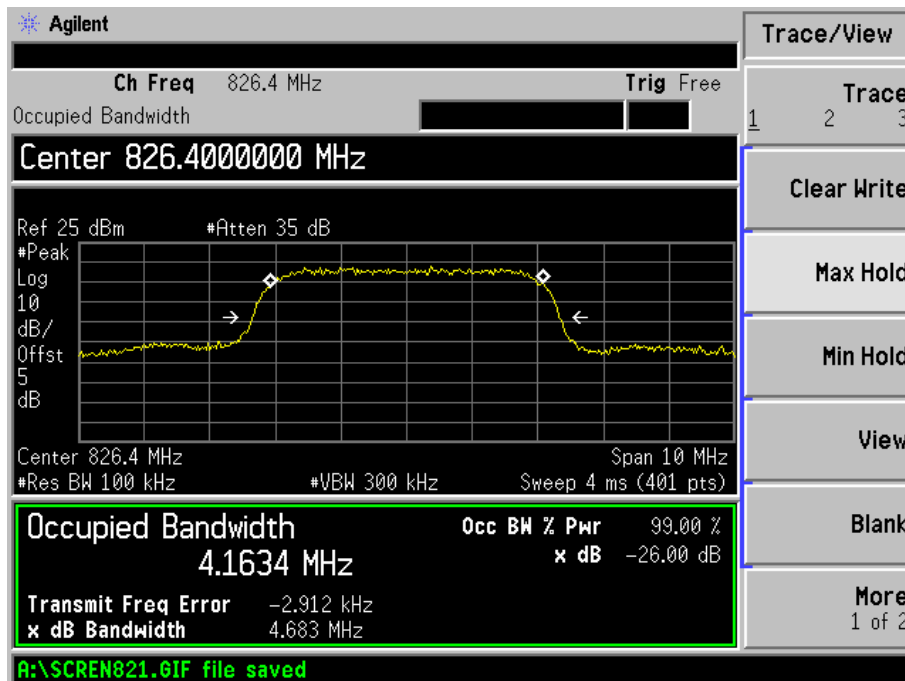


HSDPA Middle Channel

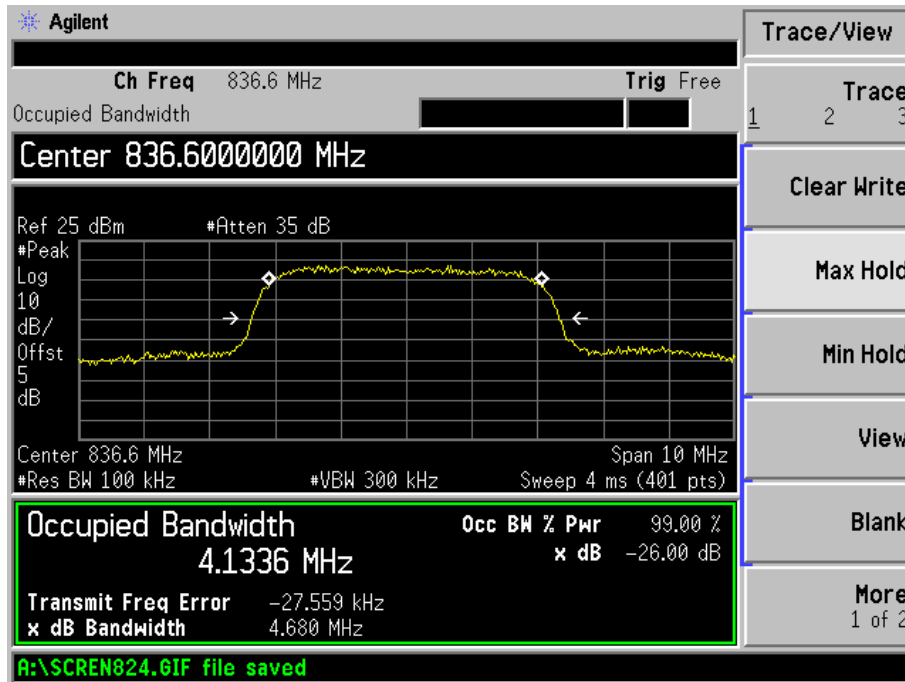


HSDPA High Channel

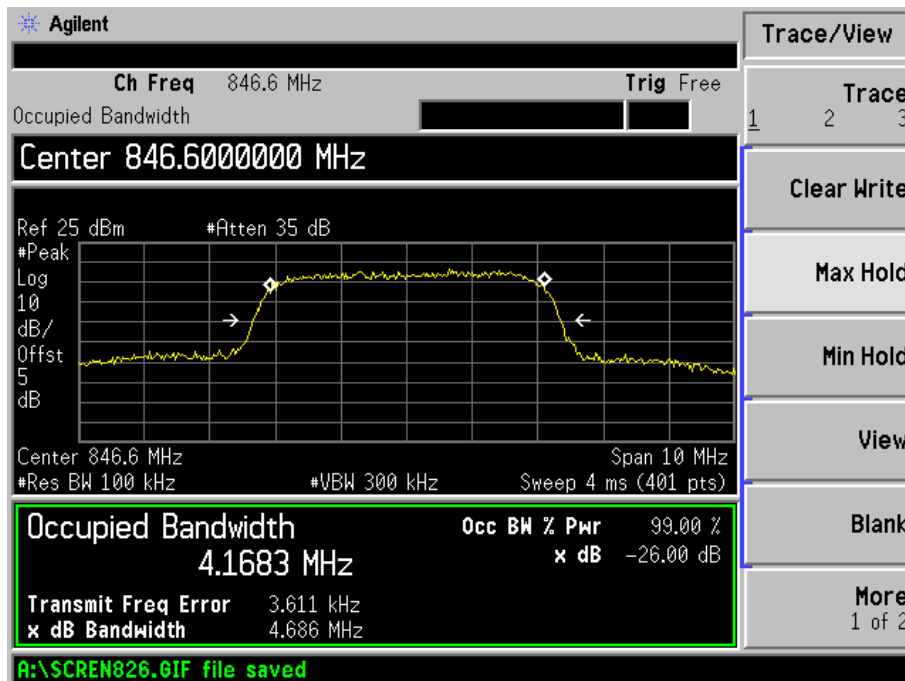


HSUPA Low Channel

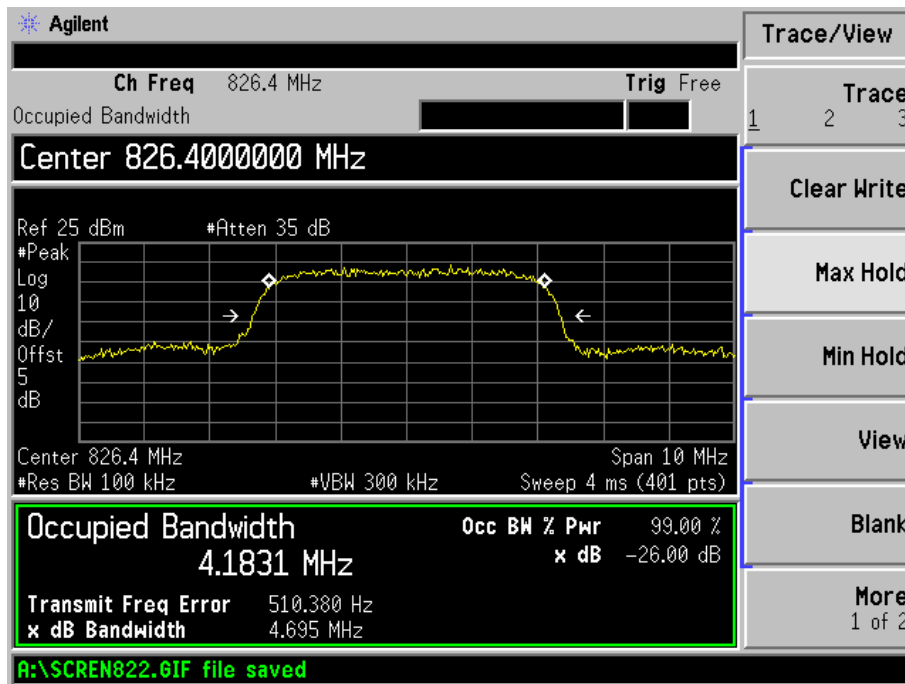

HSUPA Middle Channel

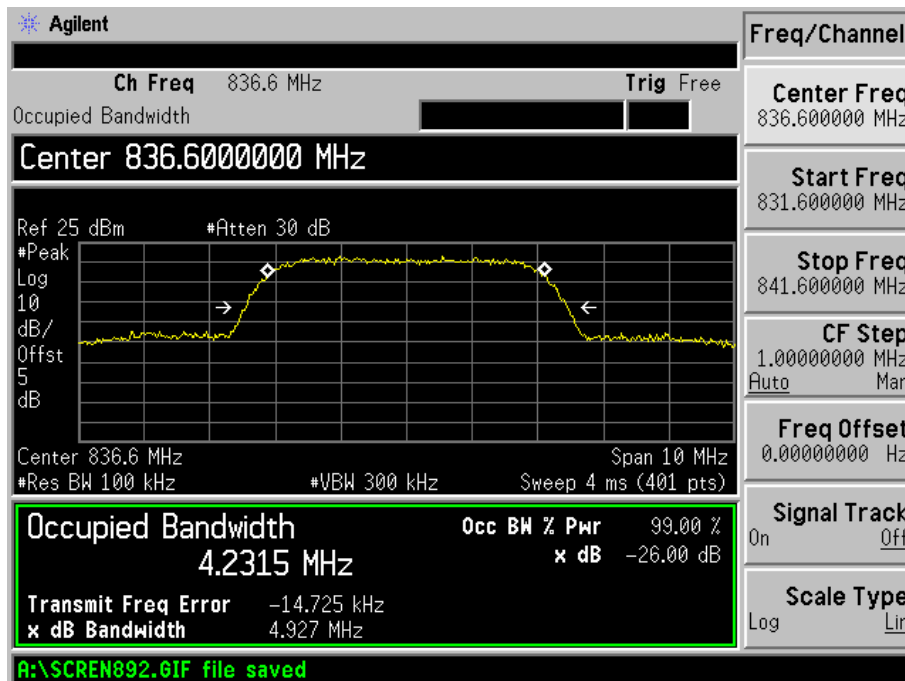


HSUPA High Channel

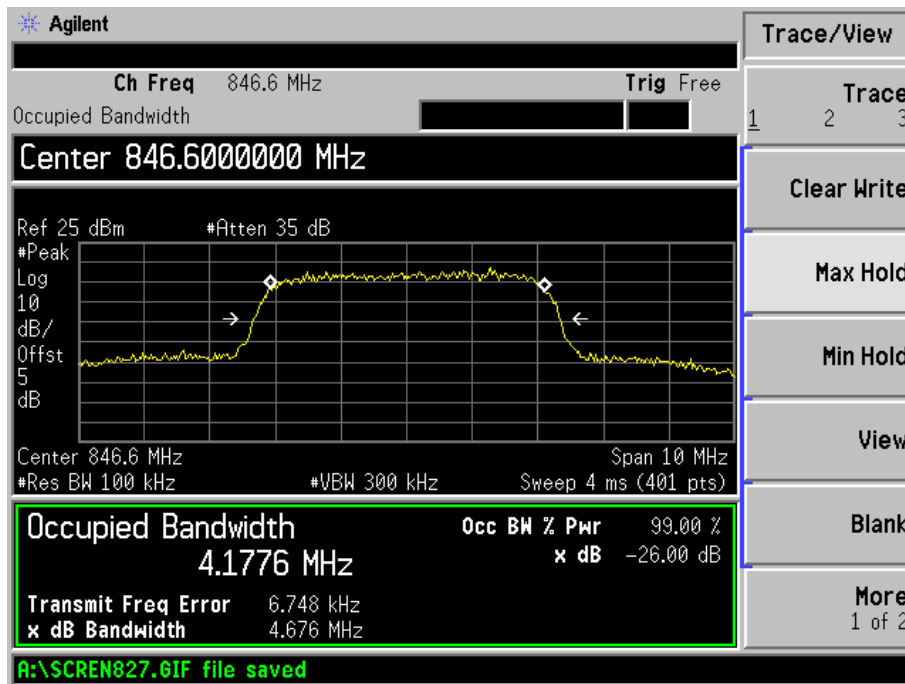


For Band II


WCDMA Low Channel

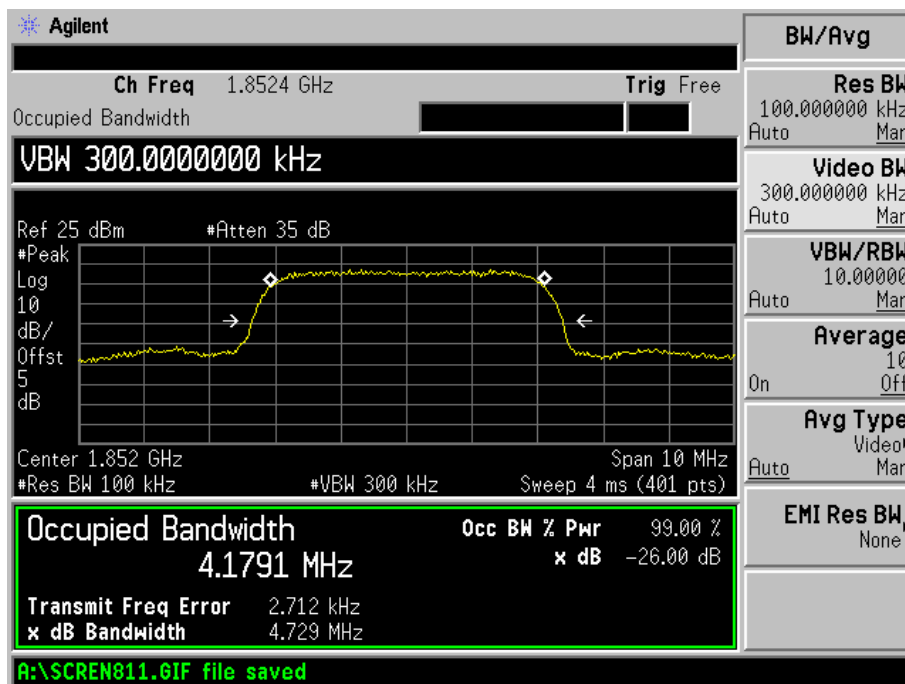


WCDMA Middle Channel

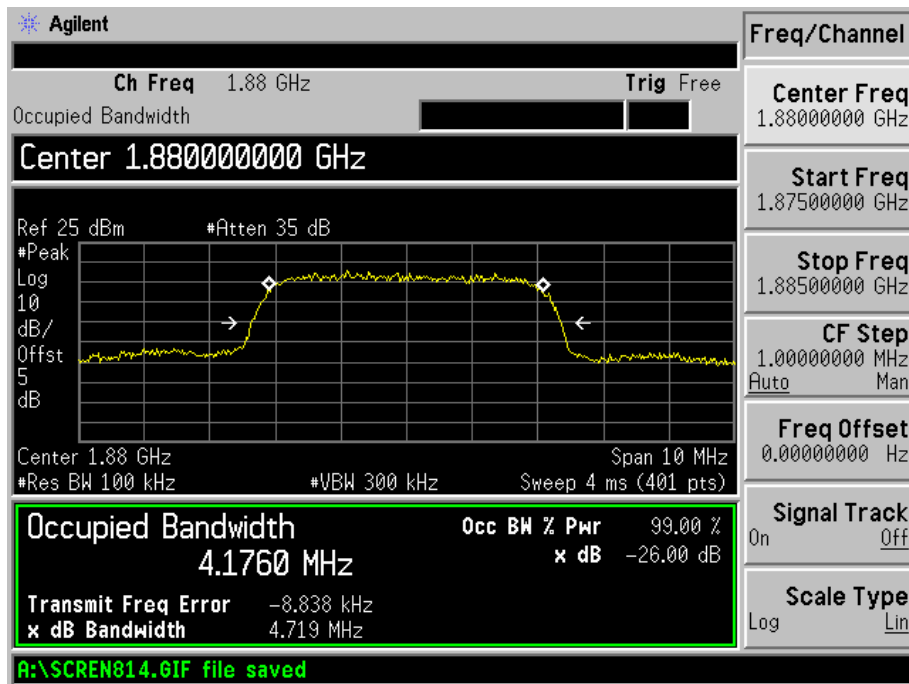


WCDMA High Channel

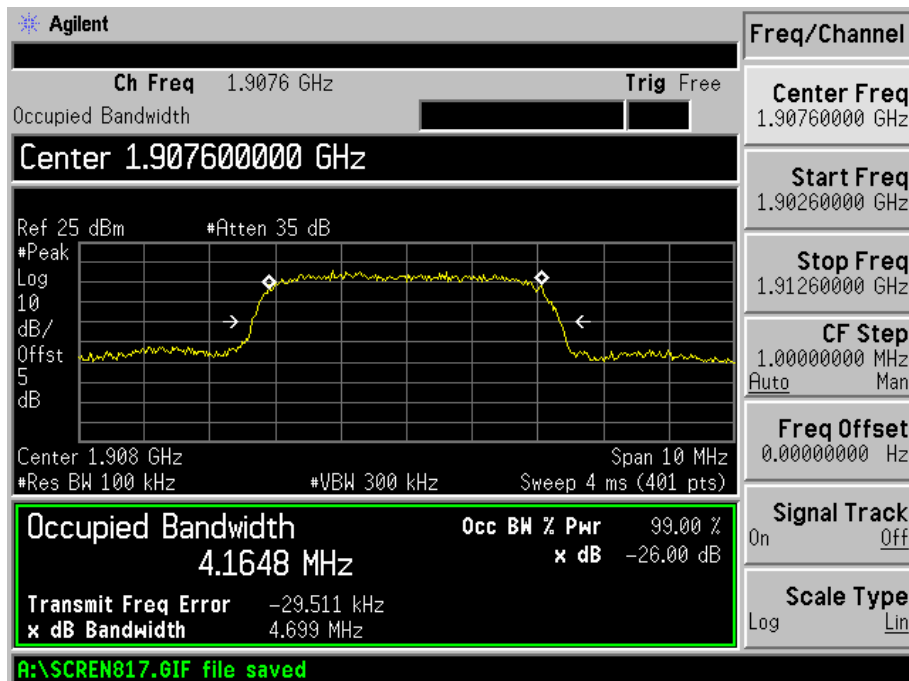


HSDPA Low Channel

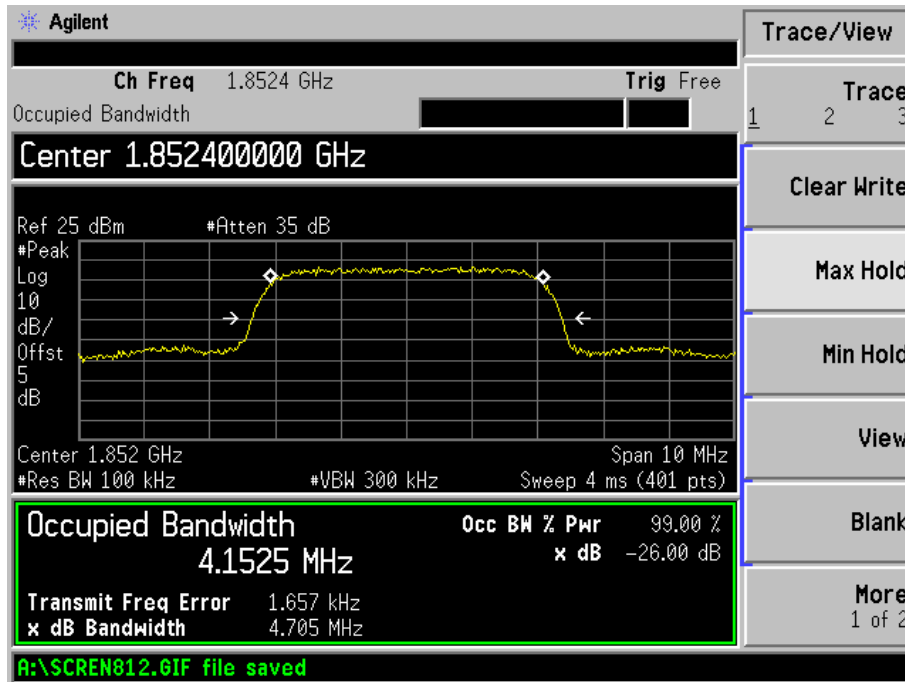


HSDPA Middle Channel

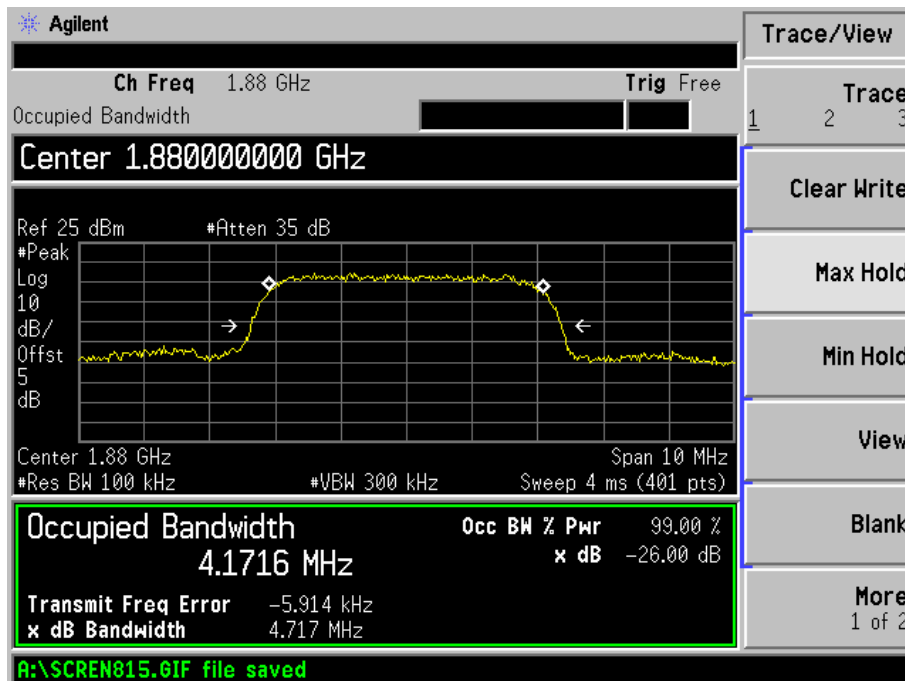


HSDPA High Channel

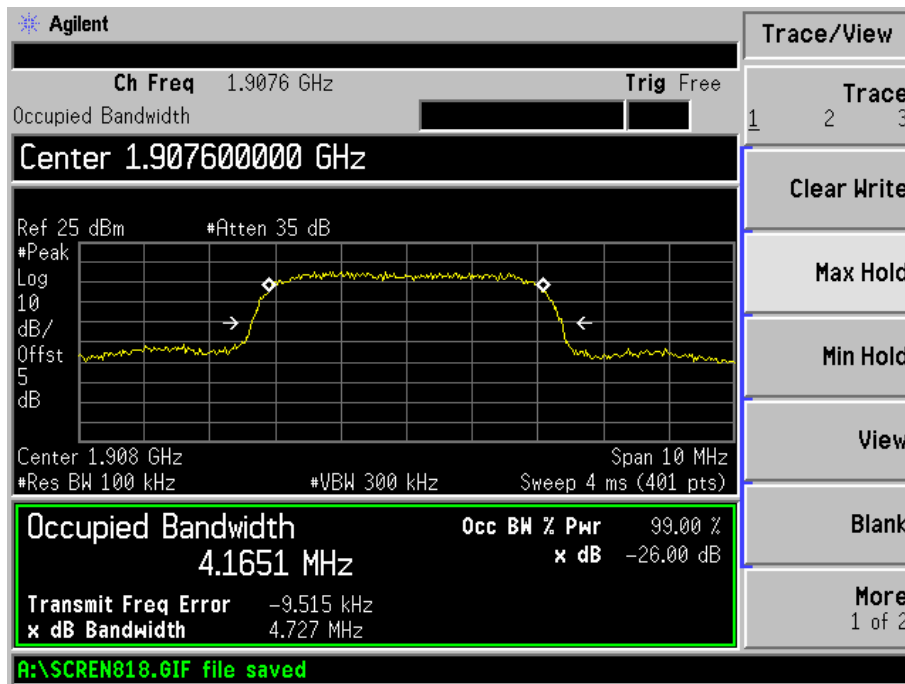


HSUPA Low Channel

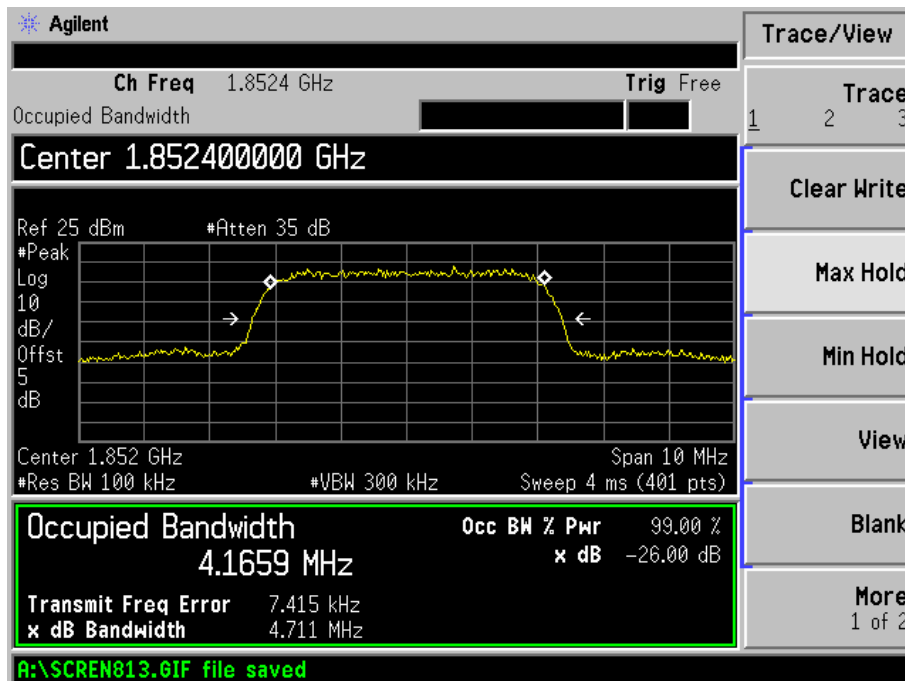

HSUPA Middle Channel

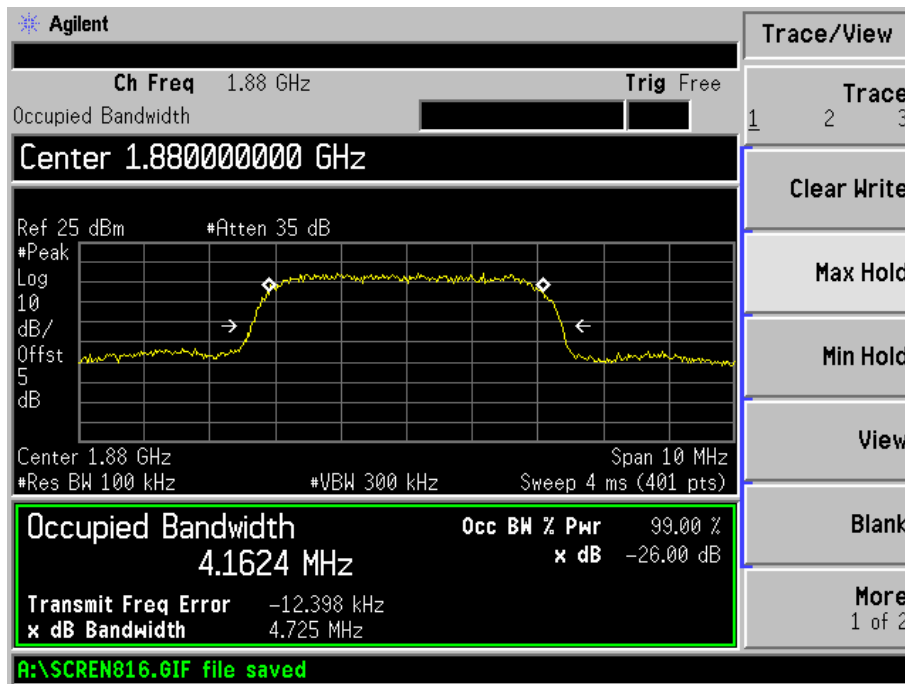

HSUPA High Channel

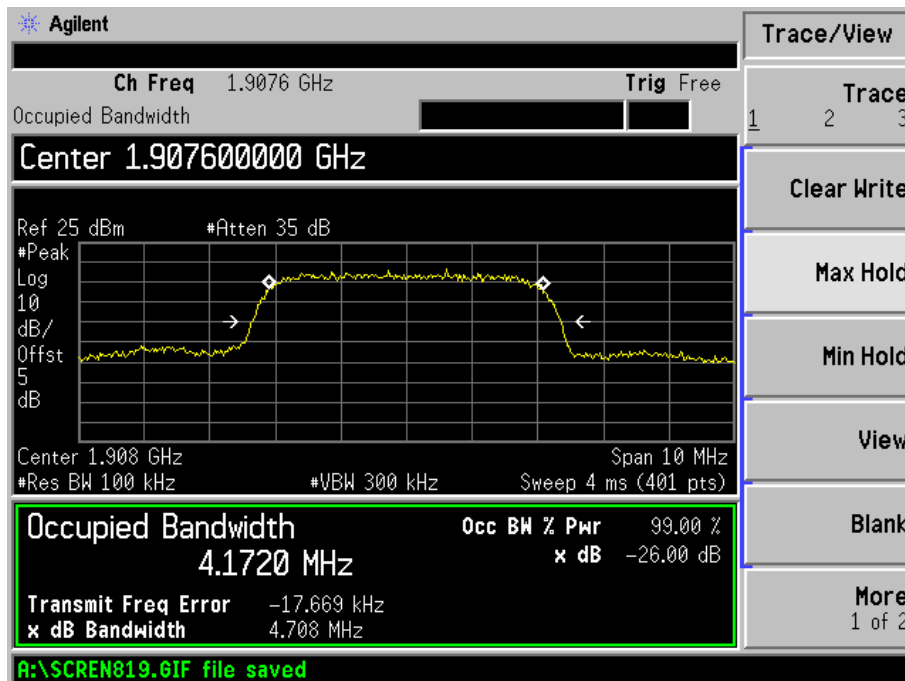

7. Out of Band Emissions at Antenna Terminal

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

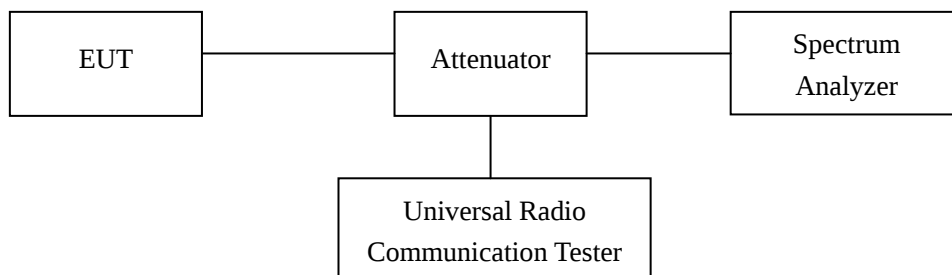



7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar



7.4 Summary of Test Results/Plots

Please refer to the following test plots For Cellular Band



GSM850 Low Channel

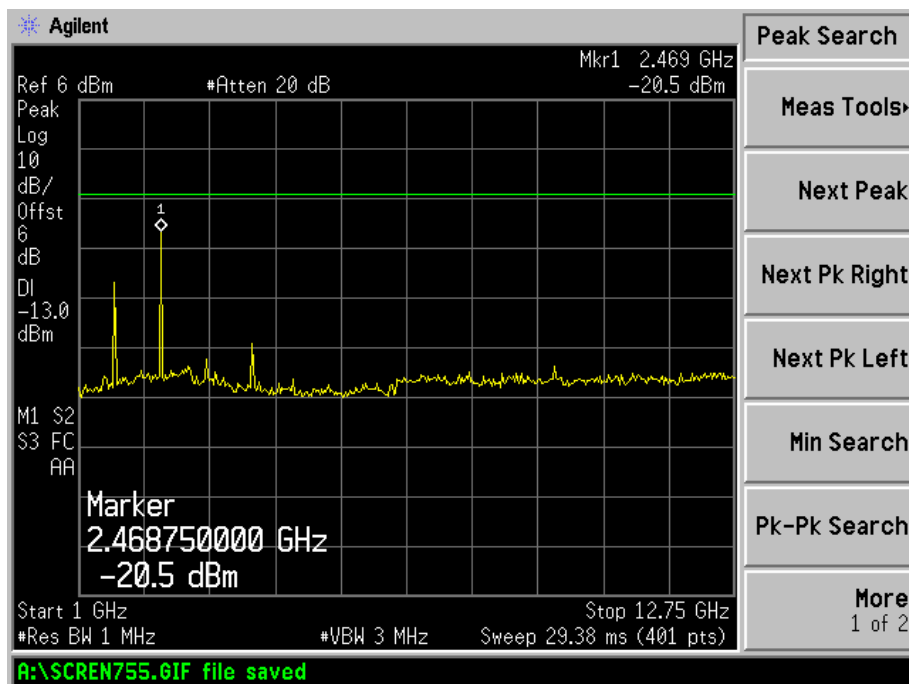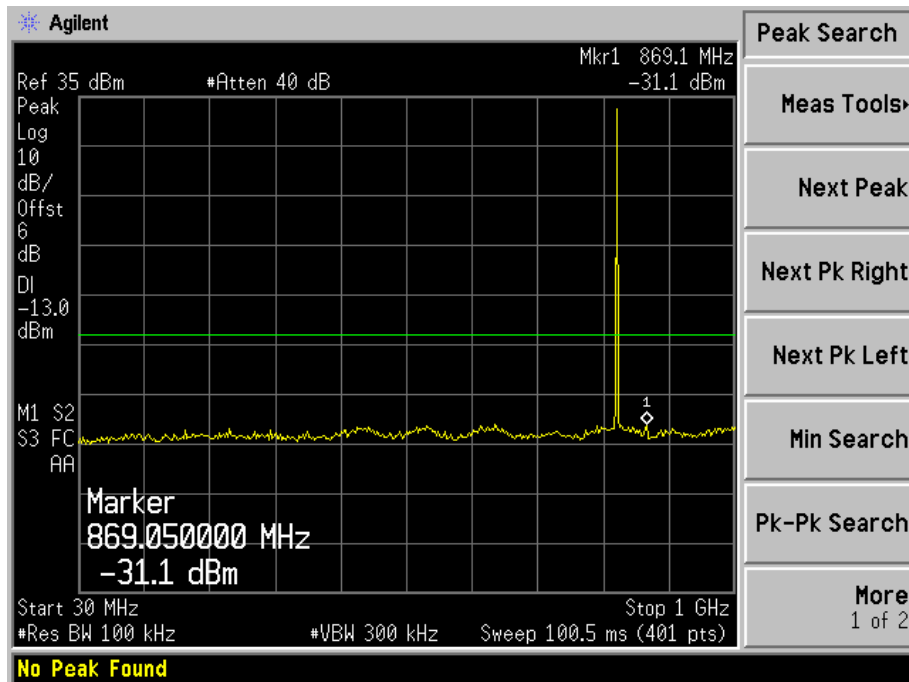


GSM850 Middle Channel

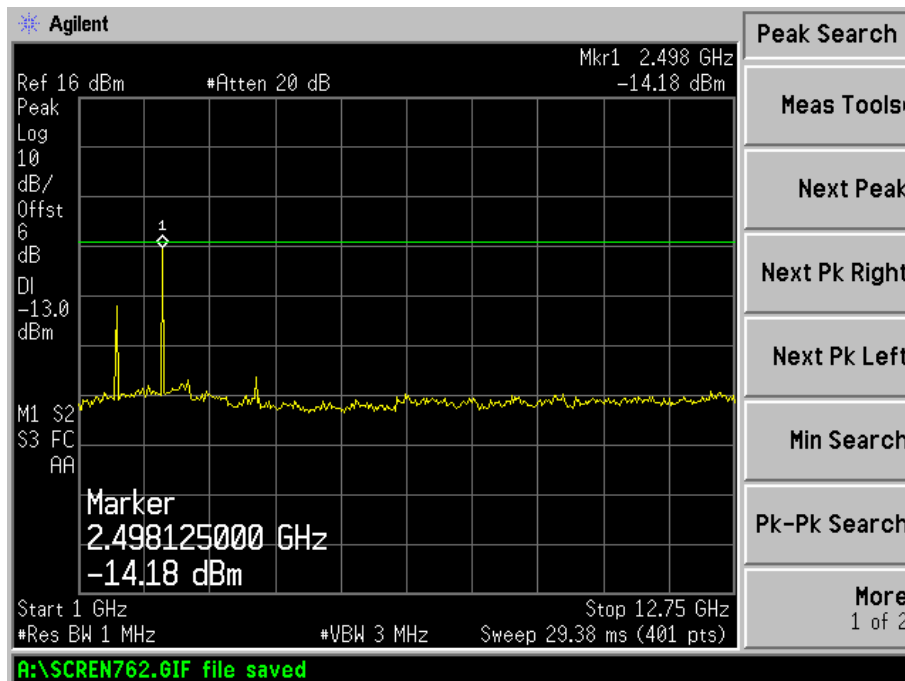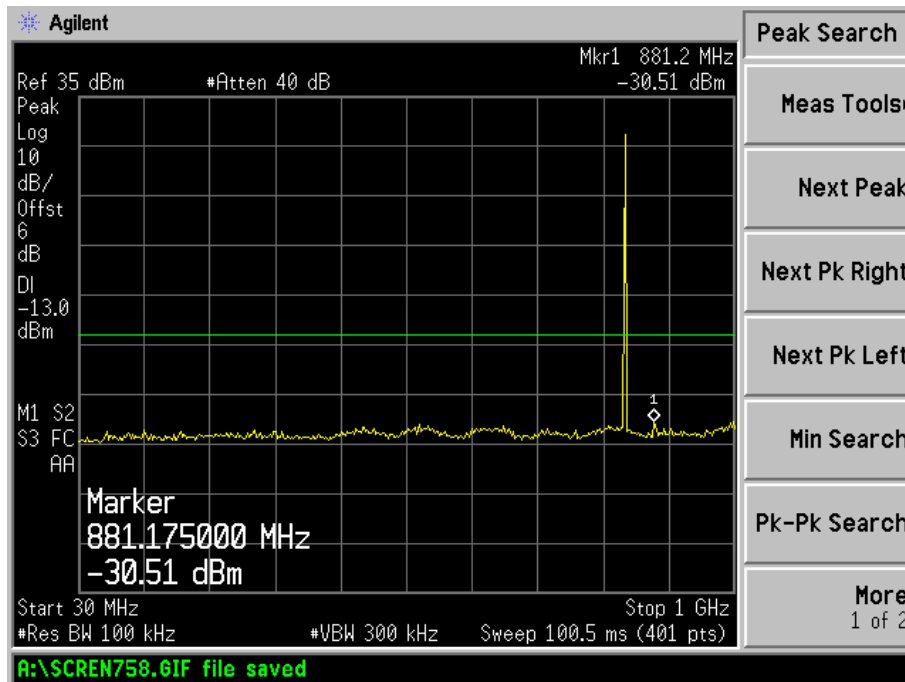


GSM850 High Channel

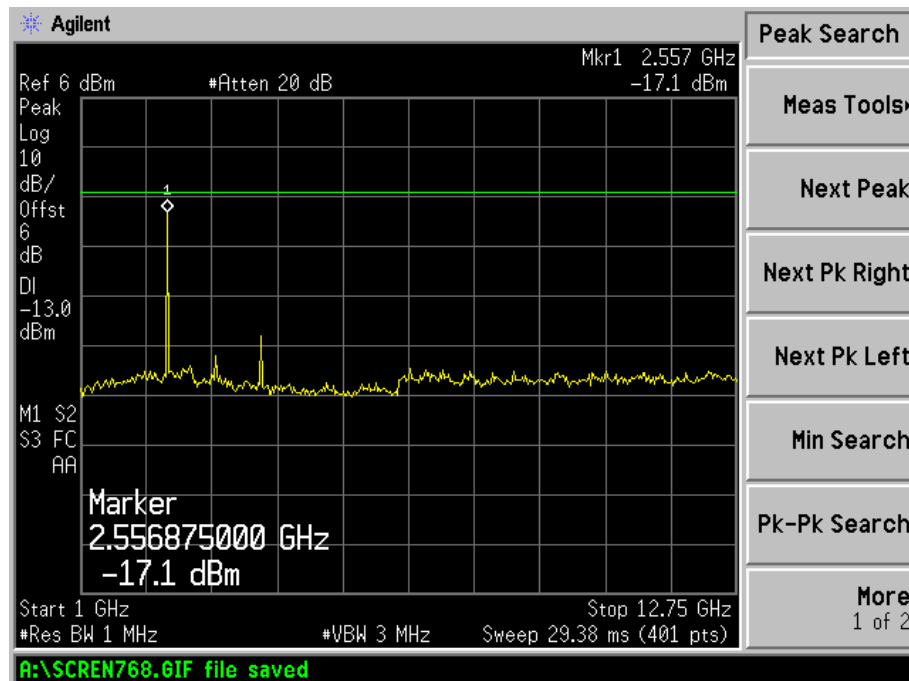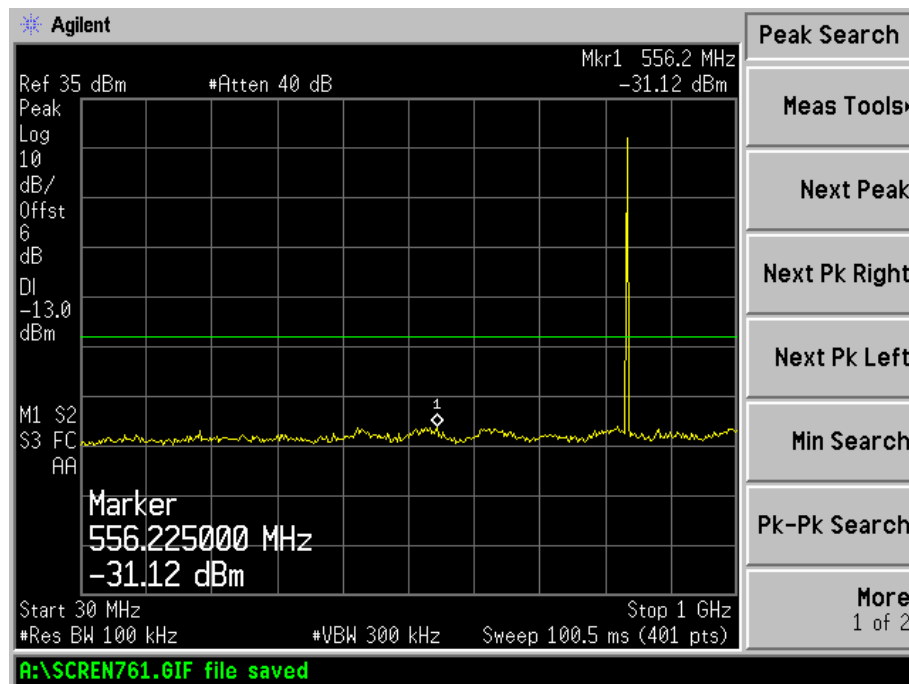



GSM850 Low Band Emission

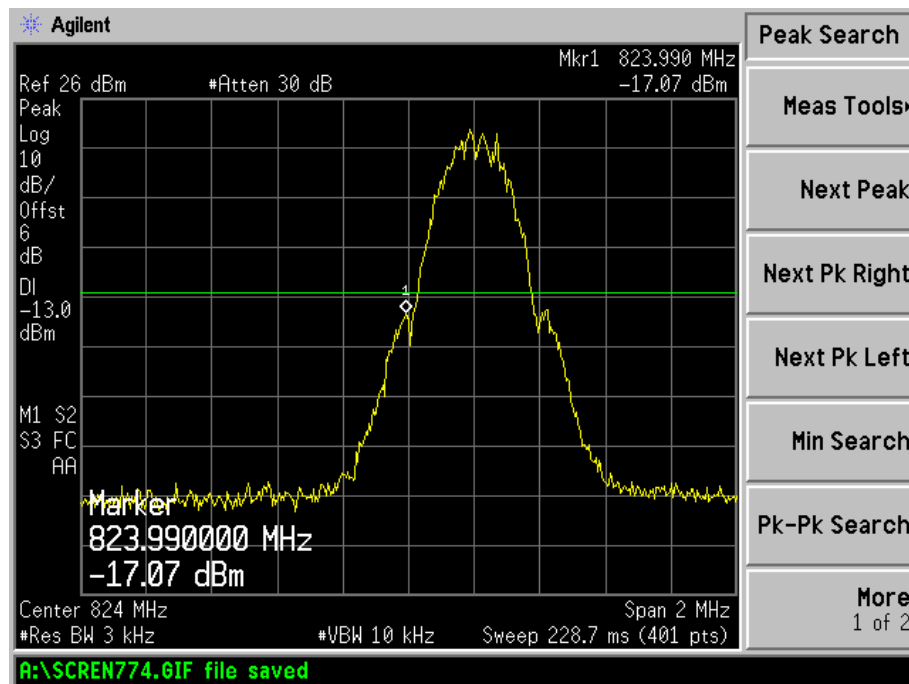



GSM850 High Band Emission

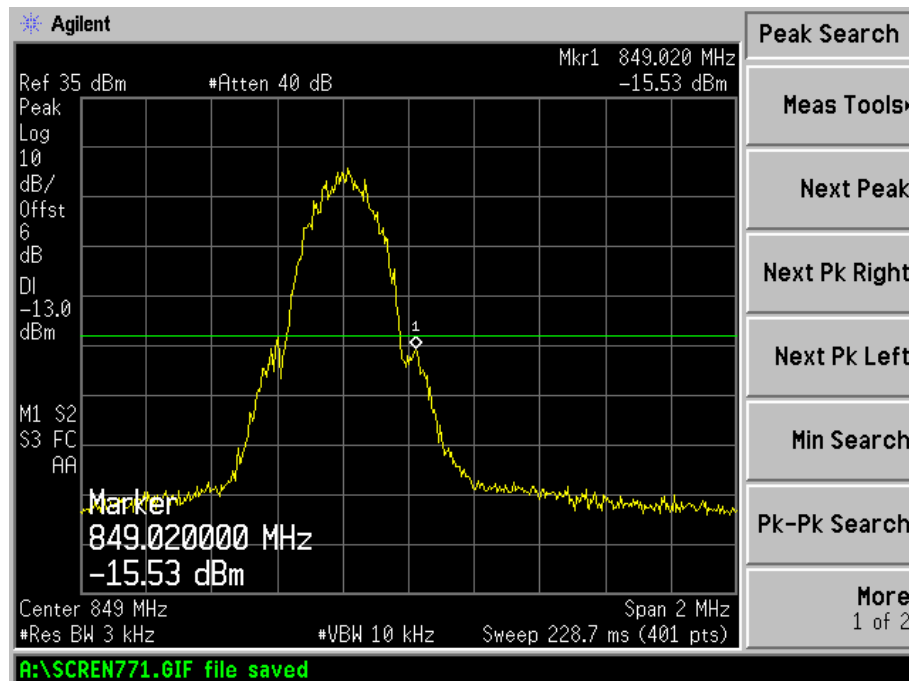



GPRS850 Low Channel

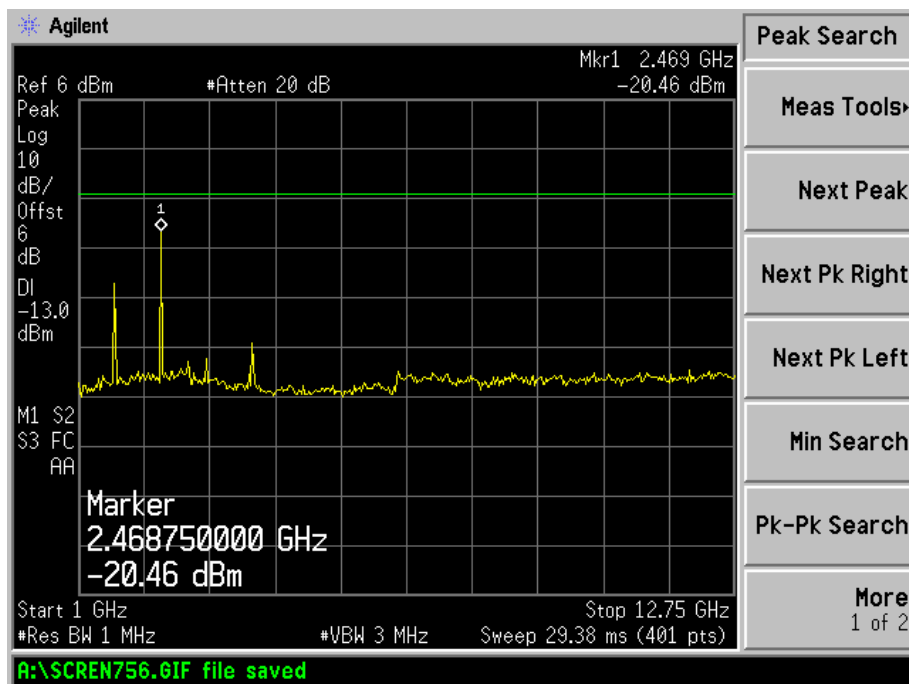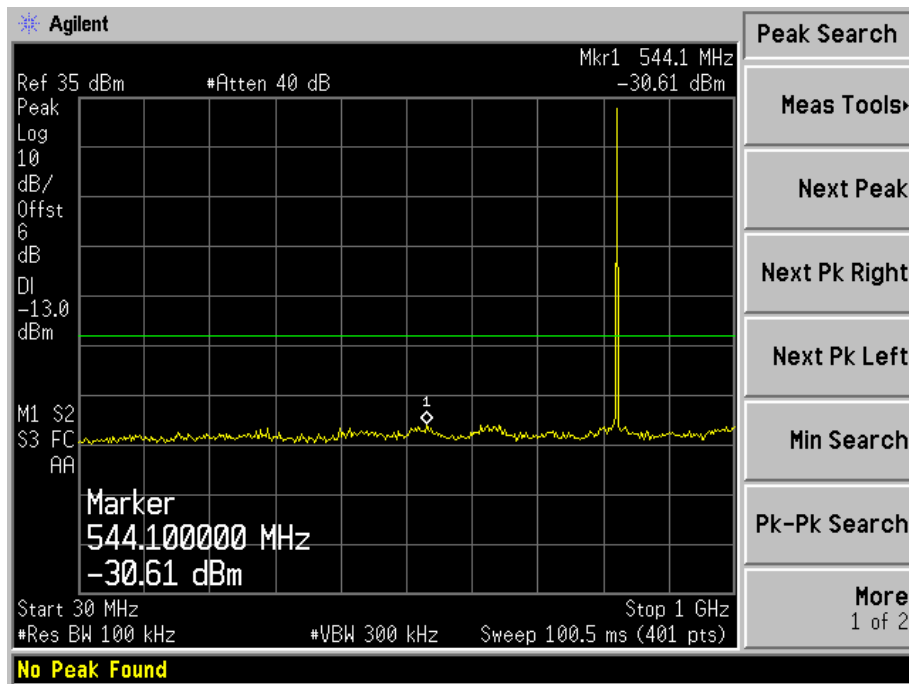


GPRS850 Middle Channel

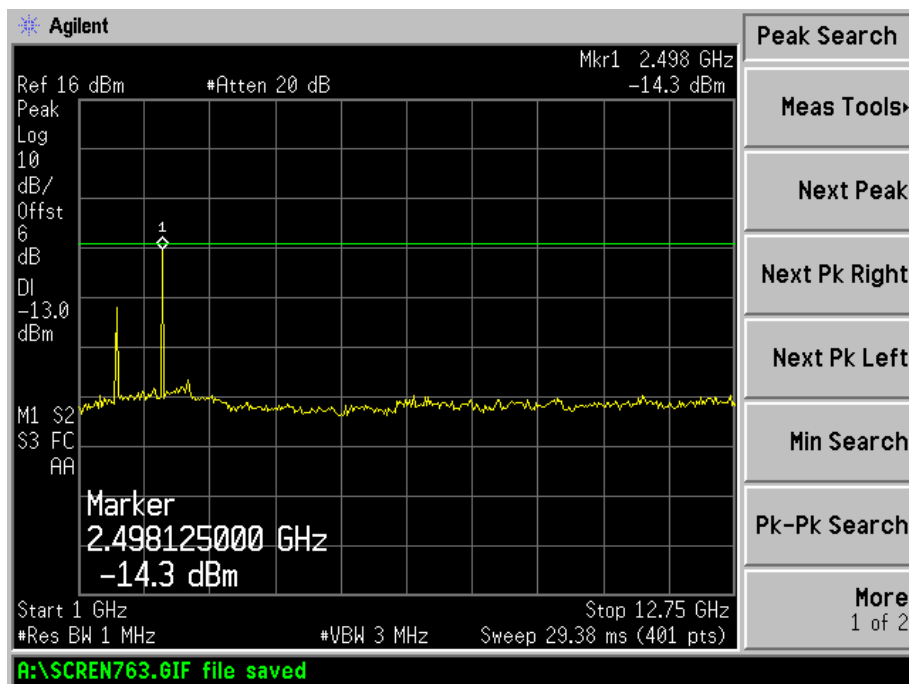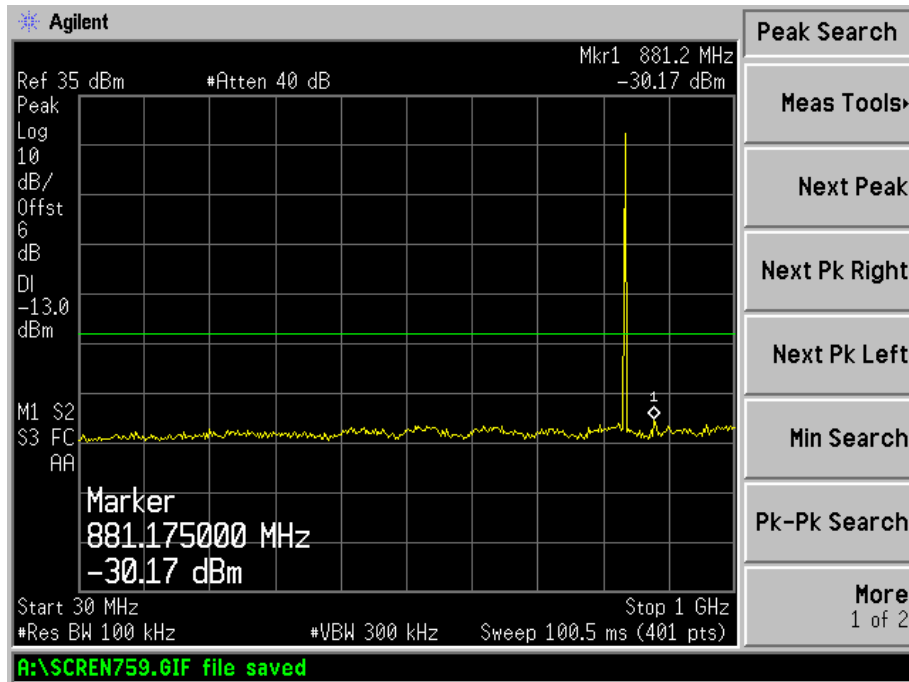


GPRS850 High Channel

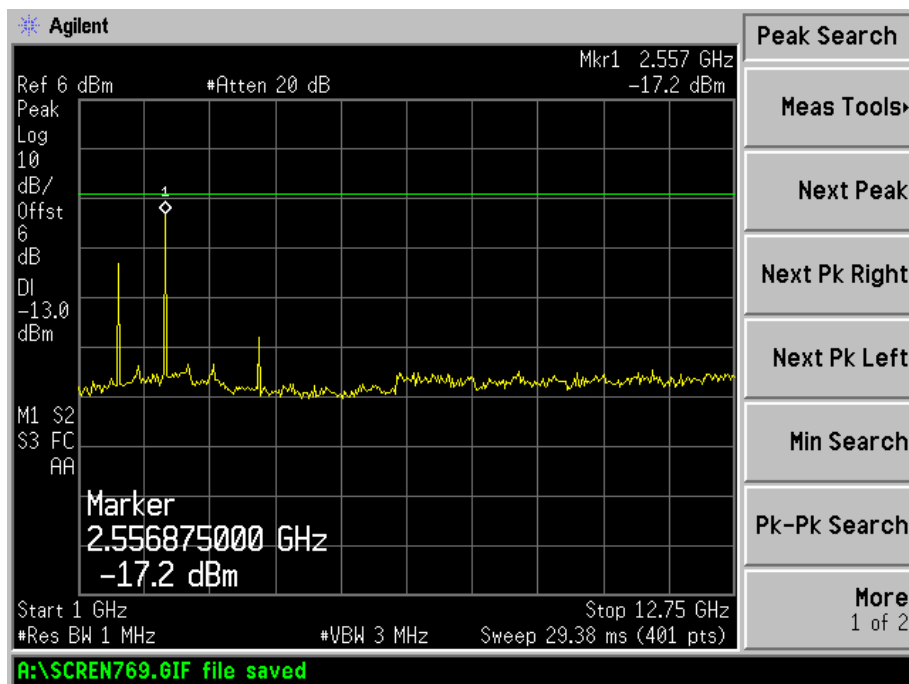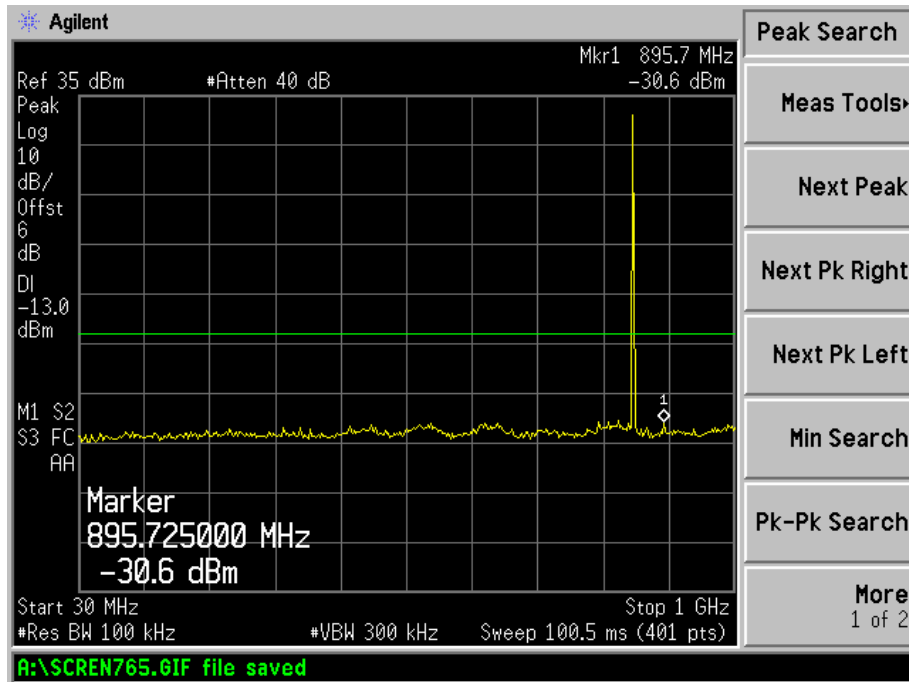



GPRS850 Low Band Emission

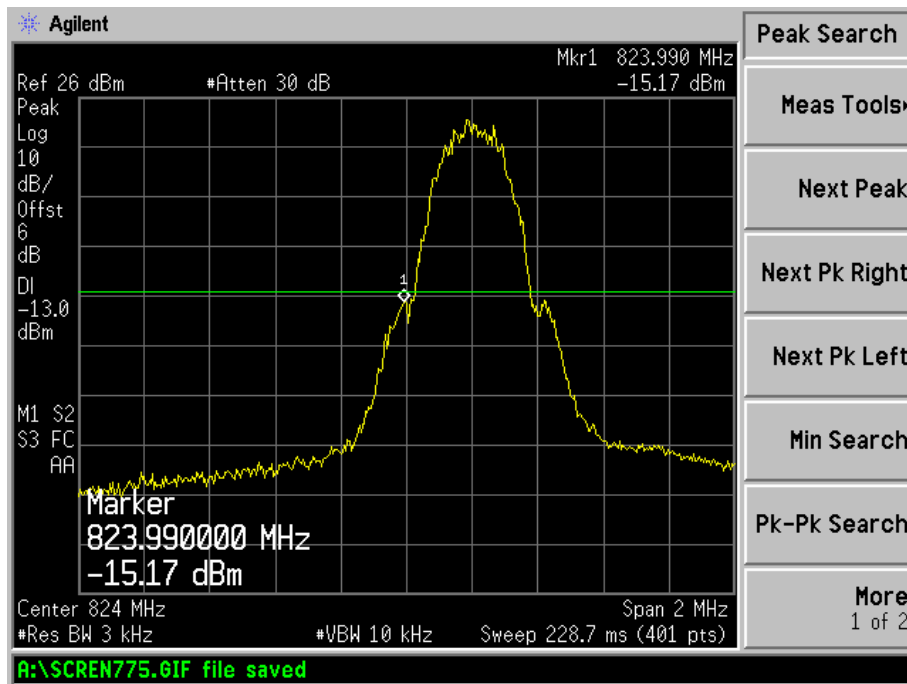



GPRS850 High Band Emission

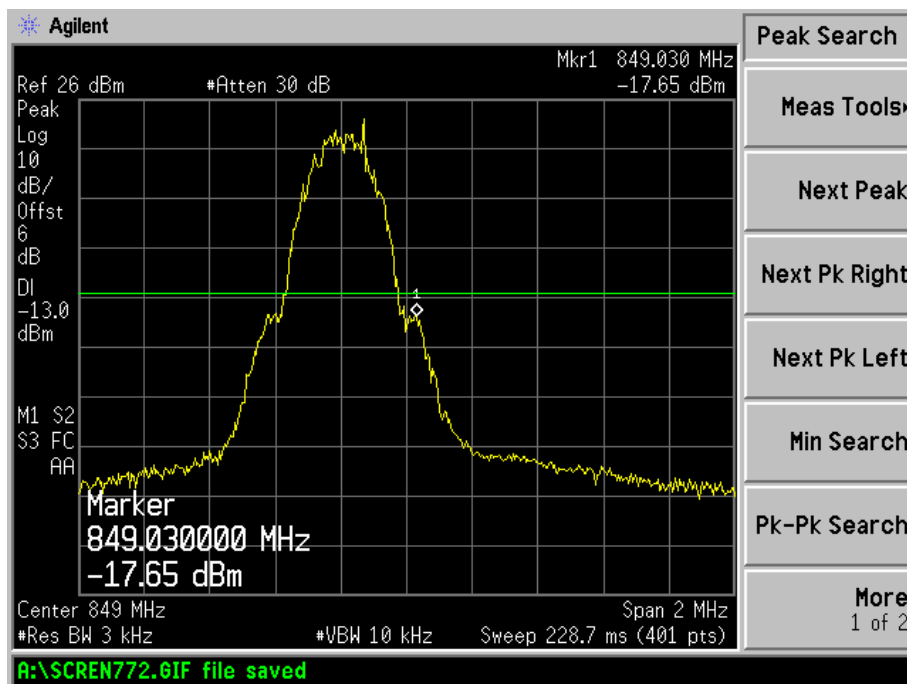



EDGE850 Low Channel

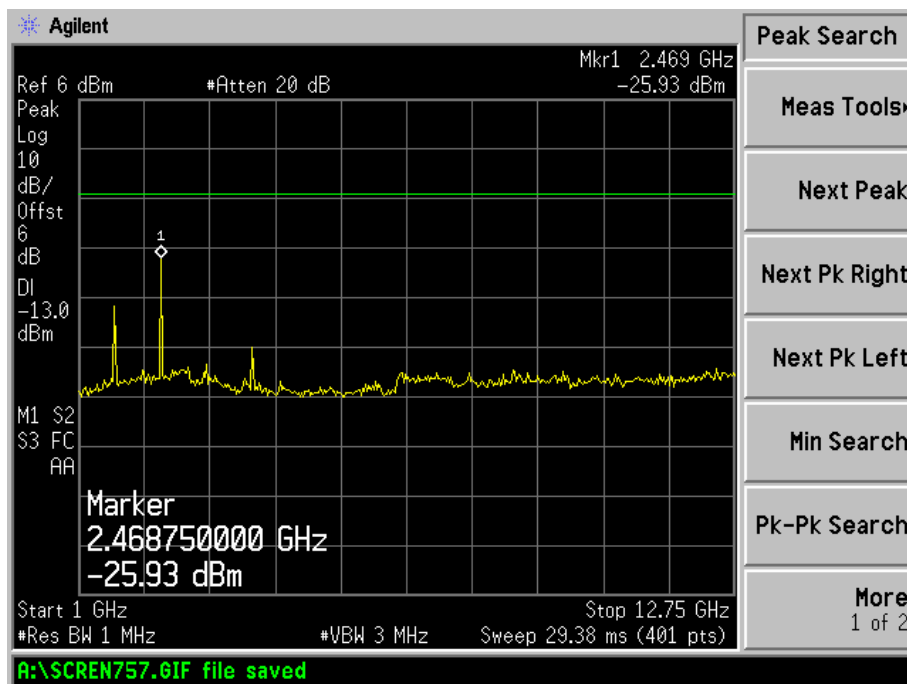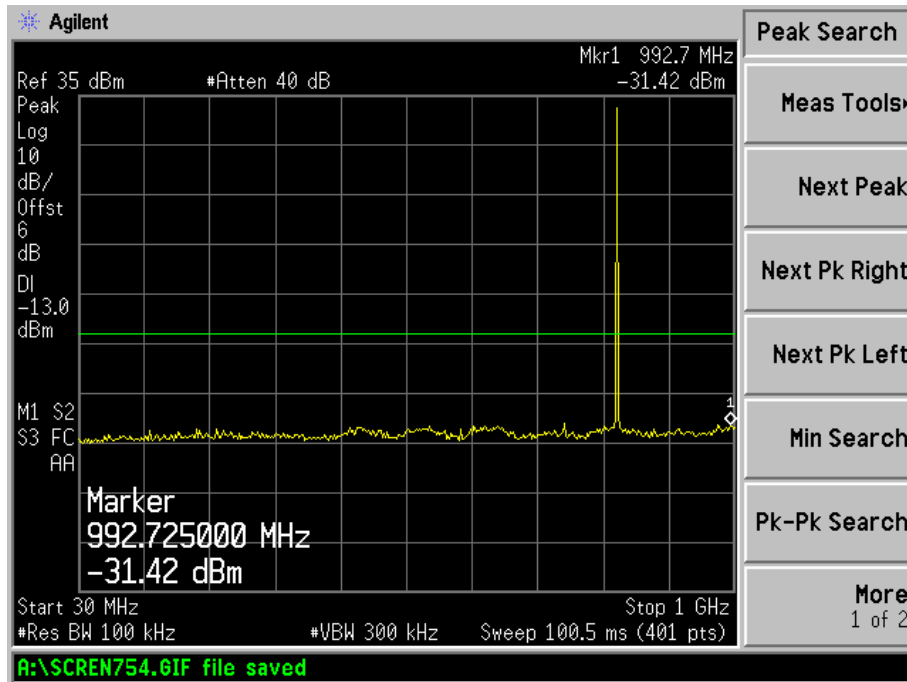


EDGE850 Middle Channel

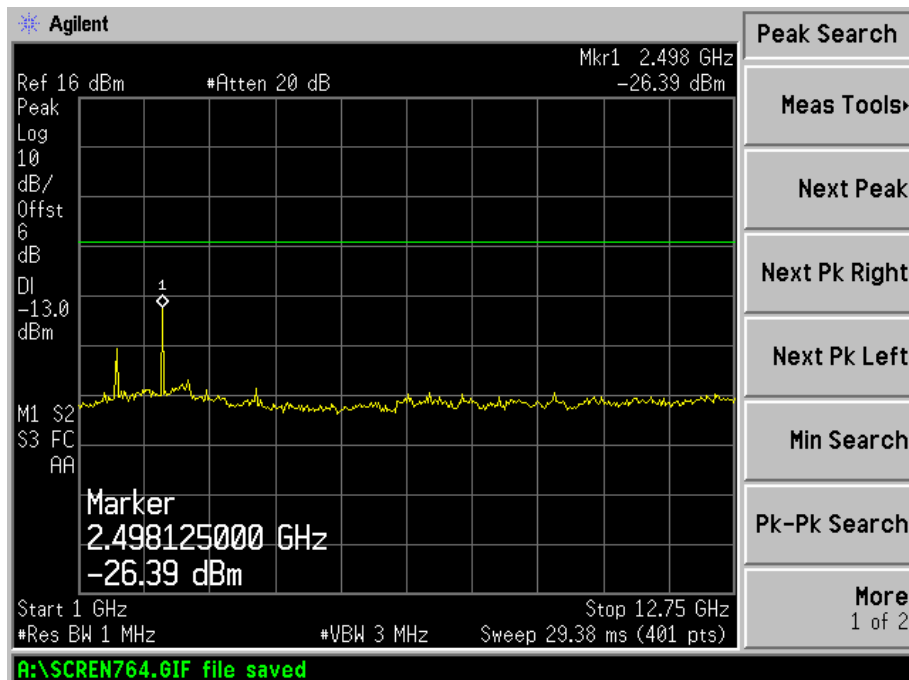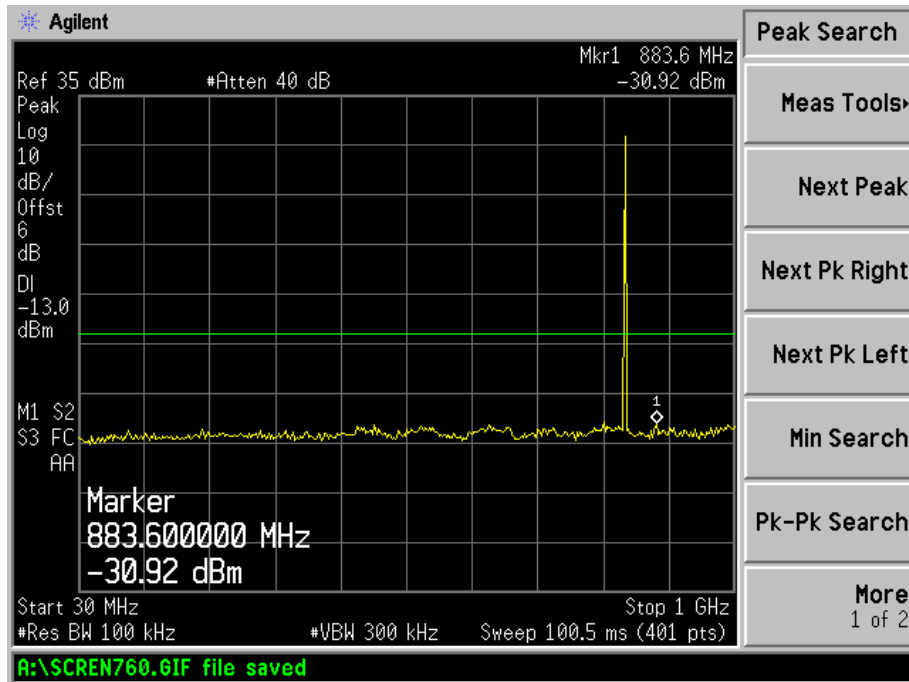


EDGE850 High Channel

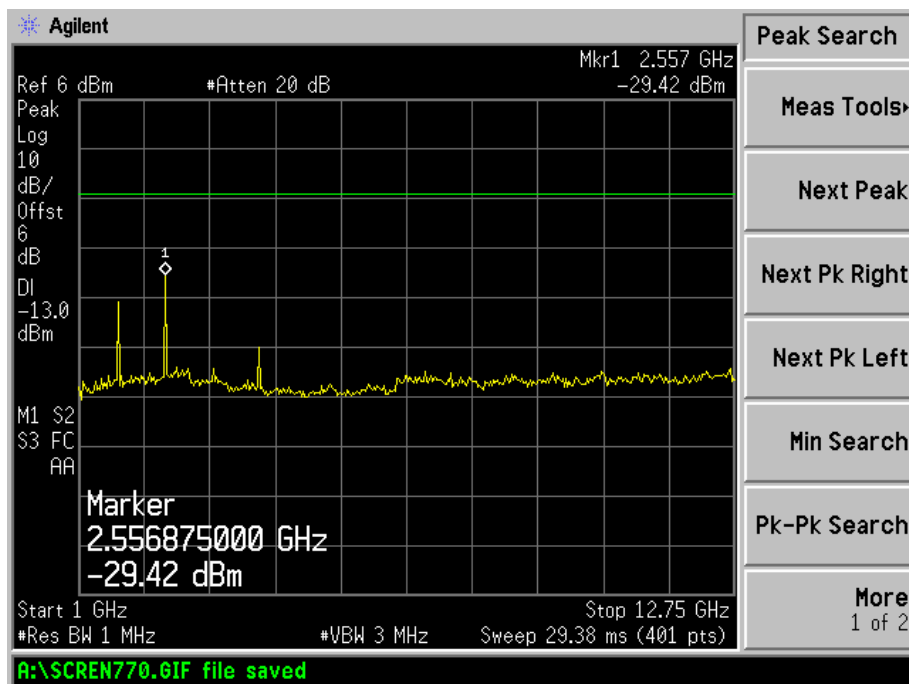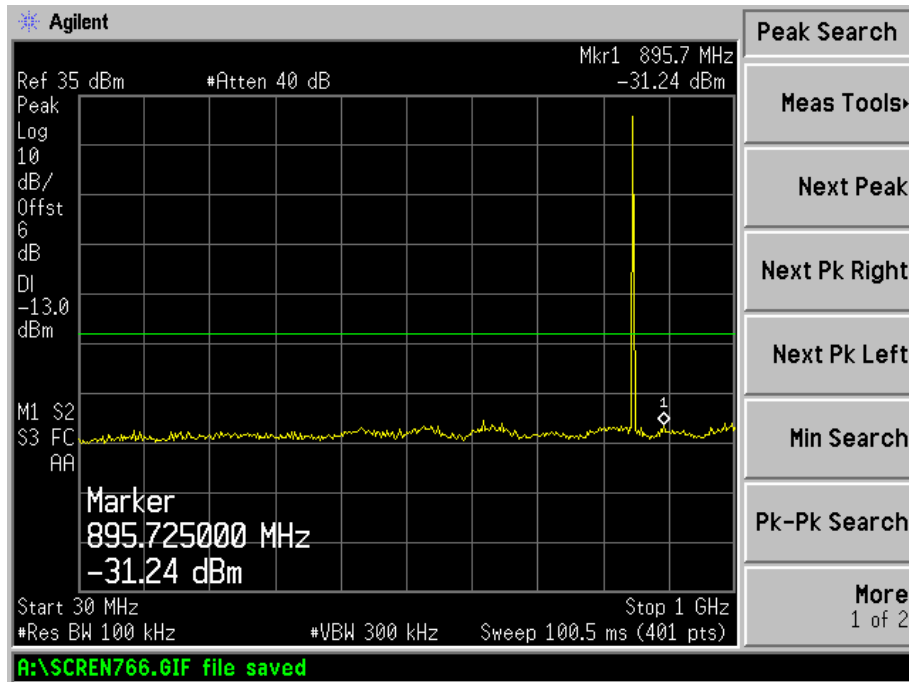



EDGE850 Low Band Emission

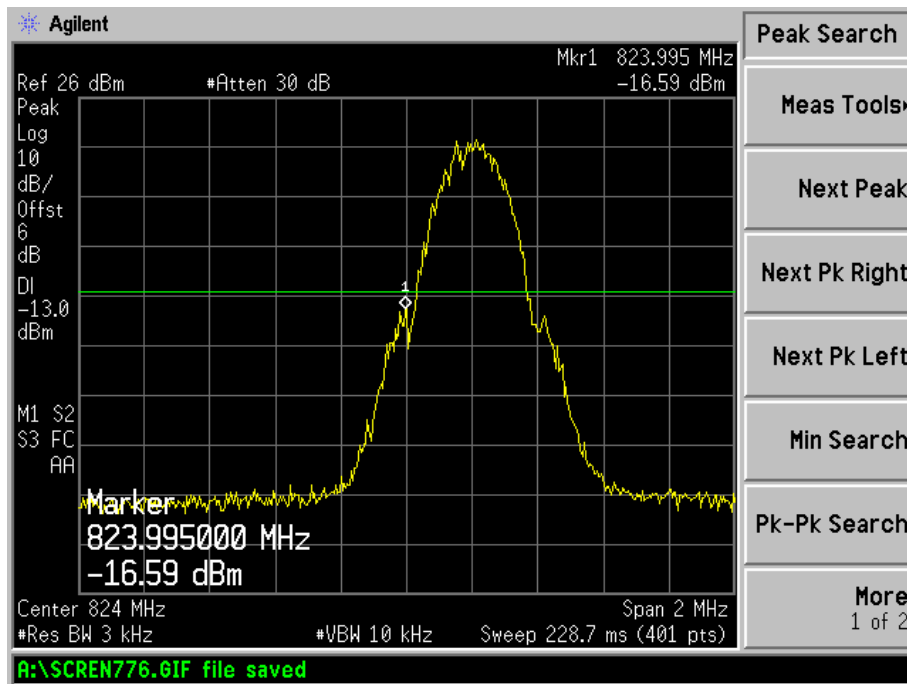



EDGE850 High Band Emission

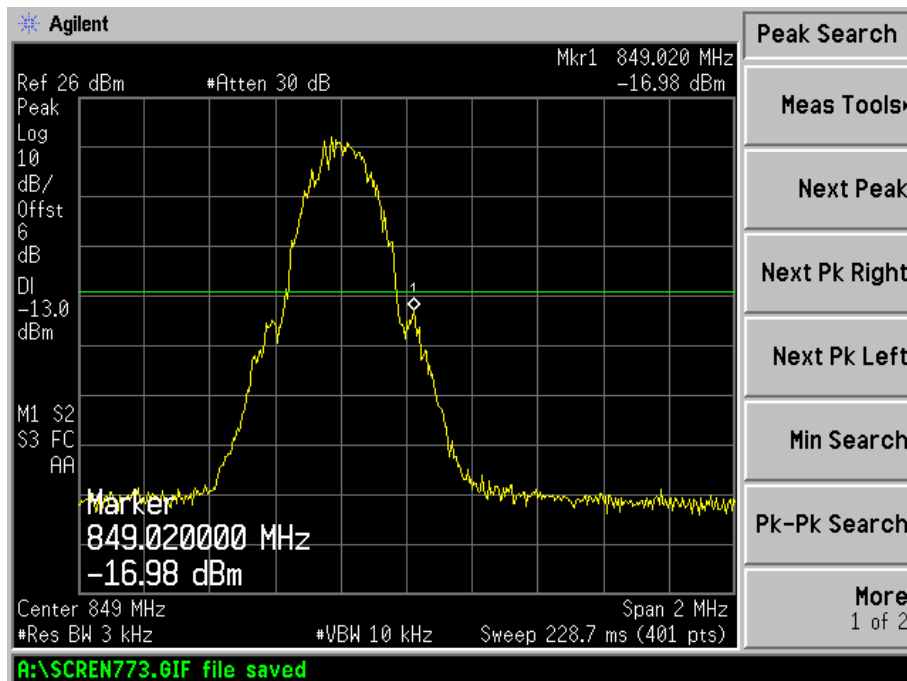



For PCS Band
GSM1900 Low Channel

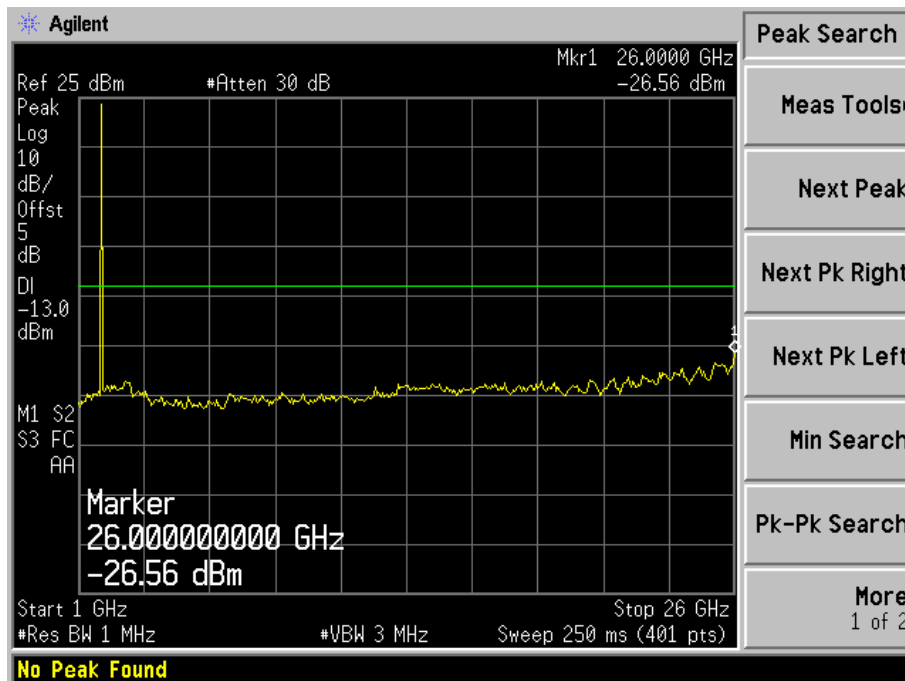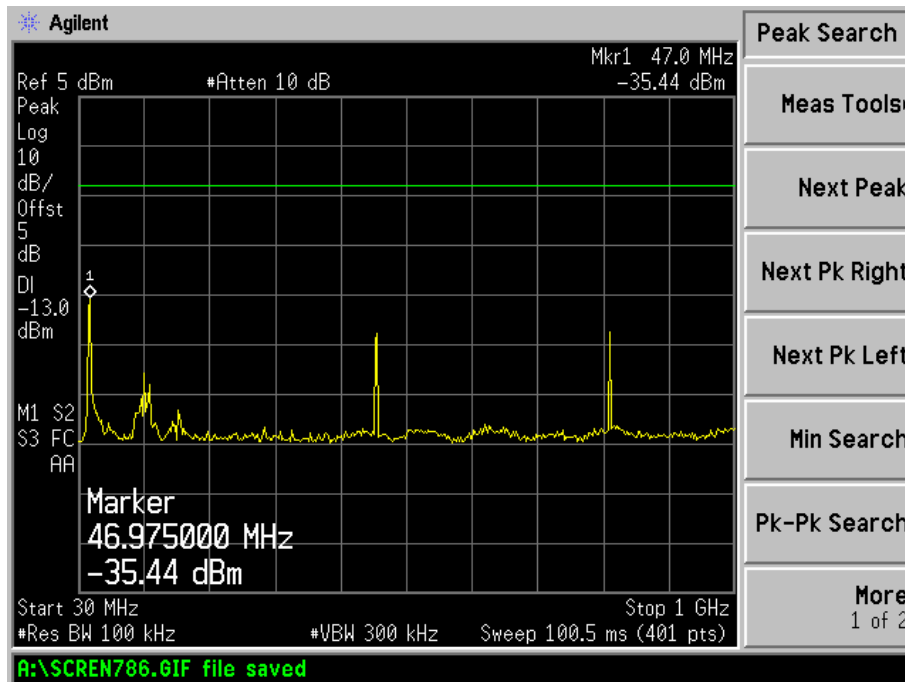


GSM Middle Channel

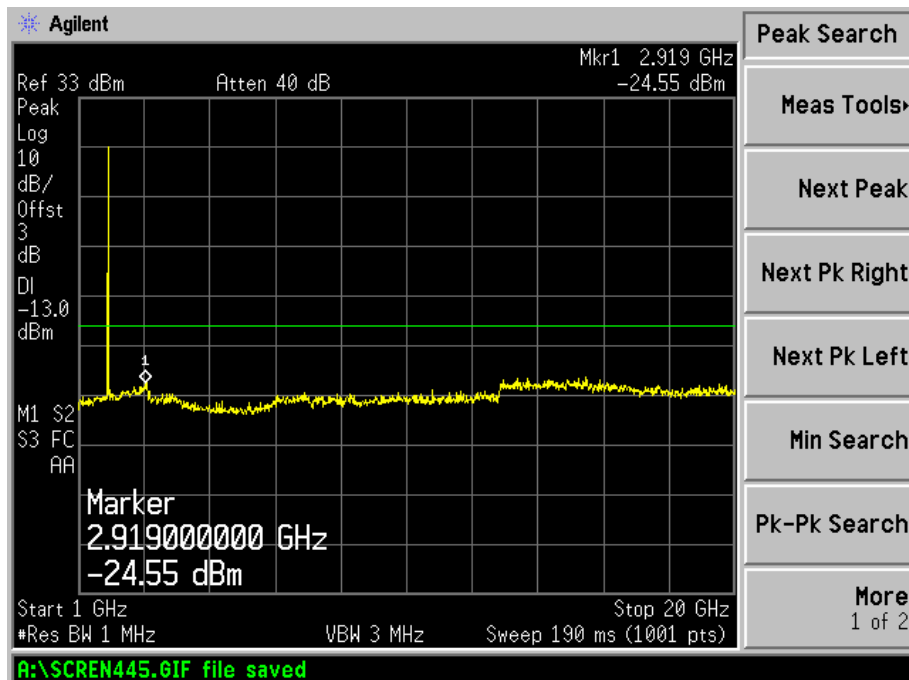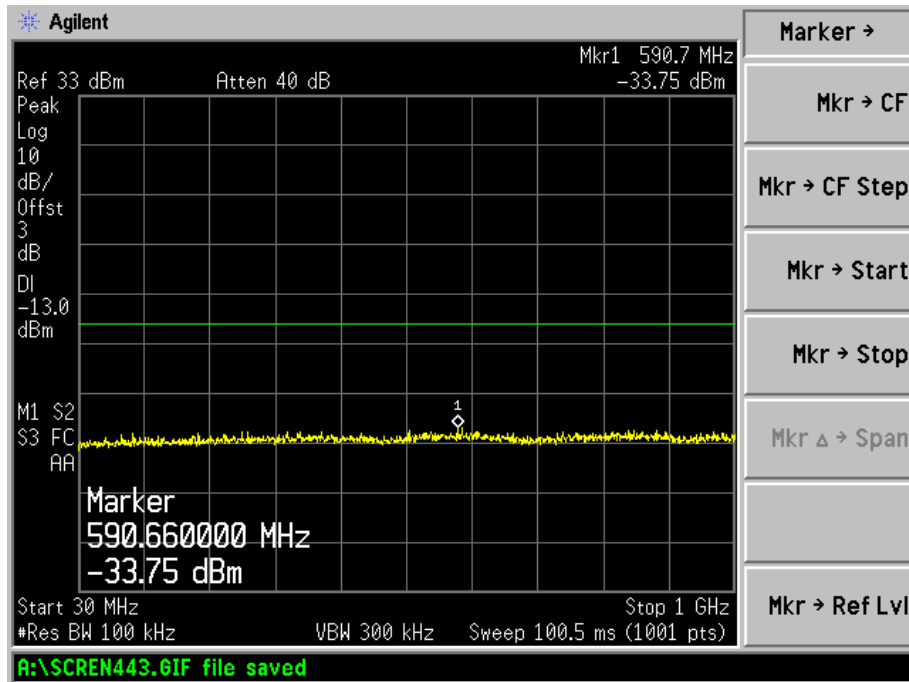


GSM1900 High Channel

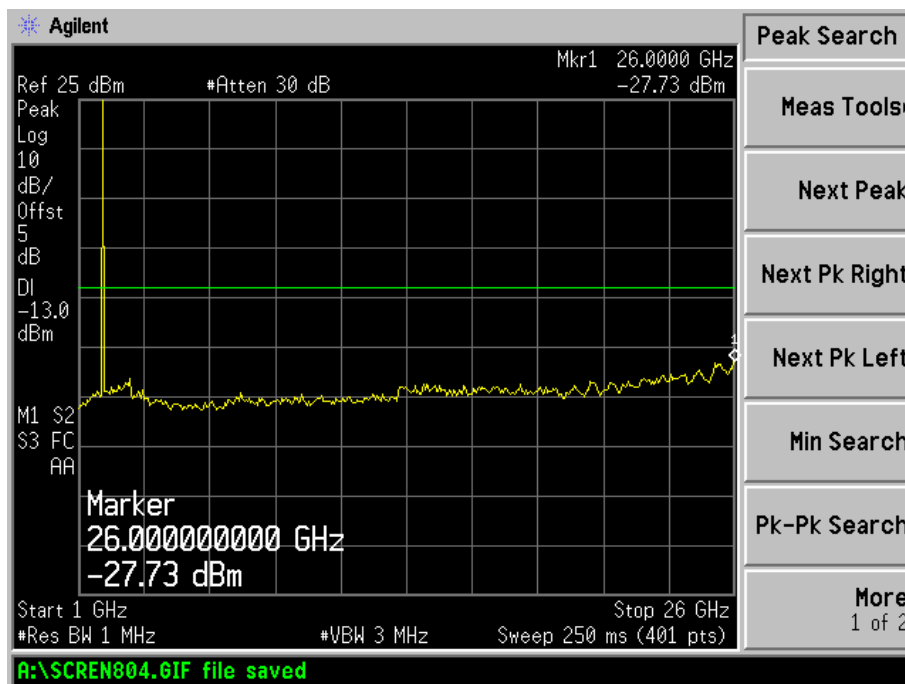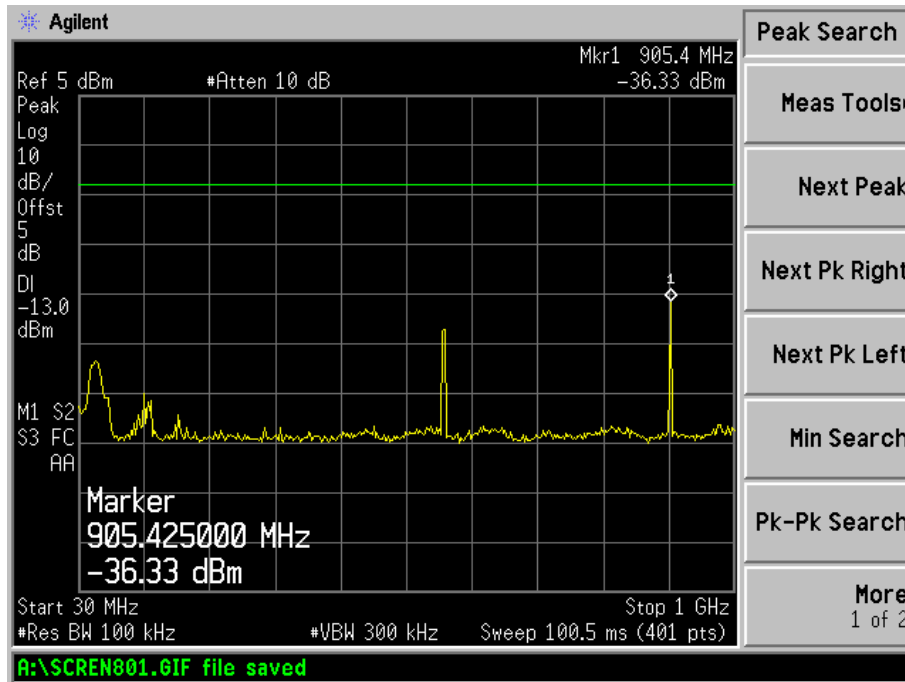



GSM Low Band Emission

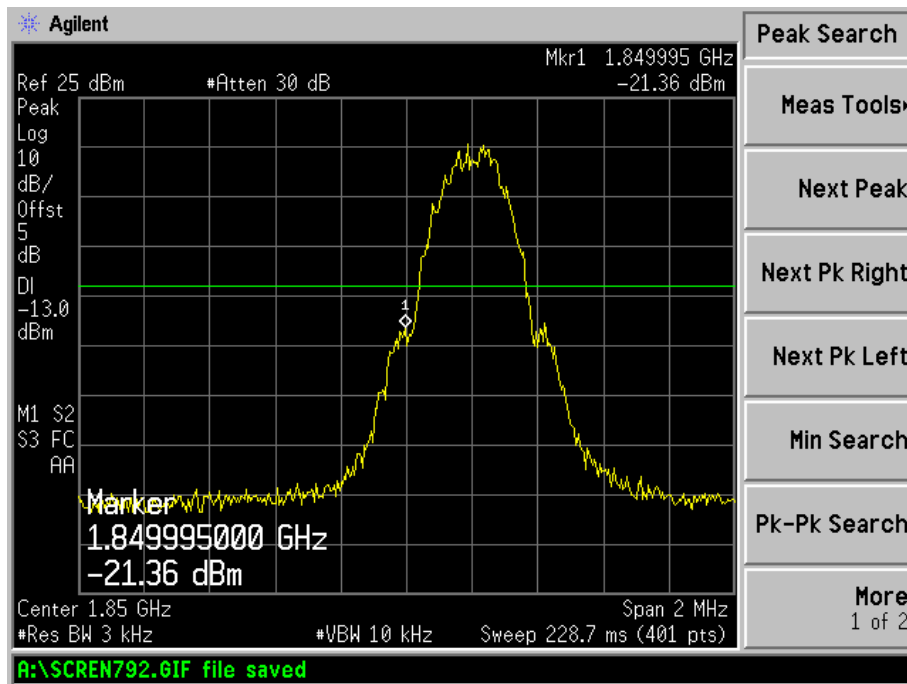



GSM High Band Emission

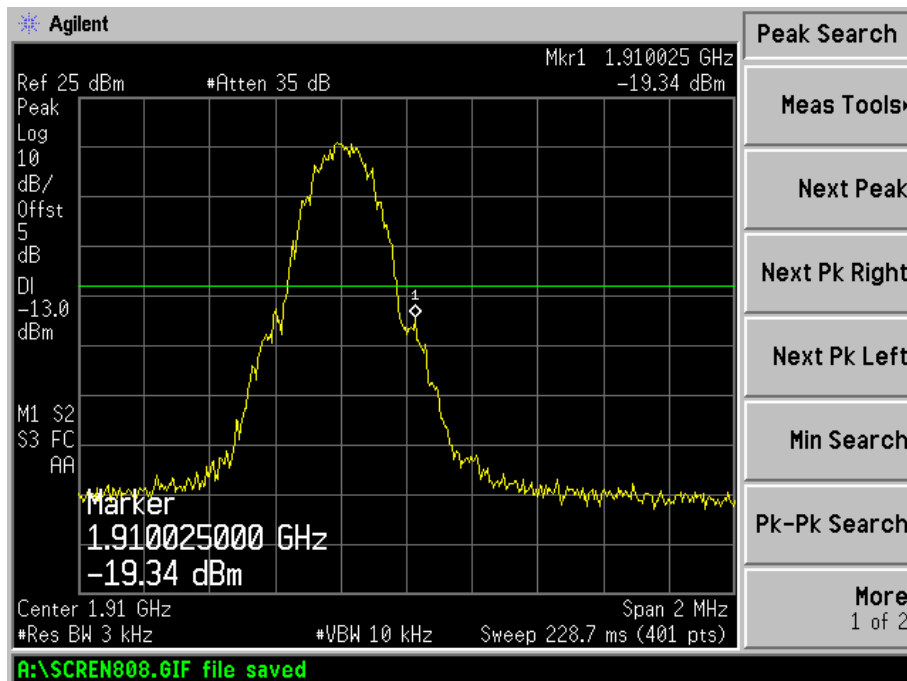



GPRS Low Channel

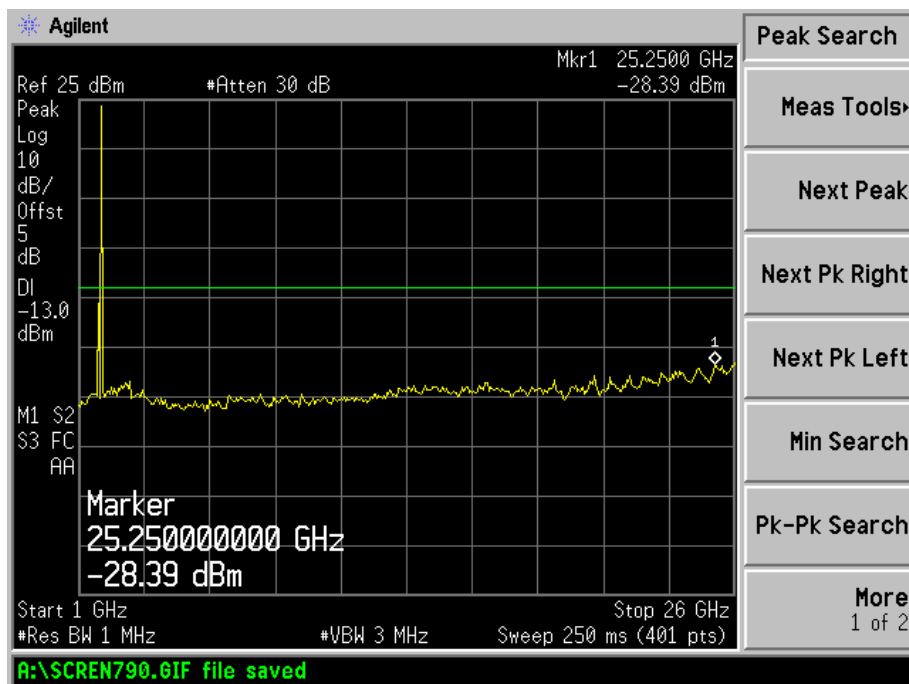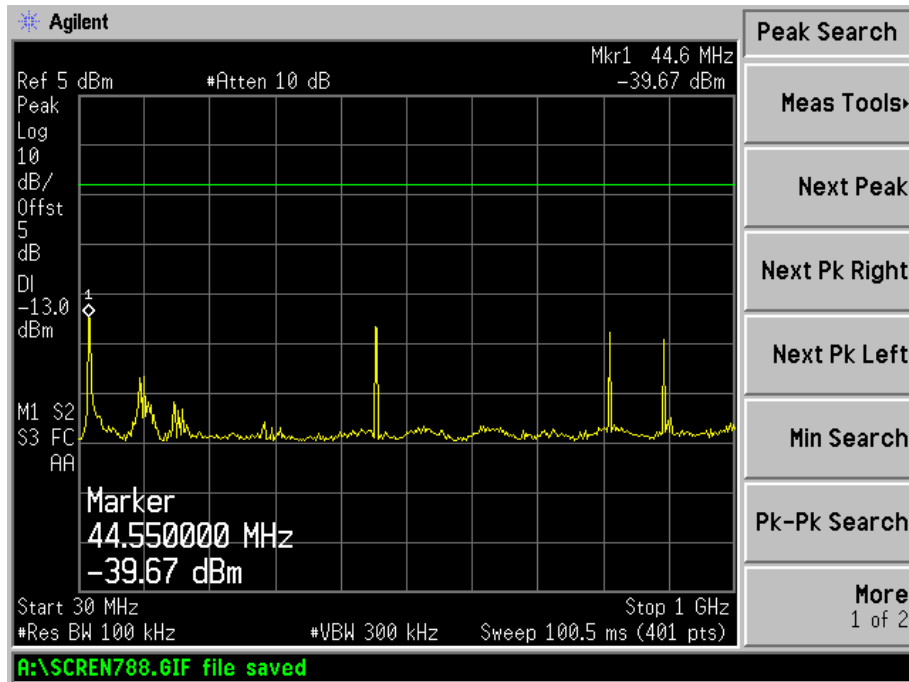


GPRS Middle Channel

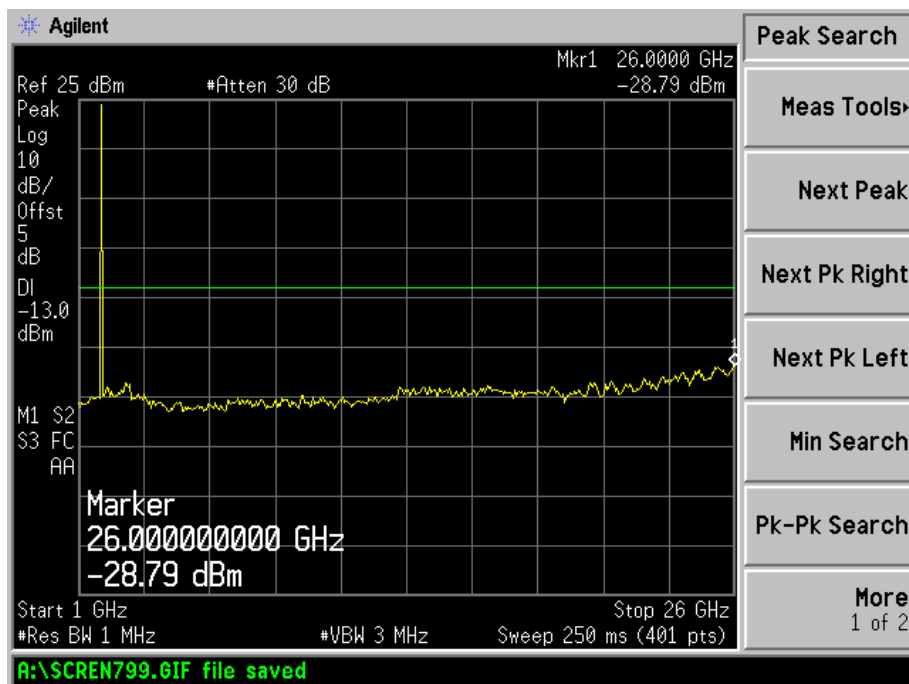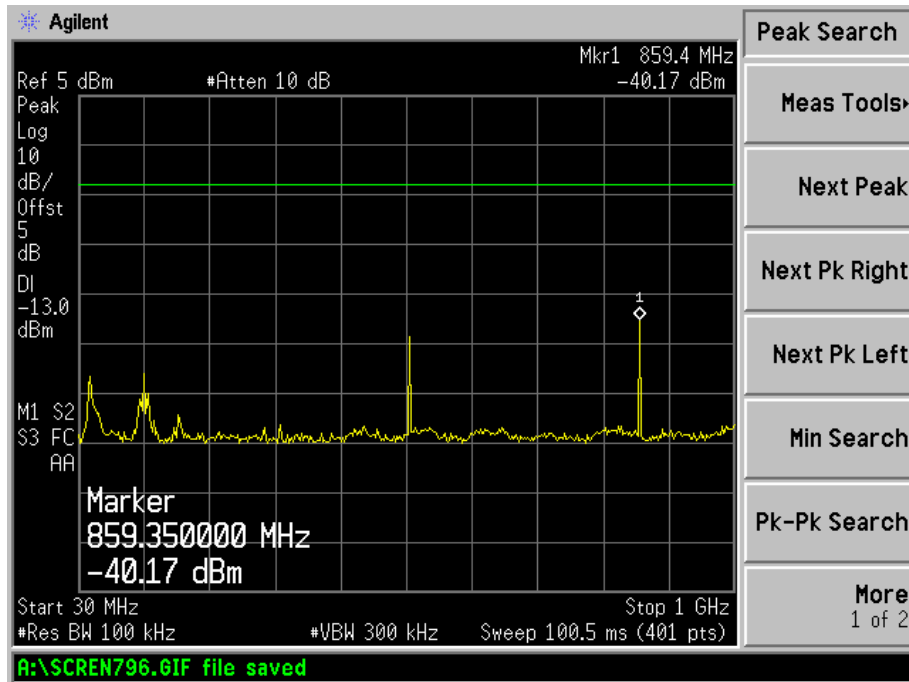


GPRS High Channel

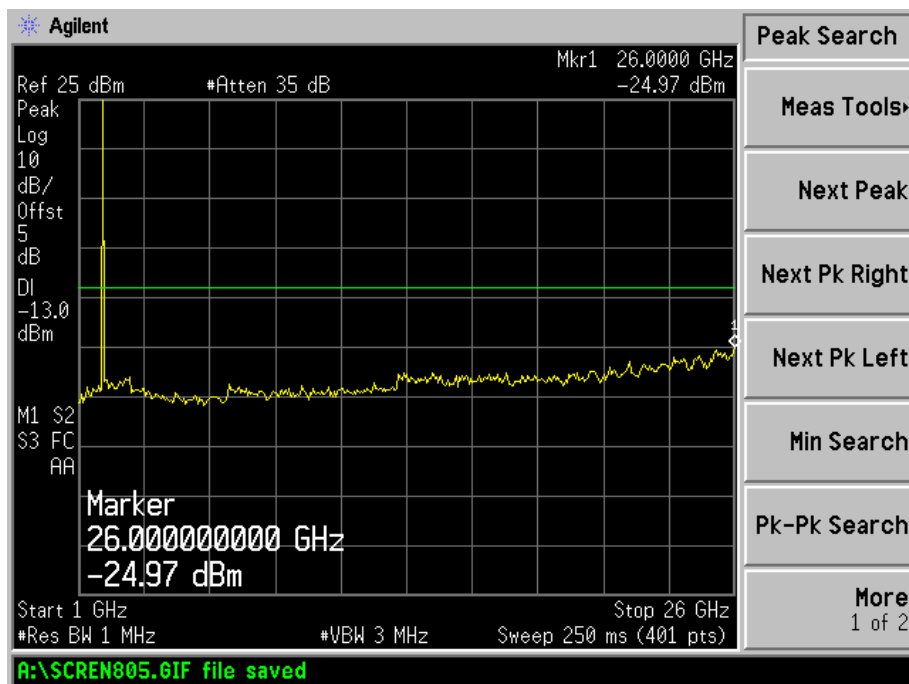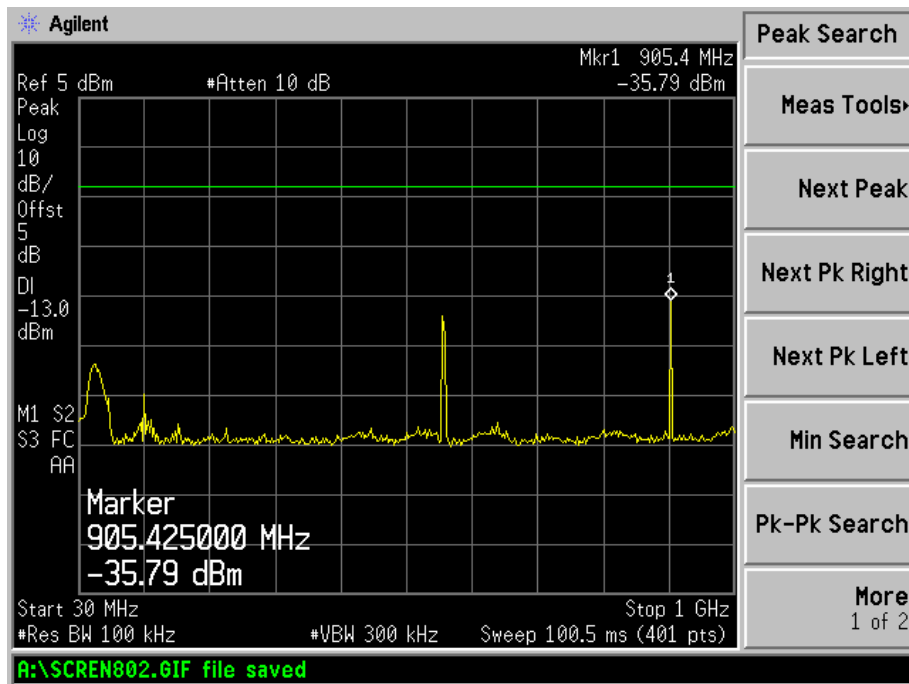



GPRS Low Band Emission

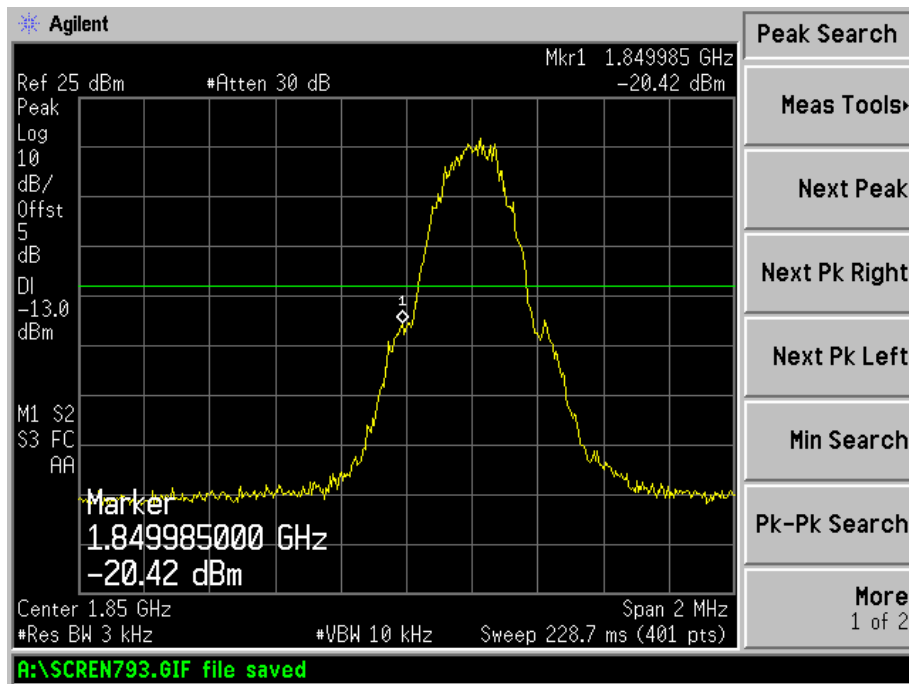



GPRS High Band Emission

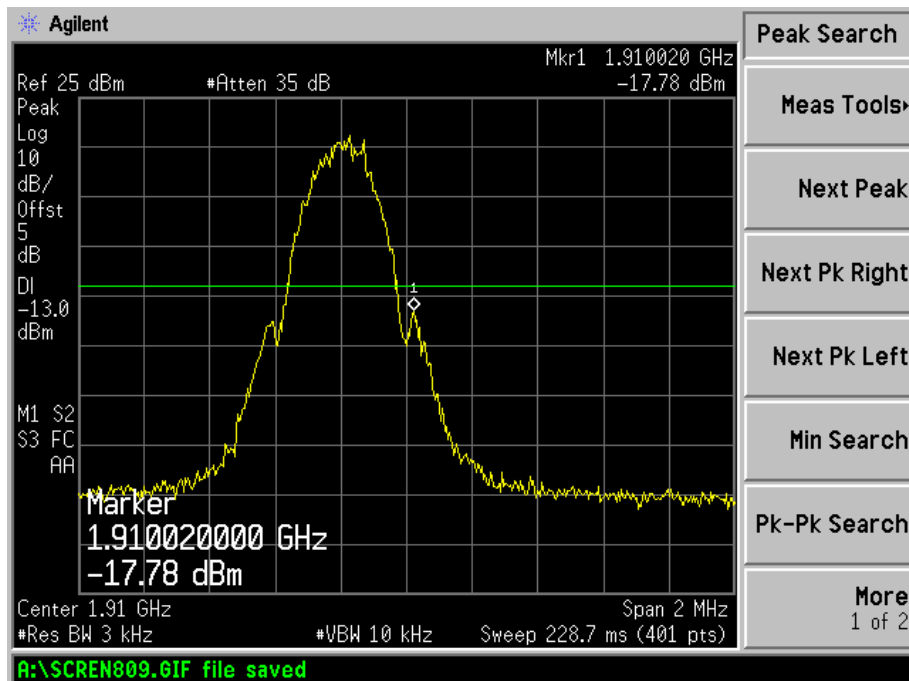



EDGE Low Channel

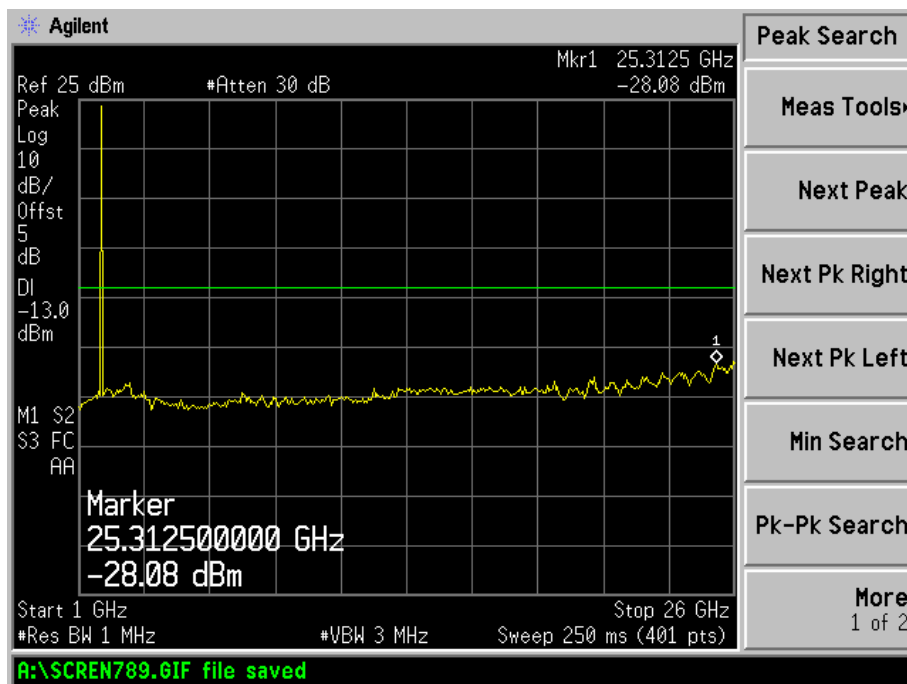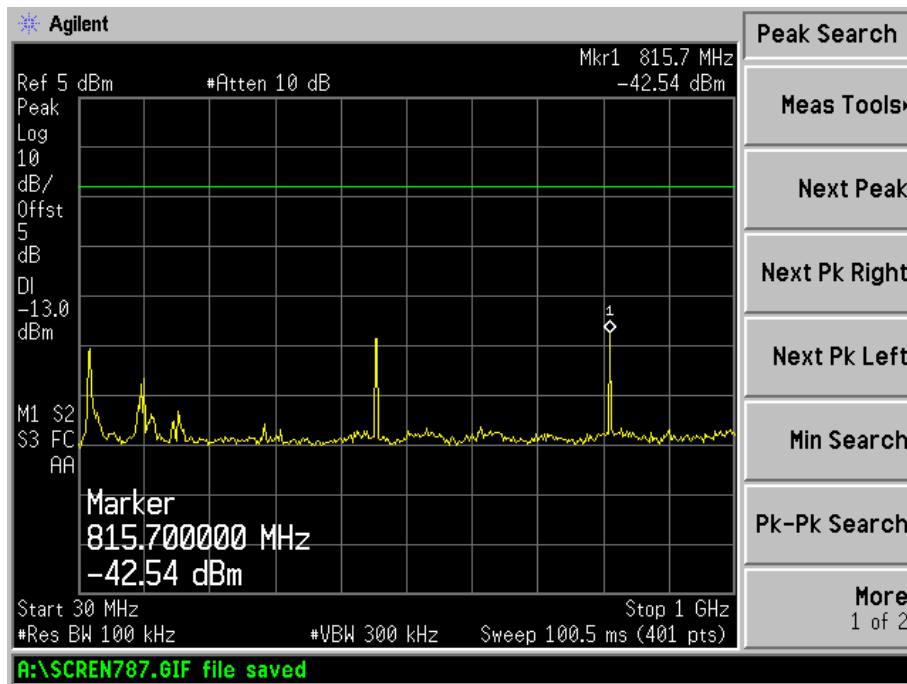


EDGE Middle Channel

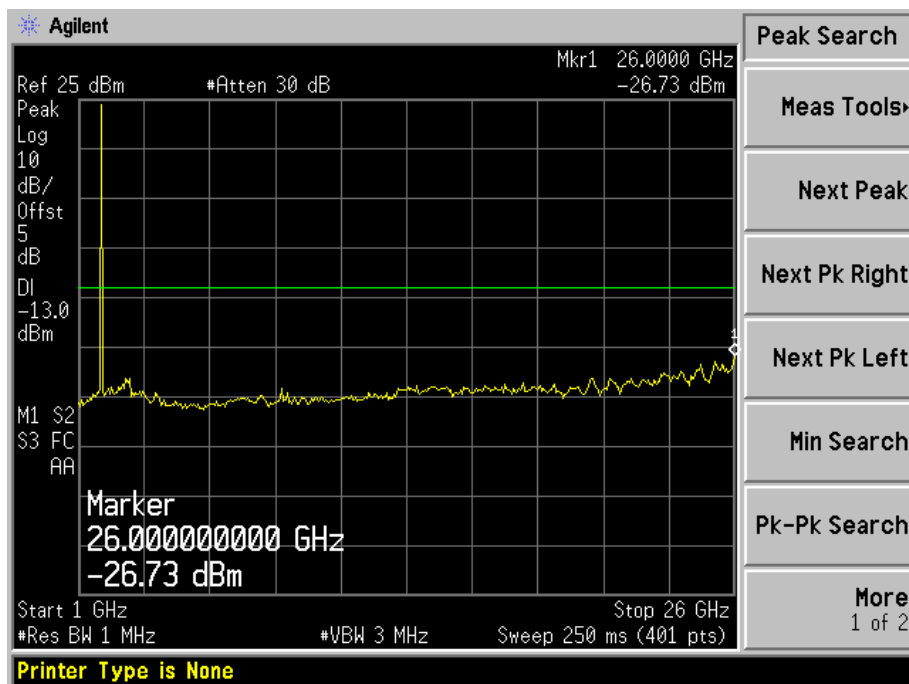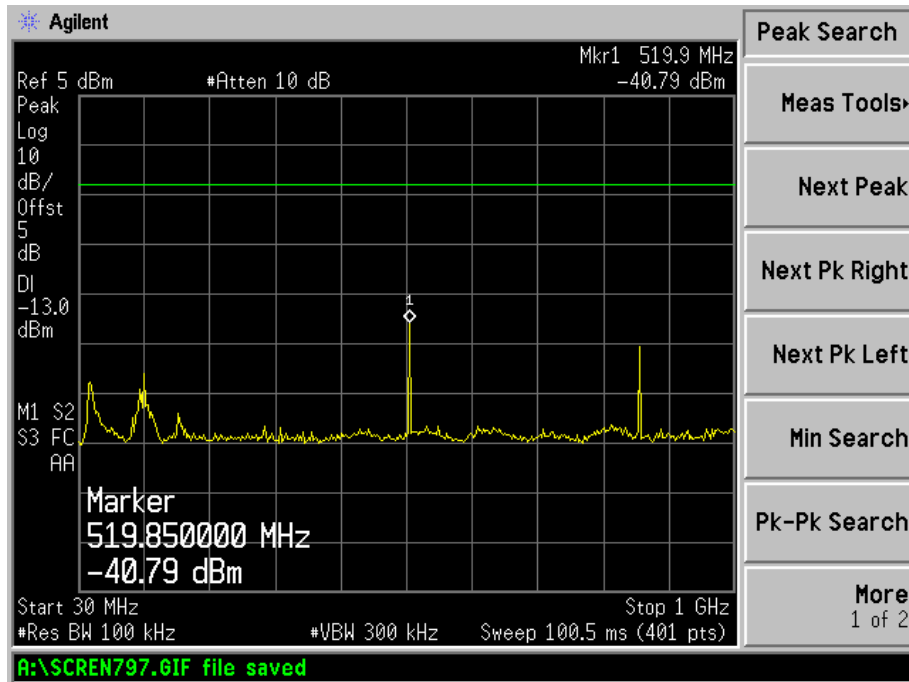


EDGE High Channel

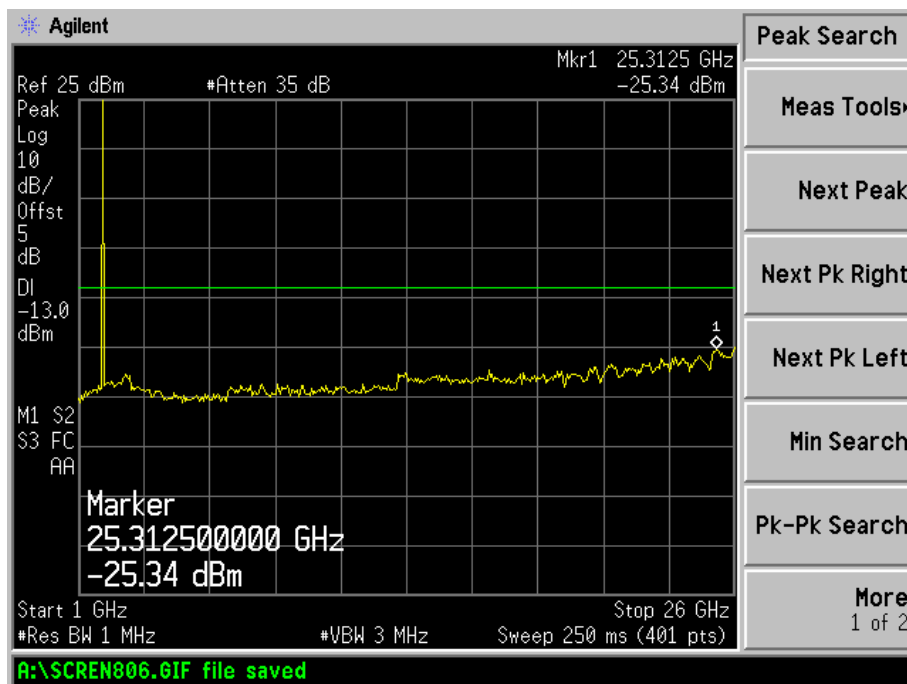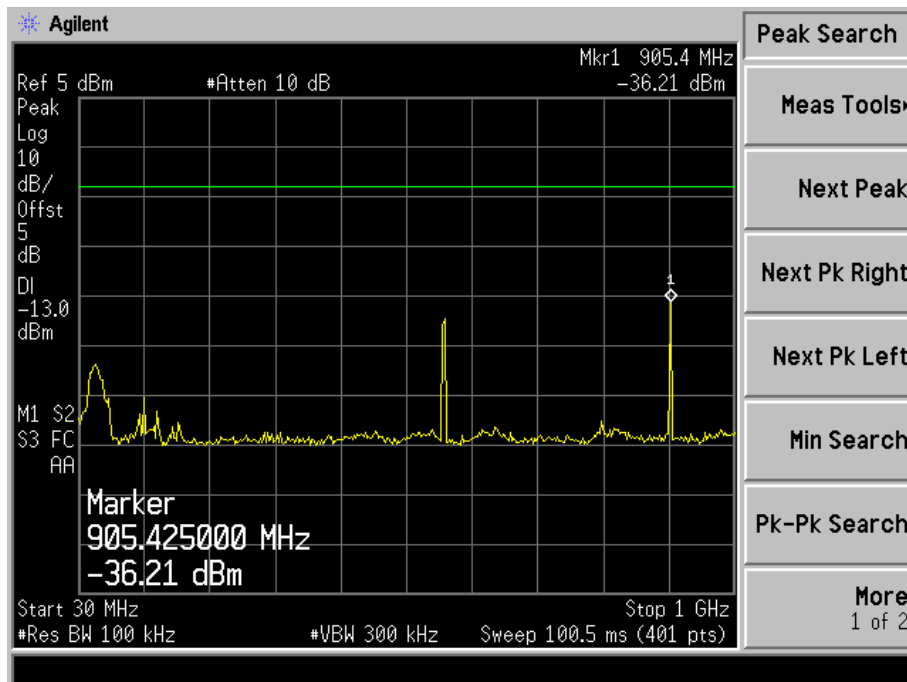

EDGE Low Band Emission


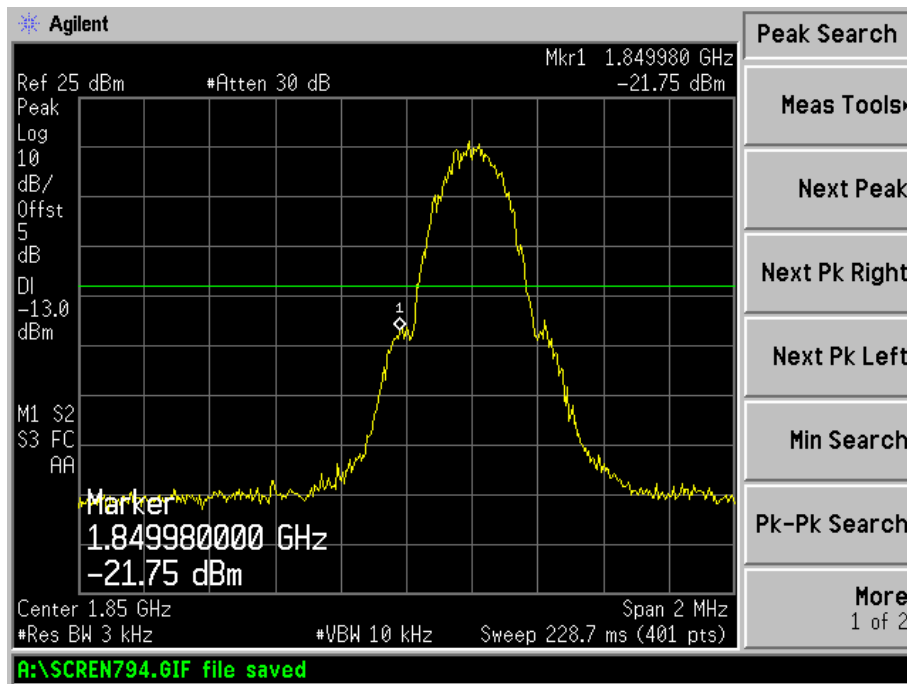


EDGE High Band Emission


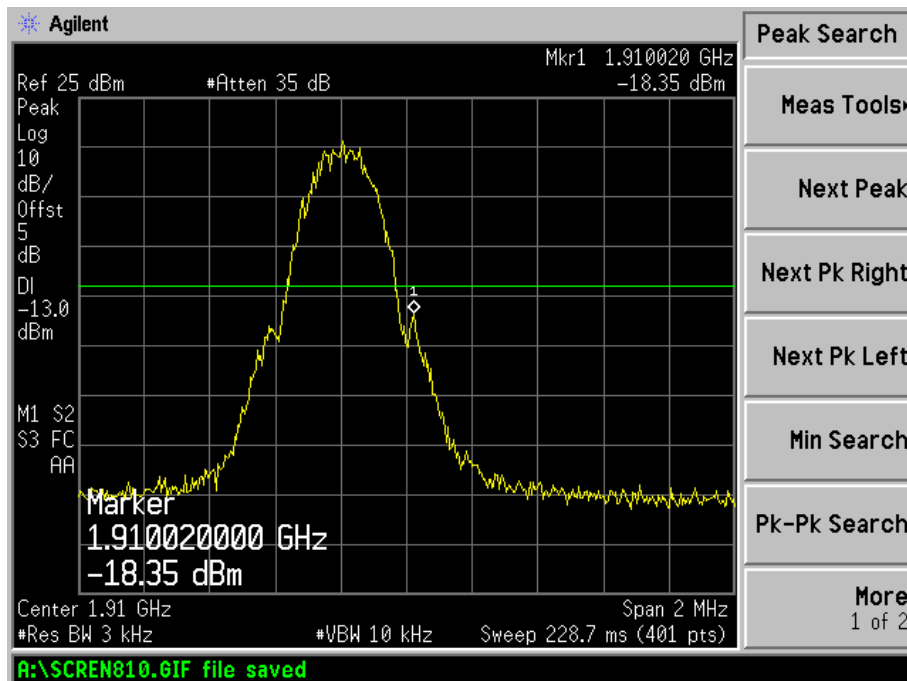


For Band V



WCDMA Low Channel

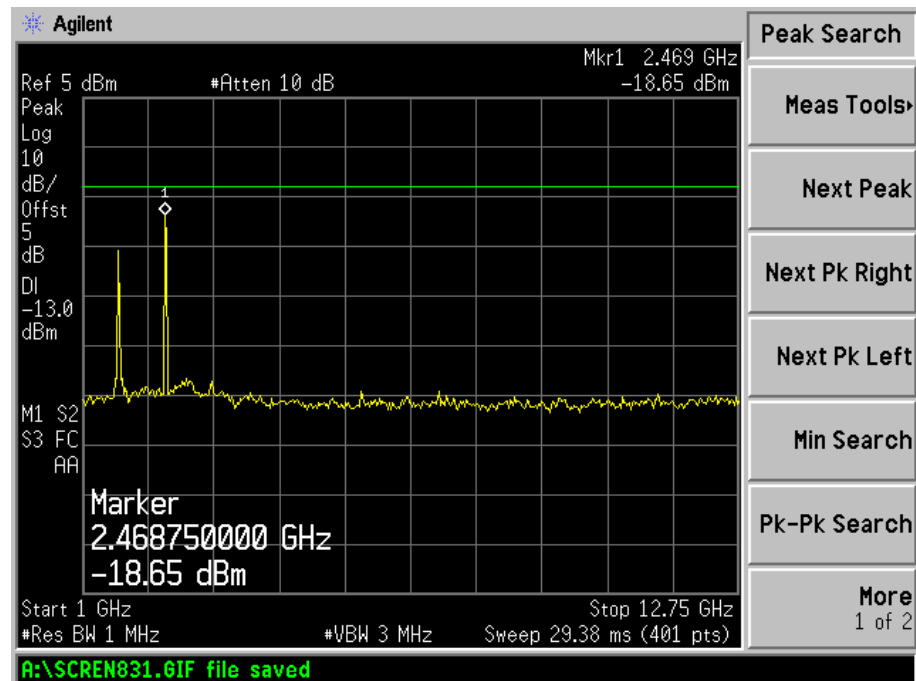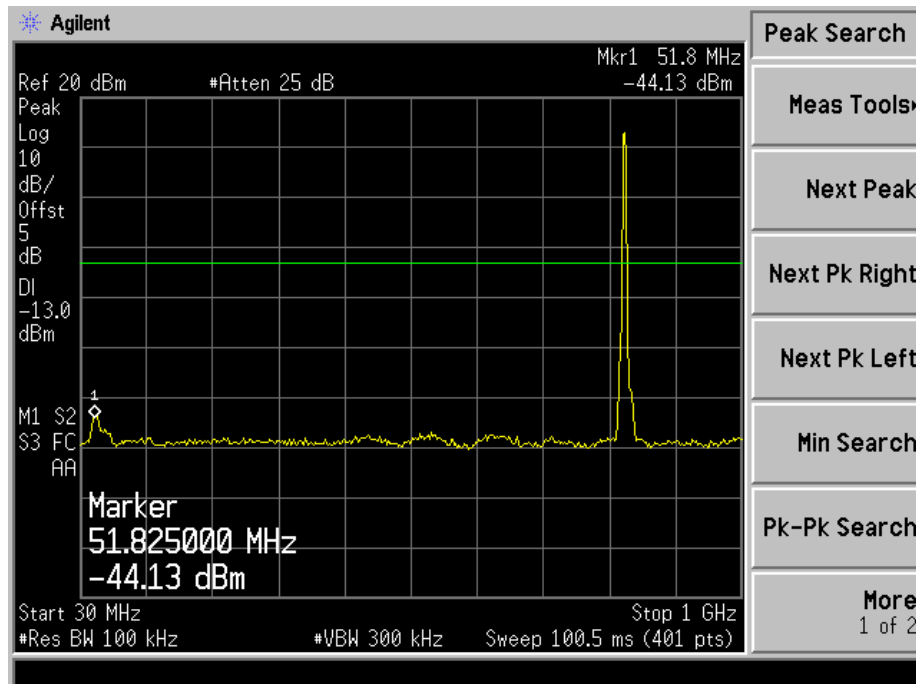


WCDMA Middle Channel

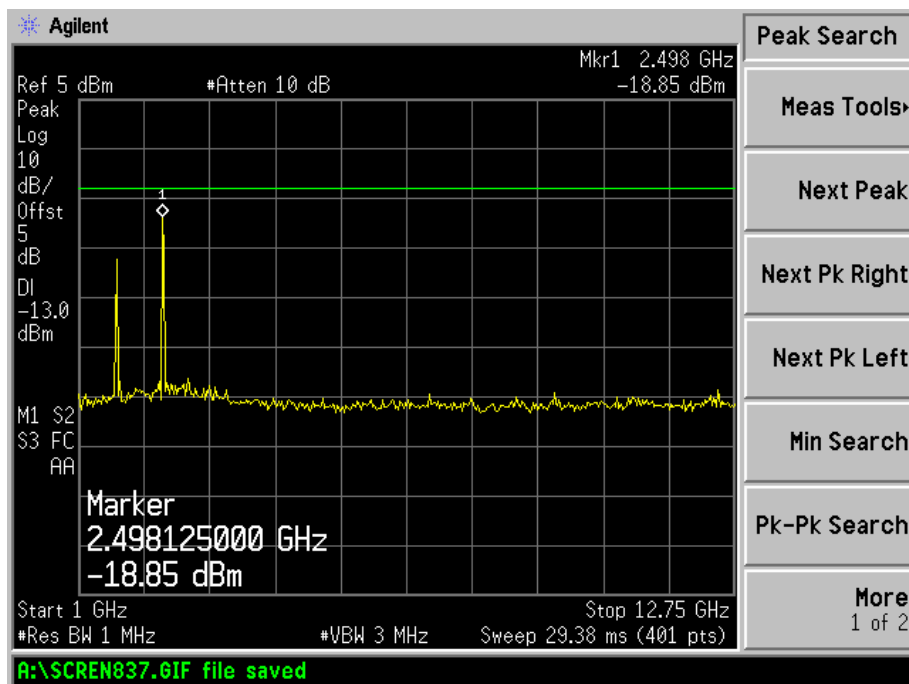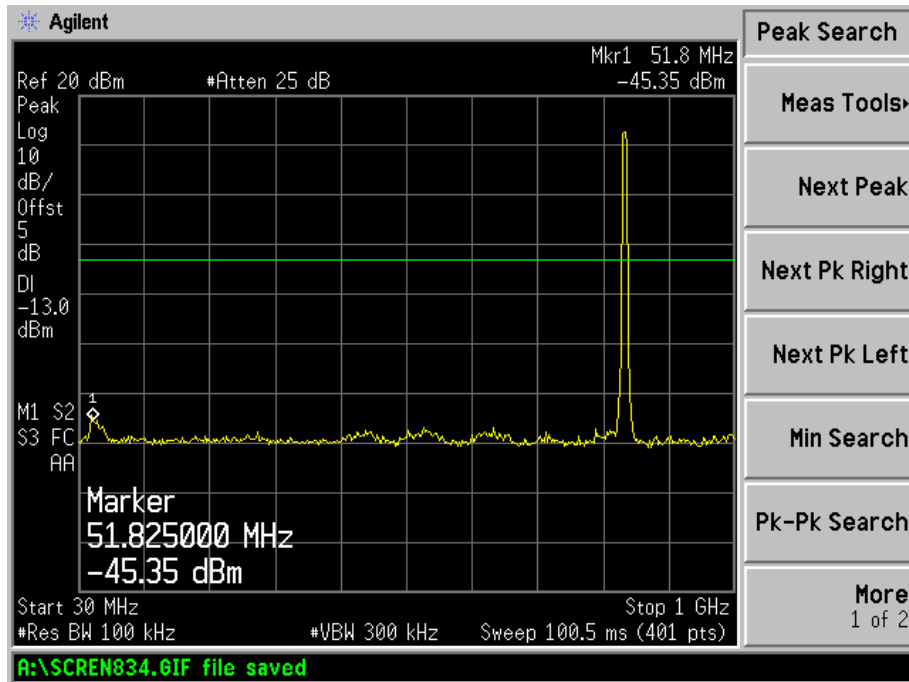


WCDMA High Channel

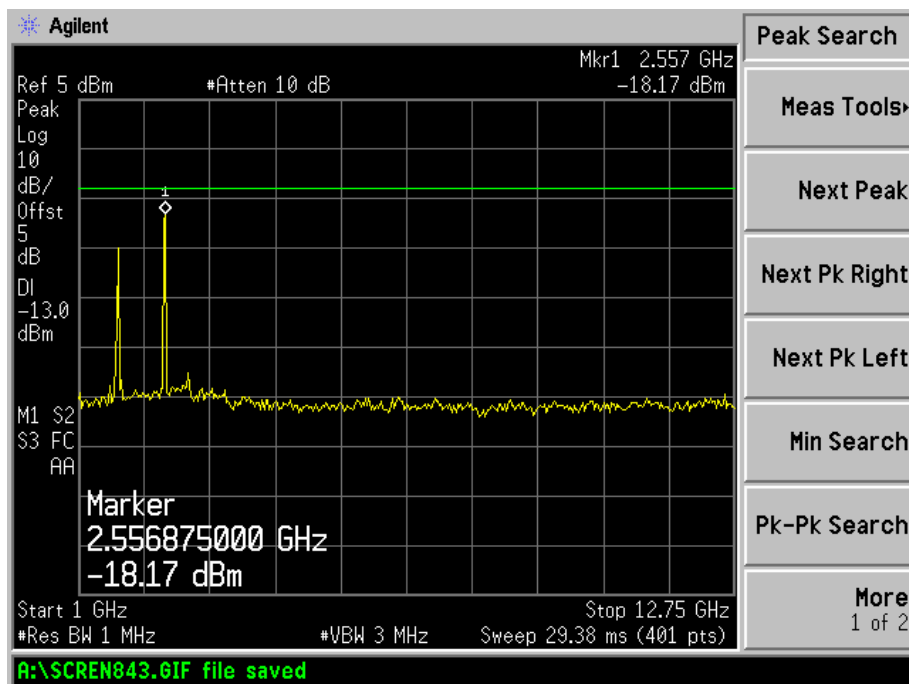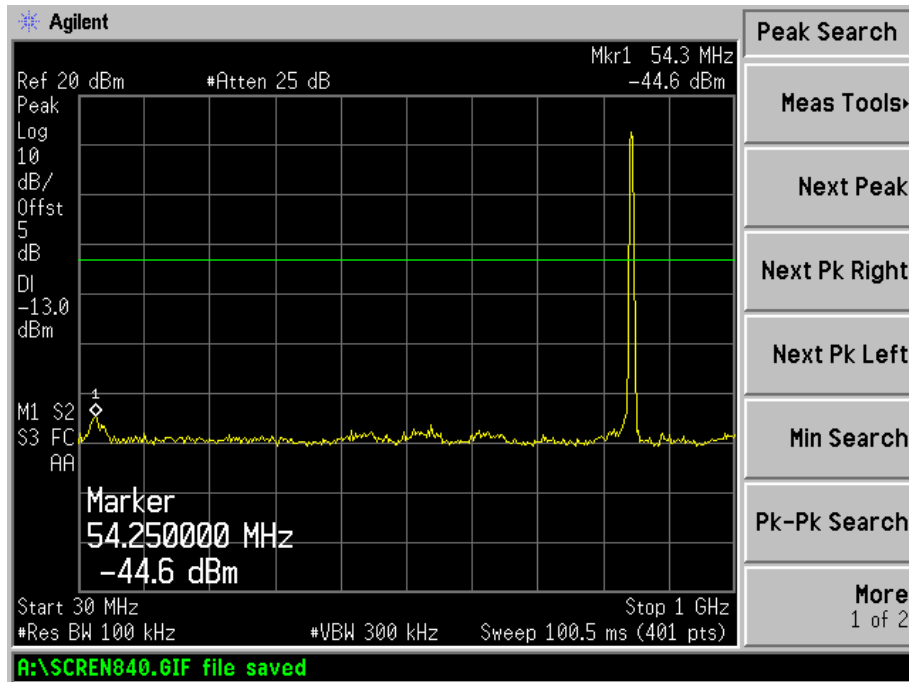



WCDMA Low Band Spurious Emission

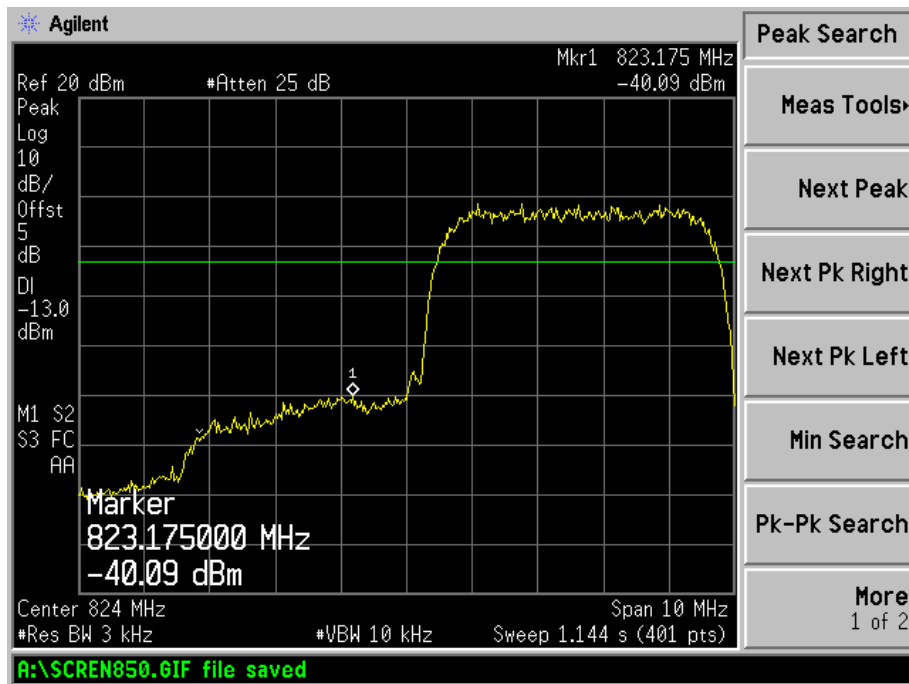



WCDMA High Band Spurious Emission

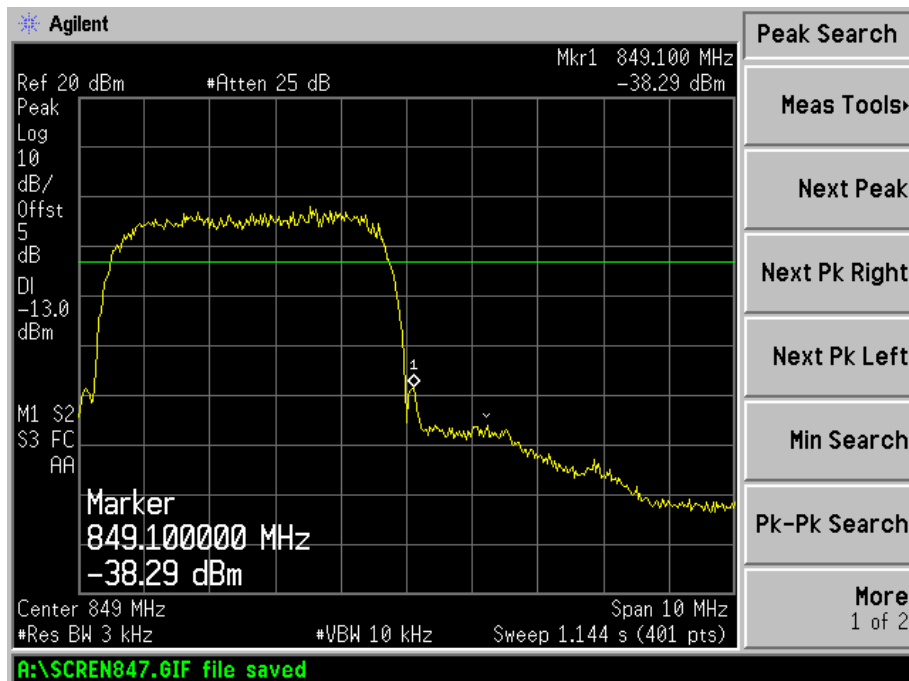



HSDPA Low Channel

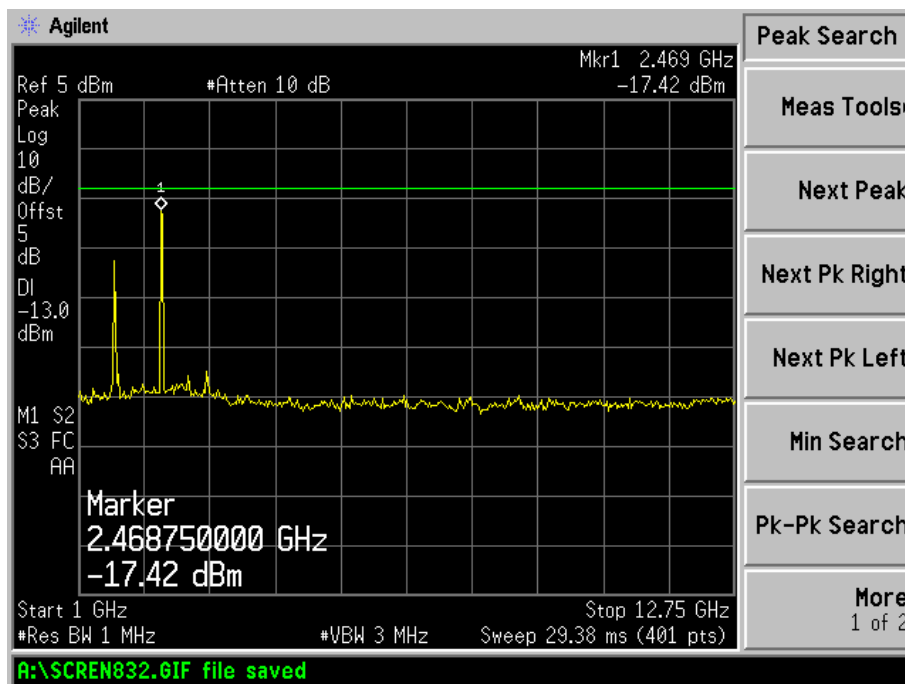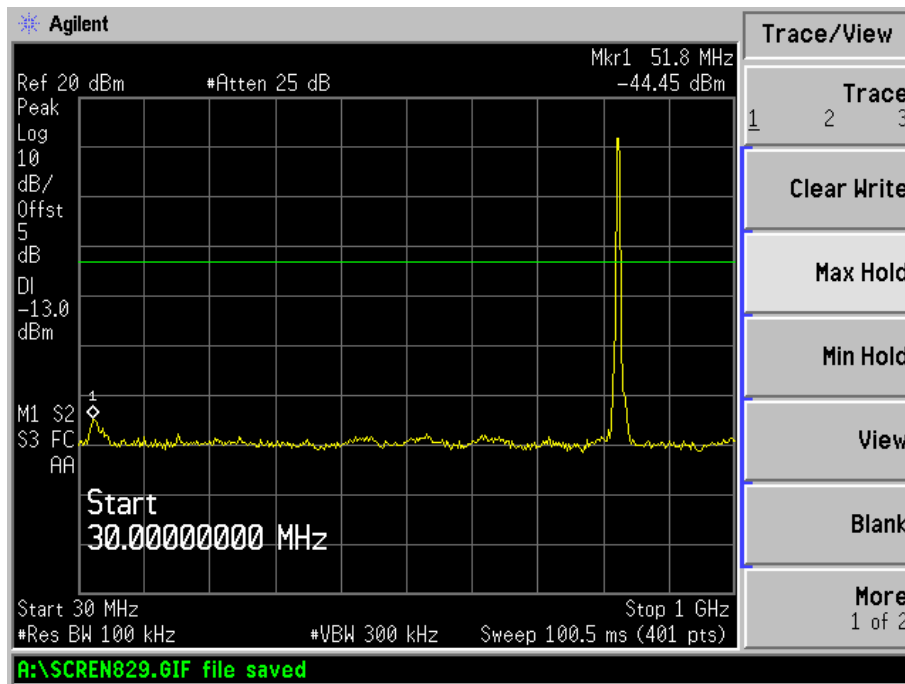


HSDPA Middle Channel

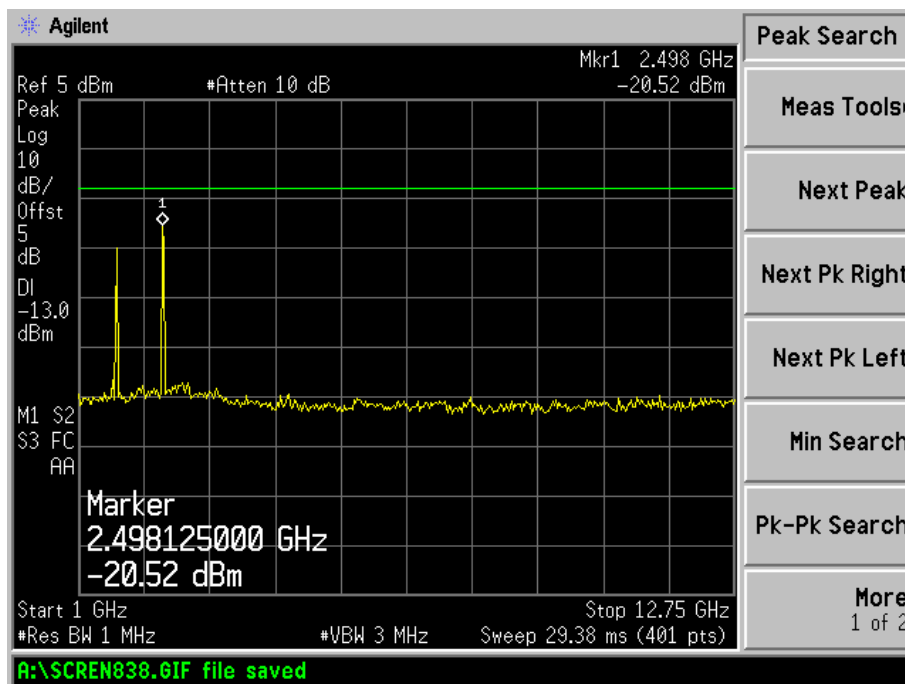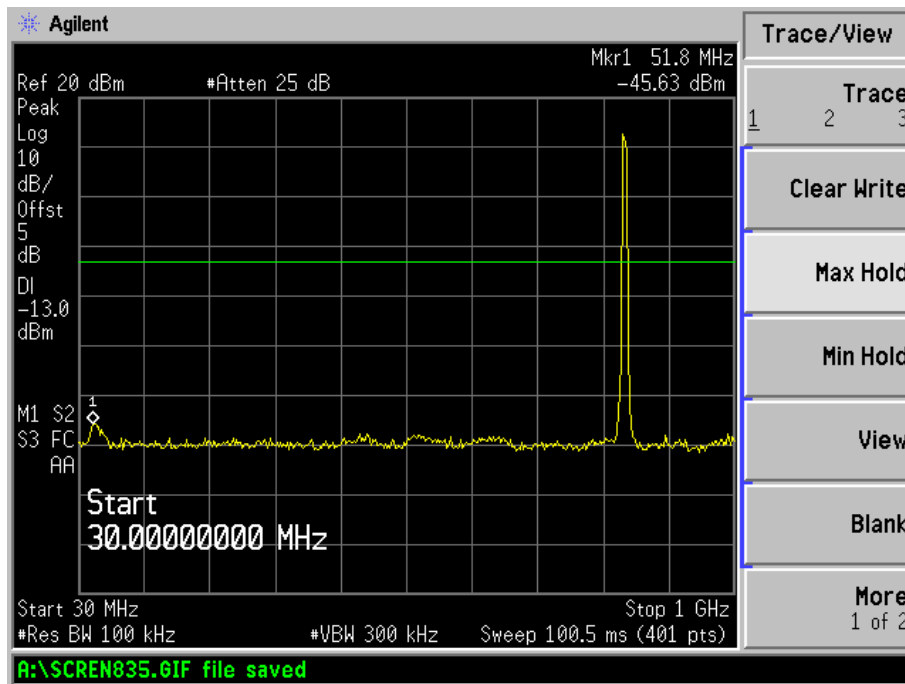


HSDPA High Channel

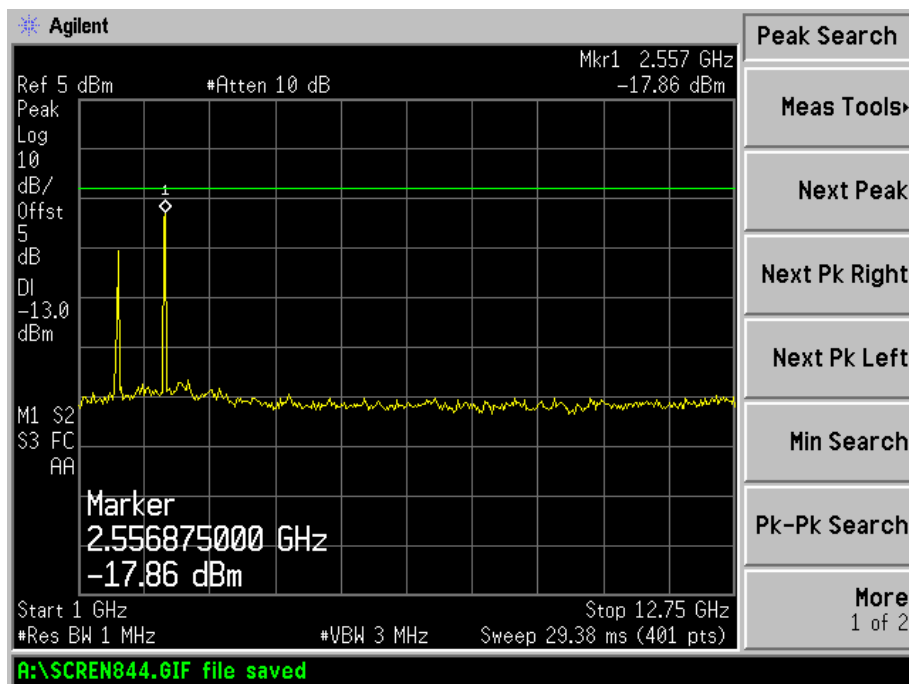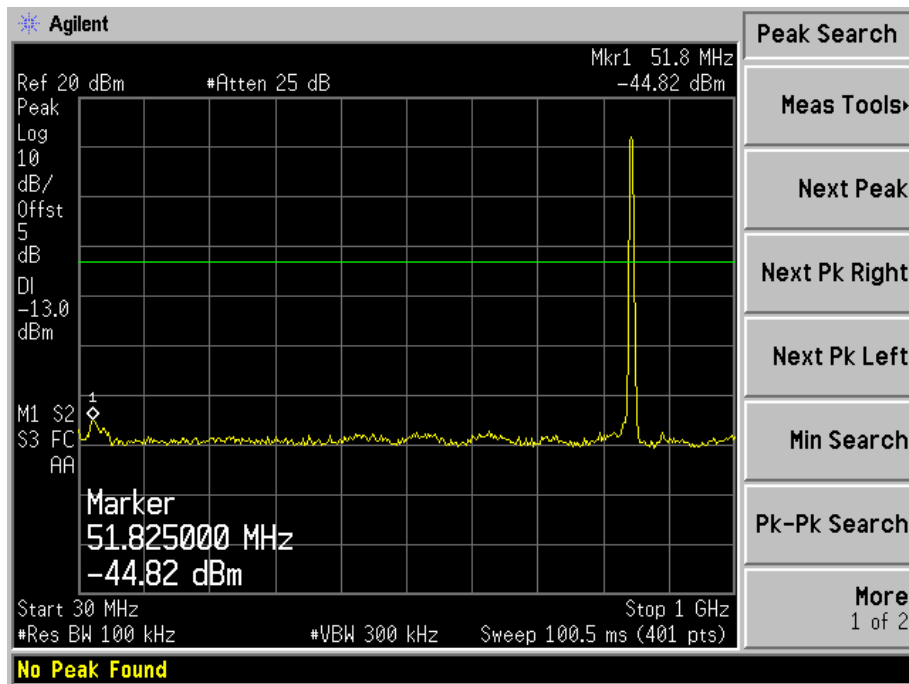



HSDPA Low Band Spurious Emission


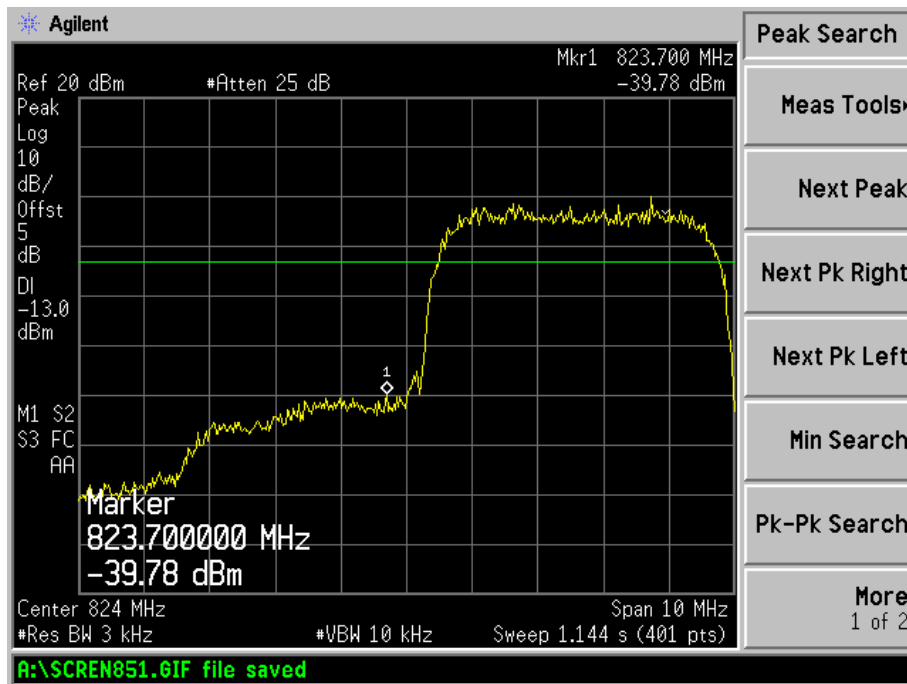


HSDPA High Band Spurious Emission


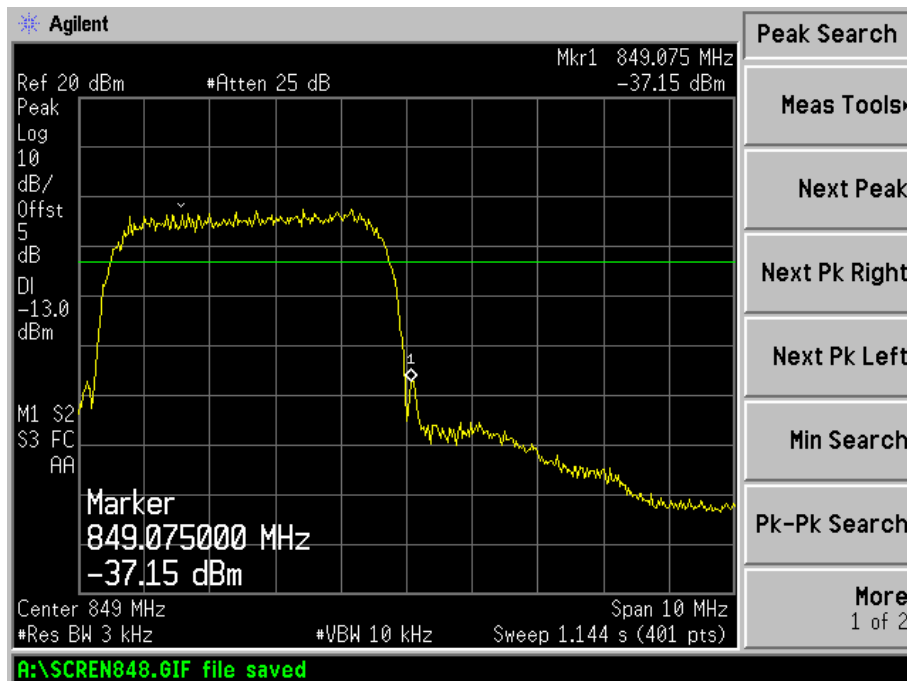


HSUPA Low Channel

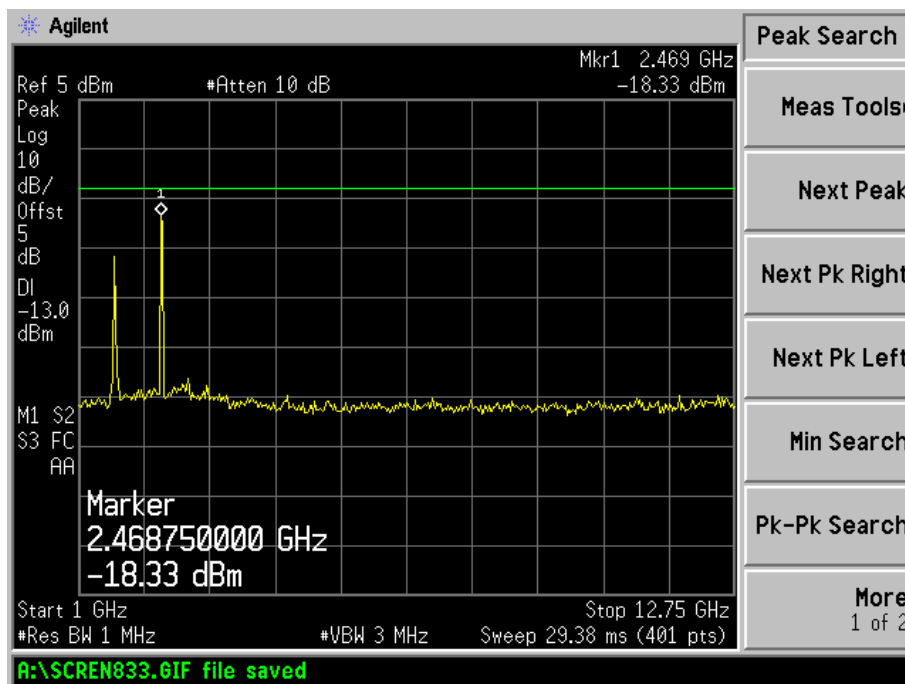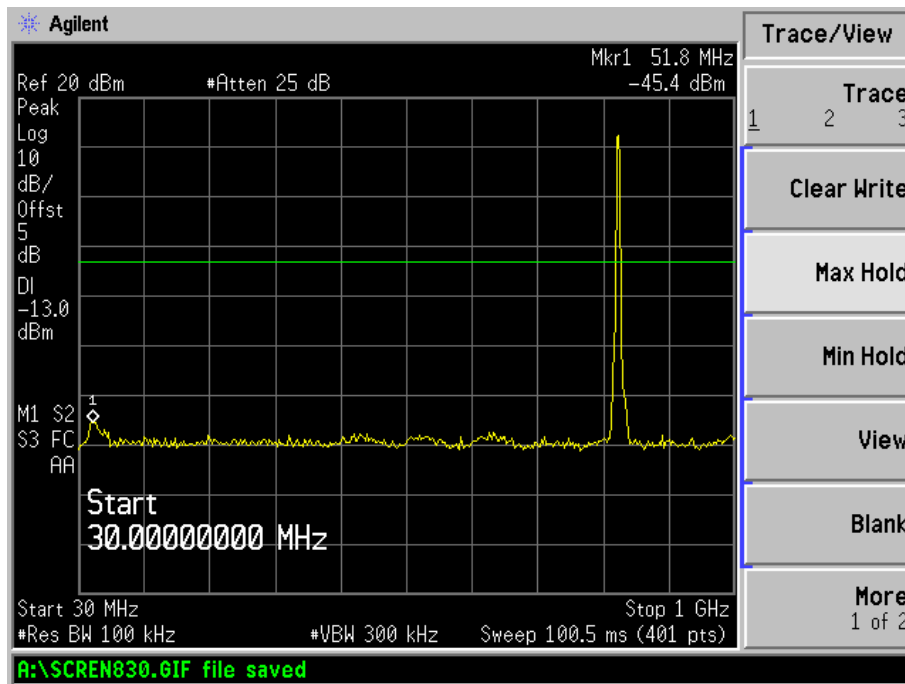


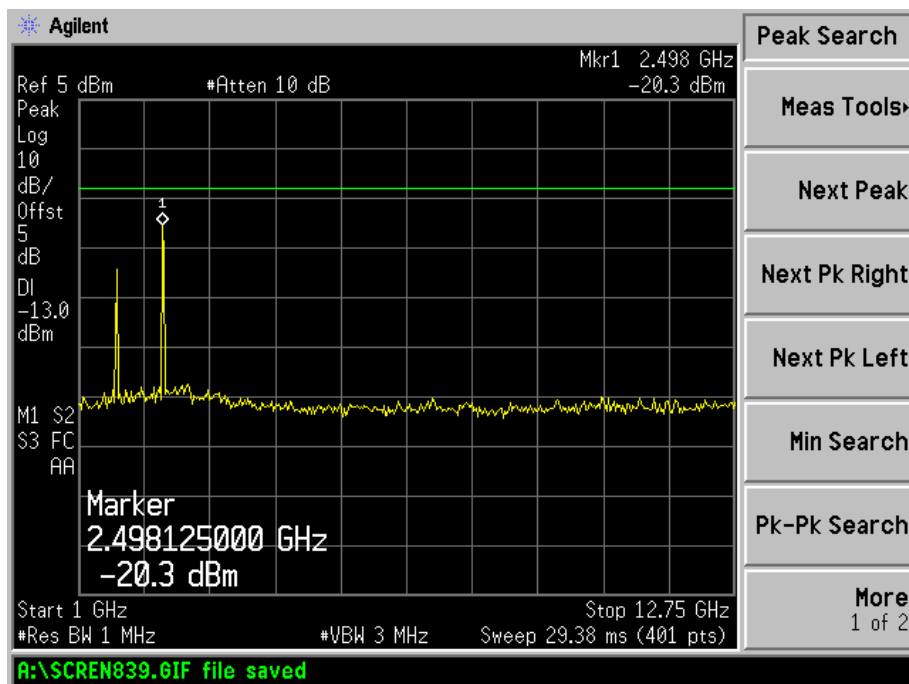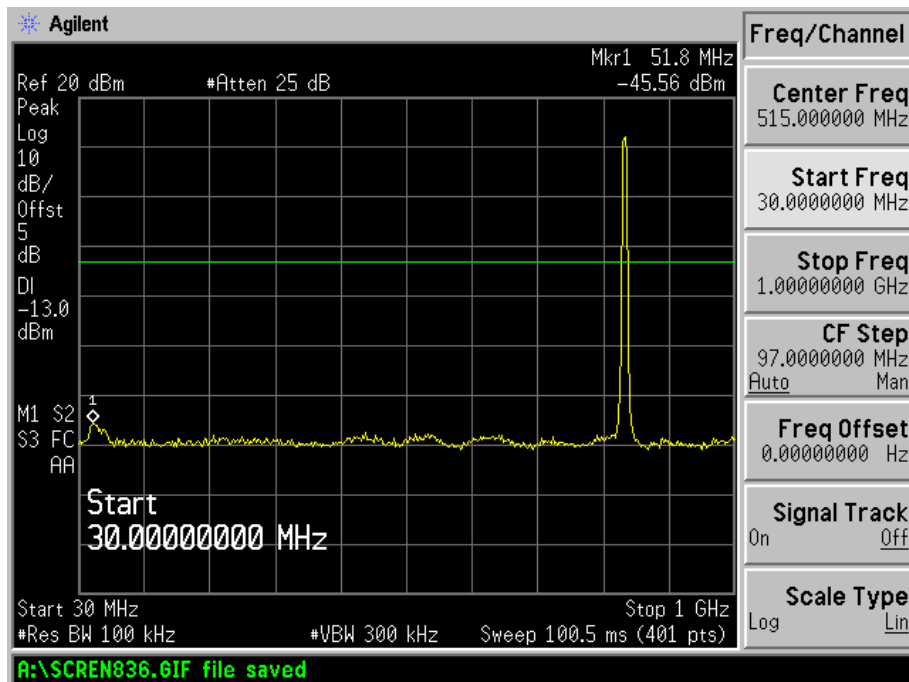


HSUPA High Channel

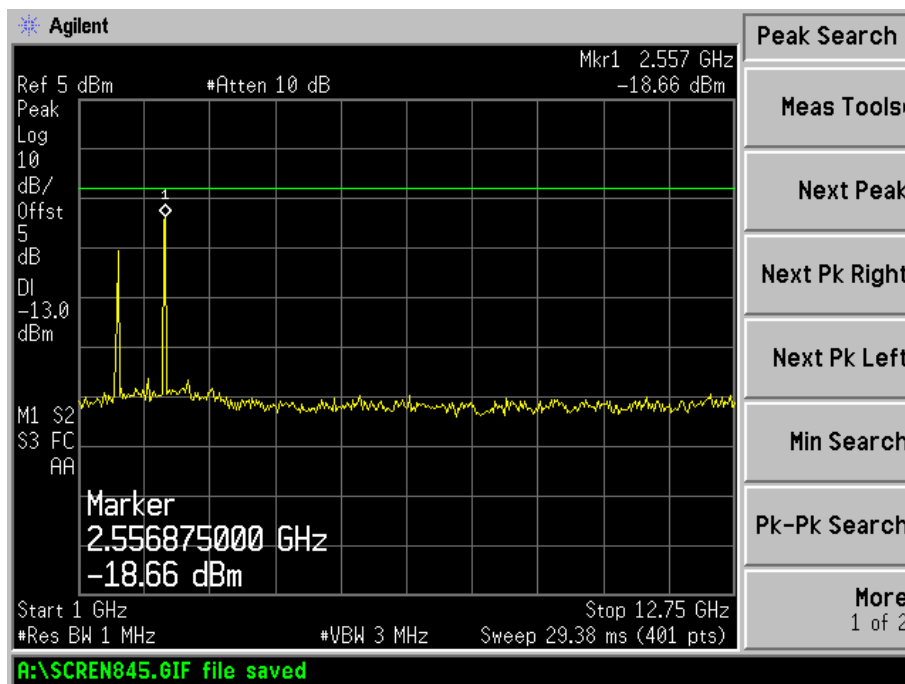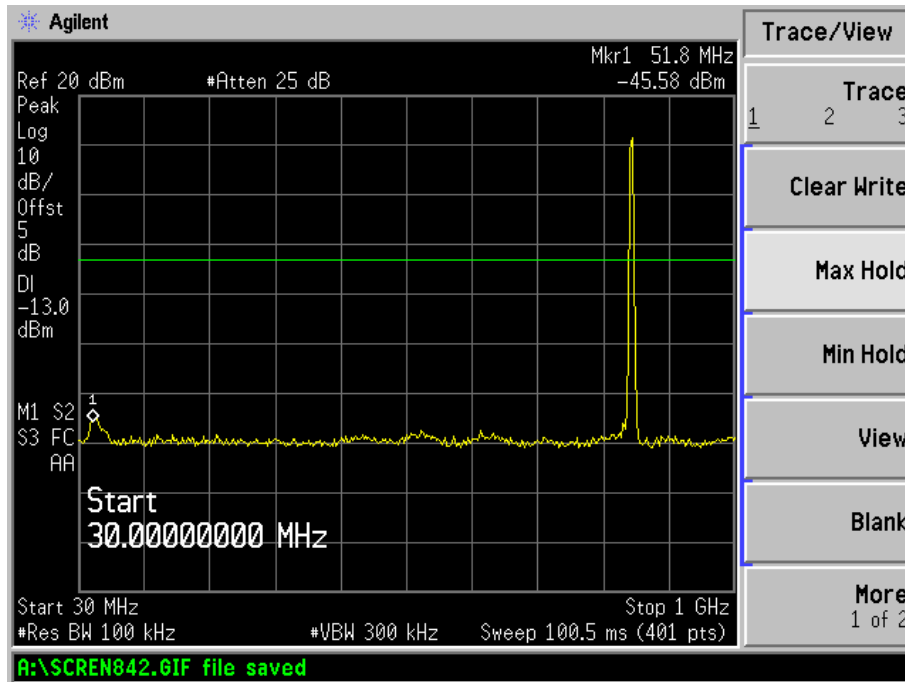

HSUPA Low Band Spurious Emission


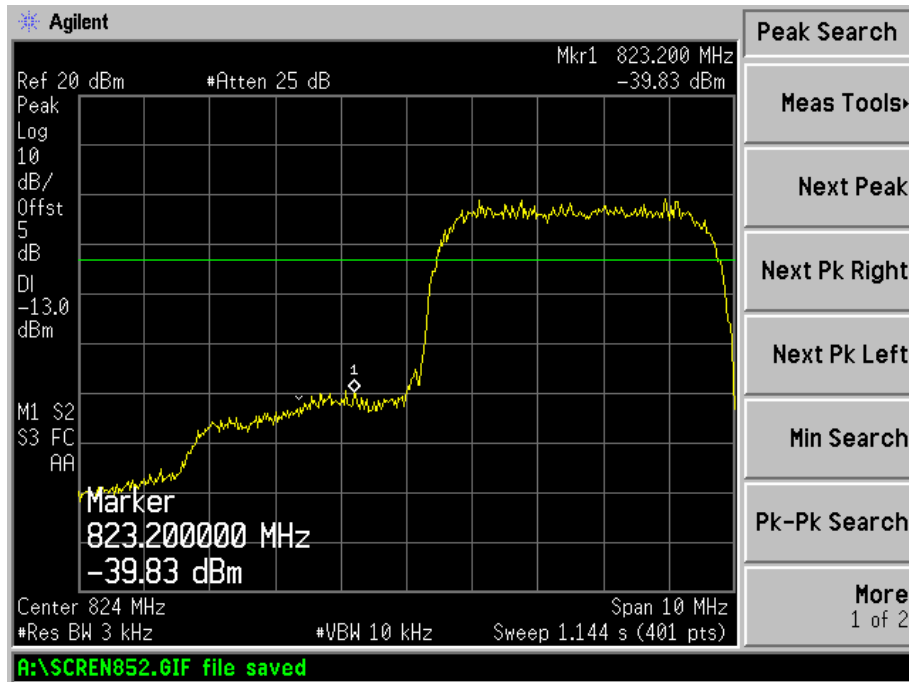


HSUPA High Band Spurious Emission


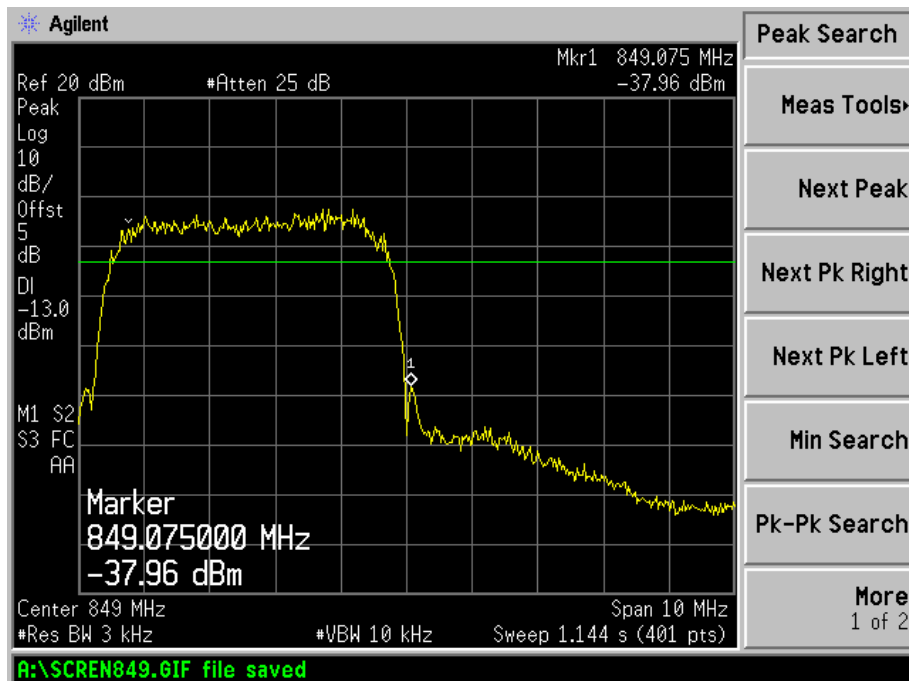


For Band II



WCDMA Low Channel

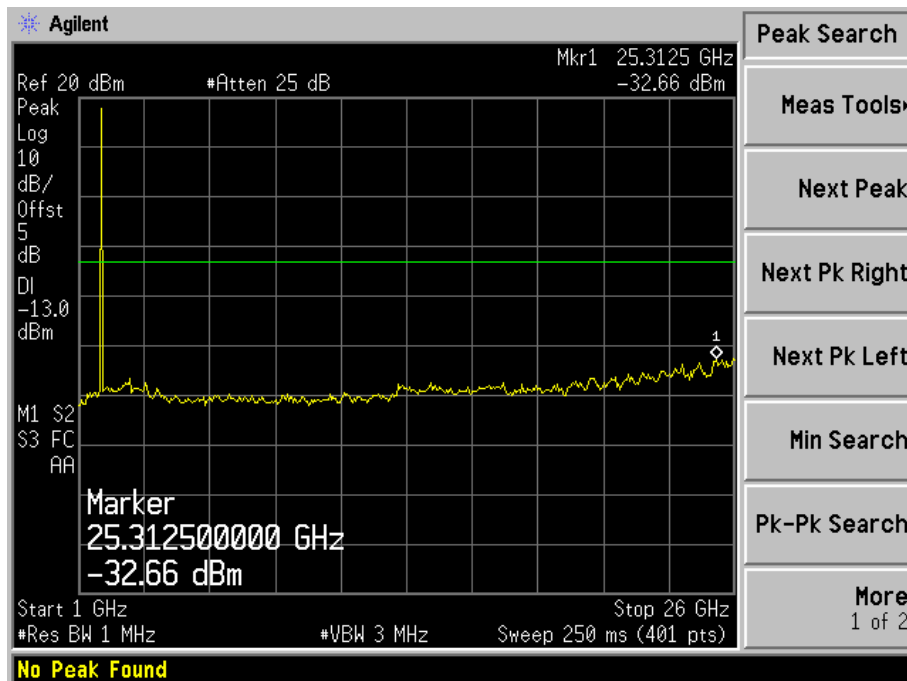
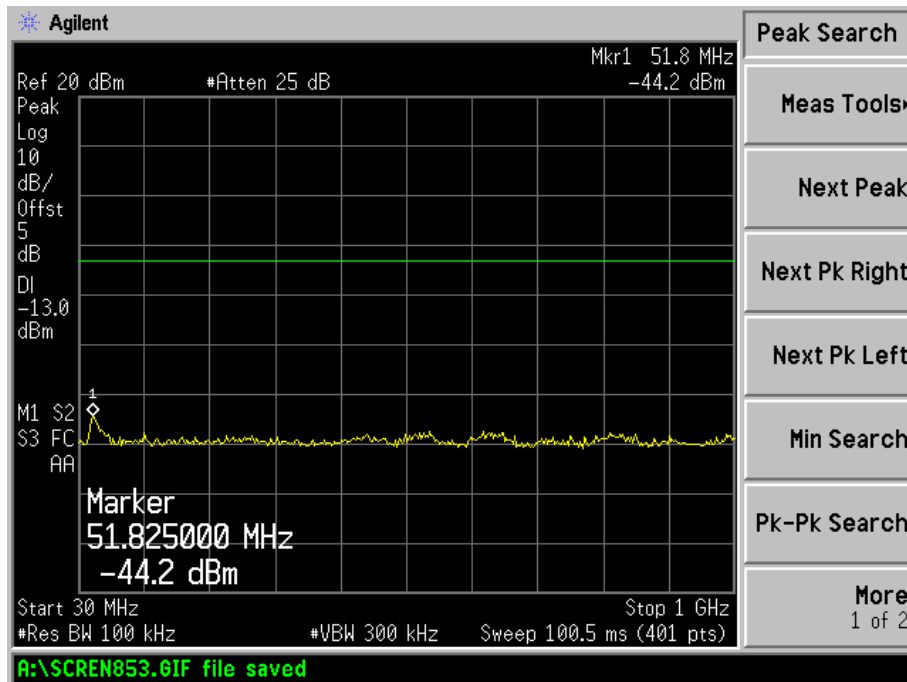


WCDMA Middle Channel

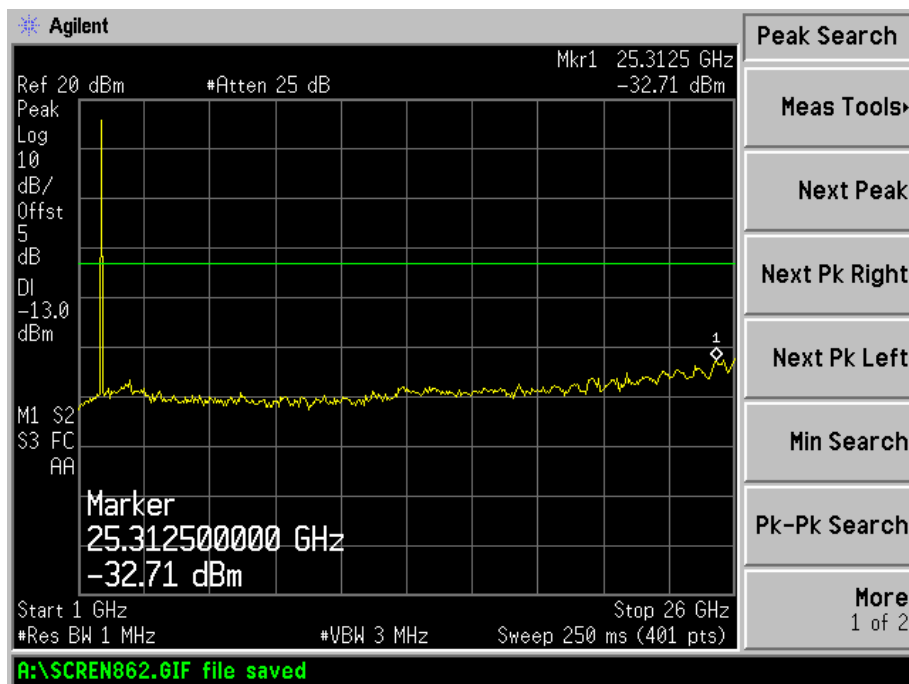
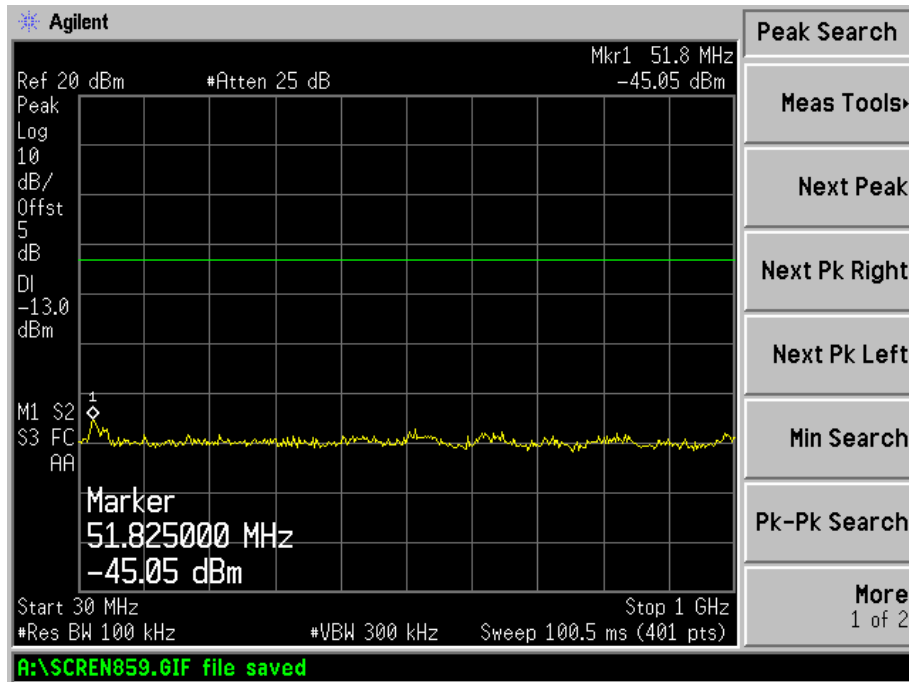


WCDMA High Channel

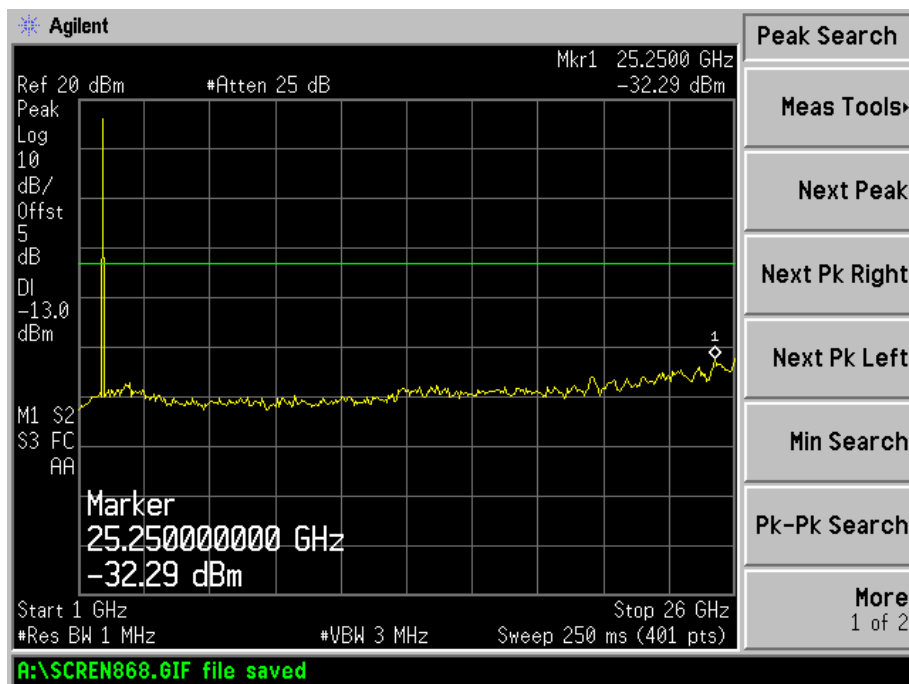
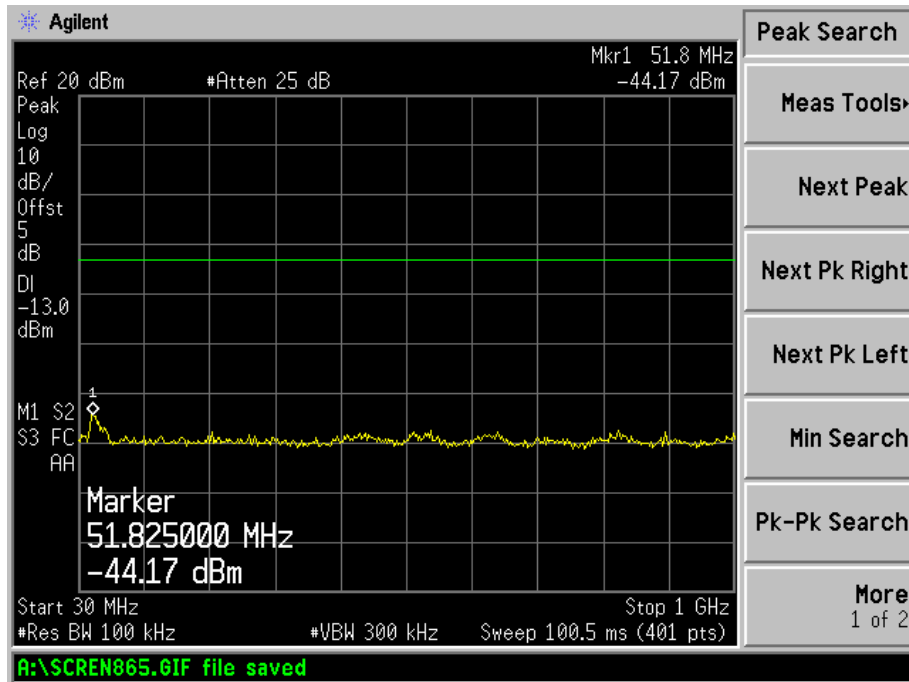


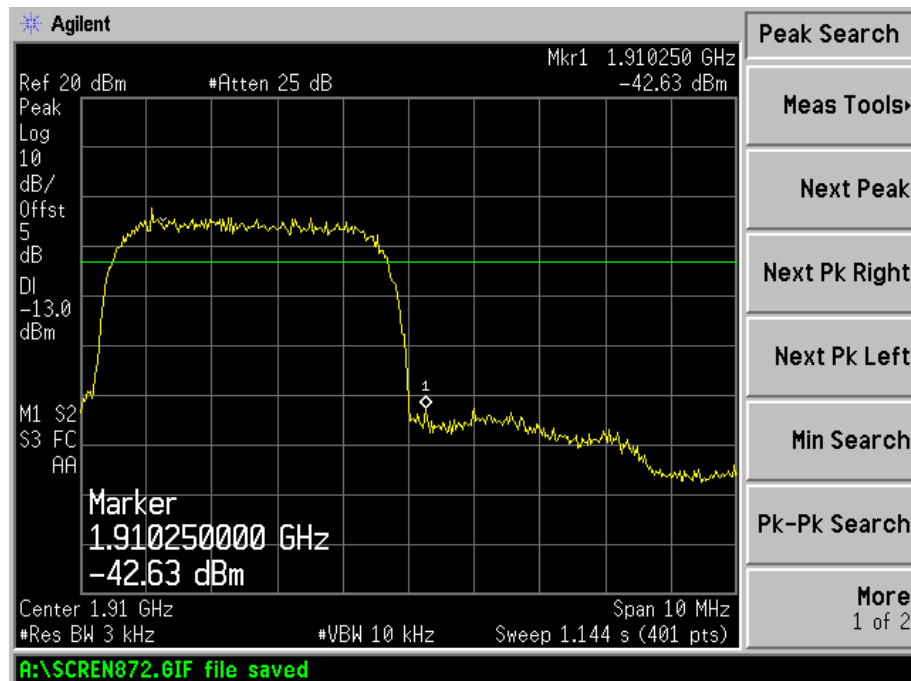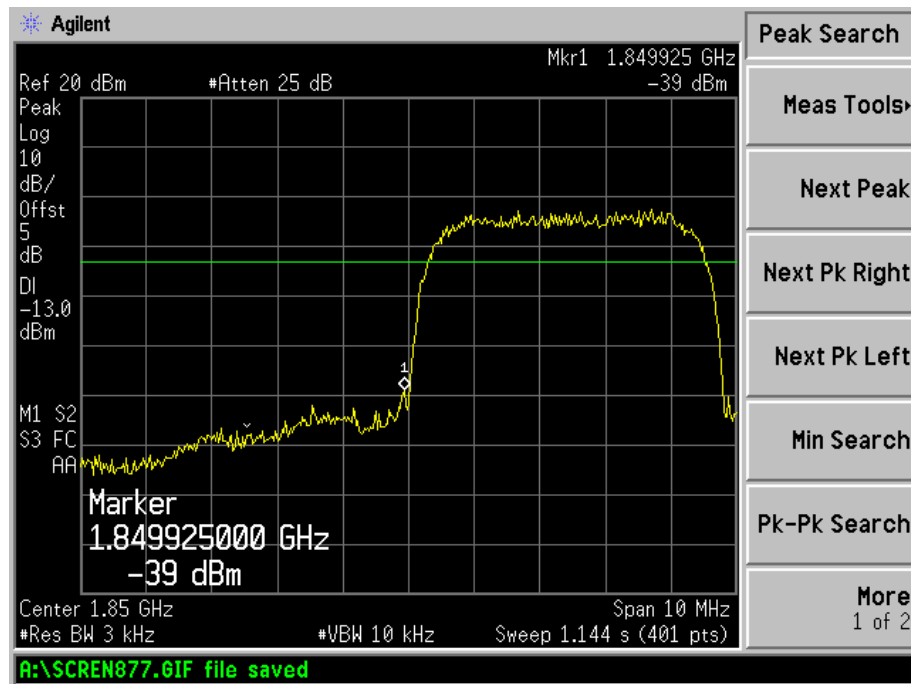



HSDPA Low Channel

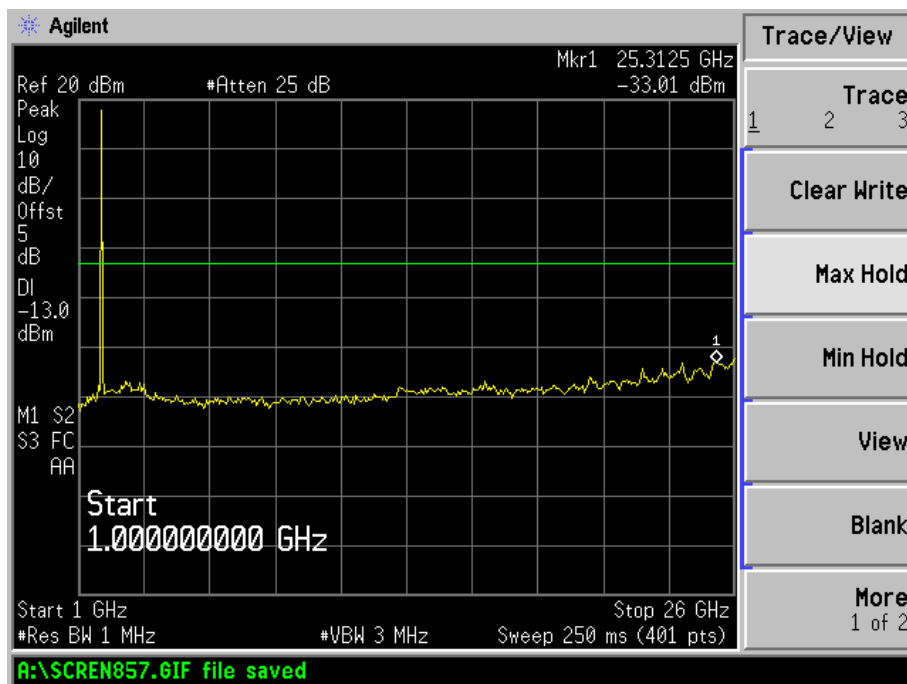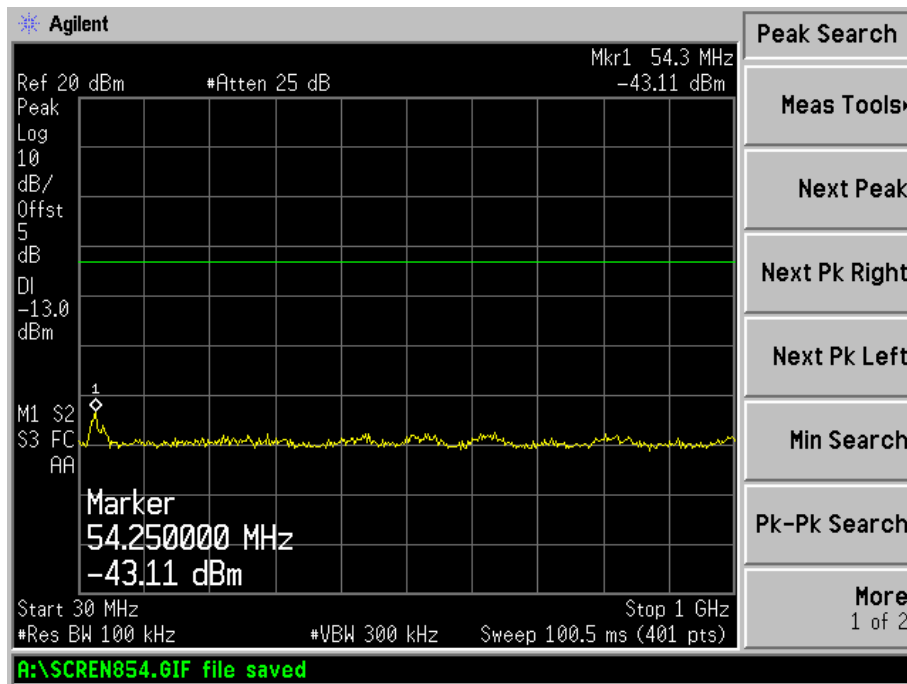


HSDPA Middle Channel

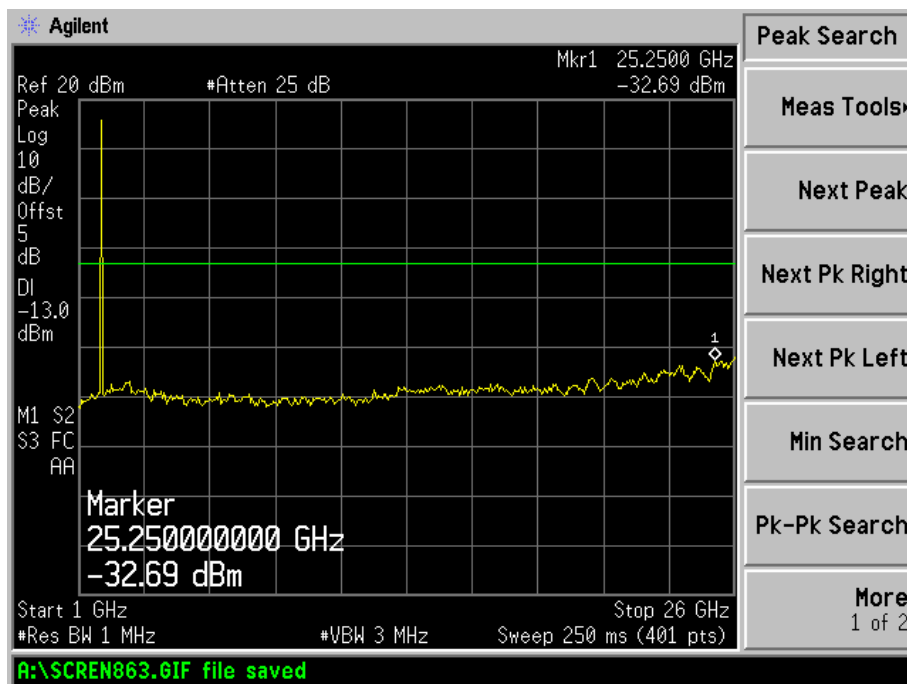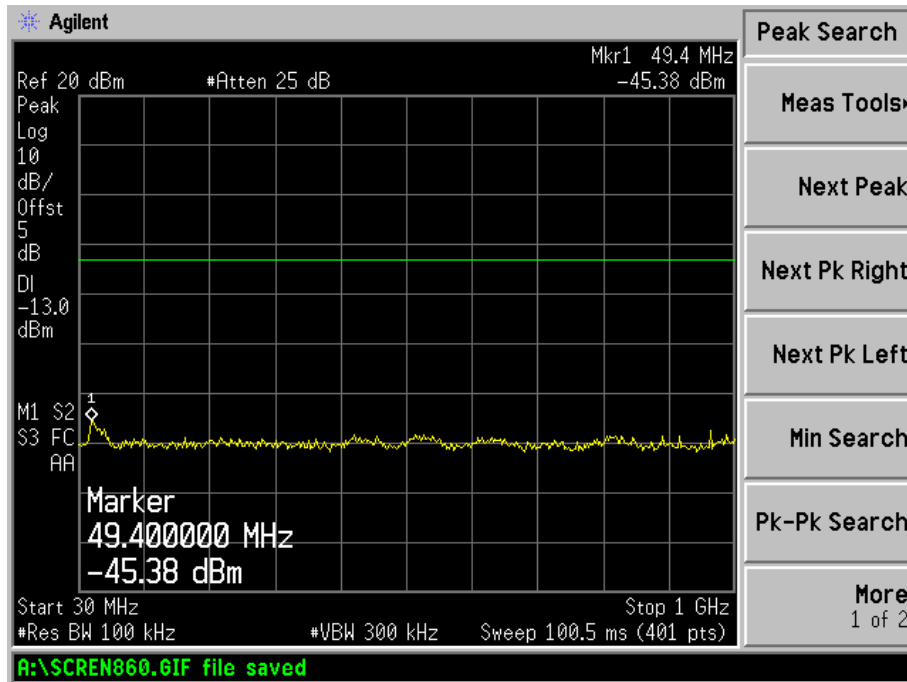


HSDPA High Channel

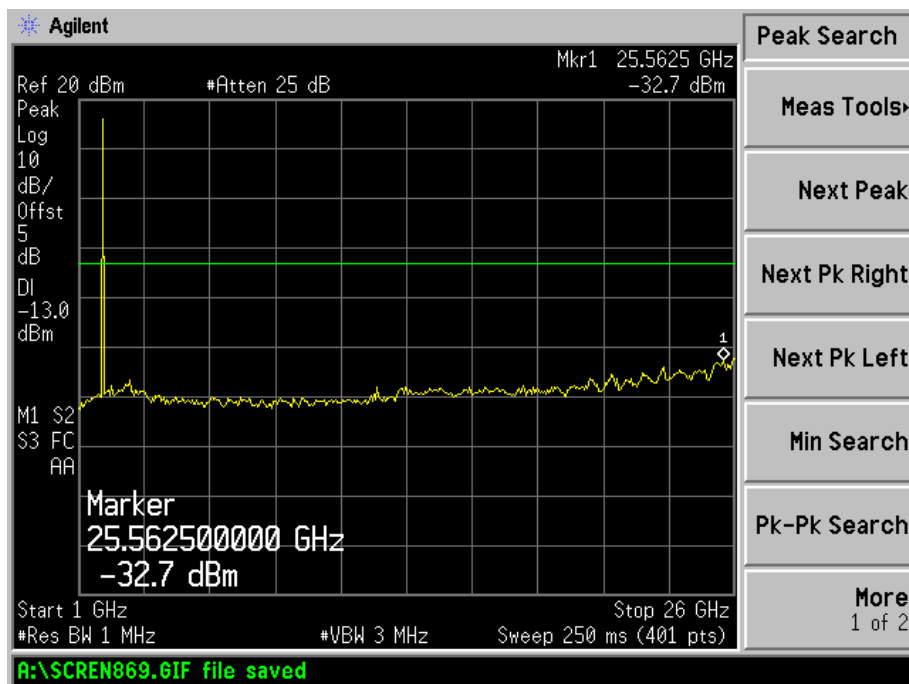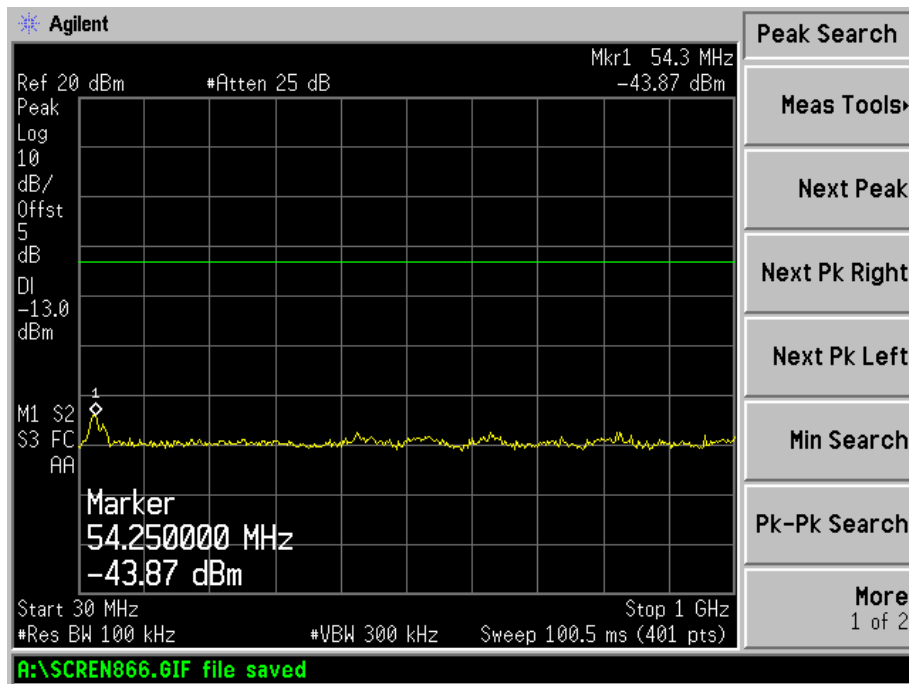



HSDPA Low Band Spurious Emission

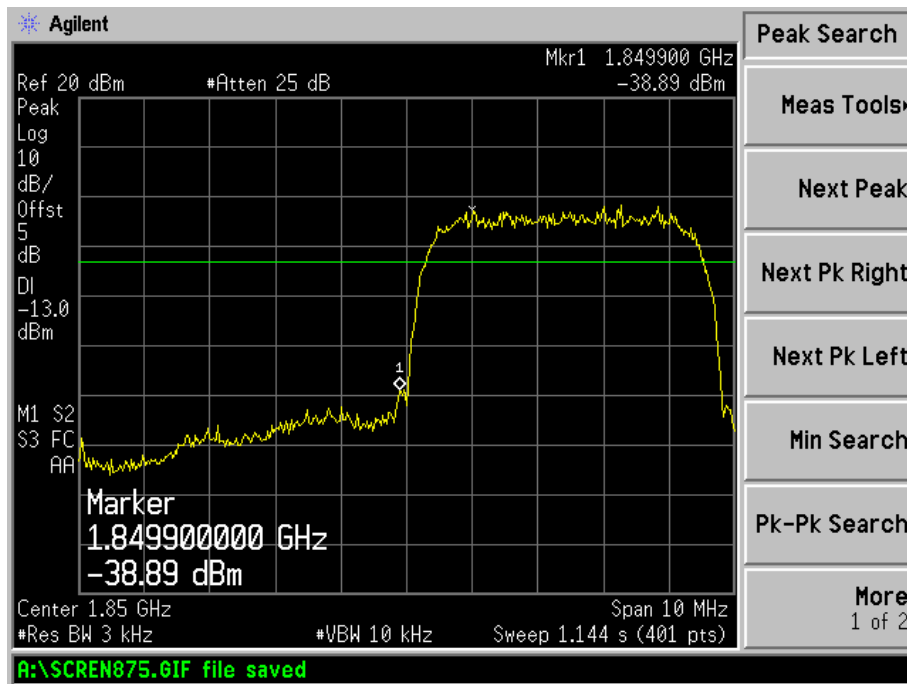



HSDPA High Band Spurious Emission

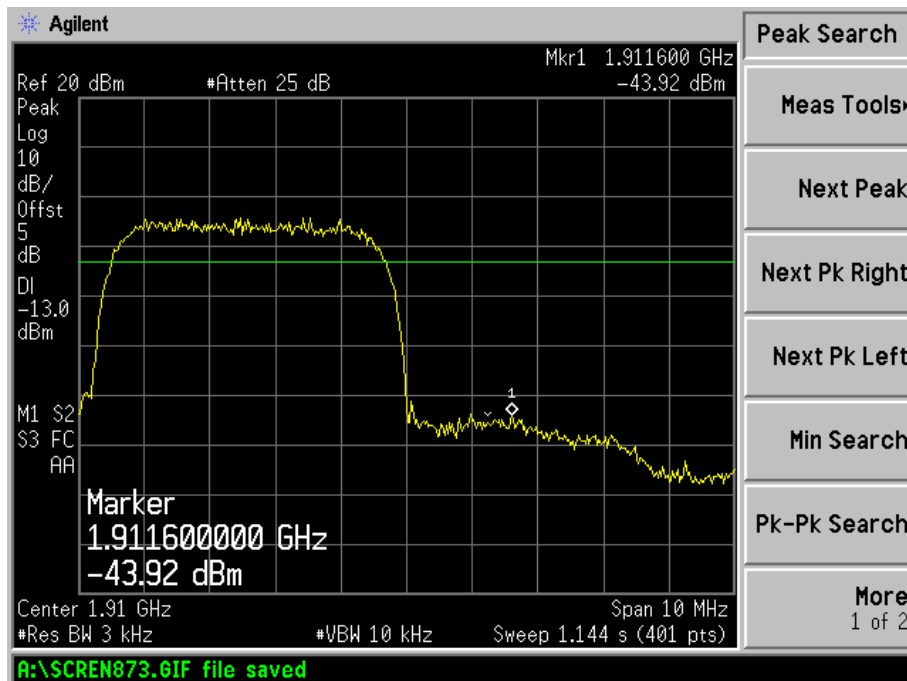



HSUPA Low Channel

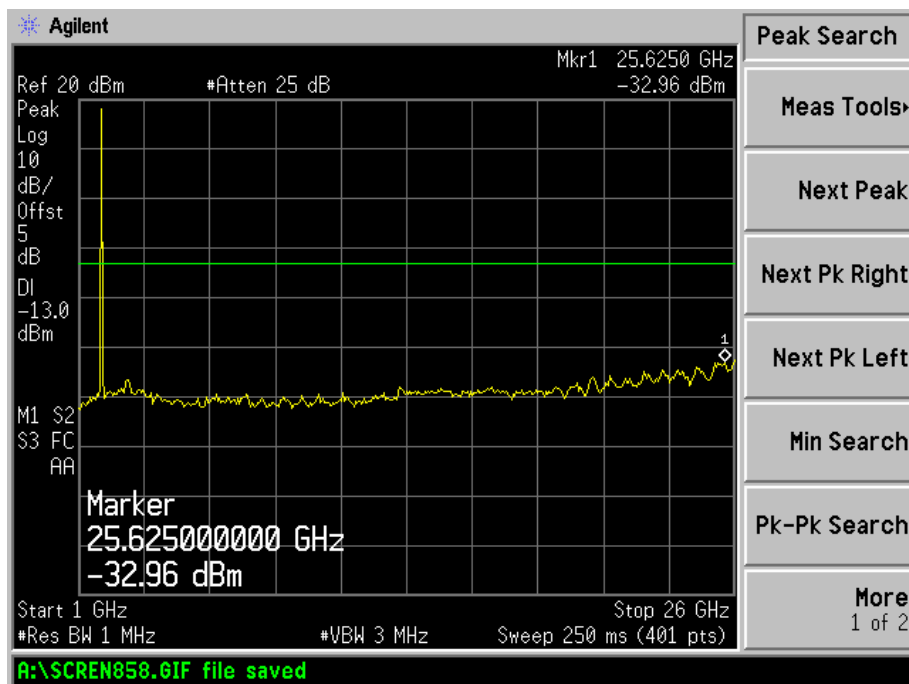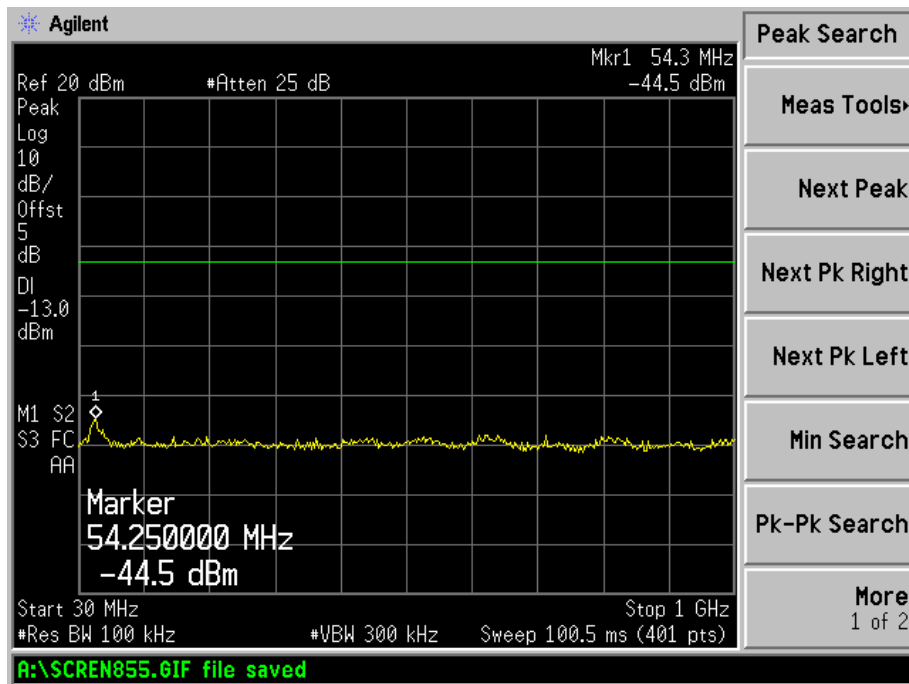


HSUPA Middle Channel

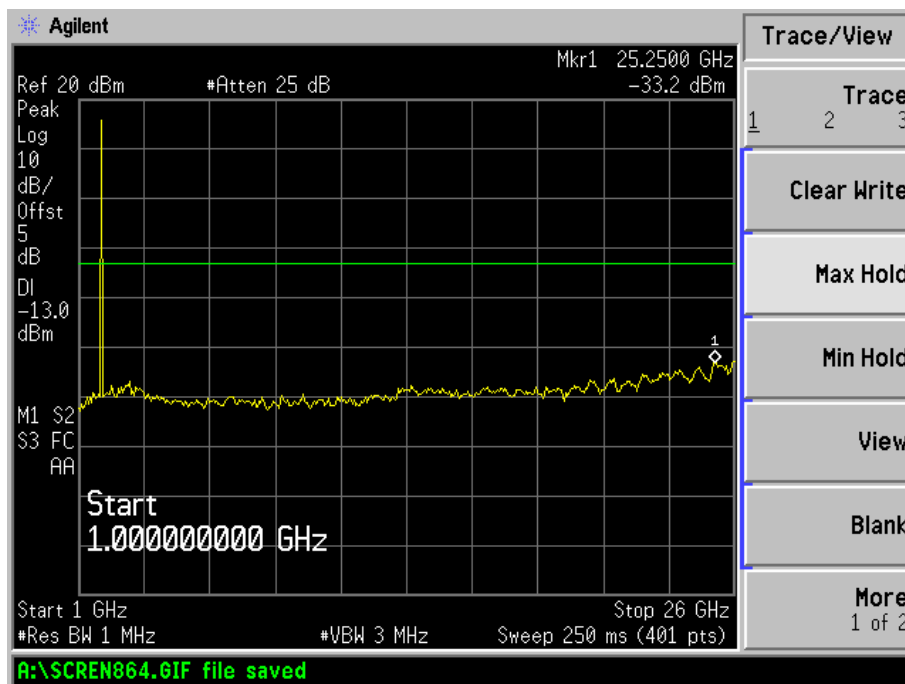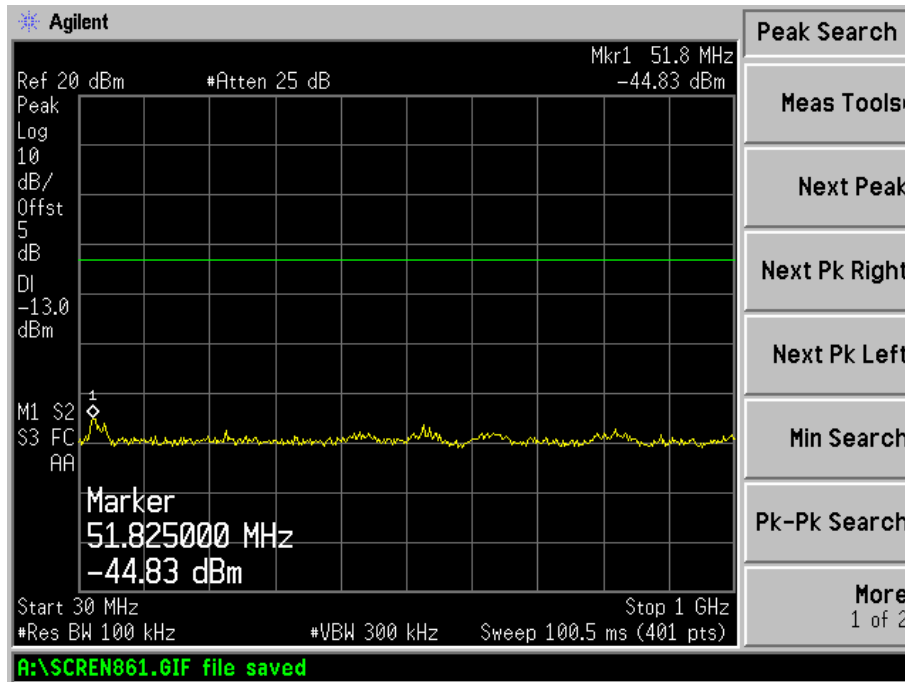


HSUPA High Channel

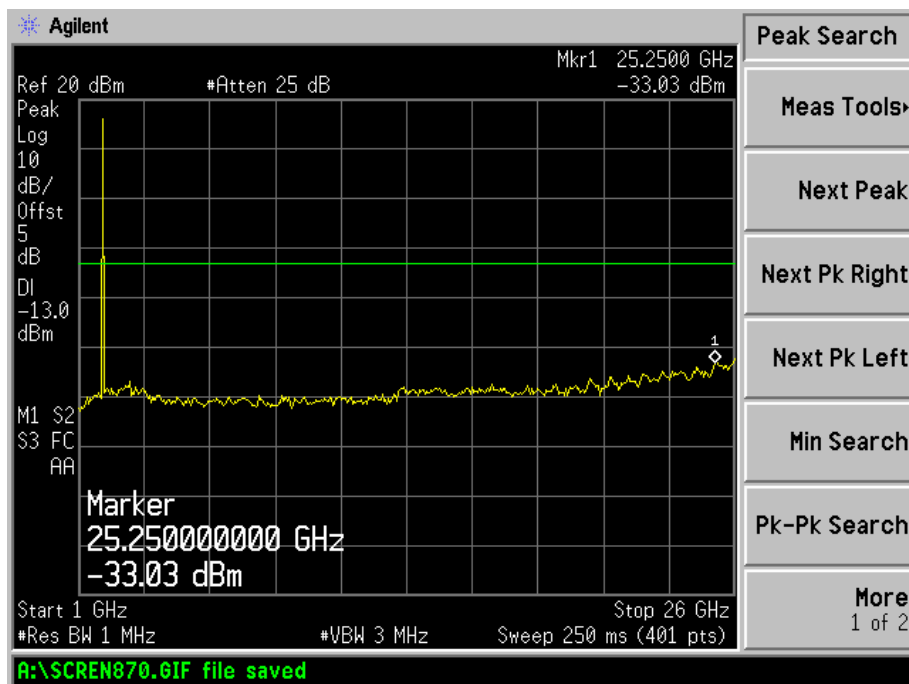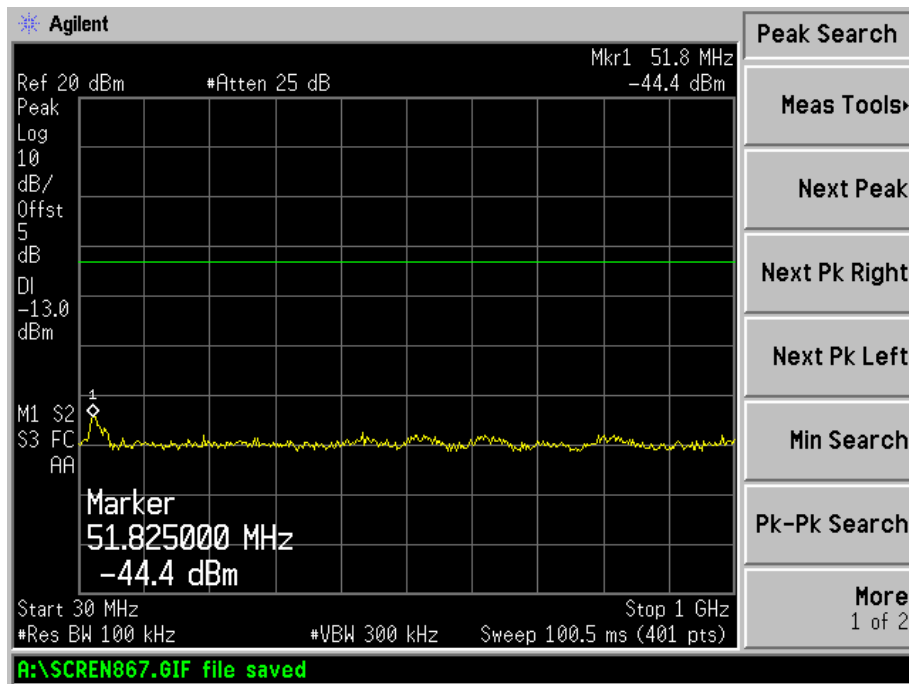

HSUPA Low Band Spurious Emission

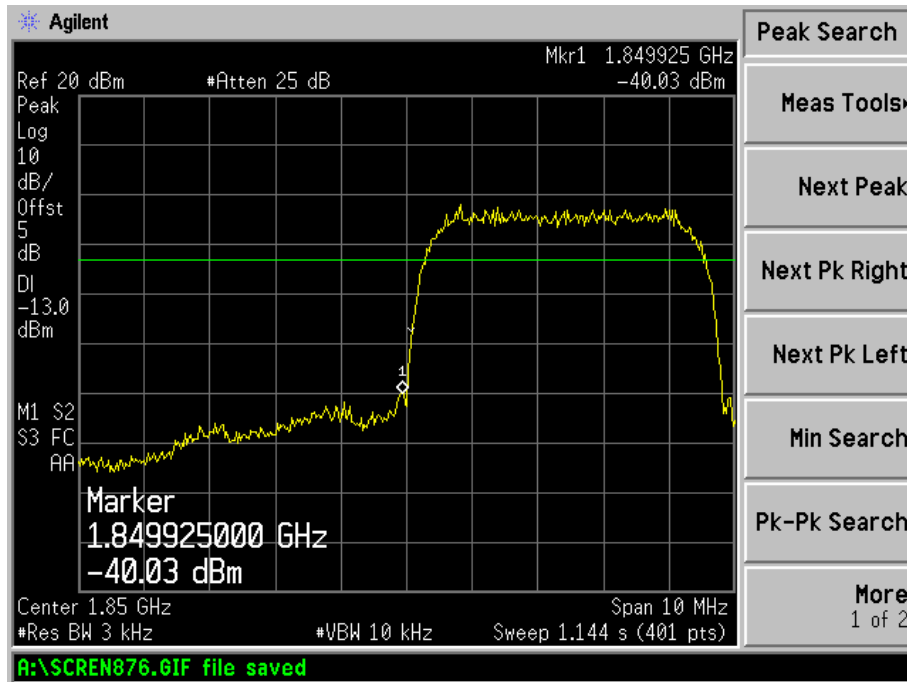

HSUPA High Band Spurious Emission

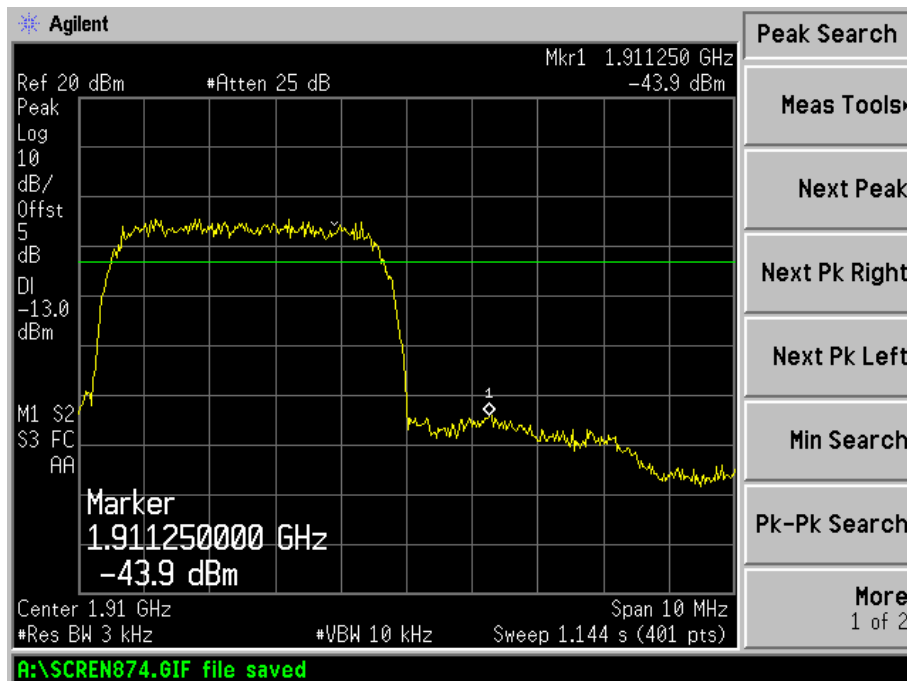

8. Spurious Radiated Emissions

8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

8.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.4 Summary of Test Results/Plots


According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Spurious Emission From 30MHz to 1GHz


For Cellular Band_ GSM850 Mode

Horizontal:

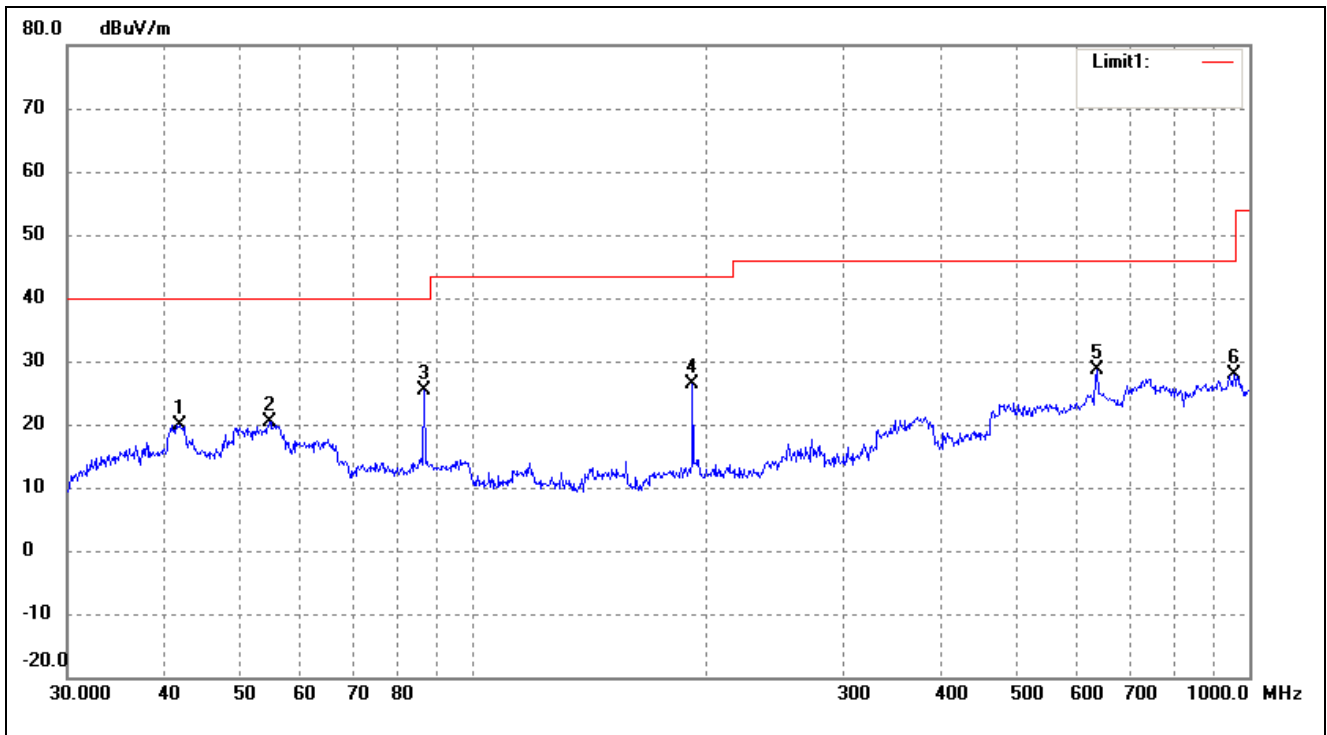

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	41.8596	27.63	-7.79	19.84	40.00	-20.16	ERP
2	54.6429	29.33	-8.91	20.42	40.00	-19.58	ERP
3	86.5029	38.03	-12.62	25.41	40.00	-14.59	ERP
4	191.7450	36.04	-9.77	26.27	43.50	-17.23	ERP
5	636.1340	27.82	0.82	28.64	46.00	-17.36	ERP
6	955.4381	24.09	3.73	27.82	46.00	-18.18	ERP


Vertical:

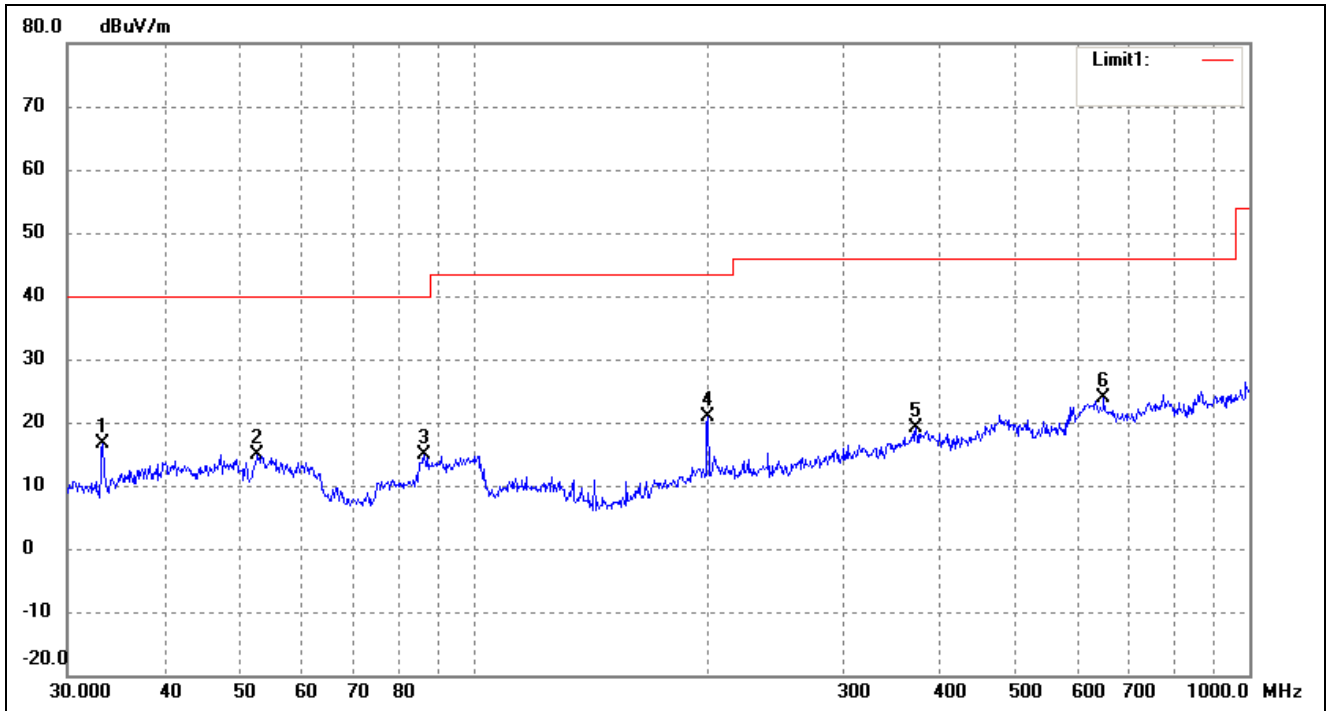

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.3279	26.05	-9.46	16.59	40.00	-23.41	ERP
2	52.7600	23.50	-8.67	14.83	40.00	-25.17	ERP
3	86.5029	27.49	-12.62	14.87	40.00	-25.13	ERP
4	200.6881	29.57	-8.66	20.91	43.50	-22.59	ERP
5	372.0045	21.81	-2.56	19.25	46.00	-26.75	ERP
6	649.6597	23.35	0.52	23.87	46.00	-22.13	ERP


For Cellular Band_ GSM1900 Mode

Horizontal:

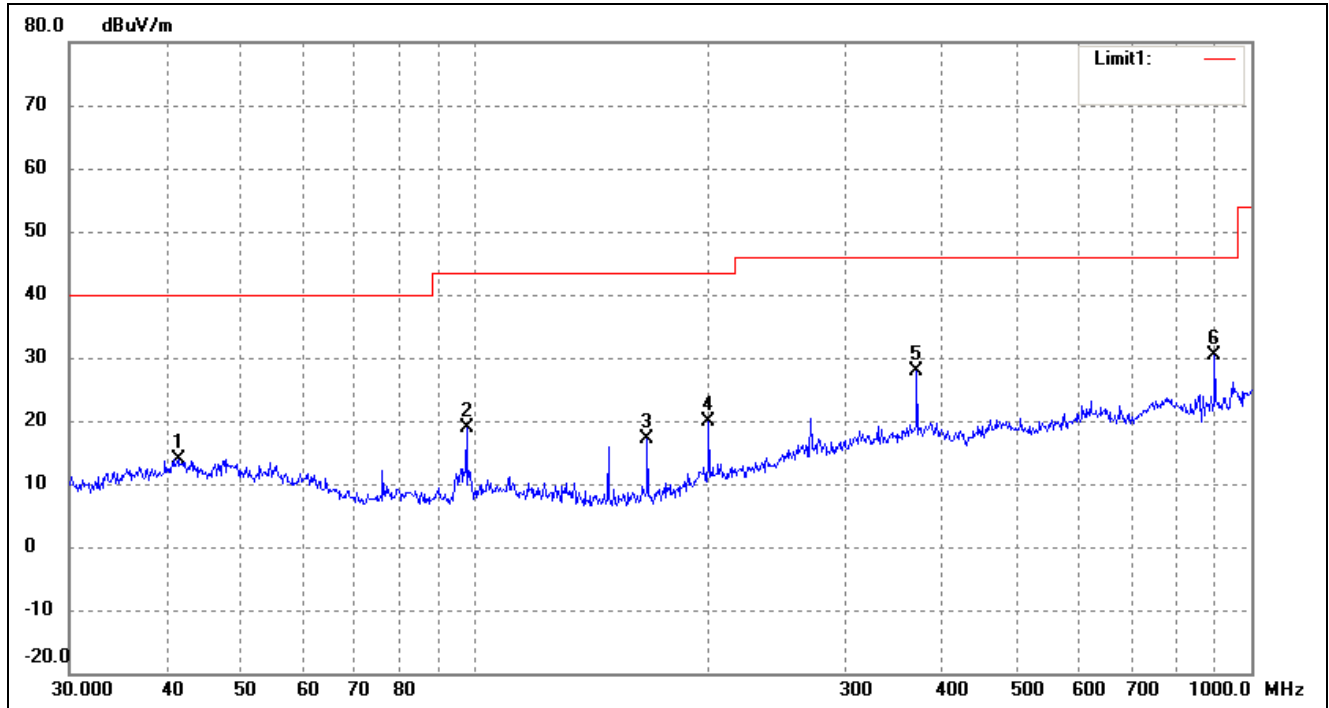

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	41.4215	21.73	-7.76	13.97	40.00	-26.03	ERP
2	97.4560	30.19	-11.42	18.77	43.50	-24.73	ERP
3	166.6514	29.11	-11.97	17.14	43.50	-26.36	ERP
4	199.9856	28.43	-8.65	19.78	43.50	-23.72	ERP
5	370.7023	30.55	-2.63	27.92	46.00	-18.08	ERP
6	896.9965	27.27	3.15	30.42	46.00	-15.58	ERP

Vertical:

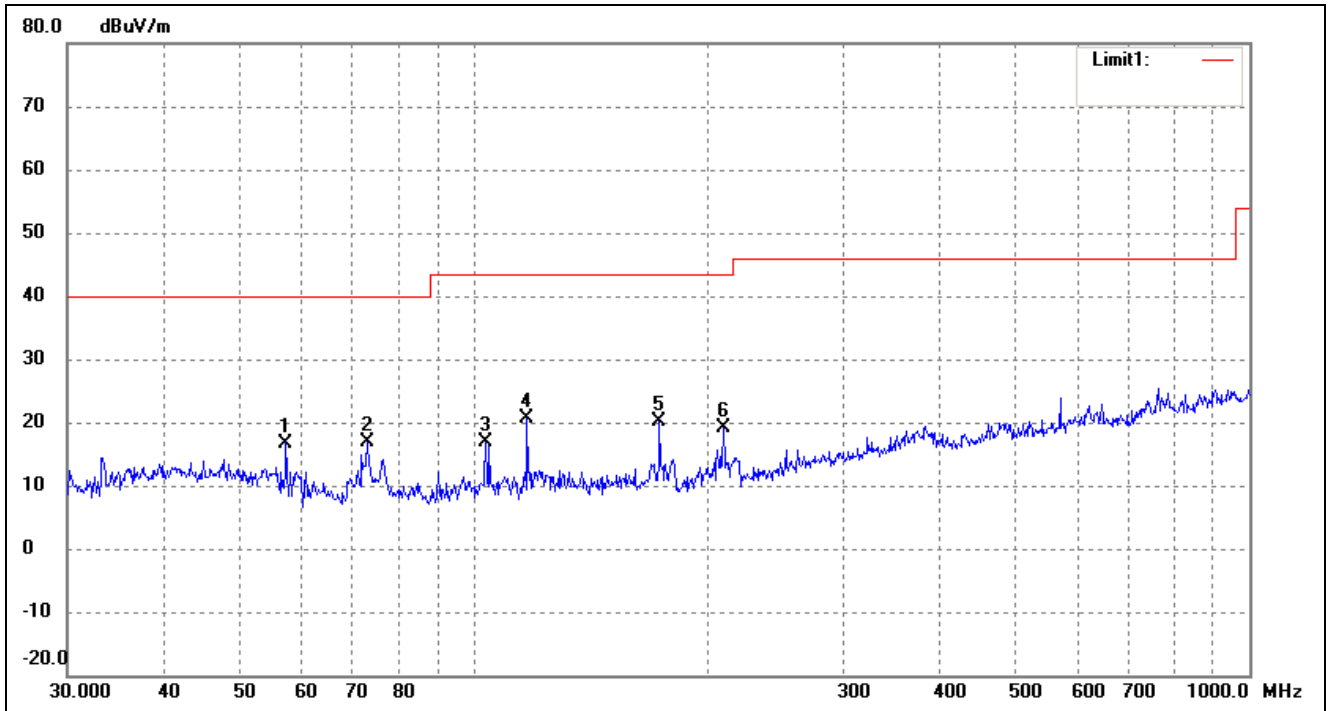


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	57.3923	26.00	-9.25	16.75	40.00	-23.25	ERP
2	73.1025	29.43	-12.57	16.86	40.00	-23.14	ERP
3	103.8055	27.78	-11.00	16.78	43.50	-26.72	ERP
4	117.3603	31.98	-11.37	20.61	43.50	-22.89	ERP
5	173.8135	31.68	-11.63	20.05	43.50	-23.45	ERP
6	210.0482	27.89	-8.74	19.15	43.50	-24.35	ERP

Note: Margin= (Reading+ Correct)- Limit


For band 5 Mode

Horizontal:

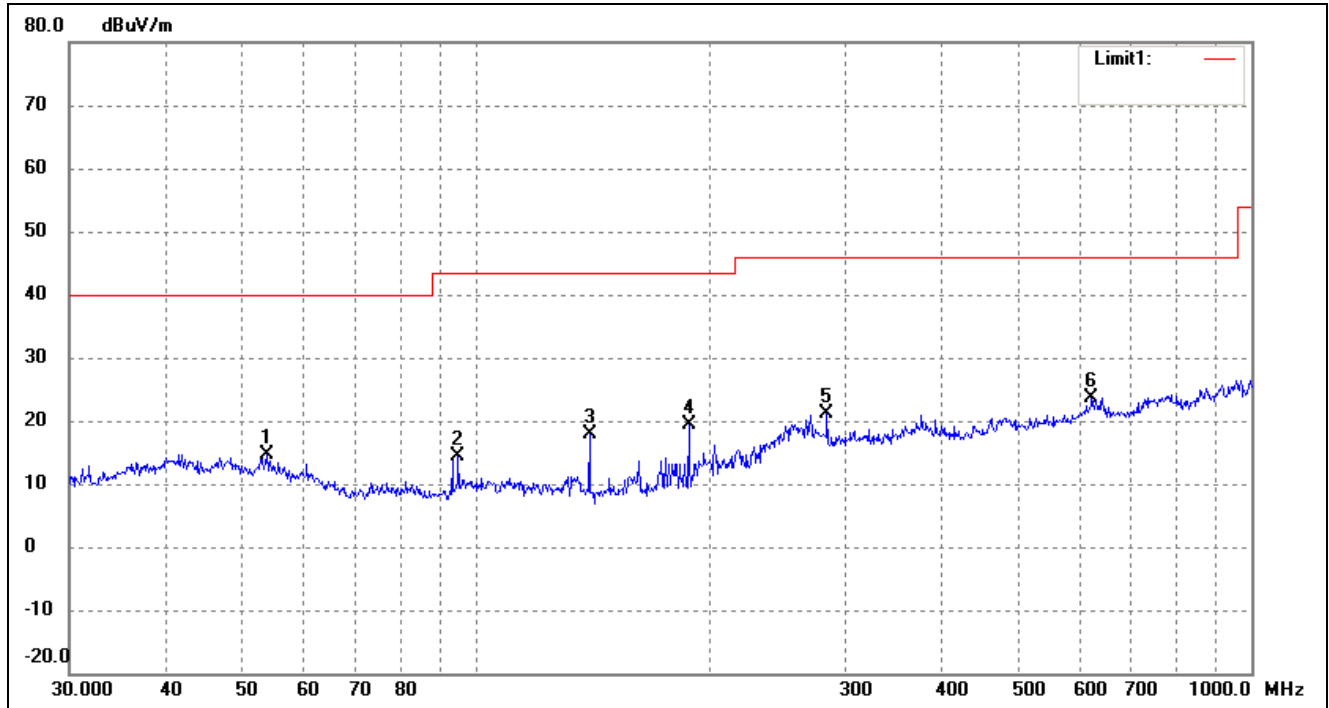

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	Factor(dB)	(dBm)	(dBm)	(dB)	
1	53.8818	23.40	-8.81	14.59	40.00	-25.41	ERP
2	95.0930	26.35	-11.90	14.45	43.50	-29.05	ERP
3	140.3421	30.32	-12.55	17.77	43.50	-25.73	ERP
4	188.4125	29.62	-10.22	19.40	43.50	-24.10	ERP
5	283.9792	27.03	-6.01	21.02	46.00	-24.98	ERP
6	622.8900	22.37	1.16	23.53	46.00	-22.47	ERP


Vertical:

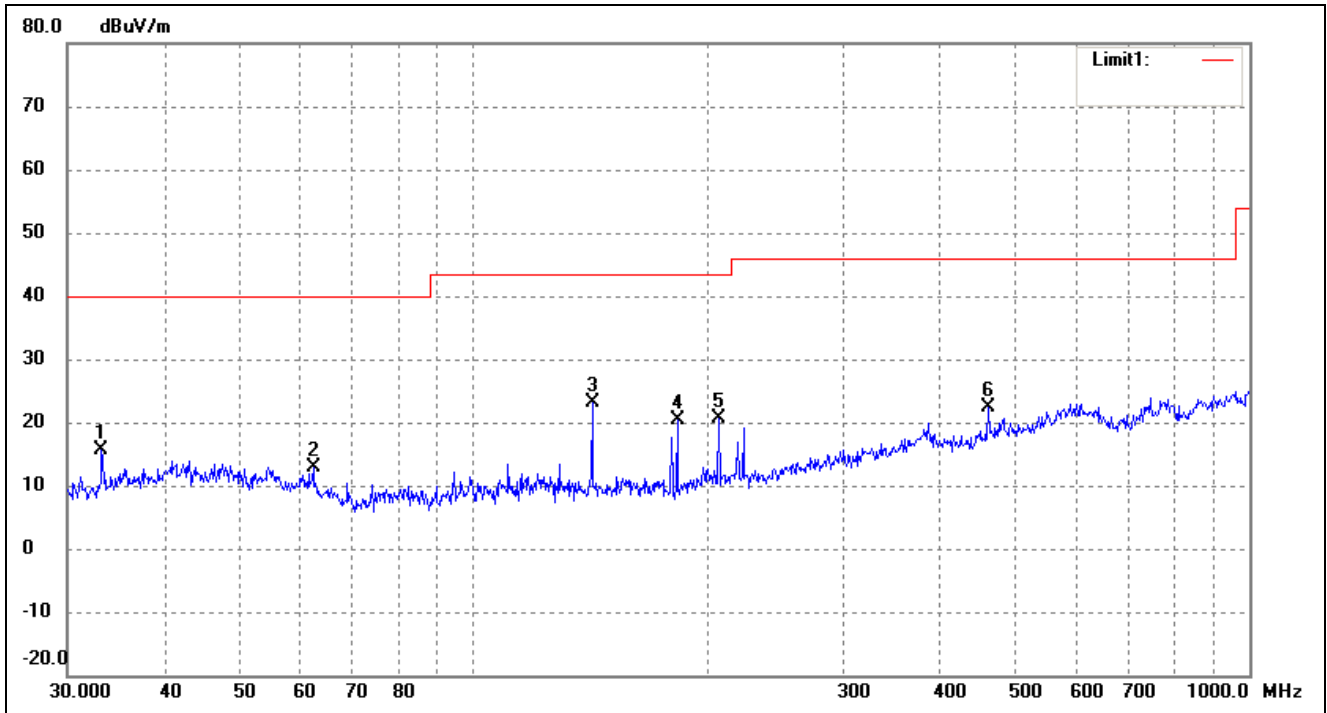

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.2112	25.07	-9.50	15.57	40.00	-24.43	ERP
2	62.2128	23.22	-10.30	12.92	40.00	-27.08	ERP
3	142.3244	35.74	-12.53	23.21	43.50	-20.29	ERP
4	183.2005	31.20	-10.93	20.27	43.50	-23.23	ERP
5	207.1226	29.29	-8.72	20.57	43.50	-22.93	ERP
6	460.7271	25.04	-2.63	22.41	46.00	-23.59	ERP


For band 2 Mode

Horizontal:

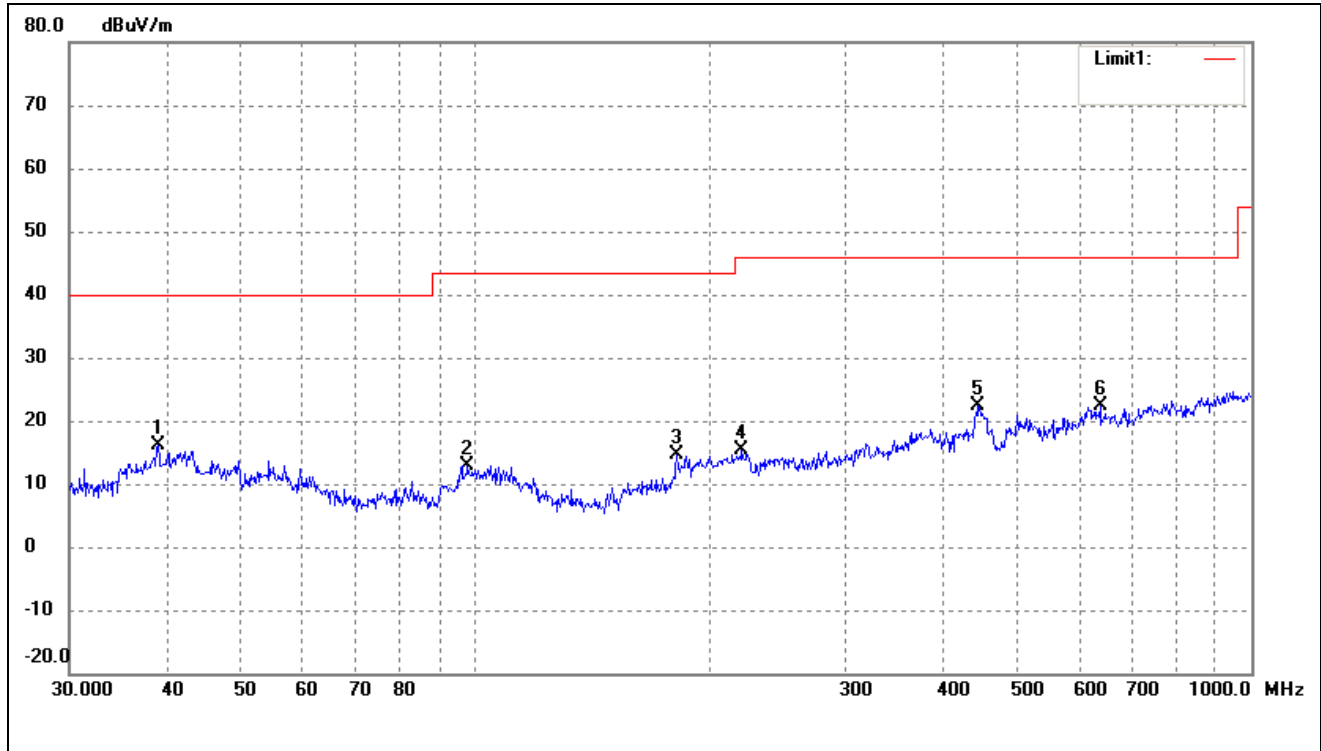

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	
1	39.0245	24.02	-7.93	16.09	40.00	-23.91	ERP
2	97.7983	24.32	-11.35	12.97	43.50	-30.53	ERP
3	181.9202	25.65	-11.10	14.55	43.50	-28.95	ERP
4	220.6171	24.29	-8.83	15.46	46.00	-30.54	ERP
5	444.8514	25.29	-2.88	22.41	46.00	-23.59	ERP
6	638.3686	21.62	0.76	22.38	46.00	-23.62	ERP

Vertical:

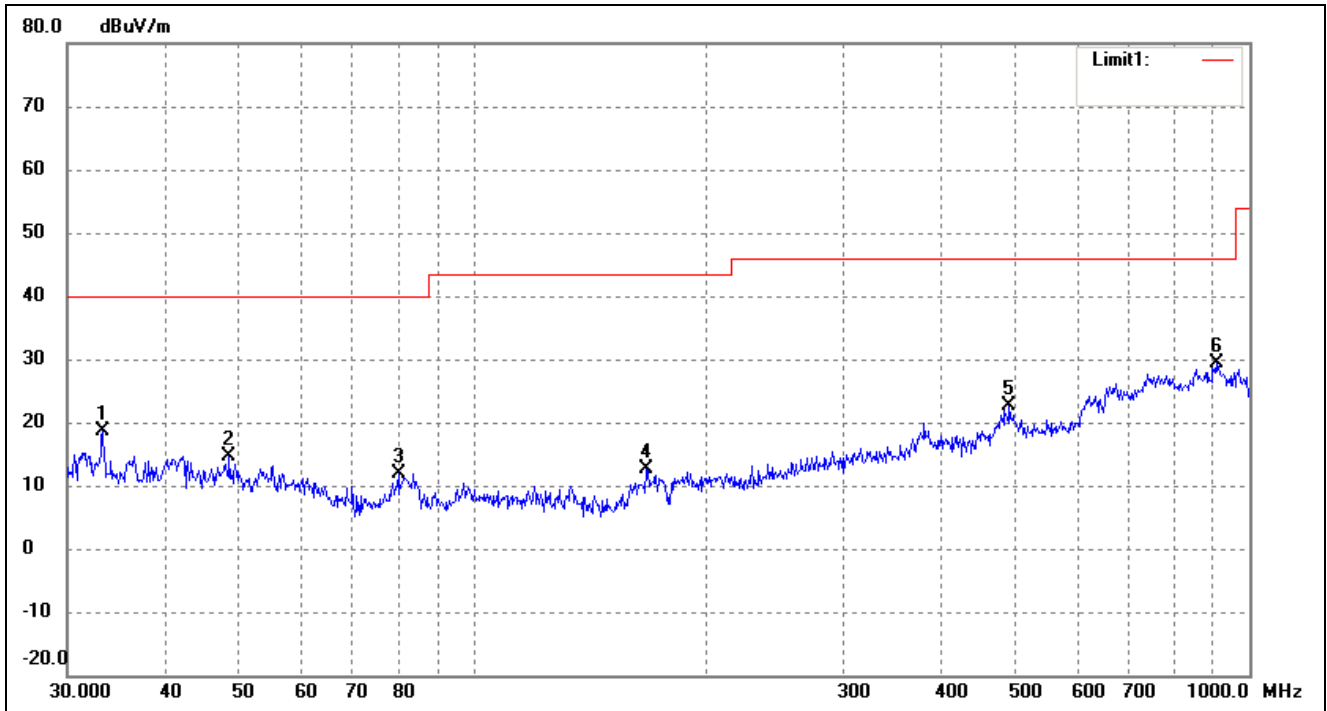

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	33.3279	27.97	-9.46	18.51	40.00	-21.49	ERP
2	48.5016	22.87	-8.22	14.65	40.00	-25.35	ERP
3	80.0806	23.81	-12.00	11.81	40.00	-28.19	ERP
4	167.2368	24.53	-11.94	12.59	43.50	-30.91	ERP
5	490.7447	24.25	-1.66	22.59	46.00	-23.41	ERP
6	906.4824	26.10	3.31	29.41	46.00	-16.59	ERP

Note: Margin= (Reading+ Correct)- Limit

Spurious Emissions Above 1GHz
For Cellular Band_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-47.69	4.94	-42.75	-13	-29.75	H
2472.6	-46.8	8.46	-38.34	-13	-25.34	H
1648.4	-48.75	4.94	-43.81	-13	-30.81	V
2472.6	-47.67	8.46	-39.21	-13	-26.21	V
Middle Channel (836.6MHz)						
1673.2	-49.75	5.11	-44.64	-13	-31.64	H
2509.8	-46.53	8.54	-37.99	-13	-24.99	H
1673.2	-46.66	5.11	-41.55	-13	-28.55	V
2509.8	-48.11	8.54	-39.57	-13	-26.57	V
High Channel (848.8MHz)						
1697.6	-37.41	5.29	-32.12	-13	-19.12	H
2546.4	-37.46	8.59	-28.87	-13	-15.87	H
1697.6	-38.28	5.29	-32.99	-13	-19.99	V
2546.4	-37.36	8.59	-28.77	-13	-15.77	V

For PCS Band_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-46.41	10.54	-35.87	-13	-22.87	H
5550.6	-46.22	13.37	-32.85	-13	-19.85	H
3700.4	-49.66	10.54	-39.12	-13	-26.12	V
5550.6	-46.03	13.37	-32.66	-13	-19.66	V
Middle Channel (1880MHz)						
3760.0	-46.73	10.64	-36.09	-13	-23.09	H
5640.0	-46.2	13.54	-32.66	-13	-19.66	H
3760.0	-48.87	10.64	-38.23	-13	-25.23	V
5640.0	-47.37	13.54	-33.83	-13	-20.83	V
High Channel (1909.8MHz)						
3819.6	-49.04	10.74	-38.3	-13	-25.3	H
5729.4	-47.19	13.71	-33.48	-13	-20.48	H
3819.6	-47.87	10.74	-37.13	-13	-24.13	V
5729.4	-47.19	13.71	-33.48	-13	-20.48	V

For Band 5 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-38.69	4.94	-33.75	-13	-20.75	H
2479.2	-36.59	8.46	-28.13	-13	-15.13	H
1652.8	-38.74	4.94	-33.8	-13	-20.8	V
2479.2	-38.29	8.46	-29.83	-13	-16.83	V
Middle Channel (836.6MHz)						
1672.8	-47.68	5.11	-42.57	-13	-29.57	H
2509.2	-47.28	8.54	-38.74	-13	-25.74	H
1672.8	-46.15	5.11	-41.04	-13	-28.04	V
2509.2	-46.61	8.54	-38.07	-13	-25.07	V
High Channel (846.6MHz)						
1693.2	-38.23	5.29	-32.94	-13	-19.94	H
2539.8	-38.07	8.59	-29.48	-13	-16.48	H
1693.2	-39.66	5.29	-34.37	-13	-21.37	V
2539.8	-39.68	8.59	-31.09	-13	-18.09	V

For Band 2 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-37.73	10.17	-27.56	-13	-14.56	H
5557.2	-37.67	14.69	-22.98	-13	-9.98	H
3704.8	-37.5	10.17	-27.33	-13	-14.33	V
5557.2	-36.23	14.69	-21.54	-13	-8.54	V
Middle Channel (1880MHz)						
3760.8	-39.5	10.26	-29.24	-13	-16.24	H
5640.0	-37.78	14.78	-23	-13	-10	H
3760.8	-37.66	10.26	-27.4	-13	-14.4	V
5640.0	-39.79	14.78	-25.01	-13	-12.01	V
High Channel (1907.6MHz)						
3815.2	-37.22	10.59	-26.63	-13	-13.63	H
5722.8	-36.52	15.03	-21.49	-13	-8.49	H
3815.2	-36.55	10.59	-25.96	-13	-12.96	V
5722.8	-39.8	15.03	-24.77	-13	-11.77	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Testing is carried out with frequency rang 9kHz to 20GHz, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so the data is not display.

9. Frequency Stability

9.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

Temperature:	Supply Voltage
20°C	DC 3.3-4.2V declared by manufacturer
-30°C to +50°C	Normal

9.3 Environmental Conditions

Temperature:	20°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

For Cellular Band GSM Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	43	0.0514
40	3.8	53	0.0634
30	3.8	35	0.0418
20	3.8	46	0.0550
10	3.8	37	0.0442
0	3.8	34	0.0406
-10	3.8	51	0.0610
-20	3.8	28	0.0335
-30	3.8	44	0.0526

For PCS Band GSM Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	63	0.0335
40	3.8	46	0.0245
30	3.8	62	0.0330
20	3.8	59	0.0314
10	3.8	56	0.0298
0	3.8	36	0.0191
-10	3.8	61	0.0324
-20	3.8	39	0.0207
-30	3.8	57	0.0303

For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	46	0.0550
40	3.8	54	0.0645
30	3.8	36	0.0430
20	3.8	42	0.0502
10	3.8	48	0.0574
0	3.8	49	0.0586
-10	3.8	34	0.0406
-20	3.8	42	0.0502
-30	3.8	43	0.0514

For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	61	0.0324
40	3.8	40	0.0213
30	3.8	41	0.0218
20	3.8	46	0.0245
10	3.8	55	0.0293
0	3.8	55	0.0293
-10	3.8	39	0.0207
-20	3.8	53	0.0282
-30	3.8	61	0.0324

For Cellular Band EDGE Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	31	0.0371
40	3.8	54	0.0645
30	3.8	27	0.0323
20	3.8	30	0.0359
10	3.8	36	0.0430
0	3.8	34	0.0406
-10	3.8	40	0.0478
-20	3.8	34	0.0406
-30	3.8	36	0.0430

For PCS Band EDGE Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	36	0.0191
40	3.8	59	0.0314
30	3.8	40	0.0213
20	3.8	50	0.0266
10	3.8	52	0.0277
0	3.8	51	0.0271
-10	3.8	57	0.0303
-20	3.8	49	0.0261
-30	3.8	59	0.0314

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	35	0.0418
40	3.8	53	0.0634
30	3.8	40	0.0478
20	3.8	39	0.0466
10	3.8	49	0.0586
0	3.8	41	0.0490
-10	3.8	63	0.0753
-20	3.8	45	0.0538
-30	3.8	60	0.0717

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	51	0.0271
40	3.8	50	0.0266
30	3.8	46	0.0245
20	3.8	61	0.0324
10	3.8	42	0.0223
0	3.8	55	0.0293
-10	3.8	50	0.0266
-20	3.8	49	0.0261
-30	3.8	44	0.0234

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	46	0.0550
40	3.8	37	0.0442
30	3.8	40	0.0478
20	3.8	59	0.0705
10	3.8	58	0.0693
0	3.8	59	0.0705
-10	3.8	49	0.0586
-20	3.8	52	0.0622
-30	3.8	40	0.0478

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	55	0.0293
40	3.8	59	0.0314
30	3.8	50	0.0266
20	3.8	64	0.0340
10	3.8	65	0.0346
0	3.8	49	0.0261
-10	3.8	39	0.0207
-20	3.8	35	0.0186
-30	3.8	55	0.0293

For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	39	0.0466
40	3.8	40	0.0478
30	3.8	61	0.0729
20	3.8	53	0.0634
10	3.8	39	0.0466
0	3.8	52	0.0622
-10	3.8	41	0.0490
-20	3.8	41	0.0490
-30	3.8	63	0.0753

For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.8	65	0.0346
40	3.8	41	0.0218
30	3.8	46	0.0245
20	3.8	60	0.0319
10	3.8	40	0.0213
0	3.8	57	0.0303
-10	3.8	61	0.0324
-20	3.8	53	0.0282
-30	3.8	50	0.0266

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	50	0.0598
	3.8	46	0.0550
	4.3	38	0.0454
Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	58	0.0309
	3.8	59	0.0314
	4.3	42	0.0223
Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	65	0.0777
	3.8	42	0.0502
	4.3	39	0.0466
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	62	0.0330
	3.8	46	0.0245
	4.3	51	0.0271

Reference Frequency(Middle Channel): EDGE 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	61	0.0729
	3.8	30	0.0359
	4.2	37	0.0442
Reference Frequency(Middle Channel): EDGE 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	44	0.0234
	3.8	50	0.0266
	4.3	60	0.0319
Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	44	0.0526
	3.8	39	0.0466
	4.3	45	0.0538
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	48	0.0255
	3.8	61	0.0324
	4.3	39	0.0207
Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	48	0.0574
	3.8	59	0.0705
	4.3	64	0.0765

Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	47	0.0250
	3.8	64	0.0340
	4.3	52	0.0277
Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	63	0.0753
	3.8	53	0.0634
	4.3	52	0.0622
Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	35	0.0186
	3.8	60	0.0319
	4.3	60	0.0319

***** END OF REPORT *****