



TEST REPORT

REPORT NUMBER : AKL-100247

APPLICANT : TOSHIBA CORPORATION
PRODUCT SAFETY GROUP, TECHNOLOGY
& QUALITY MANAGEMENT DIVISION,
DIGITAL MEDIA NETWORK COMPANY

MODEL NUMBER : SD-M1502

FCC ID : CJ6AT00-046

REGULATION : FCC Part15B Class B
Canada ICES-003 Class B

Conducted Emission Test
Radiated Emission Test



NVLAP accreditation is valid only FCC
Part15 (Digital Devices), CISPR22, and
AS/NZS 3548 test reports.

NVLAP accreditation does not cover the
Canadian standard ICES-003.

Akzo Kashima Limited
EMC Division
Kashima Site

1, Oaza Sunayama, Hasaki-machi, Kashima-gun
Ibaraki-ken, 314-0255 Japan
Tel.: +81 479 40 1097 Fax.: +81 479 46 1788

TABLE OF CONTENTS

	Page
ABBREVIATIONS.....	3
SECTION 1. TEST CERTIFICATION	4
SECTION 2. CONCLUSION.....	5
SECTION 3. EQUIPMENT UNDER TEST.....	6
SECTION 4. SUPPORT EQUIPMENT USED.....	7
SECTION 5. CABLE (S) USED	8
SECTION 6. CONSTRUCTION OF EQUIPMENT	9
SECTION 7. OPERATING CONDITIONS	10
SECTION 8. TEST PROCEDURE(S)	11
SECTION 9. EVALUATION OF TEST RESULTS.....	16
SECTION 10. PHOTOGRAPHS OF MAXIMUM EMISSION SET-UP	21
SECTION 11. INSTRUMENTS USED FOR FINAL TEST.....	22
SECTION 12. MEASUREMENT UNCERTAINTY	23
SECTION 13. VALIDITY OF TEST REPORT.....	24
SECTION 14. DESCRIPTION OF TEST LABORATORY.....	25

ABBREVIATIONS

LISN = Line Impedance Stabilization Network

AMN = Artificial Mains Network

ANT = Antenna

BBA = Broad-band Antenna

DIP = Dipole Antenna

AMP = Amplifier

ATT = Attenuator

EUT = Equipment Under Test

Q-P = Quasi-peak

AVG = Average

SECTION 1. TEST CERTIFICATION**APPLICANT INFORMATION**

Company : TOSHIBA CORPORATION
PRODUCT SAFETY GROUP, TECHNOLOGY & QUALITY
MANAGEMENT DIVISION,
DIGITAL MEDIA NETWORK COMPANY
Address : 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 105-8001 Japan
Telephone number : +81 3 3457 2565
Fax number : +81 3 5444 9405

DESCRIPTION OF TEST ITEM

Kind of equipment : DVD-ROM Drive
Condition of equipment : Pre-Production
Type : Table-Top (Built-in type)
Trademark : TOSHIBA
FCC ID : CJ6AT00-046
Model number : SD-M1502
Serial number : 2S2-M100

TEST PERFORMED



Location : Kashima No. 1 Test Site (FCC File No. : 31040/SIT)
EUT received : July 27, 2000
Test started : July 28, 2000
Test completed : July 28, 2000
Purpose of test : FCC Docket 87-389
and Canadian Interference-Causing Equipment Regulations
Regulation : FCC Part15B Class B and Canada ICES-003 Class B
Unintentional Radiators
Test setup : ANSI C63.4-1992

Report file number : AKL-100247

Report issue date : July 31, 2000

Test engineer : Naoki Sagawa

Report approved by : Junichi Okada
[Site Manager]

This equipment complies with above standard or regulation under the test condition or test configuration shown on this test report.

SECTION 2. CONCLUSION

This test report clearly shows that the EUT is in compliance with the FCC Part 15B Class B specification and the Canada ICES-003 Class B specification.

Traceability to national standards of test result is achieved by means of calibration traceability to national standards.

The minimum margins to the limits are as follows:

Conduction measurement

Random Access Data Read at DVD-ROM Disc mode	15.1 dB	at	11.1826 MHz
--	---------	----	-------------

Radiation measurement

Random Access Data Read at DVD-ROM Disc mode	4.2 dB	at	459.66 MHz
--	--------	----	------------

Note : See Section 9 for details.

SECTION 3. EQUIPMENT UNDER TEST

The equipment under test (EUT) consisted of the following equipment.
Indication in the following left side column corresponds to Section 6.

Symbol	Item	Model No.	Serial No.	FCC ID / DoC	Manufacturer	Remarks
A)	DVD-ROM Drive	SD-M1502	2S2-M100	CJ6AT00-046	TOSHIBA	

Power ratings of EUT : DC +5V / 0.9A(max)
DC +12V / 1.6A(max)

DoC : Device for Declaration of Conformity

3.1 Port(s)/Connector(s) :

Port name	Connector type	Connector pin	Remarks
IDE	ATAPI	40 pin	
AUDIO(ANALOG)	Mini Connector	4 pin	
AUDIO(DIGITAL)	Mini Connector	2 pin	

3.2 Oscillator(s)/Crystal(s) :

Oscillator	Operating frequency	Board name	Remarks
450.00 MHz	-	-	Pick-up Module, Highest frequency
66.00 MHz	-	Main Board	
33.86 MHz	-	Main Board	
22.58 MHz	-	Main Board	

SECTION 4. SUPPORT EQUIPMENT USED

The EUT was supported by the following equipment during the test.
Indication in the following left side column corresponds to Section 6.

Symbol	Item	Model No.	Serial No.	FCC ID / DoC	Manufacturer	Remarks
B)	Computer	DTPC-16	SG01172764	DoC	HEWLETT PACKARD	
C)	CRT Display	500-069EV	15025E032015	BEJCS592	Gateway2000	
D)	Keyboard	SK-2511A	M000403971	GYUR73SK	HEWLETT PACKARD	
E)	Mouse	M-S48a	LZA00905362	JNZ201213	HEWLETT PACKARD	
F)	Printer	C4608A	SG77G1F1QQ	B94C2164X	HEWLETT PACKARD	
G)	Infrared Adapter	ESI-9680	9096	IBU9680	Extended Systems	
H)	Stereo Headphone	LT-100	None	N.A.	HEWLETT PACKARD	
I)	Stereo Cassette Player	WM-MV1	I50720	N.A.	SONY	
J)	MIC	None	None	N.A.	N.A.	
K)	Game PAD	PK-GP101	8800147S	N.A.	NEC	
L)	AC Adapter	C2178A	None	N.A.	HEWLETT PACKARD	

DoC : Device was tested and authorized under a Declaration of Conformity to the applicable FCC rules.

SECTION 5. CABLE (S) USED

The following cable(s) was used for the test.

Indication number in the following left side column corresponds to Section 6.

Number	Name	Length	Shield	Connector
1)	Headphone cable	2.90 m	None	Plastic
2)	Printer cable	2.00 m	Yes	Plastic
3)	Network cable	1.07 m	None	Plastic
4)	Infrared Adapter cable	1.70 m	Yes	Metal
5)	Keyboard cable	1.75 m	Yes	Plastic
6)	CRT cable	1.86 m	Yes	Plastic
7)	Mouse cable	1.80 m	Yes	Plastic
8)	Stereo cable	1.65 m	None	Plastic
9)	MIC cable	2.18 m	Yes	Plastic
10)	Resistor cable	1.65 m	None	Plastic
11)	PAD cable	2.50 m	Yes	Plastic
12)	Power cord for Computer	2.30 m	None	
13)	Power cord for CRT Display	1.90 m	None	
14)	Power cord for Printer(DC)	1.85 m	None	
15)	Power cord for Printer(AC)	0.95 m	None	


Note :

- a. Two ferrite cores are permanently attached to CRT cable.
- b. One ferrite core is permanently attached to PAD cable.

SECTION 6. CONSTRUCTION OF EQUIPMENT

The construction of EUT during the test was as follows.

System configuration

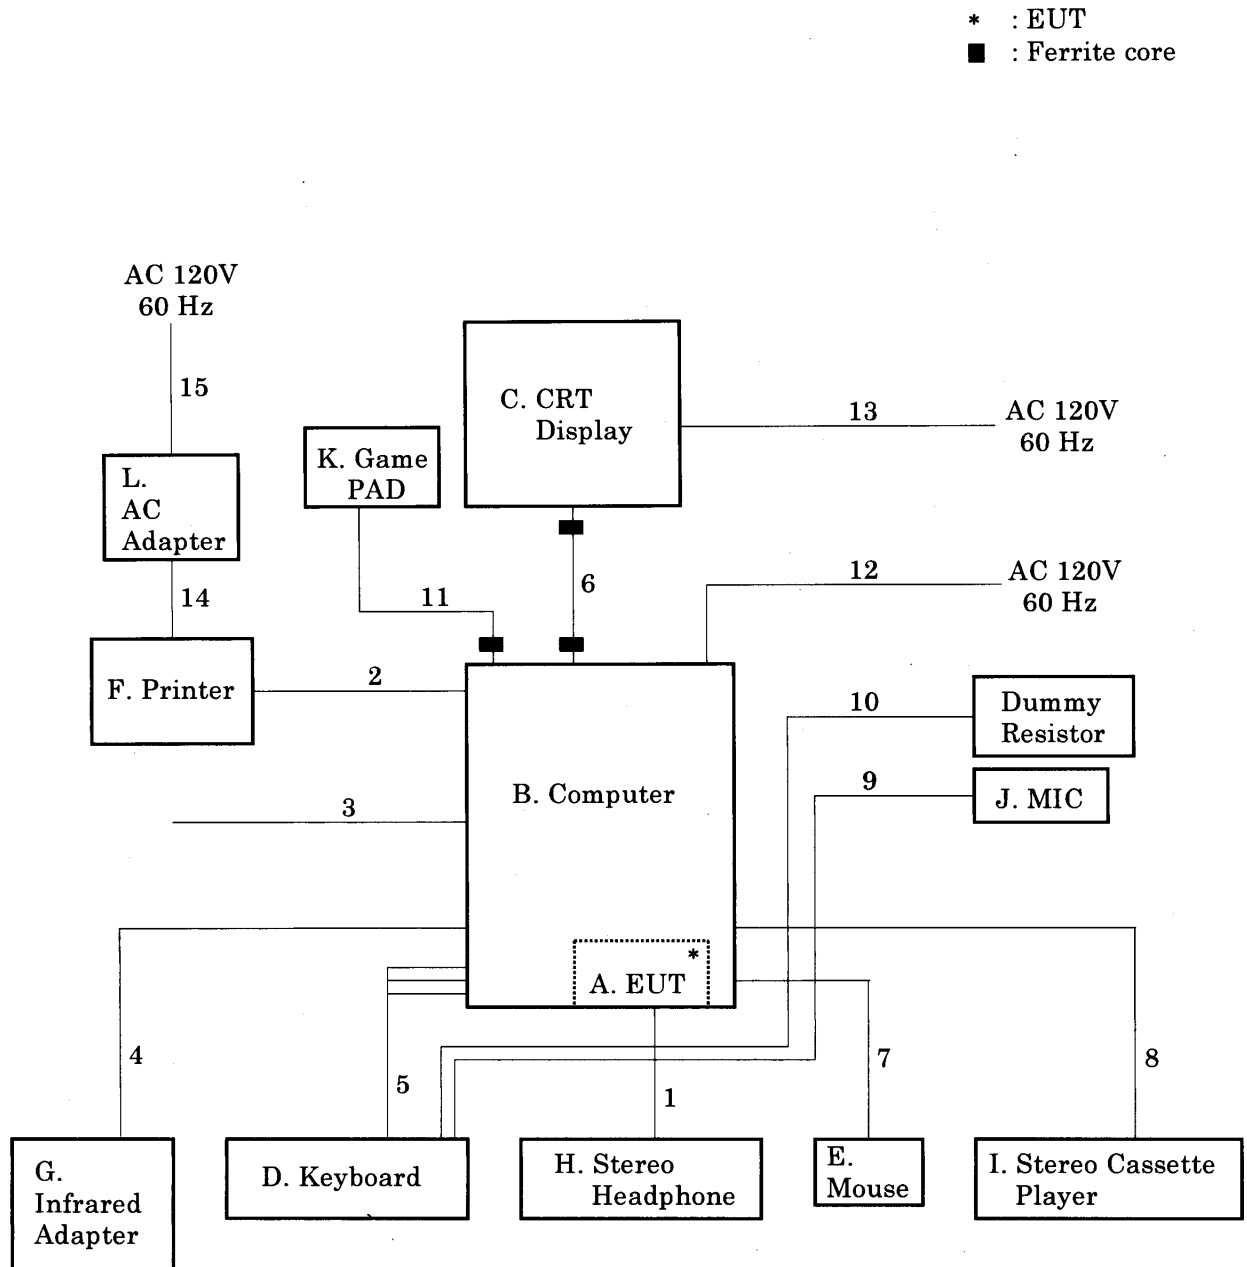

Symbols or numbers assigned to equipment or cables on this diagram are corresponded to the symbols or numbers assigned to equipment or cables on tables in Sections 3 to 5.

SECTION 7. OPERATING CONDITIONS


The EUT was operated under the following conditions during the test.

7.1 Operating condition

The test was carried out under Random Access Data Read at CD-ROM Disc mode and Random Access Data Read at DVD-ROM Disc mode.
EUT was examined in the operating conditions that had maximum emissions.

7.2 Operating flow [Random Access Data Read at CD-ROM Disc mode and Random Access Data Read at DVD-ROM Disc mode]

Following operations were performed continuously.



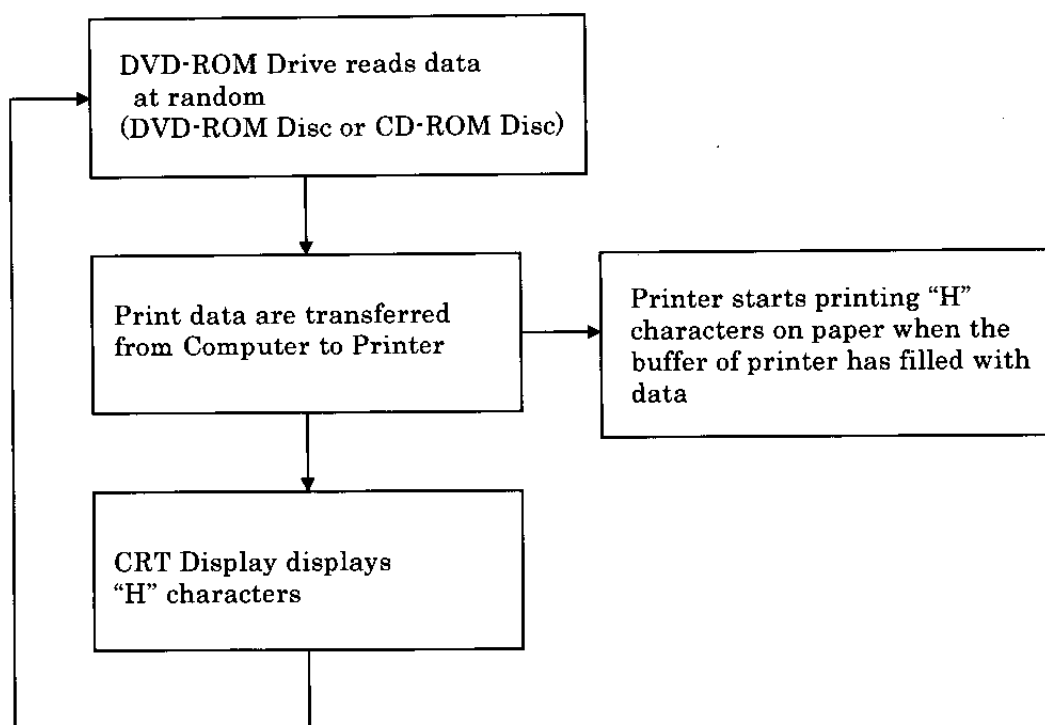


SECTION 8. TEST PROCEDURE(S)

Test was carried out under the following conditions.

Test was carried out with no deviations from standards and test methods.

Subject	Test procedure	Scanned frequency
Conducted Emission	Akzo Kashima Document number : 03-10-004	0.45 – 30 MHz
Radiated Emission	Akzo Kashima Document number : 03-10-003	30 – 2000 MHz

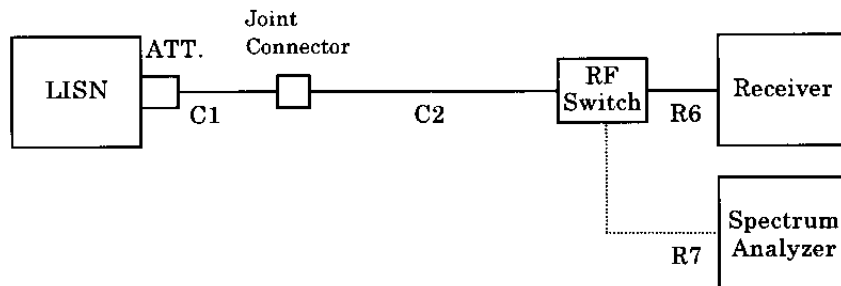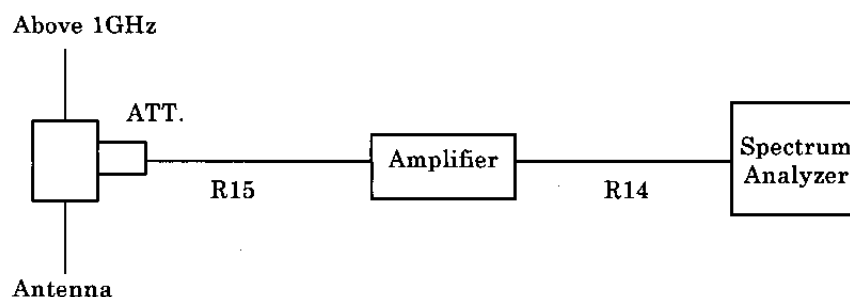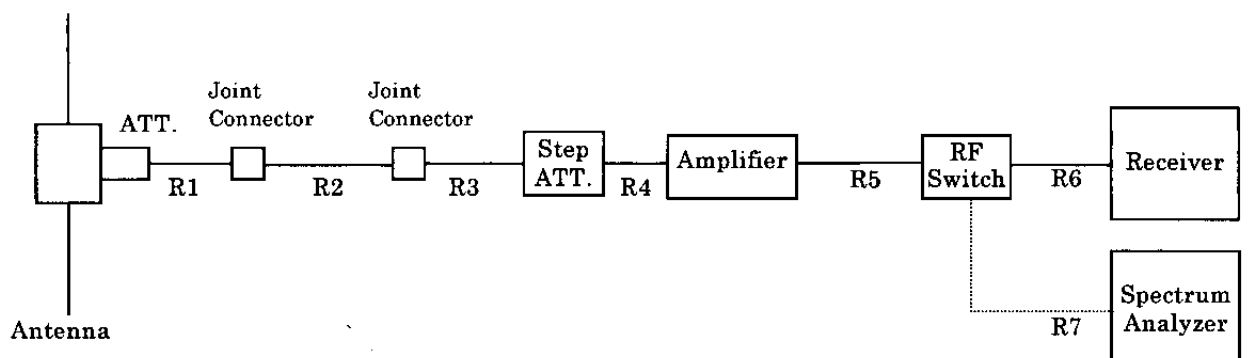Schema for the conducted measurement**Schema for the radiated measurement**

Summary ;

8.1 Conducted Emission Test

8.1.1 Equipment Setup

System configuration and Equipment setup are shown on Section 6 and Section 10.

8.1.1.1 Table-Top Equipment

EUT is placed on the wooden table raised 0.8meter above the metal ground plane.

8.1.1.2 Interconnecting Cables

Excess part of the interconnecting cables longer than 1 meter are bundled in the center. Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle 30 to 40 cm long, hanging approx, in the middle between ground plane and table.

8.1.1.3 AC Power Cord

AC power cord for EUT is connected to one LISN which is placed on the ground plane. The LISN is placed in 80 cm from the nearest part of EUT chassis.

The excess power cable is bundled in the center, or shortened to appropriate length. AC cables except from the EUT are connected second LISN.

8.1.2 Measuring Instruments

Measuring instruments list and calibration schedule are shown on Section 11, and brief description are as follows;

8.1.2.1 Spectrum Analyzer

The Spectrum analyzer is used for preliminary measurement.

8.1.2.2 EMI Test Receiver

The Quasi-peak detector (IF bandwidth : 10 kHz) and average detector (IF bandwidth : 10 kHz) built in test receiver is used for final measurement.

The test receiver is complied with the specification of the CISPR publication 16.

8.1.2.3 LISN

Two 50 μ H/50 Ω LISN are used. The chassis of the LISN is bonded to the ground plane by the copper blade.

One LISN is connected to the EUT. Other LISN (2nd LISN) is connected to the support equipment. The signal output of the 2nd LISN is terminated with a 50 Ω termination.

8.1.3 Test Procedure

8.1.3.1 Preliminary Measurement

EUT is tested on all operating conditions.

The spectrum analyzer is controlled by the computer program to sweep regulation frequency, then spectrum chart are plotted out to detect the worst conditions in operating mode and/or configuration for the final test.

All leads other than safety ground are tested.

8.1.3.2 Final Measurement

The EUT is operated in the worst condition where maximum emission is detected by the preliminary test. The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

The each spectrum to be tested are measured in quasi-peak using the test receiver. When the value in the quasi-peak mode is higher than the limit in the standard, the measurement in the average mode is done to compare to the value in the quasi-peak mode. If the value in the quasi-peak mode exceeds the value in the average mode by more than 6 dB, the value reducing 13 dB from the value in the quasi-peak mode is used to compare to the limit.

8.2 Radiated Emission Test

8.2.1 Equipment Setup

System configuration and Equipment setup are shown on Section 6 and Section 10.

8.2.1.1 Table-Top Equipment

EUT is placed on the wooden table raised 0.8meter above the metal ground plane (turntable).

8.2.1.2 Interconnecting Cables

Excess part of the interconnecting cables longer than 1 meter are bundled in the center. Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle 30 to 40 cm long, hanging approx, in the middle between ground plane and table.

8.2.2 Measuring Instruments

Measuring instruments list and calibration schedule are shown on Section 11, and brief description are as follows;

8.2.2.1 Antennas

The broadband Bi-cog antenna is used for measurement on the frequency range 30 – 1000 MHz.

The Double ridged guide antenna is used for frequency higher than 1000 MHz. If uncertain result was obtained, the broadband antenna is replaced by the half wave length dipole, then measurement is carried out over again.

8.2.2.2 Pre-amplifier

The broadband pre-amplifier is used for radiated emission measurement. The signal to noise ratio is improved by using pre-amplifier.

8.2.2.3 Spectrum Analyzer

The spectrum analyzer is used for preliminary measurement of frequency range 30 – 1000 MHz, and also used for final measurement of higher than 1000 MHz (Resolution bandwidth : 1 MHz).

8.2.2.4 EMI Test Receiver

The Quasi-peak detector (IF bandwidth : 120 kHz) built in test receiver is used for final measurement of the frequency 30 – 1000 MHz.

The test receiver is complied with the specification of the CISPR publication 16.

8.2.2.5 Turntable

The turntable is capable for EUT weight and rotatable 0 to 360 degree horizontally by remote control in the test room.

8.2.2.6 Antenna Mast

The antenna mast is attachable to all antennas described on clause 8.2.2.1 and antenna height is adjustable 1 to 4 meters continuously by remote control at the test room, and antenna polarization is also changed by the remote control.

8.2.3 Test Procedure

8.2.3.1 Preliminary Measurement

EUT is tested on all operating conditions.

The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to detect the worst conditions in configuration, operating mode, or ambient noise notation.

8.2.3.2 Final Measurement

The EUT operated in the condition where maximum emission is detected in the preliminary test.

The turntable azimuth (EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured. The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.


SECTION 9. EVALUATION OF TEST RESULTS

9.1 Conducted Emission Test

9.1.1 Random Access Data Read at CD-ROM Disc mode

Akzo Kashima Limited
Kashima No.1 Test Site
INTERFERENCE CONDUCTION TEST

APPLICANT : TOSHIBA CORPORATION PRODUCT
 SAFETY GROUP, TECHNOLOGY &
 QUALITY MANAGEMENT DIVISION,
 DIGITAL MEDIA NETWORK COMPANY
 EUT NAME : DVD-ROM Drive
 MODEL NO. : SD-M1502
 SERIAL NO. : 2S2-M100
 TEST MODE : Random Access Data Read at CD-ROM
 Disc
 POWER SOURCE : DC +5V, +12V
 DATE TESTED : Jul 28 2000
 FILE NO. : AKL-100247
 REGULATION : FCC Part15B CLASS B
 TEST METHOD : ANSI C63.4-1992

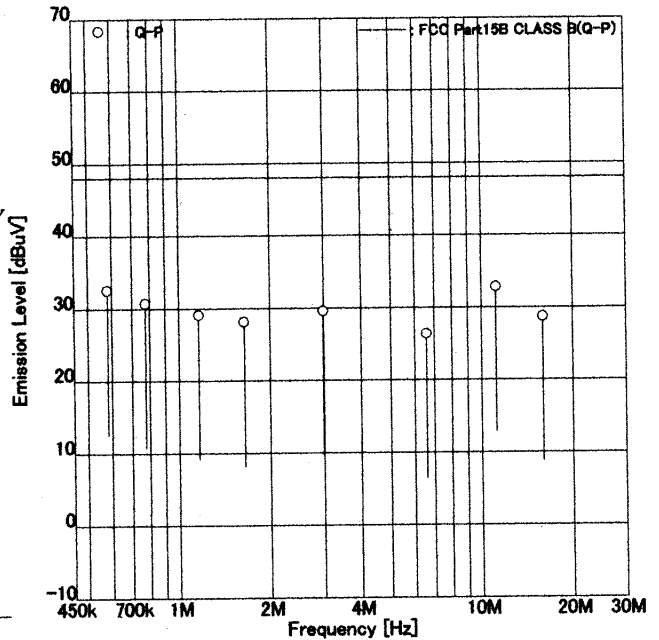

ENGINEER :

Naoki Sagawa

FREQUENCY No	[MHz]	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
		Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.5805	23.5	<u>26.1</u>	6.4	6.4	29.9	<u>32.5</u>	48.0	18.1	<u>15.5</u>
2	0.7743	<u>24.3</u>	23.4	6.4	6.4	<u>30.7</u>	29.8	48.0	<u>17.3</u>	18.2
3	1.1614	21.4	<u>22.7</u>	6.4	6.4	27.8	<u>29.1</u>	48.0	20.2	<u>18.9</u>
4	1.6434	21.5	21.7	6.4	6.4	27.9	28.1	48.0	20.1	19.9
5	2.9984	20.3	<u>23.2</u>	6.4	6.4	26.7	<u>29.6</u>	48.0	21.3	<u>18.4</u>
6	6.5799	15.8	19.7	6.7	6.7	22.5	26.4	48.0	25.5	21.6
7	11.1826	<u>25.8</u>	25.6	7.0	7.0	<u>32.8</u>	32.6	48.0	<u>15.2</u>	15.4
8	15.9759	<u>21.2</u>	21.2	7.5	7.5	<u>28.7</u>	28.7	48.0	<u>19.3</u>	19.3

Higher six points are underlined.
 Other frequencies : Below the FCC Part15B CLASS B limit
 Emission Level = Read + Factor(LISN, Pad, Cable)

9.1.2 Random Access Data Read at DVD-ROM Disc mode

Akzo Kashima Limited


Kashima No.1 Test Site

INTERFERENCE CONDUCTION TEST

APPLICANT : TOSHIBA CORPORATION PRODUCT
SAFETY GROUP, TECHNOLOGY &
QUALITY MANAGEMENT DIVISION,
DIGITAL MEDIA NETWORK COMPANY

EUT NAME : DVD-ROM Drive
MODEL NO. : SD-M1502
SERIAL NO. : 2S2-M100
TEST MODE : Random Access Data Read at DVD-ROM
Disc

POWER SOURCE : DC +5V, +12V
DATE TESTED : Jul 28 2000
FILE NO. : AKL-100247
REGULATION : FCC Part15B CLASS B
TEST METHOD : ANSI C63.4-1992

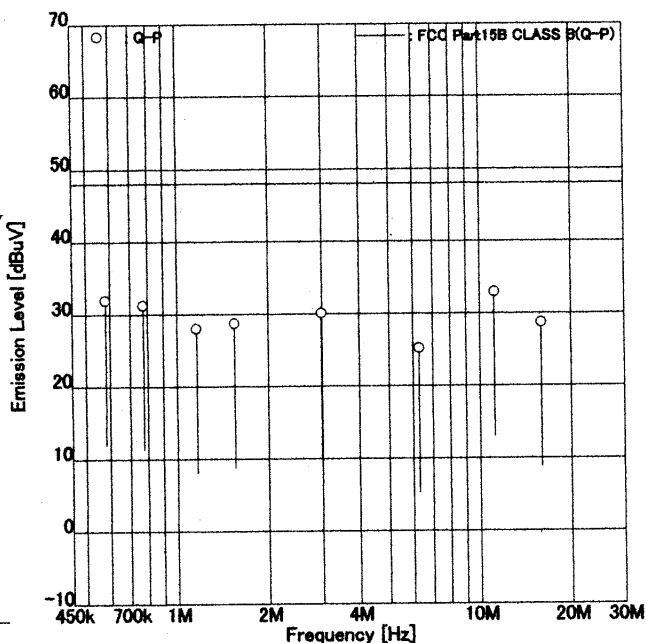

ENGINEER :

Naoki Sagawa

FREQUENCY No	[MHz]	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
		Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.5801	23.5	<u>25.5</u>	6.4	6.4	29.9	<u>31.9</u>	48.0	18.1	<u>16.1</u>
2	0.7734	<u>24.8</u>	23.8	6.4	6.4	<u>31.2</u>	30.2	48.0	<u>16.8</u>	17.8
3	1.1606	21.6	20.8	6.4	6.4	28.0	27.2	48.0	20.0	20.8
4	1.5476	<u>22.3</u>	21.7	6.4	6.4	<u>28.7</u>	28.1	48.0	<u>19.3</u>	19.9
5	2.9984	20.0	<u>23.7</u>	6.4	6.4	26.4	<u>30.1</u>	48.0	21.6	<u>17.9</u>
6	6.2862	17.1	18.5	6.7	6.7	23.8	25.2	48.0	24.2	22.8
7	11.1826	<u>25.9</u>	25.5	7.0	7.0	<u>32.9</u>	32.5	48.0	<u>15.1</u>	15.5
8	15.9767	<u>21.2</u>	21.0	7.5	7.5	<u>28.7</u>	28.5	48.0	<u>19.3</u>	19.5

Higher six points are underlined.
Other frequencies : Below the FCC Part15B CLASS B limit
Emission Level = Read + Factor(LISN, Pad, Cable)

9.2 Radiated Emission Test

9.2.1 Random Access Data Read at CD-ROM Disc mode

Akzo Kashima Limited


Kashima No.1 Test Site

INTERFERENCE RADIATION TEST

APPLICANT : TOSHIBA CORPORATION PRODUCT
 SAFETY GROUP, TECHNOLOGY &
 QUALITY MANAGEMENT DIVISION,
 DIGITAL MEDIA NETWORK COMPANY
 EUT NAME : DVD-ROM Drive
 MODEL NO. : SD-M1502
 SERIAL NO. : 2S2-M100
 TEST MODE : Random Access Data Read at CD-ROM
 Disc
 POWER SOURCE : DC +5V, +12V
 DATE TESTED : Jul 28 2000
 FILE NO. : AKL-100247
 REGULATION : FCC Part15B CLASS B
 TEST METHOD : ANSI C63.4-1992
 DISTANCE : 3.0 [m]
 TEMPERATURE : 24.0 [degC]
 HUMIDITY : 60.0 [%]

ENGINEER :

Naoki Sagawa

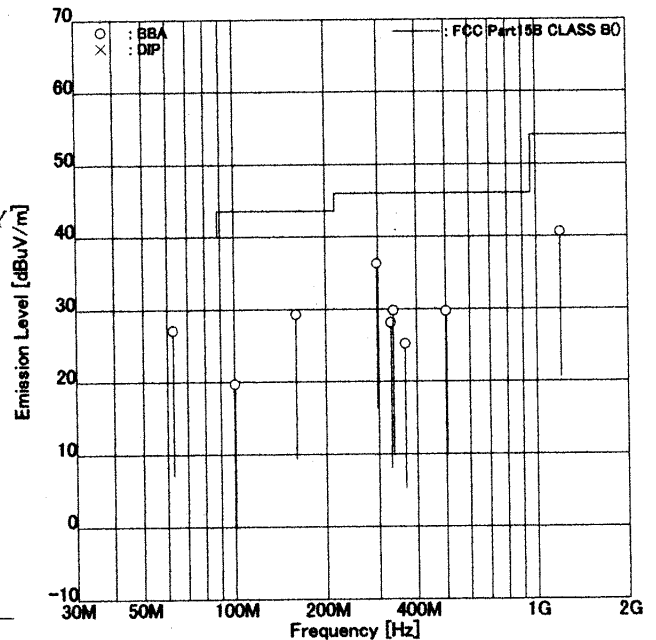

FREQUENCY No	[MHz]	ANT.	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	62.69	BBA	-	<u>37.3</u>	-10.2	-10.2	-	<u>27.1</u>	40.0	-	<u>12.9</u>
2	100.24	BBA	28.7	-	-9.0	-9.0	19.7	-	43.5	23.8	-
3	160.00	BBA	<u>40.5</u>	-	-11.2	-11.2	<u>29.3</u>	-	43.5	<u>14.2</u>	-
4	297.01	BBA	<u>41.5</u>	-	-5.2	-5.2	<u>36.3</u>	-	46.0	<u>9.7</u>	-
5	329.32	BBA	32.3	-	-4.2	-4.2	28.1	-	46.0	17.9	-
6	336.05	BBA	<u>34.0</u>	-	-4.2	-4.2	<u>29.8</u>	-	46.0	<u>16.2</u>	-
7	366.74	BBA	28.0	-	-2.8	-2.8	25.2	-	46.0	20.8	-
8	502.09	BBA	<u>30.0</u>	-	-0.3	-0.3	<u>29.7</u>	-	46.0	<u>16.3</u>	-
9	1201.78	BBA	<u>36.5</u>	34.3	4.1	4.1	<u>40.6</u>	38.4	54.0	<u>13.4</u>	15.6

Higher six points are underlined.
 Other frequencies : Below the FCC Part15B CLASS B limit
 Emission Level = Read + Factor(Antenna, Antenna Pad, Cable, Preamp)
 ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

9.2.2 Random Access Data Read at DVD-ROM Disc mode

Akzo Kashima Limited


Kashima No.1 Test Site

INTERFERENCE RADIATION TEST

APPLICANT : TOSHIBA CORPORATION PRODUCT
 SAFETY GROUP, TECHNOLOGY &
 QUALITY MANAGEMENT DIVISION,
 DIGITAL MEDIA NETWORK COMPANY
 EUT NAME : DVD-ROM Drive
 MODEL NO. : SD-M1502
 SERIAL NO. : 2S2-M100
 TEST MODE : Random Access Data Read at DVD-ROM
 Disc
 POWER SOURCE : DC +5V, +12V
 DATE TESTED : Jul 28 2000
 FILE NO. : AKL-100247
 REGULATION : FCC Part15B CLASS B
 TEST METHOD : ANSI C63.4-1992
 DISTANCE : 3.0 [m]
 TEMPERATURE : 24.0 [degC]
 HUMIDITY : 60.0 [%]

ENGINEER :

Naoki Sagawa

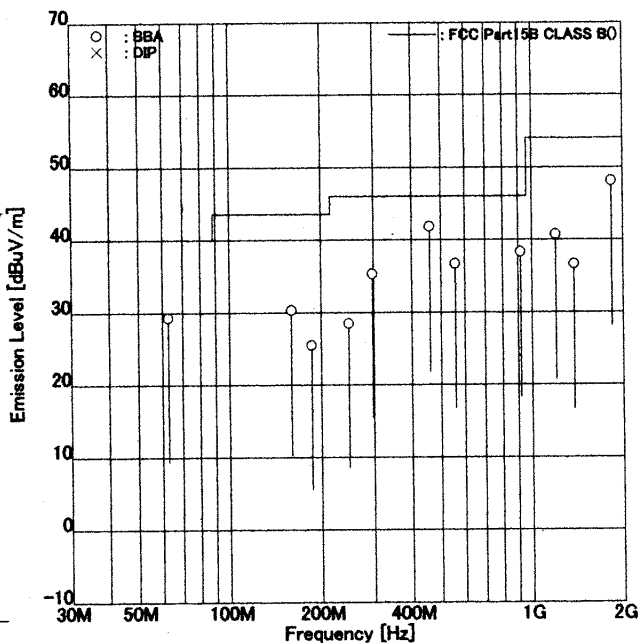

FREQUENCY No	[MHz]	ANT.	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	62.68	BBA	-	<u>39.5</u>	-10.2	-10.2	-	<u>29.3</u>	40.0	-	<u>10.7</u>
2	160.00	BBA	41.5	-	-11.2	-11.2	30.3	-	43.5	13.2	-
3	186.37	BBA	-	35.0	-9.5	-9.5	-	25.5	43.5	-	18.0
4	247.65	BBA	35.0	-	-6.5	-6.5	28.5	-	46.0	17.5	-
5	297.02	BBA	<u>40.5</u>	-	-5.2	-5.2	<u>35.3</u>	-	46.0	<u>10.7</u>	-
6	459.66	BBA	-	<u>43.0</u>	-1.2	-1.2	-	<u>41.8</u>	46.0	-	<u>4.2</u>
7	559.12	BBA	-	<u>36.0</u>	0.7	0.7	-	<u>36.7</u>	46.0	-	<u>9.3</u>
8	919.36	BBA	-	<u>31.2</u>	7.1	7.1	-	<u>38.3</u>	46.0	-	<u>7.7</u>
9	1201.80	BBA	36.6	34.5	4.1	4.1	40.7	38.6	54.0	13.3	15.4
10	1379.51	BBA	32.2	32.0	4.4	4.4	36.6	36.4	54.0	17.4	17.6
11	1839.51	BBA	32.1	<u>40.8</u>	7.3	7.3	39.4	<u>48.1</u>	54.0	14.6	<u>5.9</u>

Higher six points are underlined.
 Other frequencies : Below the FCC Part15B CLASS B limit
 Emission Level = Read + Factor(Antenna, Antenna Pad, Cable, Preamp)
 ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

9.3 Sample Calculations

9.3.1 Conducted Emission

Example @ 11.1826 MHz

Emission Level	= Meter Reading	25.9 dBuV
	+ Factor	<u>+ 7.0 dB</u>
		= 32.9 dBuV

Margin	= Limit	48.0 dBuV
	- Emission Level	<u>- 32.9 dBuV</u>
		= 15.1 dB

$$\text{Factor} = \text{LISN Factor} + \text{Cable Loss} + \text{Pad Loss}$$

9.3.2 Radiated Emission

Example @ 459.66 MHz

Emission Level	= Meter Reading	43.0 dBuV
	+ Factor	<u>- 1.2 dB/m</u>
		= 41.8 dBuV/m

Margin	= Limit	46.0 dBuV/m
	- Emission Level	<u>- 41.8 dBuV/m</u>
		= 4.2 dB

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} + \text{Pad Loss}$$


SECTION 10. PHOTOGRAPHS OF MAXIMUM EMISSION SET-UP

10.1 Conducted Emission Test

Test setup in accordance with ANSI C63.4-1992




Front view

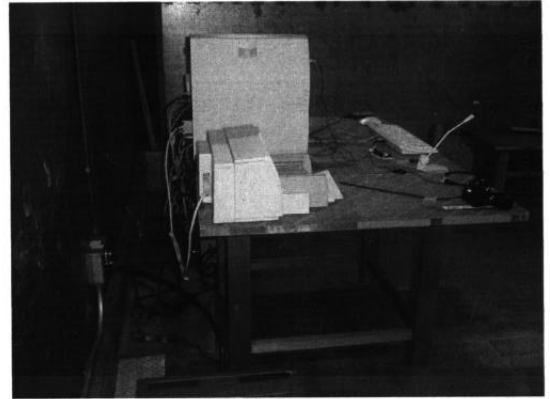


Side view

10.2 Radiated Emission Test

Test setup in accordance with ANSI C63.4-1992

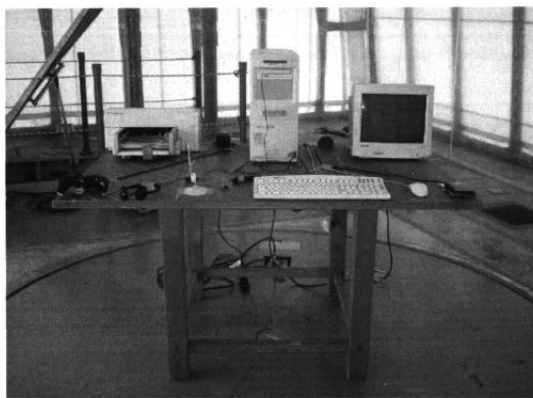

Front view

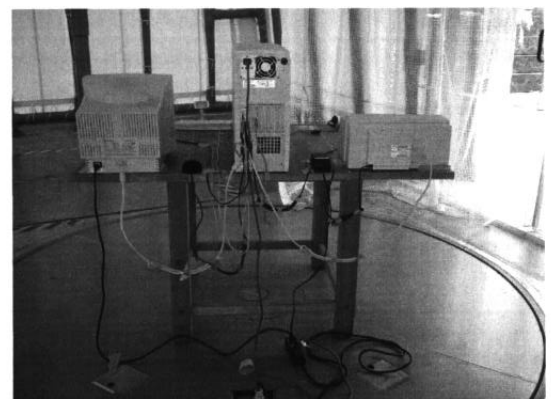

Rear view

Note : Maintaining 10cm spacing between all the equipment cabinets.

SECTION 11. INSTRUMENTS USED FOR FINAL TEST

Instrument	Model No.	Serial No.	Manufacturer	Last cal. date	Period
LISN (EUT)	ESH2-Z5	881492/014	ROHDE & SCHWARZ	Oct. 26, 99	1 Year
6dB Attenuator	CFA-01	None	TME	Jan. 7, 00	1 Year
LISN (Peripheral)	KNW-242	8-851-21	KYORITSU	May 30, 00	1 Year
50Ω Termination	CT-01	A010CON50	TME	May 29, 00	1 Year
Coaxial cable	5D-2W(7.0 m)	C1	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W(2.0 m)	C2	AKZO	Oct. 6, 99	1 Year
Coaxial cable	5D-2W(1.0 m)	R6	AKZO	Oct. 26, 99	1 Year
Coaxial cable	5D-2W(1.0 m)	R7	AKZO	Oct. 26, 99	1 Year
Broad Band antenna	LPB-2513/A	1072	A.R.A.	May 19, 00	1 Year
Double Ridged antenna	3115	5044	EMCO	Jun. 13, 00	1 Year
6dB Attenuator	MP721B	M57593	ANRITSU	Nov. 8, 99	1 Year
6dB Attenuator	6806.17.B	None	SUHNER	Jan. 14, 00	1 Year
Step Attenuator	8494B	2726A14513	HEWLETT PACKARD	Oct. 26, 99	1 Year
Spectrum analyzer	8564E	3643A00665	HEWLETT PACKARD	Jun. 14, 00	1 Year
Amplifier	8447D	1937A03130	HEWLETT PACKARD	Oct. 26, 99	1 Year
Amplifier	83051A	3332A00329	HEWLETT PACKARD	Jan. 17, 00	1 Year
Coaxial cable	5D-2W(9.0 m)	R1	AKZO	Oct. 26, 99	1 Year
Coaxial cable	10D-2W(5.5 m)	R2	AKZO	Oct. 26, 99	1 Year
Coaxial cable	5D-2W(2.0 m)	R3	AKZO	Oct. 26, 99	1 Year
Coaxial cable	5D-2W(0.2 m)	R4	AKZO	Oct. 26, 99	1 Year
Coaxial cable	5D-2W(1.0 m)	R5	AKZO	Oct. 26, 99	1 Year
Coaxial cable	5D-2W(1.0 m)	R6	AKZO	Oct. 26, 99	1 Year
Coaxial cable	5D-2W(1.0 m)	R7	AKZO	Oct. 26, 99	1 Year
Coaxial cable	SUCOFLEX 102(1.0 m)	R14 712/2	SUHNER	Jan. 17, 00	1 Year
Coaxial cable	SUCOFLEX 102(6.0 m)	R15 713/2	SUHNER	Jan. 17, 00	1 Year
Test receiver	ESS	847151/012	ROHDE & SCHWARZ	Jan. 27, 00	1 Year
RF Switch	ACX-150	None	AKZO	Oct. 26, 99	1 Year
Site Attenuation				Nov. 4, 99	1 Year

Note : Test instruments are calibrated according to Quality Manual and Calibration Rules of EMC division.

SECTION 12. MEASUREMENT UNCERTAINTY

The uncertainty of the measurements performed for this report lies:

Radiated emission at 3m

30 MHz – 1000 MHz +/- 3.6 dB

Above 1 GHz +/- 3.9 dB

Conducted emission

9 kHz – 30 MHz +/- 1.8 dB

Note on Radiated Emission measurement uncertainty

The following items are not included in the calculations in spite of their own uncertainty components because it is impracticable to find the value.
It is our problem awaiting solution in future.

(1) Repeatability of measurement

It is not possible to calculate repeatability since the measurement was carried out only one time.

(2) Antenna factor variation

The definition of measured (radiated electric field strength) is not completed on the referred standard(s).

(3) Loss of EUT radiation propagation

It is certainly one of the uncertainty components, however is not able to calculate.

Please note that these uncertainties are not reflected to the compliance judgement of the test results in this report.

SECTION 13. VALIDITY OF TEST REPORT

- 13.1 The test result of this report is effective for equipment under test itself and under the test configuration described on the report.
- 13.2 This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.
- 13.3 This test report shall not be reproduced except in full, without issuer's permission.

SECTION 14. DESCRIPTION OF TEST LABORATORY

14.1 Outline of Akzo Kashima Limited, EMC Division

Akzo Kashima Ltd. was established in 1975 for manufacturing specialty chemicals. The shares are owned by Akzo Nobel KK (100%), the country organization in Japan for Akzo Nobel NV. Akzo Nobel, headquartered in the Netherlands, is one of the world's leading companies in selected areas of chemicals, coatings, healthcare products and fibers with work force of approximately 70,000 people in over 50 countries.

In 1984, in order to respond to the growing testing demand, in particular, for FCC filing, Akzo Kashima started EMI testing business, installing the first open air test site in Kashima, Ibaraki prefecture. Further the business has been expanded by installing additional testing facilities not only in Kashima but also in other areas such as Shizuoka, Nagano, Kanagawa and Tochigi. As results, Akzo Kashima has now 16 open air test sites and 4 anechoic chambers for EMI/EMC testing. As the largest EMC testing laboratory in number of testing facilities and staffs, EMC Division has been organized separately in the company and independently operated in conformity with the requirements of ISO Guide 25 (EN 45000) for its competency as a testing laboratory.

Akzo Kashima EMC Division is the first foreign private laboratory accredited by NVLAP, National Voluntary Laboratory Accreditation Program-NIST, USA. The division has been certified, authorized and/or filed as a competent testing laboratory by various testing organizations/authorities as described below.

14.2 Filing, certification, authorization and accreditation list

<u>EMI/EMC testing</u>		<u>Telecommunications terminal testing</u>	
FCC	(USA)	FCC	(USA)
NVLAP	(USA)	NVLAP	(USA)
NEMKO	(Norway)	NATA	(Australia)
VCCI	(Japan)	IC	(Canada)
NMi	(The Netherlands)		
TÜV PRODUCT SERVICE	(Germany)		

Note : NVLAP accreditation does not constitute any product endorsement by NVLAP or any agent of the U.S. Government.