



Intertek Testing Services

**APPLICATION FOR FCC CERTIFICATION
For
Radio Shack, A Division of Tandy Corporation**

**Scanning Receiver
Model: 20-314 (PRO-79)
FCC ID: AAO2000314**

**Job # J99023439
Report #J99023439a**

**Date of Testing: September 13, 1999
Date of Report: September 29, 1999**

Number of Pages: 19 + data pages

This report shall not be reproduced except in full, without written approval of Intertek Testing Services.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples on this report is dependent on the representative of the samples tested.



FCC Part 15 Scanning Rx Cert, Ver 3/97
k:\1. Voc\scannrx.doc

Table of Contents

| | |
|----------------------------------------------------------|-----------|
| AUTHORIZATION LETTER | 1 |
| ATTESTATION LETTER TO FCC §15.121 | 2 |
| TEST REPORT | 3 |
| 0.0 Summary of Test Results | 3 |
| 1.0 General Description | 4 |
| 1.1 Product Description | 4 |
| 1.2 Related Submittal(s) Grants | 4 |
| 1.3 Test Methodology | 4 |
| 1.4 Test Facility | 4 |
| 2.0 System Test Configuration | 5 |
| 2.1 Justification | 5 |
| 2.2 EUT Exercising Software | 5 |
| 2.3 Support Equipment List and Description | 6 |
| 2.4 Equipment Modification | 6 |
| 3.0 Emission Results | 7 |
| 3.1 Field Strength Calculation | 8 |
| 3.2 Radiated Emission Configuration Photograph | 9 |
| 3.3 Radiated Emission Data | 10 |
| 3.4 AC conducted Emission Configuration Photograph | 11 |
| 3.5 Conducted Emission Data | 12 |
| 4.0 Antenna Requirement | 13 |
| 5.0 Equipment Photographs | 14 |
| 6.0 Product Labeling | 15 |
| 6.1 Label Artwork | 15 |
| 6.2 Label Location | 16 |
| 7.0 Technical Specifications | 17 |
| 7.1 Receiver Block Diagram | 17 |
| 7.2 Receiver Circuit Diagram | 18 |
| 8.0 Instruction Manual | 19 |

AUTHORIZATION LETTER

Please see attached page

ATTESTATION LETTER TO FCC §15.121

Please see attached page.


Radio Shack, A Division of Tandy Corporation, 20-314 (PRO-79)

Date of Test: September 13, 1999

TEST REPORT**0.0 Summary of Test Results**

Radio Shack, A Division of Tandy Corporation - Model: 20-314 (PRO-79)
FCC ID: AAO2000314

| TEST | REFERENCE | RESULTS |
|--------------------|-----------|----------|
| Radiated Emission | 15.109 | Complies |
| Conducted Emission | 15.107 | Complies |

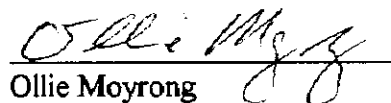We attest to the accuracy of this report:

Ollie Moyrong
Test Engineer



David Chernomordik
EMC Site Manager

1.0 General Description

1.1 Product Description

The General Research of Electronics, Inc. Model No.: 20-314 (PRO-79) is a scanning receiver used to listen to police and fire departments, ambulance services, government agencies, private companies, amateur radio services, aircraft and military operations.

Please refer to the attached users manual for more details.

A pre-production version of the sample was received on September 13, 1999 in good condition.

1.2 Related Submittal(s) Grants

This is an Application for Certification of a scanning receiver.

1.3 Test Methodology

Both AC mains line-conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Data Section" of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is Site 1. This test facility and site measurement data have been fully placed on file with the FCC.

2.0 System Test Configuration

2.1 Justification

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

For the measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT is wired to transmit full power without modulation.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Detector function is in peak mode. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance if measured at a closer distance..

2.2 EUT Exercising Software

For emissions testing, the units were setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

2.3 Mode of Operation

The EUT was tested in two modes and the worst case emission was recorded:


1. EUT was set to constantly receive at a particular frequency.
2. EUT was set to constantly scan and receive a particular band.

2.3 Support Equipment List and Description

- a) The FCC ID's for all equipment used in the tested system (included inserted cards, which have grants) are:

| Item # | Description | Model No. | Serial No. | FCC ID |
|--------|---------------------------|-----------|------------|--------|
| 1 | Radio Shack Power Adaptor | 273-1662 | N/A | N/A |
| 2 | Sony Headphones | N/A | N/A | N/A |

b) **Equipment Setup Block Diagram**

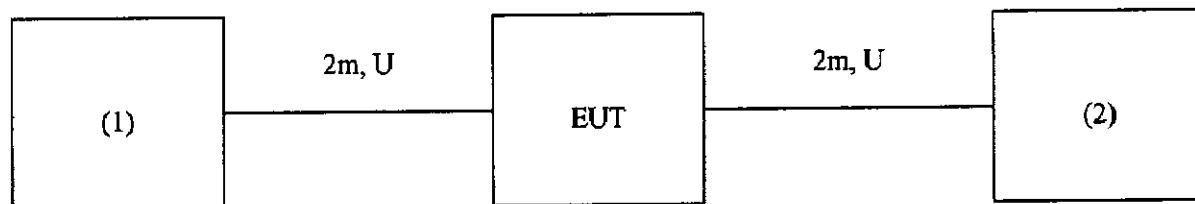

* = EUT

** = No ferrites on video cable

S = Shielded;
U = Unshielded

F = With Ferrite

2.4 Equipment Modification

Any modifications installed previous to testing by Radio Shack, A Division of Tandy Corporation will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services.

3.0 Emission Results

AC line conducted emission measurements were performed from 0.45 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements were performed from 30 MHz to 5000 MHz. Analyzer resolution is 100 kHz or greater for 30 MHz to 1000 MHz, 1 MHz for >1000 MHz.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

DF = Distance Factor

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB μ V/m

RR = RA - AG in dB μ V

LF = CF + AF + DF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}$$

$$DF = 0 \text{ dB}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 23.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$



$$FS = RR + LF$$

$$FS = 23 + 9 = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
at 143.3 MHz

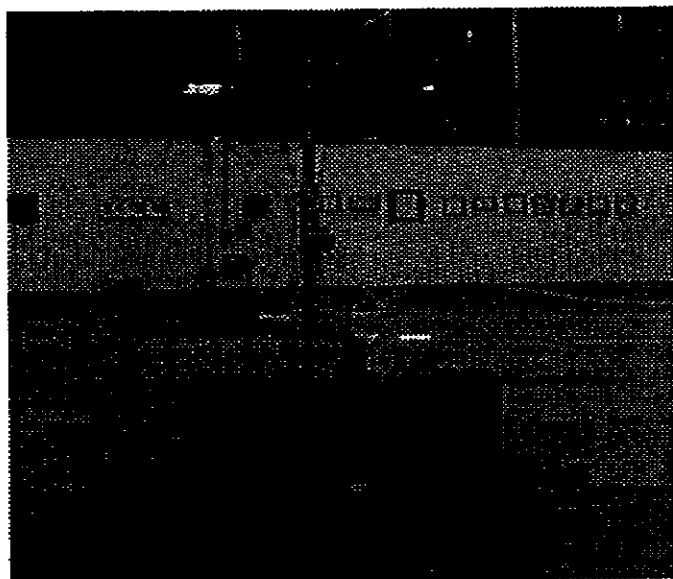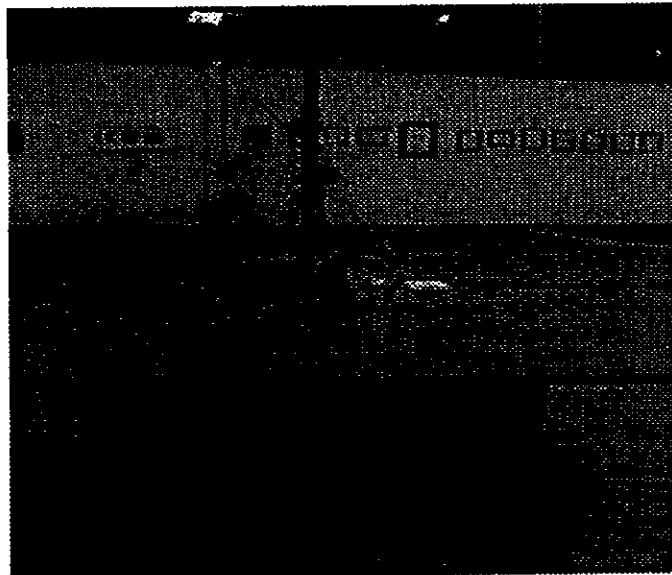



3.3 Radiated Emission Data

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Judgement : Passed by 10.4 dB

3.4 AC conducted Emission Configuration Photograph

Worst Case Conducted Emission
at 5.648 MHz

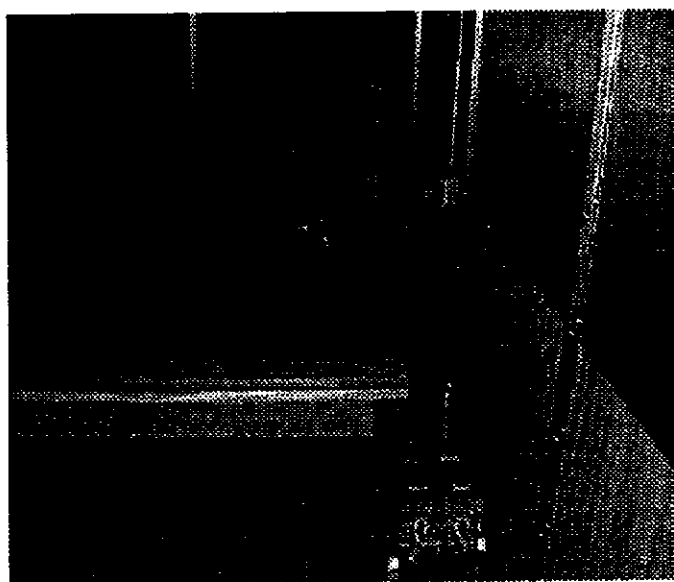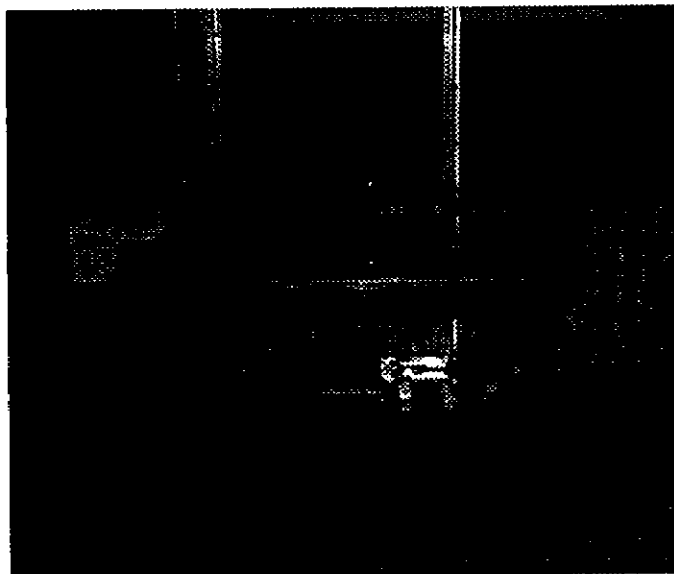

3.5 Conducted Emission Data

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Judgement : Passed by 14.6 dB

4.0 Antenna Requirement

The **antenna** is affixed to the EUT using a **unique** connector that allows for replacement of a broken antenna, EUT **does** use a **standard** antenna jack or electrical connector.

5.0 Equipment Photographs

Photographs of the EUT are attached.

6.0 Product Labeling**6.1 Label Artwork**

An engineering drawing of the label that will be permanently affixed to the unit is attached. This label will be attached to the unit at the location shown in Section 6.2.

6.2 Label Location

See attached page.


7.0 Technical Specifications

7.1 Receiver Block Diagram

See attached page.

CAT.NO.20-314 (PRO-79)

BLOCK DIAGRAM

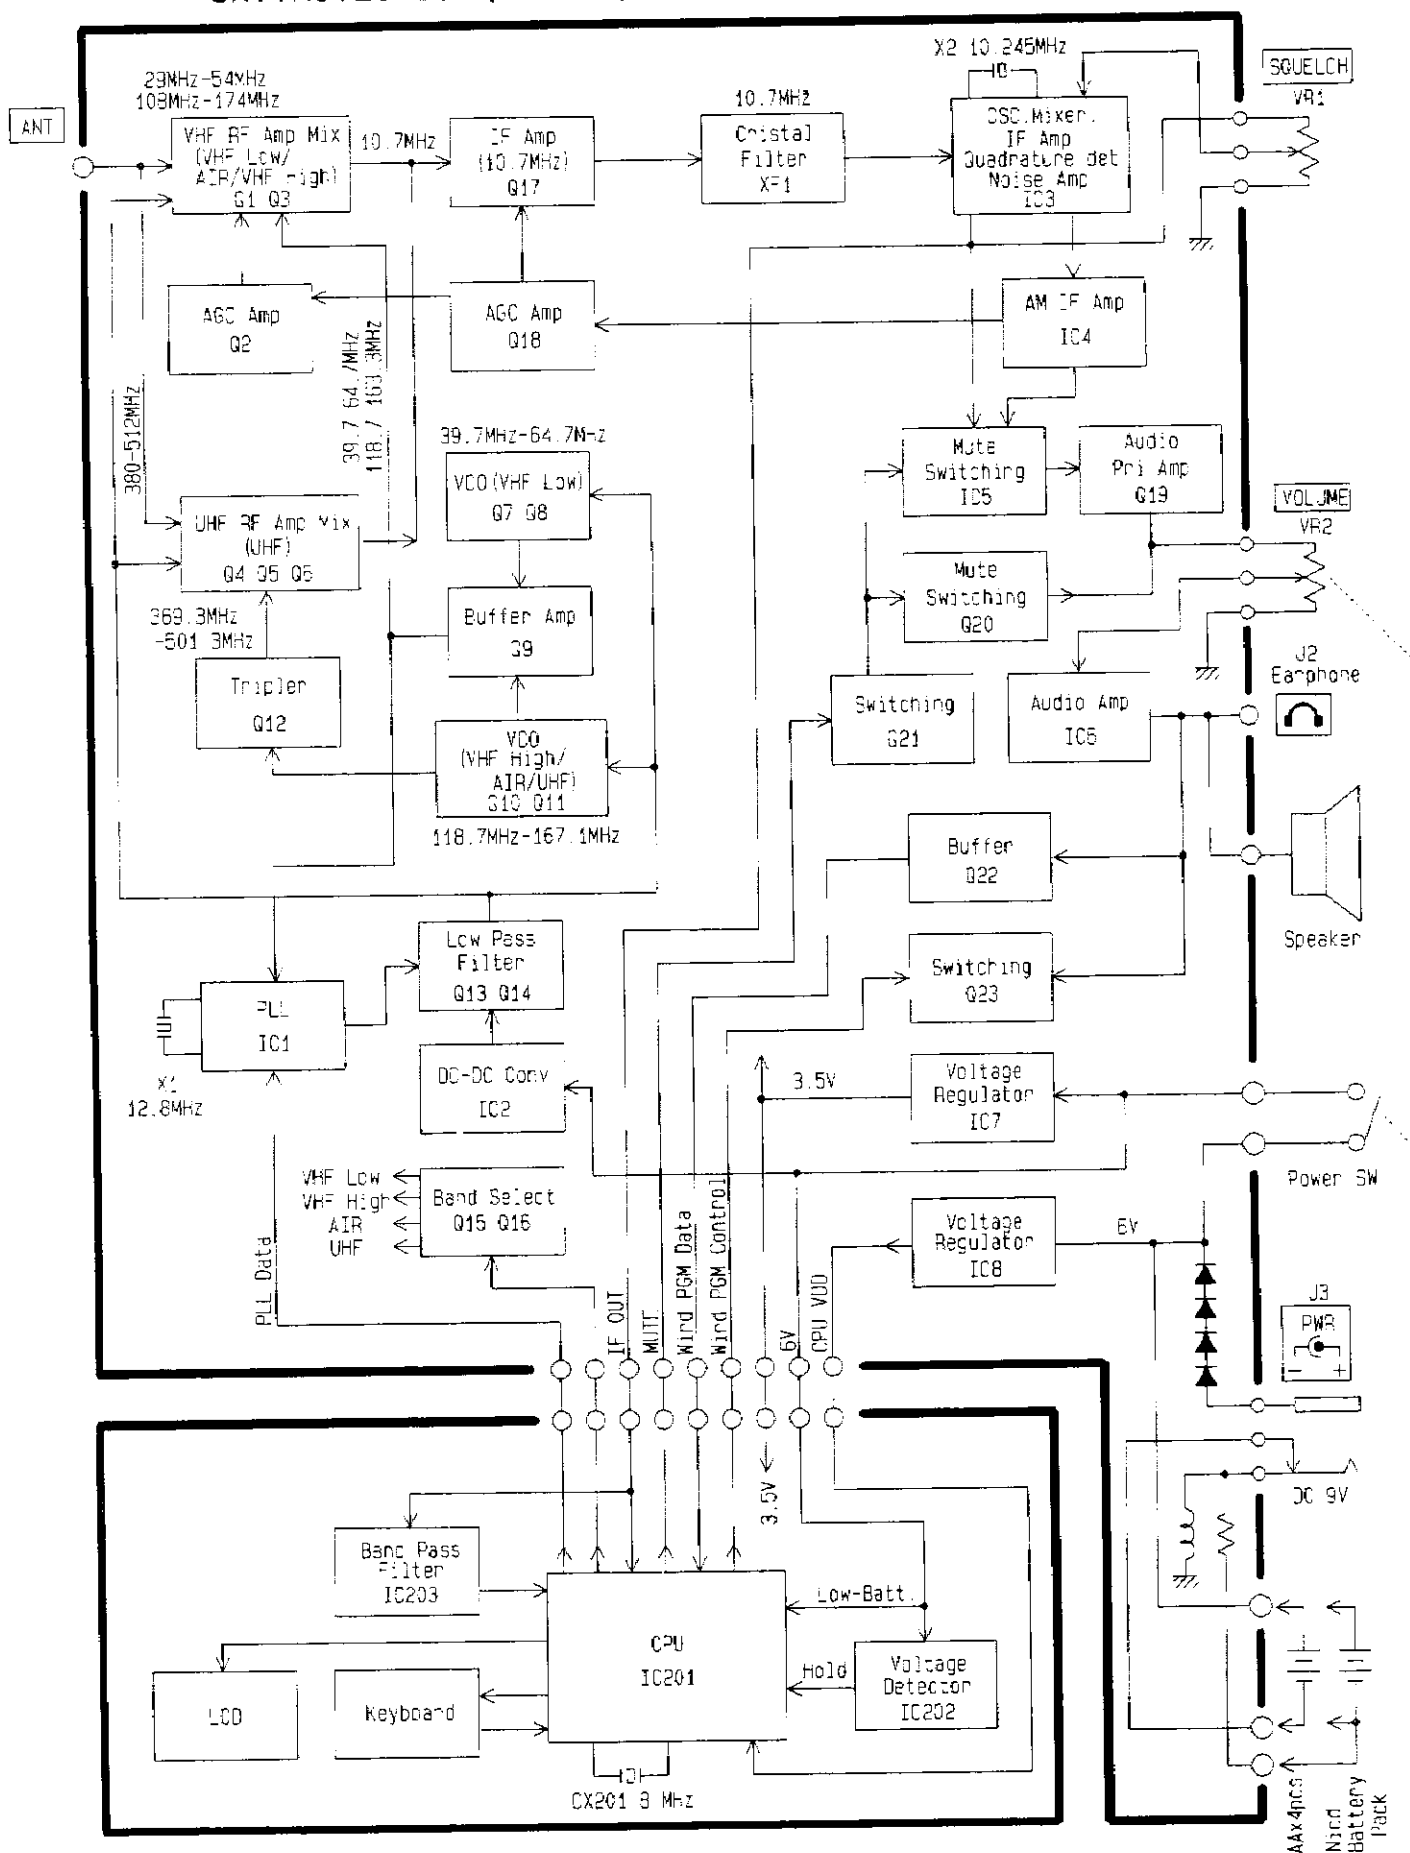

7.2 Receiver Circuit Diagram

See attached page.

8.0 Instruction Manual

Attached is a preliminary copy of the Instruction Manual.

This manual will be provided to the end-user with each unit sold/leased in the United States.