

TEST REPORT

Reference No...... : WTD24D01019167W002
FCC ID : 2BEPN-M47
Applicant..... : WEWINS TECHNOLOGY LIMITED
Address..... : Room 1003, 10/F, Tower 1, Lippo Centre, 89 Queensway, Admiralty, Hong Kong
Manufacturer : WEWINS TECHNOLOGY LIMITED
Address..... : Room 1003, 10/F, Tower 1, Lippo Centre, 89 Queensway, Admiralty, Hong Kong
Product..... : LTE MiFi Router
Model(s) : M47
Standards..... : FCC 47CFR Part 15.247
Date of Receipt sample : 2024-01-26
Date of Test : 2024-02-19 to 2024-03-12
Date of Issue..... : 2024-03-18
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

James Cheng

James Cheng / Project Engineer

Approved by:

Deval Qin

Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST FACILITY	6
4.5 SUBCONTRACTED	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.7 TEST MODE	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS	10
6.3 MEASUREMENT UNCERTAINTY	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 DUTY CYCLE	11
8 CONDUCTED EMISSION	14
8.1 E.U.T. OPERATION	14
8.2 EUT SETUP	14
8.3 MEASUREMENT DESCRIPTION	14
8.4 CONDUCTED EMISSION TEST RESULT	15
9 RADIATED EMISSIONS	17
9.1 EUT OPERATION	17
9.2 TEST SETUP	18
9.3 SPECTRUM ANALYZER SETUP	19
9.4 TEST PROCEDURE	20
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
9.6 SUMMARY OF TEST RESULTS	21
10 CONDUCTED SPURIOUS EMISSIONS	39
10.1 TEST PROCEDURE	39
10.2 TEST RESULT	40
11 BAND EDGE MEASUREMENT	55
11.1 TEST PROCEDURE	55
11.2 TEST RESULT	56
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	59
12.1 TEST PROCEDURE	59
12.2 TEST RESULT	59
13 MAXIMUM PEAK CONDUCTED OUTPUT POWER	69
13.1 TEST PROCEDURE	69
13.2 TEST RESULT	70
14 POWER SPECTRAL DENSITY	77

14.1 TEST PROCEDURE77

14.2 TEST RESULT78

15 ANTENNA REQUIREMENT85

16 RF EXPOSURE85

17 PHOTOGRAPHS OF TEST SETUP AND EUT.....85

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD24D01019167W002	2024-01-26	2024-02-19 to 2024-03-12	2024-03-18	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	LTE MiFi Router
Model(s):	M47
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n/ax HT20/n/ax HT40
Hardware Version:	Mobile.Router.H01
Software Version:	Mobile.Router.B01

4.2 Details of E.U.T.

Operation Frequency:	802.11b/g/n/ax HT20: 2412~2462MHz 802.11n/ax HT40: 2422~2452MHz
Max. RF output power:	14.24dBm
Type of Modulation:	DSSS, OFDM
Antenna installation:	PCB printed antenna
Antenna Gain:	2.8dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTERK lab has not verified the authenticity of its information.

Ratings: Battery: DC 3.7V, 3000mAh, 11.1Wh

Adapter: Input: 100-240V~, 50/60Hz, 0.2A
Output: 5.0V==1.0A

4.3 Channel List

Wi-Fi

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n/ax HT20	MCS0	1/6/11	TX
	802.11n/ax HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n/ax HT20	MCS0	1/6/11	TX
	802.11n/ax HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n/ax HT20	MCS0	1/6/11	TX
	802.11n/ax HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n/ax HT20	MCS0	1/6/11	TX
	802.11n/ax HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n/ax HT20	MCS0	1/6/11	TX
	802.11n/ax HT40	MCS0	3/6/9	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
Conducted Emissions 1#						
1	EMI Test Receiver	R&S	ESCI	100947	2023-07-27	2024-07-26
2	LISN	R&S	ENV216	100115	2023-07-27	2024-07-26
3	Cable	Top	TYPE16(3.5M)	-	2023-07-27	2024-07-26
Conducted Emissions 2#						
1	EMI Test Receiver	R&S	ESCI	101155	2023-07-27	2024-07-26
2	LISN	SCHWARZBECK	NSLK 8128	8128-259	2023-10-31	2024-10-30
3	Pulse Limiter	CYBERTEK	EM5010	261115-001-0024	2023-07-27	2024-07-26
4	Cable	Laplace	RF300	-	2023-07-27	2024-07-26
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2023-04-24	2024-04-23
2	Amplifier	Agilent	8447D	2944A10178	2023-07-27	2024-07-26
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2023-08-07	2024-08-06
4	Coaxial Cable	Top	TYPE16(13M)	-	2023-04-24	2024-04-23
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2024-01-23	2025-01-22
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2023-07-27	2024-07-26
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2023-08-08	2024-08-07
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2023-04-24	2024-04-23
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2023-07-27	2024-07-26
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2023-04-24	2024-04-23
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2023-04-24	2024-04-23
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2023-05-07	2024-05-06
4	Amplifier	ANRITSU	MH648A	M43381	2023-04-24	2024-04-23
5	Cable	HUBER+SUHNER	CBL2	525178	2023-04-24	2024-04-23
RF Conducted Testing						
1	Spectrum Analyzer	R&S	FSP40	100501	2023-07-27	2024-07-26
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-07-27	2024-07-26

Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64\text{dB}$ (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08\text{dB}$ (Bilog antenna 30M~1000MHz)
	$\pm 5.47\text{ dB}$ (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}\text{Hz}$
RF Power	$\pm 0.42\text{ dB}$
RF Power Density	$\pm 0.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.76\text{ dB}$ (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 Duty Cycle

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	8.160	8.400	0.97	97.14	0.13	-0.25
802.11g	1.350	1.540	0.88	87.66	0.57	-1.14
802.11n-HT20	5.040	5.250	0.96	96.00	0.18	-0.35
802.11n-HT40	2.450	2.646	0.93	92.59	0.33	-0.67
802.11ax-HT20	4.512	4.278	1.05	105.47	-0.23	0.46
802.11ax-HT40	2.272	2.480	0.92	91.61	0.38	-0.76


Remark:

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;


Average factor= $20 \log_{10} \text{Duty cycle}$

Wi-Fi 802.11b

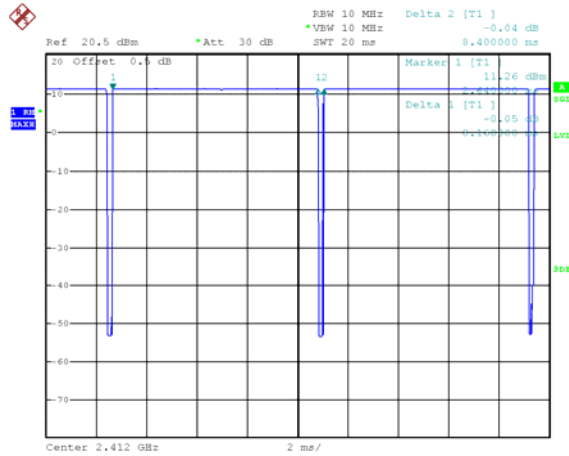


Date: 21.FEB.2024 14:02:24

Wi-Fi 802.11g

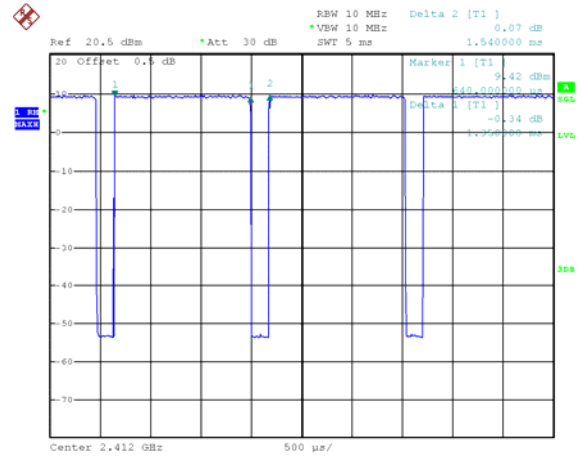


Date: 21.FEB.2024 14:05:10

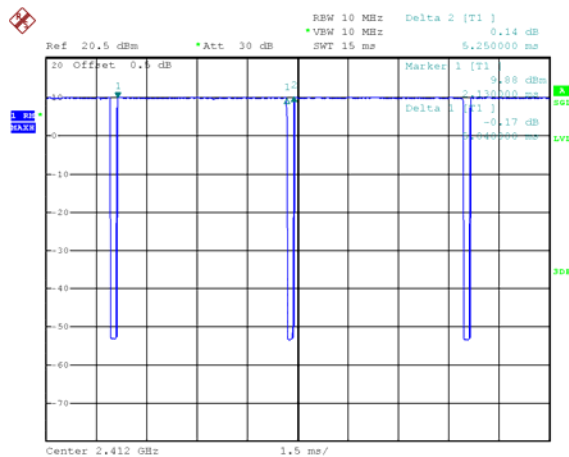Wi-Fi 802.11n-HT20


Date: 21.FEB.2024 13:53:08

Wi-Fi 802.11n-HT40

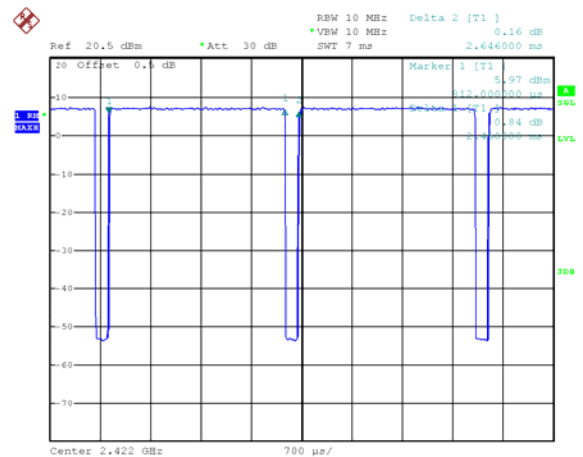


Date: 21.FEB.2024 13:52:00

Wi-Fi 802.11ax-HT20

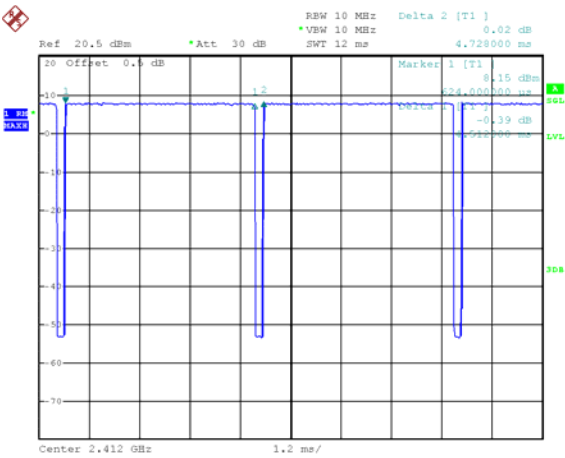

Date: 12.MAR.2024 08:51:40

Wi-Fi 802.11ax-HT40

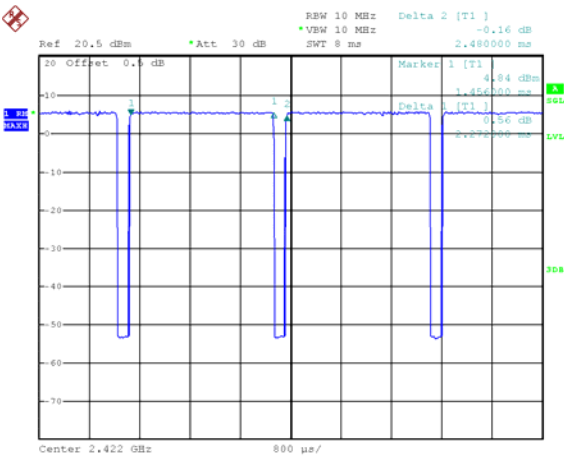

Date: 12.MAR.2024 09:11:26

8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.1 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	6	6
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C

Humidity: 60.7 % RH


Atmospheric Pressure: 101.6kPa

EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

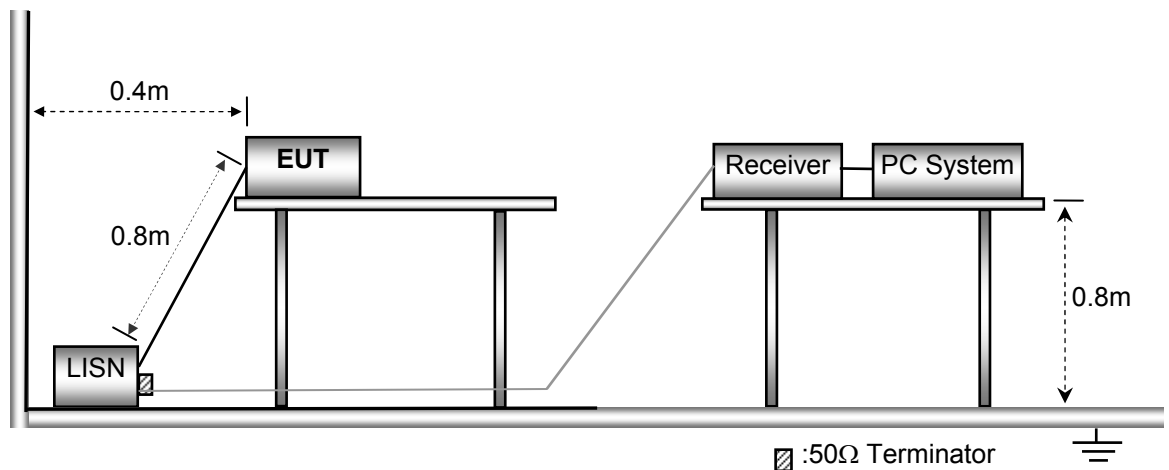


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: only the worst data (TX 11b mode High channel mode) were reported

Live line:

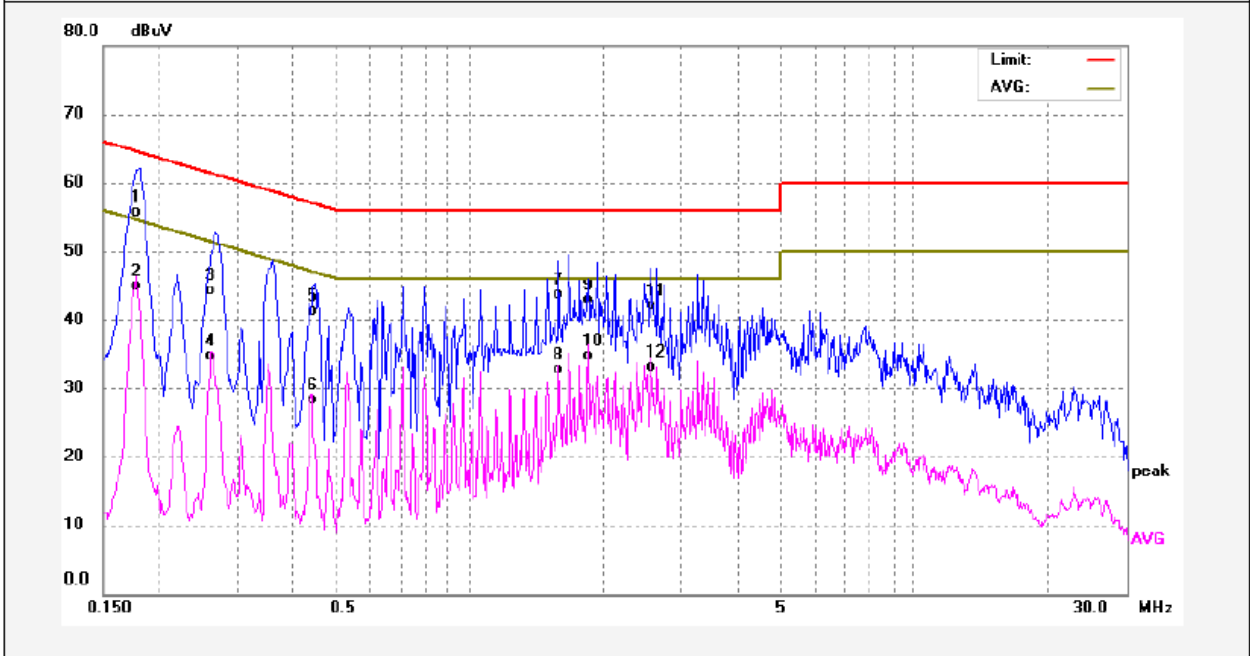

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	44.77	10.93	55.70	64.57	-8.87	QP	
2	0.1780	34.03	10.93	44.96	54.57	-9.61	AVG	
3	0.2620	33.42	10.96	44.38	61.36	-16.98	QP	
4	0.2620	23.69	10.96	34.65	51.36	-16.71	AVG	
5	0.4500	30.37	10.98	41.35	56.87	-15.52	QP	
6	0.4500	17.36	10.98	28.34	46.87	-18.53	AVG	
7	1.5859	32.63	11.06	43.69	56.00	-12.31	QP	
8	1.5859	21.73	11.06	32.79	46.00	-13.21	AVG	
9	1.8540	31.86	11.08	42.94	56.00	-13.06	QP	
10	1.8540	23.62	11.08	34.70	46.00	-11.30	AVG	
11	2.5620	30.95	11.11	42.06	56.00	-13.94	QP	
12	2.5620	22.03	11.11	33.14	46.00	-12.86	AVG	

Neutral line:

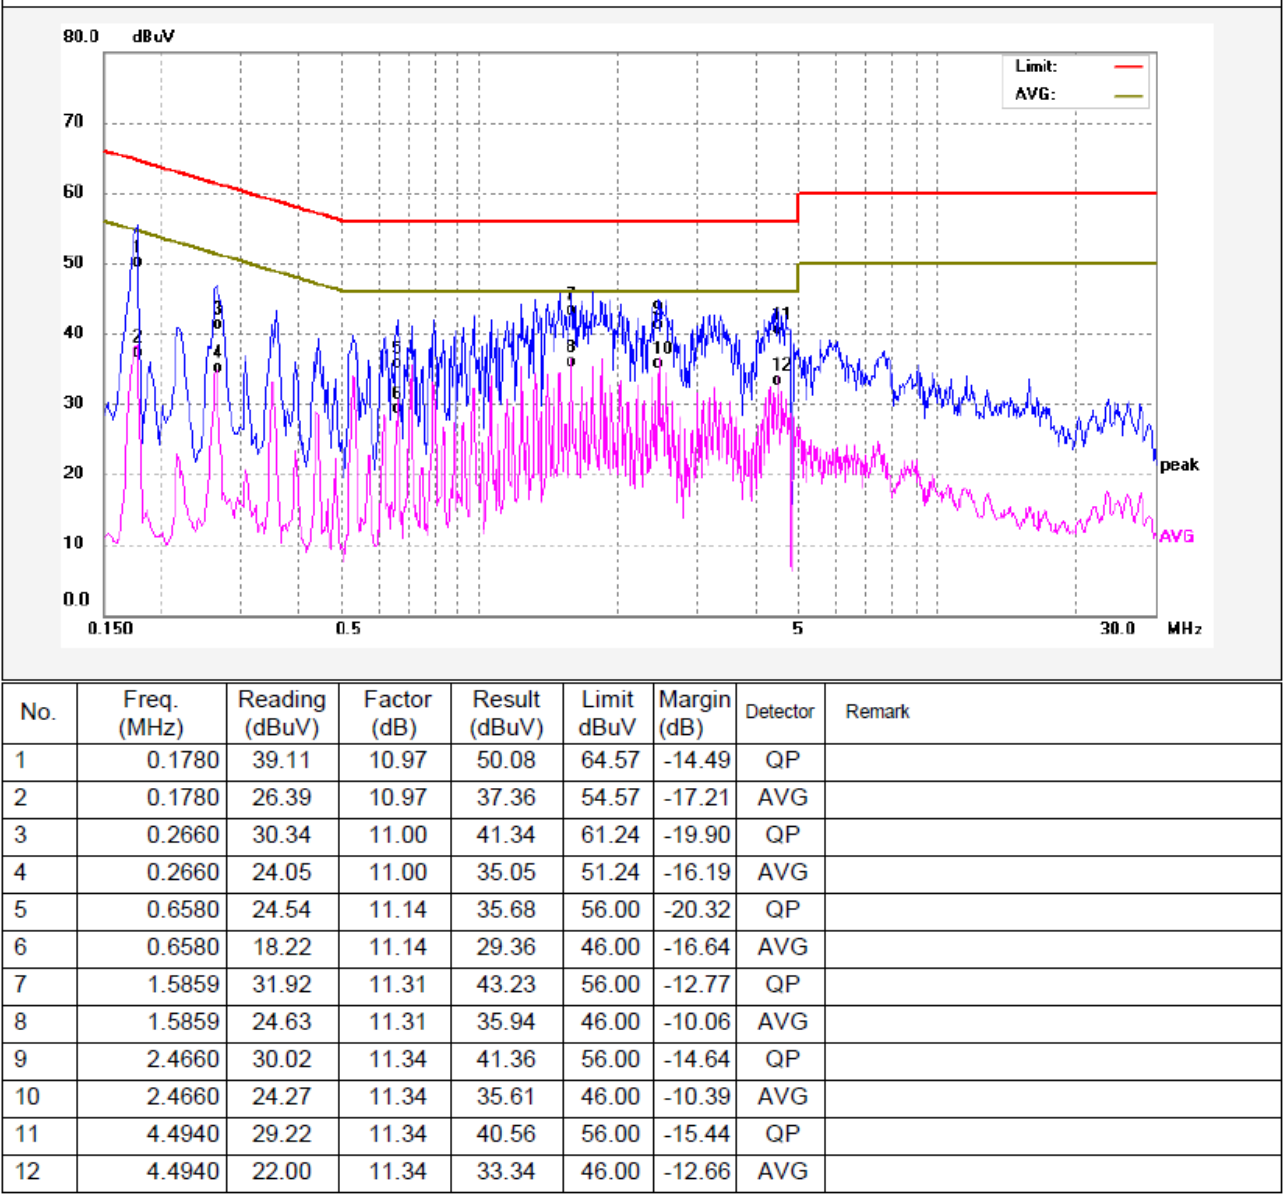

9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

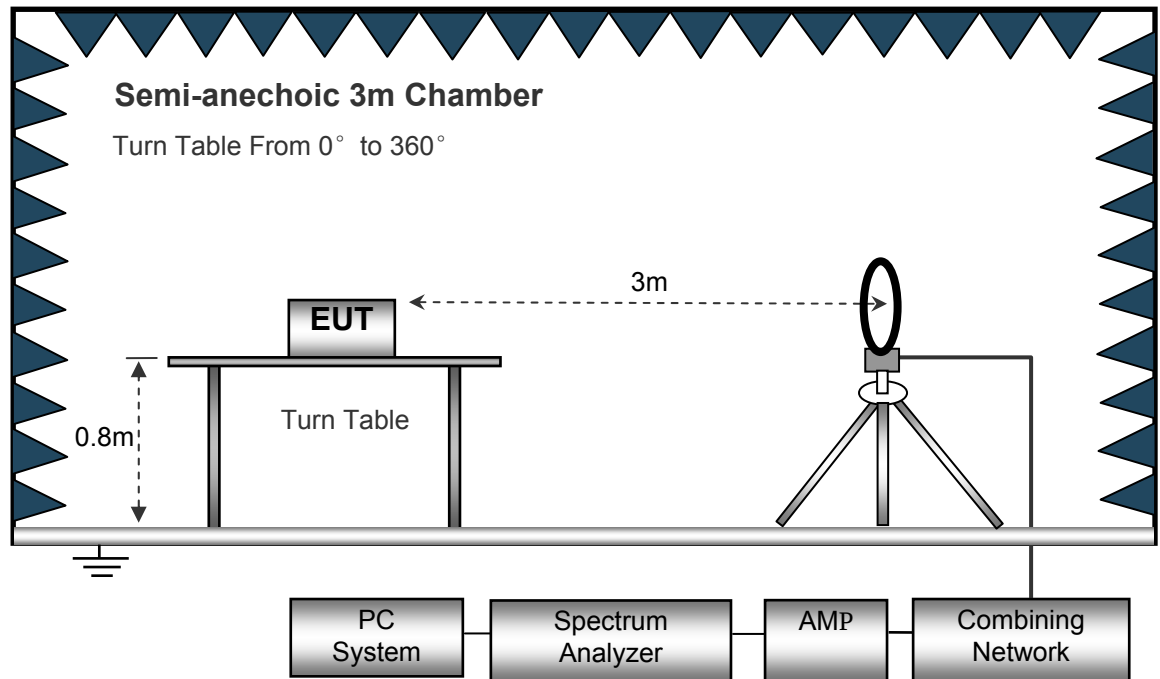

The test setup for emission measurement from 30 MHz to 1 GHz.

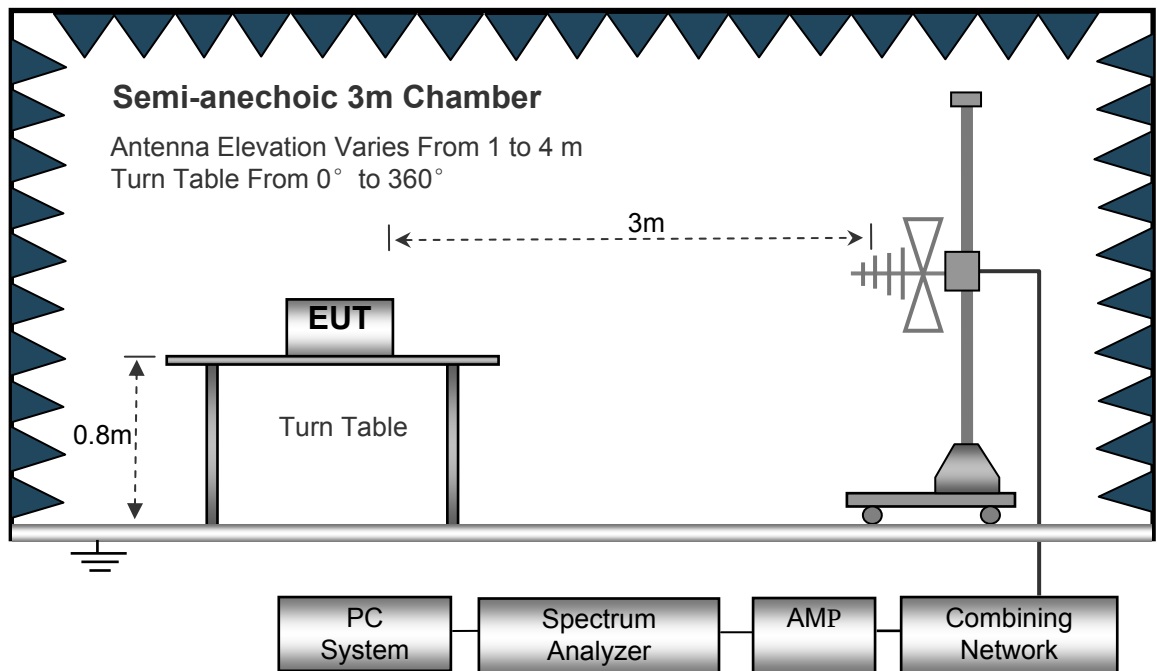

The test setup for emission measurement above 1 GHz.

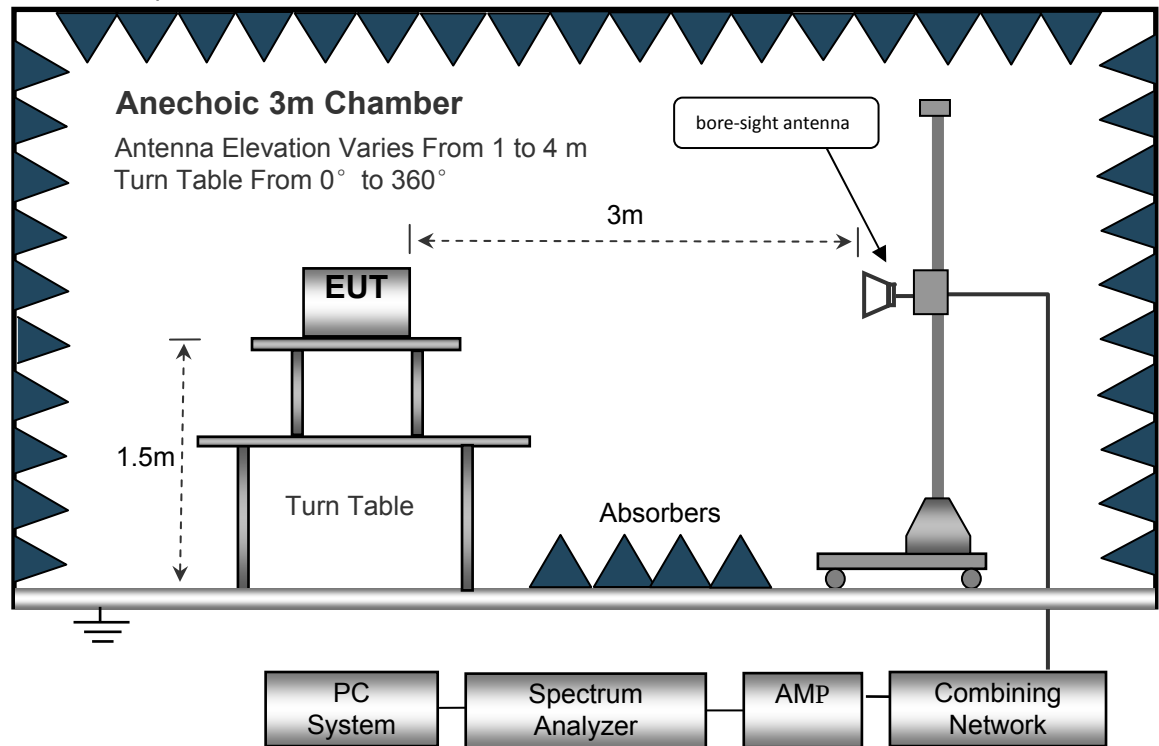

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b: Low Channel 2412MHz									
425.33	40.43	QP	239	1.1	H	-13.21	27.22	46.00	-18.78
425.33	46.92	QP	255	1.6	V	-13.21	33.71	46.00	-12.29
4824.00	53.48	PK	205	1.4	V	-1.06	52.42	74.00	-21.58
4824.00	41.17	Ave	205	1.4	V	-1.06	40.11	54.00	-13.89
7236.00	49.51	PK	230	1.8	H	1.33	50.84	74.00	-23.16
7236.00	38.98	Ave	230	1.8	H	1.33	40.31	54.00	-13.69
2314.75	47.58	PK	129	1.5	V	-13.19	34.39	74.00	-39.61
2314.75	37.42	Ave	129	1.5	V	-13.19	24.23	54.00	-29.77
2376.81	43.73	PK	153	1.2	H	-13.14	30.59	74.00	-43.41
2376.81	36.40	Ave	153	1.2	H	-13.14	23.26	54.00	-30.74
2493.67	44.02	PK	325	1.2	V	-13.08	30.94	74.00	-43.06
2493.67	37.57	Ave	325	1.2	V	-13.08	24.49	54.00	-29.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b: Middle Channel 2437MHz									
425.33	39.28	QP	230	1.3	H	-13.21	26.07	46.00	-19.93
425.33	45.87	QP	351	1.2	V	-13.21	32.66	46.00	-13.34
4874.00	54.63	PK	316	1.4	V	-0.62	54.01	74.00	-19.99
4874.00	40.59	Ave	316	1.4	V	-0.62	39.97	54.00	-14.03
7311.00	48.94	PK	58	1.1	H	2.21	51.15	74.00	-22.85
7311.00	39.97	Ave	58	1.1	H	2.21	42.18	54.00	-11.82
2311.46	46.24	PK	360	1.0	V	-13.19	33.05	74.00	-40.95
2311.46	38.52	Ave	360	1.0	V	-13.19	25.33	54.00	-28.67
2374.47	44.36	PK	59	1.8	H	-13.14	31.22	74.00	-42.78
2374.47	37.83	Ave	59	1.8	H	-13.14	24.69	54.00	-29.31
2486.52	44.98	PK	241	1.1	V	-13.08	31.90	74.00	-42.10
2486.52	36.49	Ave	241	1.1	V	-13.08	23.41	54.00	-30.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b: High Channel 2462MHz									
425.33	38.75	QP	203	1.2	H	-13.21	25.54	46.00	-20.46
425.33	46.73	QP	231	1.5	V	-13.21	33.52	46.00	-12.48
4924.00	54.28	PK	22	1.3	V	-0.24	54.04	74.00	-19.96
4924.00	40.95	Ave	22	1.3	V	-0.24	40.71	54.00	-13.29
7386.00	49.50	PK	178	1.1	H	2.84	52.34	74.00	-21.66
7386.00	39.22	Ave	178	1.1	H	2.84	42.06	54.00	-11.94
2345.45	46.65	PK	289	1.8	V	-13.19	33.46	74.00	-40.54
2345.45	37.75	Ave	289	1.8	V	-13.19	24.56	54.00	-29.44
2388.07	42.29	PK	304	1.6	H	-13.14	29.15	74.00	-44.85
2388.07	38.15	Ave	304	1.6	H	-13.14	25.01	54.00	-28.99
2483.51	44.81	PK	111	1.2	V	-13.08	31.73	74.00	-42.27
2483.51	38.22	Ave	111	1.2	V	-13.08	25.14	54.00	-28.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g Low Channel 2412MHz									
425.33	43.48	QP	165	1.4	H	-13.21	30.27	46.00	-15.73
425.33	48.19	QP	315	1.5	V	-13.21	34.98	46.00	-11.02
4824.00	54.17	PK	356	1.1	V	-1.06	53.11	74.00	-20.89
4824.00	39.80	Ave	356	1.1	V	-1.06	38.74	54.00	-15.26
7236.00	48.91	PK	234	1.1	H	1.33	50.24	74.00	-23.76
7236.00	39.40	Ave	234	1.1	H	1.33	40.73	54.00	-13.27
2322.43	46.28	PK	215	1.8	V	-13.19	33.09	74.00	-40.91
2322.43	37.62	Ave	215	1.8	V	-13.19	24.43	54.00	-29.57
2365.11	44.80	PK	198	1.9	H	-13.14	31.66	74.00	-42.34
2365.11	38.55	Ave	198	1.9	H	-13.14	25.41	54.00	-28.59
2492.94	43.84	PK	119	1.4	V	-13.08	30.76	74.00	-43.24
2492.94	38.31	Ave	119	1.4	V	-13.08	25.23	54.00	-28.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g Middle Channel 2437MHz									
425.33	40.54	QP	262	1.3	H	-13.21	27.33	46.00	-18.67
425.33	47.26	QP	326	1.2	V	-13.21	34.05	46.00	-11.95
4874.00	50.50	PK	307	1.8	V	-0.62	49.88	74.00	-24.12
4874.00	41.71	Ave	307	1.8	V	-0.62	41.09	54.00	-12.91
7311.00	49.85	PK	355	1.1	H	2.21	52.06	74.00	-21.94
7311.00	38.43	Ave	355	1.1	H	2.21	40.64	54.00	-13.36
2345.85	46.09	PK	255	1.8	V	-13.19	32.90	74.00	-41.10
2345.85	39.93	Ave	255	1.8	V	-13.19	26.74	54.00	-27.26
2375.12	42.83	PK	193	1.6	H	-13.14	29.69	74.00	-44.31
2375.12	38.05	Ave	193	1.6	H	-13.14	24.91	54.00	-29.09
2483.62	44.70	PK	199	1.4	V	-13.08	31.62	74.00	-42.38
2483.62	37.00	Ave	199	1.4	V	-13.08	23.92	54.00	-30.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11g High Channel 2462MHz									
425.33	39.90	QP	83	1.7	H	-13.21	26.69	46.00	-19.31
425.33	46.01	QP	237	1.8	V	-13.21	32.80	46.00	-13.20
4924.00	50.80	PK	279	2.0	V	-0.24	50.56	74.00	-23.44
4924.00	42.97	Ave	279	2.0	V	-0.24	42.73	54.00	-11.27
7386.00	49.53	PK	33	1.8	H	2.84	52.37	74.00	-21.63
7386.00	37.33	Ave	33	1.8	H	2.84	40.17	54.00	-13.83
2332.21	45.12	PK	280	1.8	V	-13.19	31.93	74.00	-42.07
2332.21	38.76	Ave	280	1.8	V	-13.19	25.57	54.00	-28.43
2358.26	43.04	PK	307	1.4	H	-13.14	29.90	74.00	-44.10
2358.26	38.16	Ave	307	1.4	H	-13.14	25.02	54.00	-28.98
2486.43	44.13	PK	166	1.2	V	-13.08	31.05	74.00	-42.95
2486.43	36.35	Ave	166	1.2	V	-13.08	23.27	54.00	-30.73

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) Low Channel 2412MHz									
425.33	42.76	QP	54	1.3	H	-13.21	29.55	46.00	-16.45
425.33	44.81	QP	11	1.5	V	-13.21	31.60	46.00	-14.40
4824.00	53.36	PK	220	1.3	V	-1.06	52.30	74.00	-21.70
4824.00	40.86	Ave	220	1.3	V	-1.06	39.80	54.00	-14.20
7236.00	51.81	PK	318	1.9	H	1.33	53.14	74.00	-20.86
7236.00	41.04	Ave	318	1.9	H	1.33	42.37	54.00	-11.63
2322.21	45.73	PK	112	1.3	V	-13.19	32.54	74.00	-41.46
2322.21	39.72	Ave	112	1.3	V	-13.19	26.53	54.00	-27.47
2358.17	42.24	PK	61	1.8	H	-13.14	29.10	74.00	-44.90
2358.17	38.35	Ave	61	1.8	H	-13.14	25.21	54.00	-28.79
2485.95	44.22	PK	156	1.3	V	-13.08	31.14	74.00	-42.86
2485.95	36.86	Ave	156	1.3	V	-13.08	23.78	54.00	-30.22

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) Middle Channel 2437MHz									
425.33	36.63	QP	104	2.0	H	-13.21	23.42	46.00	-22.58
425.33	44.18	QP	119	1.9	V	-13.21	30.97	46.00	-15.03
4874.00	51.19	PK	29	1.1	V	-0.62	50.57	74.00	-23.43
4874.00	43.13	Ave	29	1.1	V	-0.62	42.51	54.00	-11.49
7311.00	48.88	PK	85	1.0	H	2.21	51.09	74.00	-22.91
7311.00	39.69	Ave	85	1.0	H	2.21	41.90	54.00	-12.10
2347.38	46.88	PK	45	1.2	V	-13.19	33.69	74.00	-40.31
2347.38	38.11	Ave	45	1.2	V	-13.19	24.92	54.00	-29.08
2378.89	42.47	PK	339	1.1	H	-13.14	29.33	74.00	-44.67
2378.89	36.74	Ave	339	1.1	H	-13.14	23.60	54.00	-30.40
2497.23	44.36	PK	260	1.5	V	-13.08	31.28	74.00	-42.72
2497.23	38.20	Ave	260	1.5	V	-13.08	25.12	54.00	-28.88

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) High Channel 2462MHz									
425.33	41.39	QP	331	1.2	H	-13.21	28.18	46.00	-17.82
425.33	46.42	QP	202	1.7	V	-13.21	33.21	46.00	-12.79
4924.00	53.83	PK	200	1.3	V	-0.24	53.59	74.00	-20.41
4924.00	44.10	Ave	200	1.3	V	-0.24	43.86	54.00	-10.14
7386.00	49.06	PK	229	1.4	H	2.84	51.90	74.00	-22.10
7386.00	38.82	Ave	229	1.4	H	2.84	41.66	54.00	-12.34
2340.82	46.93	PK	293	1.0	V	-13.19	33.74	74.00	-40.26
2340.82	38.18	Ave	293	1.0	V	-13.19	24.99	54.00	-29.01
2364.07	43.05	PK	128	1.4	H	-13.14	29.91	74.00	-44.09
2364.07	37.30	Ave	128	1.4	H	-13.14	24.16	54.00	-29.84
2494.19	42.43	PK	273	1.6	V	-13.08	29.35	74.00	-44.65
2494.19	36.28	Ave	273	1.6	V	-13.08	23.20	54.00	-30.80

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) Low Channel 2422MHz									
425.33	42.45	QP	330	1.6	H	-13.21	29.24	46.00	-16.76
425.33	46.66	QP	234	1.8	V	-13.21	33.45	46.00	-12.55
4844.00	52.63	PK	78	1.8	V	-1.06	51.57	74.00	-22.43
4844.00	41.13	Ave	78	1.8	V	-1.06	40.07	54.00	-13.93
7266.00	48.03	PK	40	1.8	H	1.33	49.36	74.00	-24.64
7266.00	36.41	Ave	40	1.8	H	1.33	37.74	54.00	-16.26
2316.38	45.23	PK	154	1.0	V	-13.19	32.04	74.00	-41.96
2316.38	37.63	Ave	154	1.0	V	-13.19	24.44	54.00	-29.56
2353.46	44.62	PK	186	1.4	H	-13.14	31.48	74.00	-42.52
2353.46	37.90	Ave	186	1.4	H	-13.14	24.76	54.00	-29.24
2486.31	42.20	PK	197	1.4	V	-13.08	29.12	74.00	-44.88
2486.31	37.05	Ave	197	1.4	V	-13.08	23.97	54.00	-30.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) Middle Channel 2437MHz									
425.33	44.37	QP	270	1.0	H	-13.21	31.16	46.00	-14.84
425.33	46.69	QP	350	1.9	V	-13.21	33.48	46.00	-12.52
4874.00	49.26	PK	185	1.7	V	-0.62	48.64	74.00	-25.36
4874.00	41.37	Ave	185	1.7	V	-0.62	40.75	54.00	-13.25
7311.00	44.74	PK	84	1.7	H	2.21	46.95	74.00	-27.05
7311.00	37.60	Ave	84	1.7	H	2.21	39.81	54.00	-14.19
2332.82	45.22	PK	171	1.3	V	-13.19	32.03	74.00	-41.97
2332.82	39.87	Ave	171	1.3	V	-13.19	26.68	54.00	-27.32
2363.59	44.43	PK	184	1.9	H	-13.14	31.29	74.00	-42.71
2363.59	36.87	Ave	184	1.9	H	-13.14	23.73	54.00	-30.27
2487.25	43.11	PK	321	2.0	V	-13.08	30.03	74.00	-43.97
2487.25	38.03	Ave	321	2.0	V	-13.08	24.95	54.00	-29.05

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) High Channel 2452MHz									
425.33	46.07	QP	264	1.7	H	-13.21	32.86	46.00	-13.14
425.33	42.89	QP	130	1.2	V	-13.21	29.68	46.00	-16.32
4904.00	49.45	PK	293	1.3	V	-0.24	49.21	74.00	-24.79
4904.00	39.33	Ave	293	1.3	V	-0.24	39.09	54.00	-14.91
7356.00	45.85	PK	118	1.6	H	2.84	48.69	74.00	-25.31
7356.00	32.87	Ave	118	1.6	H	2.84	35.71	54.00	-18.29
2314.85	46.09	PK	71	1.2	V	-13.19	32.90	74.00	-41.10
2314.85	37.88	Ave	71	1.2	V	-13.19	24.69	54.00	-29.31
2375.03	44.38	PK	142	1.6	H	-13.14	31.24	74.00	-42.76
2375.03	37.82	Ave	142	1.6	H	-13.14	24.68	54.00	-29.32
2491.15	43.85	PK	219	1.6	V	-13.08	30.77	74.00	-43.23
2491.15	37.95	Ave	219	1.6	V	-13.08	24.87	54.00	-29.13

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ax(HT20) Low Channel 2412MHz									
425.33	43.86	QP	11	1.8	H	-13.21	30.65	46.00	-15.35
425.33	42.52	QP	124	1.5	V	-13.21	29.31	46.00	-16.69
4824.00	53.33	PK	47	2.0	V	-1.06	52.27	74.00	-21.73
4824.00	43.20	Ave	47	2.0	V	-1.06	42.14	54.00	-11.86
7236.00	52.39	PK	93	1.9	H	1.33	53.72	74.00	-20.28
7236.00	40.13	Ave	93	1.9	H	1.33	41.46	54.00	-12.54
2347.17	45.74	PK	255	1.4	V	-13.19	32.55	74.00	-41.45
2347.17	37.09	Ave	255	1.4	V	-13.19	23.90	54.00	-30.10
2389.34	42.33	PK	226	1.8	H	-13.14	29.19	74.00	-44.81
2389.34	38.89	Ave	226	1.8	H	-13.14	25.75	54.00	-28.25
2485.17	43.81	PK	189	1.9	V	-13.08	30.73	74.00	-43.27
2485.17	36.40	Ave	189	1.9	V	-13.08	23.32	54.00	-30.68

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ax(HT20) Middle Channel 2437MHz									
425.33	43.56	QP	303	2.0	H	-13.21	30.35	46.00	-15.65
425.33	41.72	QP	213	1.9	V	-13.21	28.51	46.00	-17.49
4874.00	54.08	PK	48	1.1	V	-0.62	53.46	74.00	-20.54
4874.00	42.66	Ave	48	1.1	V	-0.62	42.04	54.00	-11.96
7311.00	51.08	PK	355	1.1	H	2.21	53.29	74.00	-20.71
7311.00	41.41	Ave	355	1.1	H	2.21	43.62	54.00	-10.38
2318.27	46.01	PK	181	1.5	V	-13.19	32.82	74.00	-41.18
2318.27	39.60	Ave	181	1.5	V	-13.19	26.41	54.00	-27.59
2381.76	42.35	PK	326	1.1	H	-13.14	29.21	74.00	-44.79
2381.76	38.66	Ave	326	1.1	H	-13.14	25.52	54.00	-28.48
2485.20	42.57	PK	98	1.6	V	-13.08	29.49	74.00	-44.51
2485.20	38.68	Ave	98	1.6	V	-13.08	25.60	54.00	-28.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ax(HT20) High Channel 2462MHz									
425.33	43.42	QP	0	1.7	H	-13.21	30.21	46.00	-15.79
425.33	42.68	QP	100	1.0	V	-13.21	29.47	46.00	-16.53
4924.00	52.81	PK	224	1.5	V	-0.24	52.57	74.00	-21.43
4924.00	43.05	Ave	224	1.5	V	-0.24	42.81	54.00	-11.19
7386.00	50.48	PK	143	1.4	H	2.84	53.32	74.00	-20.68
7386.00	42.14	Ave	143	1.4	H	2.84	44.98	54.00	-9.02
2337.86	45.29	PK	20	1.0	V	-13.19	32.10	74.00	-41.90
2337.86	37.81	Ave	20	1.0	V	-13.19	24.62	54.00	-29.38
2384.32	42.82	PK	255	1.8	H	-13.14	29.68	74.00	-44.32
2384.32	38.27	Ave	255	1.8	H	-13.14	25.13	54.00	-28.87
2484.67	43.41	PK	298	1.7	V	-13.08	30.33	74.00	-43.67
2484.67	37.74	Ave	298	1.7	V	-13.08	24.66	54.00	-29.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ax(HT40) Low Channel 2422MHz									
425.33	42.90	QP	99	1.2	H	-13.21	29.69	46.00	-16.31
425.33	43.97	QP	334	1.3	V	-13.21	30.76	46.00	-15.24
4844.00	50.08	PK	58	1.3	V	-1.06	49.02	74.00	-24.98
4844.00	40.91	Ave	58	1.3	V	-1.06	39.85	54.00	-14.15
7266.00	48.73	PK	153	1.6	H	1.33	50.06	74.00	-23.94
7266.00	39.72	Ave	153	1.6	H	1.33	41.05	54.00	-12.95
2332.53	46.72	PK	267	1.4	V	-13.19	33.53	74.00	-40.47
2332.53	37.04	Ave	267	1.4	V	-13.19	23.85	54.00	-30.15
2383.71	44.80	PK	334	1.4	H	-13.14	31.66	74.00	-42.34
2383.71	37.92	Ave	334	1.4	H	-13.14	24.78	54.00	-29.22
2485.84	43.72	PK	340	1.5	V	-13.08	30.64	74.00	-43.36
2485.84	37.92	Ave	340	1.5	V	-13.08	24.84	54.00	-29.16

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ax(HT40) Middle Channel 2437MHz									
425.33	43.48	QP	97	2.0	H	-13.21	30.27	46.00	-15.73
425.33	43.59	QP	288	1.5	V	-13.21	30.38	46.00	-15.62
4874.00	50.47	PK	271	1.1	V	-0.62	49.85	74.00	-24.15
4874.00	41.20	Ave	271	1.1	V	-0.62	40.58	54.00	-13.42
7311.00	49.04	PK	290	1.9	H	2.21	51.25	74.00	-22.75
7311.00	40.58	Ave	290	1.9	H	2.21	42.79	54.00	-11.21
2342.41	45.30	PK	115	1.8	V	-13.19	32.11	74.00	-41.89
2342.41	39.73	Ave	115	1.8	V	-13.19	26.54	54.00	-27.46
2385.24	44.97	PK	44	1.5	H	-13.14	31.83	74.00	-42.17
2385.24	38.16	Ave	44	1.5	H	-13.14	25.02	54.00	-28.98
2497.43	42.17	PK	314	1.2	V	-13.08	29.09	74.00	-44.91
2497.43	38.48	Ave	314	1.2	V	-13.08	25.40	54.00	-28.60

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ax(HT40) High Channel 2452MHz									
425.33	43.85	QP	159	1.2	H	-13.21	30.64	46.00	-15.36
425.33	44.07	QP	277	1.7	V	-13.21	30.86	46.00	-15.14
4904.00	49.63	PK	323	1.4	V	-0.24	49.39	74.00	-24.61
4904.00	41.13	Ave	323	1.4	V	-0.24	40.89	54.00	-13.11
7356.00	49.79	PK	256	1.9	H	2.84	52.63	74.00	-21.37
7356.00	41.01	Ave	256	1.9	H	2.84	43.85	54.00	-10.15
2337.29	45.18	PK	249	2.0	V	-13.19	31.99	74.00	-42.01
2337.29	37.05	Ave	249	2.0	V	-13.19	23.86	54.00	-30.14
2383.00	42.74	PK	53	1.7	H	-13.14	29.60	74.00	-44.40
2383.00	38.63	Ave	53	1.7	H	-13.14	25.49	54.00	-28.51
2488.62	43.32	PK	73	2.0	V	-13.08	30.24	74.00	-43.76
2488.62	38.46	Ave	73	2.0	V	-13.08	25.38	54.00	-28.62

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to _ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ [3 × RBW].
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result


9KHz – 30MHz

Mode: TX 11b channel 1

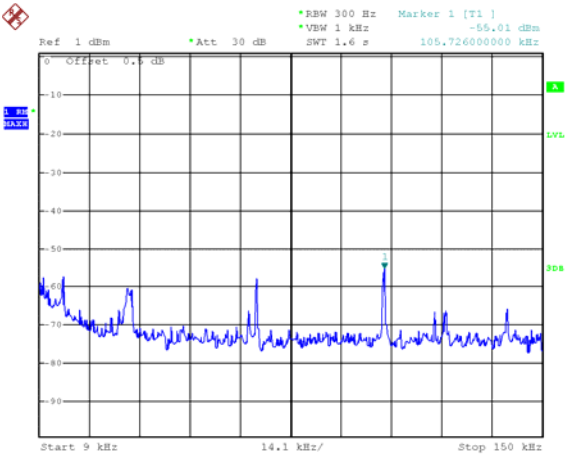


Date: 21.FEB.2024 16:42:32

Mode: TX 11b channel 1

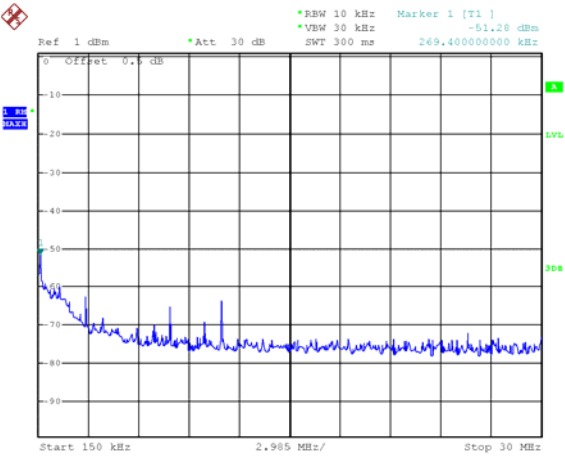


Date: 21.FEB.2024 16:42:54

Mode: TX 11b channel 6

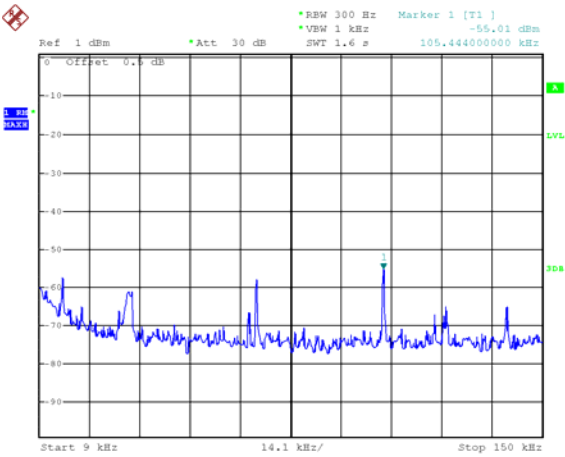


Date: 21.FEB.2024 16:44:21

Mode: TX 11b channel 6

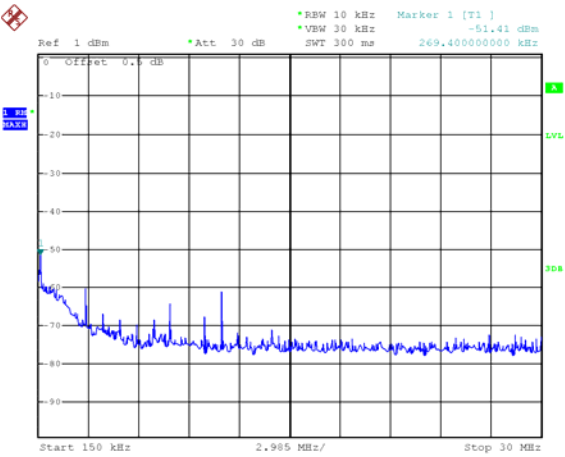


Date: 21.FEB.2024 16:44:39

Mode: TX 11b channel 11

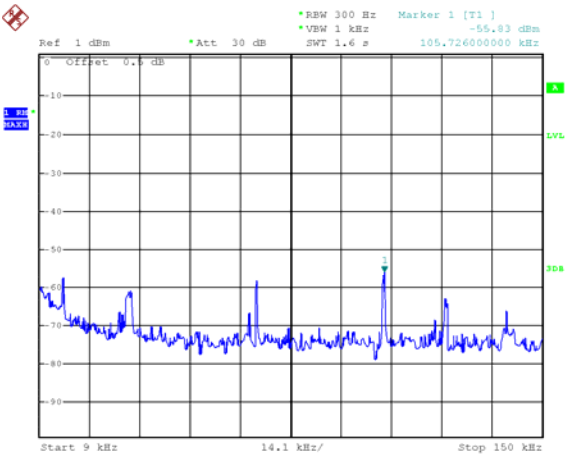


Date: 21.FEB.2024 16:46:11

Mode: TX 11b channel 11

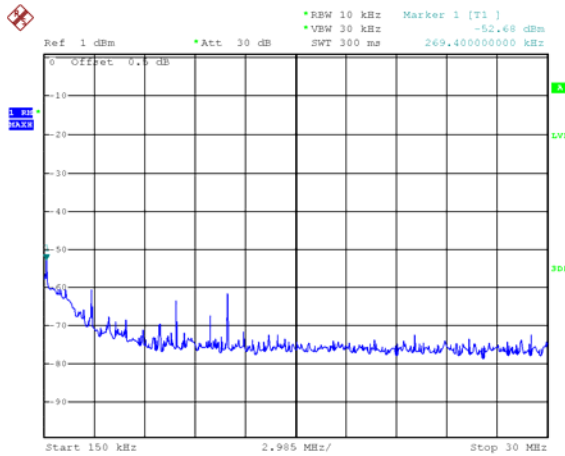


Date: 21.FEB.2024 16:46:29

Mode: TX 11g channel 1

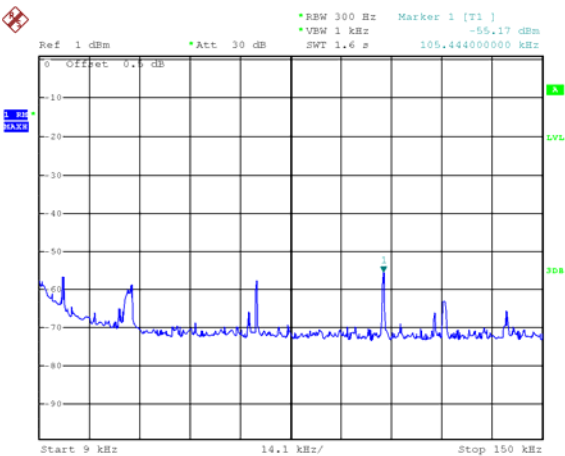


Date: 21.FEB.2024 16:35:49

Mode: TX 11g channel 1

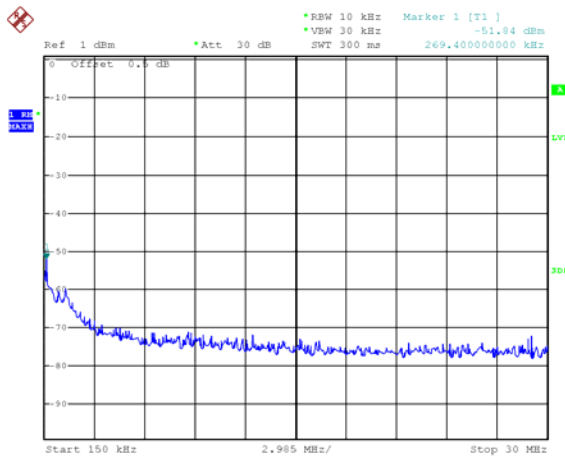


Date: 21.FEB.2024 16:36:06

Mode: TX 11g channel 6

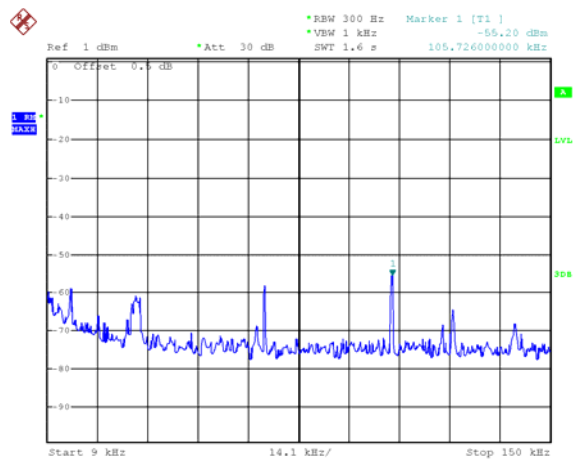


Date: 21.FEB.2024 16:37:59

Mode: TX 11g channel 6

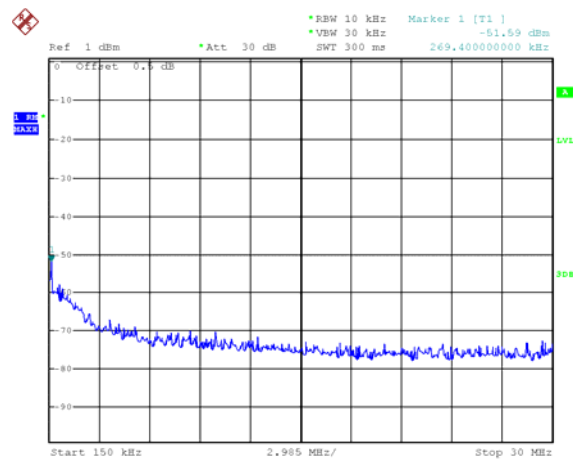


Date: 21.FEB.2024 16:38:19

Mode: TX 11g channel 11

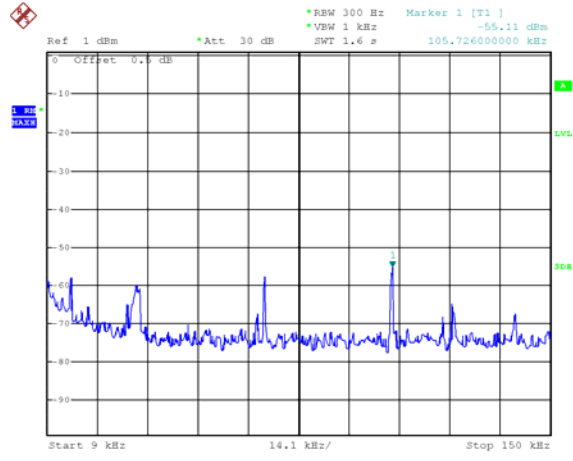


Date: 21.FEB.2024 16:40:07

Mode: TX 11g channel 11

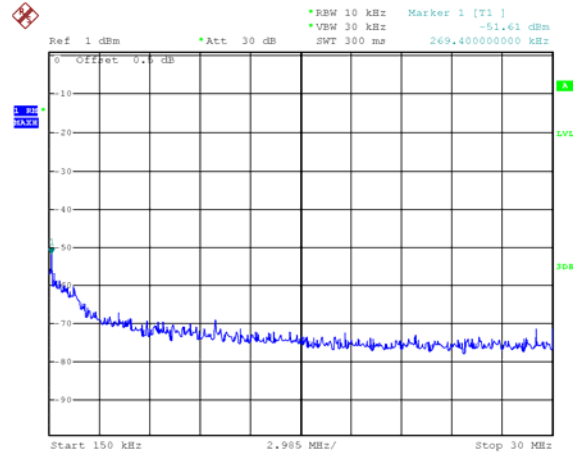


Date: 21.FEB.2024 16:40:29

Mode: TX 11n HT20 channel 1

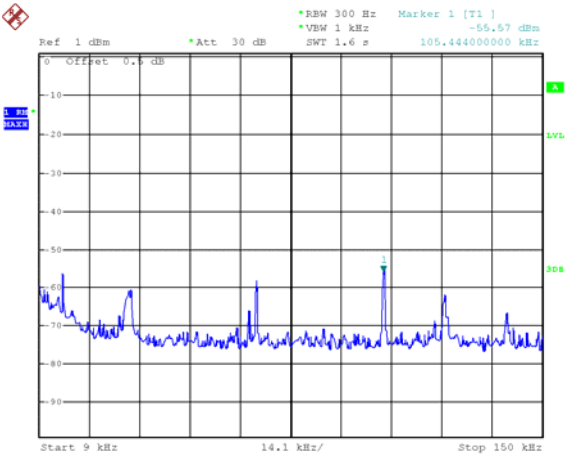


Date: 21.FEB.2024 16:14:09

Mode: TX 11n HT20 channel 1

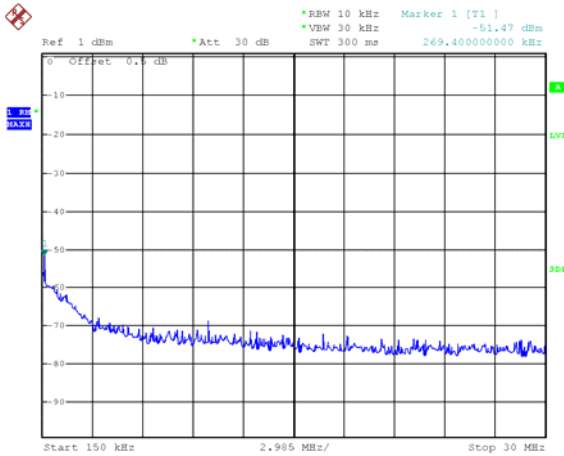


Date: 21.FEB.2024 16:14:30

Mode: TX 11 n HT20 channel 6

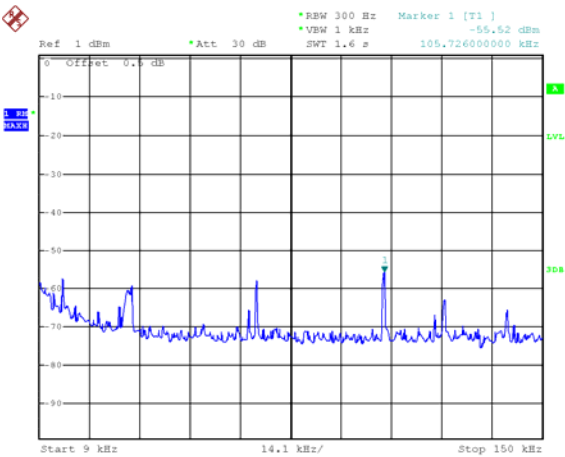


Date: 21.FEB.2024 16:18:37

Mode: TX 11 n HT20 channel 6

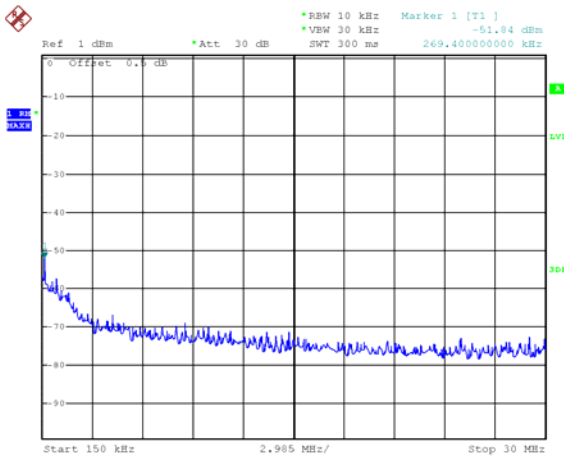


Date: 21.FEB.2024 16:22:07

Mode: TX 11 n HT20 channel 11

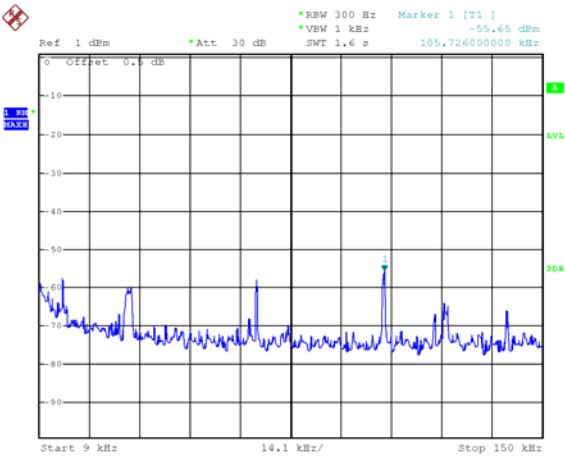


Date: 21.FEB.2024 16:24:45

Mode: TX 11 n HT20 channel 11

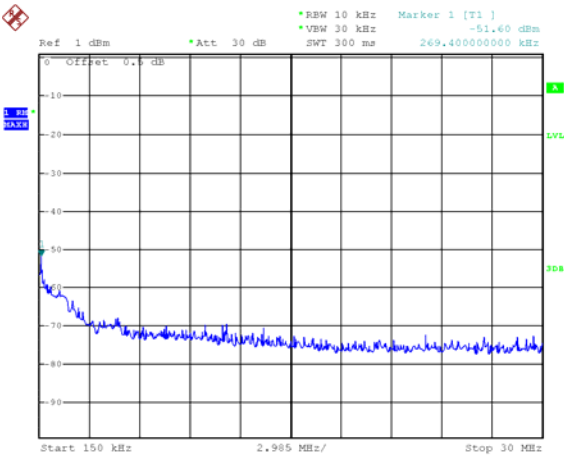


Date: 21.FEB.2024 16:25:06

Mode: TX 11n HT40 channel 3

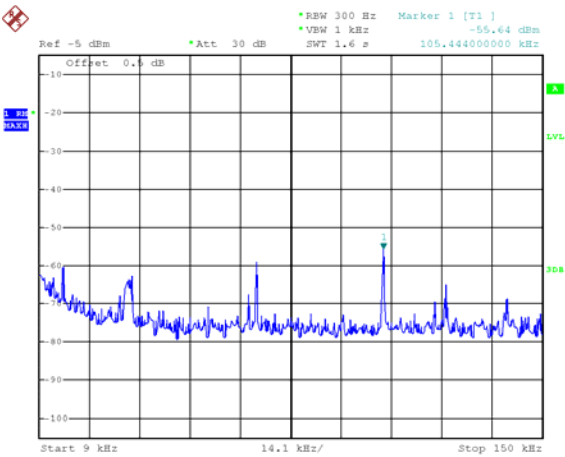


Date: 21.FEB.2024 15:44:44

Mode: TX 11n HT40 channel 3

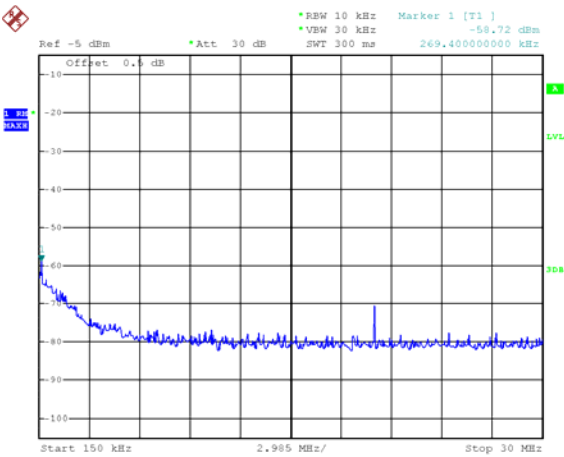


Date: 21.FEB.2024 16:06:13

Mode: TX 11 n HT40 channel 6

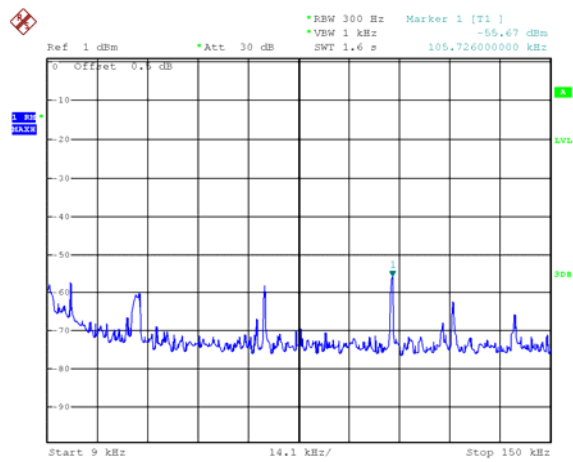


Date: 21.FEB.2024 16:09:07

Mode: TX 11 n HT40 channel 6

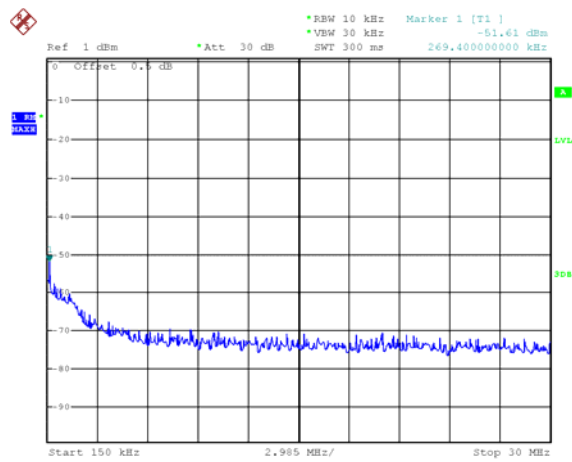


Date: 21.FEB.2024 16:09:26

Mode: TX 11 n HT40 channel 9

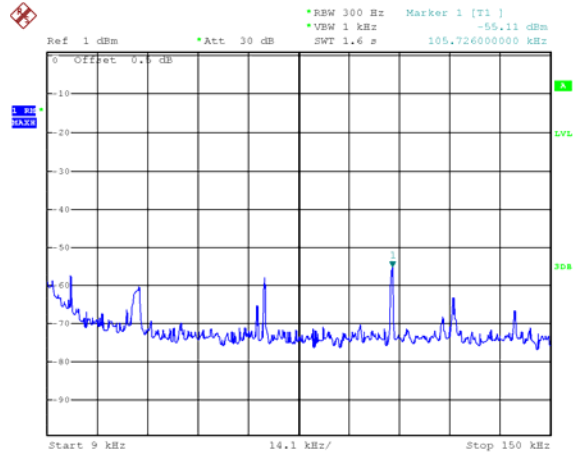


Date: 21.FEB.2024 16:12:02

Mode: TX 11 n HT40 channel 9

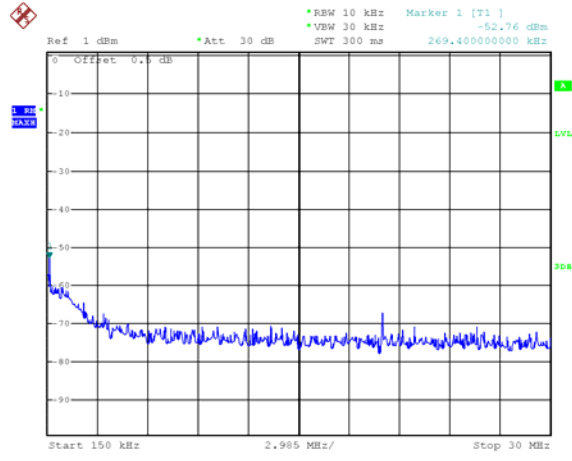


Date: 21.FEB.2024 16:12:27

Mode: TX 11ax HT20 channel 1

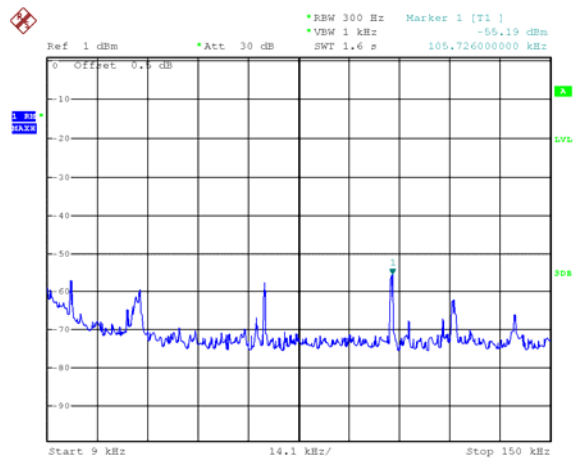


Date: 11.MAR.2024 16:22:37

Mode: TX 11ax HT20 channel 1

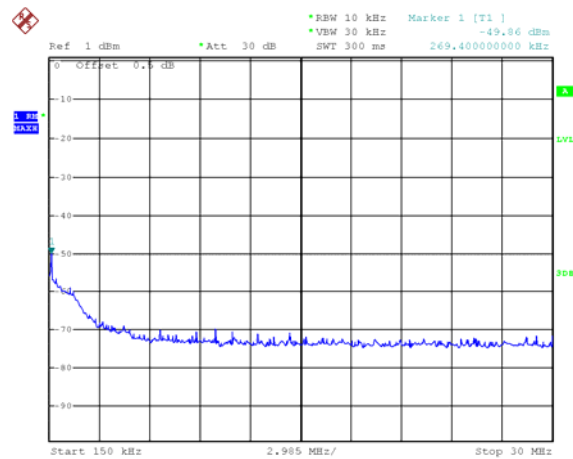


Date: 11.MAR.2024 16:26:35

Mode: TX 11 ax HT20 channel 6

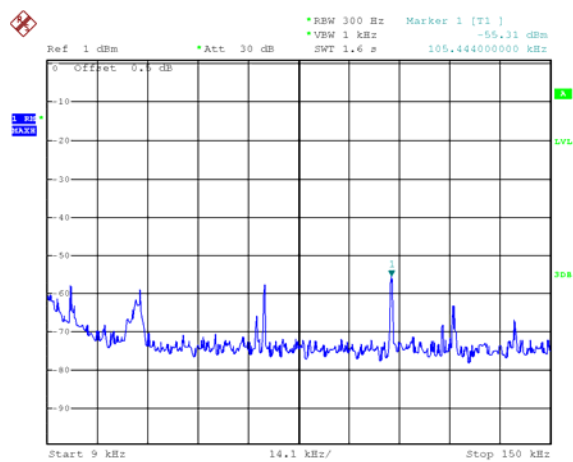


Date: 11.MAR.2024 16:27:13

Mode: TX 11 ax HT20 channel 6

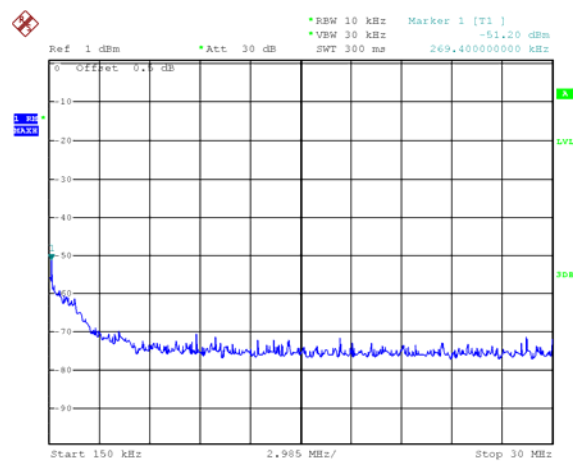


Date: 11.MAR.2024 16:27:37

Mode: TX 11ax HT20 channel 11

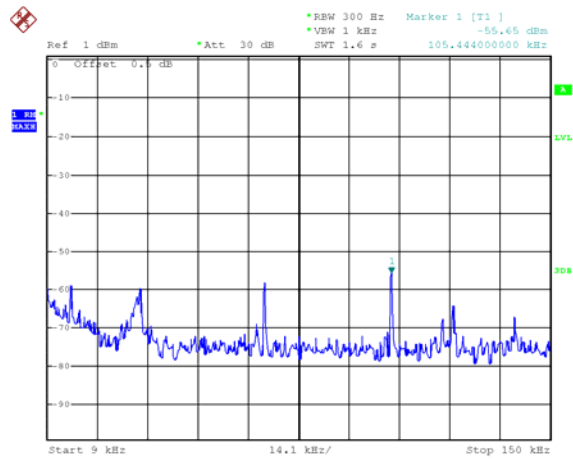


Date: 11.MAR.2024 16:28:00

Mode: TX 11 ax HT20 channel 11

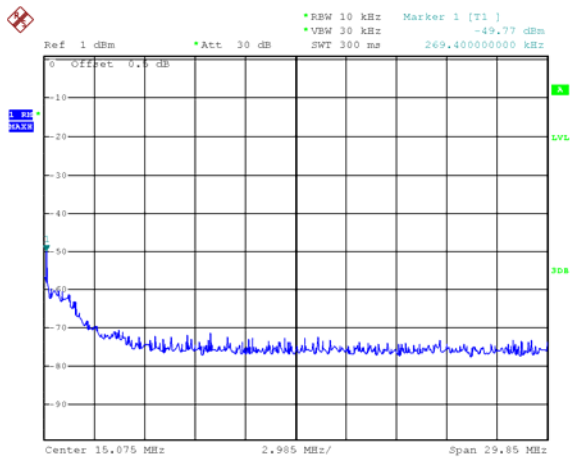


Date: 11.MAR.2024 16:28:24

Mode: TX 11ax HT40 channel 3

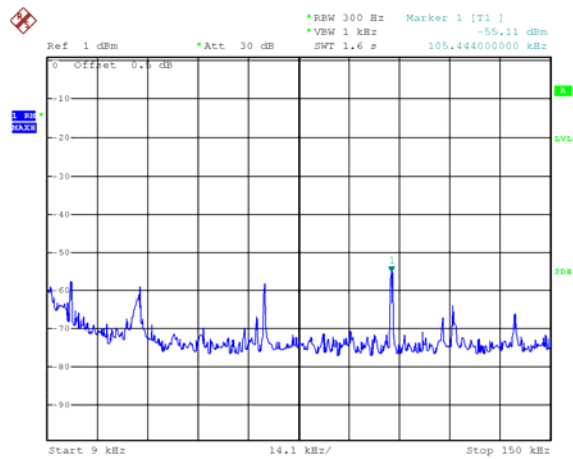


Date: 11.MAR.2024 16:29:03

Mode: TX 11ax HT40 channel 3

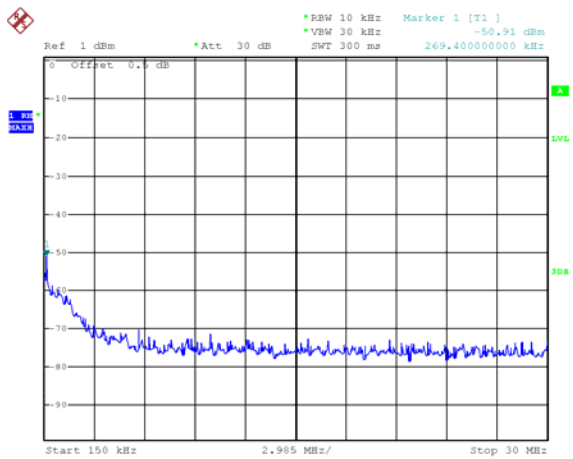


Date: 11.MAR.2024 16:29:25

Mode: TX 11 ax HT40 channel 6

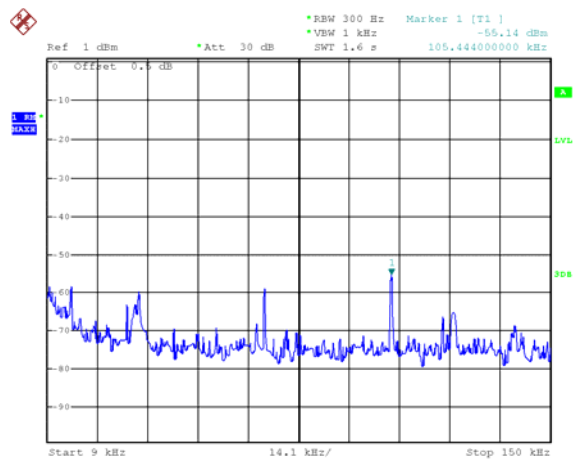


Date: 11.MAR.2024 16:29:55

Mode: TX 11 ax HT40 channel 6

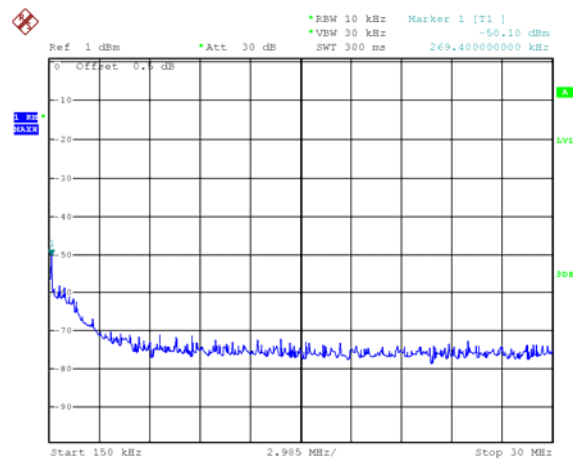


Date: 11.MAR.2024 16:30:18

Mode: TX 11 ax HT40 channel 9

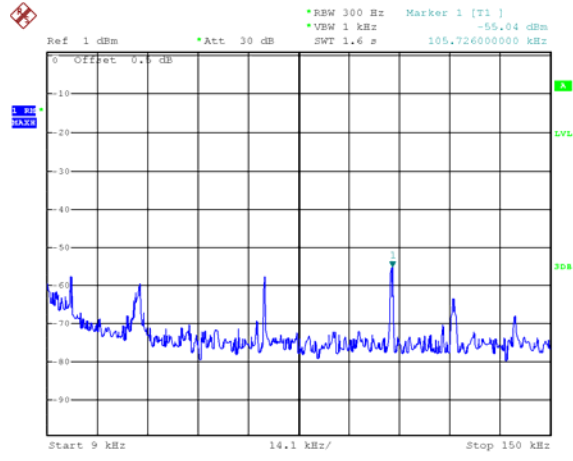

Date: 11.MAR.2024 16:30:38

Mode: TX 11 ax HT40 channel 9

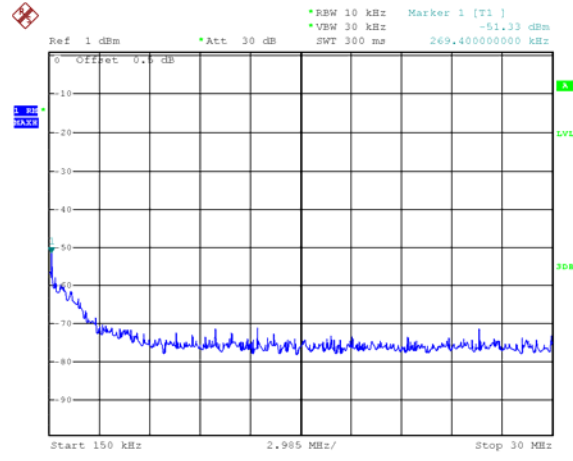


Date: 11.MAR.2024 16:31:06

Above 30MHz

Mode: TX 11b channel 1


Fundamental

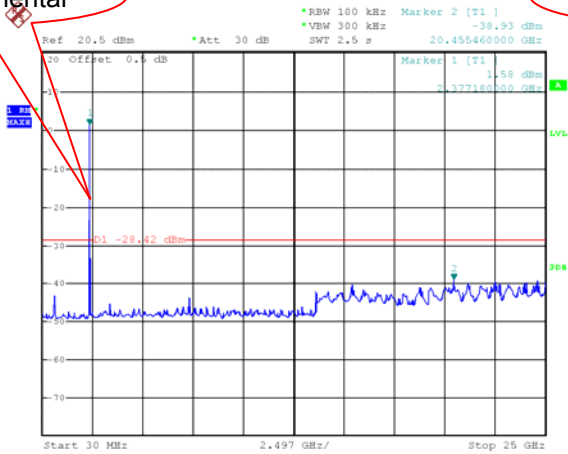

Date: 21.FEB.2024 16:43:38

Mode: TX 11b channel 6


Fundamental

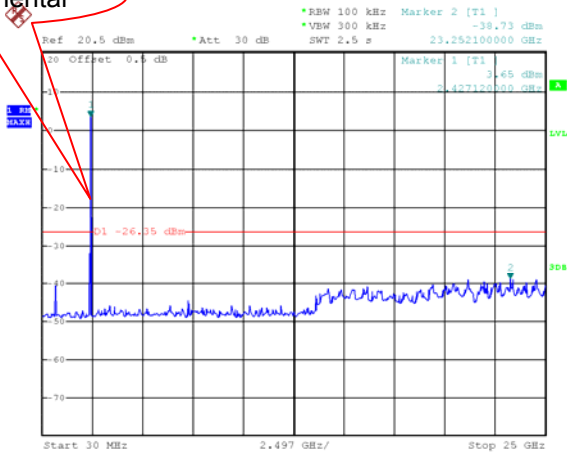

Date: 21.FEB.2024 16:45:31


Mode: TX 11b channel 11

Fundamental

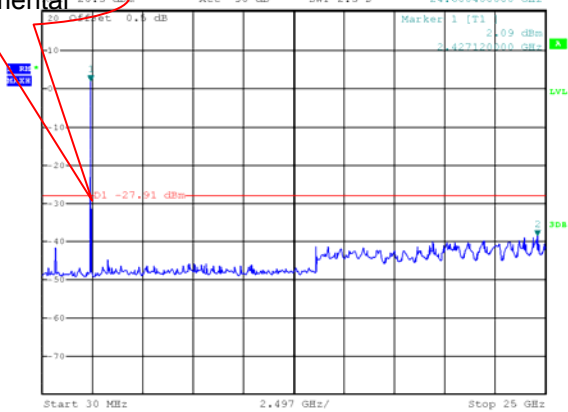


Date: 21.FEB.2024 16:47:11

Mode: TX 11g channel 1

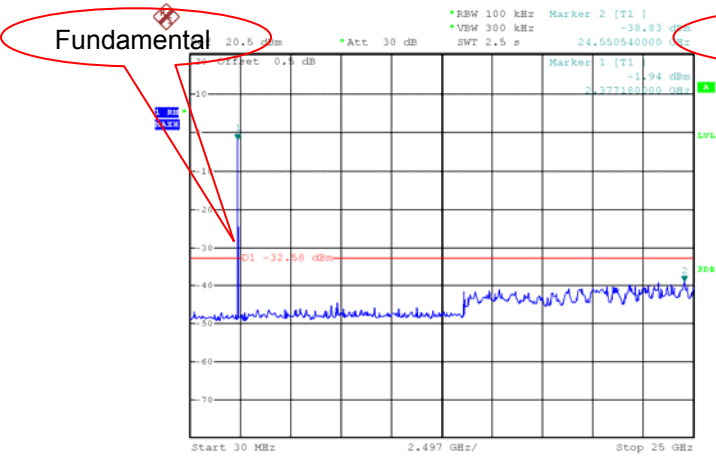


Date: 21.FEB.2024 16:37:03

Mode: TX 11g channel 6

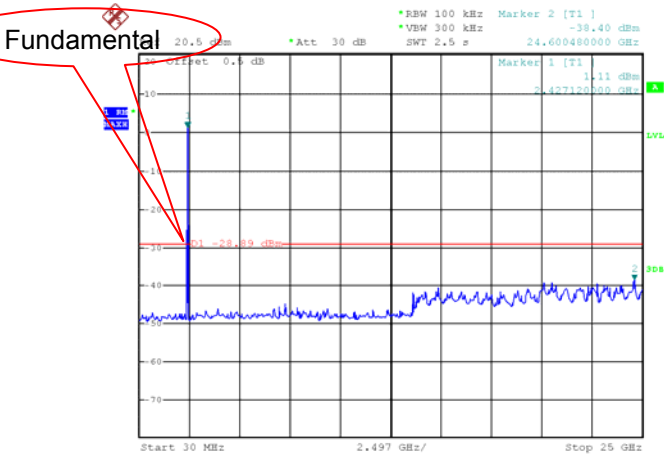


Date: 21.FEB.2024 16:39:06

Mode: TX 11g channel 11

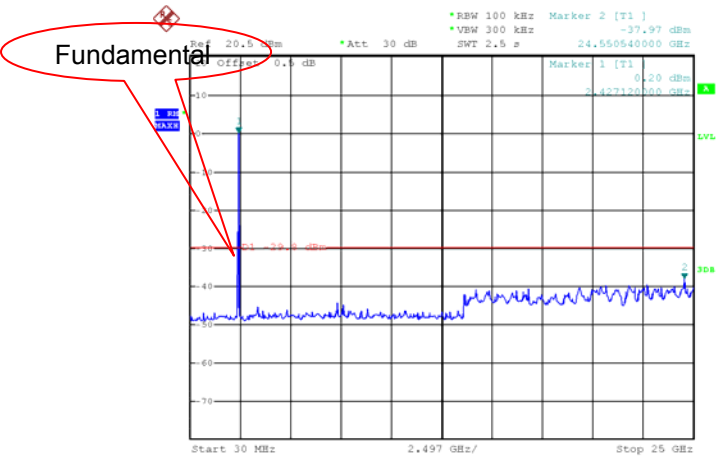


Date: 21.FEB.2024 16:41:40


Mode: TX 11n HT20 channel 1

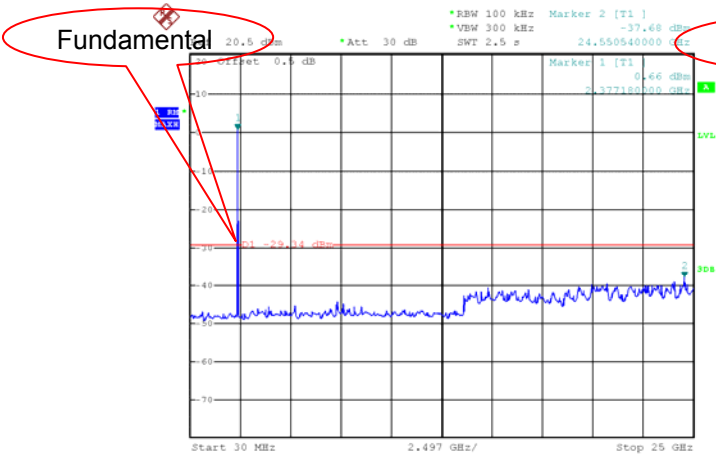


Mode: TX 11 n HT20 channel 6

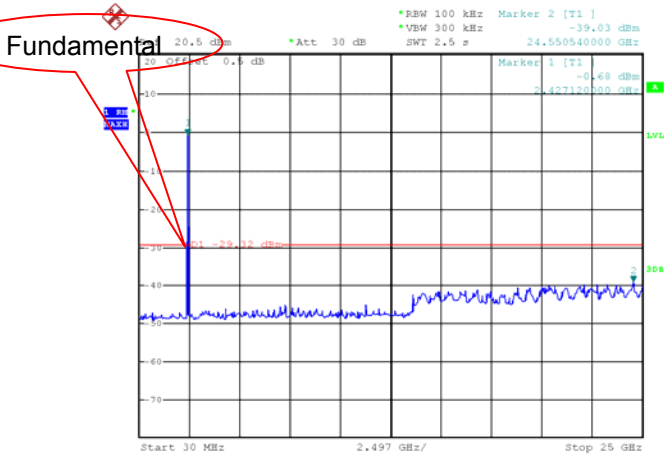

Mode: TX 11 n HT20 channel 11

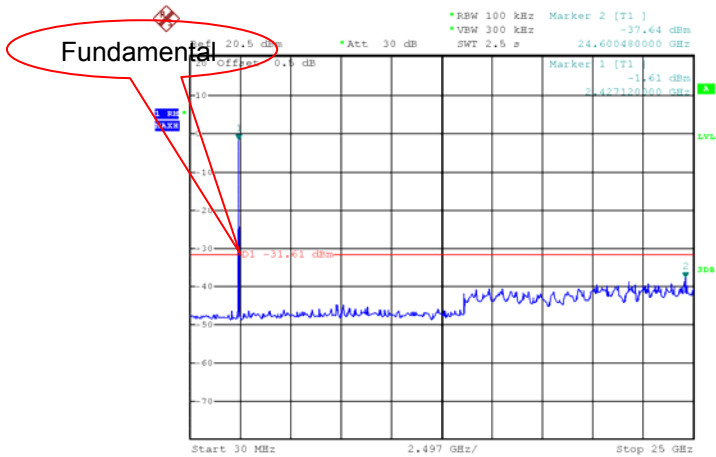


Mode: TX 11n HT40 channel 3

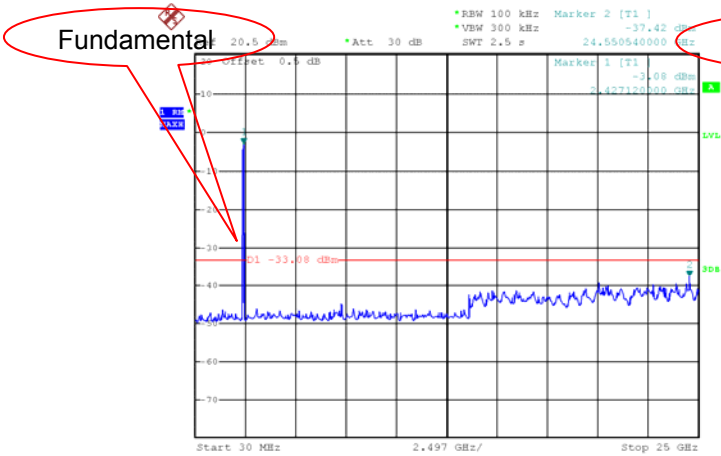


Date: 21.FEB.2024 16:08:11

Mode: TX 11 n HT40 channel 6

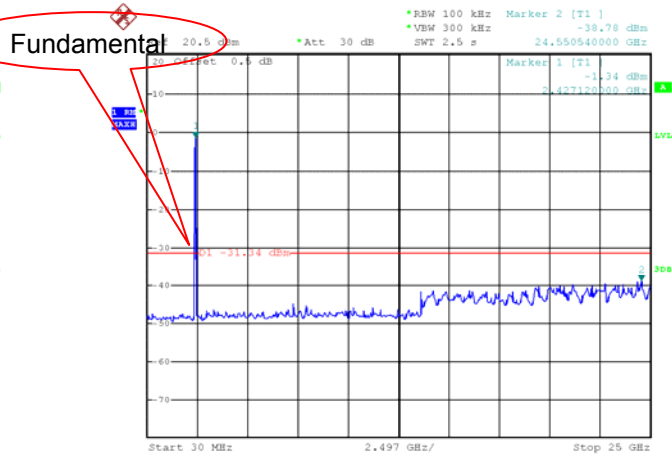


Date: 21.FEB.2024 16:10:34

Mode: TX 11 n HT40 channel 9

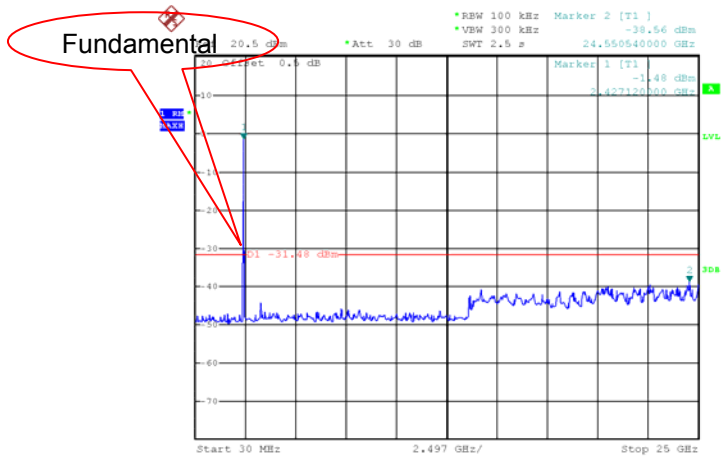


Date: 21.FEB.2024 16:13:01

Mode: TX 11ax HT20 channel 1

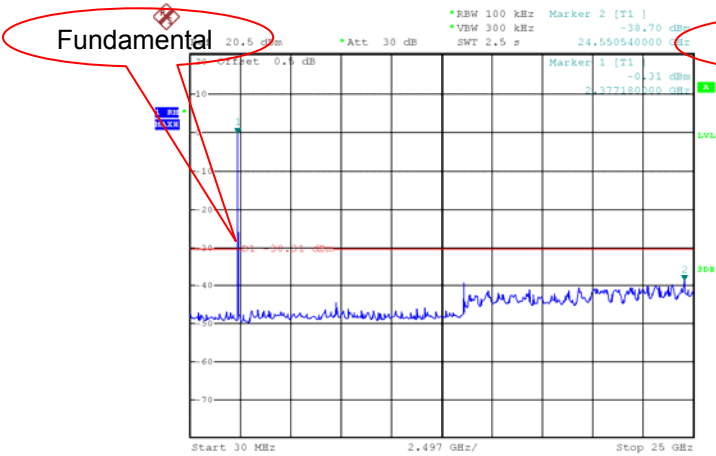


Date: 12.MAR.2024 09:35:06

Mode: TX 11 ax HT20 channel 6

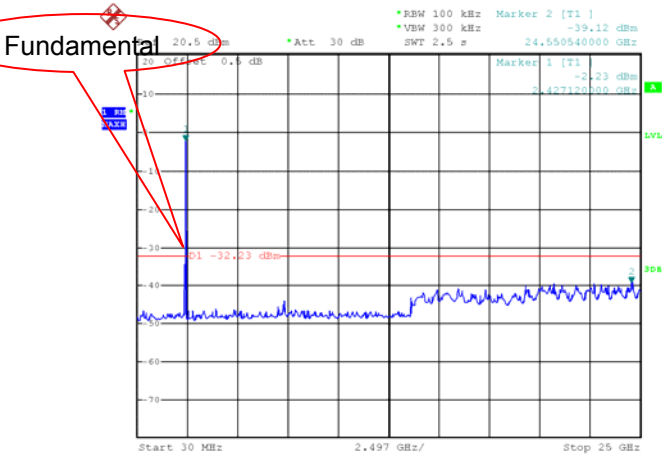


Date: 12.MAR.2024 09:36:38

Mode: TX 11 ax HT20 channel 11

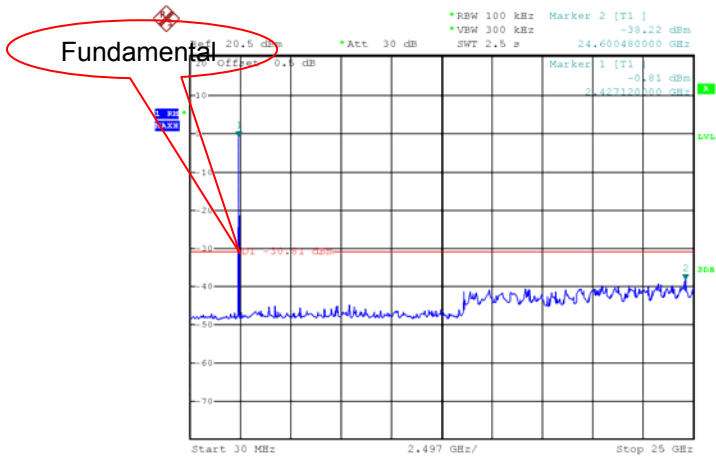


Date: 12.MAR.2024 09:38:41


Mode: TX 11ax HT40 channel 3

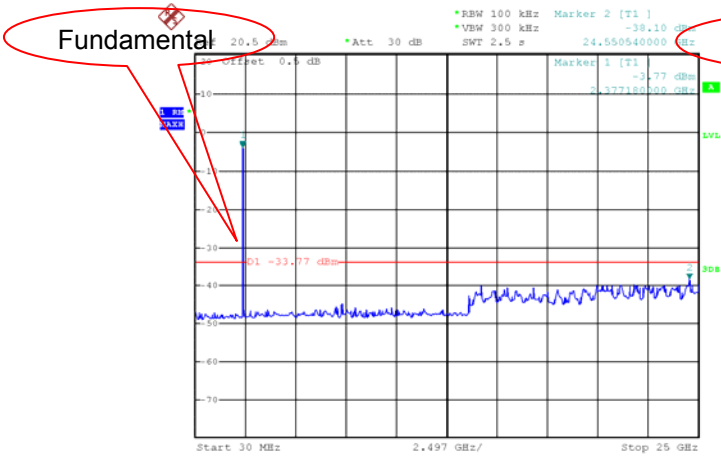

Mode: TX 11 ax HT40 channel 6

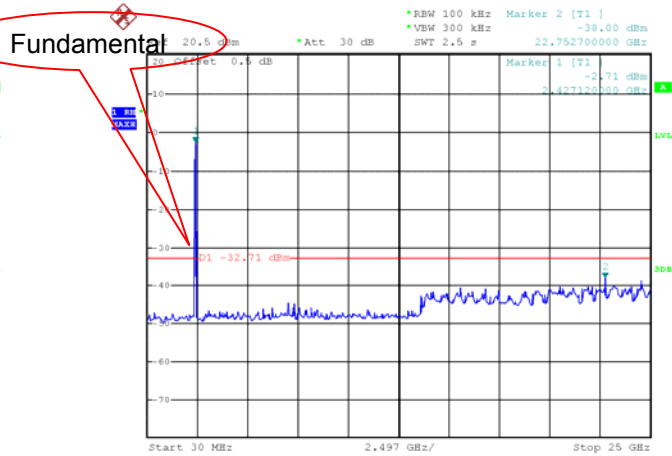

Mode: TX 11 ax HT40 channel 9

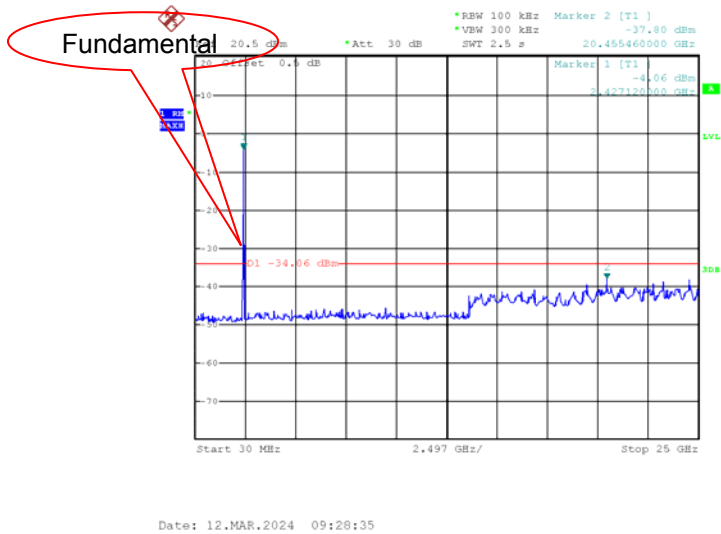

11 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result


Test result plots shown as follows:

TX 11b: Band edge-left side

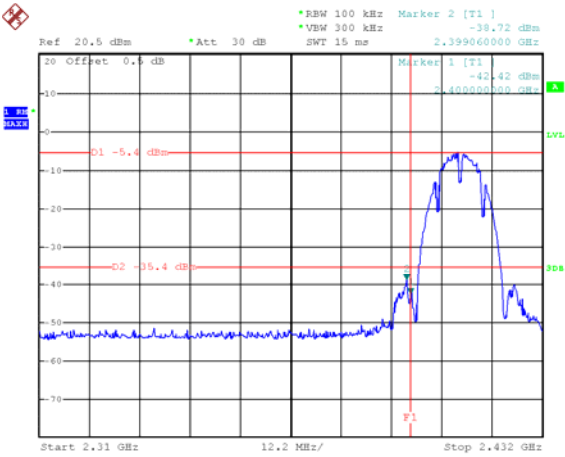


Date: 22.FEB.2024 11:05:17

TX 11b: Band edge-right side

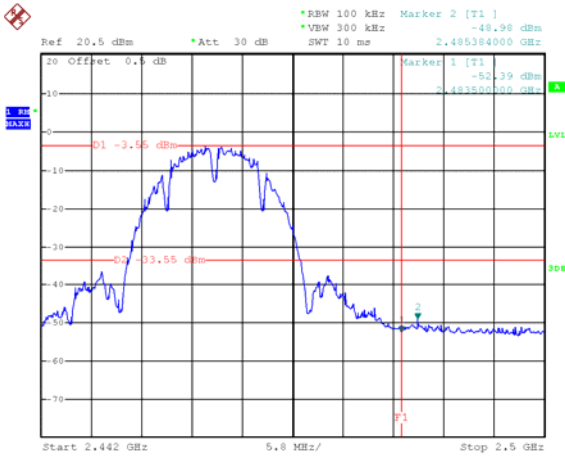


Date: 22.FEB.2024 11:11:18

TX 11g: Band edge-left side

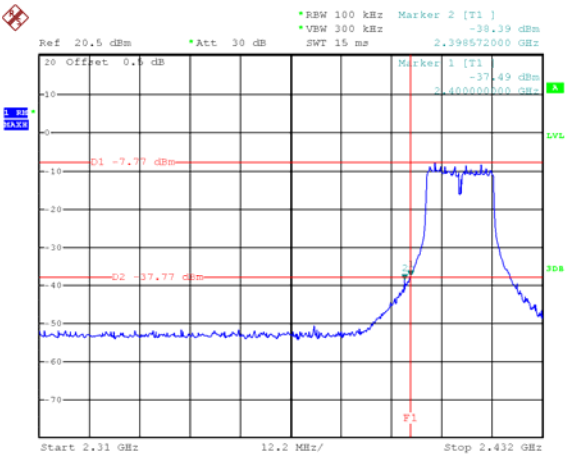


Date: 22.FEB.2024 10:54:18

TX 11g: Band edge-right side

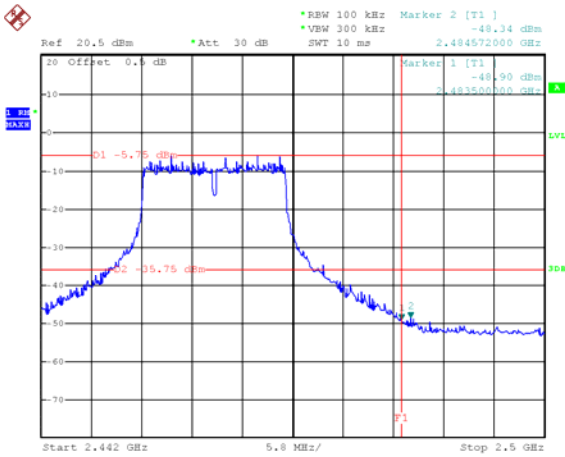


Date: 22.FEB.2024 11:01:27

TX 11n HT20: Band edge-left side

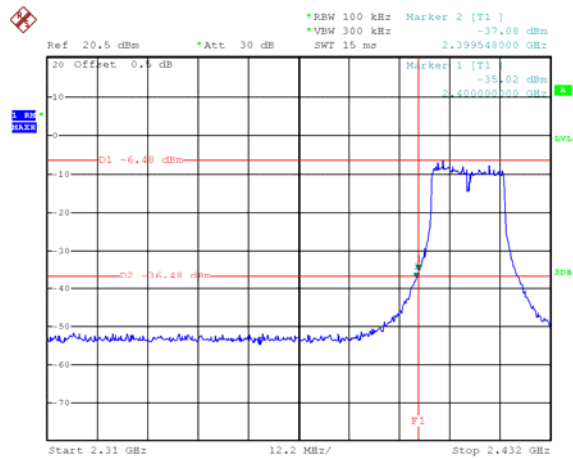


Date: 22.FEB.2024 10:36:45

TX 11n HT20: Band edge-right side

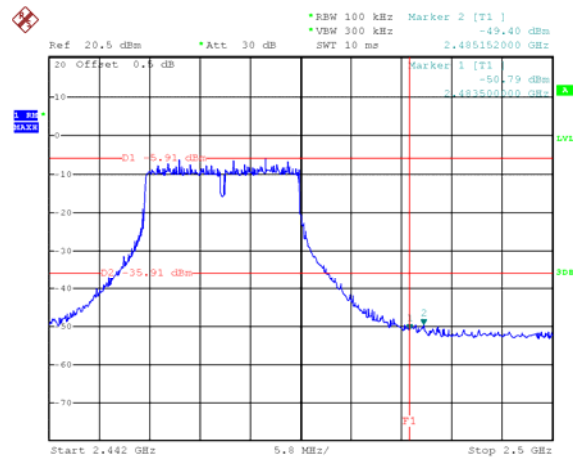


Date: 22.FEB.2024 10:44:16

TX 11n HT40: Band edge-left side

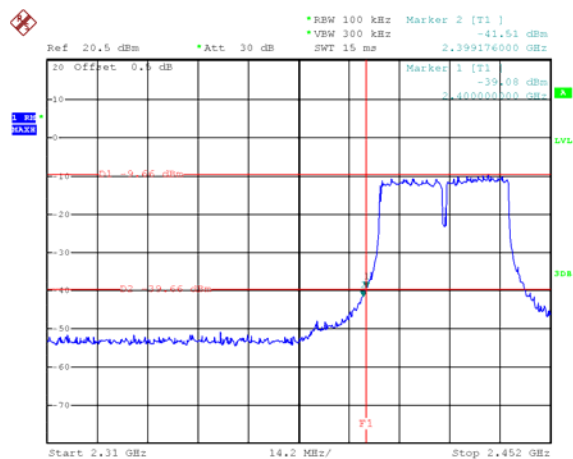


Date: 22.FEB.2024 10:21:20

TX 11n HT40: Band edge-right side

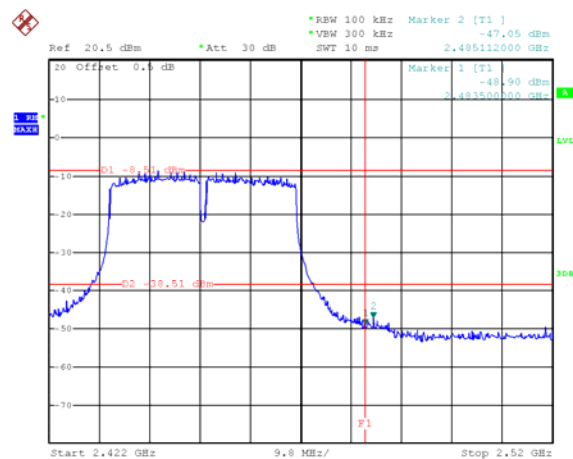


Date: 22.FEB.2024 10:29:46

TX 11ax HT20: Band edge-left side

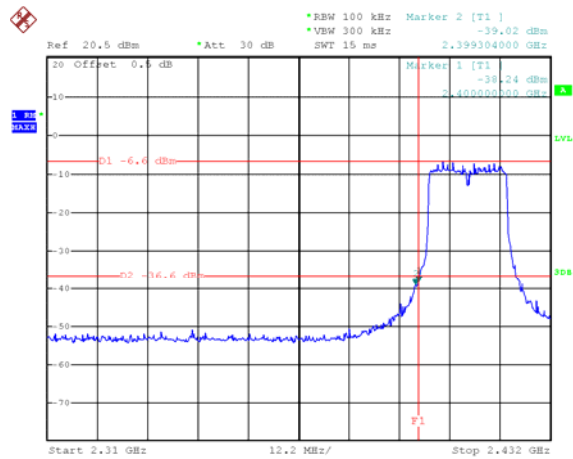


Date: 11.MAR.2024 17:30:17

TX 11ax HT20: Band edge-right side

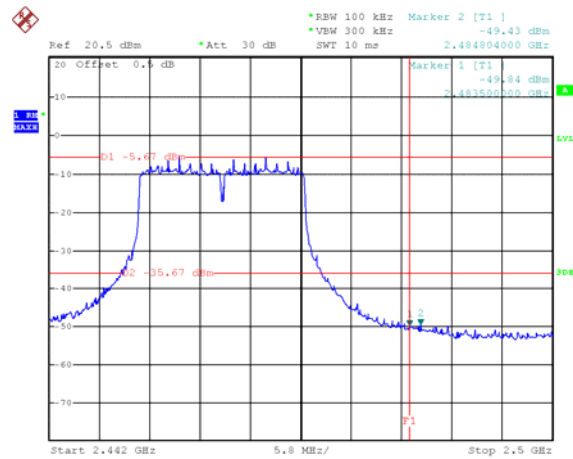


Date: 11.MAR.2024 17:32:36

TX 11ax HT40: Band edge-left side

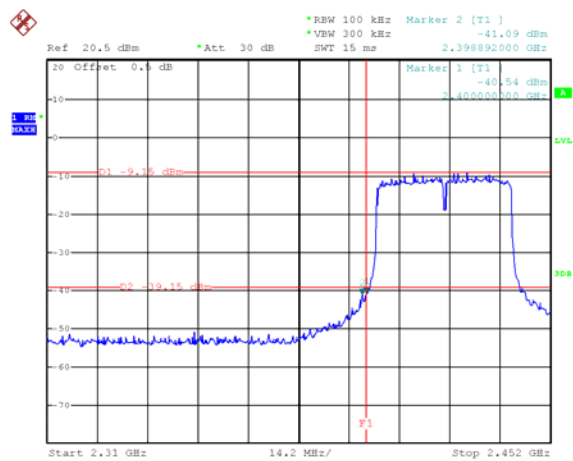

Date: 11.MAR.2024 17:27:15

TX 11ax HT40: Band edge-right side

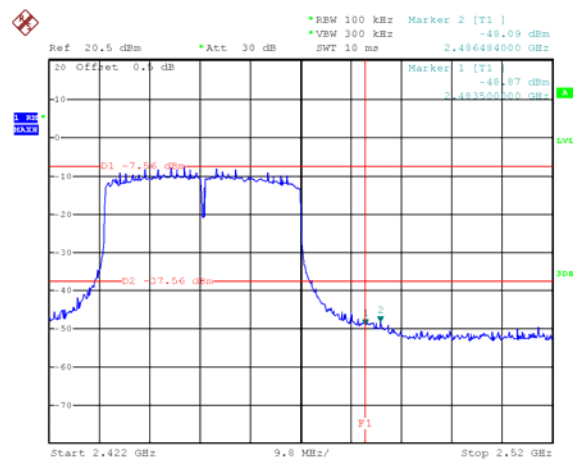

Date: 11.MAR.2024 17:25:09

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247
 Test Method: ANSI C63.10:2013
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
 Test Limit: §15.247(a)(2)
 Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
 Test Mode: Transmitting

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
 99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

12.2 Test Result


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	10.140	15.240
	Channel 6	10.080	15.300
	Channel 11	10.140	15.240
TX 11g	Channel 1	16.380	17.100
	Channel 6	16.440	17.160
	Channel 11	16.440	17.160
TX 11n HT20	Channel 1	17.700	18.600
	Channel 6	17.640	18.600
	Channel 11	17.760	18.420
TX 11n HT40	Channel 3	36.240	37.800
	Channel 6	35.400	37.680
	Channel 9	36.360	37.560
TX 11ax HT20	Channel 3	19.020	19.380
	Channel 6	19.080	19.260
	Channel 9	19.140	19.620
TX 11ax HT40	Channel 3	38.160	38.640
	Channel 6	37.560	38.280
	Channel 9	38.040	38.280

Test result plot:


6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

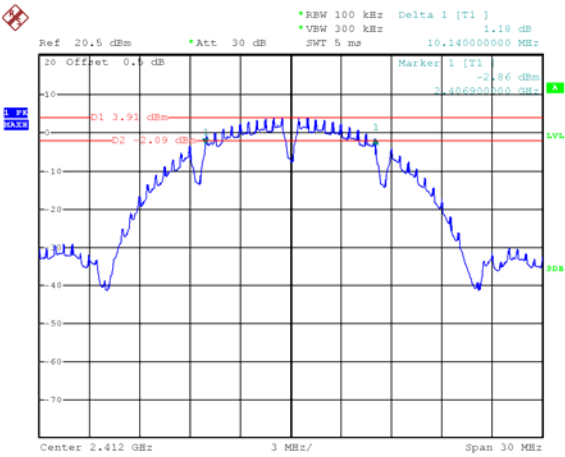


Date: 21.FEB.2024 13:29:50

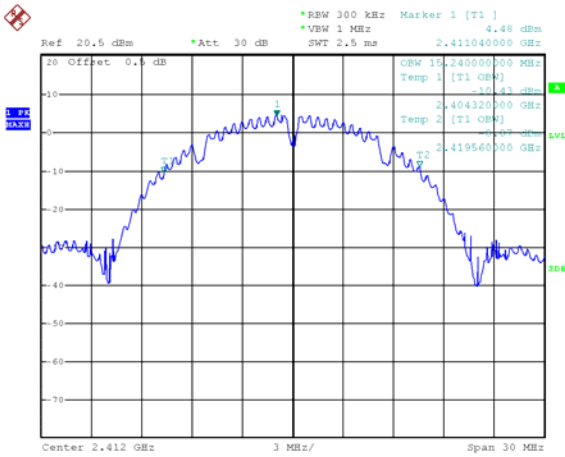


Date: 21.FEB.2024 11:05:38

Mode: TX 11b channel 6

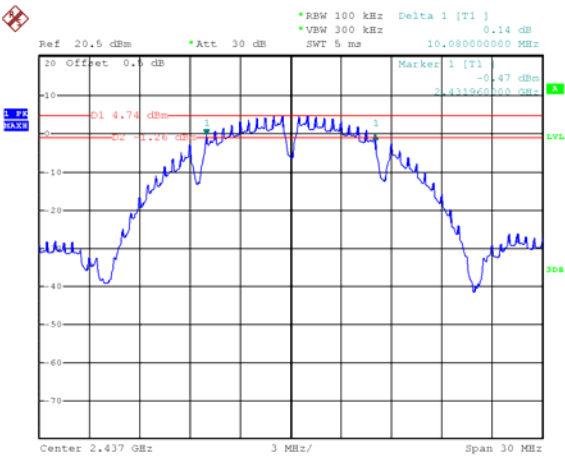

Date: 21.FEB.2024 13:31:34


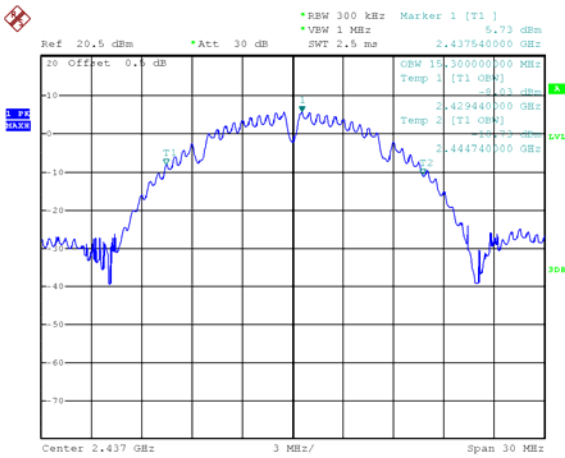


Date: 21.FEB.2024 11:04:58

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 11

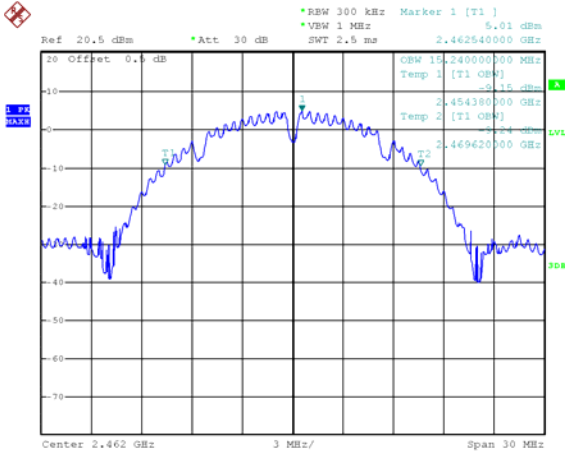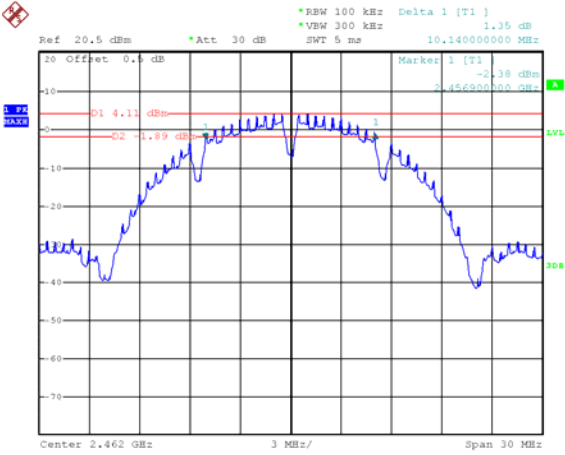

Date: 21.FEB.2024 13:33:02

Date: 21.FEB.2024 11:06:02

Mode: TX 11g channel 1

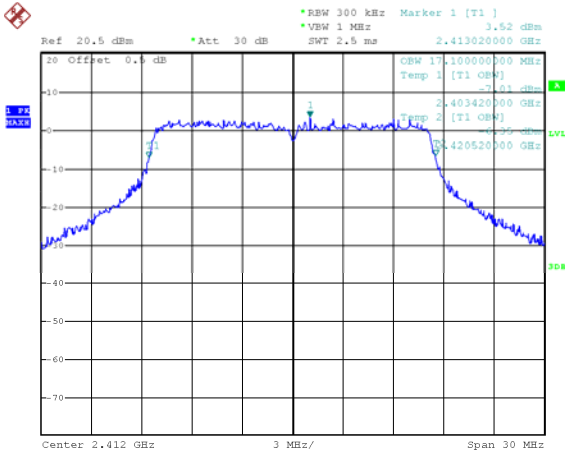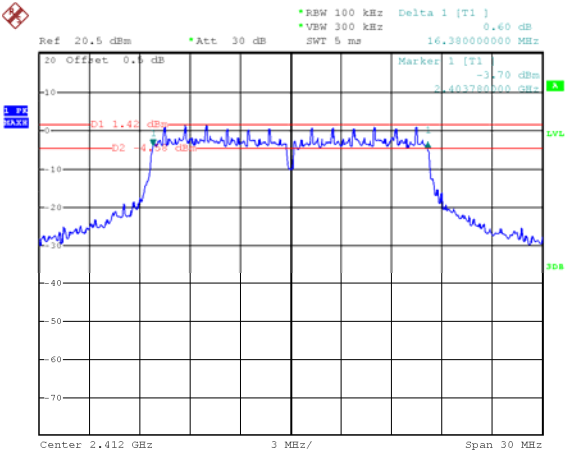



Date: 21.FEB.2024 13:35:04

Date: 21.FEB.2024 10:36:10

6 dB Bandwidth

99% Bandwidth



Mode: TX 11g channel 6

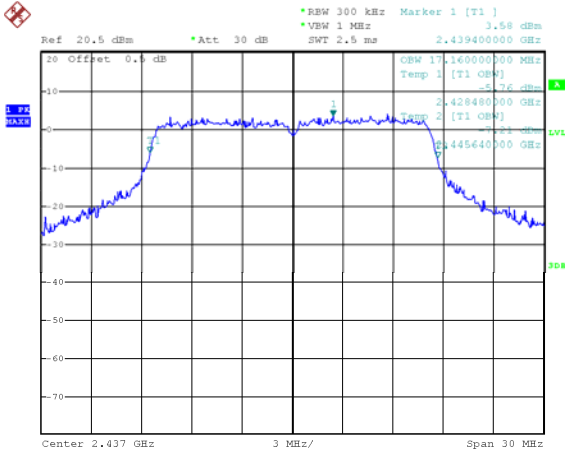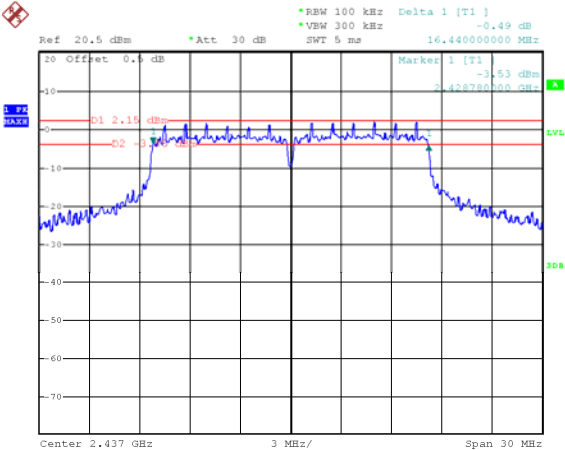

Date: 21.FEB.2024 13:36:34

Date: 21.FEB.2024 10:35:04

Mode: TX 11g channel 11

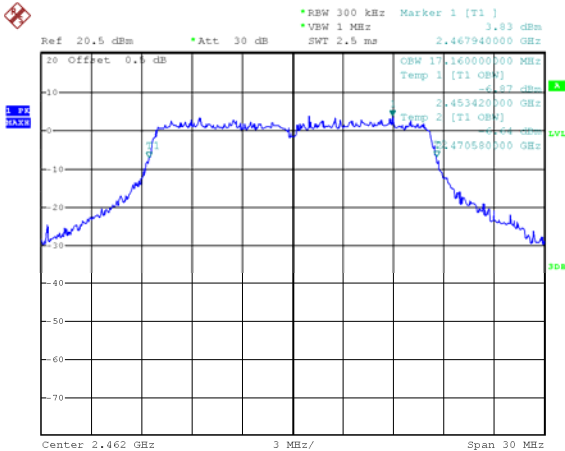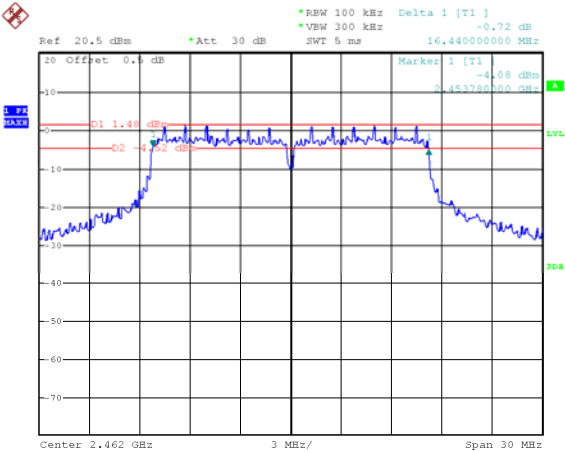


Date: 21.FEB.2024 13:38:17

Date: 21.FEB.2024 10:35:36


6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 1

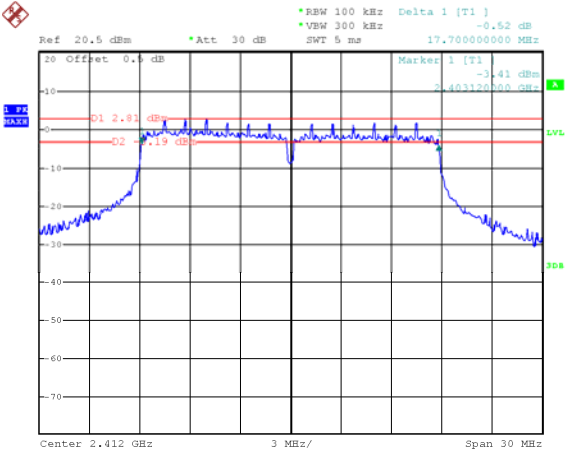


Date: 21.FEB.2024 13:41:25

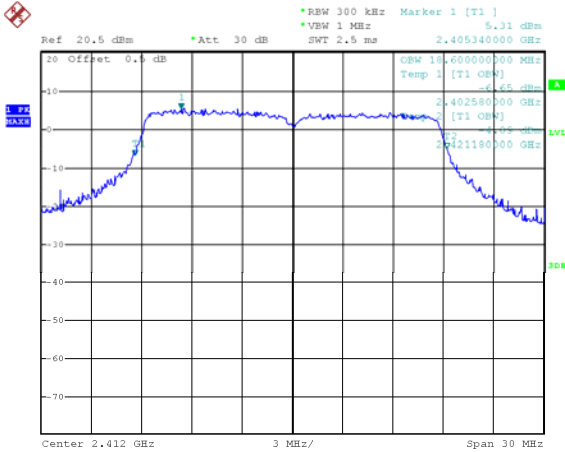


Date: 21.FEB.2024 11:02:25

Mode: TX 11n HT20 channel 6

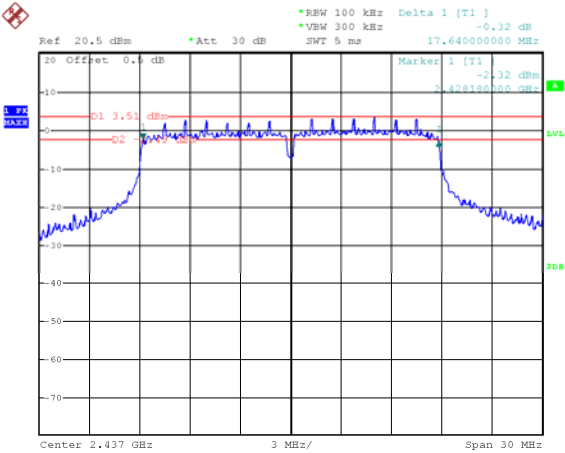

Date: 21.FEB.2024 13:43:21

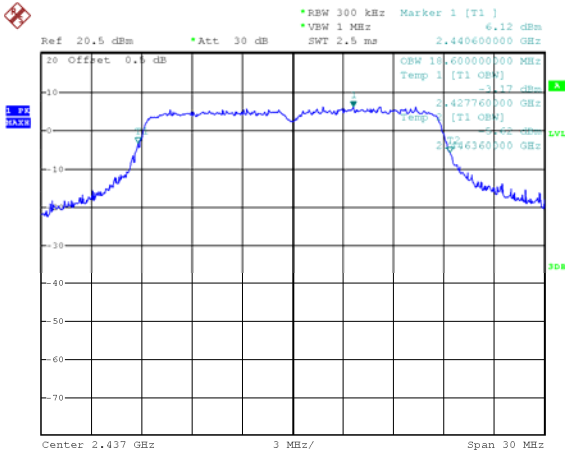


Date: 21.FEB.2024 11:03:13


6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 11

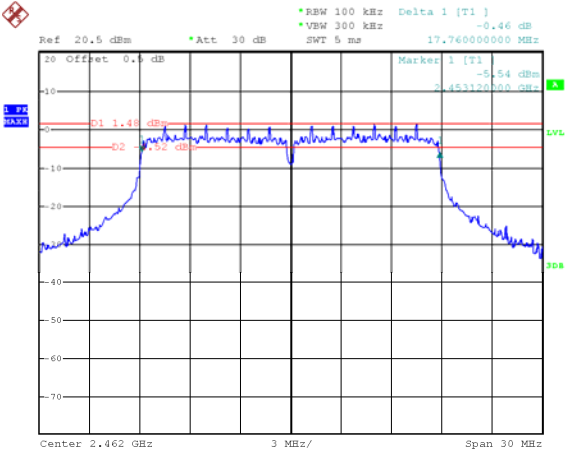


Date: 21.FEB.2024 13:45:00

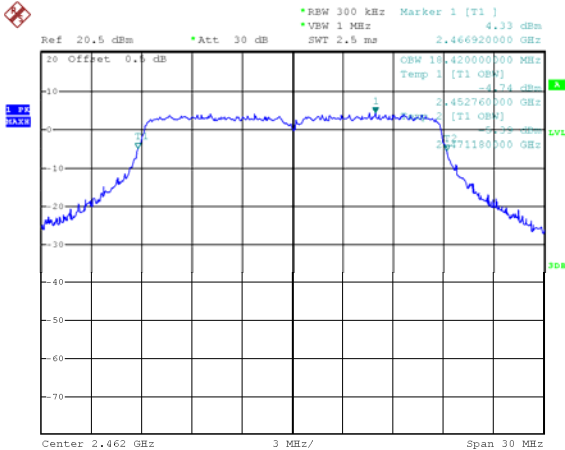


Date: 21.FEB.2024 11:03:41

Mode: TX 11n HT40 channel 3

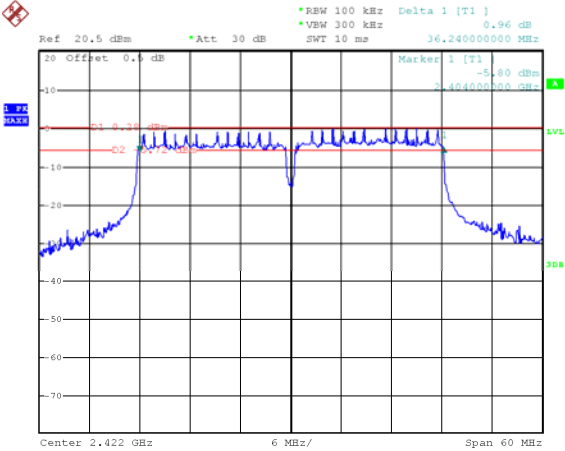

Date: 21.FEB.2024 13:28:09


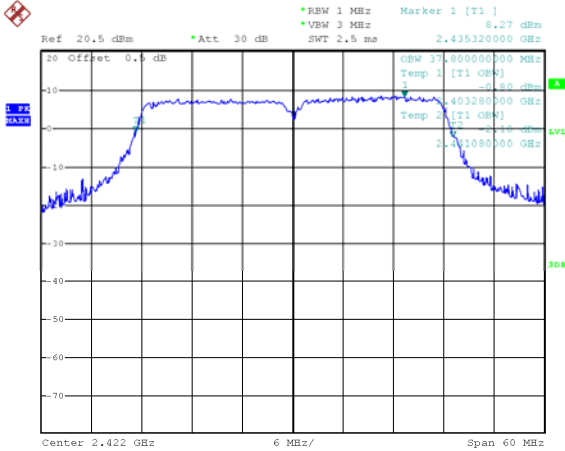


Date: 21.FEB.2024 11:00:51

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT40 channel 6

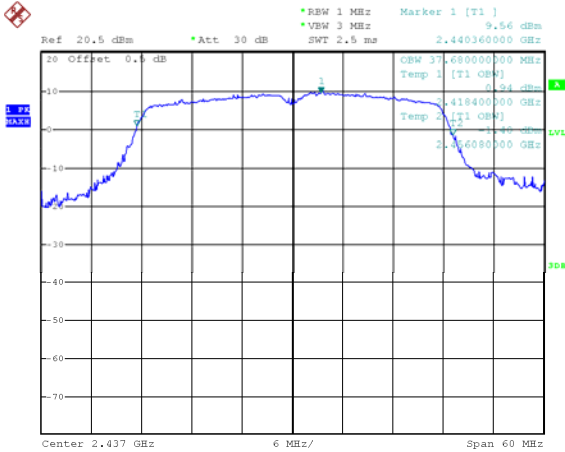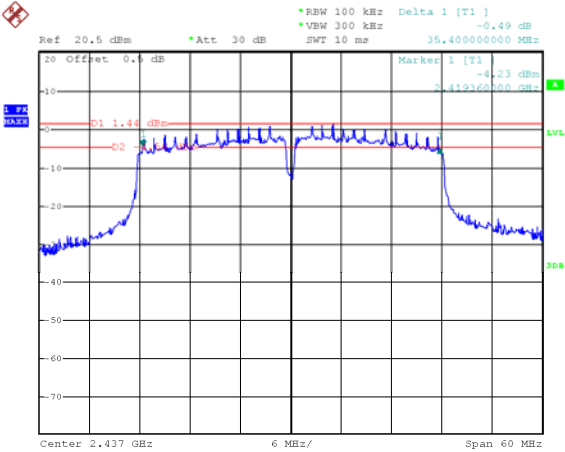

Date: 21.FEB.2024 13:26:40

Date: 21.FEB.2024 10:59:51

Mode: TX 11n HT40 channel 9

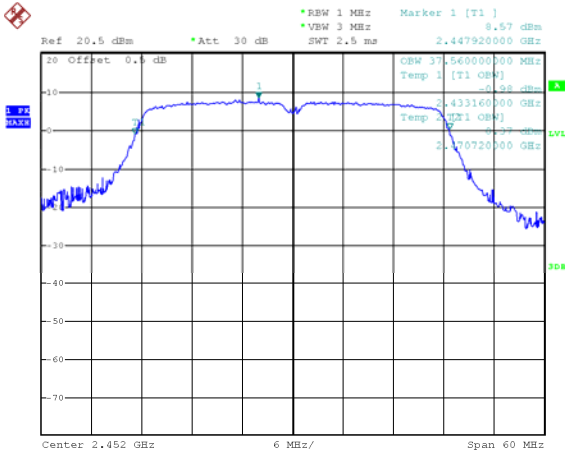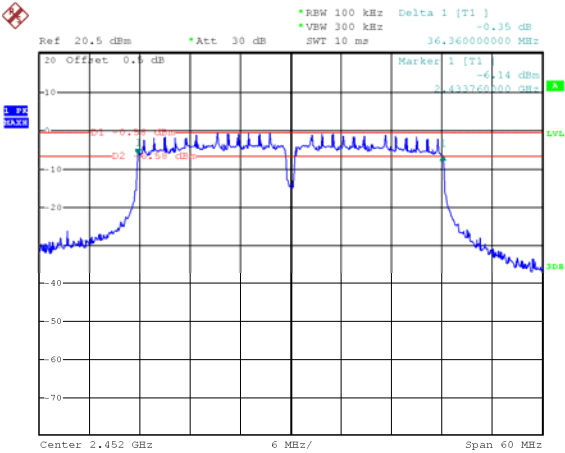


Date: 21.FEB.2024 13:22:52

Date: 21.FEB.2024 11:01:24


6 dB Bandwidth

99% Bandwidth

Mode: TX 11ax HT20 channel 1

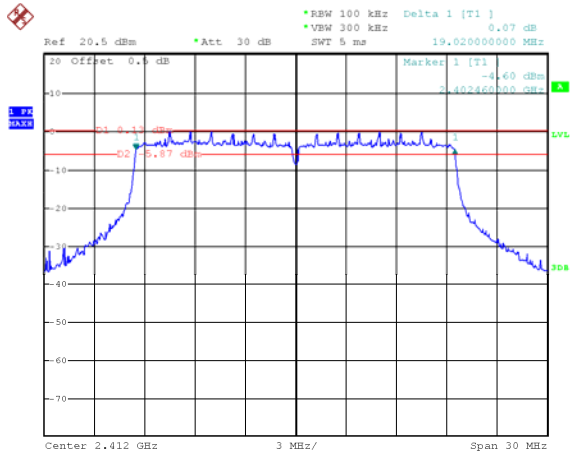


Date: 12.MAR.2024 08:45:23

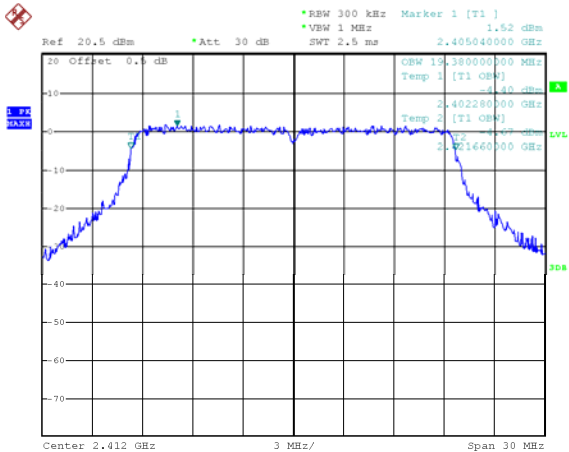


Date: 11.MAR.2024 18:05:52

Mode: TX 11ax HT20 channel 6

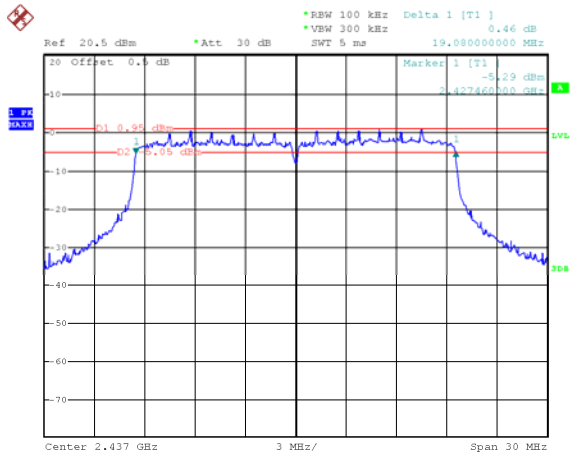

Date: 12.MAR.2024 08:47:19


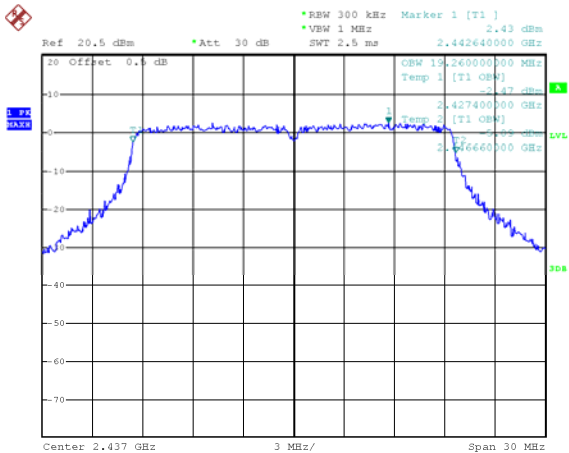


Date: 11.MAR.2024 18:04:52

6 dB Bandwidth

99% Bandwidth



Mode: TX 11ax HT20 channel 11

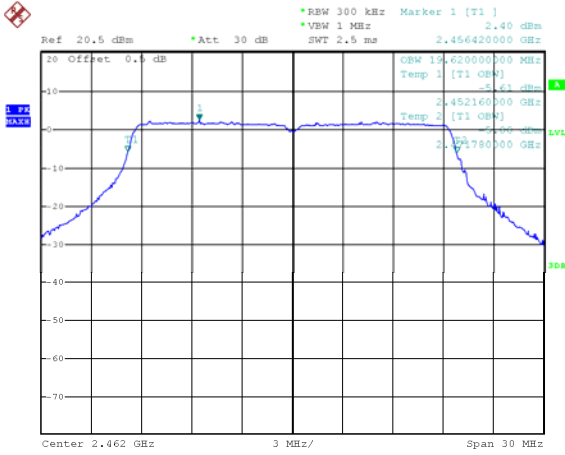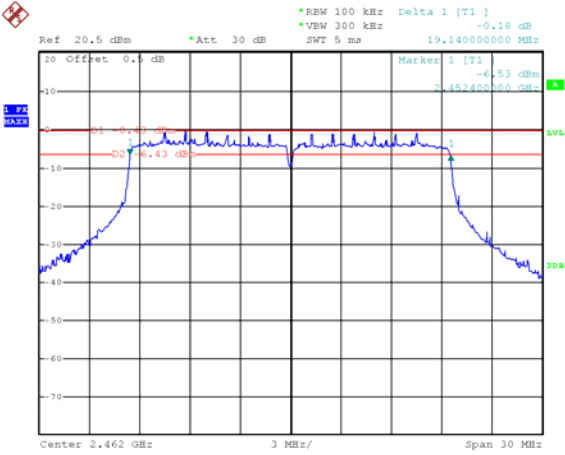

Date: 12.MAR.2024 08:49:40

Date: 11.MAR.2024 17:59:10

Mode: TX 11ax HT40 channel 3

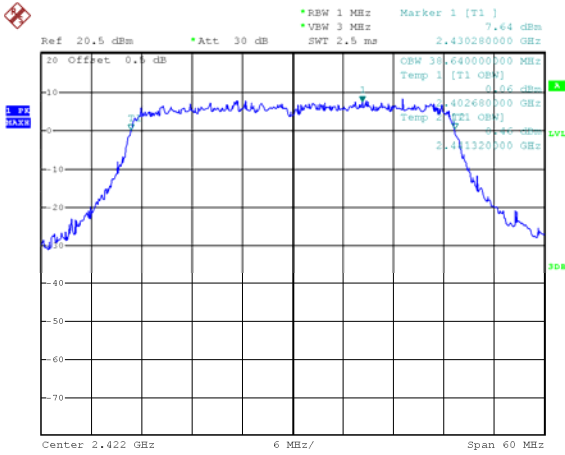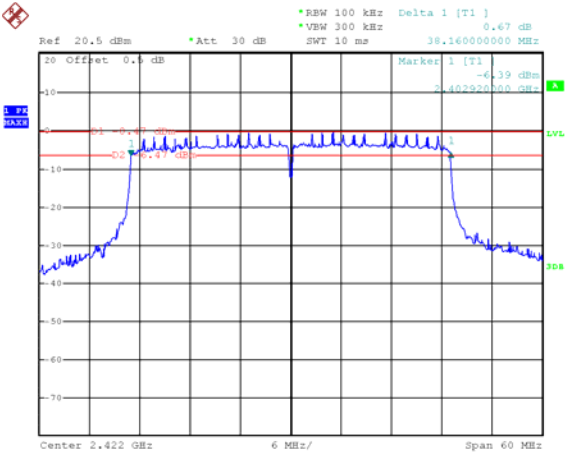



Date: 12.MAR.2024 09:14:35

Date: 11.MAR.2024 16:47:33

6 dB Bandwidth

99% Bandwidth



Mode: TX 11ax HT40 channel 6

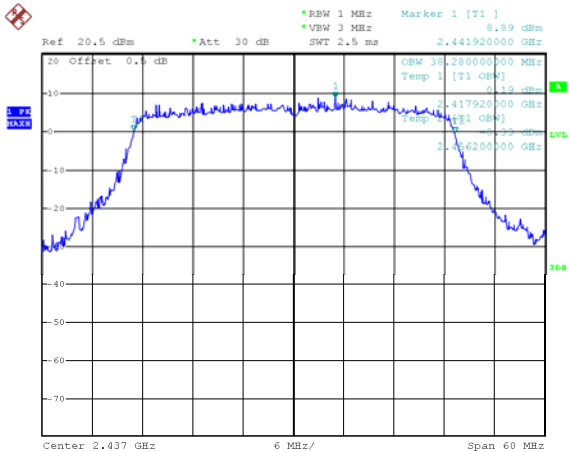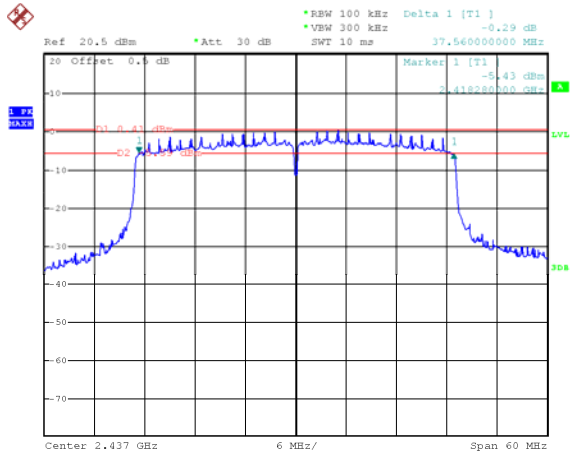

Date: 12.MAR.2024 09:16:15

Date: 11.MAR.2024 17:09:22

Mode: TX 11ax HT40 channel 9

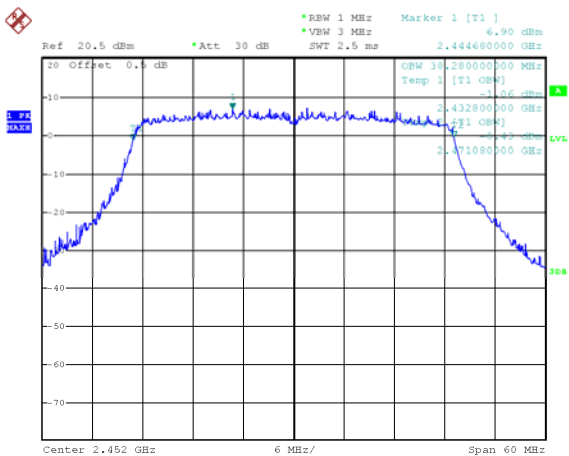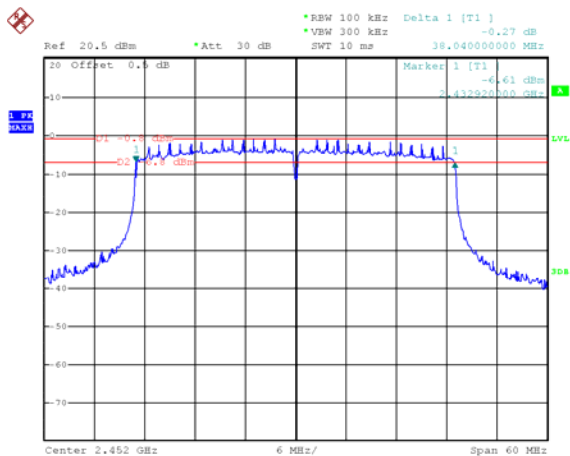

Date: 12.MAR.2024 09:17:52

Date: 11.MAR.2024 17:21:17

13 Maximum Peak conducted Output Power

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

13.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW $\geq$ DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.


Subclause 11.9.2 of ANSI C63.10 is applicable.

13.2 Test Result

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	11.28	0.13	11.41	1W/30dBm
	Middle-2437	12.18		12.31	1W/30dBm
	High-2462	11.90		12.03	1W/30dBm
TX 11g	Low-2412	11.83	0.57	12.40	1W/30dBm
	Middle-2437	12.71		13.28	1W/30dBm
	High-2462	12.60		13.17	1W/30dBm
TX 11n HT20	Low-2412	13.06	0.18	13.24	1W/30dBm
	Middle-2437	14.06		14.24	1W/30dBm
	High-2462	12.71		12.89	1W/30dBm
TX 11n HT40	Low-2422	11.60	0.33	11.93	1W/30dBm
	Middle-2437	12.02		12.35	1W/30dBm
	High-2452	11.16		11.49	1W/30dBm
TX 11ax HT20	Low-2412	13.36	-0.23	13.13	1W/30dBm
	Middle-2437	13.70		13.47	1W/30dBm
	High-2462	13.10		12.87	1W/30dBm
TX 11ax HT40	Low-2422	11.97	0.38	12.35	1W/30dBm
	Middle-2437	12.70		13.08	1W/30dBm
	High-2452	12.21		12.59	1W/30dBm


Test Plot:

Mode: TX 11b channel 1

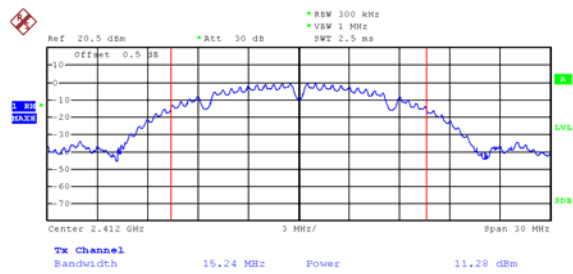


Date: 22.FEB.2024 11:03:30

Mode: TX 11b channel 6

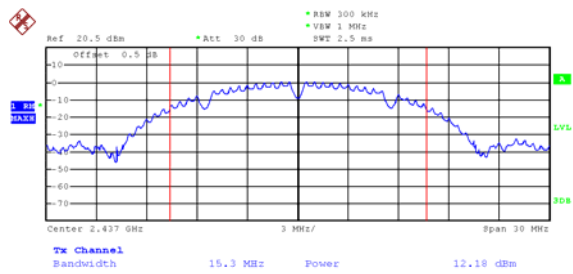


Date: 22.FEB.2024 11:08:13

Mode: TX 11b channel 11

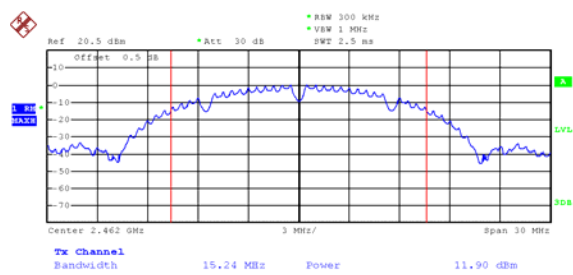


Date: 22.FEB.2024 11:09:14

Mode: TX 11g channel 1

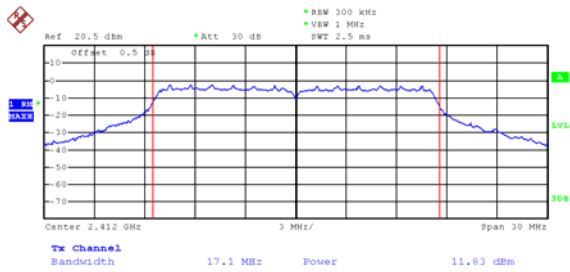


Date: 22.FEB.2024 10:47:37

Mode: TX 11g channel 6

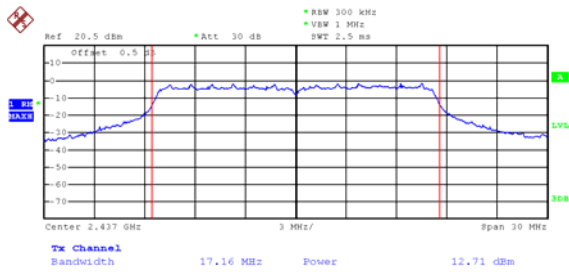


Date: 22.FEB.2024 10:57:29

Mode: TX 11g channel 11

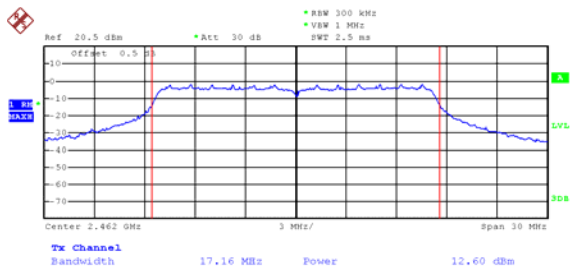


Date: 22.FEB.2024 11:02:16

Mode: TX 11n HT20 channel 1

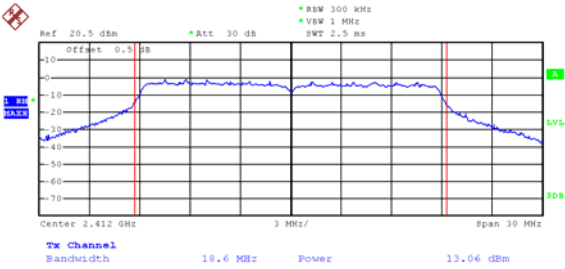


Date: 22.FEB.2024 10:33:13

Mode: TX 11n HT20 channel 6

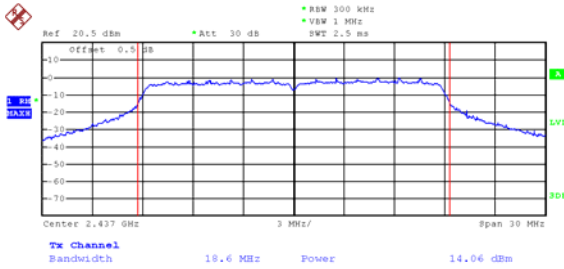


Date: 22.FEB.2024 10:40:31

Mode: TX 11n HT20 channel 11

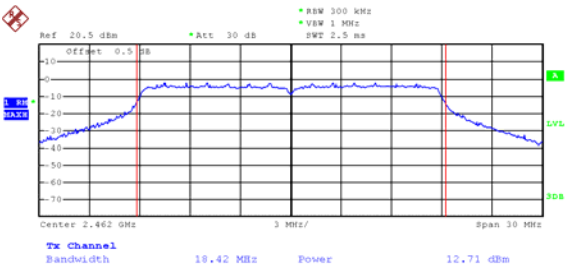


Date: 22.FEB.2024 10:45:29

Mode: TX 11n HT40 channel 3

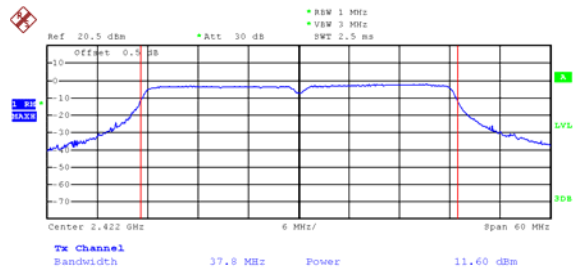


Date: 22.FEB.2024 10:19:28

Mode: TX 11n HT40 channel 6

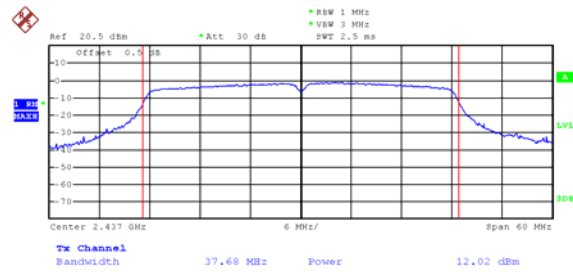


Date: 22.FEB.2024 10:25:03

Mode: TX 11n HT40 channel 9

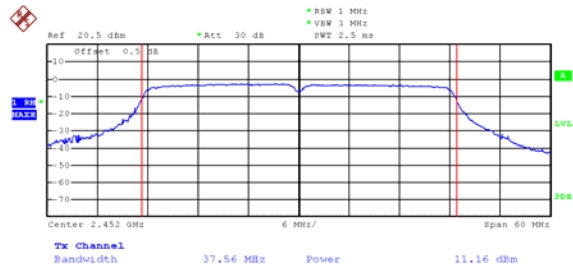


Date: 22.FEB.2024 10:28:01

Mode: TX 11ax HT20 channel 1

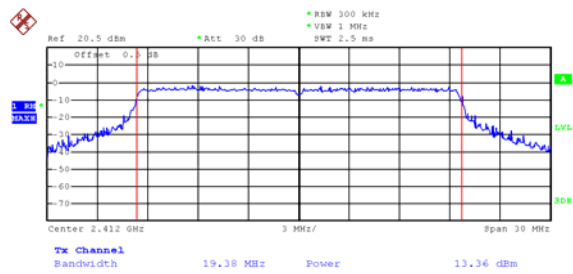


Date: 12.MAR.2024 08:56:55

Mode: TX 11ax HT20 channel 6

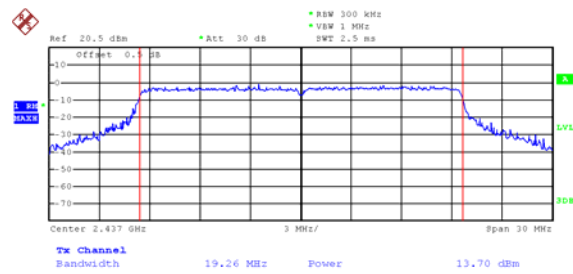


Date: 12.MAR.2024 09:54:01

Mode: TX 11ax HT20 channel 11

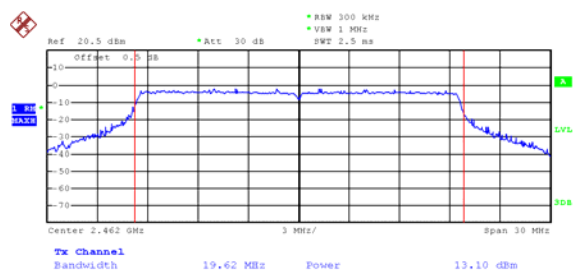


Date: 12.MAR.2024 09:00:05

Mode: TX 11ax HT40 channel 3

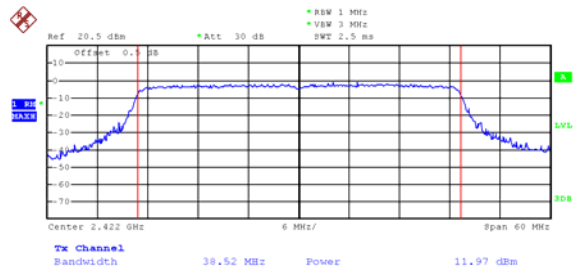


Date: 12.MAR.2024 09:10:05

Mode: TX 11ax HT40 channel 6

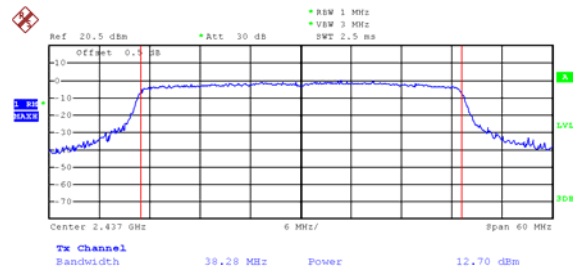

Date: 11.MAR.2024 17:10:44

Mode: TX 11ax HT40 channel 9

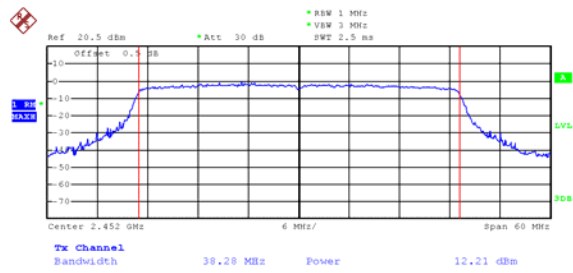

Date: 11.MAR.2024 17:23:08

14 Power Spectral density

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

14.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD


Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

14.2 Test Result

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	-23.30	0.13	-23.17	8dBm per 3kHz
	Middle-2437	-21.76		-21.63	8dBm per 3kHz
	High-2462	-22.15		-22.02	8dBm per 3kHz
TX 11g	Low-2412	-25.73	0.57	-25.16	8dBm per 3kHz
	Middle-2437	-25.26		-24.69	8dBm per 3kHz
	High-2462	-24.87		-24.3	8dBm per 3kHz
TX 11n HT20	Low-2412	-24.91	0.18	-24.73	8dBm per 3kHz
	Middle-2437	-23.74		-23.56	8dBm per 3kHz
	High-2462	-25.41		-25.23	8dBm per 3kHz
TX 11n HT40	Low-2422	-28.05	0.33	-27.72	8dBm per 3kHz
	Middle-2437	-27.05		-26.72	8dBm per 3kHz
	High-2452	-28.42		-28.09	8dBm per 3kHz
TX 11ax HT20	Low-2412	-25.67	-0.23	-25.90	8dBm per 3kHz
	Middle-2437	24.95		-25.18	8dBm per 3kHz
	High-2462	-25.84		-26.07	8dBm per 3kHz
TX 11ax HT40	Low-2422	-27.91	0.38	-27.53	8dBm per 3kHz
	Middle-2437	-27.57		-27.19	8dBm per 3kHz
	High-2452	-28.03		-27.65	8dBm per 3kHz


Test Plot:

Mode: TX 11b channel 1

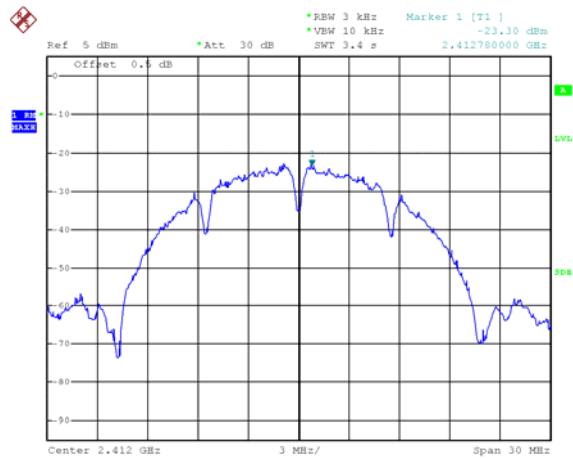


Date: 22.FEB.2024 11:04:18

Mode: TX 11b channel 6

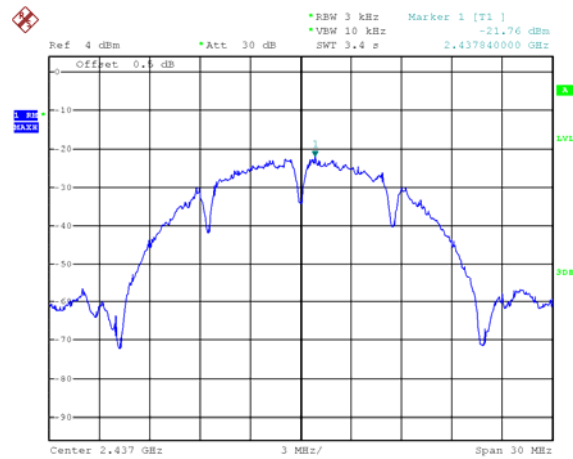


Date: 22.FEB.2024 11:06:24

Mode: TX 11b channel 11

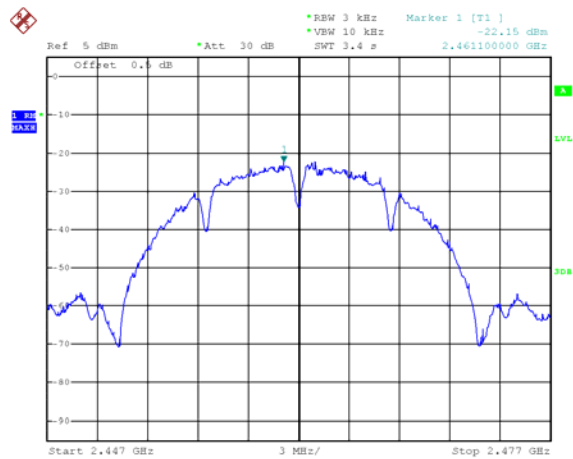


Date: 22.FEB.2024 11:09:52

Mode: TX 11g channel 1

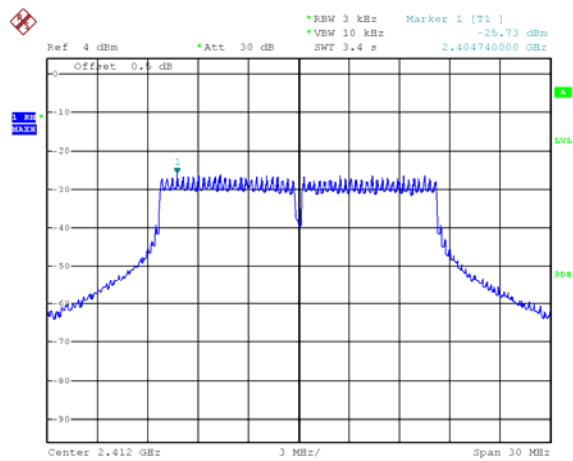


Date: 22.FEB.2024 10:49:49

Mode: TX 11g channel 6

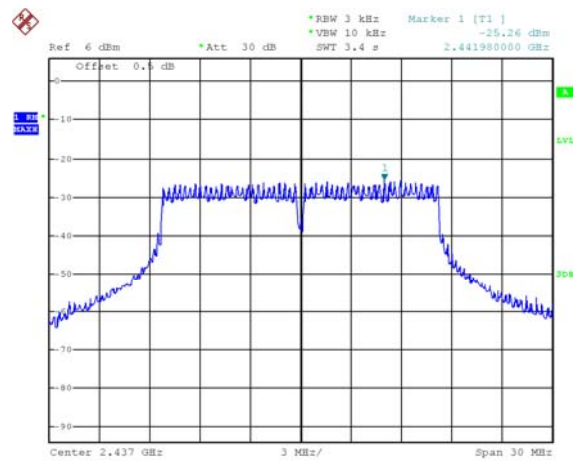


Date: 22.FEB.2024 10:58:18

Mode: TX 11g channel 11

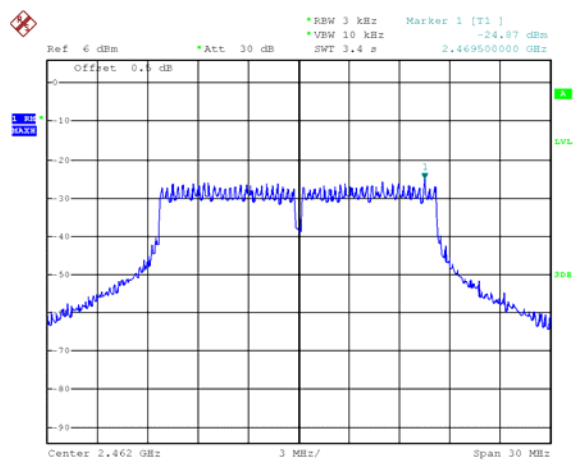


Date: 22.FEB.2024 10:59:20

Mode: TX 11n HT20 channel 1

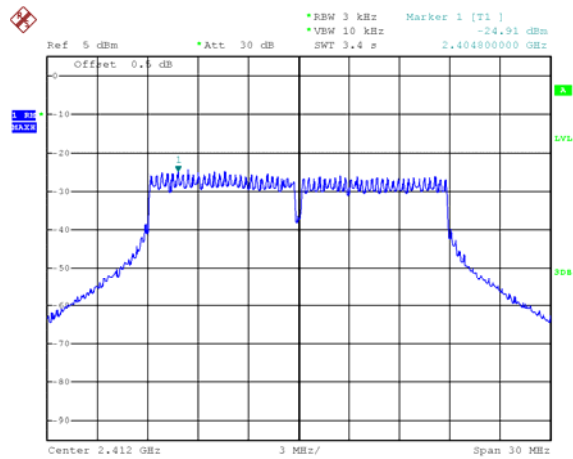


Date: 22.FEB.2024 10:35:28

Mode: TX 11n HT20 channel 6

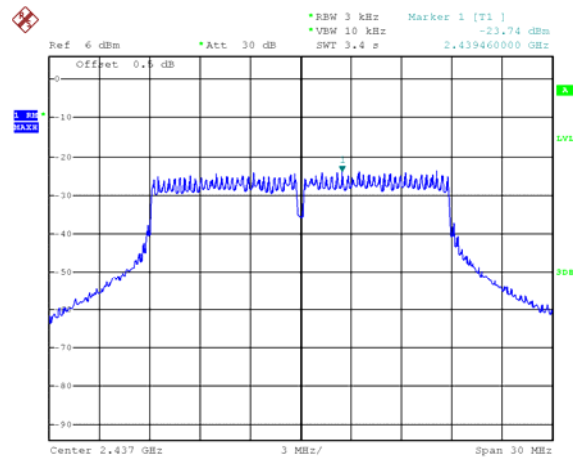


Date: 22.FEB.2024 10:41:06

Mode: TX 11n HT20 channel 11

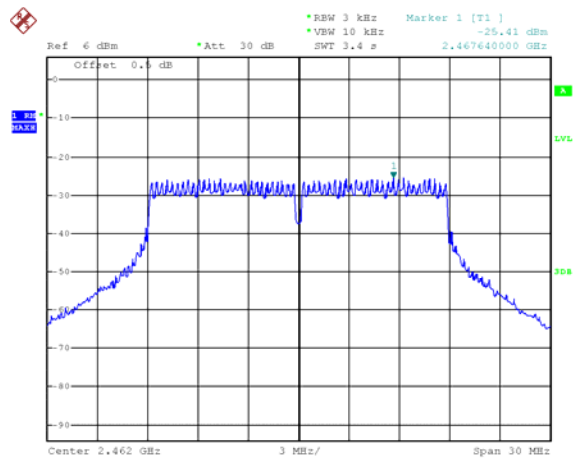


Date: 22.FEB.2024 10:42:14

Mode: TX 11n HT40 channel 3

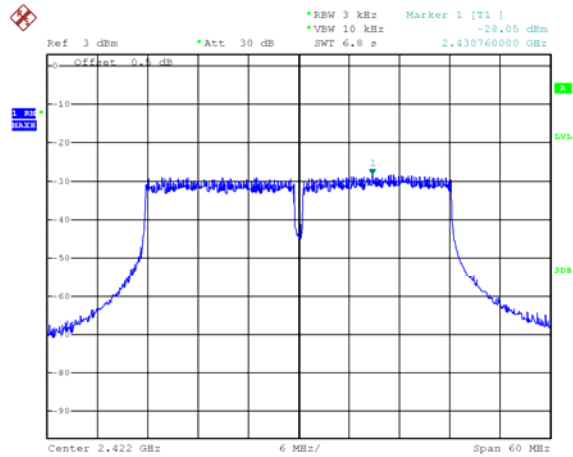


Date: 22.FEB.2024 10:22:32

Mode: TX 11n HT40 channel 6

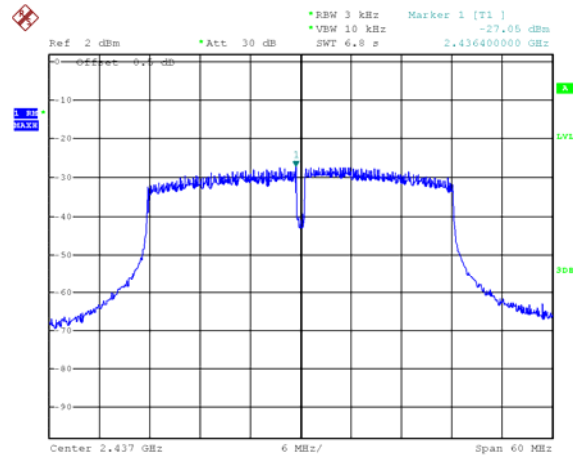


Date: 22.FEB.2024 10:25:43

Mode: TX 11n HT40 channel 9

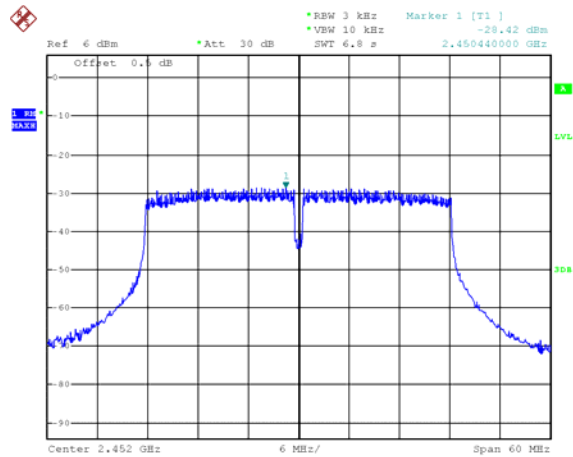


Date: 22.FEB.2024 10:30:58

Mode: TX 11ax HT20 channel 1

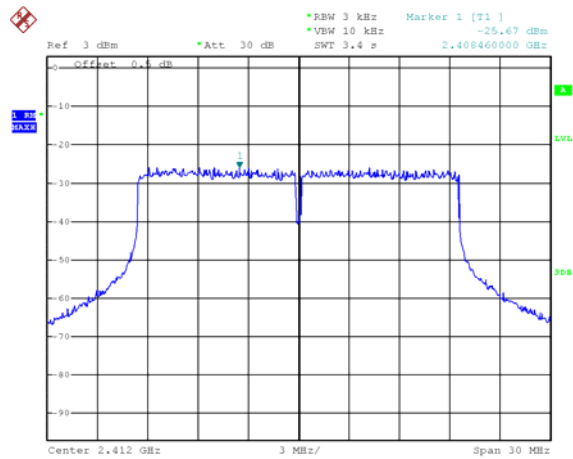


Date: 11.MAR.2024 18:07:16

Mode: TX 11ax HT20 channel 6

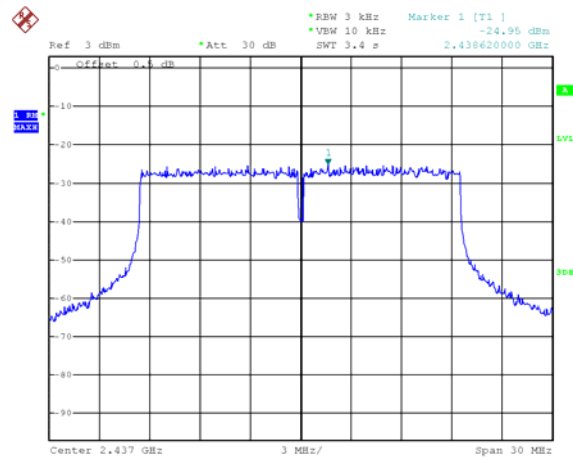


Date: 11.MAR.2024 18:08:12

Mode: TX 11ax HT20 channel 11

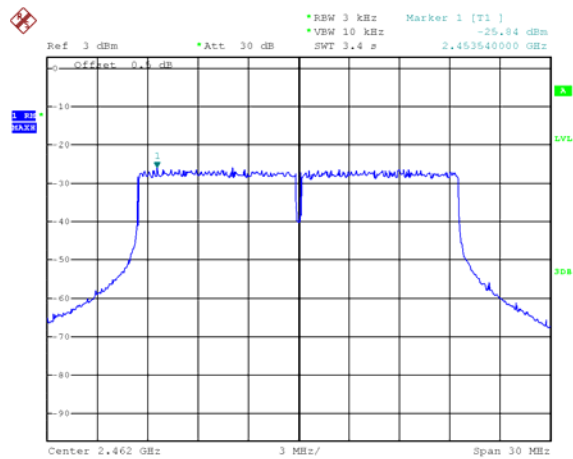


Date: 11.MAR.2024 17:33:37

Mode: TX 11ax HT40 channel 3

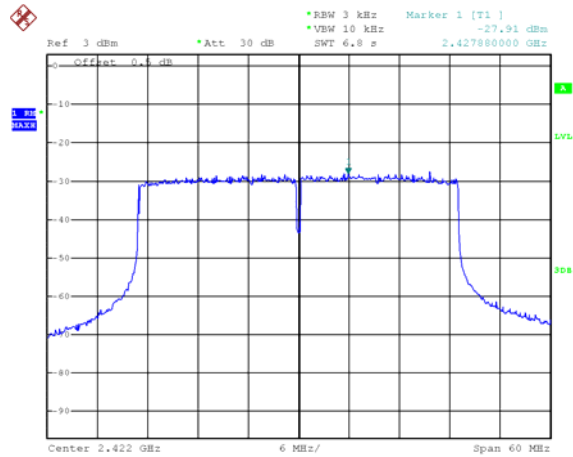


Date: 11.MAR.2024 17:06:54

Mode: TX 11ax HT40 channel 6

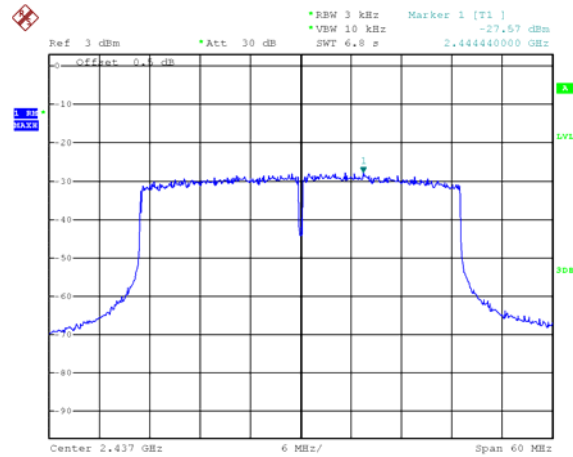

Date: 11.MAR.2024 17:13:02

Mode: TX 11ax HT40 channel 9

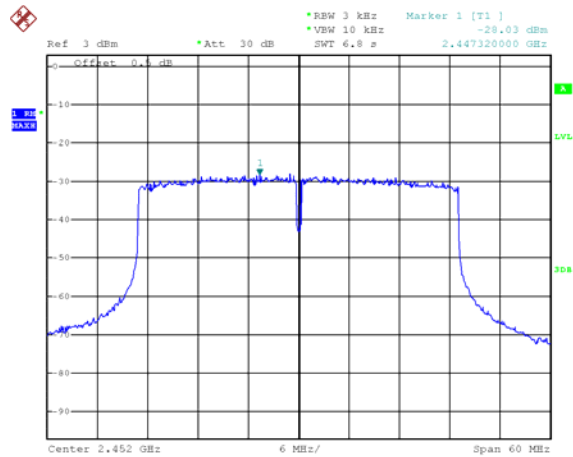

Date: 11.MAR.2024 17:20:43

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Note: Please refer to RF Exposure Report: WTD24D01019167W005

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-M47-Photos.

=====End of Report=====