



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road,
Nanshan District, Shenzhen, 518057 China

FCC ID: YAMBP5XXU1

Product Name: Digital Portable Radio

**Model Number: BP562 U(1), BP560 U(1), BP565 U(1), BP566 U(1),
BP568 U(1), BP569 U(1), BP510 U(1), BP512 U(1),
BP515 U(1), BP516 U(1), BP518 U(1), BP519 U(1),
HP360 U(1), HP362 U(1), HP365 U(1), HP366 U(1),
HP368 U(1), HP369 U(1), HP310 U(1), HP312 U(1),
HP315 U(1), HP316 U(1), HP318 U(1), HP319 U(1)**

**Standard(s): FCC PART 22, 74, 80 and 90
ANSI C63.26-2015
TIA-603-E-2016**

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21100125-00D

Date Of Issue: 2021-12-28

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	6
1.2.2 Support Equipment List and Details	6
1.2.4 Block Diagram of Test Setup	6
1.3 MEASUREMENT UNCERTAINTY	7
2. SUMMARY OF TEST RESULTS	8
3. REQUIREMENTS AND TEST PROCEDURES	9
3.1 RF OUTPUT POWER.....	9
3.1.1 Applicable Standard.....	9
3.1.2 Test Procedure	9
3.2 MODULATION CHARACTERISTIC:.....	9
3.2.1 Applicable Standard.....	9
3.2.2 Test Procedure	9
3.3 OCCUPIED BANDWIDTH & EMISSION MASK:	9
3.3.1 Applicable Standard.....	9
3.3.2 Test Procedure	9
3.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:	10
3.4.1 Applicable Standard.....	10
3.4.2 Test Procedure	10
3.5 RADIATED SPURIOUS EMISSIONS:	10
3.5.1 Applicable Standard.....	10
3.5.2 Test Procedure	10
3.6 FREQUENCY STABILITY:.....	11
3.6.1 APPLICABLE STANDARD.....	11
3.6.2 Test Procedure	11
3.7 TRANSIENT FREQUENCY BEHAVIOR.....	12
3.7.1 Applicable Standard.....	12
3.7.2 TEST PROCEDURE	12
4. Test DATA AND RESULTS.....	13
4.1 RF OUTPUT POWER.....	13
4.2 MODULATION CHARACTERISTIC:.....	20
4.3 OCCUPIED BANDWIDTH & EMISSION MASK:	25
4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:	37
4.5 RADIATED SPURIOUS EMISSIONS:	43

4.6 FREQUENCY STABILITY:.....52

4.7 TRANSIENT FREQUENCY BEHAVIOR.....56

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Digital Portable Radio
EUT Model:	BP562 U(1)
Multiple Models:	BP560 U(1), BP565 U(1), BP566 U(1), BP568 U(1),BP569 U(1), BP510 U(1), BP512 U(1), BP515 U(1), BP516 U(1), BP518 U(1),BP519 U(1), HP360 U(1), HP362 U(1), HP365 U(1), HP366 U(1), HP368 U(1),HP369 U(1), HP310 U(1), HP312 U(1), HP315 U(1), HP316 U(1), HP318 U(1),HP319 U(1)
Rated Input Voltage:	DC 7.4V for battery, DC 12V charging from charger base or DC 5V charging from USB port
Serial Number:	BP562 U(1): CR21100125-RF-S1 BP512 U(1): CR21100125-RF-S2
Operation Frequency:	400-470 MHz
Modulation Type:	FM, 4FSK
Channel Spacing:	12.5 kHz / 25 KHz
Rated Output Power: (Conducted)	High Power Level: 4W Low Power Level: 1W
EUT Received Date:	2021.11.2
EUT Received Status:	Good
Note: The Multiple models are identical with Test model, please refer to the declaration letter for more detail, which was provided by manufacturer.	

Antenna Information Detail▲:

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
Hytera Communications Corporation Limited	Dipole	50	0 dBi/400-470MHz	Compliance
The Method of §15.203 Compliance: ☒ Antenna must be permanently attached to the unit. ☐ Antenna must use a unique type of connector to attach to the EUT. ☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Huntkey Electric Co., Ltd.	HKA01212010-XQ	Input: AC100V-240V ~50/60Hz, 0.5A Output: DC 12.0V-1.0A, 12.0W

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:


EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.4 Block Diagram of Test Setup

RE Below 1GHz

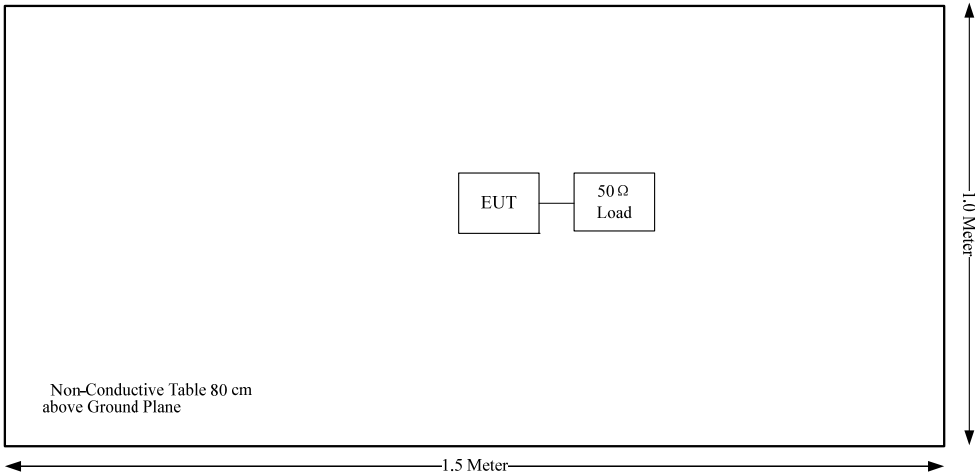

RE Above 1GHz

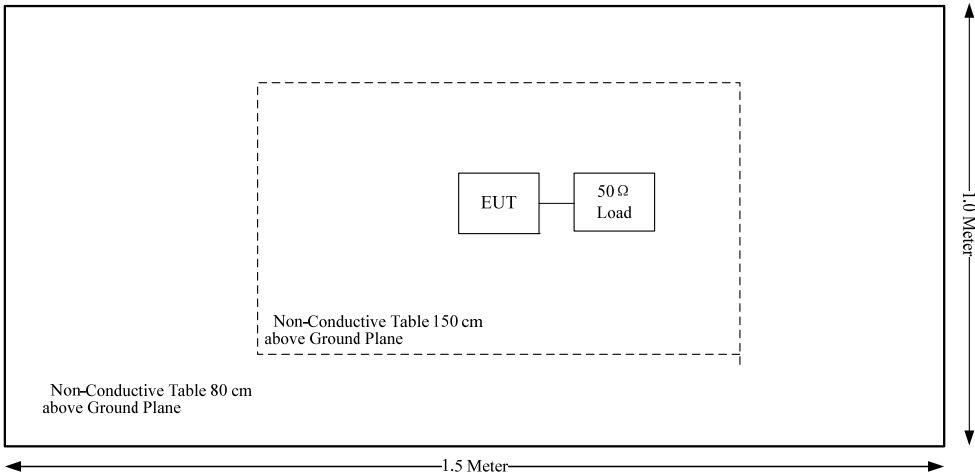

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1046; § 22.727; §80.215; §74.461; §90.205	RF Output Power	Compliance
§2.1047	Modulation Characteristic	Compliance
§2.1049; §22.357; § 22.731; §74.462; §80.205; §80.207 §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861; §74.462; §80.211; §90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861; §74.462; §80.211; §90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355; §74.464; §80.209; §90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

3. REQUIREMENTS AND TEST PROCEDURES

3.1 RF OUTPUT POWER

3.1.1 Applicable Standard

FCC §2.1046, § 22.727, §74.461, §80.215 and §90.205

3.1.2 Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

3.2 MODULATION CHARACTERISTIC:

3.2.1 Applicable Standard

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

3.2.2 Test Procedure

Test Method: TIA-603-E 2.2.3

3.3 OCCUPIED BANDWIDTH & EMISSION MASK:

3.3.1 Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, §80.205, §80.207, §90.209 and §90.210

3.3.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

3.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

3.4.1 Applicable Standard

FCC §2.1051, §22.861, §74.462, §80.211, and §90.210

3.4.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

3.5 RADIATED SPURIOUS EMISSIONS:

3.5.1 Applicable Standard

FCC §2.1053, §22.861, §74.462, §80.211 and §90.210

3.5.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

3.6 FREQUENCY STABILITY:

3.6.1 Applicable Standard

FCC §2.1055, § 22.355, §74.464, §80.209 and §90.213

3.6.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.


3.7 TRANSIENT FREQUENCY BEHAVIOR

3.7.1 Applicable Standard

Regulations: FCC §90.214

3.7.2 Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

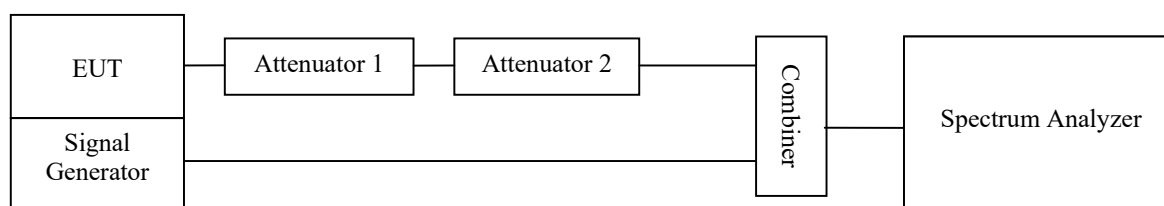

4. Test DATA AND RESULTS

4.1 RF OUTPUT POWER

Serial Number:	CR21100125-RF	Test Date:	2021-12-02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rinka Li	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.8

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	2021-08-08	2022-08-07
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	2021-08-08	2022-08-07
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)		Note
				High Power Level	Low Power Level	High Power Level	Low Power Level	
12.5kHz	FM	Low	400.0125	35.66	30.50	36.81	30.79	FCC
		Middle	453.2125	36.19	29.12	36.81	30.79	Part 90
		High	469.9875	35.55	30.76	36.81	30.79	
		Additional	455.0125	36.38	29.05	36.81	30.79	Part 74
		Additional	454.0125	36.45	29.15	36.81	30.79	Part 22
	4FSK	Low	400.0125	36.18	30.41	36.81	30.79	FCC
		Middle	453.2125	36.38	29.36	36.81	30.79	Part 90
		High	469.9875	35.36	30.66	36.81	30.79	
		Additional	455.0125	36.29	30.48	36.81	30.79	Part 74
		Additional	454.0125	36.29	30.48	36.81	30.79	Part 22
25kHz	FM	Additional	455.0125	36.24	30.77	36.81	30.79	Part 74
		Additional	454.0125	36.31	30.43	36.81	30.79	Part 22
		Additional	459.9875	36.09	30.72	36.81	30.79	Part 80


Note:

The high rated power level is 4W(36dBm), and low rated power level is 1W(30dBm).


The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

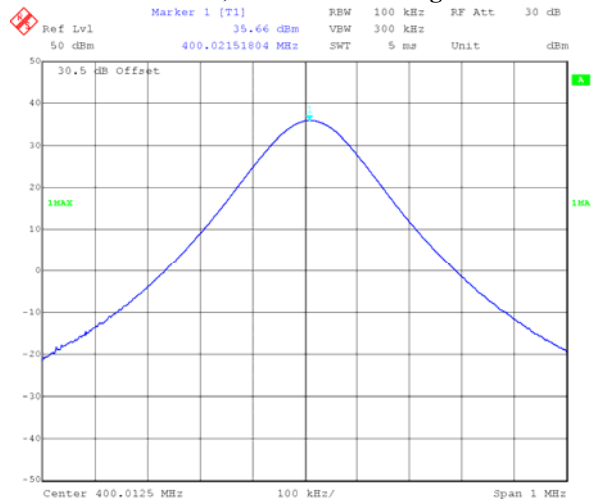FM, 12.5kHz:**Low Channel, 400.0125 MHz High Power**


Date: 2.DEC.2021 11:10:51

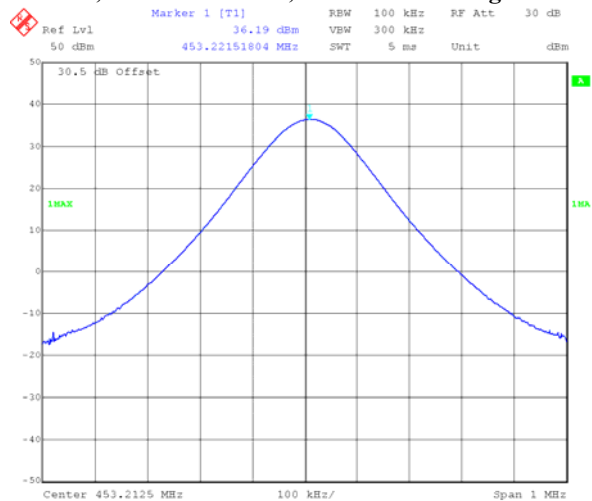Part 90, Middle Channel, 453.2125 MHz High Power


Date: 2.DEC.2021 11:11:54

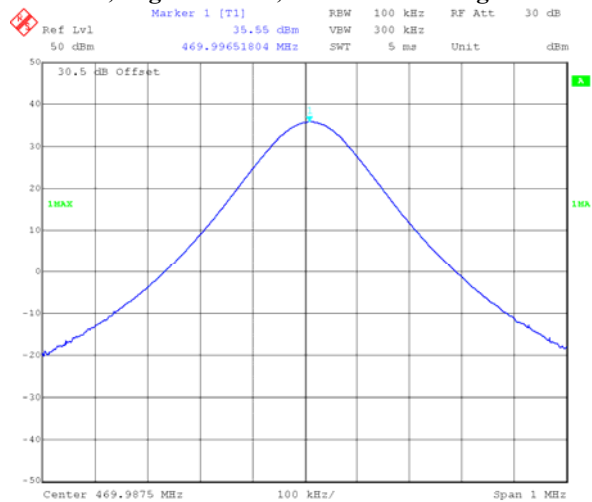Part 90, High Channel, 469.9875 MHz High Power


Date: 2.DEC.2021 11:16:09

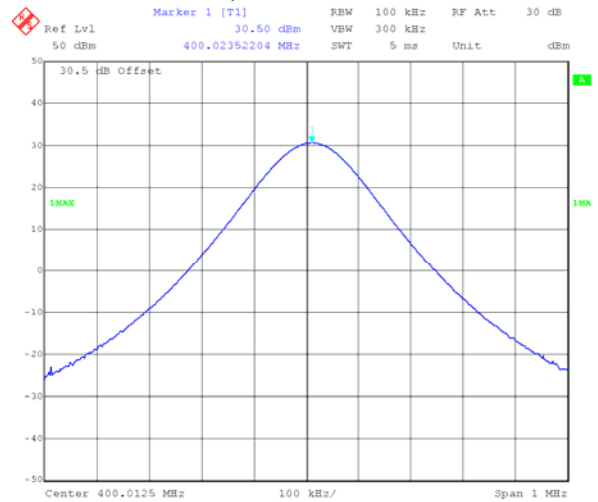Low Channel, 400.0125 MHz Low Power


Date: 2.DEC.2021 11:11:23

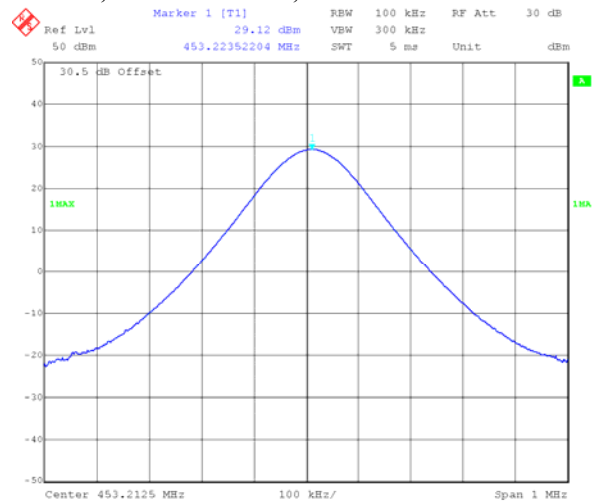Part 90, Middle Channel, 453.2125 MHz Low Power


Date: 2.DEC.2021 11:15:22

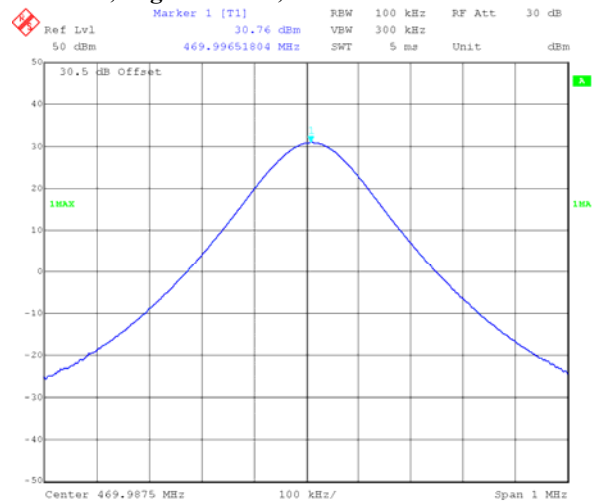Part 90, High Channel, 469.9875 MHz Low Power


Date: 2.DEC.2021 11:17:45

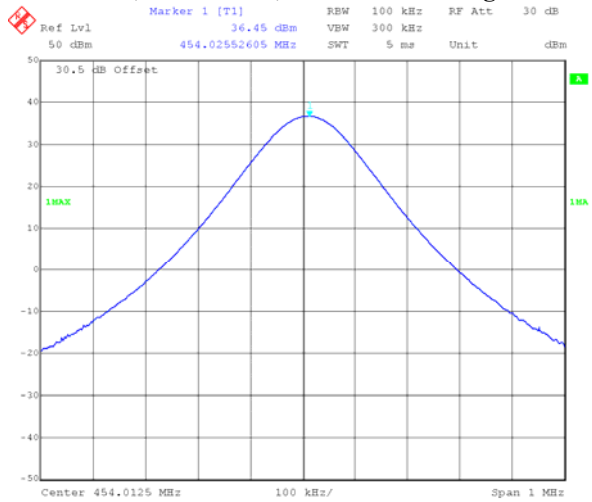Additional, For Part 22, 454.0125 MHz High Power


Date: 2.DEC.2021 11:21:23

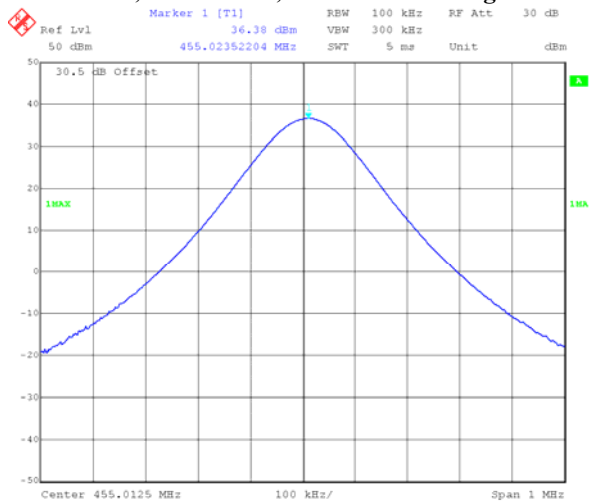Additional, For Part 74, 455.0125 MHz High Power


Date: 2.DEC.2021 11:19:04

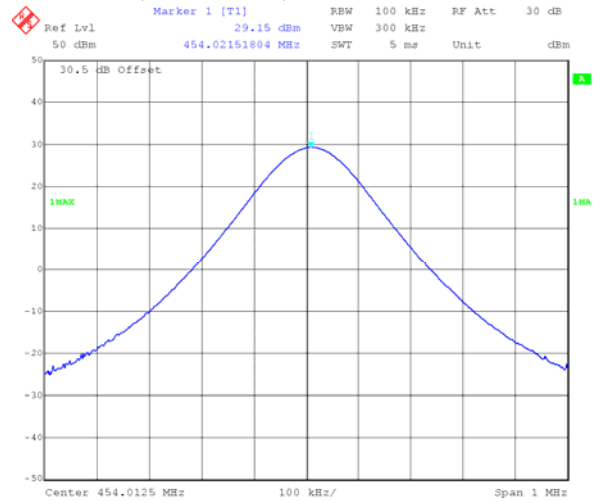Additional, For Part 22, 454.0125 MHz Low Power


Date: 2.DEC.2021 11:21:58

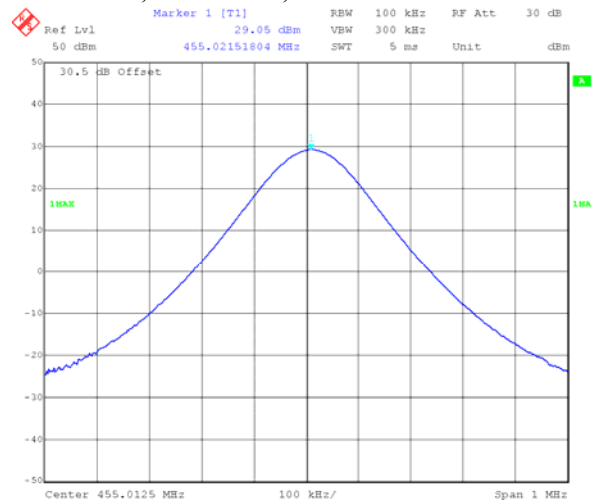Additional, For Part 74, 455.0125 MHz Low Power


Date: 2.DEC.2021 11:20:24

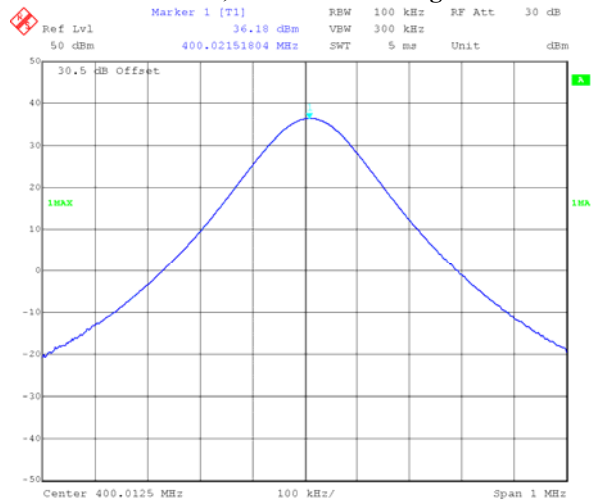4FSK, 12.5kHz:**Low Channel, 400.0125 MHz High Power**


Date: 2.DEC.2021 11:27:52

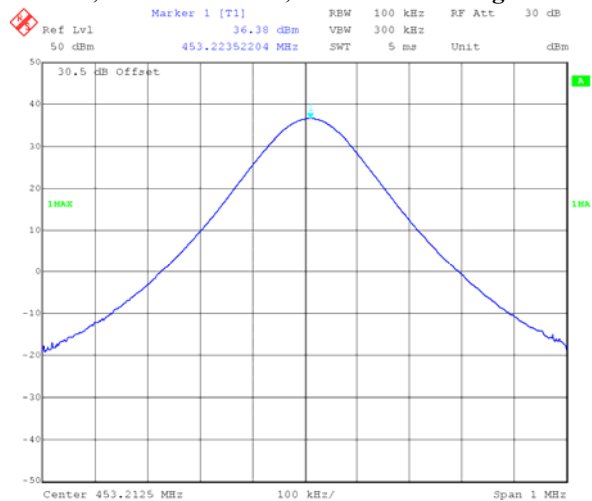Part 90, Middle Channel, 453.2125 MHz High Power


Date: 2.DEC.2021 11:28:20

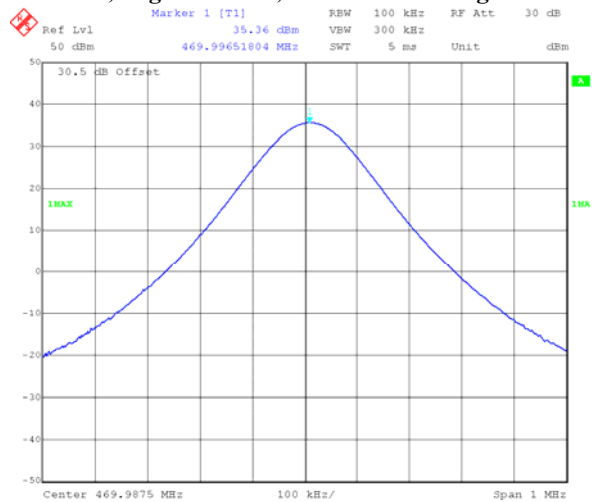Part 90, High Channel, 469.9875 MHz High Power


Date: 2.DEC.2021 11:30:13

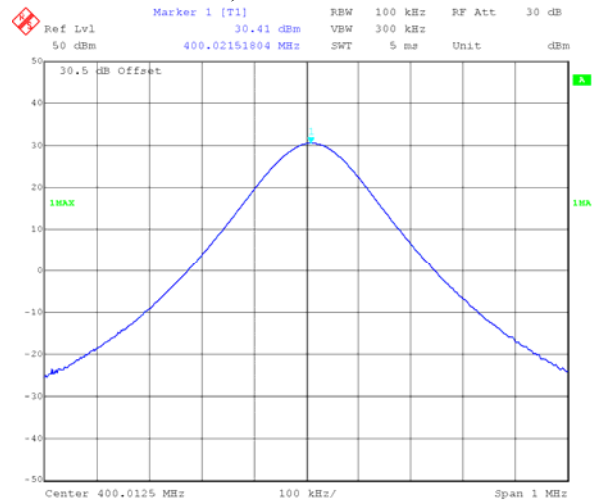Low Channel, 400.0125 MHz Low Power





Date: 2.DEC.2021 11:27:52

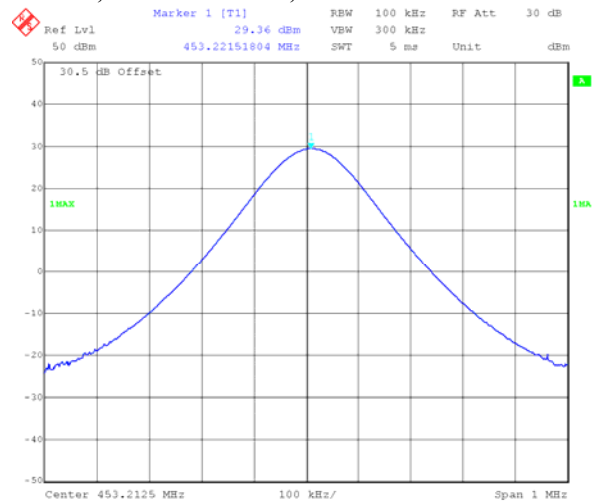
Part 90, Middle Channel, 453.2125 MHz Low Power

Date: 2.DEC.2021 11:28:49

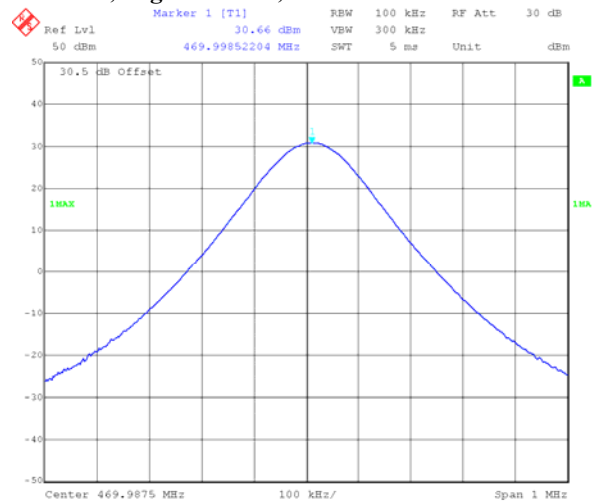
Part 90, High Channel, 469.9875 MHz Low Power

Date: 2.DEC.2021 11:31:58

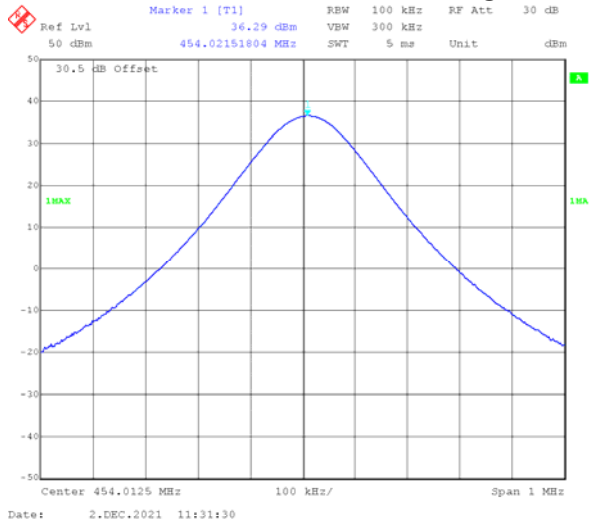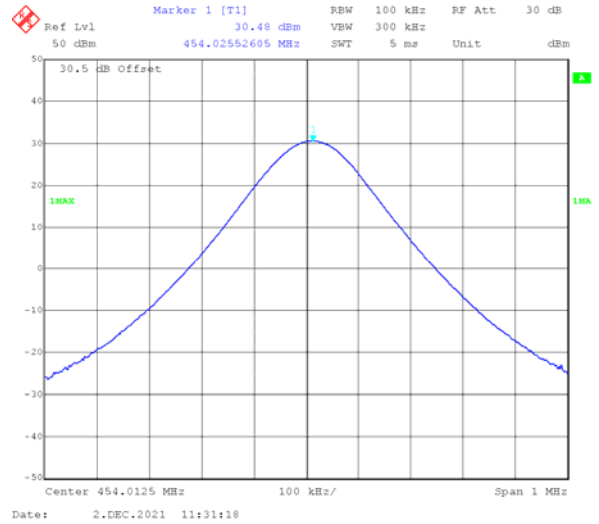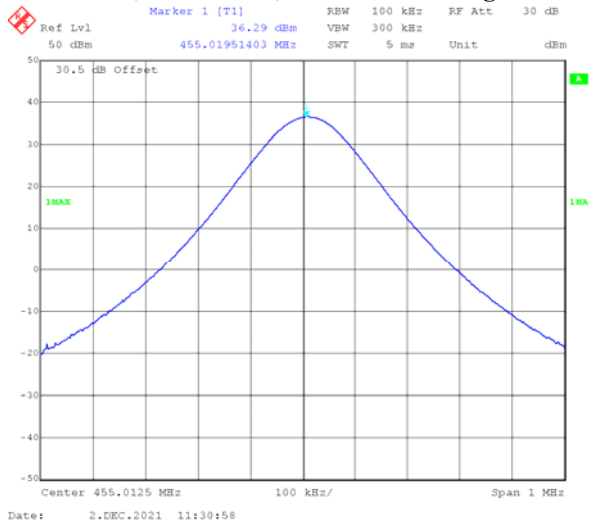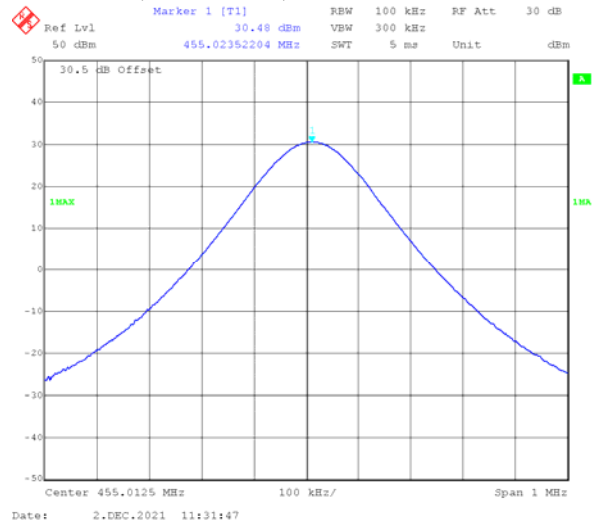
Additional, For Part 22, 454.0125 MHz High Power**Additional, For Part 22, 454.0125 MHz Low Power****Additional, For Part 74, 455.0125 MHz High Power****Additional, For Part 74, 455.0125 MHz Low Power**

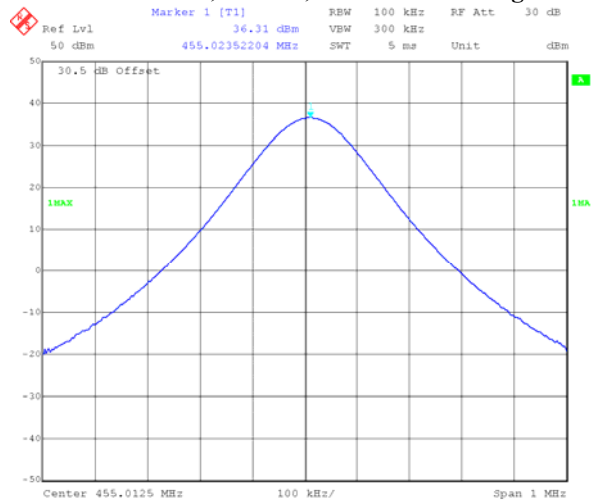FM, 25kHz:**Additional Channel, Part 74, 455.0125 MHz High Power**


Date: 2.DEC.2021 11:25:13

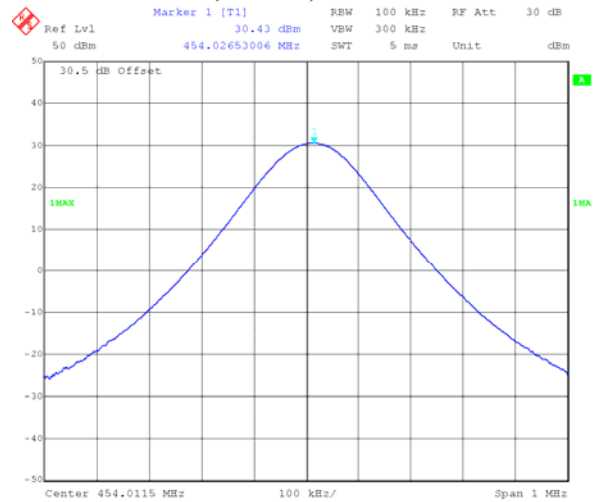Additional Channel, Part 74, 455.0125 MHz Low Power


Date: 2.DEC.2021 12:17:07

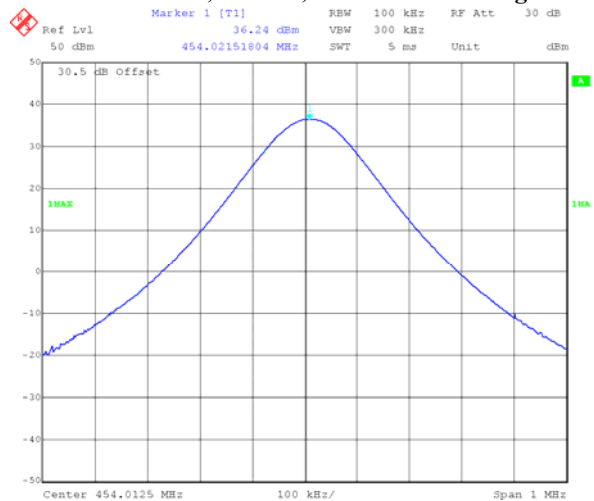Additional Channel, Part 22, 454.0125 MHz High Power


Date: 2.DEC.2021 11:26:09

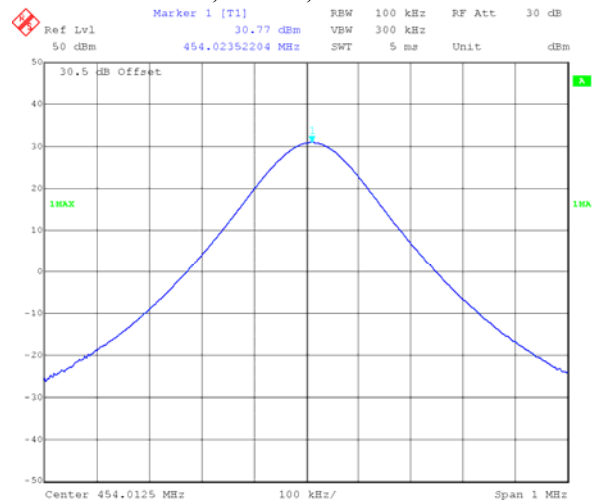Additional Channel, Part 22, 454.0125 MHz Low Power

Date: 2.DEC.2021 11:24:07

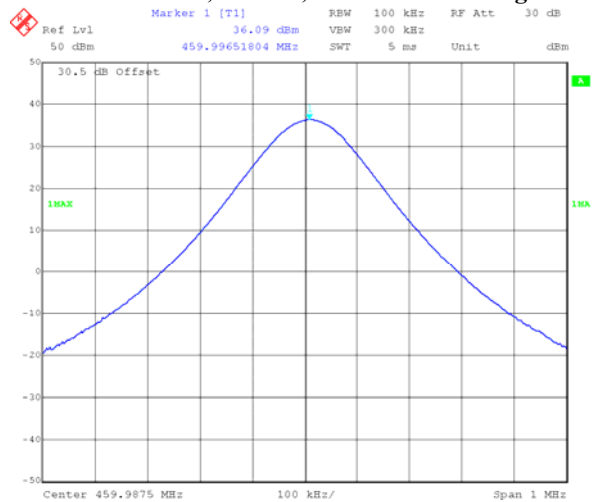Additional Channel, Part 80, 459.9875 MHz High Power

Date: 2.DEC.2021 11:22:49

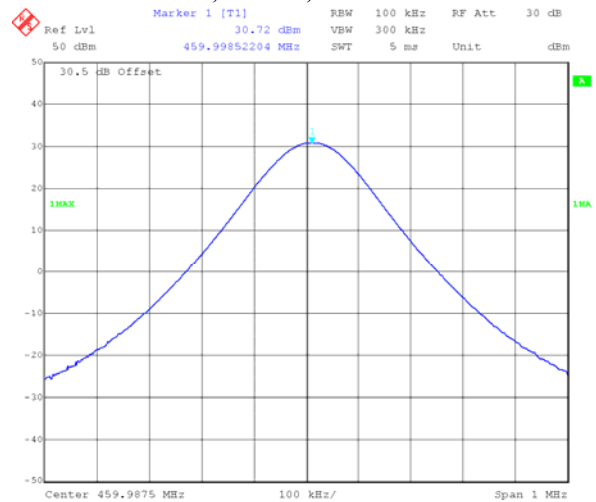Additional Channel, Part 80, 459.9875 MHz Low Power

Date: 2.DEC.2021 11:23:52

4.2 MODULATION CHARACTERISTIC:

Serial Number:	CR21100125-RF	Test Date:	2021-12-02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rinka Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.8
----------------------	------	------------------------------	----	------------------------	-------



Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	2021-08-08	2022-08-07
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	2021-08-08	2022-08-07
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Audio Frequency Response – High Power

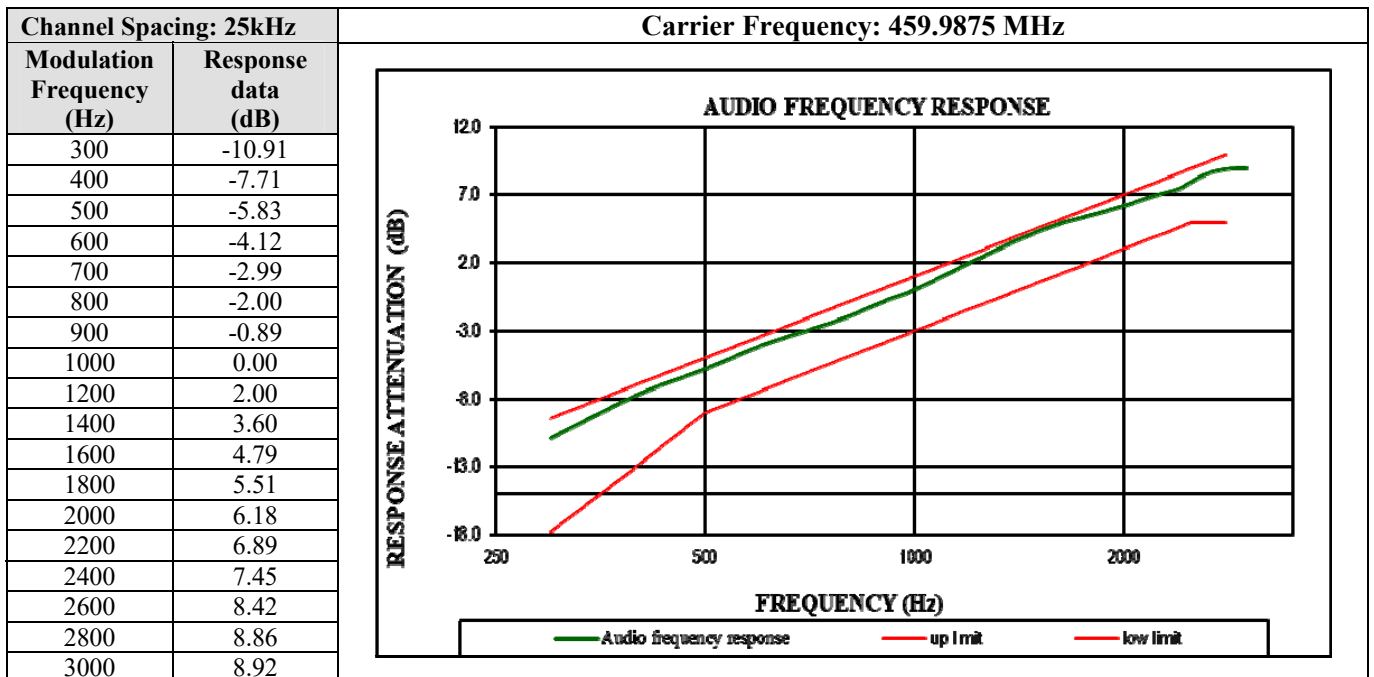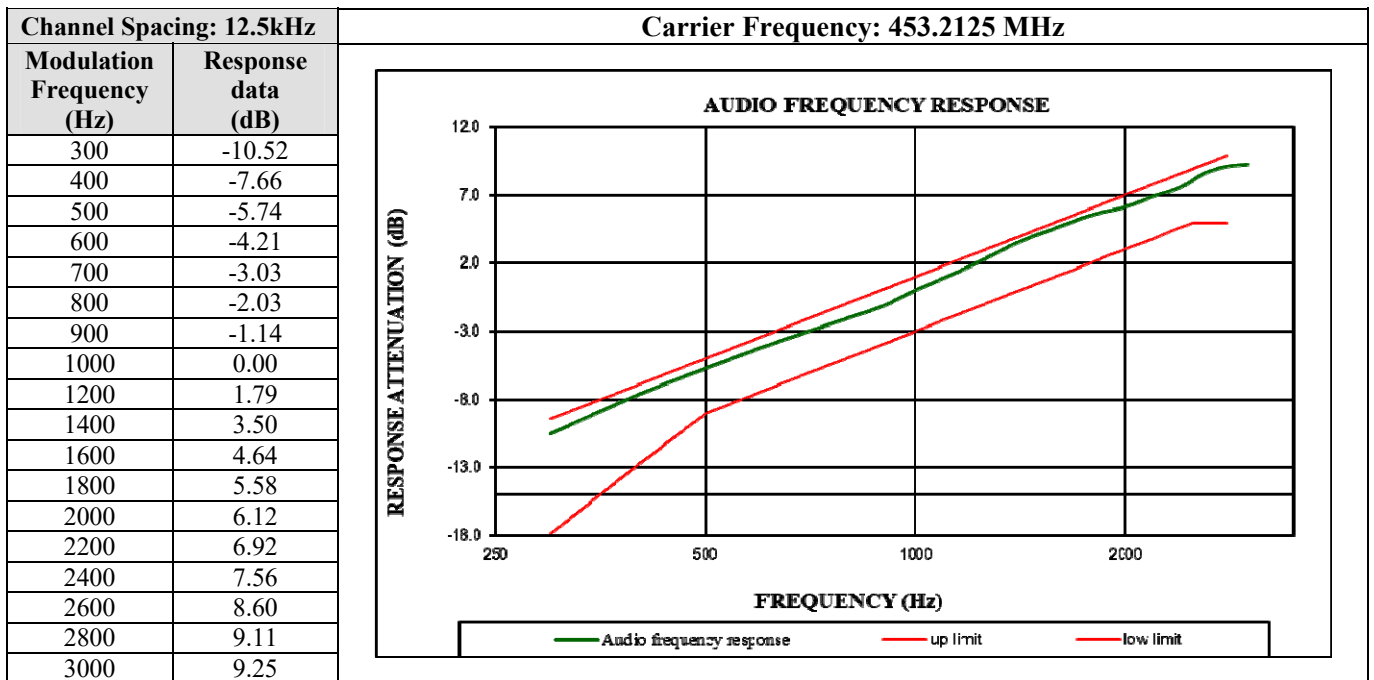


Modulation Limiting – High Power

Channel Spacing: 12.5kHz		Carrier Frequency: 453.2125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.776	0.497	1.778	0.499	2.5
400	1.802	0.677	1.804	0.679	2.5
500	1.772	0.862	1.774	0.864	2.5
600	1.735	0.932	1.737	0.934	2.5
700	1.740	1.084	1.742	1.086	2.5
800	1.783	1.199	1.785	1.201	2.5
900	1.800	1.354	1.802	1.356	2.5
1000	1.759	1.515	1.761	1.517	2.5
1200	1.789	1.704	1.791	1.706	2.5
1400	1.794	1.734	1.796	1.736	2.5
1600	1.804	1.760	1.806	1.762	2.5
1800	1.812	1.756	1.813	1.757	2.5
2000	1.863	1.810	1.864	1.811	2.5
2200	1.883	1.838	1.884	1.839	2.5
2400	1.937	1.837	1.938	1.838	2.5
2600	1.983	1.882	1.984	1.883	2.5
2800	1.742	1.827	1.743	1.828	2.5
3000	2.018	1.799	2.019	1.800	2.5

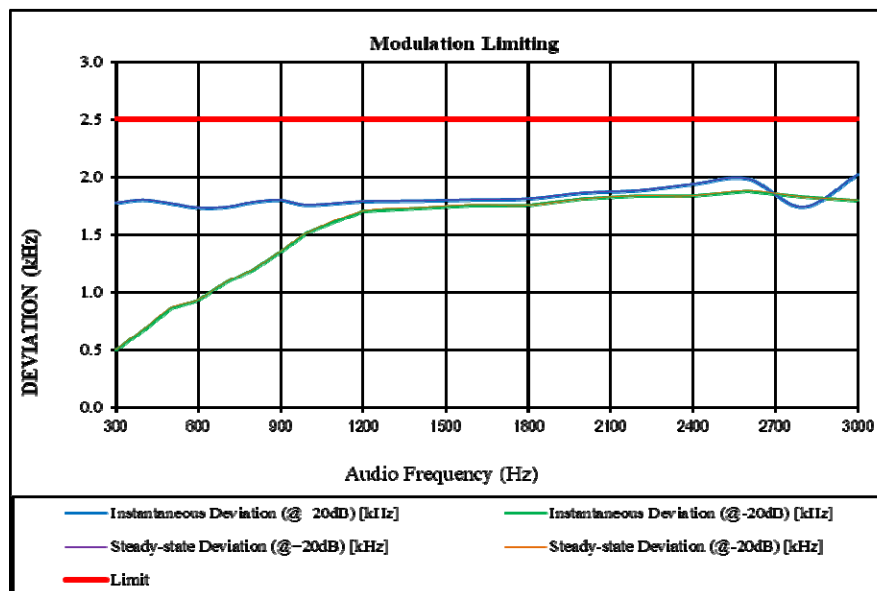


Channel Spacing: 25kHz		Carrier Frequency: 459.9875 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	3.774	0.928	3.776	0.930	5
400	3.73	1.269	3.732	1.271	5
500	3.626	1.566	3.628	1.568	5
600	3.649	1.85	3.651	1.852	5
700	3.515	2.11	3.517	2.112	5
800	3.523	2.356	3.525	2.358	5
900	3.599	2.706	3.601	2.708	5
1000	3.629	3.013	3.631	3.015	5
1200	3.438	3.38	3.440	3.382	5
1400	3.423	3.39	3.425	3.392	5
1600	3.568	3.541	3.570	3.543	5
1800	3.919	3.894	3.920	3.895	5
2000	3.998	3.969	3.999	3.970	5
2200	3.92	3.997	3.921	3.998	5
2400	4.08	3.943	4.081	3.944	5
2600	4.284	4.008	4.285	4.009	5
2800	3.843	4.381	3.844	4.382	5
3000	3.92	4.143	3.921	4.144	5

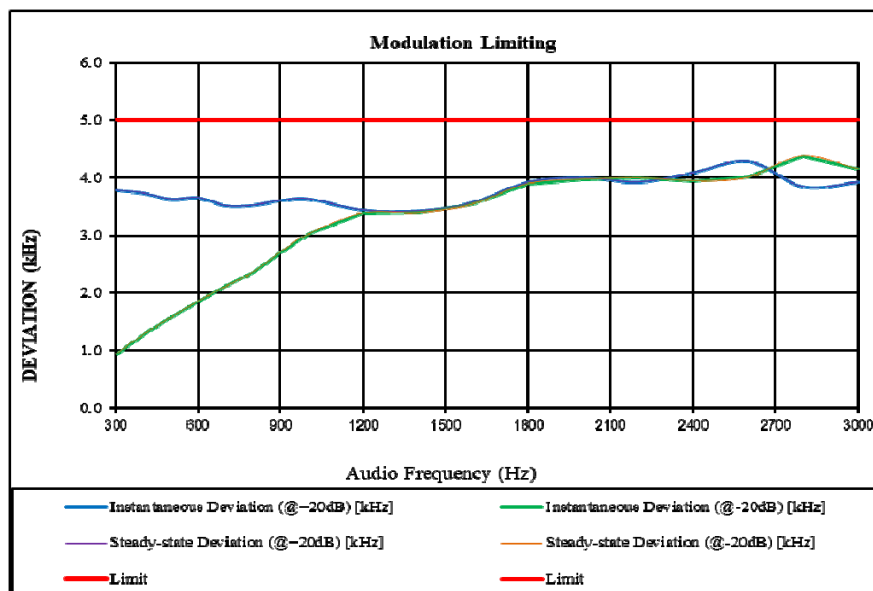


Audio Frequency Low Pass Filter Response – High Power

Channel Spacing: 12.5kHz		
Carrier Frequency: 453.2125 MHz		
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
3.0	-4.3	0.0
3.5	-12.0	-6.7
4.0	-18.1	-12.5
5.0	-26.6	-22.2
7.0	-42.0	-36.8
10.0	-57.1	-52.3
15.0	-73.5	-69.9
20.0	-85.4	-82.5

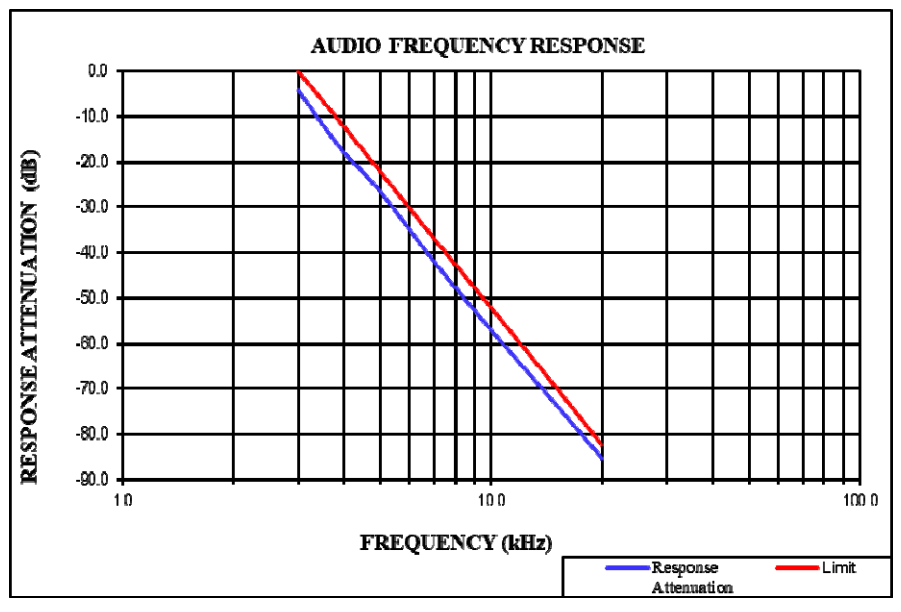

Channel Spacing: 25kHz		
Carrier Frequency: 459.9875 MHz		
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
3.0	-5.1	0.0
3.5	-12.3	-4.0
4.0	-17.1	-7.5
5.0	-27.3	-13.3
7.0	-41.9	-22.1
10.0	-57.2	-31.4
15.0	-74.2	-41.9
20.0	-85.1	-50.0
30.0	-85.2	-50.0
50.0	-85.0	-50.0
70.0	-85.6	-50.0

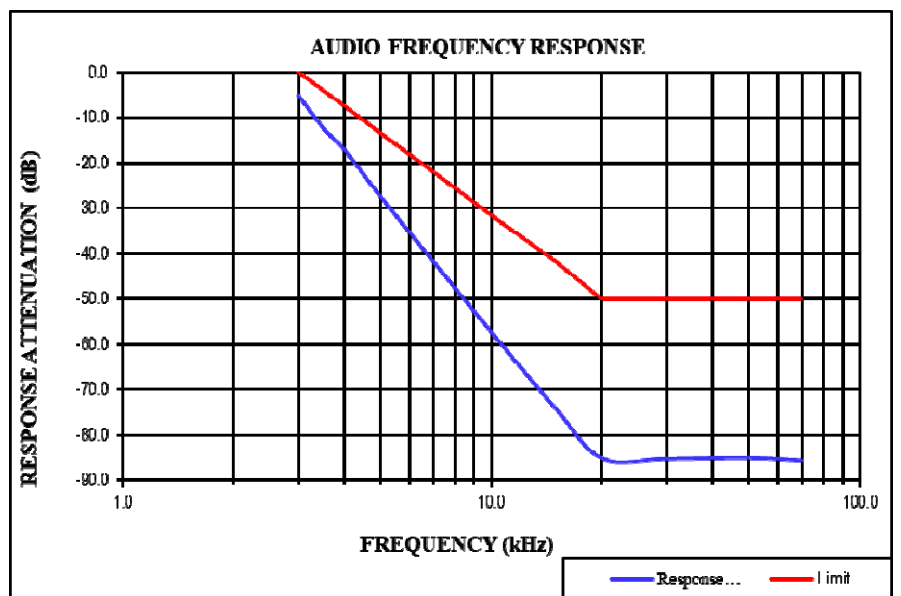

4.3 OCCUPIED BANDWIDTH & EMISSION MASK:

Serial Number:	CR21100125-RF	Test Date:	2021-12-02~2021-12-03
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rinka Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.5~22.1	Relative Humidity: (%)	26~30	ATM Pressure: (kPa)	101.7~101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	2021-08-08	2022-08-07
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	2021-08-08	2022-08-07
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level		Note
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	
FM 12.5kHz	Low	400.0125	9.920	10.421	10.020	10.321	Part 90
	Middle	453.2125	9.920	10.421	9.920	10.421	
	High	469.9875	9.920	10.421	9.920	10.321	
	Additional	454.0125	9.920	10.321	9.920	10.421	Part 22
	Additional	455.0125	9.920	10.421	9.920	10.421	Part 74
4FSK 12.5kHz	Low	400.0125	6.814	9.319	7.114	9.419	Part 90
	Middle	453.2125	7.315	9.719	7.014	9.118	
	High	469.9875	6.814	8.918	7.415	9.619	
	Additional	454.0125	7.315	9.419	7.214	9.218	Part 22
	Additional	455.0125	7.315	9.419	7.114	9.619	Part 74
FM 25kHz	Additional	454.0125	14.830	16.032	14.830	16.032	Part 22
	Additional	455.0125	14.830	16.232	14.830	16.032	Part 74
	Additional	459.9875	14.629	16.232	14.830	16.032	Part 80

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E



The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.



Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

FM, 12.5kHz, High Power:



Low Channel

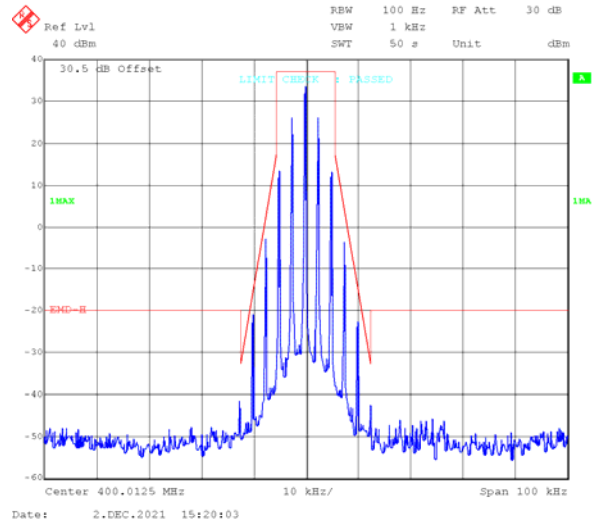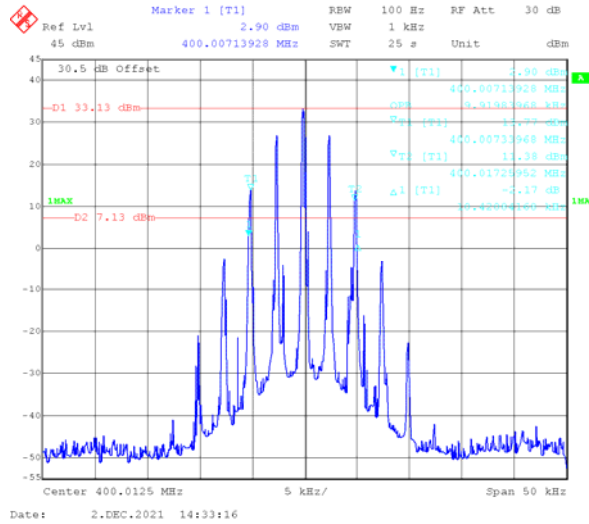



Middle Channel

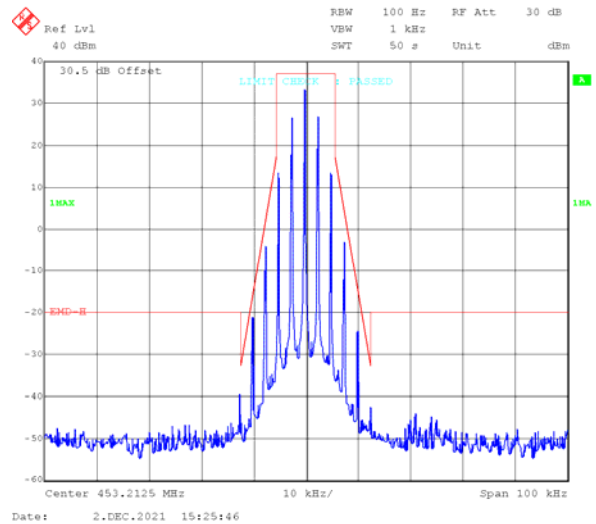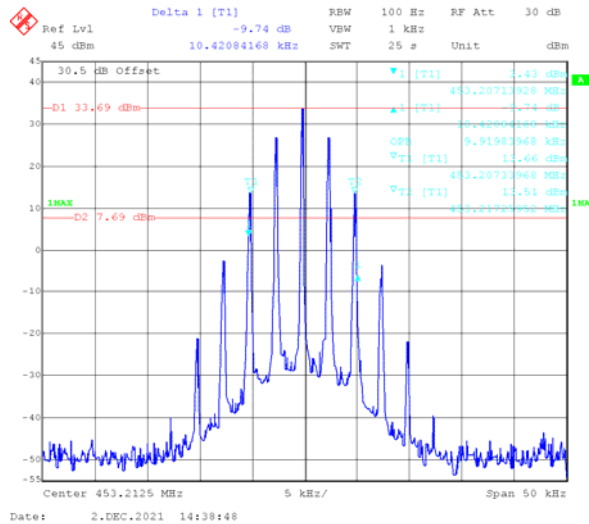



High Channel

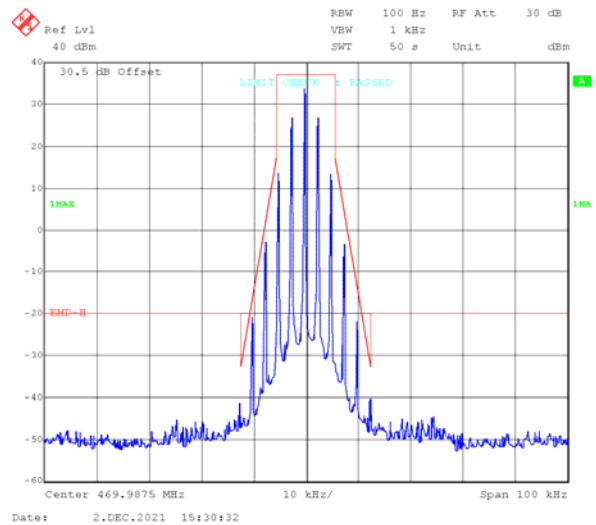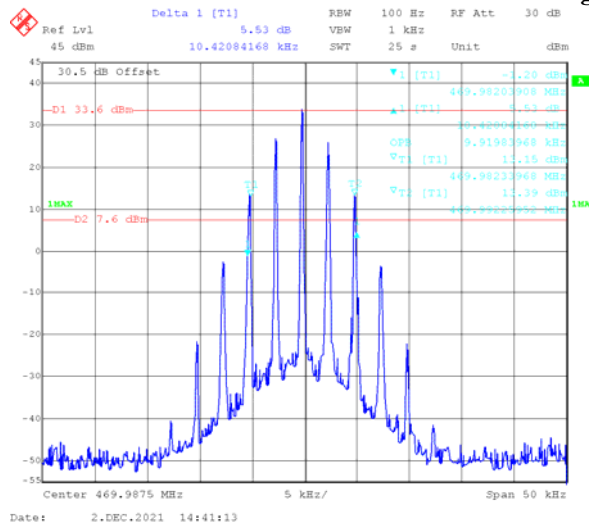

Additional Channel Part 74, 455.0125 MHz

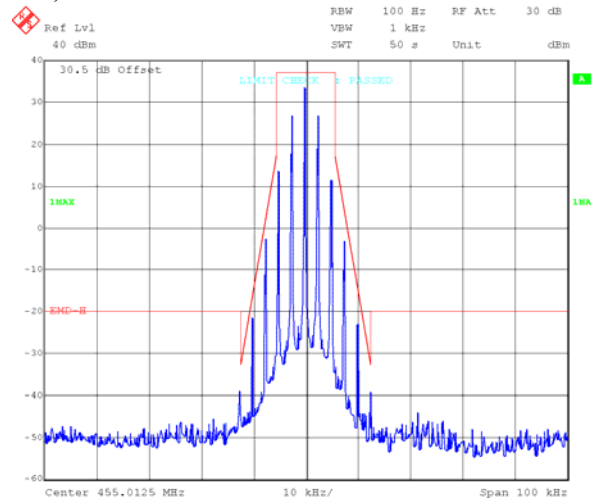
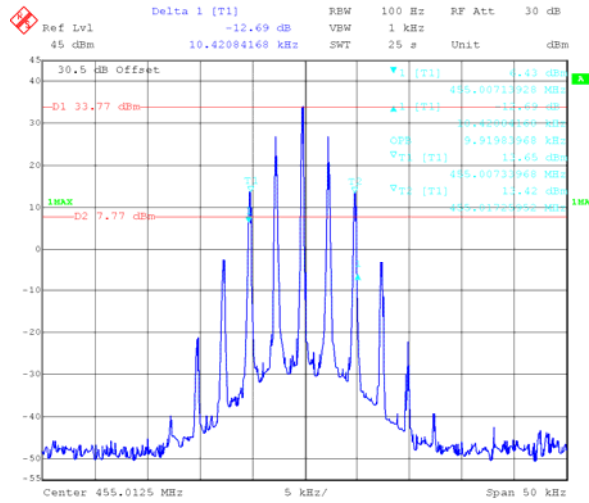


Additional Channel Part 22, 454.0125 MHz

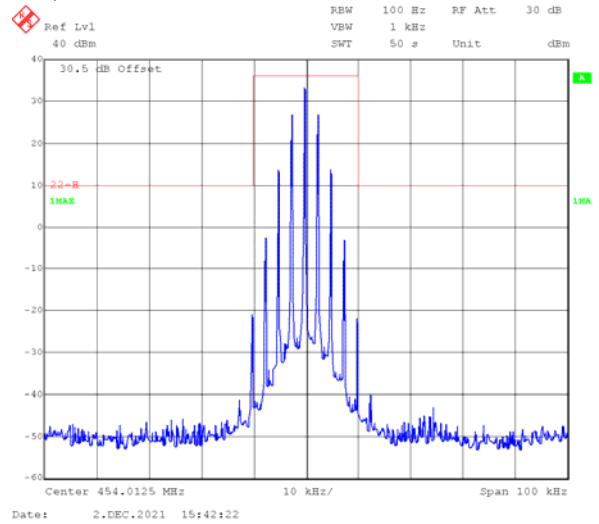
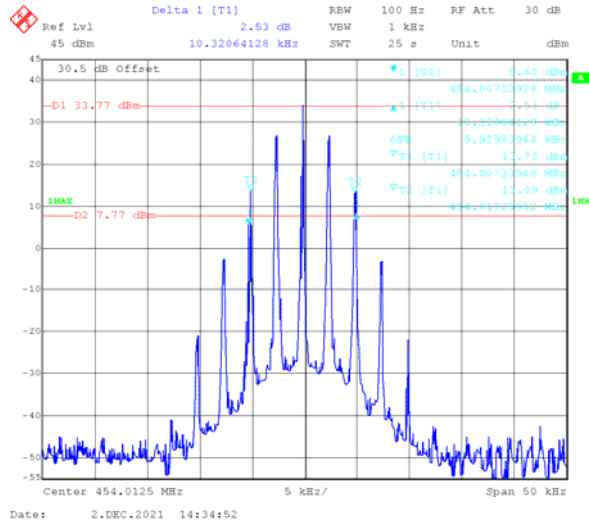


FM, 12.5kHz, Low Power:



Low Channel

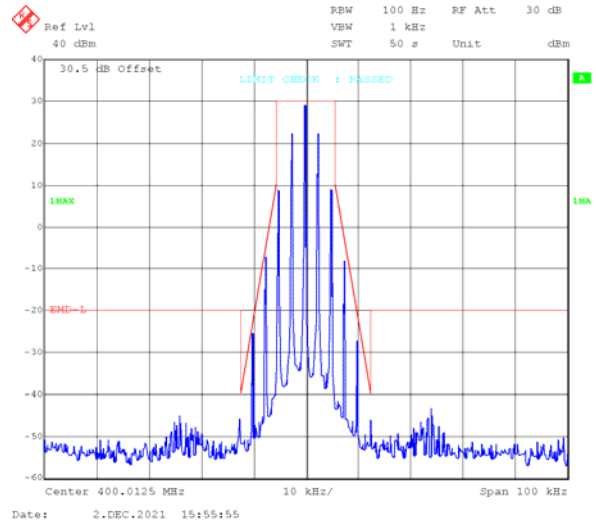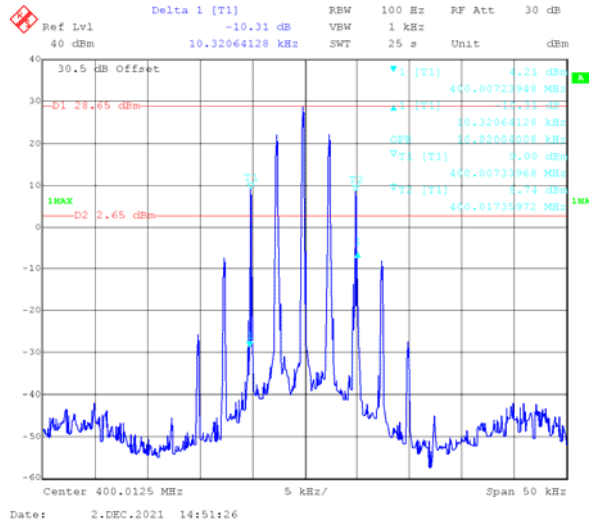



Middle Channel

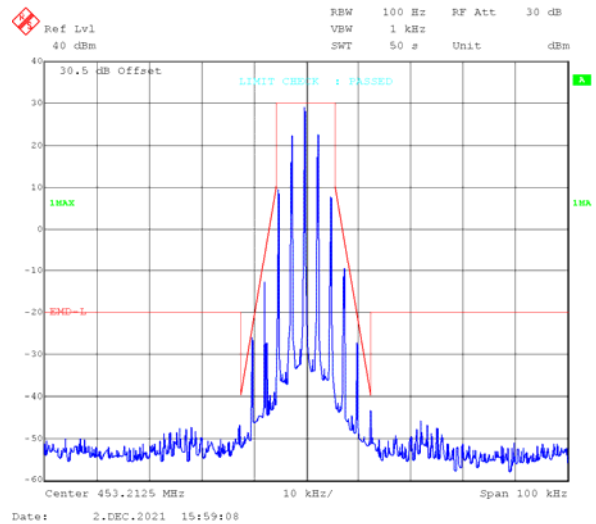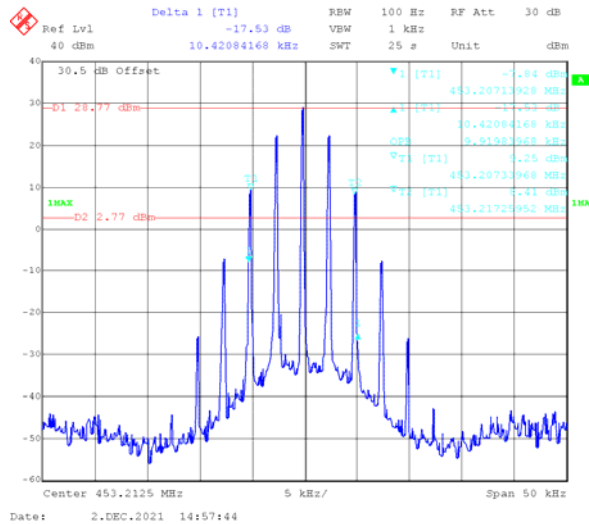



High Channel

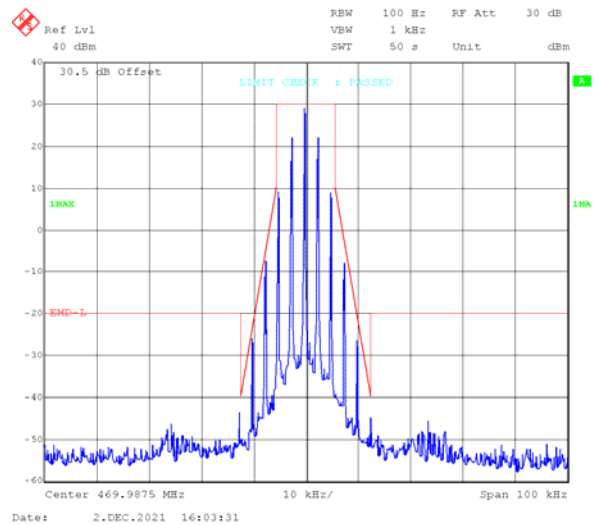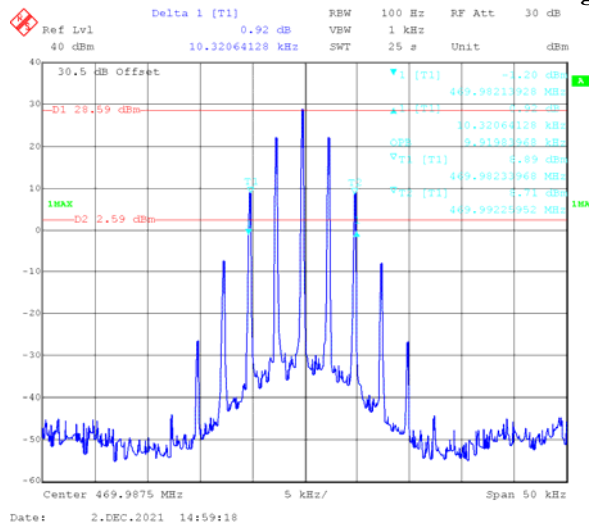

Additional Channel Part 74, 455.0125 MHz

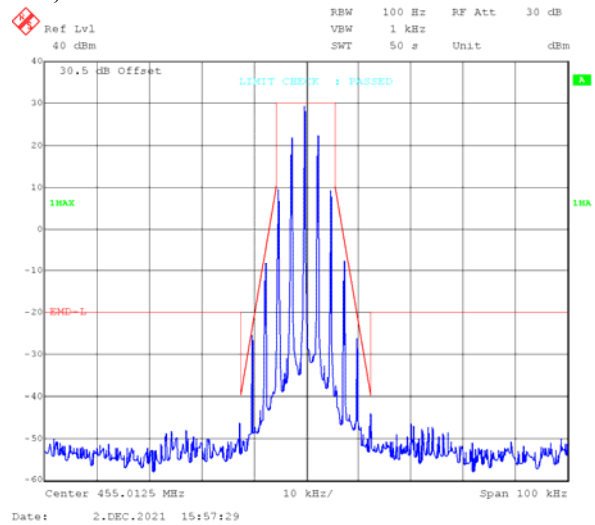
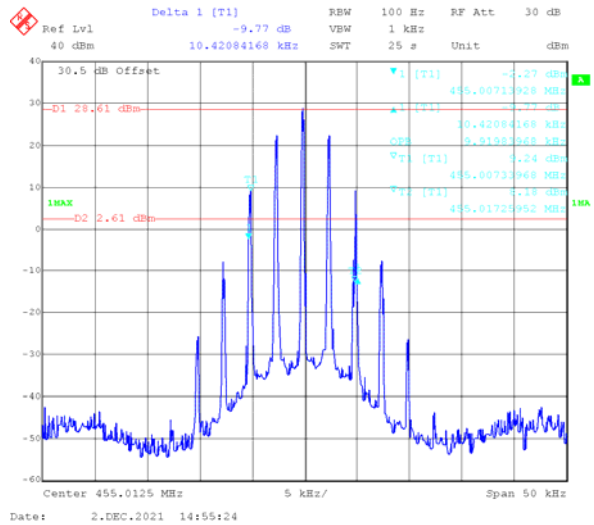


Additional Channel Part 22, 454.0125 MHz

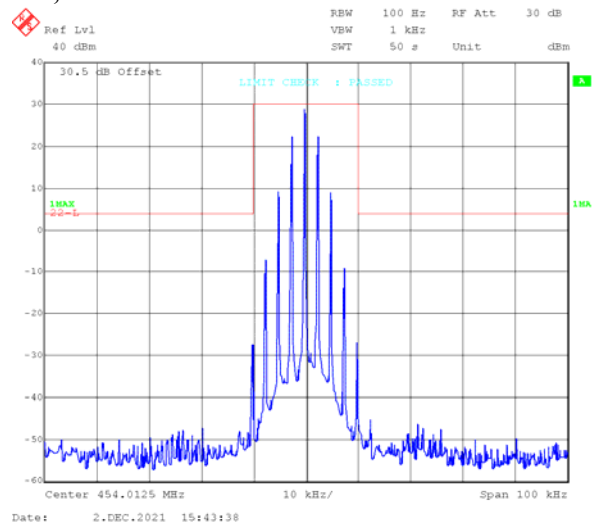
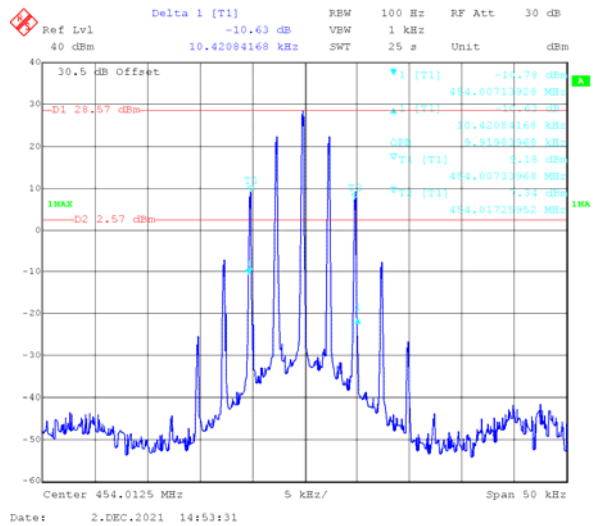


4FSK, 12.5kHz, High Power:



Low Channel

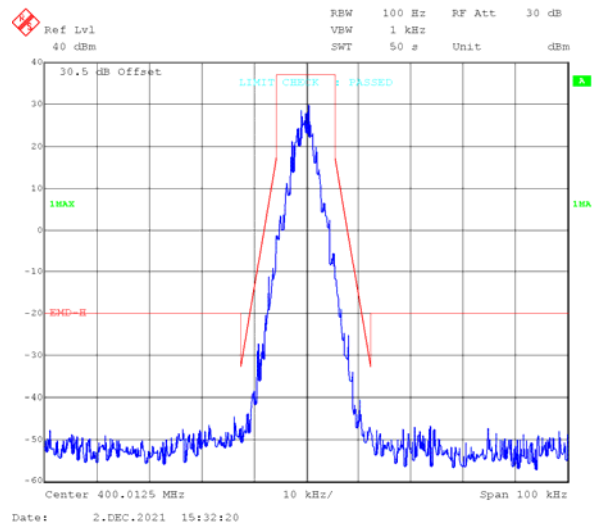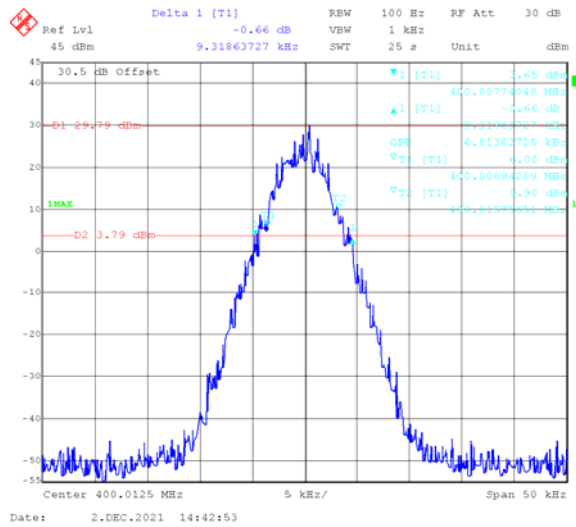



Middle Channel

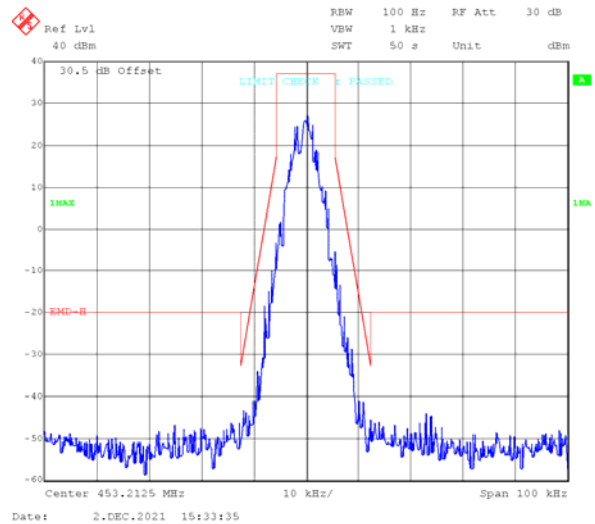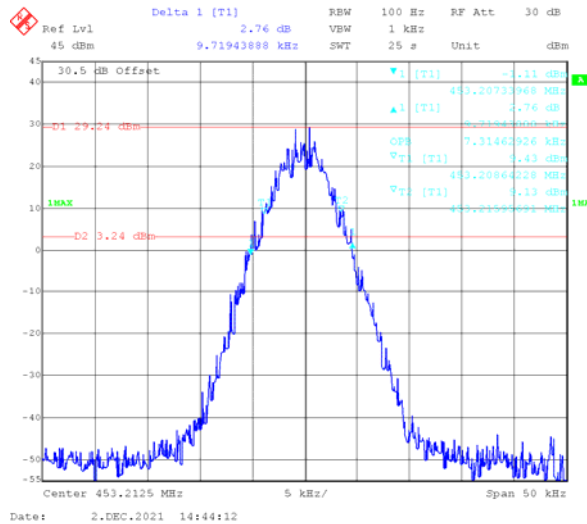



High Channel

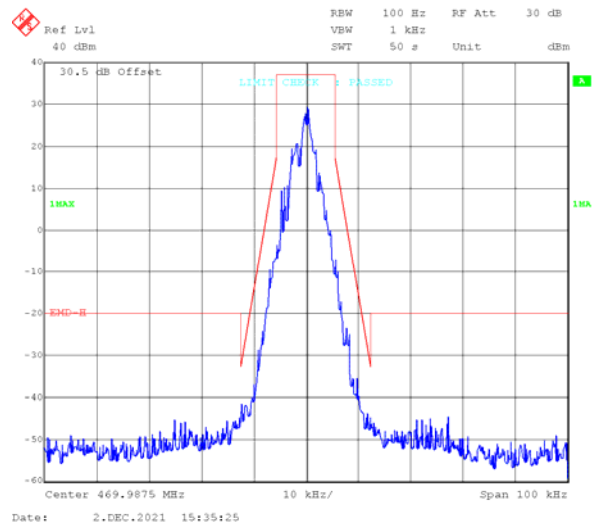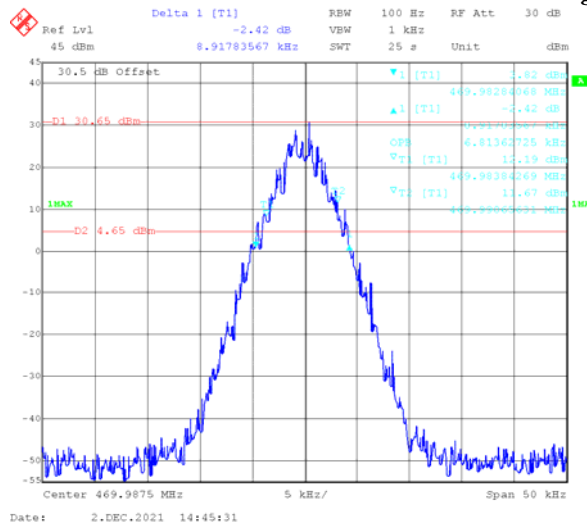


Additional Channel Part 74, 455.0125 MHz

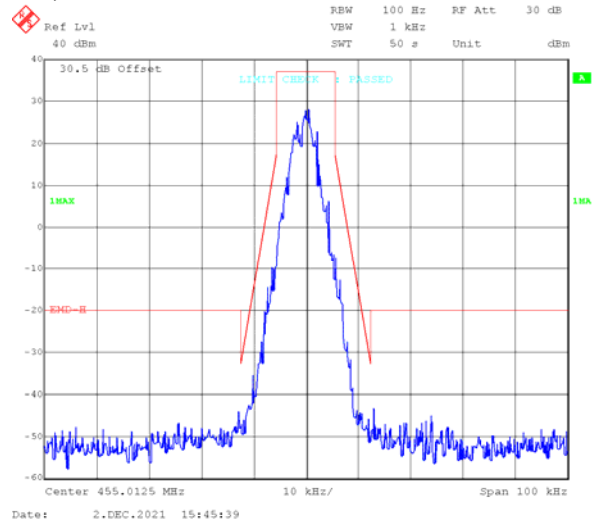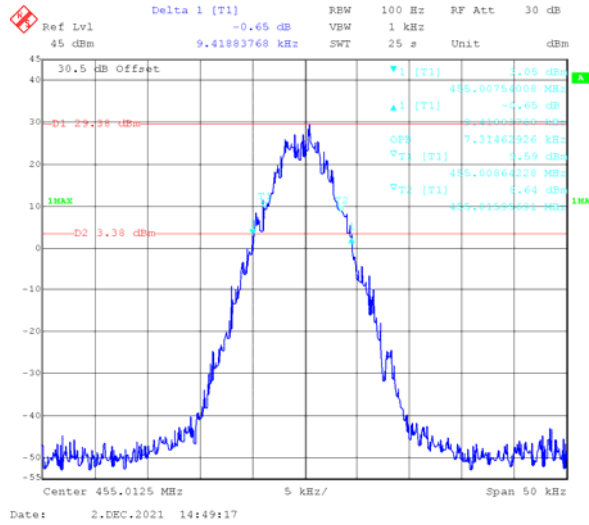

Additional Channel Part 22, 454.0125 MHz

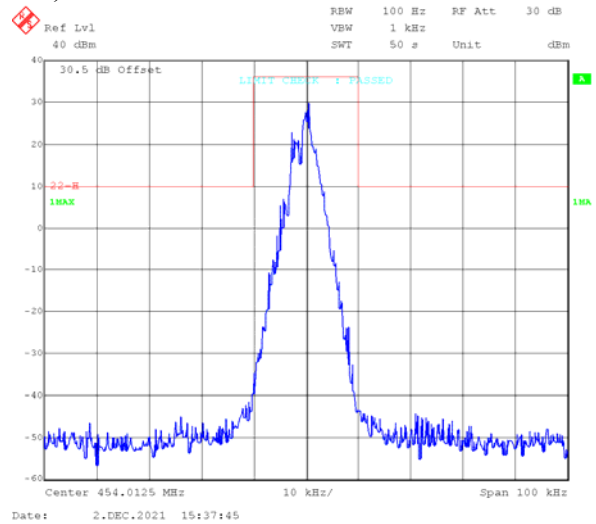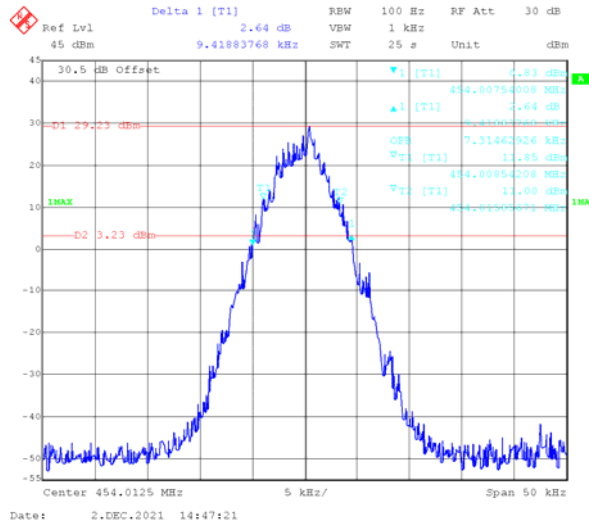

Low Channel

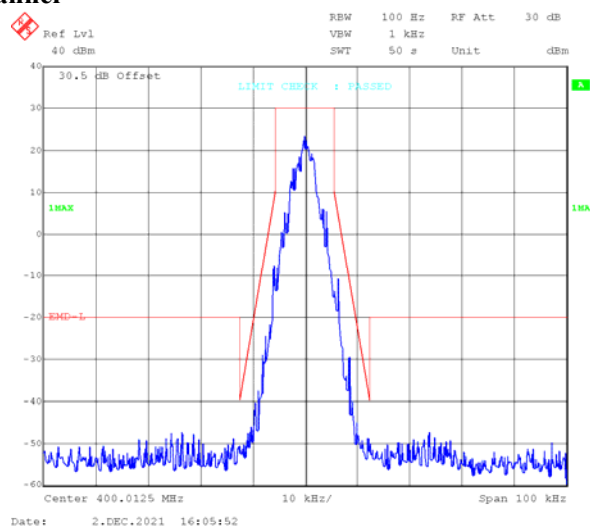

Delta 1 [T1] -2.12 dB

Ref Lvl 40 dBm 9.11823647 kHz BW 100 Hz RBW 1 kHz VBW 25 s Unit dBm


30.5 dB Offset

-D1 24.59 dBm

1MAX

Center 453.2125 MHz 5 kHz/ Span 50 kHz

Date: 2.DEC.2021 15:03:22

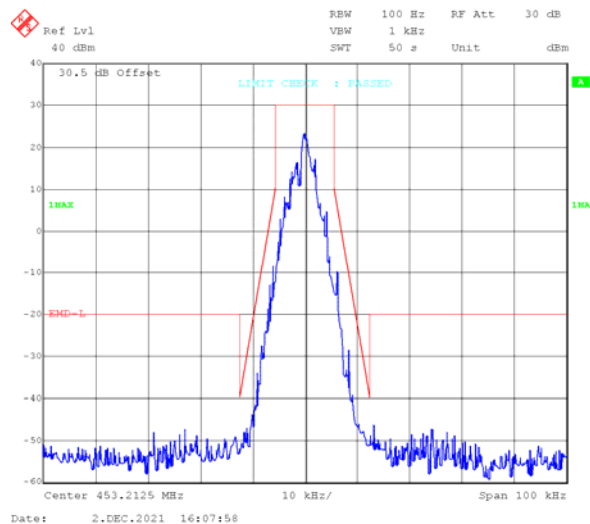

Ref Lvl 40 dBm
 40 dBm
 9.61923848 kHz
 100 Hz
 VSW 1 kHz
 SWT 25 s
 Unit dBm
 30 dB

30.5 dB Offset

▼1 [T1] -0.96 dB
 449.98243988 MHz

▲1 [V1] -0.96 dB
 9.61923848 kHz

CPK 7.47487368 kHz

▽T1 [T1] 0.58 dBm
 449.98364228 MHz

▽T1 [T1] 0.58 dBm
 449.99105711 MHz


1MAX

D1 23.58 dBm



D2 -2.42 dBm

Center 469.9875 MHz 5 kHz/ Span 50 kHz



Date: 2.DEC.2021 15:05:30

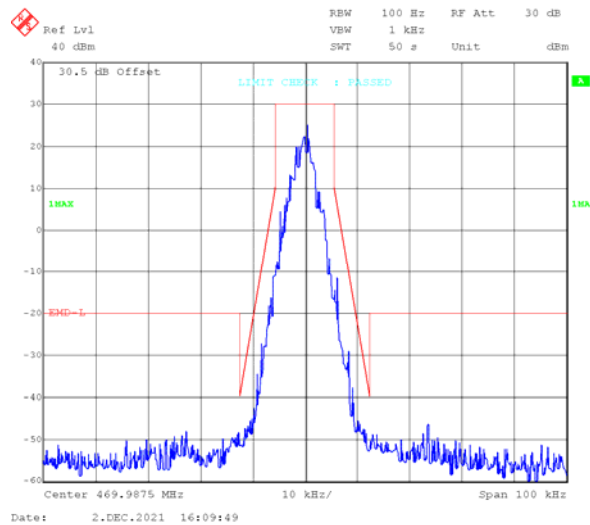


Additional Channel Part 74, 455.0125 MHz

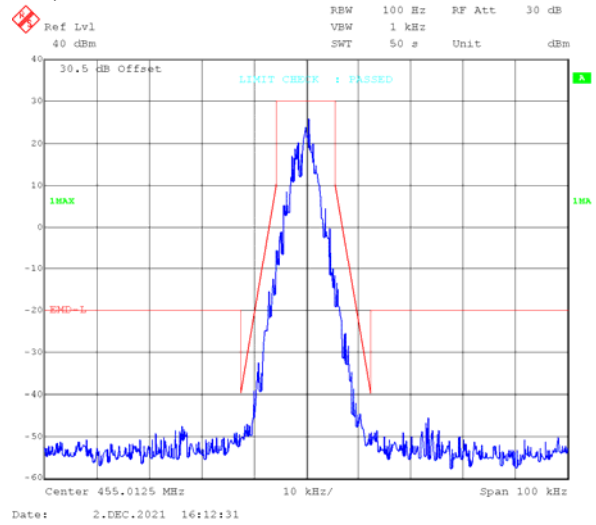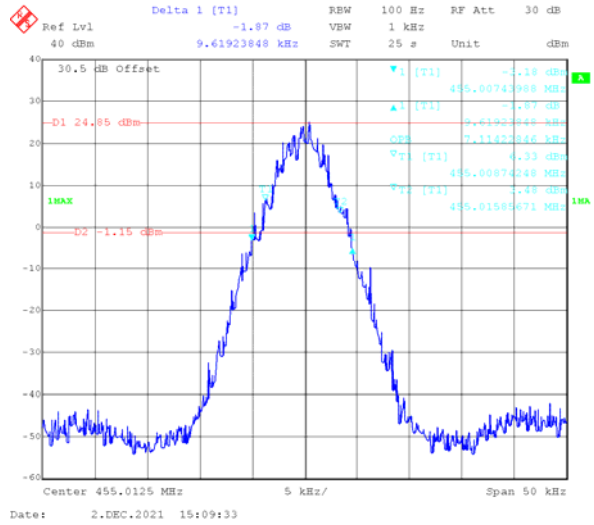

Additional Channel Part 22, 454.0125 MHz

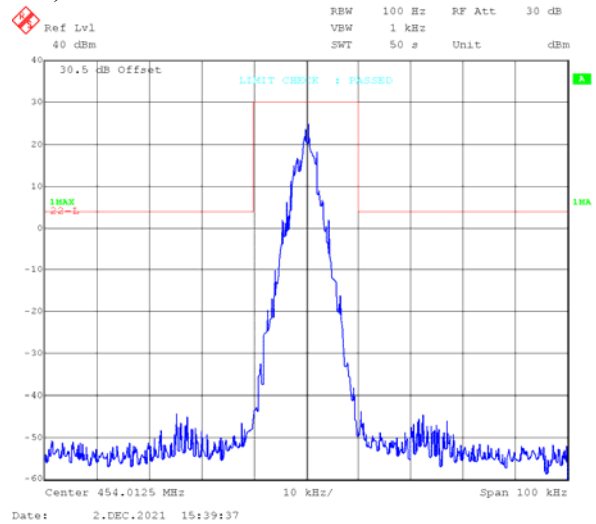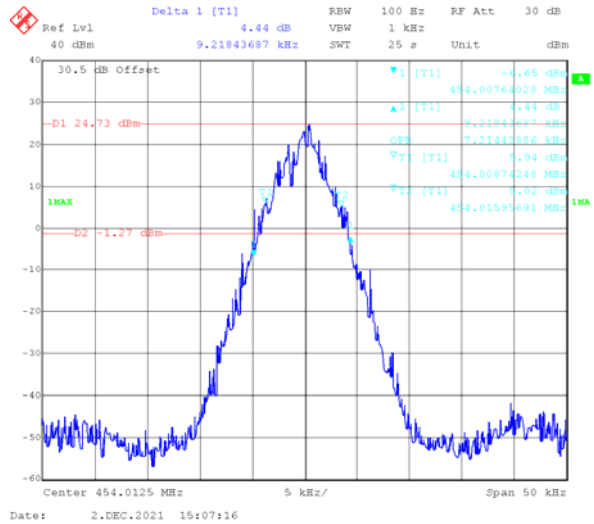

Additional Channel Part 80, 459.9875 MHz

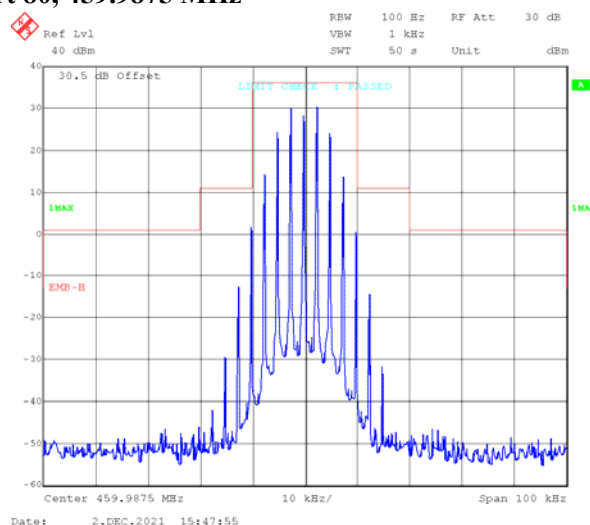

Delta 1 [T1]

Ref Lvl 45 dBm

0.72 dB

300 Hz

3 kHz

5.6 s

Unit

dBm

30.5 dB Offset

D1 31.47 dBm

D2 5.47 dBm

1MAX


1MA

Center 455.0125 MHz

10 kHz/

Span 100 kHz

Date: 2.DEC.2021 14:53:47

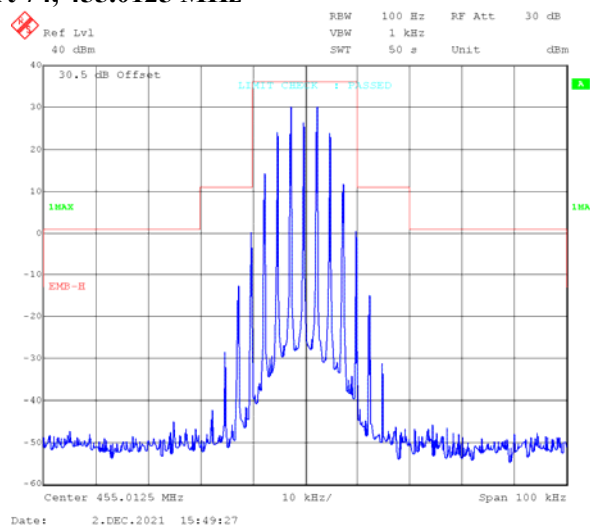

Marker 1 [T1] -7.61 dBm

Ref Lvl 45 dBm

RBW 300 Hz

RF Att 30 dB

454.00418337 MHz

VBW 3 kHz

SWT 5.6 s

Unit dBm

30.5 dB Offset

D1 31.78 dBm

D2 5.78 dBm


1MAX

Center 454.0125 MHz

10 kHz/



Span 100 kHz

Date: 2.FEC.2021 14:56:22


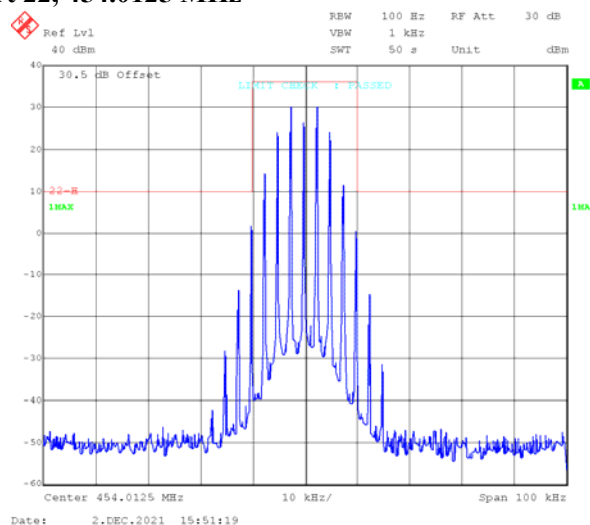


FM, 25 kHz, Low Power:



Additional Channel Part 80, 459.9875 MHz

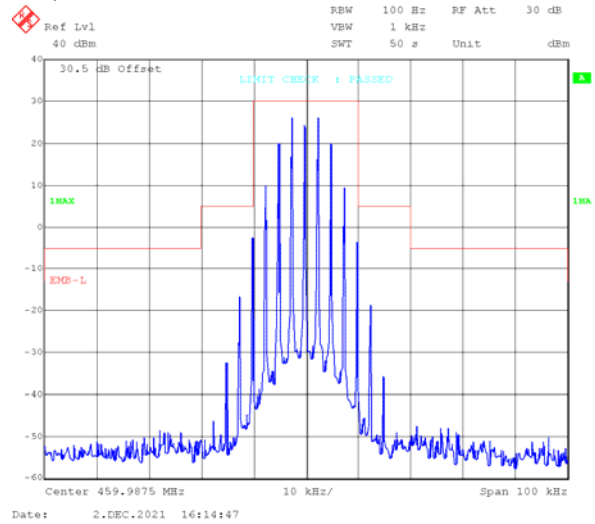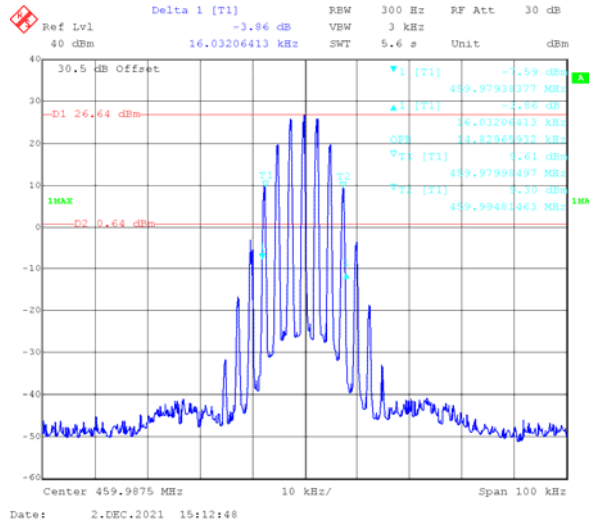

Additional Channel Part 74, 455.0125 MHz

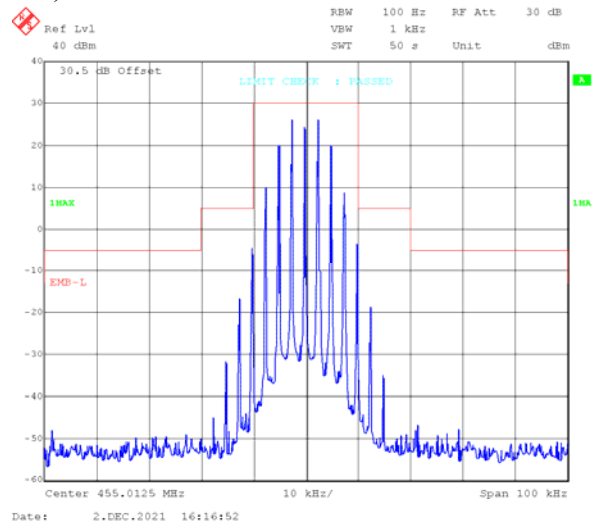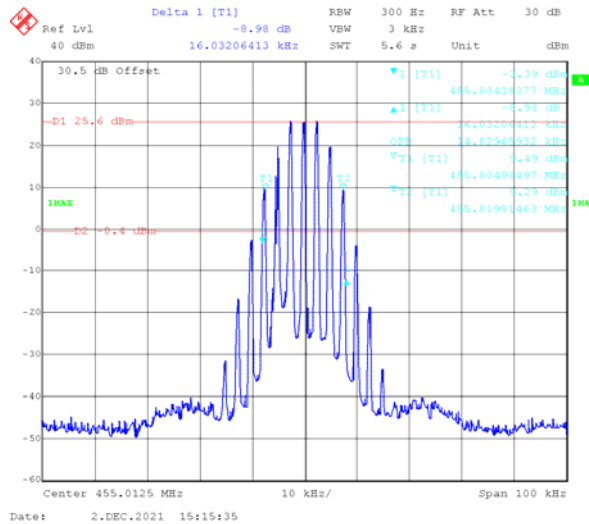

Additional Channel Part 22, 454.0125 MHz

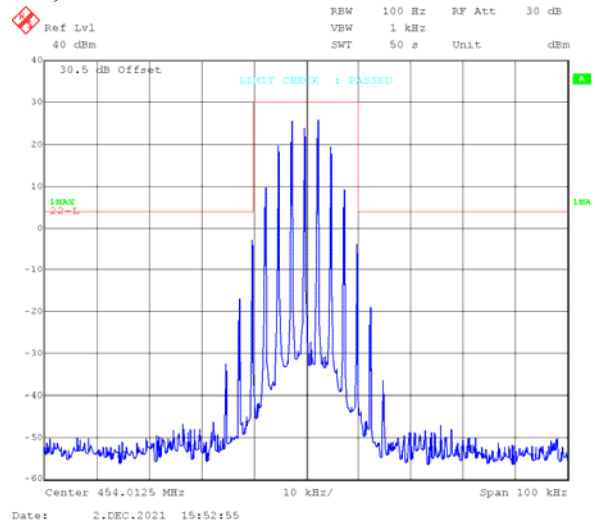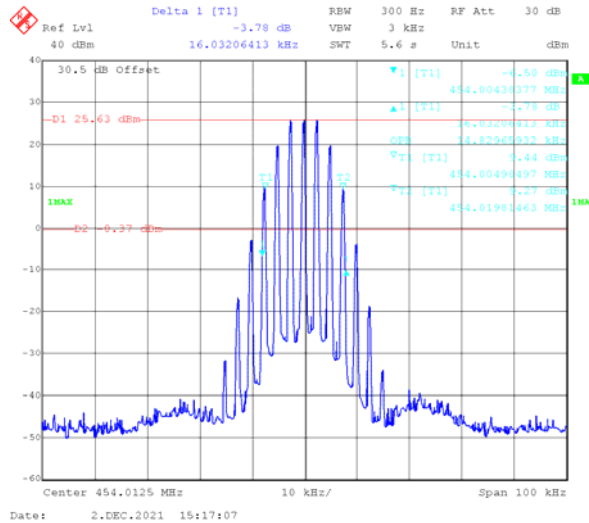

4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

Serial Number:	CR21100125-RF	Test Date:	2021-12-03
Test Site:	RF	Test Mode:	Transmitting (High power was tested)
Tester:	Rinka Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.7
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	2021-08-08	2022-08-07
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	2021-08-08	2022-08-07
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
E-Microwave	Band Rejector Filter	OBF-ZP-400-470-NF	OE02214273	2021/4/23	2022/4/23


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Note: Test performed at high power level with Band Rejector Filter, *please refer to the following table.*

FM, 12.5kHz:

Low Channel, 400.0125 MHz

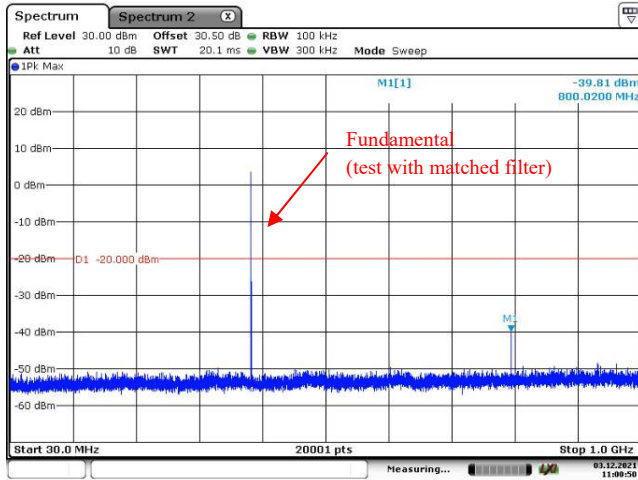


Date: 3.DEC.2021 11:00:50

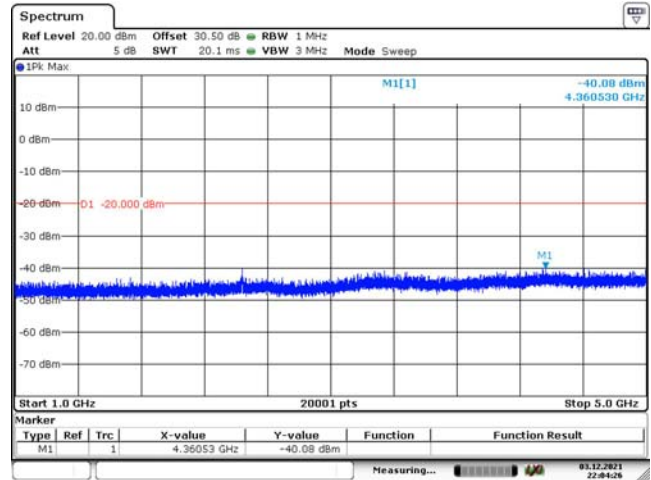


Date: 3.DEC.2021 22:04:27

Middle Channel, 453.2125 MHz

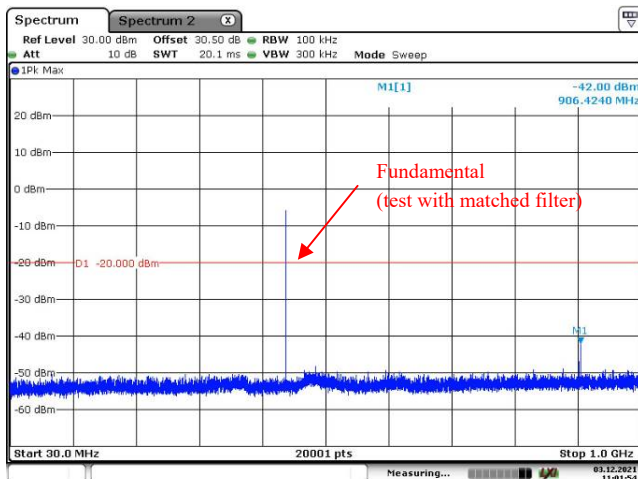


Date: 3.DEC.2021 11:01:54

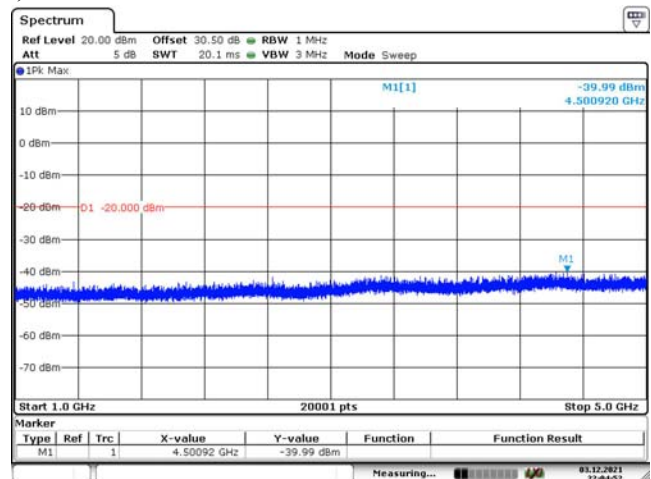


Date: 3.DEC.2021 22:04:53

High Channel, 469.9875 MHz

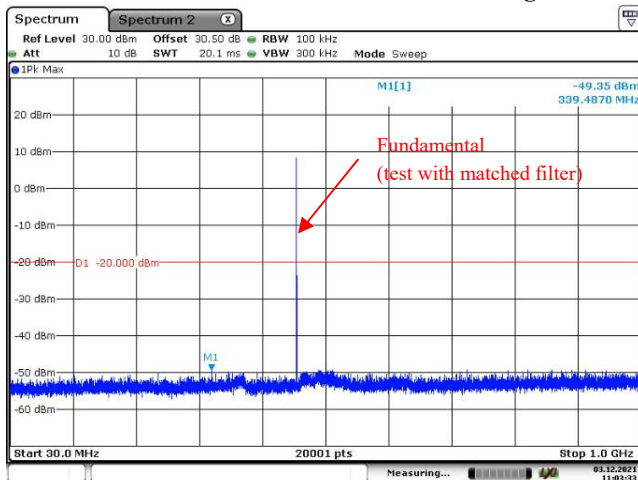


Date: 3.DEC.2021 11:03:34

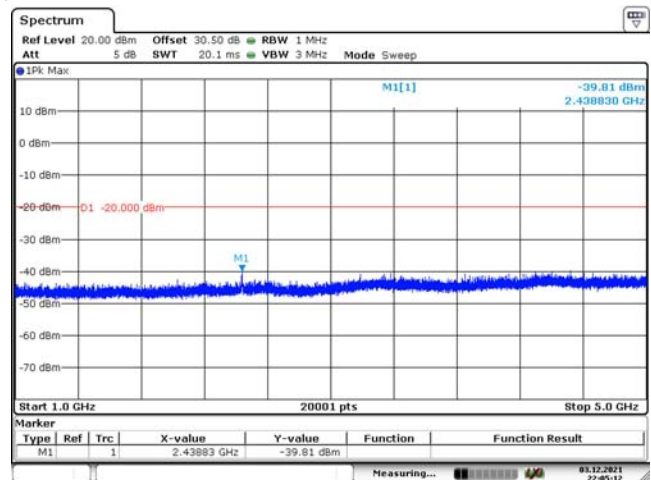


Date: 3.DEC.2021 22:05:13

4FSK, 12.5kHz:

Low Channel, 400.0125 MHz

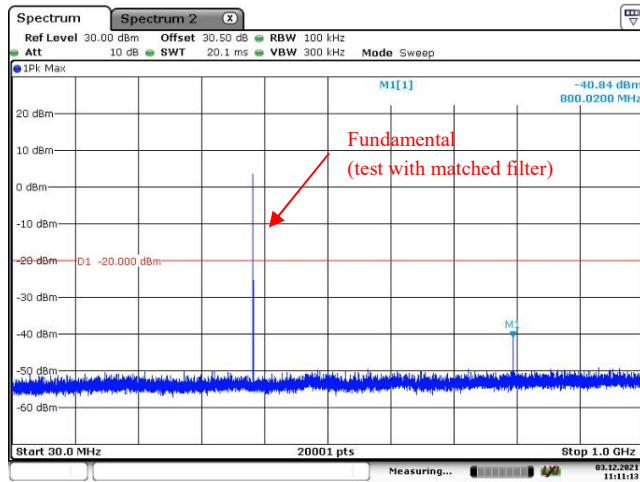


Date: 3.DEC.2021 11:11:13

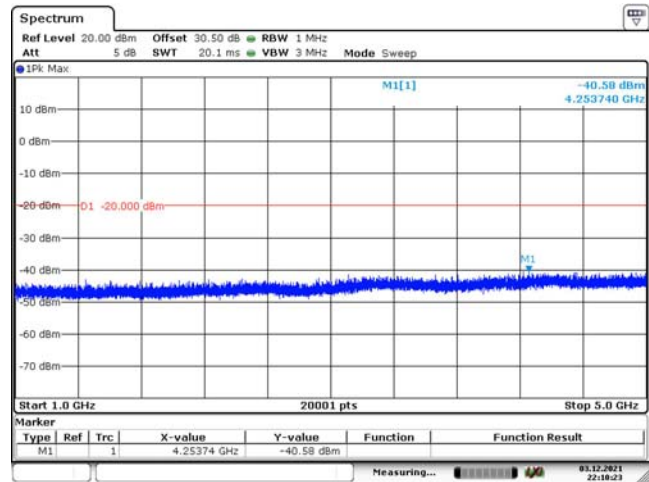


Date: 3.DEC.2021 22:10:24

Middle Channel, 453.2125 MHz

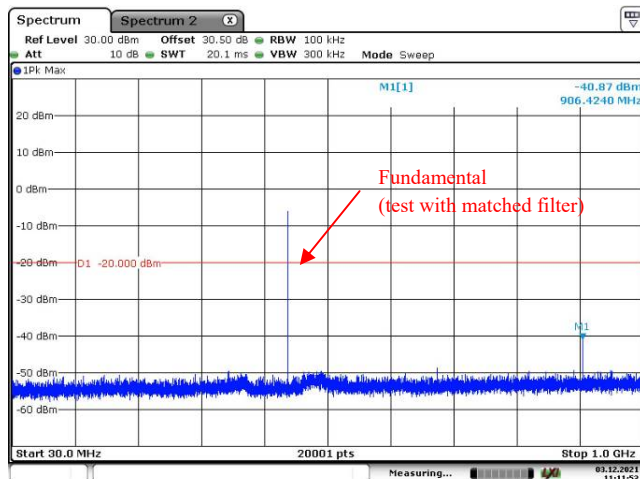


Date: 3.DEC.2021 11:11:53

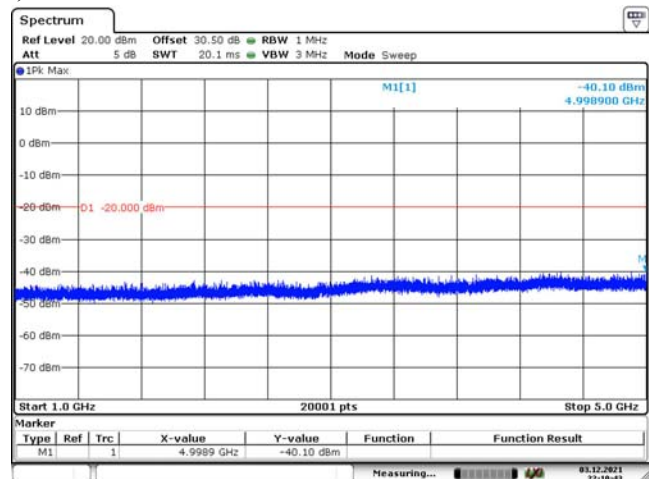


Date: 3.DEC.2021 22:10:44

High Channel, 469.9875 MHz

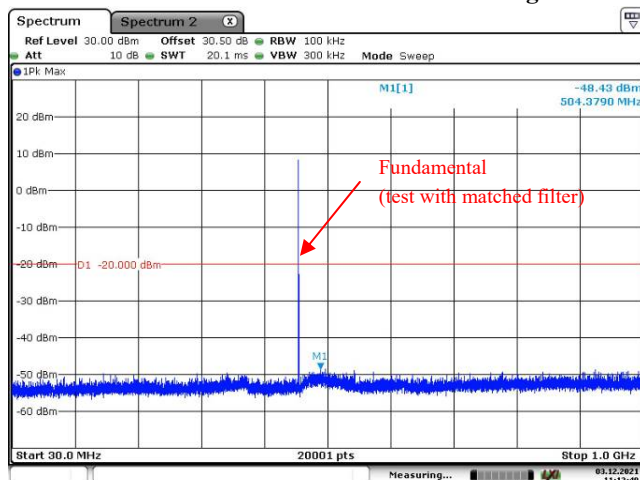



Date: 3.DEC.2021 11:12:50

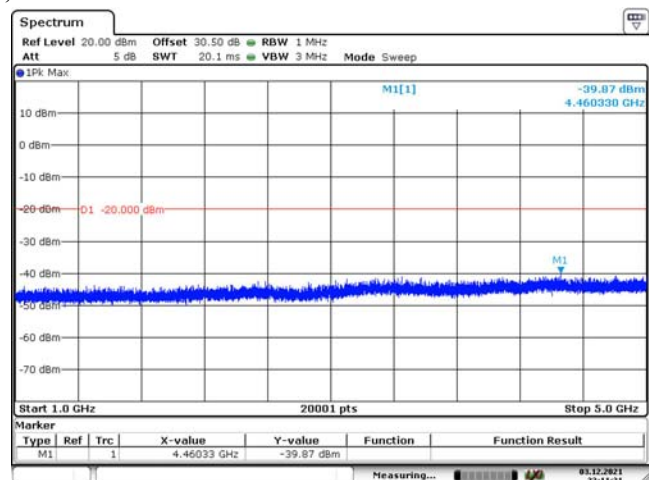

Date: 3.DEC.2021 22:11:22



Part 80:

FM,25kHz, 459.9875 MHz (All emission is under limit -13dBm)

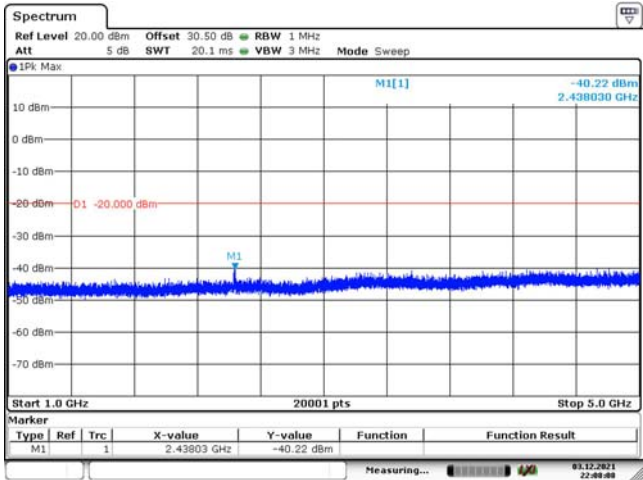
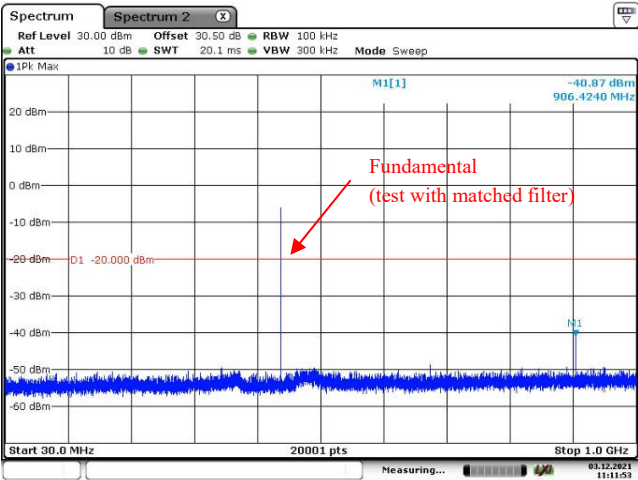


Part 74:



FM,12.5kHz, 455.0125 MHz

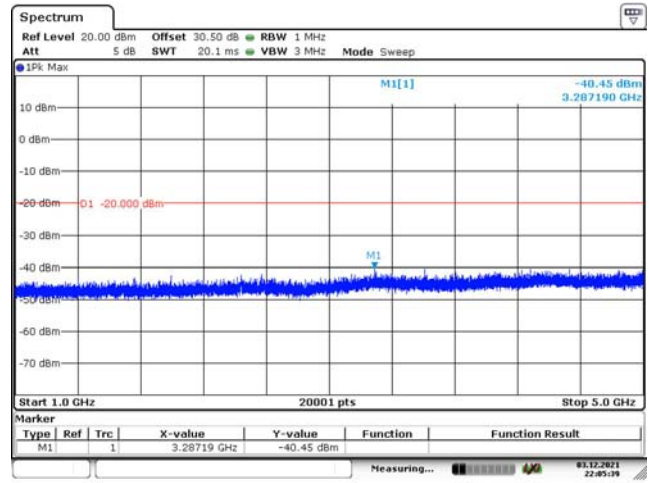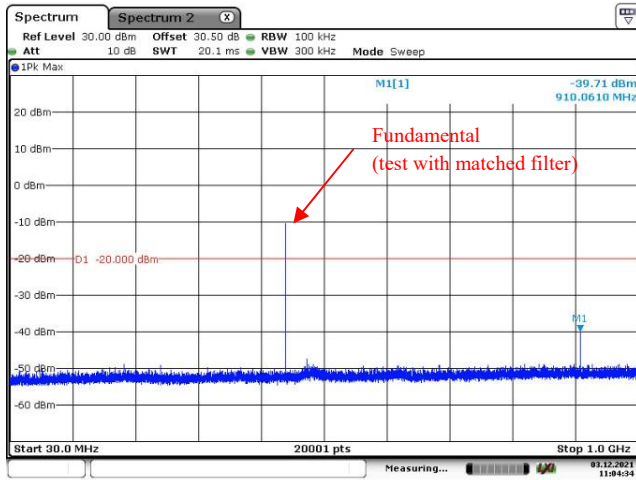

FM,25kHz, 455.0125 MHz (All emission is under limit -13dBm)

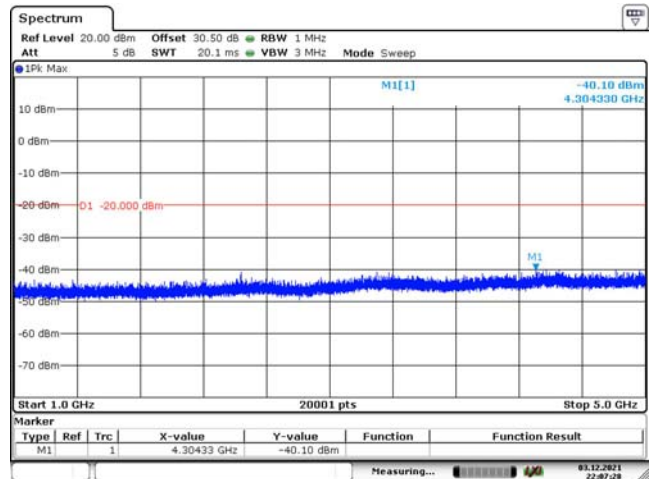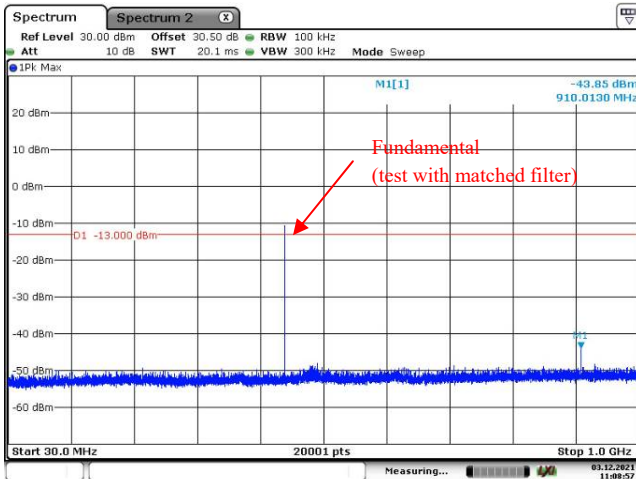


4FSK,12.5kHz, 455.0125 MHz (All emission under limit -20dBm)

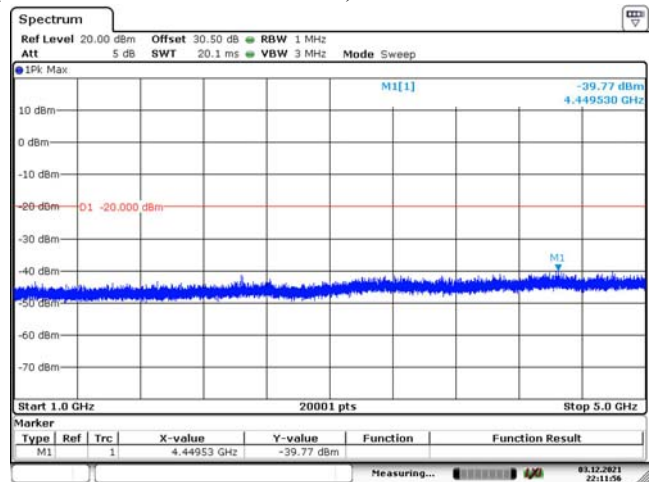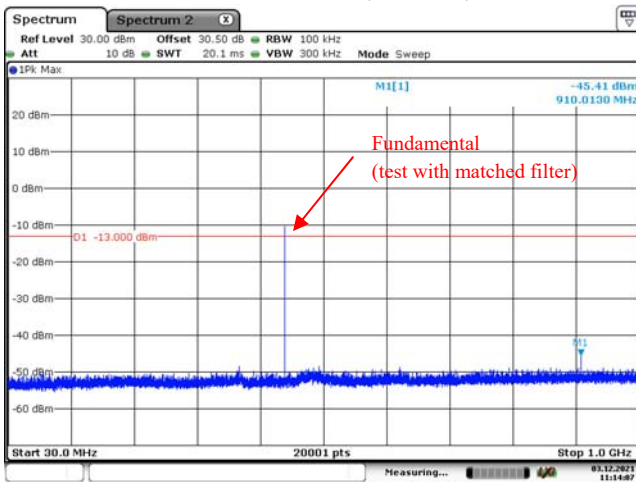


Part 22:

FM,12.5kHz, 454.0125 MHz (All emission is under limit -13dBm)

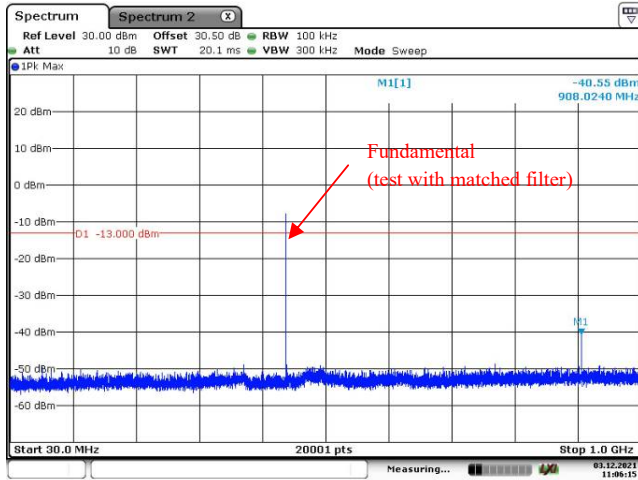


Date: 3.DEC.2021 11:06:16

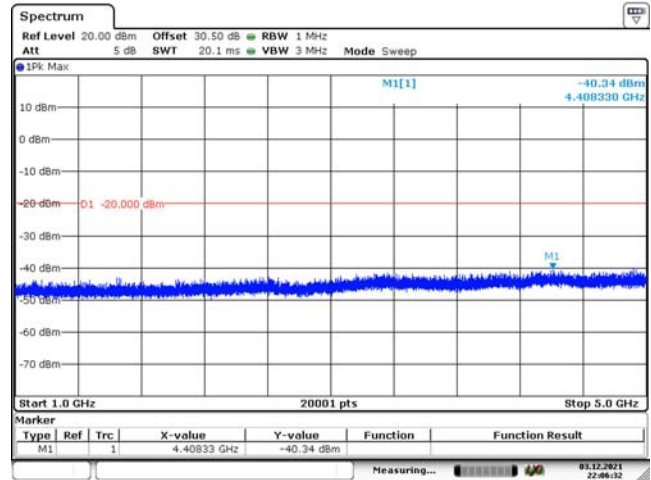


Date: 3.DEC.2021 22:06:13

FM,25kHz, 454.0125 MHz (All emission is under limit -13dBm)

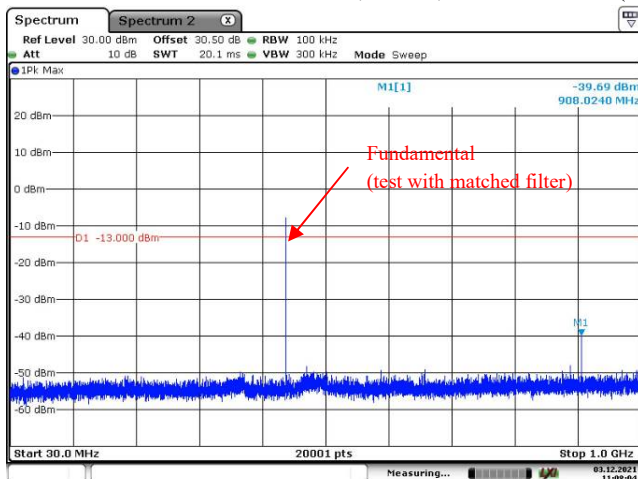


Date: 3.DEC.2021 11:08:04

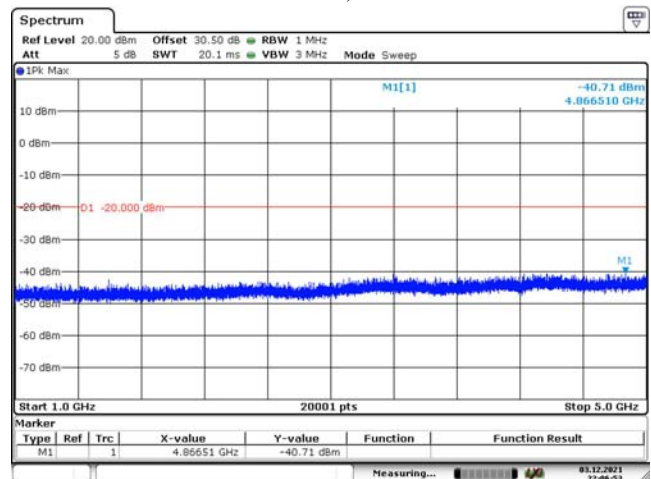


Date: 3.DEC.2021 22:06:53

4FSK,12.5kHz, 454.0125 MHz (All emission is under limit -13dBm)

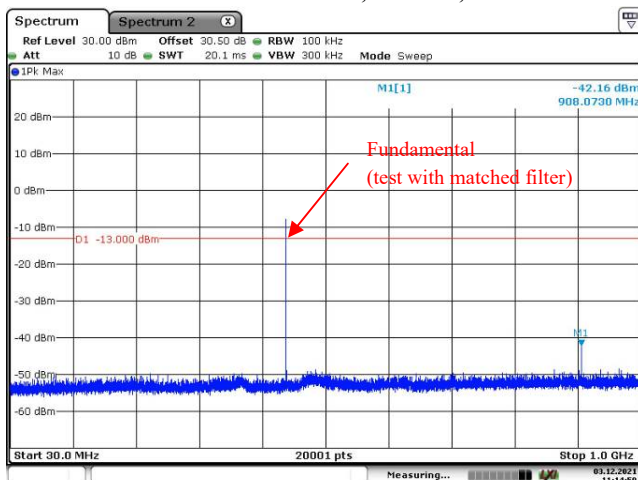

Date: 3.DEC.2021 11:14:59

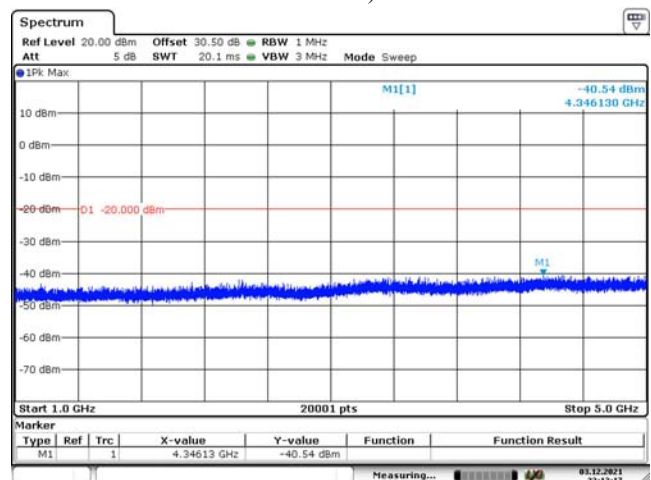

Date: 3.DEC.2021 22:12:18

4.5 RADIATED SPURIOUS EMISSIONS:

Serial Number:	BP562 U(1): CR21100125-RF-S1 BP512 U(1): CR21100125-RF-S2	Test Date:	2021-12-15
Test Site:	966-1/966-2	Test Mode:	Transmitting (High power was tested)
Tester:	Great Qiao, Carl Liang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	20.1~22.7	Relative Humidity: (%)	49~55	ATM Pressure: (kPa)	101.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2021-07-25	2022-07-24
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021-10-18	2023-10-17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2021-07-25	2022-07-24
Agilent	Signal Generator	E8247C	MY43321352	2021-04-25	2022-04-24
E-Microwave	Band Rejector Filter	OBF-ZP-400-470-NF	OE02214273	2021/4/23	2022/4/23

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note:

1. Test performed at high power level with Band Rejector Filter, please refer to the following table.
2. Two models had been test, and the worst case is BP562 U(1).

30MHz - 5GHz:**Part 90**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	20.28	-51.02	0.00	0.58	-51.60	-20.00	31.60
800.03	V	21.74	-46.00	0.00	0.58	-46.58	-20.00	26.58
1200.04	H	37.95	-64.91	7.66	0.69	-57.94	-20.00	37.94
1200.04	V	37.73	-65.87	7.66	0.69	-58.90	-20.00	38.90
1600.05	H	36.31	-68.06	8.62	0.83	-60.27	-20.00	40.27
1600.05	V	35.72	-68.68	8.62	0.83	-60.89	-20.00	40.89
2000.06	H	34.24	-67.89	9.10	0.89	-59.68	-20.00	39.68
2000.06	V	32.99	-68.51	9.10	0.89	-60.30	-20.00	40.30
2400.08	H	33.75	-67.30	9.34	0.98	-58.94	-20.00	38.94
2400.08	V	35.45	-65.34	9.34	0.98	-56.98	-20.00	36.98
2800.09	H	33.82	-66.11	9.88	1.04	-57.27	-20.00	37.27
2800.09	V	34.51	-65.29	9.88	1.04	-56.45	-20.00	36.45
3200.10	H	34.42	-62.70	10.28	1.11	-53.53	-20.00	33.53
3200.10	V	34.83	-62.04	10.28	1.11	-52.87	-20.00	32.87
3600.11	H	34.95	-62.60	10.50	1.24	-53.34	-20.00	33.34
3600.11	V	35.67	-61.74	10.50	1.24	-52.48	-20.00	32.48
4000.13	H	36.26	-59.50	10.90	1.29	-49.89	-20.00	29.89
4000.13	V	36.92	-58.64	10.90	1.29	-49.03	-20.00	29.03
4FSK, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	22.31	-48.99	0.00	0.58	-49.57	-20.00	29.57
800.03	V	24.79	-42.95	0.00	0.58	-43.53	-20.00	23.53
1200.04	H	38.17	-64.69	7.66	0.69	-57.72	-20.00	37.72
1200.04	V	37.92	-65.68	7.66	0.69	-58.71	-20.00	38.71
1600.05	H	37.44	-66.93	8.62	0.83	-59.14	-20.00	39.14
1600.05	V	36.82	-67.58	8.62	0.83	-59.79	-20.00	39.79
2000.06	H	35.11	-67.02	9.10	0.89	-58.81	-20.00	38.81
2000.06	V	33.13	-68.37	9.10	0.89	-60.16	-20.00	40.16
2400.08	H	34.02	-67.03	9.34	0.98	-58.67	-20.00	38.67
2400.08	V	35.69	-65.10	9.34	0.98	-56.74	-20.00	36.74
2800.09	H	34.11	-65.82	9.88	1.04	-56.98	-20.00	36.98
2800.09	V	34.79	-65.01	9.88	1.04	-56.17	-20.00	36.17
3200.10	H	36.52	-60.60	10.28	1.11	-51.43	-20.00	31.43
3200.10	V	35.79	-61.08	10.28	1.11	-51.91	-20.00	31.91
3600.11	H	35.66	-61.89	10.50	1.24	-52.63	-20.00	32.63
3600.11	V	36.79	-60.62	10.50	1.24	-51.36	-20.00	31.36
4000.13	H	36.21	-59.55	10.90	1.29	-49.94	-20.00	29.94
4000.13	V	37.05	-58.51	10.90	1.29	-48.90	-20.00	28.90

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 453.2125MHz-12.5 kHz								
906.43	H	21.95	-46.66	0.00	0.55	-47.21	-20.00	27.21
906.43	V	20.85	-45.15	0.00	0.55	-45.70	-20.00	25.70
1359.64	H	36.32	-66.99	8.11	0.77	-59.65	-20.00	39.65
1359.64	V	35.57	-67.95	8.11	0.77	-60.61	-20.00	40.61
1812.85	H	34.41	-69.02	8.88	0.90	-61.04	-20.00	41.04
1812.85	V	35.01	-68.54	8.88	0.90	-60.56	-20.00	40.56
2266.06	H	34.30	-67.77	9.26	0.95	-59.46	-20.00	39.46
2266.06	V	33.52	-68.44	9.26	0.95	-60.13	-20.00	40.13
2719.28	H	34.56	-65.41	9.75	1.05	-56.71	-20.00	36.71
2719.28	V	33.98	-65.93	9.75	1.05	-57.23	-20.00	37.23
3172.49	H	37.00	-60.24	10.27	1.13	-51.10	-20.00	31.10
3172.49	V	35.66	-61.37	10.27	1.13	-52.23	-20.00	32.23
3625.70	H	36.15	-61.34	10.53	1.22	-52.03	-20.00	32.03
3625.70	V	35.51	-61.87	10.53	1.22	-52.56	-20.00	32.56
4078.91	H	36.15	-59.81	10.85	1.29	-50.25	-20.00	30.25
4078.91	V	36.30	-59.59	10.85	1.29	-50.03	-20.00	30.03
4532.13	H	35.01	-60.66	10.64	1.37	-51.39	-20.00	31.39
4532.13	V	38.41	-57.03	10.64	1.37	-47.76	-20.00	27.76
4FSK, Frequency: 453.2125MHz-12.5 kHz								
906.43	H	22.04	-46.57	0.00	0.55	-47.12	-20.00	27.12
906.43	V	19.95	-46.05	0.00	0.55	-46.60	-20.00	26.60
1359.64	H	35.57	-67.74	8.11	0.77	-60.40	-20.00	40.40
1359.64	V	35.70	-67.82	8.11	0.77	-60.48	-20.00	40.48
1812.85	H	34.35	-69.08	8.88	0.90	-61.10	-20.00	41.10
1812.85	V	34.75	-68.80	8.88	0.90	-60.82	-20.00	40.82
2266.06	H	34.15	-67.92	9.26	0.95	-59.61	-20.00	39.61
2266.06	V	34.12	-67.84	9.26	0.95	-59.53	-20.00	39.53
2719.28	H	34.01	-65.96	9.75	1.05	-57.26	-20.00	37.26
2719.28	V	34.09	-65.82	9.75	1.05	-57.12	-20.00	37.12
3172.49	H	34.35	-62.89	10.27	1.13	-53.75	-20.00	33.75
3172.49	V	35.16	-61.87	10.27	1.13	-52.73	-20.00	32.73
3625.70	H	36.19	-61.30	10.53	1.22	-51.99	-20.00	31.99
3625.70	V	35.36	-62.02	10.53	1.22	-52.71	-20.00	32.71
4078.91	H	35.88	-60.08	10.85	1.29	-50.52	-20.00	30.52
4078.91	V	35.04	-60.85	10.85	1.29	-51.29	-20.00	31.29
4532.13	H	35.85	-59.82	10.64	1.37	-50.55	-20.00	30.55
4532.13	V	36.32	-59.12	10.64	1.37	-49.85	-20.00	29.85

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 469.9875MHz-12.5 kHz								
939.98	H	21.43	-46.36	0.00	0.64	-47.00	-20.00	27.00
939.98	V	19.57	-45.78	0.00	0.64	-46.42	-20.00	26.42
1409.96	H	35.27	-68.41	8.25	0.72	-60.88	-20.00	40.88
1409.96	V	36.29	-67.44	8.25	0.72	-59.91	-20.00	39.91
1879.95	H	34.18	-68.90	8.96	0.88	-60.82	-20.00	40.82
1879.95	V	34.15	-68.69	8.96	0.88	-60.61	-20.00	40.61
2349.94	H	33.61	-67.88	9.31	0.97	-59.54	-20.00	39.54
2349.94	V	33.64	-67.61	9.31	0.97	-59.27	-20.00	39.27
2819.93	H	33.95	-65.89	9.91	1.05	-57.03	-20.00	37.03
2819.93	V	35.40	-64.36	9.91	1.05	-55.50	-20.00	35.50
3289.91	H	35.38	-61.34	10.32	1.15	-52.17	-20.00	32.17
3289.91	V	42.66	-53.81	10.32	1.15	-44.64	-20.00	24.64
3759.90	H	35.40	-61.01	10.66	1.24	-51.59	-20.00	31.59
3759.90	V	35.26	-61.03	10.66	1.24	-51.61	-20.00	31.61
4229.89	H	35.79	-60.25	10.76	1.32	-50.81	-20.00	30.81
4229.89	V	34.92	-61.06	10.76	1.32	-51.62	-20.00	31.62
4699.88	H	35.40	-59.42	10.84	1.41	-49.99	-20.00	29.99
4699.88	V	35.84	-59.01	10.84	1.41	-49.58	-20.00	29.58
4FSK, Frequency: 469.9875MHz-12.5 kHz								
939.98	H	21.76	-46.03	0.00	0.64	-46.67	-20.00	26.67
939.98	V	20.15	-45.20	0.00	0.64	-45.84	-20.00	25.84
1409.96	H	35.17	-68.51	8.25	0.72	-60.98	-20.00	40.98
1409.96	V	35.69	-68.04	8.25	0.72	-60.51	-20.00	40.51
1879.95	H	34.31	-68.77	8.96	0.88	-60.69	-20.00	40.69
1879.95	V	34.67	-68.17	8.96	0.88	-60.09	-20.00	40.09
2349.94	H	33.22	-68.27	9.31	0.97	-59.93	-20.00	39.93
2349.94	V	32.86	-68.39	9.31	0.97	-60.05	-20.00	40.05
2819.93	H	32.68	-67.16	9.91	1.05	-58.30	-20.00	38.30
2819.93	V	33.35	-66.41	9.91	1.05	-57.55	-20.00	37.55
3289.91	H	24.21	-72.51	10.32	1.15	-63.34	-20.00	43.34
3289.91	V	34.21	-62.26	10.32	1.15	-53.09	-20.00	33.09
3759.90	H	34.84	-61.57	10.66	1.24	-52.15	-20.00	32.15
3759.90	V	35.21	-61.08	10.66	1.24	-51.66	-20.00	31.66
4229.89	H	35.15	-60.89	10.76	1.32	-51.45	-20.00	31.45
4229.89	V	35.45	-60.53	10.76	1.32	-51.09	-20.00	31.09
4699.88	H	35.50	-59.32	10.84	1.41	-49.89	-20.00	29.89
4699.88	V	35.85	-59.00	10.84	1.41	-49.57	-20.00	29.57

Part 80

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 459.9875MHz-25 kHz								
919.98	H	20.14	-48.14	0.00	0.60	-48.74	-13.00	35.74
919.98	V	19.38	-46.36	0.00	0.60	-46.96	-13.00	33.96
1379.96	H	35.13	-68.38	8.16	0.74	-60.96	-13.00	47.96
1379.96	V	38.35	-65.29	8.16	0.74	-57.87	-13.00	44.87
1839.95	H	34.56	-68.73	8.91	0.89	-60.71	-13.00	47.71
1839.95	V	35.79	-67.48	8.91	0.89	-59.46	-13.00	46.46
2299.94	H	33.27	-68.65	9.28	0.98	-60.35	-13.00	47.35
2299.94	V	34.07	-67.64	9.28	0.98	-59.34	-13.00	46.34
2759.93	H	33.44	-66.51	9.82	1.06	-57.75	-13.00	44.75
2759.93	V	34.29	-65.57	9.82	1.06	-56.81	-13.00	43.81
3219.91	H	36.86	-60.17	10.29	1.13	-51.01	-13.00	38.01
3219.91	V	37.70	-59.08	10.29	1.13	-49.92	-13.00	36.92
3679.90	H	36.43	-60.94	10.58	1.23	-51.59	-13.00	38.59
3679.90	V	36.48	-60.85	10.58	1.23	-51.50	-13.00	38.50
4139.89	H	36.01	-59.97	10.82	1.28	-50.43	-13.00	37.43
4139.89	V	36.02	-59.93	10.82	1.28	-50.39	-13.00	37.39
4599.88	H	36.33	-59.12	10.72	1.40	-49.80	-13.00	36.80
4599.88	V	35.37	-59.91	10.72	1.40	-50.59	-13.00	37.59

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	20.04	-48.48	0.00	0.54	-49.02	-20.00	29.02
910.03	V	19.39	-46.54	0.00	0.54	-47.08	-20.00	27.08
1365.04	H	35.57	-67.80	8.12	0.77	-60.45	-20.00	40.45
1365.04	V	37.24	-66.31	8.12	0.77	-58.96	-20.00	38.96
1820.05	H	33.69	-69.70	8.88	0.90	-61.72	-20.00	41.72
1820.05	V	33.77	-69.71	8.88	0.90	-61.73	-20.00	41.73
2275.06	H	33.46	-68.57	9.27	0.96	-60.26	-20.00	40.26
2275.06	V	33.08	-68.81	9.27	0.96	-60.50	-20.00	40.50
2730.08	H	33.13	-66.83	9.77	1.06	-58.12	-20.00	38.12
2730.08	V	33.50	-66.40	9.77	1.06	-57.69	-20.00	37.69
3185.09	H	34.40	-62.79	10.27	1.12	-53.64	-20.00	33.64
3185.09	V	34.68	-62.28	10.27	1.12	-53.13	-20.00	33.13
3640.10	H	35.78	-61.68	10.54	1.22	-52.36	-20.00	32.36
3640.10	V	34.99	-62.38	10.54	1.22	-53.06	-20.00	33.06
4095.11	H	35.12	-60.88	10.84	1.27	-51.31	-20.00	31.31
4095.11	V	35.40	-60.56	10.84	1.27	-50.99	-20.00	30.99
4550.13	H	34.29	-61.32	10.66	1.36	-52.02	-20.00	32.02
4550.13	V	36.08	-59.32	10.66	1.36	-50.02	-20.00	30.02
FM, Frequency: 455.0125MHz-25 kHz								
910.03	H	21.45	-47.07	0.00	0.54	-47.61	-13.00	34.61
910.03	V	20.02	-45.91	0.00	0.54	-46.45	-13.00	33.45
1365.04	H	36.11	-67.26	8.12	0.77	-59.91	-13.00	46.91
1365.04	V	37.76	-65.79	8.12	0.77	-58.44	-13.00	45.44
1820.05	H	34.00	-69.39	8.88	0.90	-61.41	-13.00	48.41
1820.05	V	33.82	-69.66	8.88	0.90	-61.68	-13.00	48.68
2275.06	H	33.43	-68.60	9.27	0.96	-60.29	-13.00	47.29
2275.06	V	33.83	-68.06	9.27	0.96	-59.75	-13.00	46.75
2730.08	H	33.45	-66.51	9.77	1.06	-57.80	-13.00	44.80
2730.08	V	35.04	-64.86	9.77	1.06	-56.15	-13.00	43.15
3185.09	H	34.91	-62.28	10.27	1.12	-53.13	-13.00	40.13
3185.09	V	35.54	-61.42	10.27	1.12	-52.27	-13.00	39.27
3640.10	H	35.98	-61.48	10.54	1.22	-52.16	-13.00	39.16
3640.10	V	35.22	-62.15	10.54	1.22	-52.83	-13.00	39.83
4095.11	H	35.20	-60.80	10.84	1.27	-51.23	-13.00	38.23
4095.11	V	35.18	-60.78	10.84	1.27	-51.21	-13.00	38.21
4550.13	H	35.86	-59.75	10.66	1.36	-50.45	-13.00	37.45
4550.13	V	35.67	-59.73	10.66	1.36	-50.43	-13.00	37.43

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	19.52	-49.00	0.00	0.54	-49.54	-20.00	29.54
910.03	V	19.66	-46.27	0.00	0.54	-46.81	-20.00	26.81
1365.04	H	35.88	-67.49	8.12	0.77	-60.14	-20.00	40.14
1365.04	V	35.20	-68.35	8.12	0.77	-61.00	-20.00	41.00
1820.05	H	34.61	-68.78	8.88	0.90	-60.80	-20.00	40.80
1820.05	V	33.45	-70.03	8.88	0.90	-62.05	-20.00	42.05
2275.06	H	33.26	-68.77	9.27	0.96	-60.46	-20.00	40.46
2275.06	V	33.62	-68.27	9.27	0.96	-59.96	-20.00	39.96
2730.08	H	33.69	-66.27	9.77	1.06	-57.56	-20.00	37.56
2730.08	V	33.70	-66.20	9.77	1.06	-57.49	-20.00	37.49
3185.09	H	34.22	-62.97	10.27	1.12	-53.82	-20.00	33.82
3185.09	V	34.74	-62.22	10.27	1.12	-53.07	-20.00	33.07
3640.10	H	36.17	-61.29	10.54	1.22	-51.97	-20.00	31.97
3640.10	V	35.63	-61.74	10.54	1.22	-52.42	-20.00	32.42
4095.11	H	35.29	-60.71	10.84	1.27	-51.14	-20.00	31.14
4095.11	V	35.44	-60.52	10.84	1.27	-50.95	-20.00	30.95
4550.13	H	34.93	-60.68	10.66	1.36	-51.38	-20.00	31.38
4550.13	V	36.13	-59.27	10.66	1.36	-49.97	-20.00	29.97

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	23.27	-45.30	0.00	0.54	-45.84	-13.00	32.84
908.03	V	19.49	-46.48	0.00	0.54	-47.02	-13.00	34.02
1362.04	H	36.56	-66.78	8.11	0.77	-59.44	-13.00	46.44
1362.04	V	38.93	-64.61	8.11	0.77	-57.27	-13.00	44.27
1816.05	H	35.22	-68.19	8.88	0.90	-60.21	-13.00	47.21
1816.05	V	34.85	-68.67	8.88	0.90	-60.69	-13.00	47.69
2270.06	H	35.04	-67.01	9.26	0.95	-58.70	-13.00	45.70
2270.06	V	35.66	-66.27	9.26	0.95	-57.96	-13.00	44.96
2724.08	H	33.25	-66.72	9.76	1.05	-58.01	-13.00	45.01
2724.08	V	34.58	-65.33	9.76	1.05	-56.62	-13.00	43.62
3178.09	H	37.16	-60.06	10.27	1.12	-50.91	-13.00	37.91
3178.09	V	38.69	-58.31	10.27	1.12	-49.16	-13.00	36.16
3632.10	H	35.67	-61.81	10.53	1.22	-52.50	-13.00	39.50
3632.10	V	35.21	-62.17	10.53	1.22	-52.86	-13.00	39.86
4086.11	H	35.55	-60.43	10.85	1.28	-50.86	-13.00	37.86
4086.11	V	35.40	-60.52	10.85	1.28	-50.95	-13.00	37.95
4540.13	H	36.10	-59.55	10.65	1.36	-50.26	-13.00	37.26
4540.13	V	37.00	-58.42	10.65	1.36	-49.13	-13.00	36.13
FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	19.69	-48.88	0.00	0.54	-49.42	-13.00	36.42
908.03	V	19.63	-46.34	0.00	0.54	-46.88	-13.00	33.88
1362.04	H	37.51	-65.83	8.11	0.77	-58.49	-13.00	45.49
1362.04	V	37.74	-65.80	8.11	0.77	-58.46	-13.00	45.46
1816.05	H	34.54	-68.87	8.88	0.90	-60.89	-13.00	47.89
1816.05	V	35.19	-68.33	8.88	0.90	-60.35	-13.00	47.35
2270.06	H	35.54	-66.51	9.26	0.95	-58.20	-13.00	45.20
2270.06	V	34.13	-67.80	9.26	0.95	-59.49	-13.00	46.49
2724.08	H	33.93	-66.04	9.76	1.05	-57.33	-13.00	44.33
2724.08	V	36.25	-63.66	9.76	1.05	-54.95	-13.00	41.95
3178.09	H	37.17	-60.05	10.27	1.12	-50.90	-13.00	37.90
3178.09	V	37.83	-59.17	10.27	1.12	-50.02	-13.00	37.02
3632.10	H	36.21	-61.27	10.53	1.22	-51.96	-13.00	38.96
3632.10	V	37.18	-60.20	10.53	1.22	-50.89	-13.00	37.89
4086.11	H	35.26	-60.72	10.85	1.28	-51.15	-13.00	38.15
4086.11	V	35.67	-60.25	10.85	1.28	-50.68	-13.00	37.68
4540.13	H	36.85	-58.80	10.65	1.36	-49.51	-13.00	36.51
4540.13	V	36.00	-59.42	10.65	1.36	-50.13	-13.00	37.13

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 454.0125MHz-12.5 kHz								
908.03	H	18.94	-49.63	0.00	0.54	-50.17	-13.00	37.17
908.03	V	20.31	-45.66	0.00	0.54	-46.20	-13.00	33.20
1362.04	H	36.75	-66.59	8.11	0.77	-59.25	-13.00	46.25
1362.04	V	35.41	-68.13	8.11	0.77	-60.79	-13.00	47.79
1816.05	H	34.92	-68.49	8.88	0.90	-60.51	-13.00	47.51
1816.05	V	34.34	-69.18	8.88	0.90	-61.20	-13.00	48.20
2270.06	H	34.84	-67.21	9.26	0.95	-58.90	-13.00	45.90
2270.06	V	33.72	-68.21	9.26	0.95	-59.90	-13.00	46.90
2724.08	H	34.11	-65.86	9.76	1.05	-57.15	-13.00	44.15
2724.08	V	34.85	-65.06	9.76	1.05	-56.35	-13.00	43.35
3178.09	H	35.33	-61.89	10.27	1.12	-52.74	-13.00	39.74
3178.09	V	33.66	-63.34	10.27	1.12	-54.19	-13.00	41.19
3632.10	H	35.58	-61.90	10.53	1.22	-52.59	-13.00	39.59
3632.10	V	34.89	-62.49	10.53	1.22	-53.18	-13.00	40.18
4086.11	H	35.02	-60.96	10.85	1.28	-51.39	-13.00	38.39
4086.11	V	36.09	-59.83	10.85	1.28	-50.26	-13.00	37.26
4540.13	H	36.11	-59.54	10.65	1.36	-50.25	-13.00	37.25
4540.13	V	35.00	-60.42	10.65	1.36	-51.13	-13.00	38.13

Note 1:The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

4.6 FREQUENCY STABILITY:

Serial Number:	CR21100125-RF	Test Date:	2021-12-02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rinka Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.8
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	2021-08-08	2022-08-07
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	2021-08-08	2022-08-07
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07
UNI-T	Multimeter	UT39A+	C210582554	2021-09-30	2022-09-29
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**FCC Part 90:**

FM,12.5kHz, Reference Frequency: 453.2125 MHz, Limit: ±2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	453.212491	-0.02
-20		453.212491	-0.02
-10		453.212491	-0.02
0		453.212481	-0.04
10		453.212471	-0.06
20		453.212471	-0.06
30		453.212496	-0.01
40		453.212496	-0.01
50		453.212496	-0.01
20	6.4	453.212496	-0.01
20	8.4	453.212496	-0.01

4FSK, 12.5kHz, Reference Frequency: 453.2125MHz, Limit: ± 2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	453.212535	0.08
-20		453.212535	0.08
-10		453.212535	0.08
0		453.212525	0.06
10		453.212515	0.03
20		453.212515	0.03
30		453.212540	0.09
40		453.212540	0.09
50		453.212540	0.09
20	6.4	453.212540	0.09
20	8.4	453.212540	0.09

FCC Part 80:

FM, 25kHz, Reference Frequency: 459.9875MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	459.987491	-0.02
-20		459.987491	-0.02
-10		459.987491	-0.02
0		459.987481	-0.04
10		459.987471	-0.06
20		459.987471	-0.06
30		459.987496	-0.01
40		459.987496	-0.01
50		459.987496	-0.01
20	6.4	459.987496	-0.01
20	8.4	459.987496	-0.01

FCC Part 74:

FM, 12.5kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	455.012496	-0.01
-20		455.012496	-0.01
-10		455.012496	-0.01
0		455.012496	-0.01
10		455.012496	-0.01
20		455.012496	-0.01
30		455.012496	-0.01
40		455.012496	-0.01
50		455.012496	-0.01
20	6.4	455.012496	-0.01
20	8.4	455.012471	-0.06

4FSK, 12.5kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	455.012549	0.11
-20		455.012549	0.11
-10		455.012549	0.11
0		455.012539	0.09
10		455.012529	0.06
20		455.012529	0.06
30		455.012554	0.12
40		455.012554	0.12
50		455.012554	0.12
20	6.4	455.012554	0.12
20	8.4	455.012554	0.12

FM, 25kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	455.012491	-0.02
-20		455.012491	-0.02
-10		455.012491	-0.02
0		455.012481	-0.04
10		455.012471	-0.06
20		455.012471	-0.06
30		455.012496	-0.01
40		455.012496	-0.01
50		455.012496	-0.01
20	6.4	455.012496	-0.01
20	8.4	455.012496	-0.01

FCC Part 22:

FM, 12.5kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	454.012491	-0.02
-20		454.012491	-0.02
-10		454.012491	-0.02
0		454.012481	-0.04
10		454.012471	-0.06
20		454.012471	-0.06
30		454.012496	-0.01
40		454.012496	-0.01
50		454.012496	-0.01
20	6.4	454.012496	-0.01
20	8.4	454.012496	-0.01

4FSK, 12.5kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	454.012535	0.08
-20		454.012535	0.08
-10		454.012535	0.08
0		454.012525	0.06
10		454.012515	0.03
20		454.012515	0.03
30		454.012540	0.09
40		454.012540	0.09
50		454.012540	0.09
20	6.4	454.012540	0.09
20	8.4	454.012540	0.09

FM, 25kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	454.012491	-0.02
-20		454.012491	-0.02
-10		454.012491	-0.02
0		454.012481	-0.04
10		454.012471	-0.06
20		454.012471	-0.06
30		454.012496	-0.01
40		454.012496	-0.01
50		454.012496	-0.01
20	6.4	454.012496	-0.01
20	8.4	454.012496	-0.01

4.7 TRANSIENT FREQUENCY BEHAVIOR

Serial Number:	CR21100125-RF	Test Date:	2021-12-02
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rinka Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	LMR300	NJ0100001	2021-08-08	2022-08-07
YINSAIGE	Coaxial Cable	LMR300	NJ0100002	2021-08-08	2022-08-07
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10(t ₁)	±12.5 kHz	Pass
	25(t ₂)	±6.25 kHz	
	10(t ₃)	±12.5 kHz	

453.2125 MHz, ON

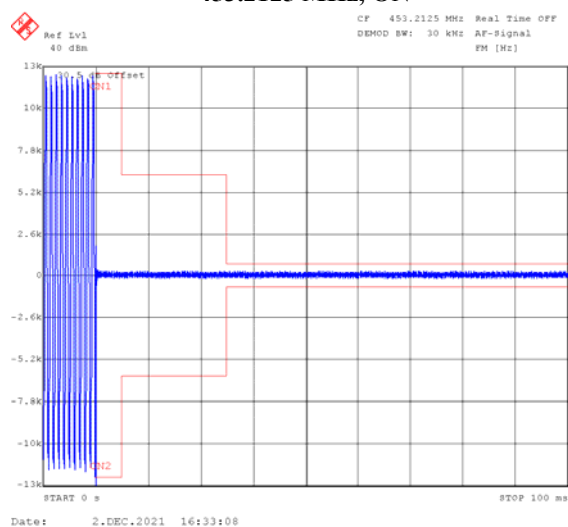

453.2125 MHz, OFF

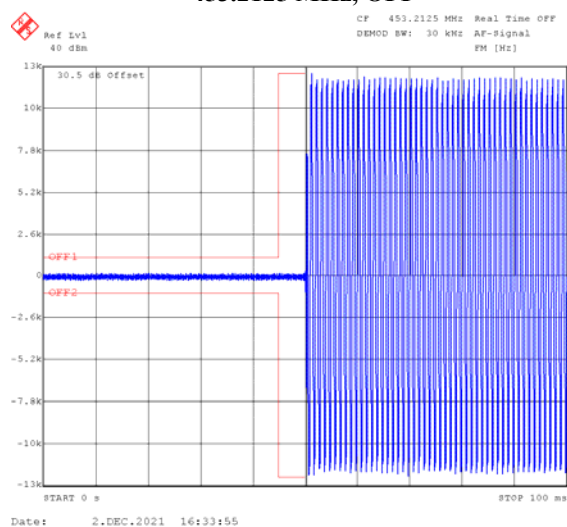

***** END OF REPORT *****