

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300 Kirkland, WA, United States
Equipment under Test	:	Wyze Cam v3
Model No.	:	WYZEC3
HVIN	:	WYZEC3C
Trade Mark	:	N/A
FCC ID	:	2AUIUWYZEC3C
IC	:	25466-WYZEC3C
Manufacturer	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300 Kirkland, WA, United States

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty	9
3.	Equipment Used During Test.....	10
4.	6dB Bandwidth and 99% Bandwidth	12
4.1.	Block diagram of test setup	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	original test data.....	14
5.	Maximum Conducted Output Power.....	23
5.1.	Block diagram of test setup	23
5.2.	Limits	23
5.3.	Test procedure	23
5.4.	Test result.....	23
6.	Power Spectral Density.....	24
6.1.	Block diagram of test setup	24
6.2.	Limits	24
6.3.	Test procedure	24
6.4.	Test result.....	24
6.5.	original test data.....	25
7.	Band Edge and Spurious Emissions (Conducted).....	30
7.1.	Block diagram of test setup	30
7.2.	Limits	30
7.3.	Test procedure	30
7.4.	Test result.....	31
7.5.	original test data.....	31
8.	Radiated Spurious Emissions.....	47

8.1.	Block diagram of test setup	47
8.2.	Limit.....	48
8.3.	Test procedure	49
8.4.	Test result.....	51
9.	Radiated Band Edge Compliance	55
9.1.	Block diagram of test setup	55
9.2.	Limit.....	55
9.3.	Test procedure	55
9.4.	Test result.....	55
10.	Power Line Conducted Emission.....	68
10.1.	Block diagram of test setup	68
10.2.	Power Line Conducted Emission Limits (Class B)	68
10.3.	Test procedure	68
10.4.	Test result.....	69
11.	Antenna Requirements	72
11.1.	Limit.....	72
11.2.	Result	72
12.	Test Setup Photograph	73
13.	Photos of the EUT	75

Test Report Declare

Applicant	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300 Kirkland, WA, United States
Equipment under Test	:	Wyze Cam v3
Model No.	:	WYZEC3
HVIN	:	WYZEC3C
Trade Mark	:	N/A
Manufacturer	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300 Kirkland, WA, United States

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, 558074 D01 15.247 Meas Guidance v05r02

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R21050704-1E1		
Date of Receipt:	May 07, 2021	Date of Test:	May 07, 2021 ~ May 20, 2021

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:

Damon Hu

Damon Hu/EMC Manager



Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	May 20, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	Pass
Maximum Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (e)	Pass
Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	Pass
Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: Wyze Cam v3
Model Number	: WYZEC3
HVIN	: WYZEC3C
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V By AC/DC Adapter
Radio Technology	: IEEE 802.11b/g/n
FCC Operation Frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter Rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: MCS0~MCS7
Antenna Type	: PIFA antenna, maximum PK gain: 2.6 dBi
Sample Type	: Series production
Serial Number	: N/A

Note: EUT is the ab. of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
USB Cable	N/A	N/A	Length 2.0m, Unshielded	N/A
AC/DC adapter	WYZE™	KA06E-0501000US	Input 100-240V~50/60Hz, Output 5V, 1A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	Lenovo Beijing Co. Ltd.	ThinkPad	FCC/CE	TP00015A
AC Adapter	SAMSUNG	EP-TA200	R37KA8770J1SE3	N/A

2.4. Block diagram of EUT configuration for test

EUT

Run a special test software “Putty.exe” provided by manufacturer to control EUT work in Continuous Tx mode, and select test channel, wireless mode and data rate.

Tested mode, channel, setting Tx power and rand data rate information				
Mode	Setting Tx Power	Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	42	11	LCH: CH1	2412
	43	11	MCH: CH6	2437
	40	11	HCH: CH11	2462
IEEE 802.11g	46	54	LCH: CH1	2412
	46	54	MCH: CH6	2437
	46	54	HCH: CH11	2462
IEEE 802.11n HT20	40	MCS 7	LCH: CH1	2412
	46	MCS 7	MCH: CH6	2437
	40	MCS 7	HCH: CH11	2462

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Registration No. CNAS L6451; A2LA Certificate Number: 3870.01;

FCC Designation Number: CN1182; FCC Test Firm Registration Number: 540522

Industry Canada Site Registration Number: 10288A-1

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for radio frequency (RBW<20 kHz)	3×10^{-8}
Temperature	0.4°C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz) 4.40 dB (6 GHz-18 GHz) 3.54 dB (18 GHz-26 GHz) 4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 24, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jul. 01, 2020	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jul. 01, 2020	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jul. 01, 2020	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Jul. 01, 2020	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 29, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jul. 01, 2020	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jul. 01, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 14, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 14, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 14, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Sep. 28, 2020	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 28, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jul. 01, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 14, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 14, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 11, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Sep. 28, 2020	1 Year
Pre-amplifier	TERA-MW	TRLA-0040	101303	Sep. 28, 2020	1 Year

		G35			
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
EMI Test Receiver	R&S	ESU8	100316	Sep. 28, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 28, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

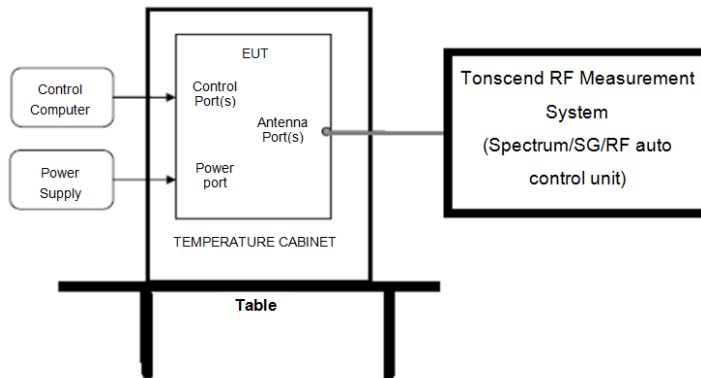

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	1% to 5% of the OBW
VBW:	Three times the RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.4. Test result


Test Mode	Test	Ant	6dB Bandwidth (MHz)	Limit (MHz)	Verdict
11B	2412	Ant1	8.658	0.5	Pass
11B	2437	Ant1	8.715	0.5	Pass
11B	2462	Ant1	8.577	0.5	Pass
11G	2412	Ant1	16.344	0.5	Pass
11G	2437	Ant1	16.335	0.5	Pass
11G	2462	Ant1	16.338	0.5	Pass
11N20SISO	2412	Ant1	17.556	0.5	Pass
11N20SISO	2437	Ant1	17.532	0.5	Pass
11N20SISO	2462	Ant1	17.544	0.5	Pass


Test Mode	Test	Ant	99% OBW (MHz)	Limit (MHz)	Verdict
11B	2412	Ant1	13.392	---	Pass
11B	2437	Ant1	13.359	---	Pass
11B	2462	Ant1	13.365	---	Pass
11G	2412	Ant1	16.752	---	Pass
11G	2437	Ant1	16.719	---	Pass
11G	2462	Ant1	16.692	---	Pass
11N20SISO	2412	Ant1	17.730	---	Pass
11N20SISO	2437	Ant1	17.760	---	Pass
11N20SISO	2462	Ant1	17.703	---	Pass


4.5. original test data


6dB Bandwidth:

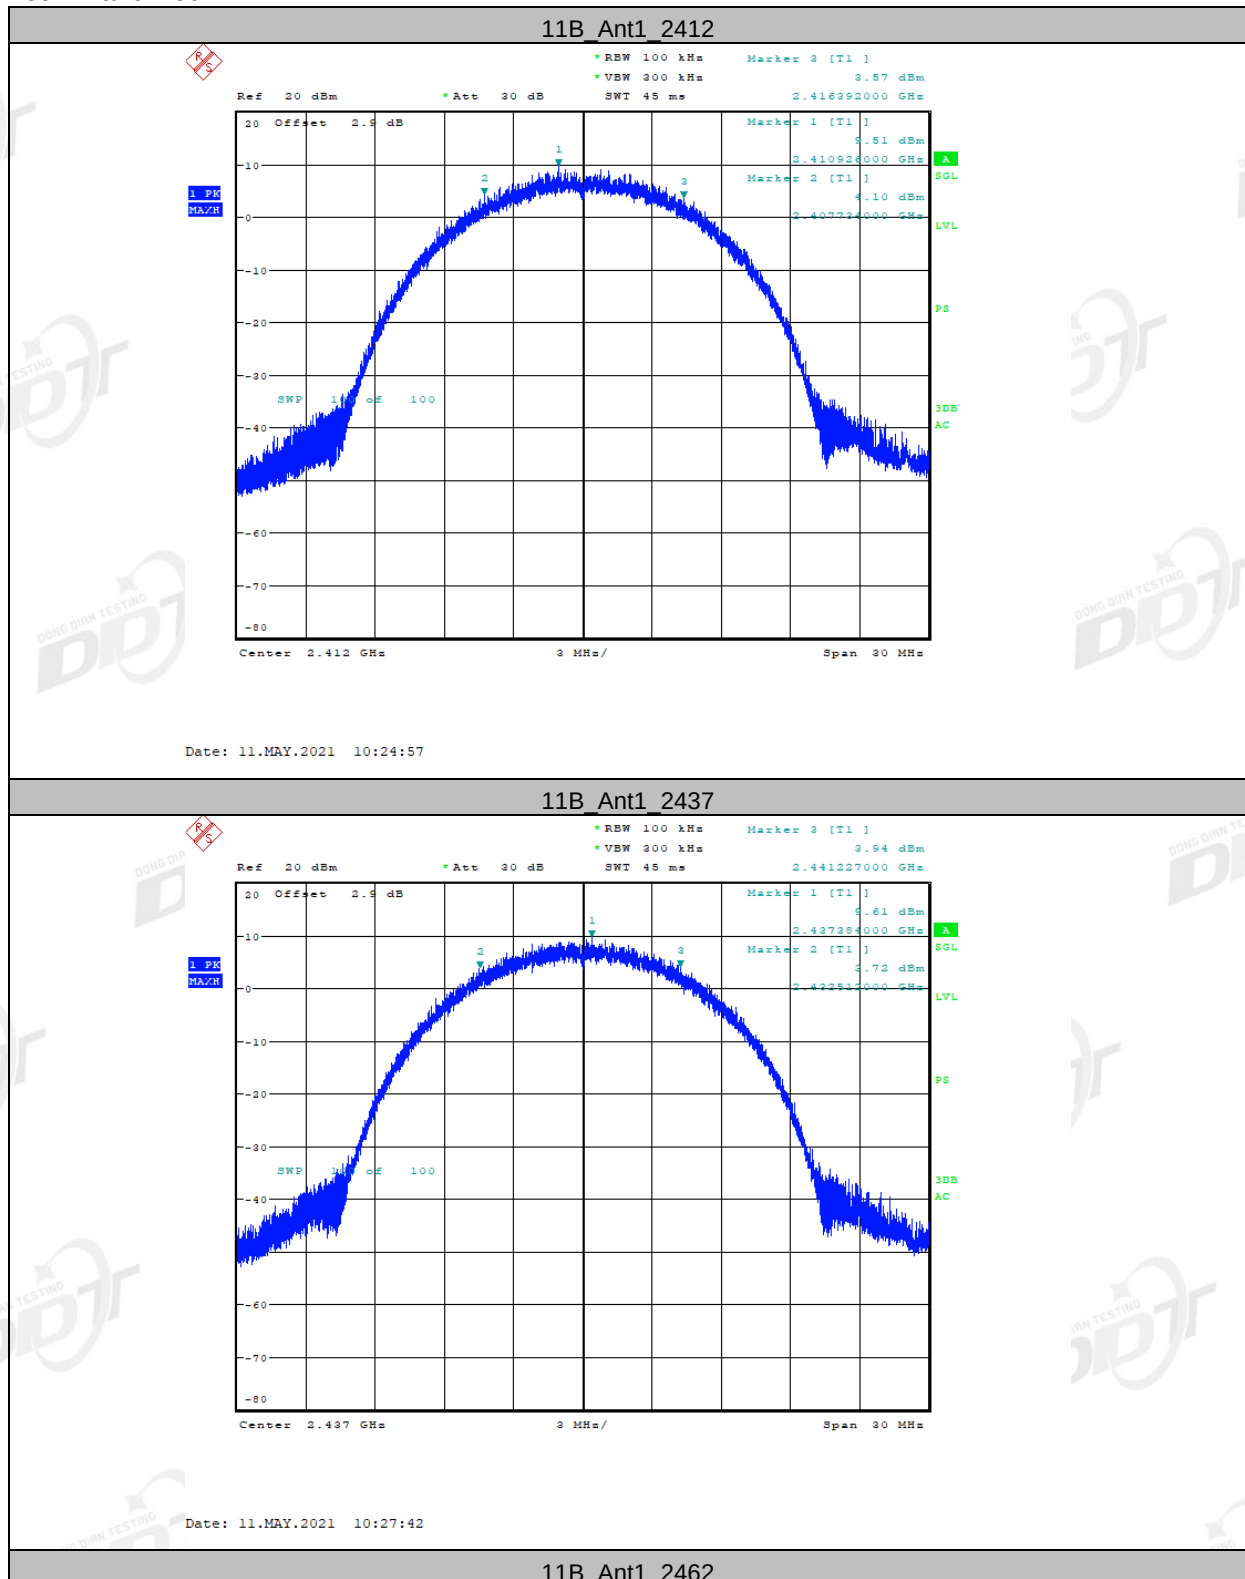

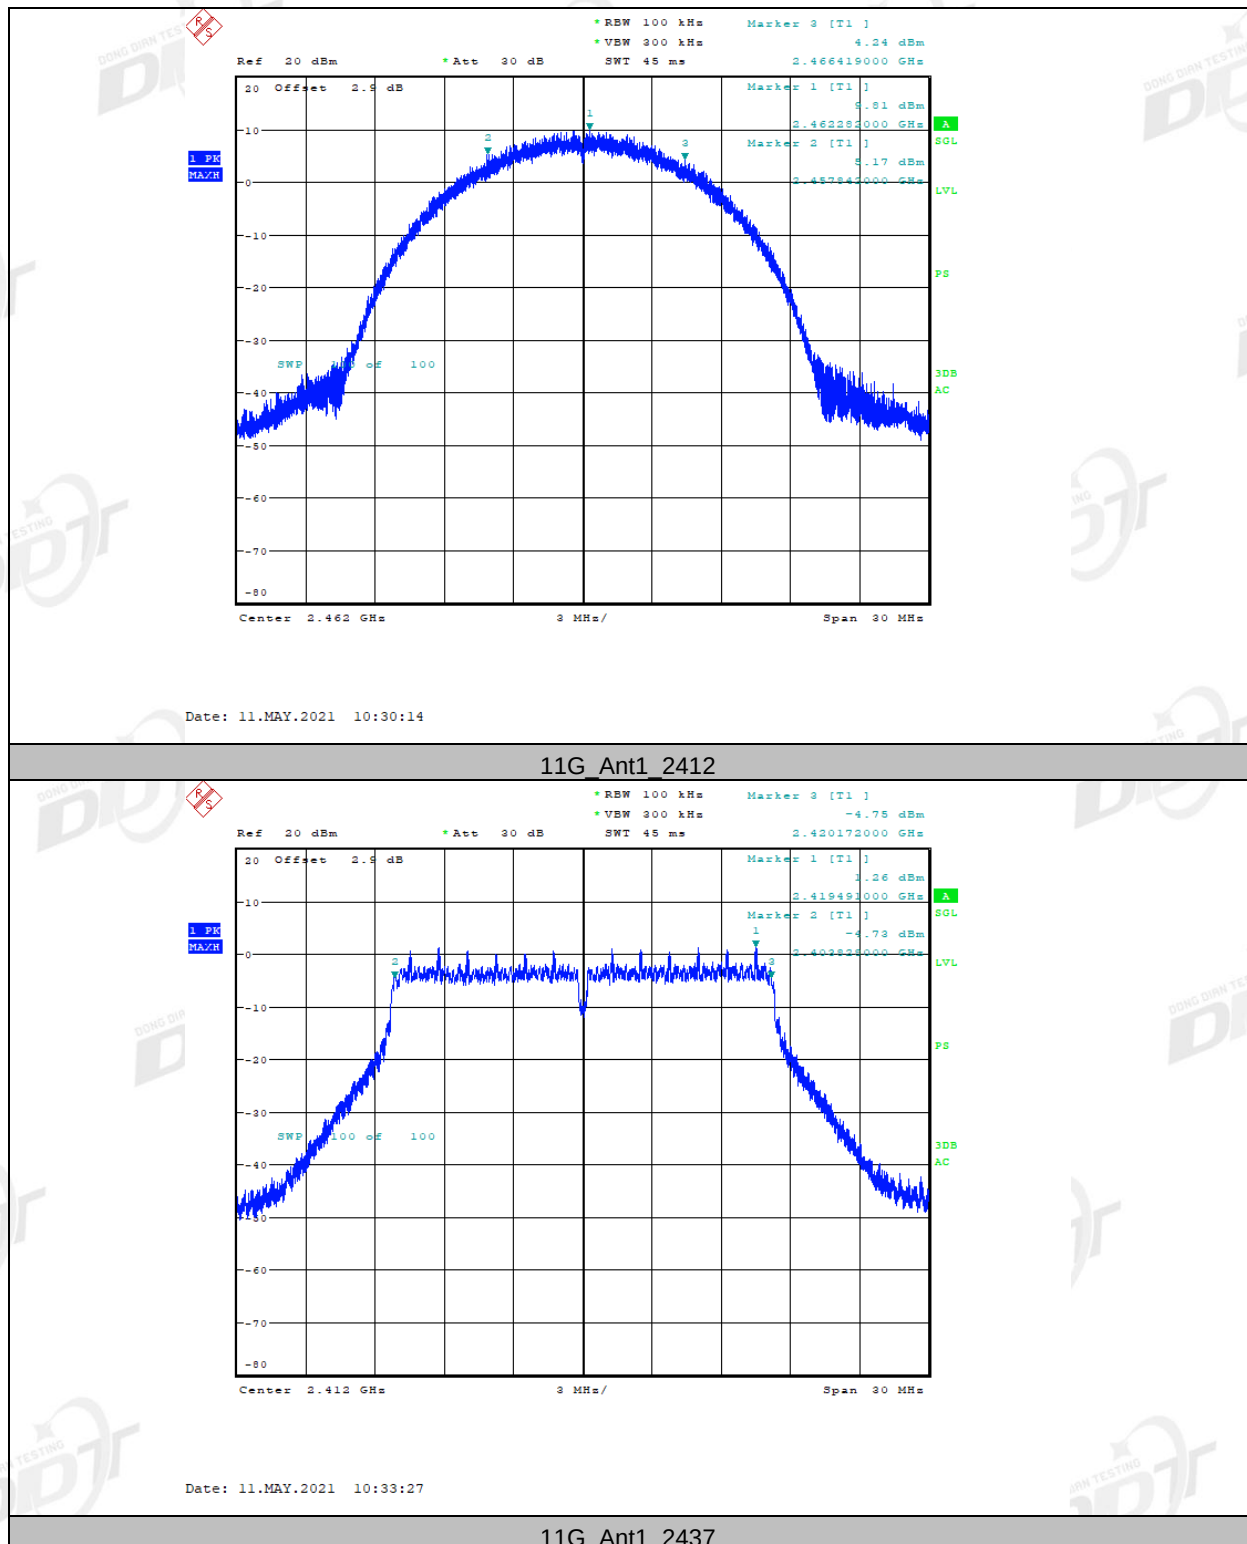


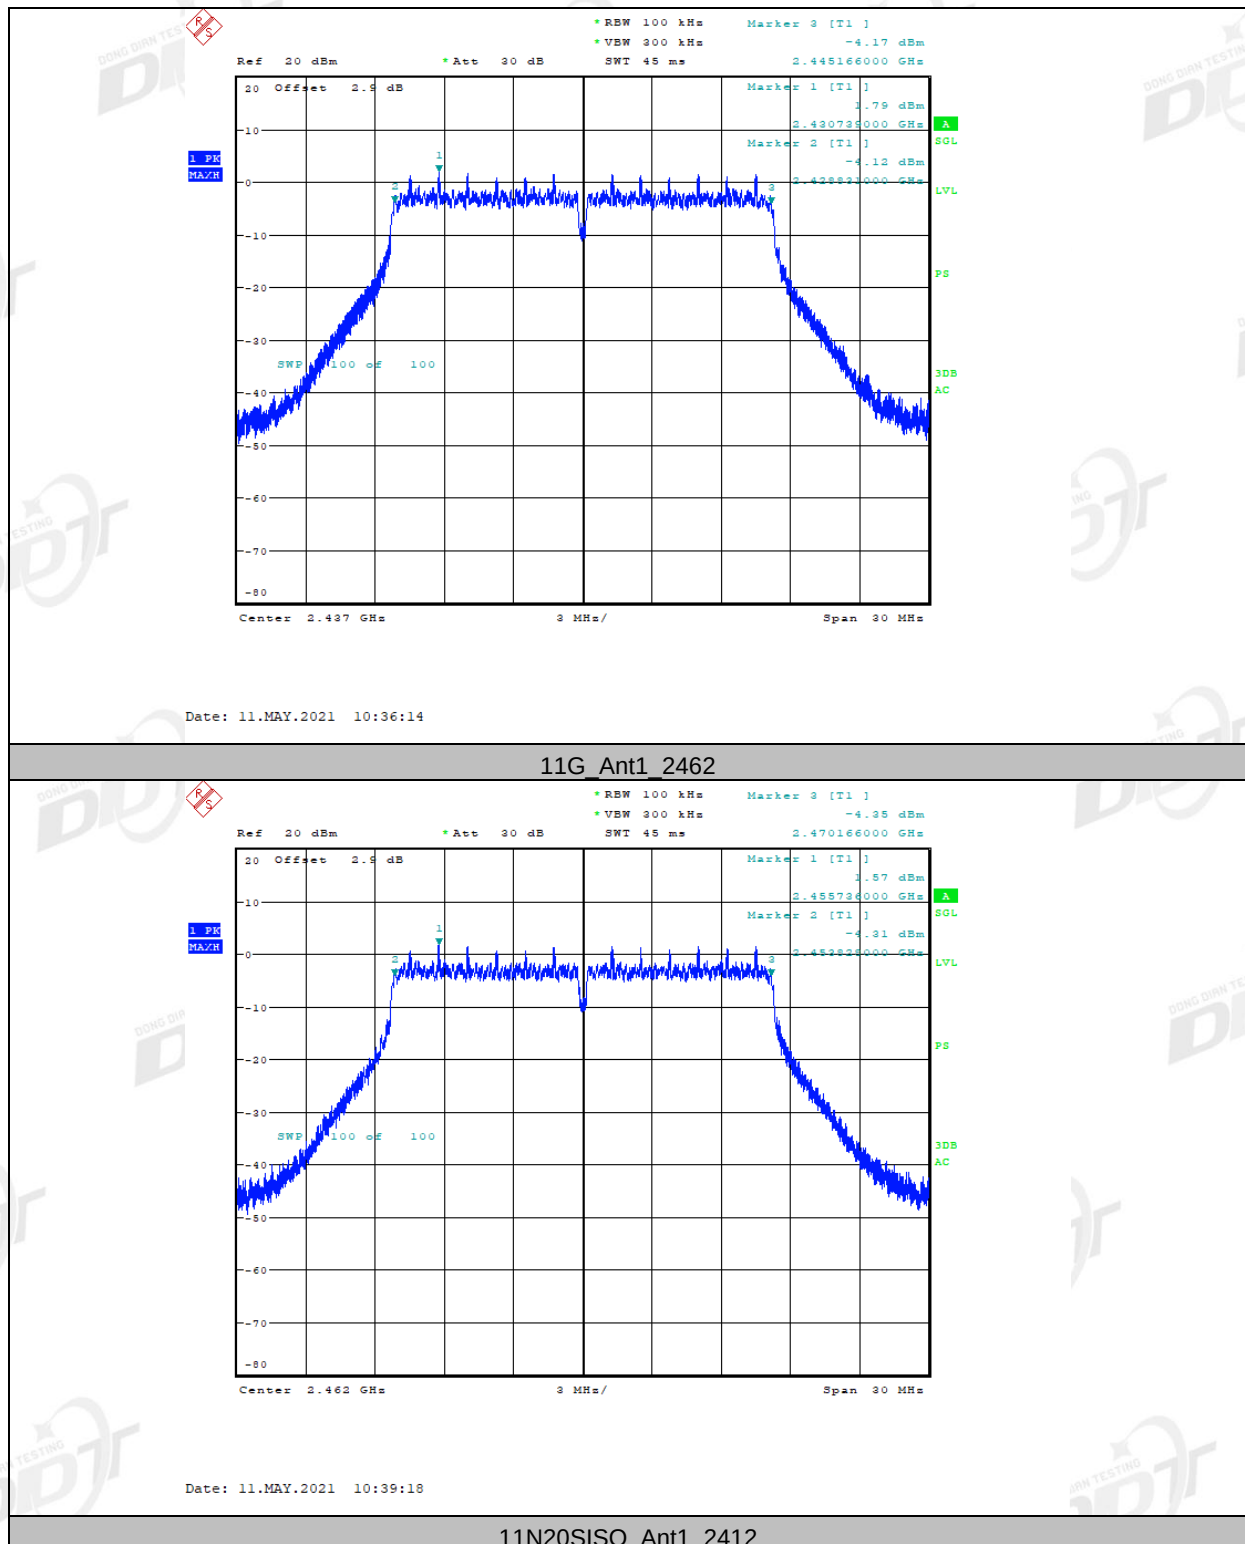


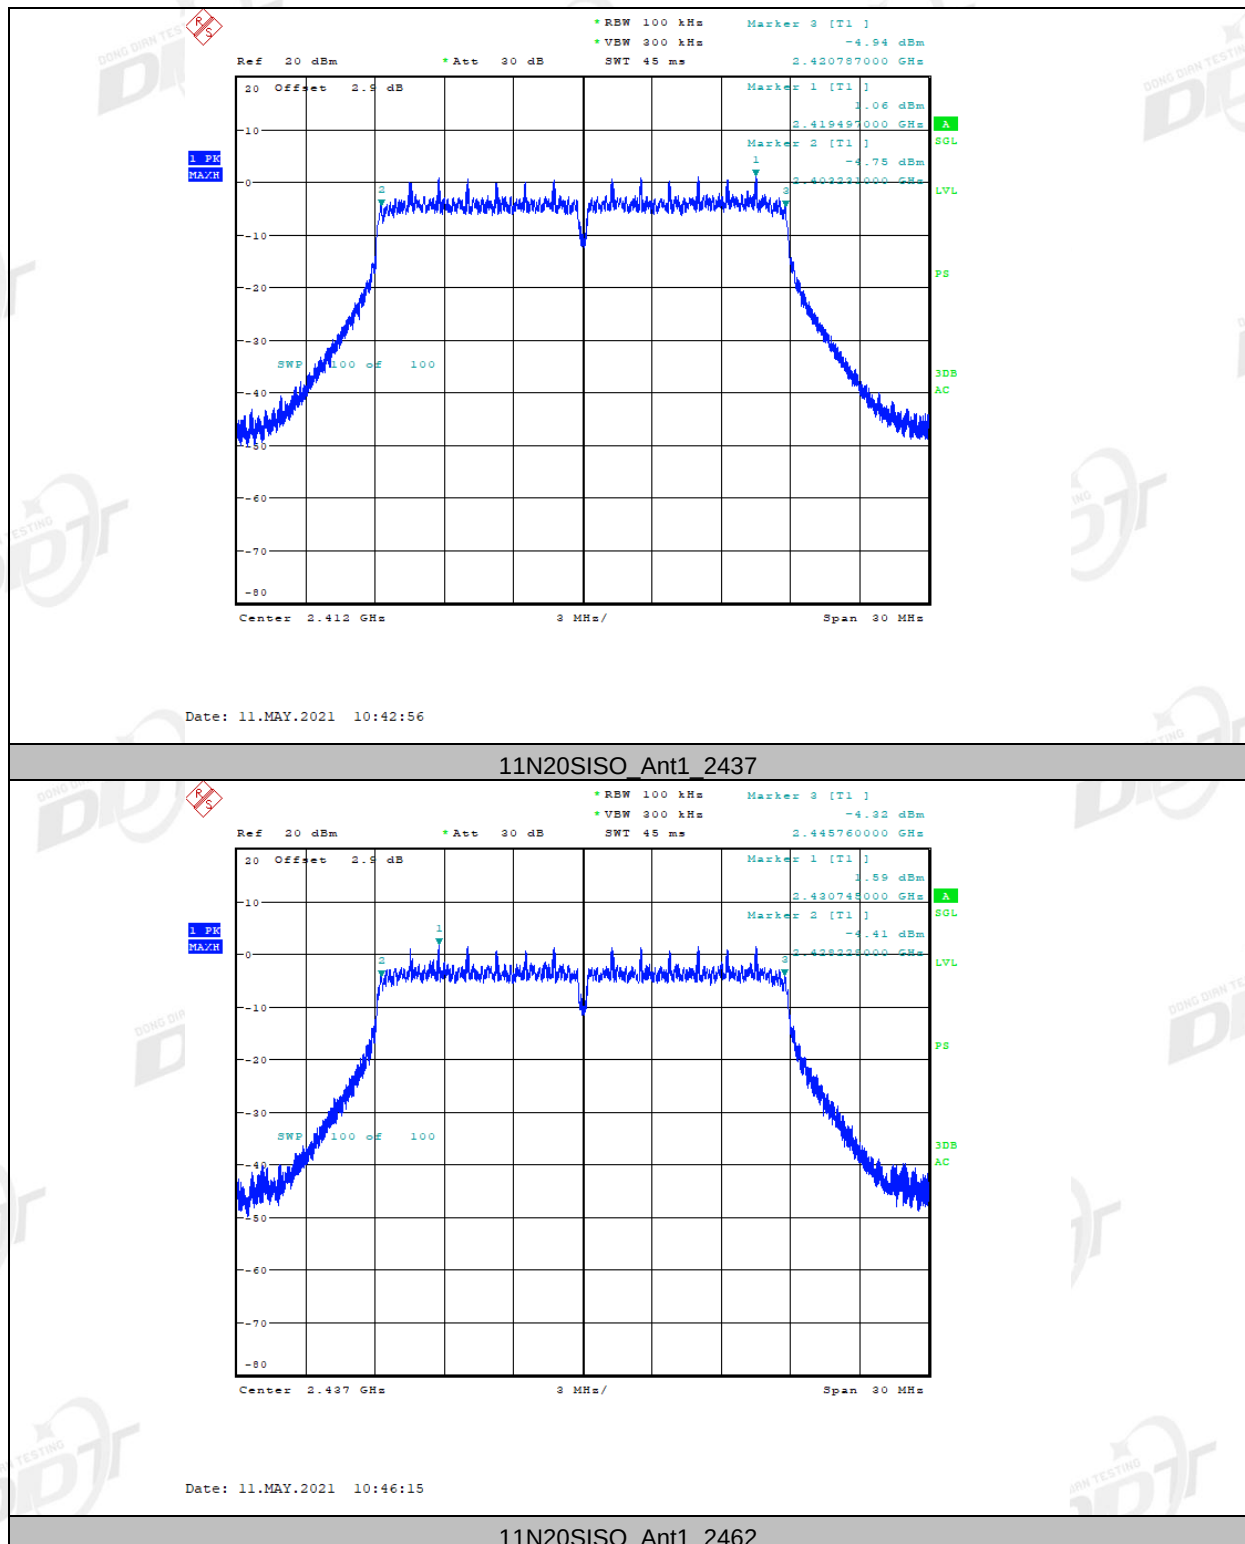

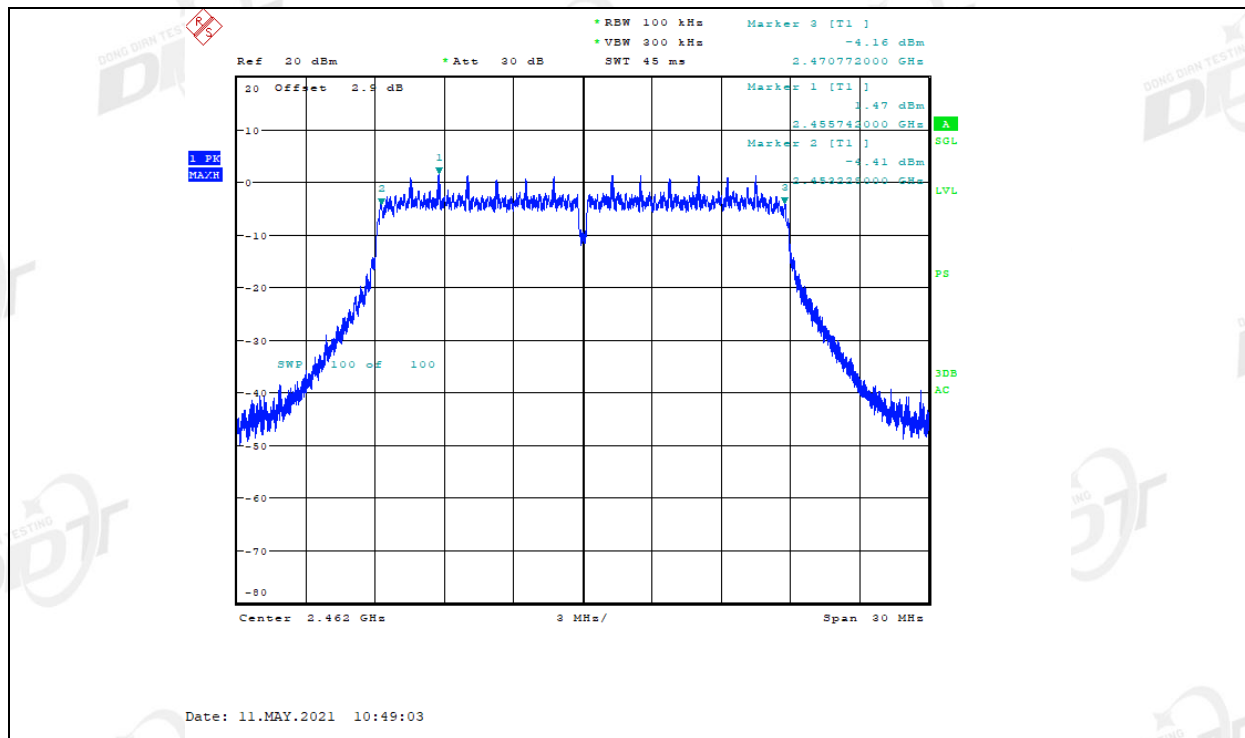


99% Bandwidth

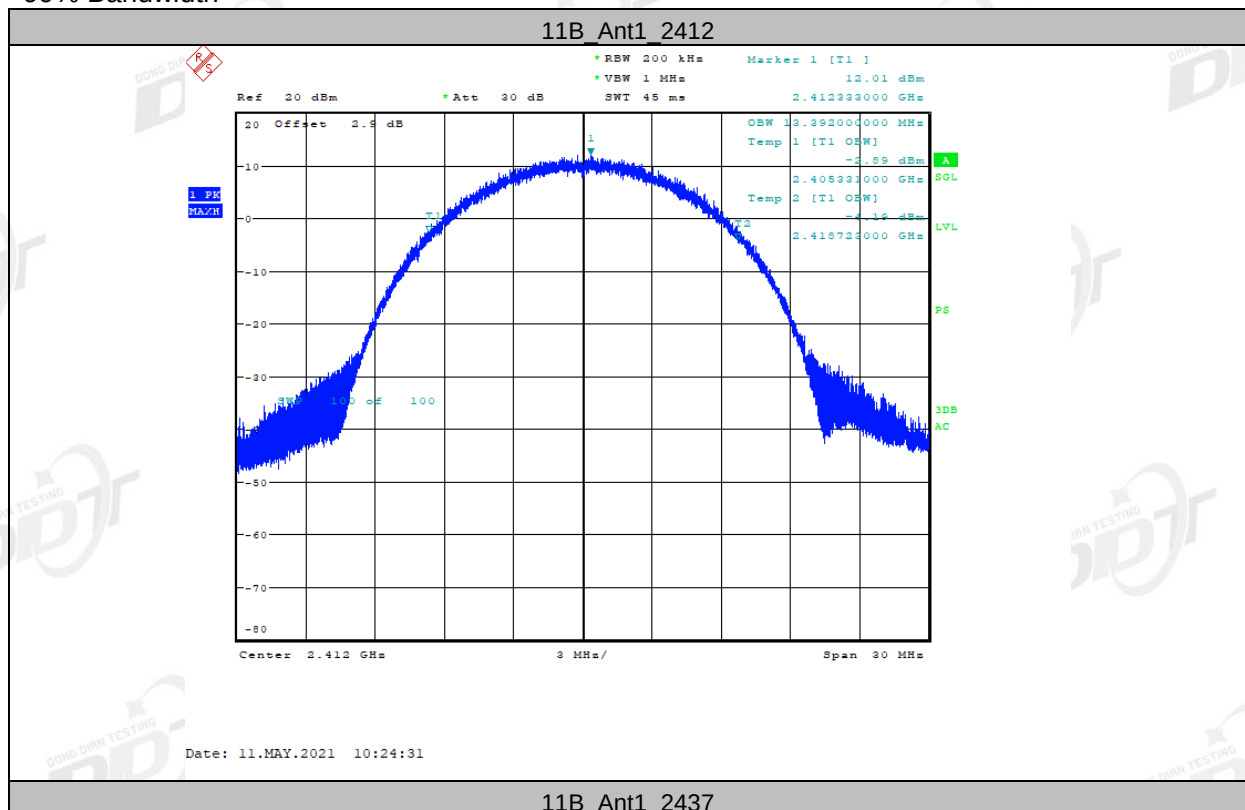

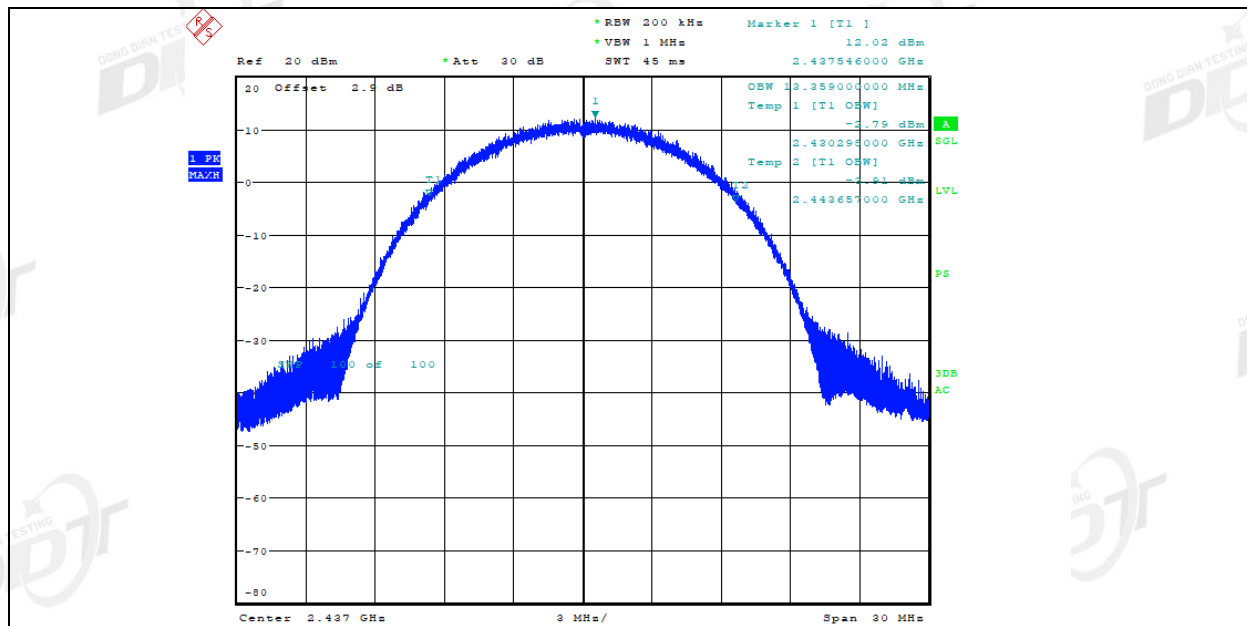


Date: 11.MAY.2021 10:27:18

11B Ant1 2462

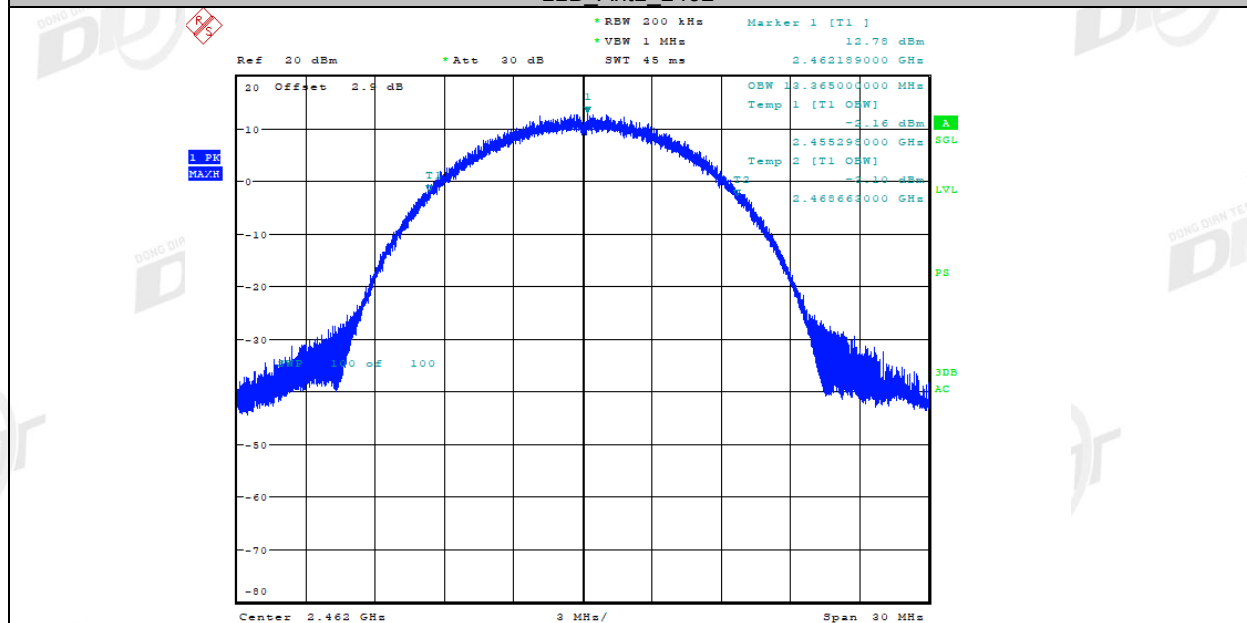


Date: 11.MAY.2021 10:29:48

11G Ant1 2412

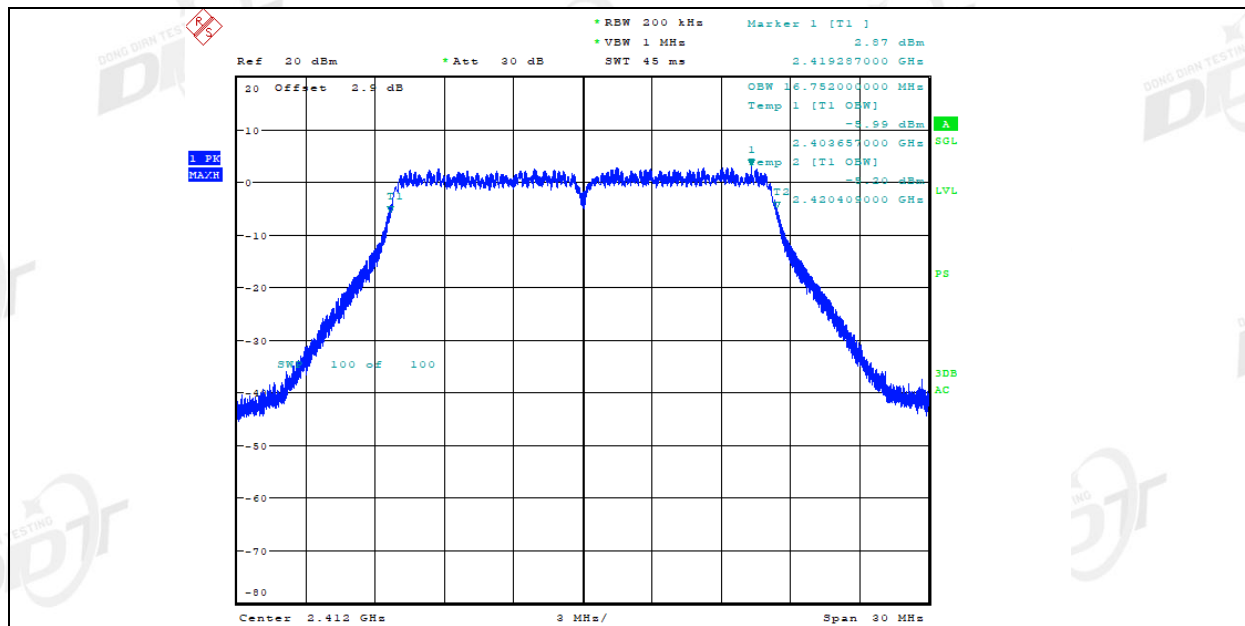


Date: 11.MAY.2021 10:33:00

11G Ant1 2437

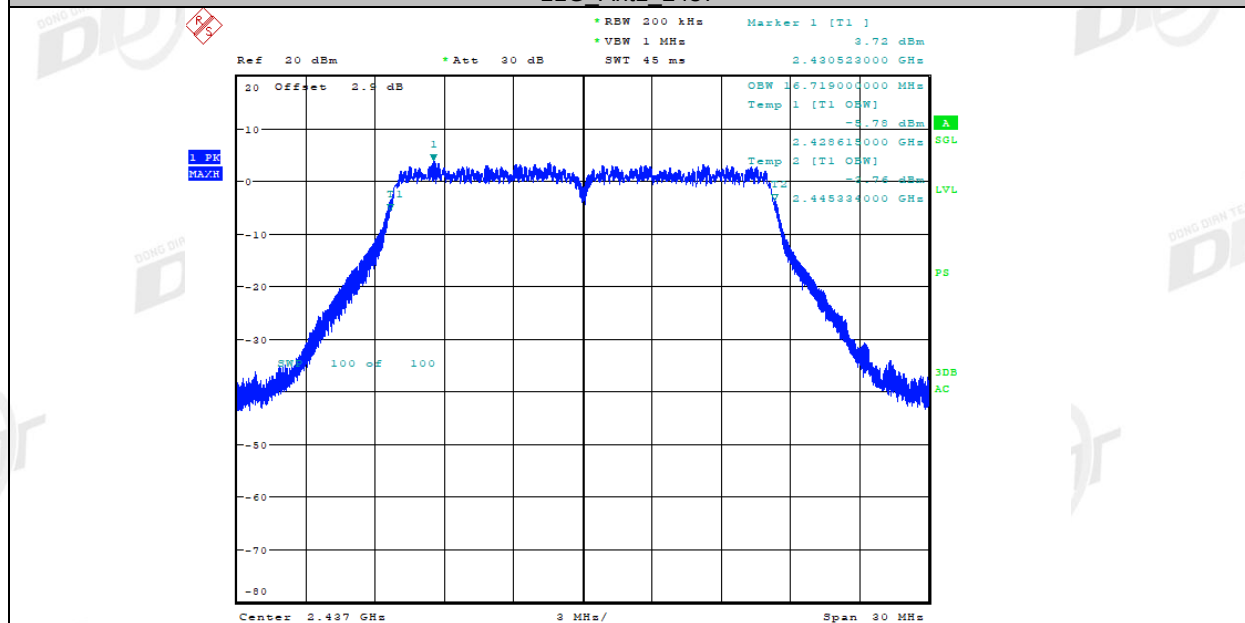


Date: 11.MAY.2021 10:35:49

11G Ant1 2462

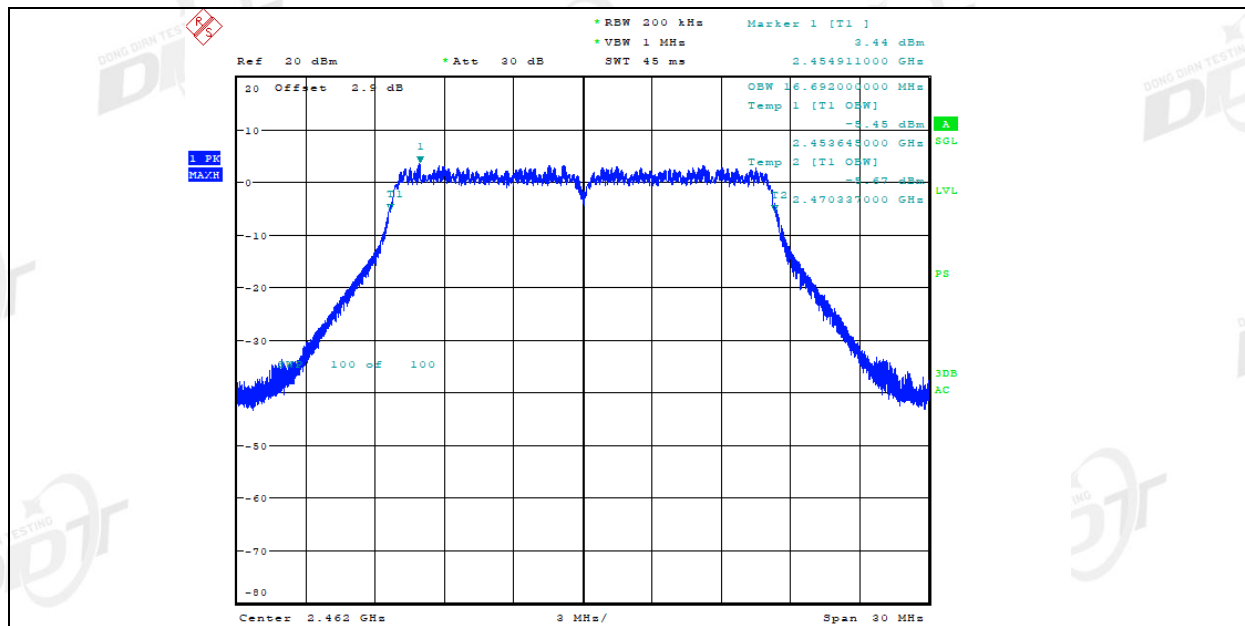


Date: 11.MAY.2021 10:38:51

11N20SISO Ant1 2412

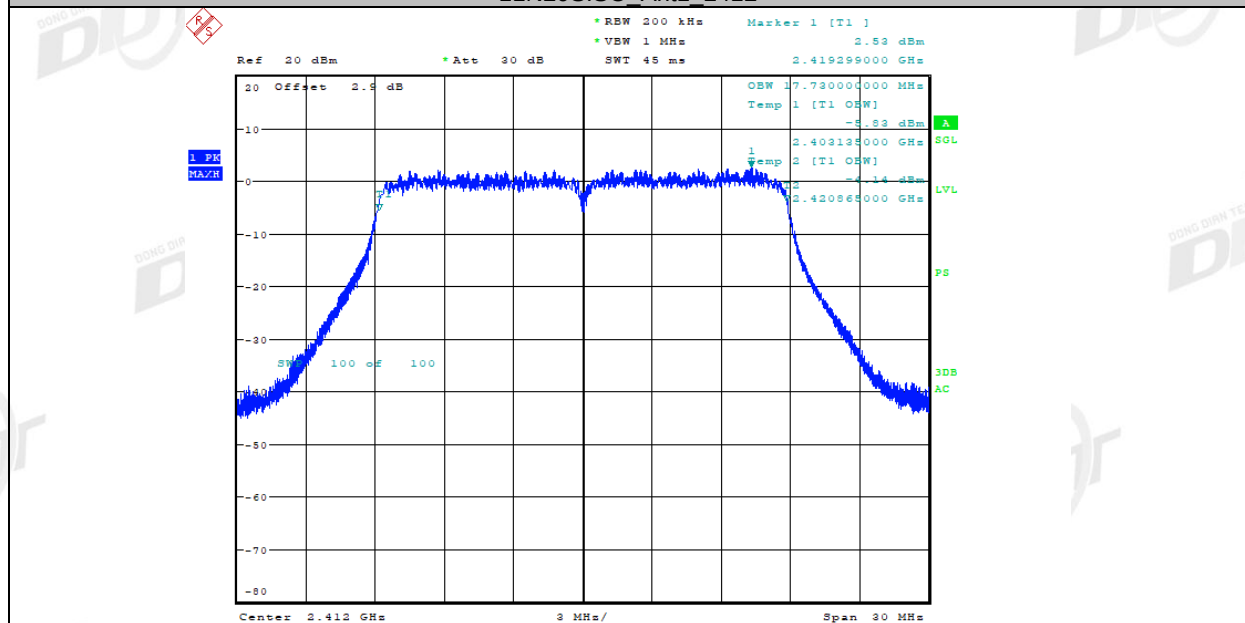

Date: 11.MAY.2021 10:42:28

11N20SISO Ant1 2437

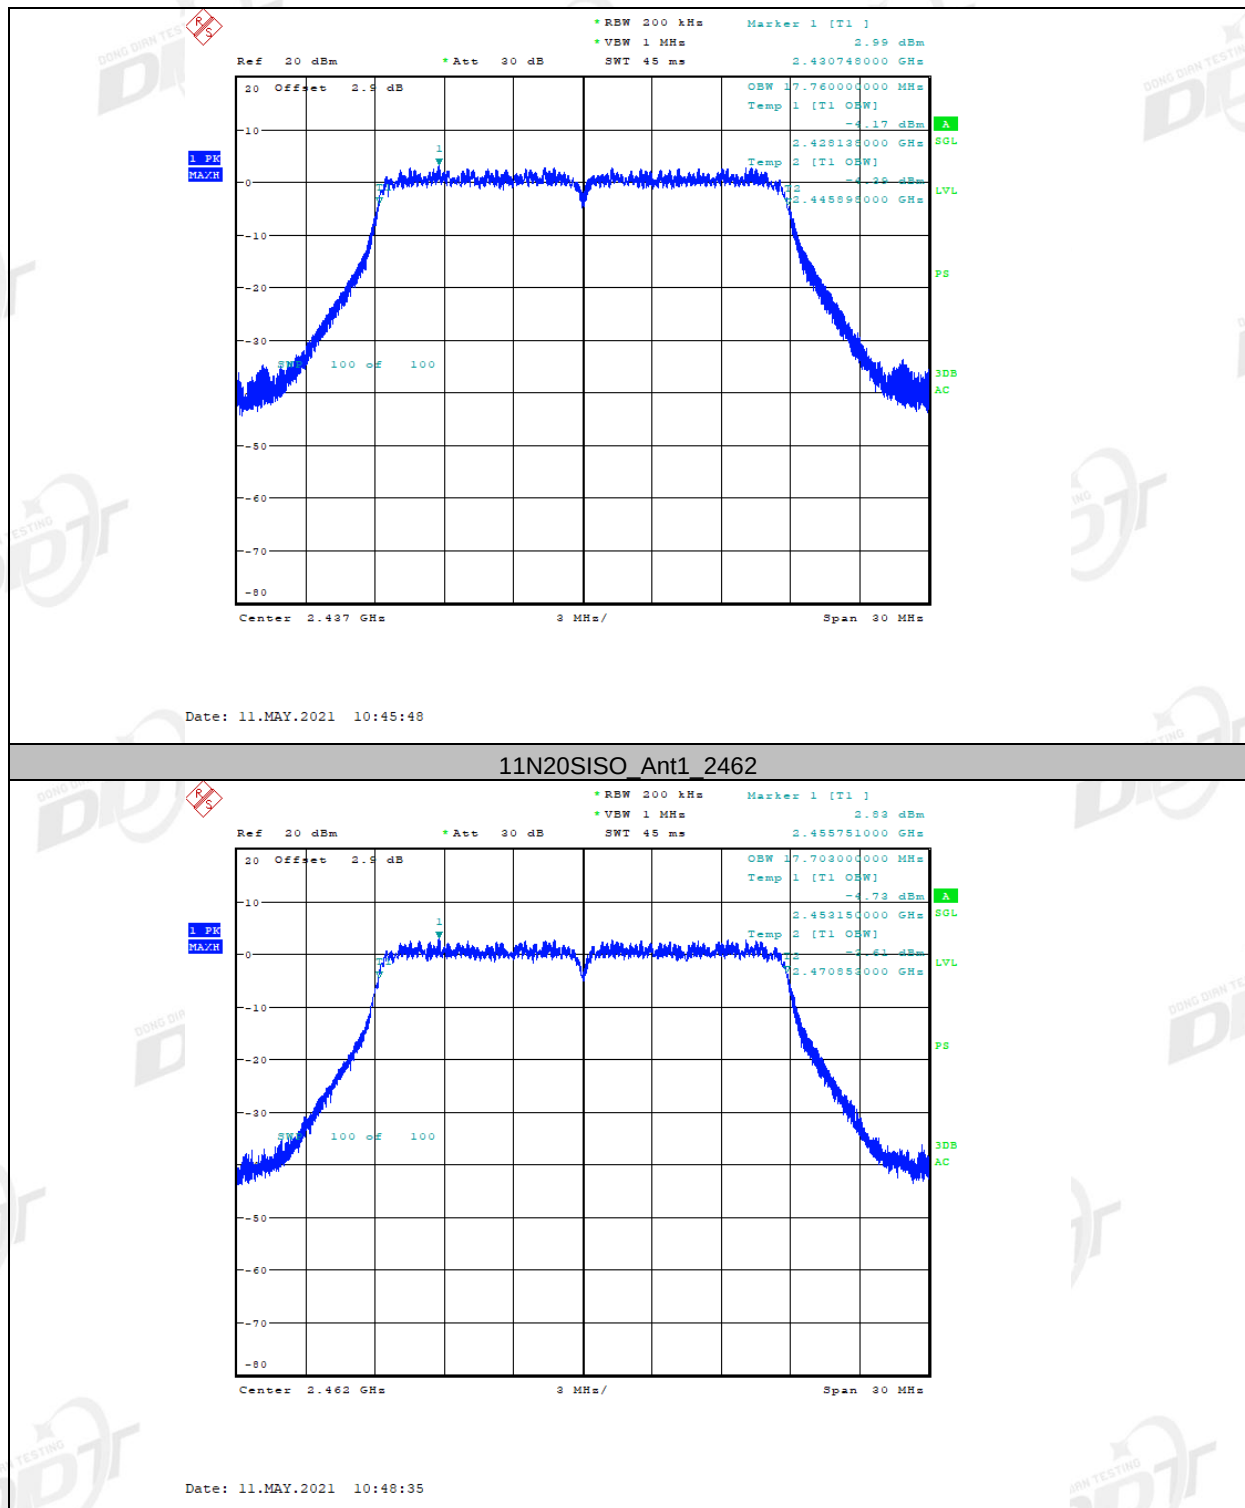

5. Maximum Conducted Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the Maximum output power of antenna port by channel power function of spectrum.

5.4. Test result

Test Mode	Test Channel	Ant	Power(dBm)	Limit(dBm)	Verdict
11B	2412	ANT1	23.95	30	Pass
11B	2437	ANT1	24.23	30	Pass
11B	2462	ANT1	22.63	30	Pass
11G	2412	ANT1	20.74	30	Pass
11G	2437	ANT1	21.35	30	Pass
11G	2462	ANT1	21.22	30	Pass
11N20SISO	2412	ANT1	19.39	30	Pass
11N20SISO	2437	ANT1	20.98	30	Pass
11N20SISO	2462	ANT1	19.29	30	Pass

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	peak
Sweep time:	auto
Trace mode	Max hold


- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test result


Test Mode	Test Channel	Ant	PSD (dBm/30kHz)	Limit(dBm/3kHz)	Verdict
11B	2412	ANT1	3.52	8.00	Pass
11B	2437	ANT1	4.48	8.00	Pass
11B	2462	ANT1	5.20	8.00	Pass
11G	2412	ANT1	-3.87	8.00	Pass
11G	2437	ANT1	-3.07	8.00	Pass
11G	2462	ANT1	-3.34	8.00	Pass
11N20SISO	2412	ANT1	-4.17	8.00	Pass
11N20SISO	2437	ANT1	-3.99	8.00	Pass
11N20SISO	2462	ANT1	-3.72	8.00	Pass

6.5. original test data

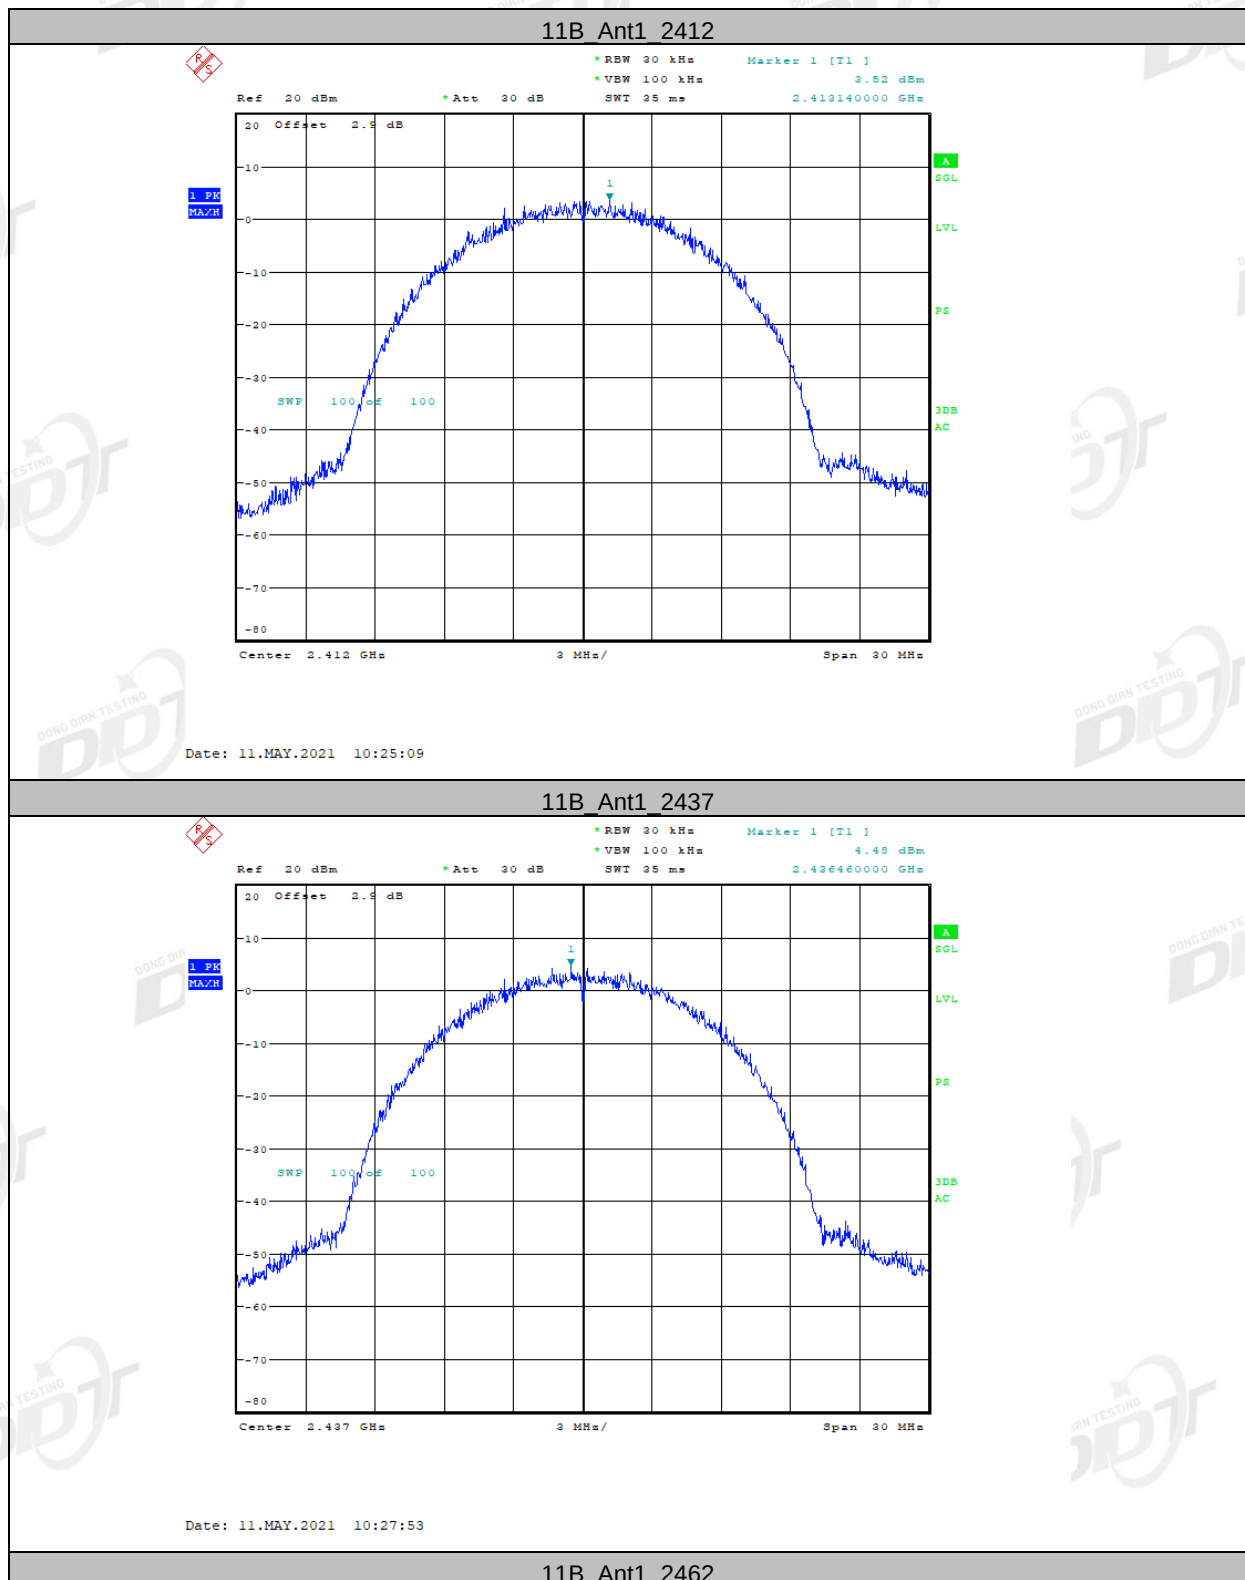

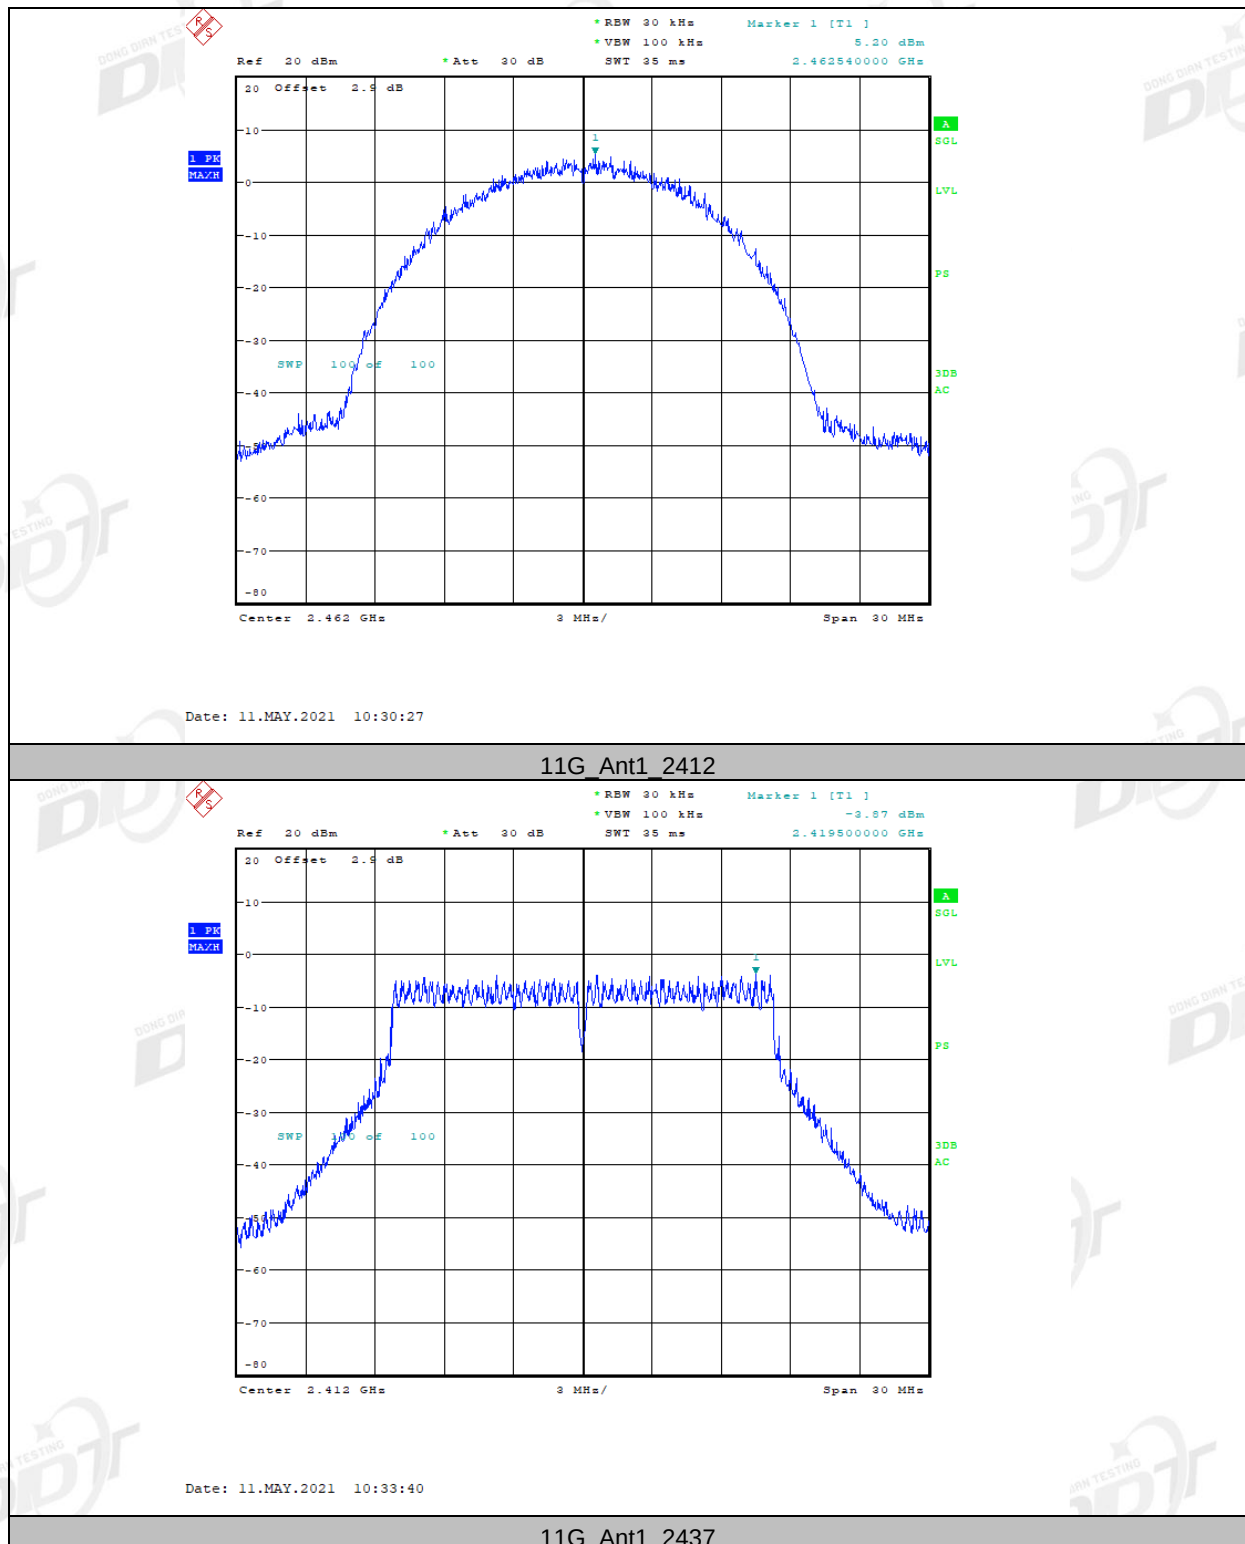


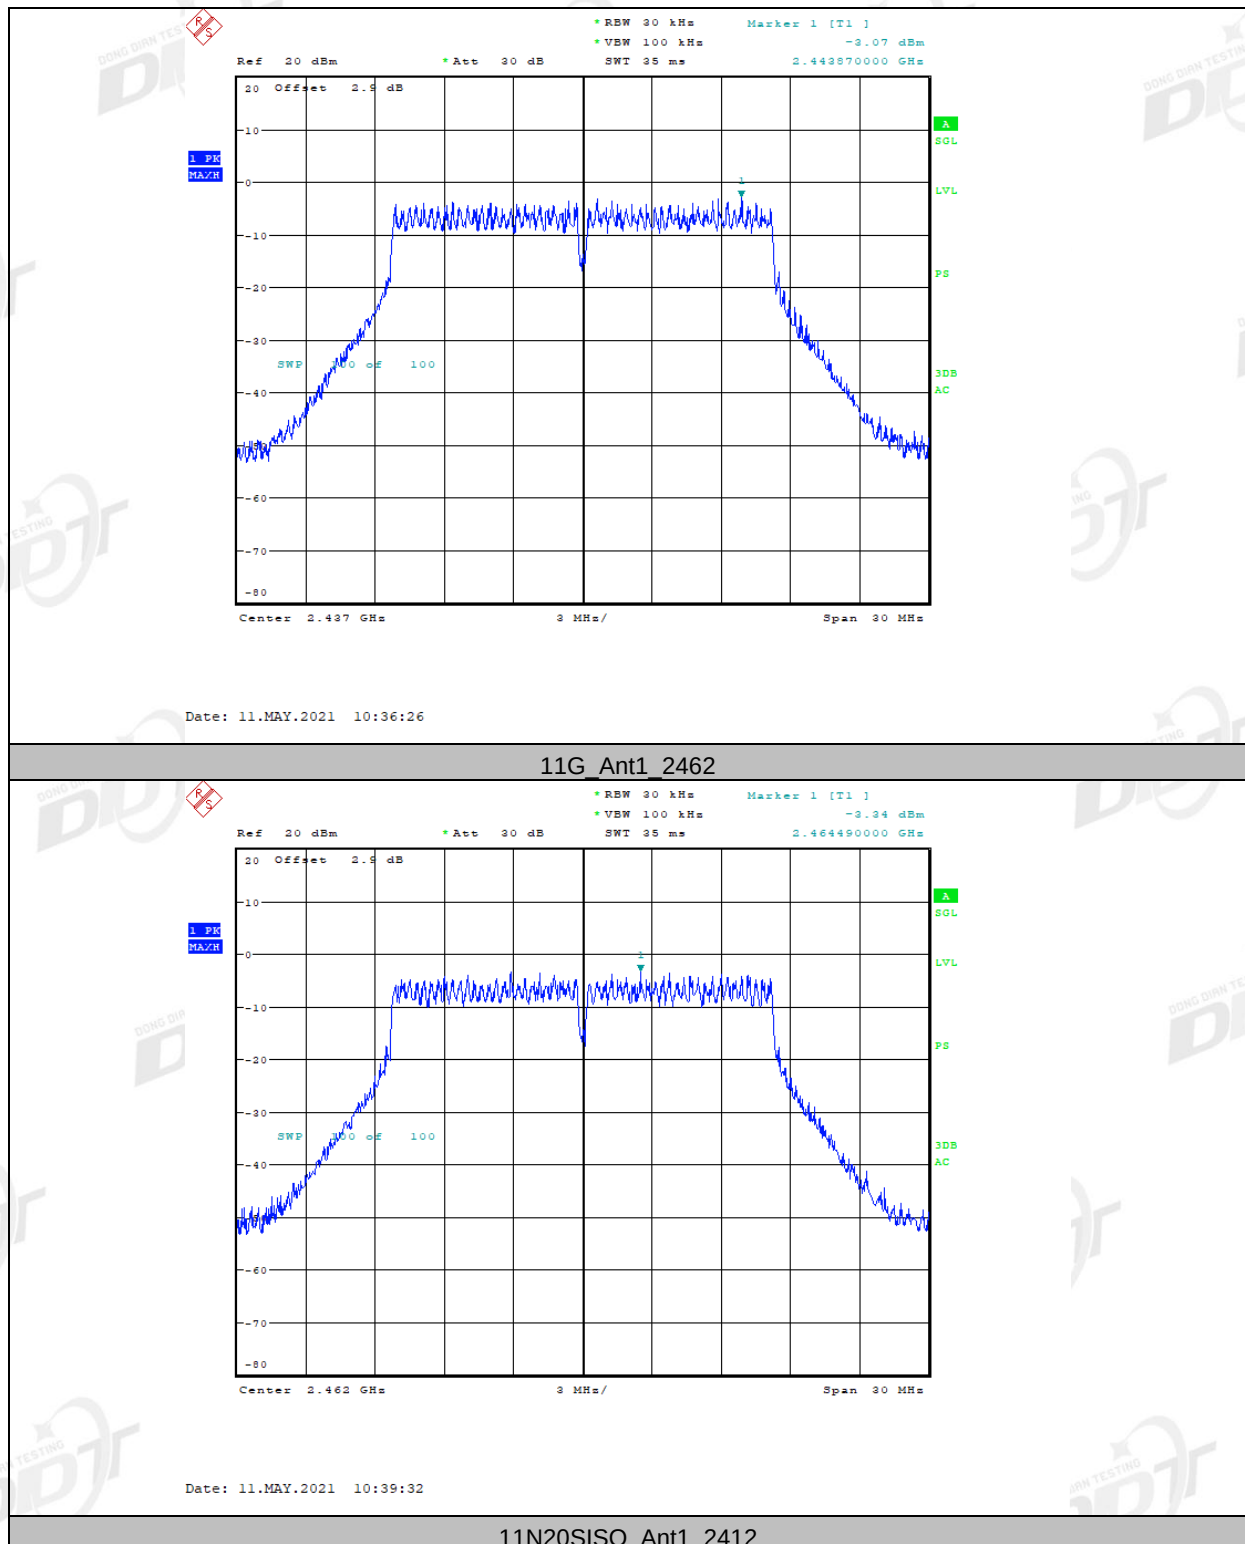

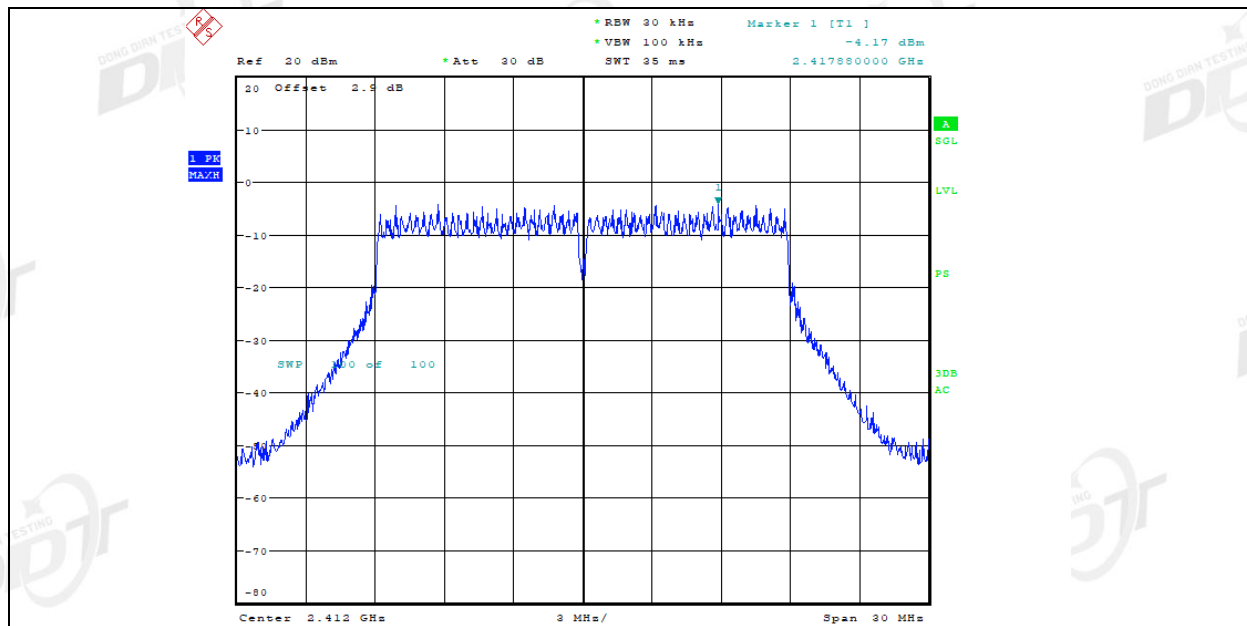


Date: 11.MAY.2021 10:43:11

11N20SISO Ant1 2437

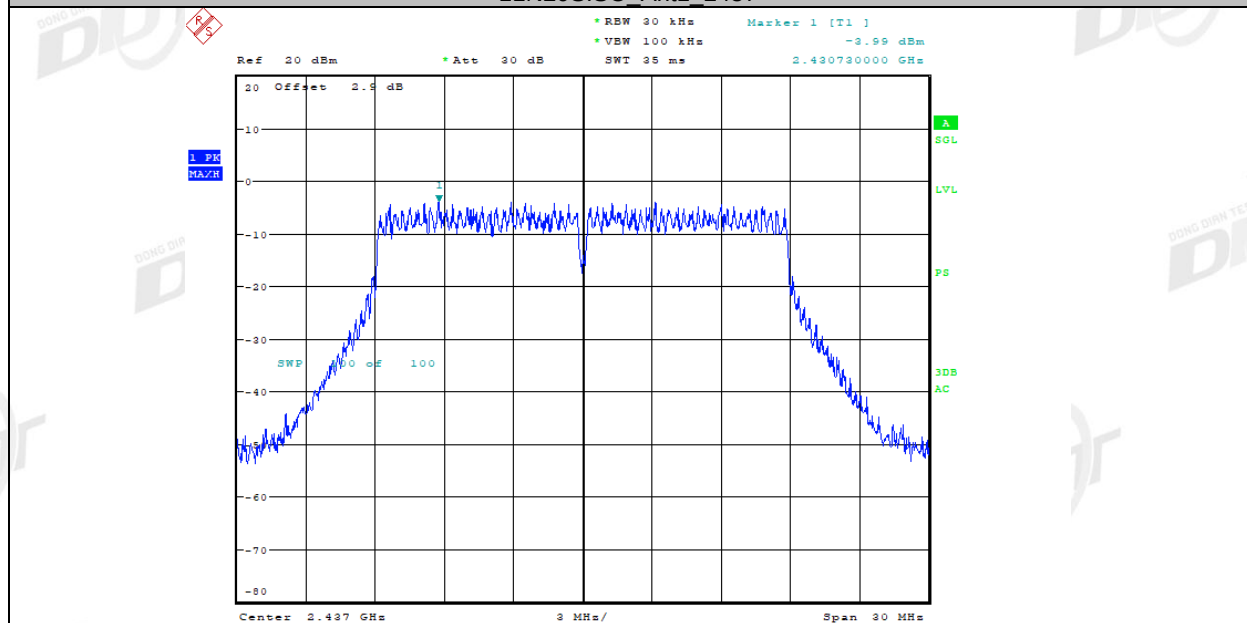

Date: 11.MAY.2021 10:46:28

11N20SISO Ant1 2462

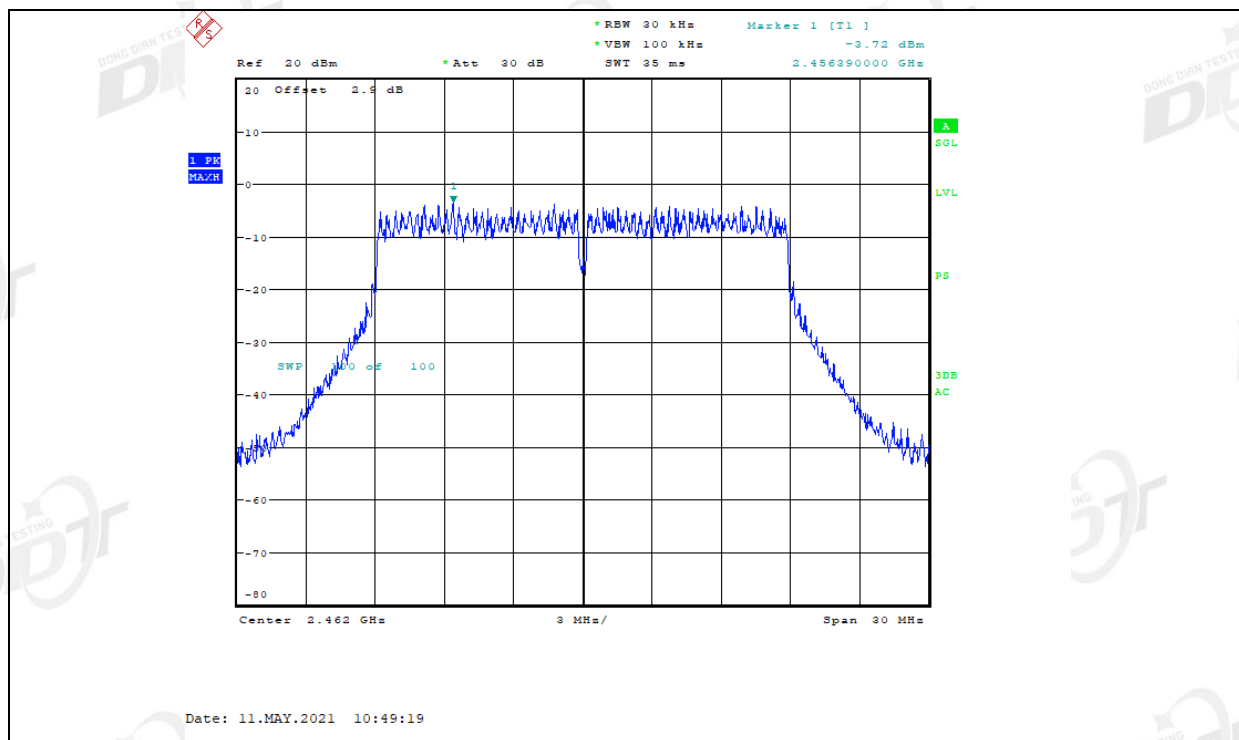

7. Band Edge and Spurious Emissions (Conducted)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


7.4. Test result

EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	/
	CH6	Pass		CH6	/
	CH11	Pass		CH9	/

7.5. original test data


Band Edge

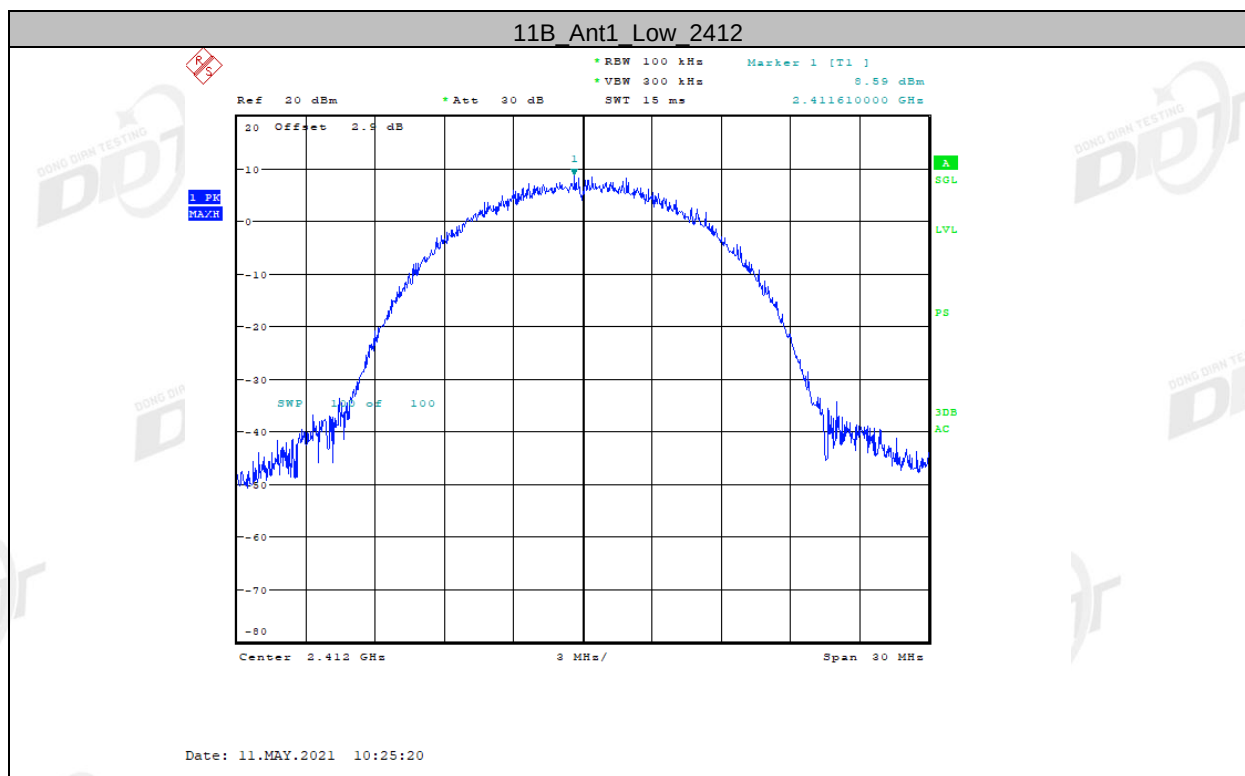

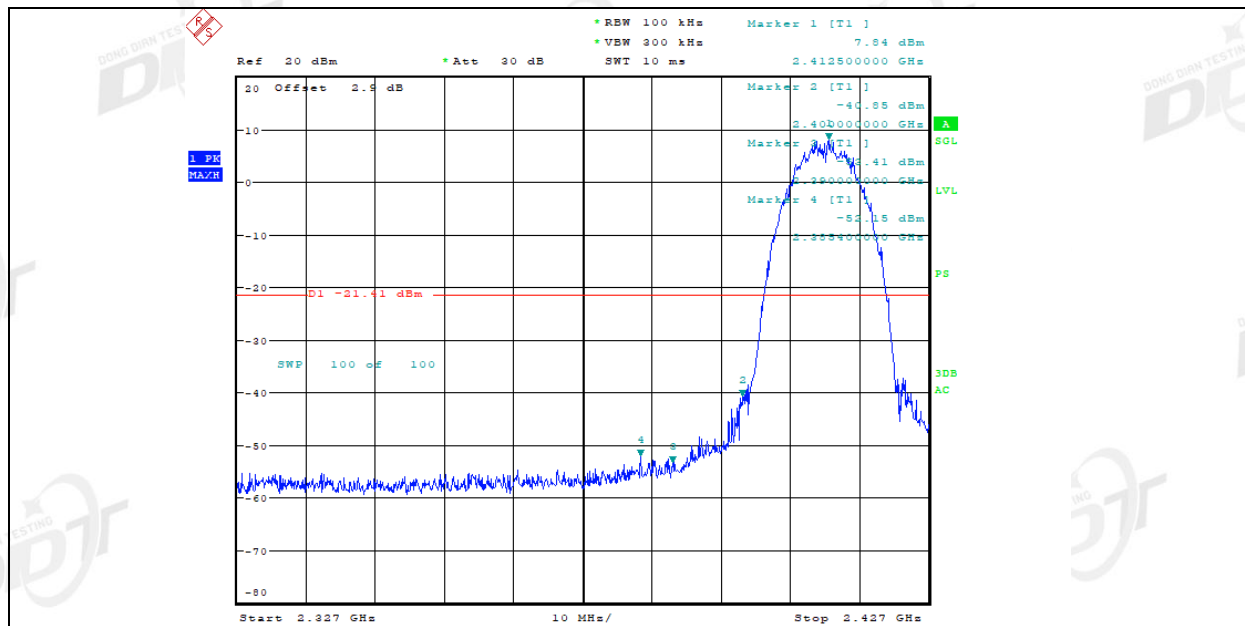


Date: 11.MAY.2021 10:25:25

11B_Ant1_High_2462

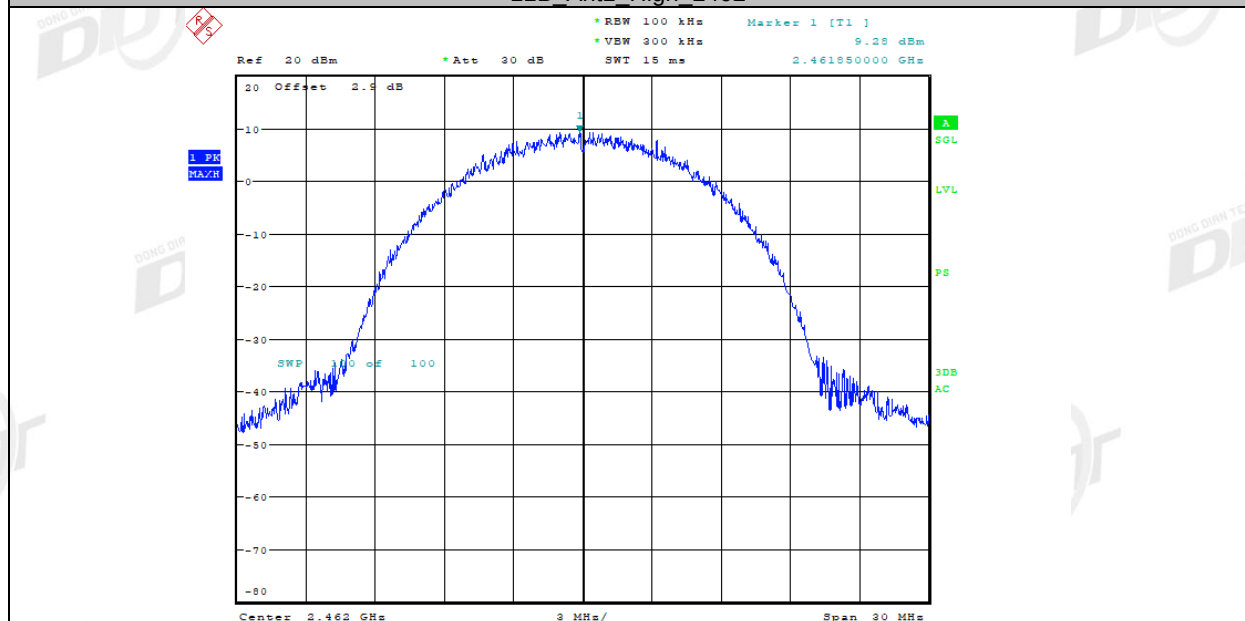


Date: 11.MAY.2021 10:30:39

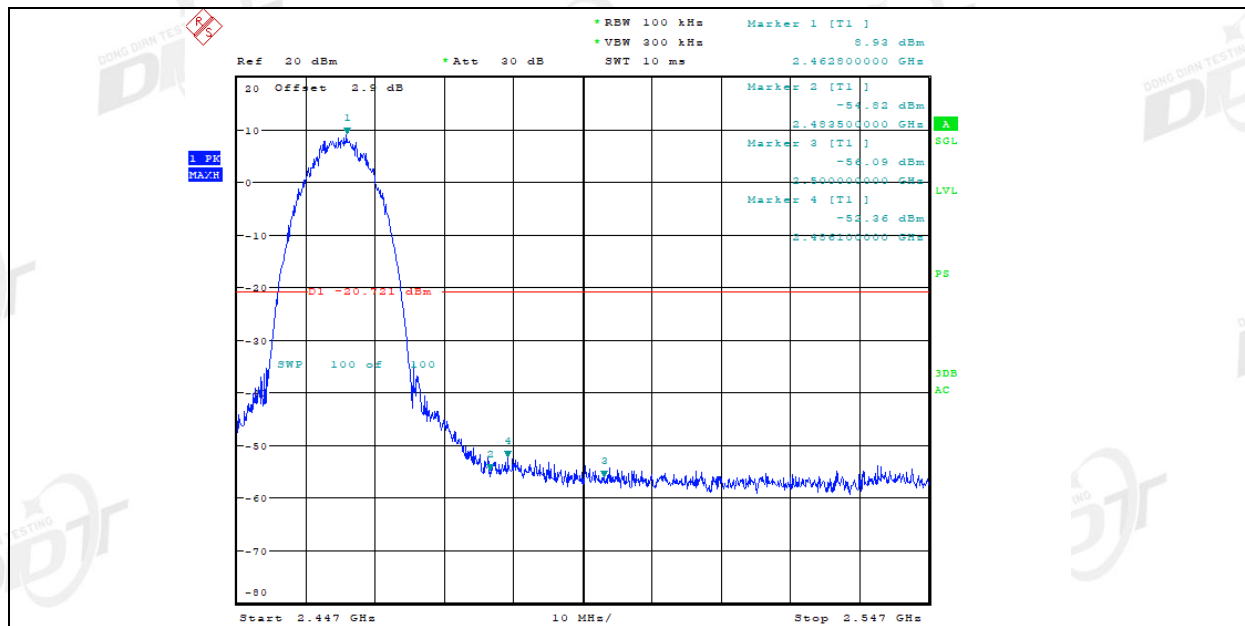



Date: 11.MAY.2021 10:30:43

11G_Ant1 Low 2412

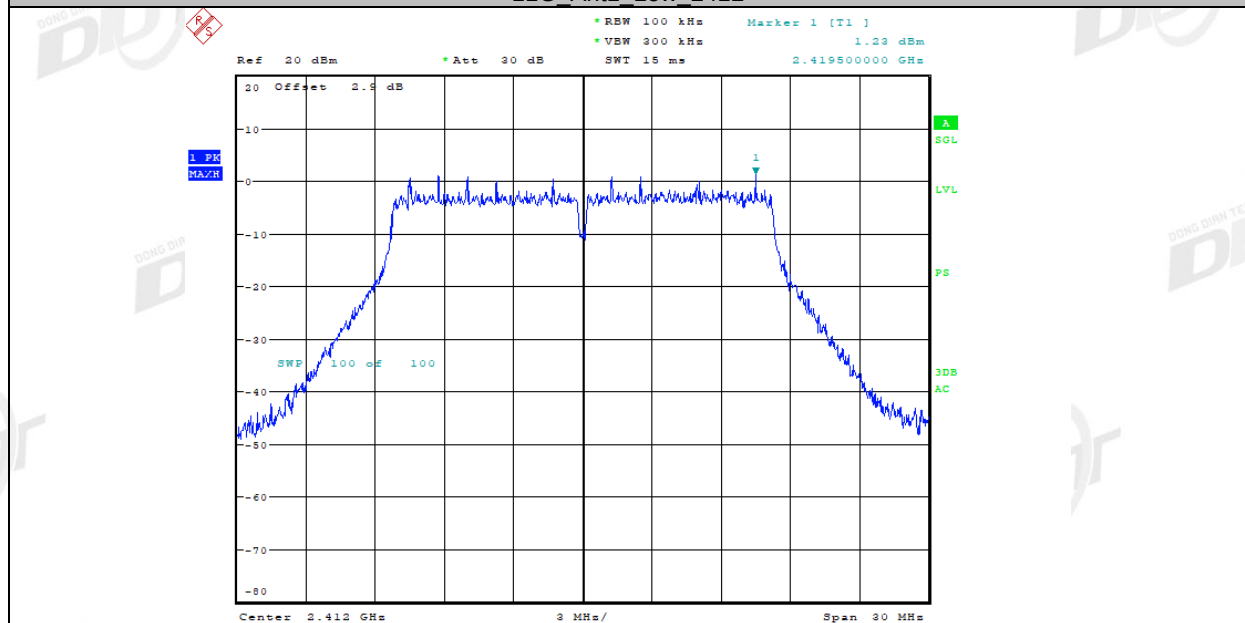


Date: 11.MAY.2021 10:33:52

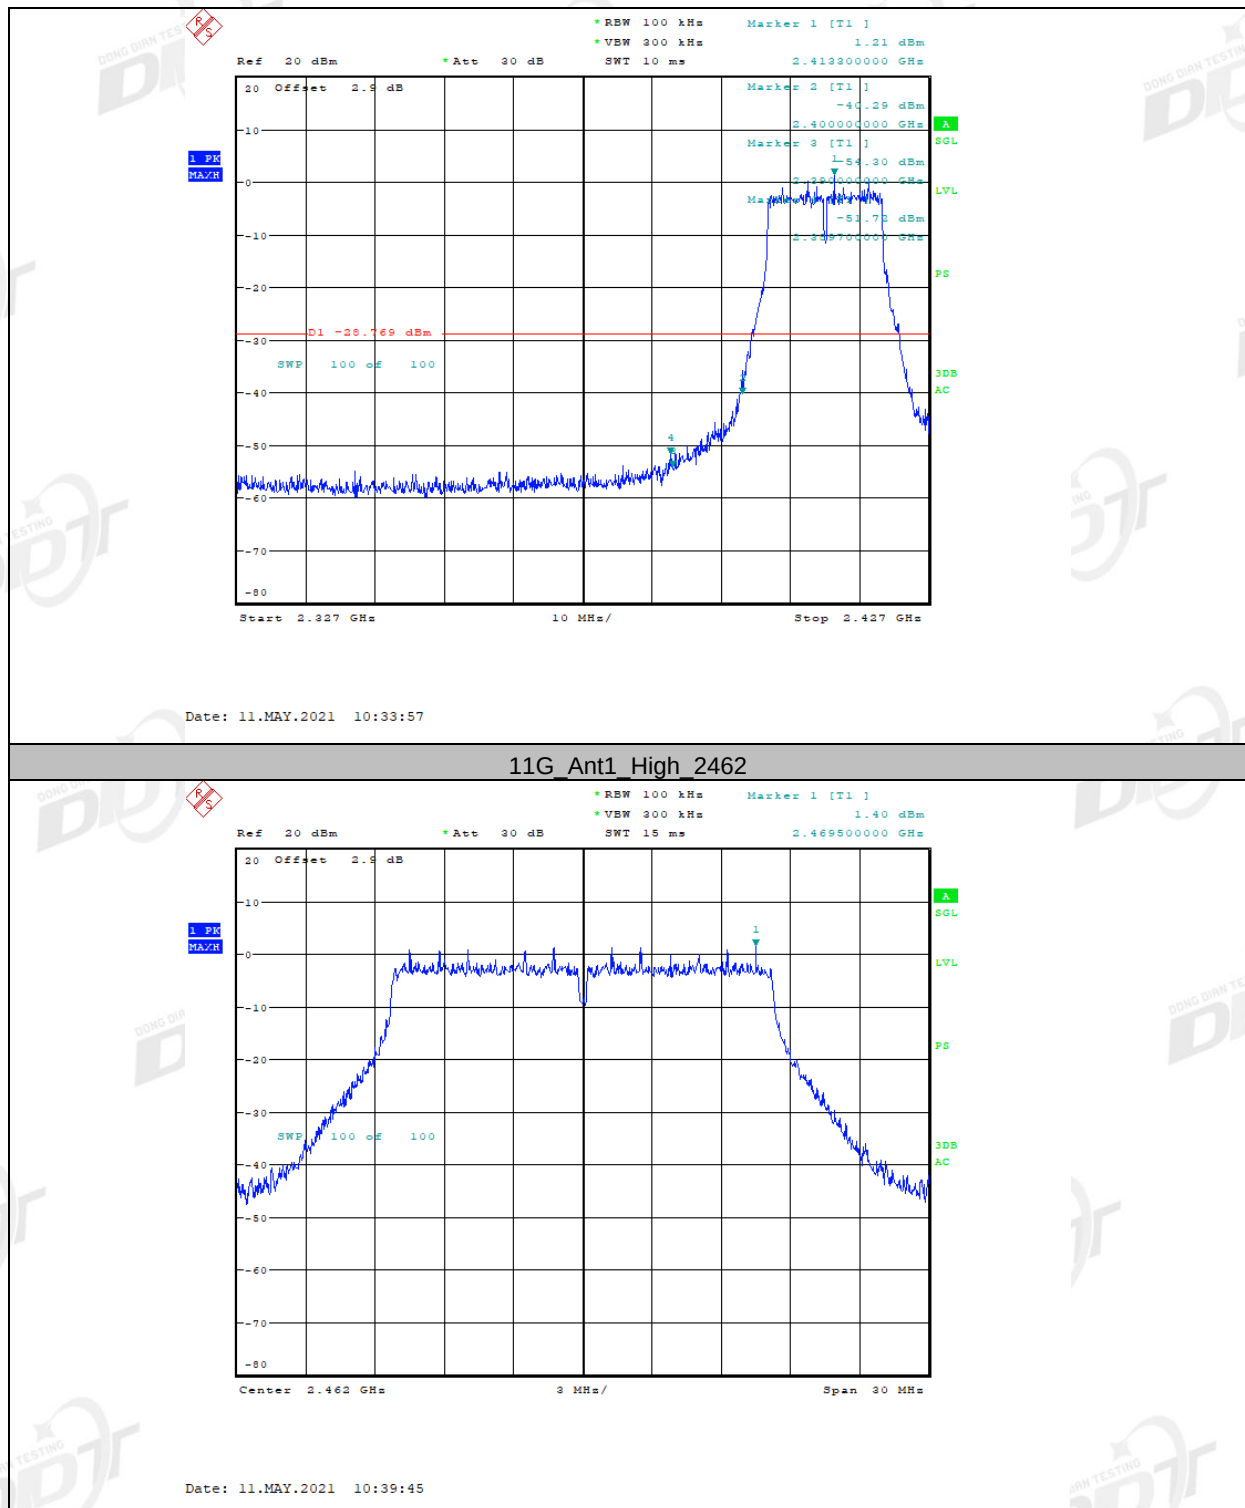

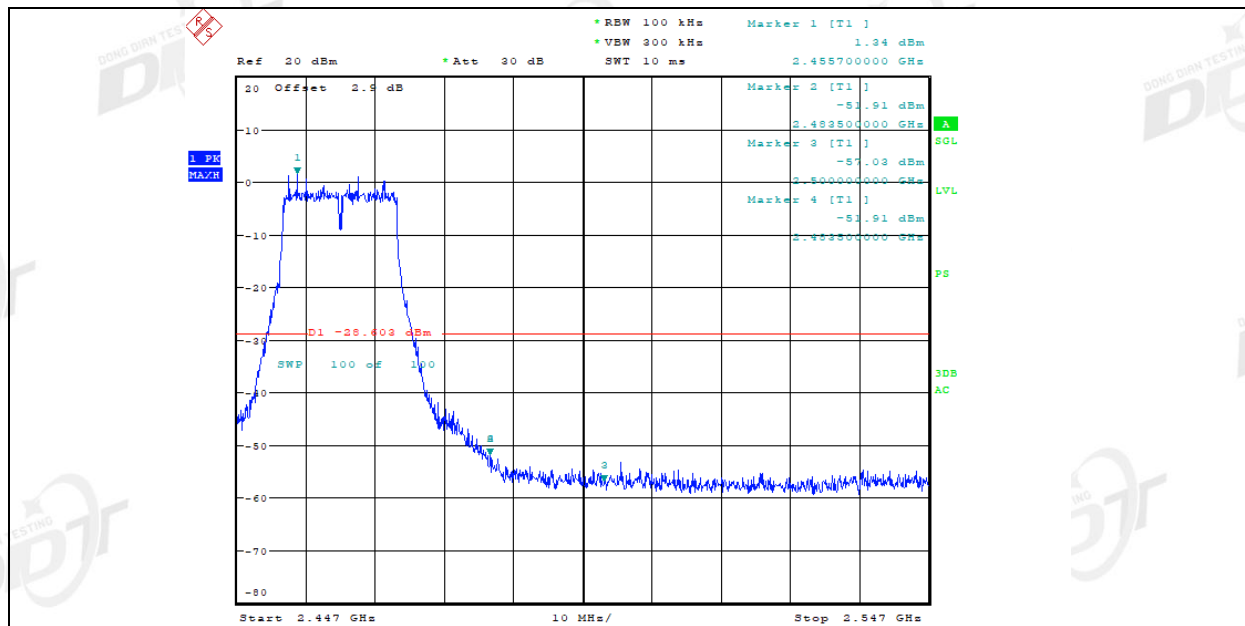


Date: 11.MAY.2021 10:39:50

11N20SISO Ant1 Low 2412

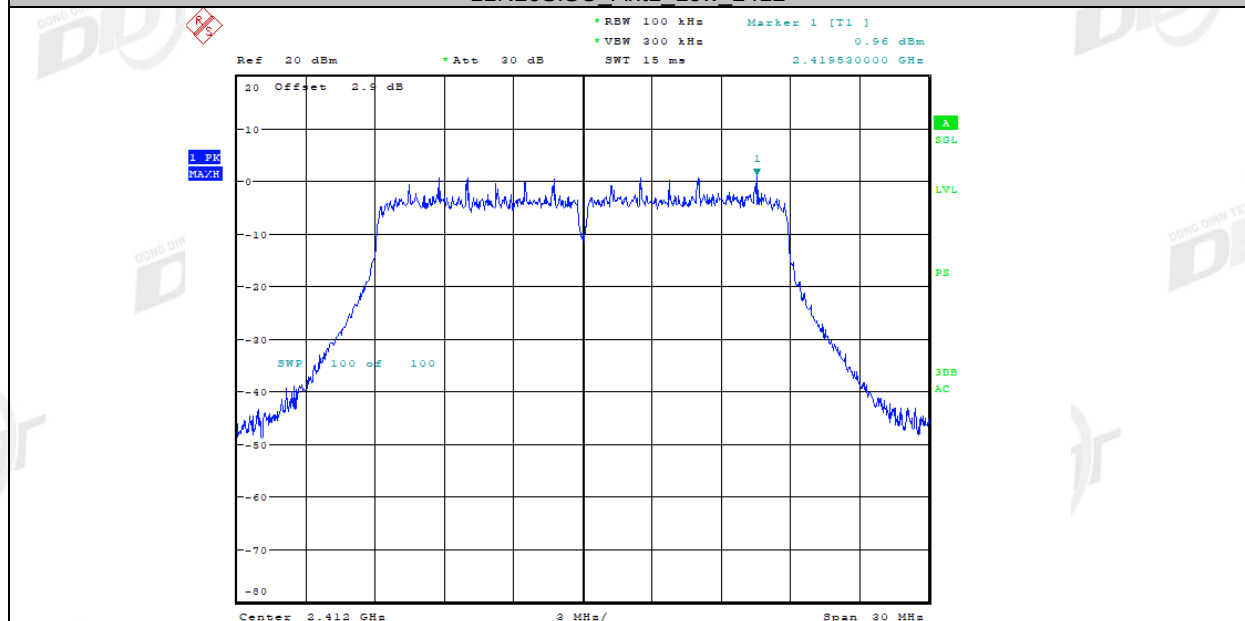


Date: 11.MAY.2021 10:43:24

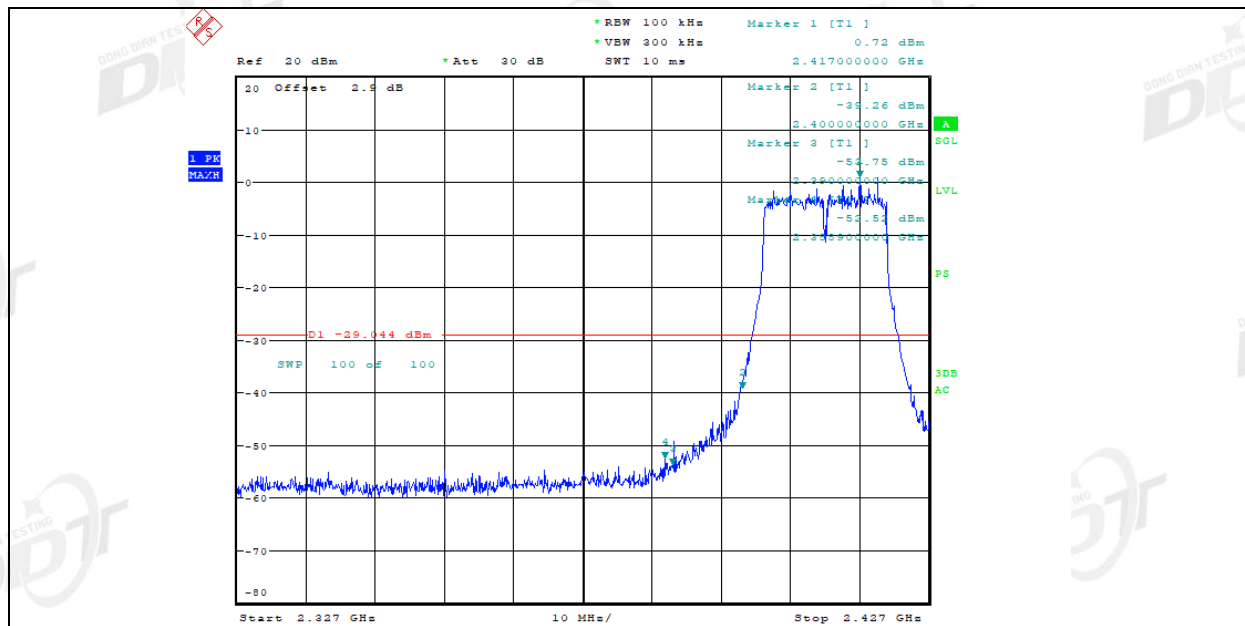


Date: 11.MAY.2021 10:43:29


11N20SISO Ant1 High 2462

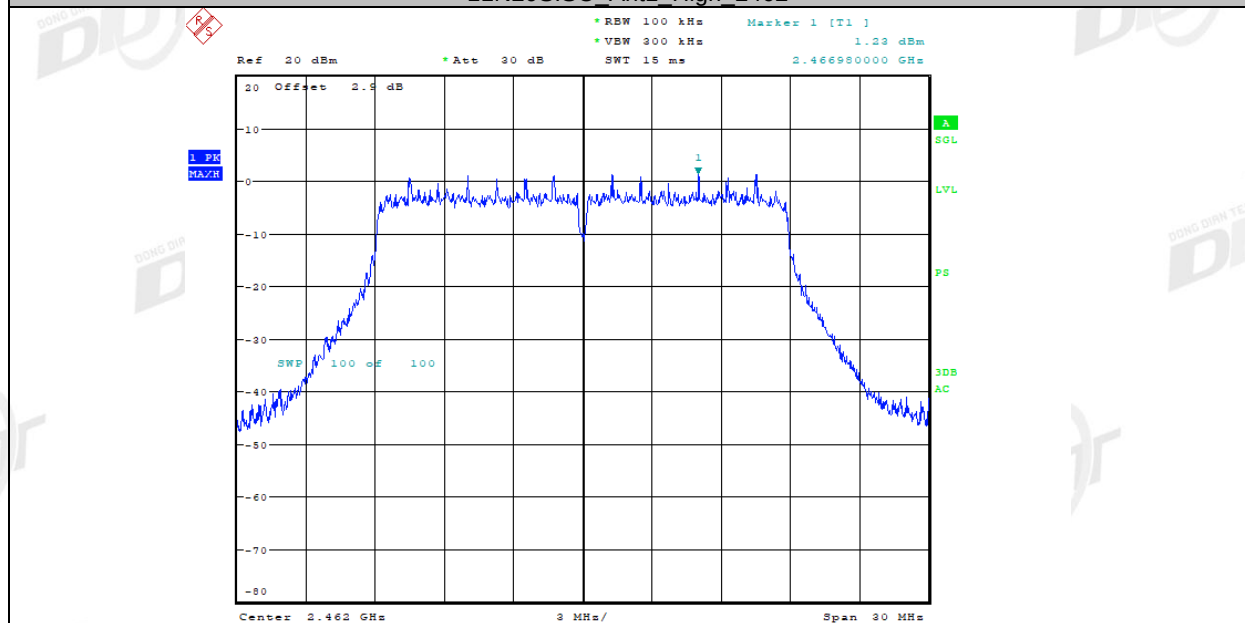



Date: 11.MAY.2021 10:49:33

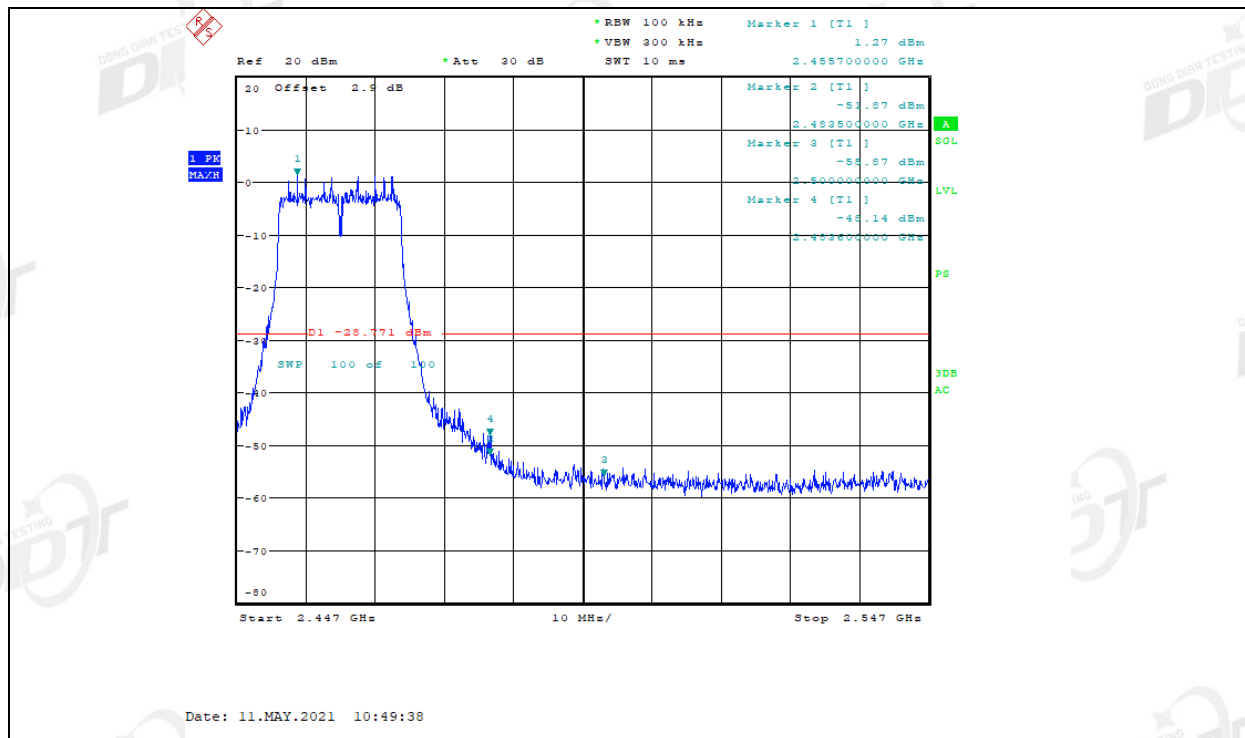


Spurious Emissions

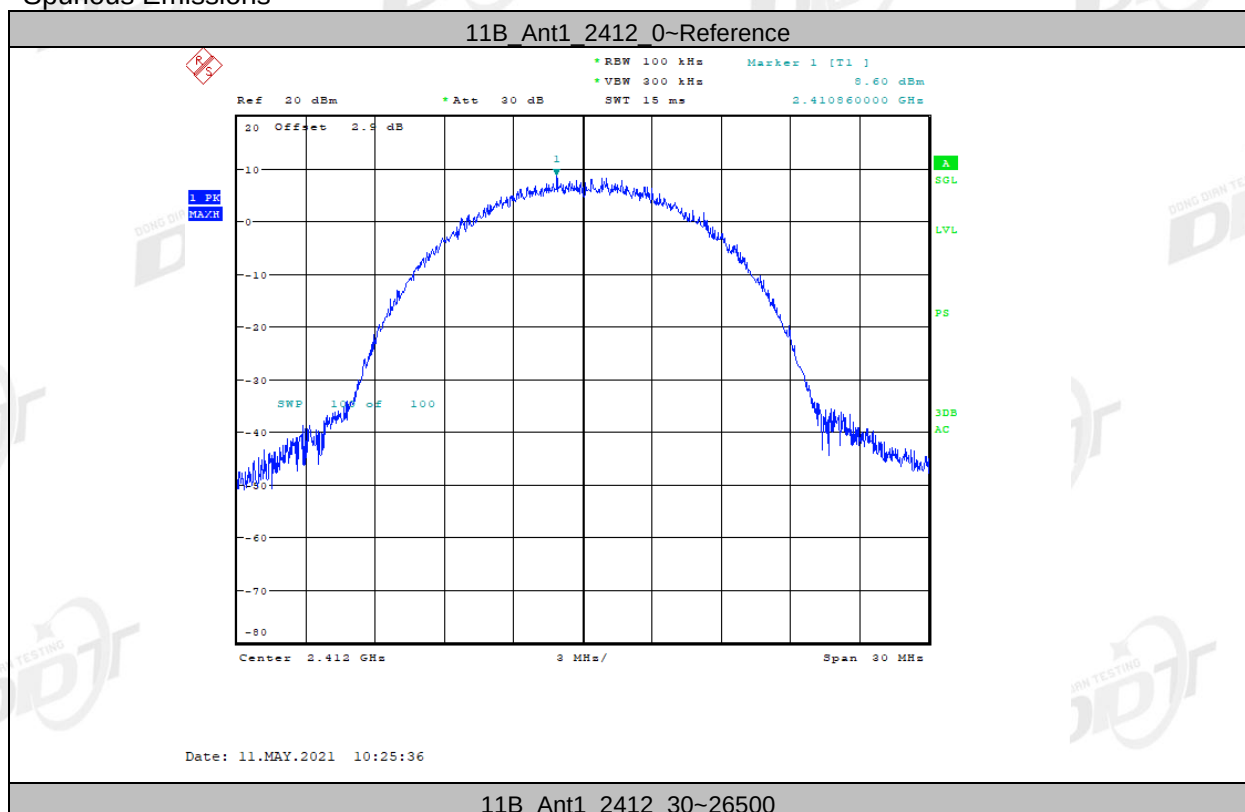

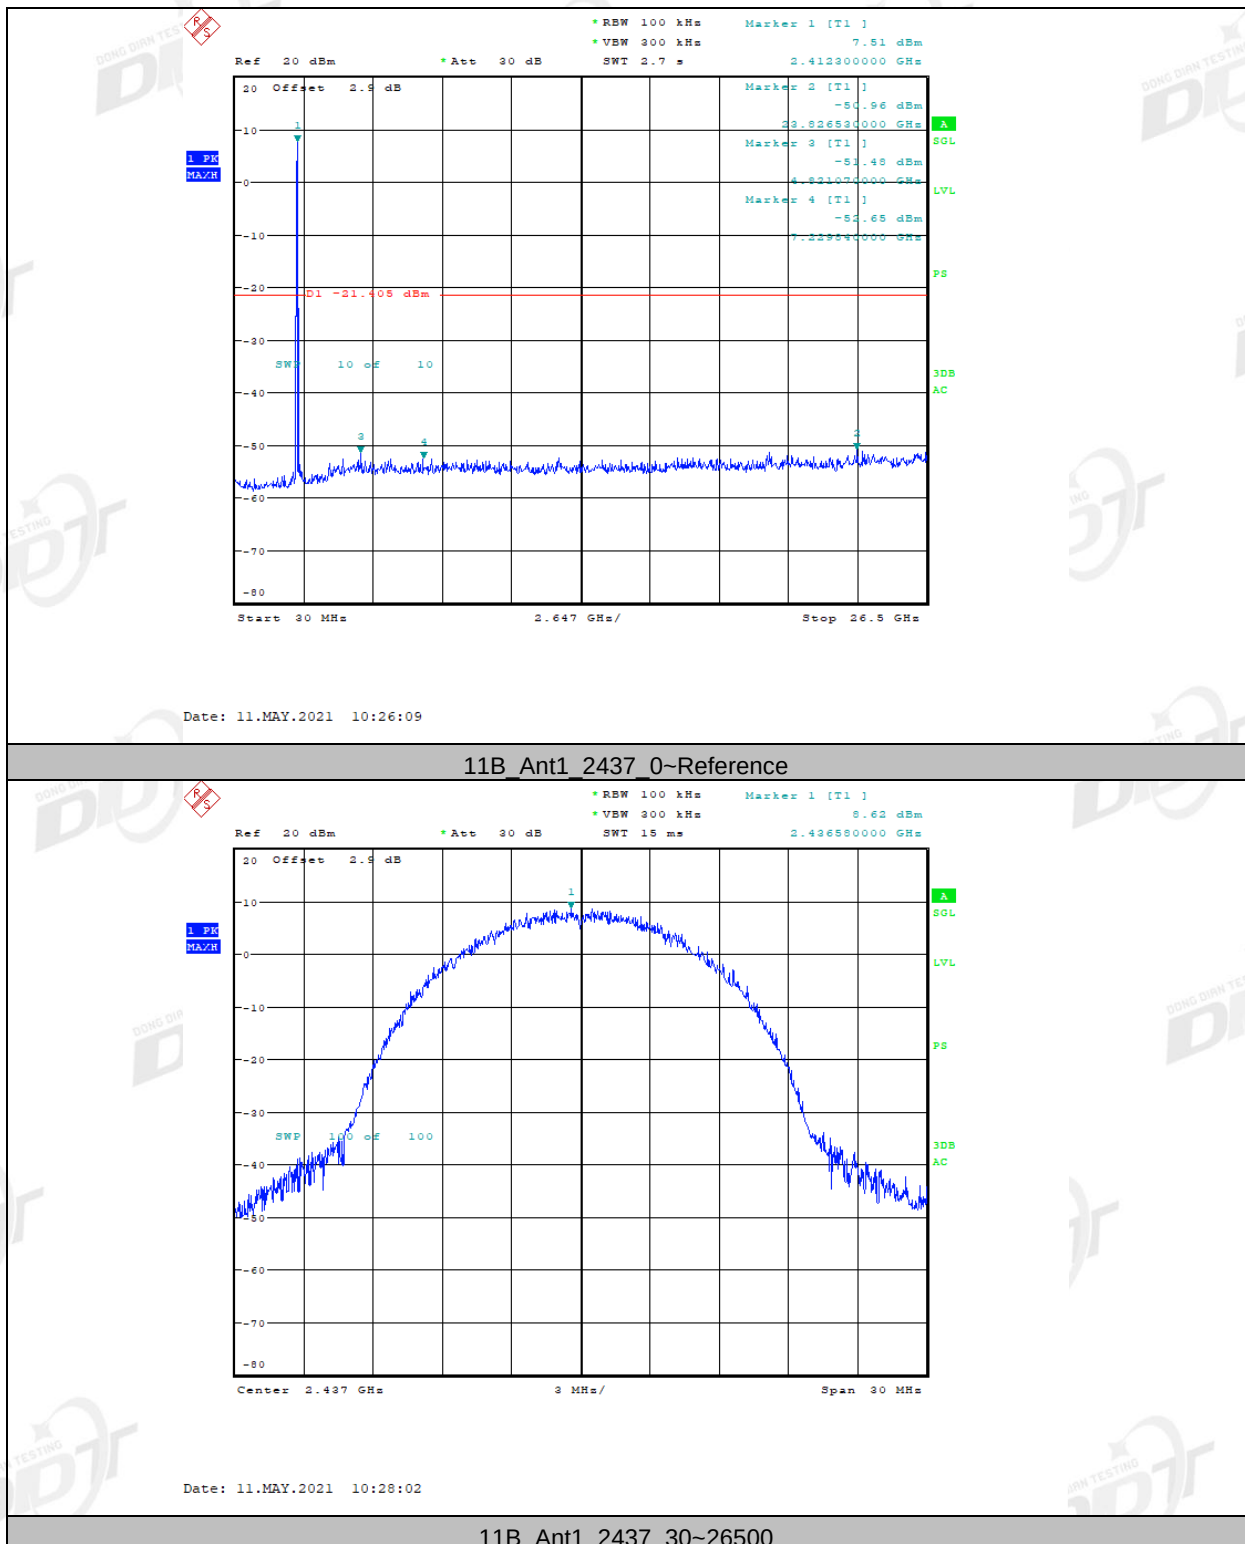


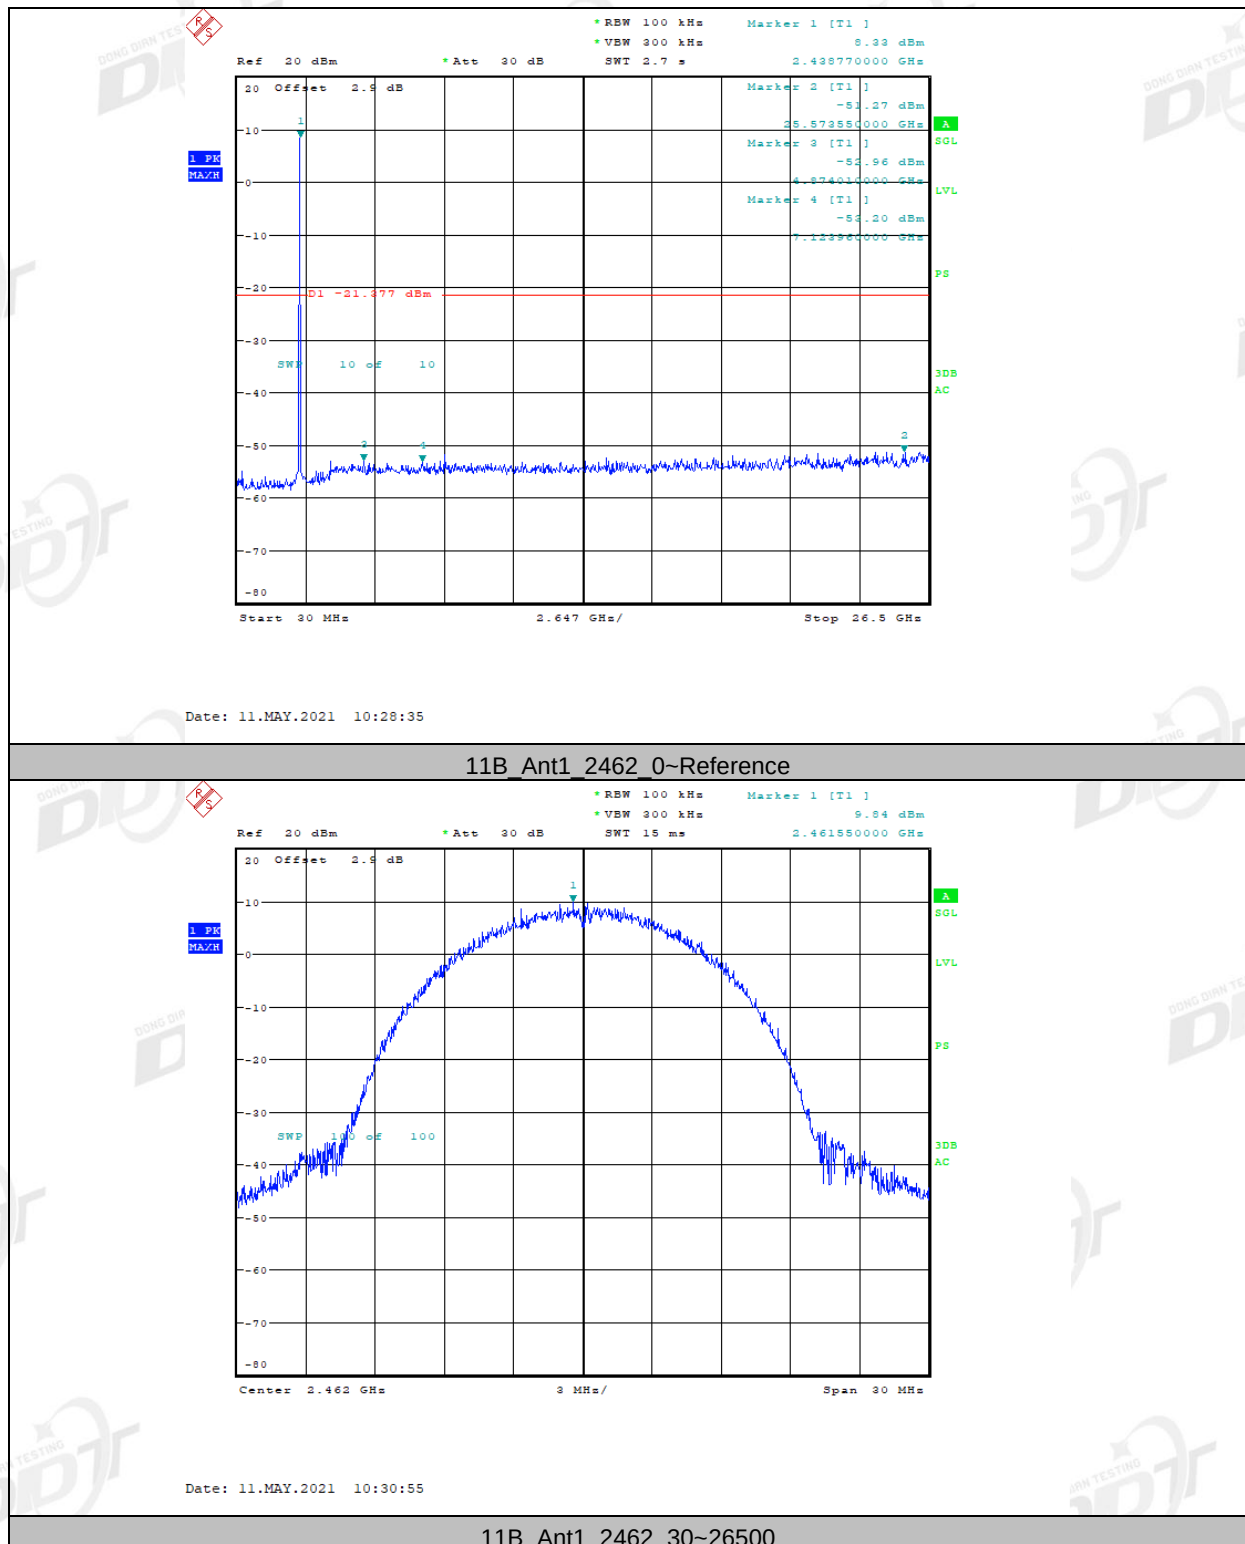

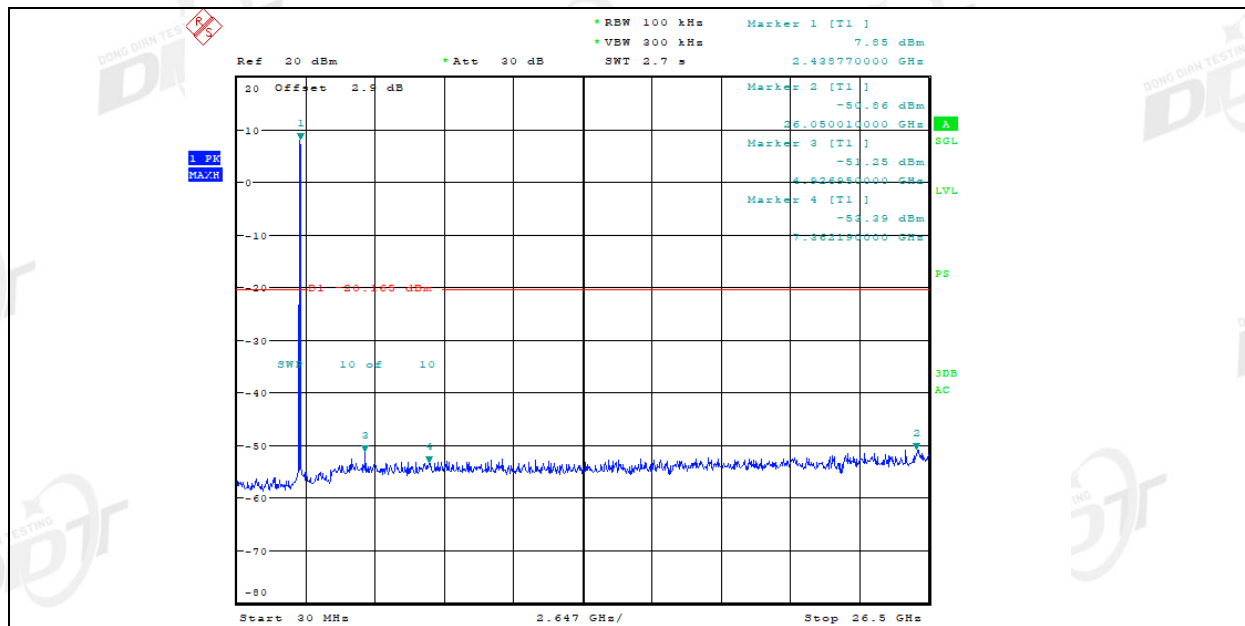


Date: 11.MAY.2021 10:31:28


11G_Ant1_2412_0~Reference

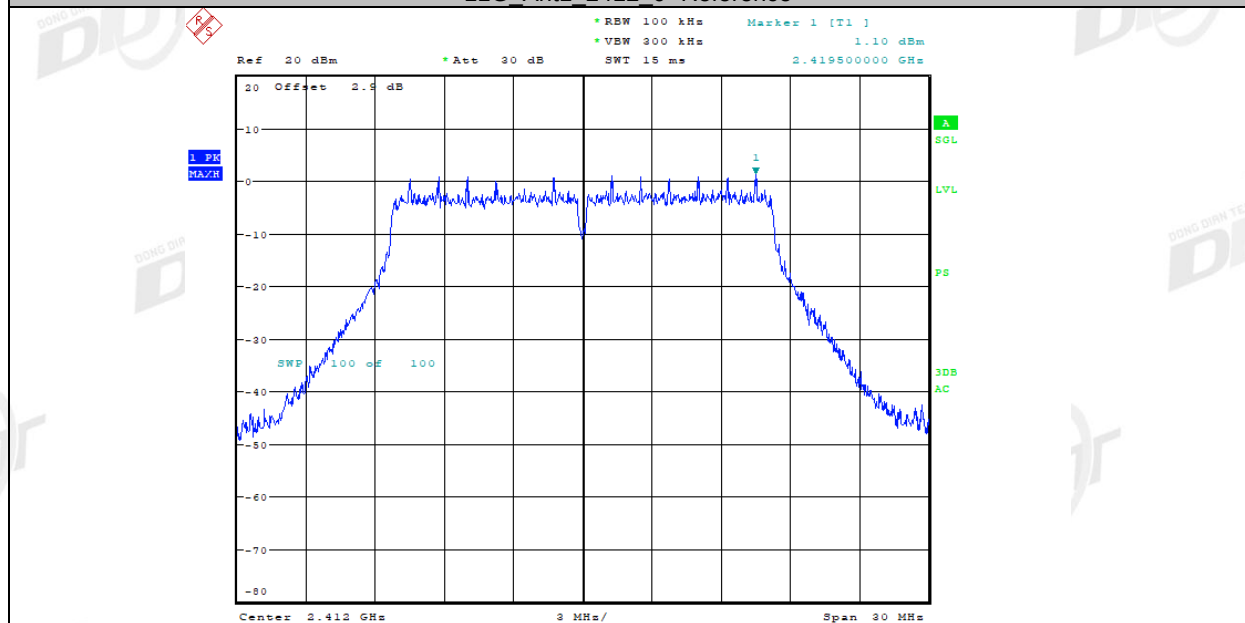



Date: 11.MAY.2021 10:34:09


11G_Ant1_2412_30~26500

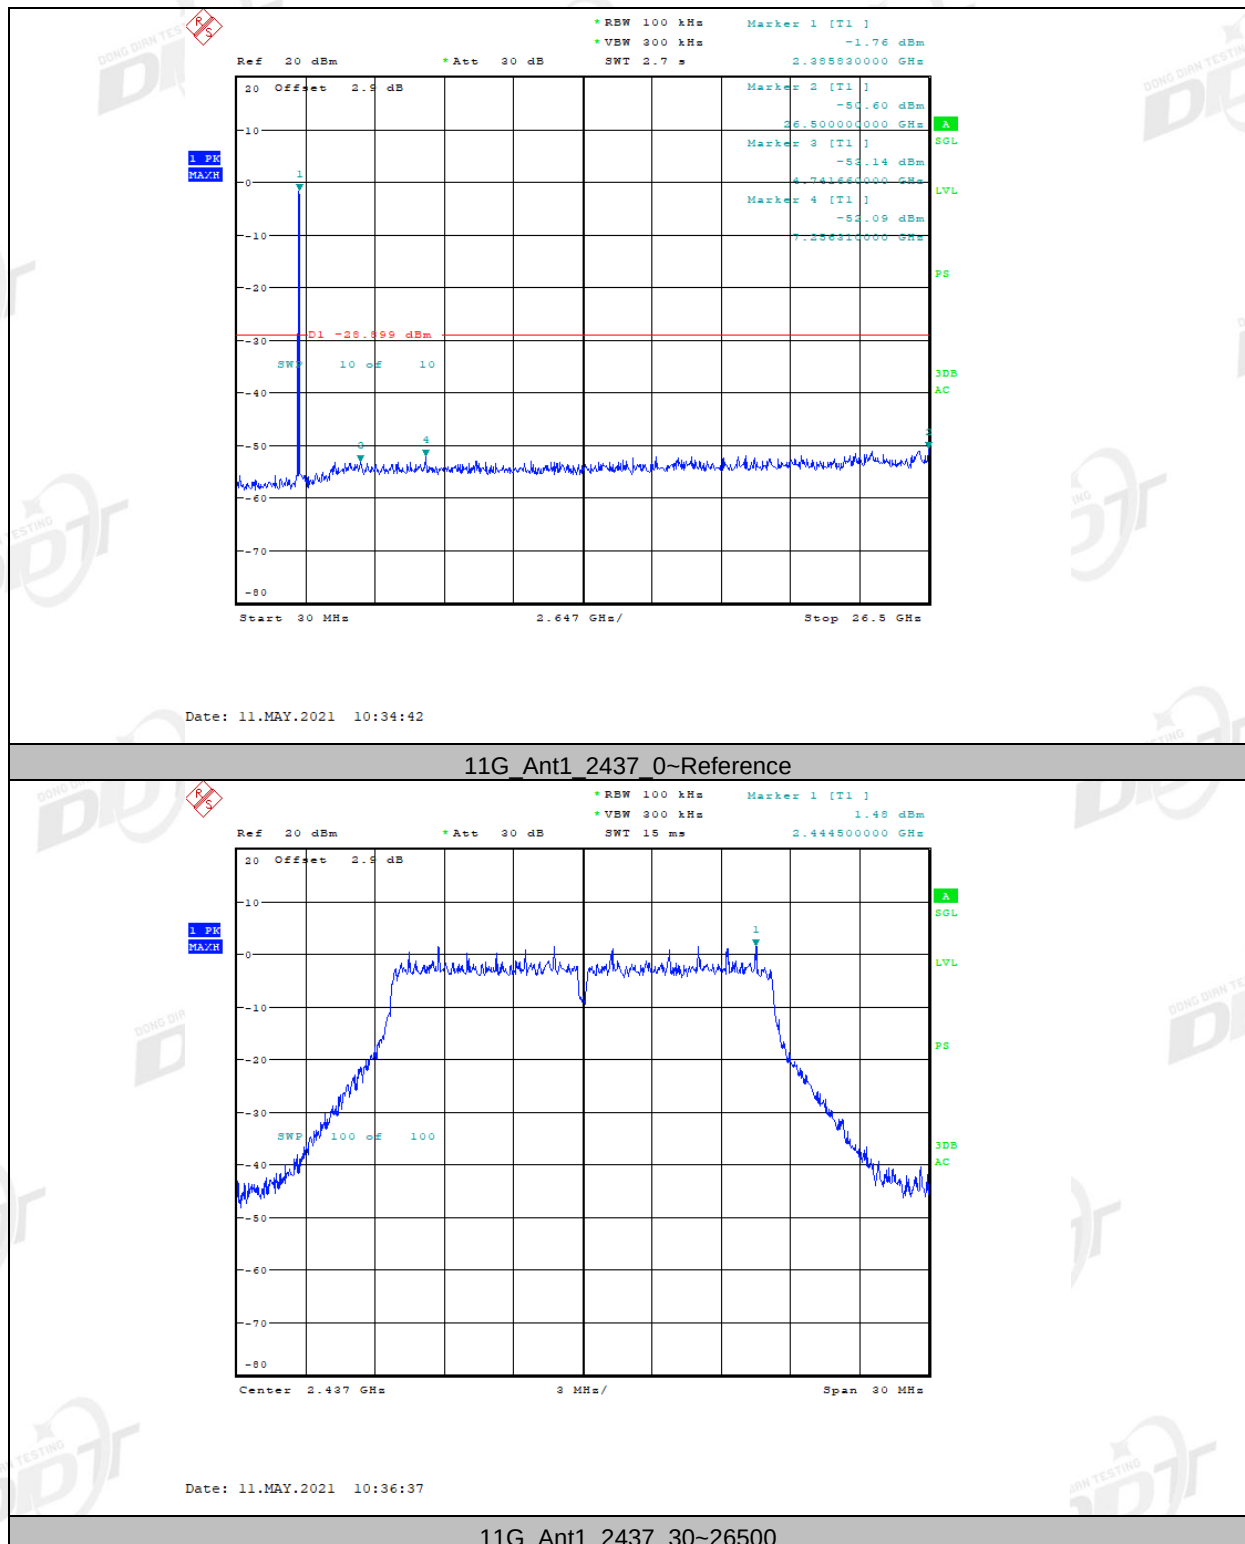


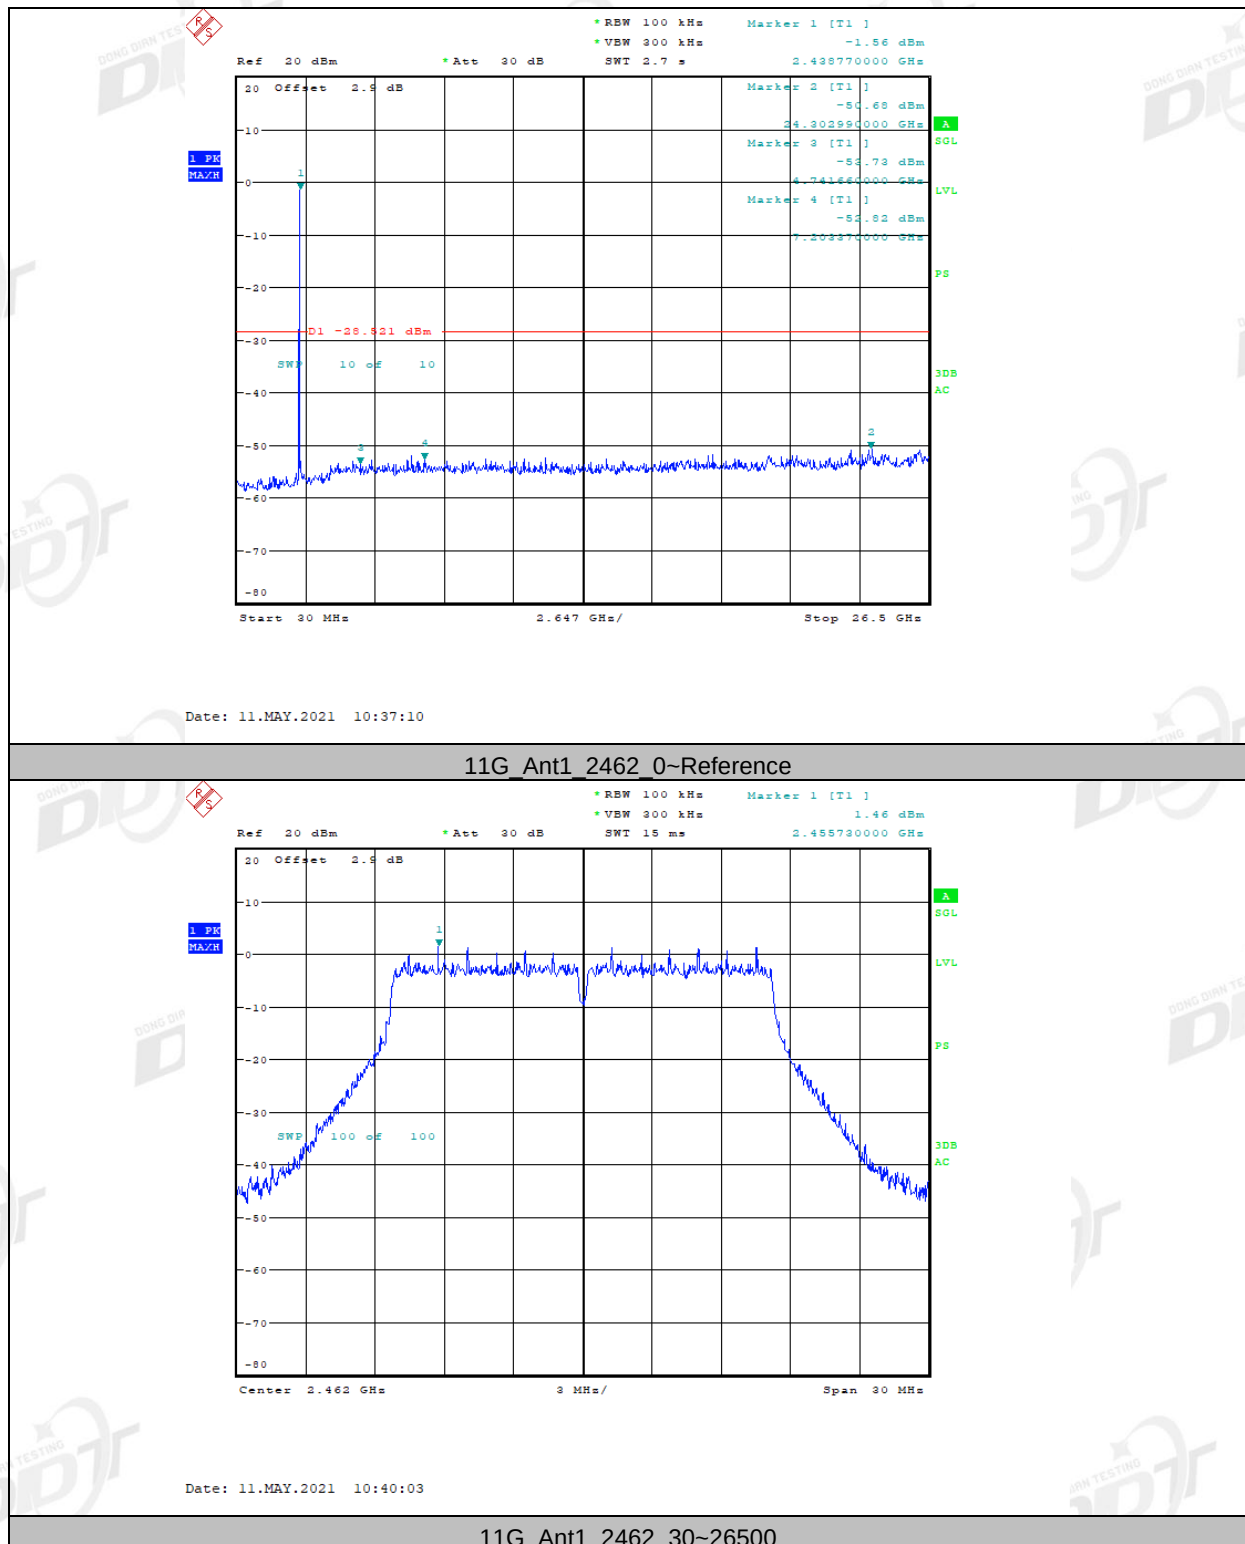

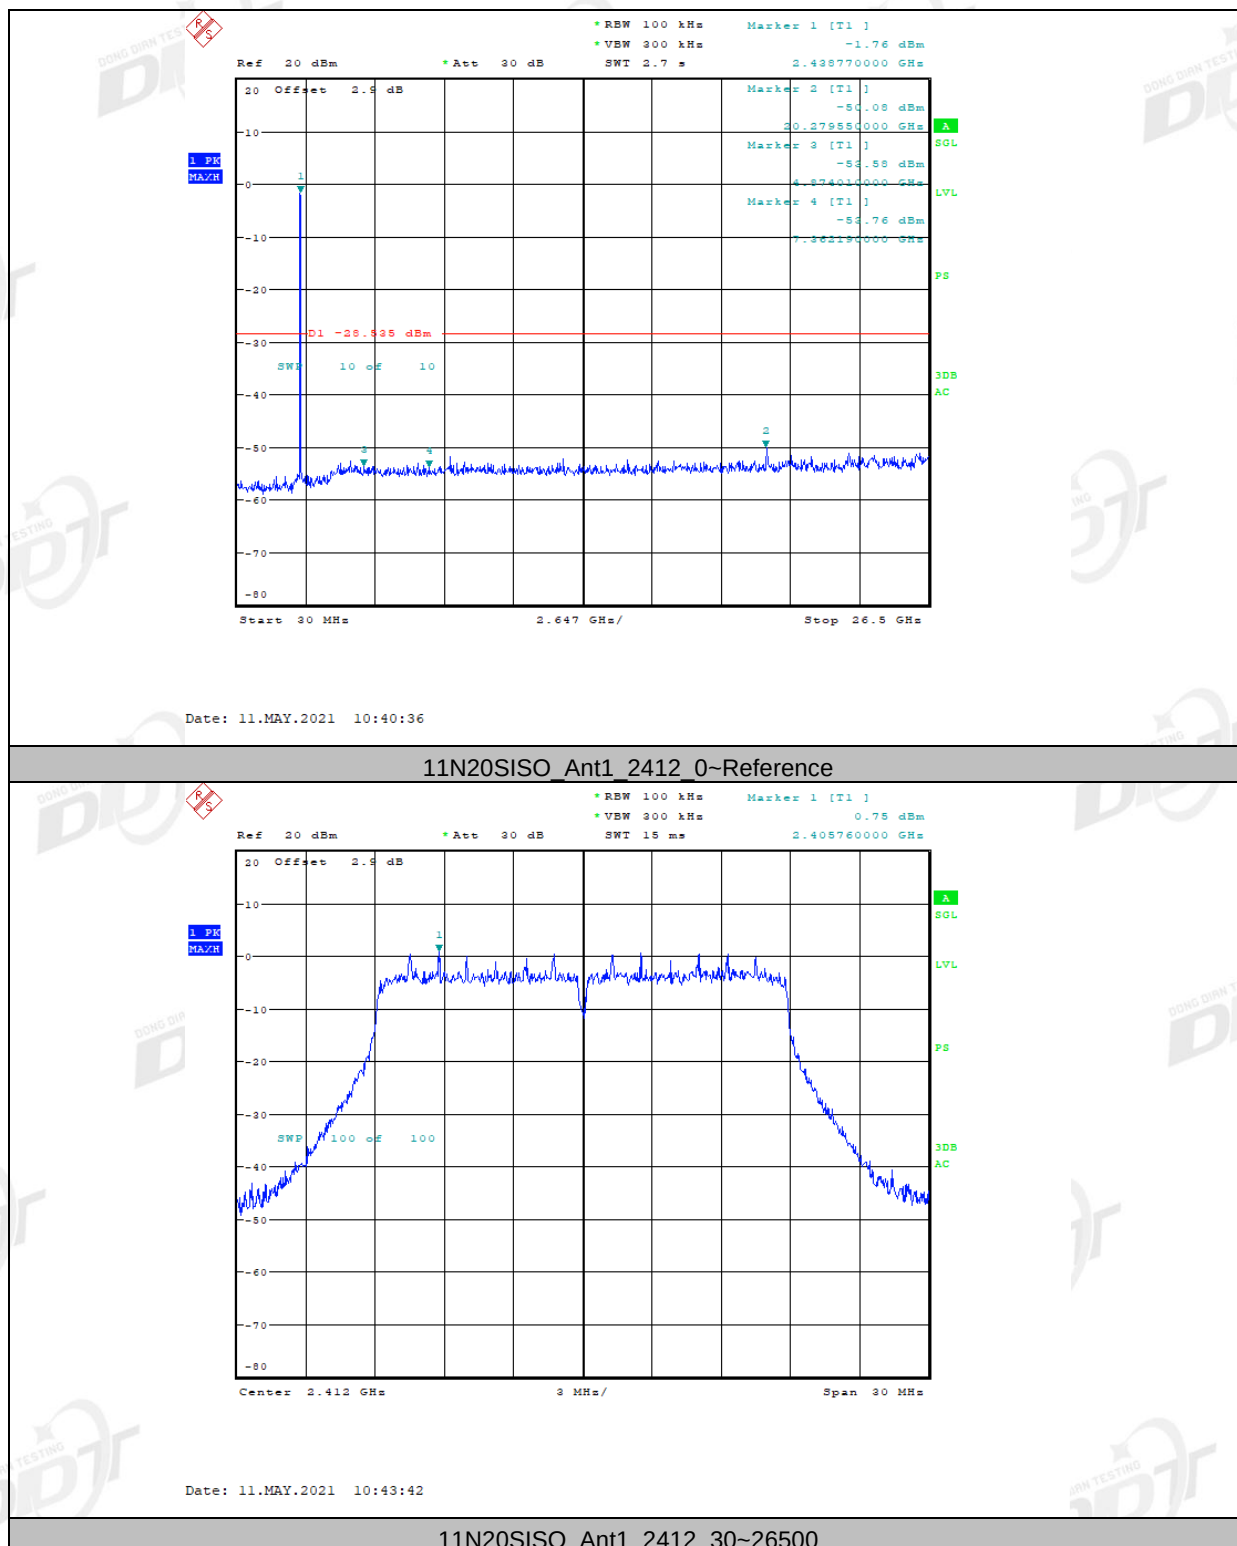

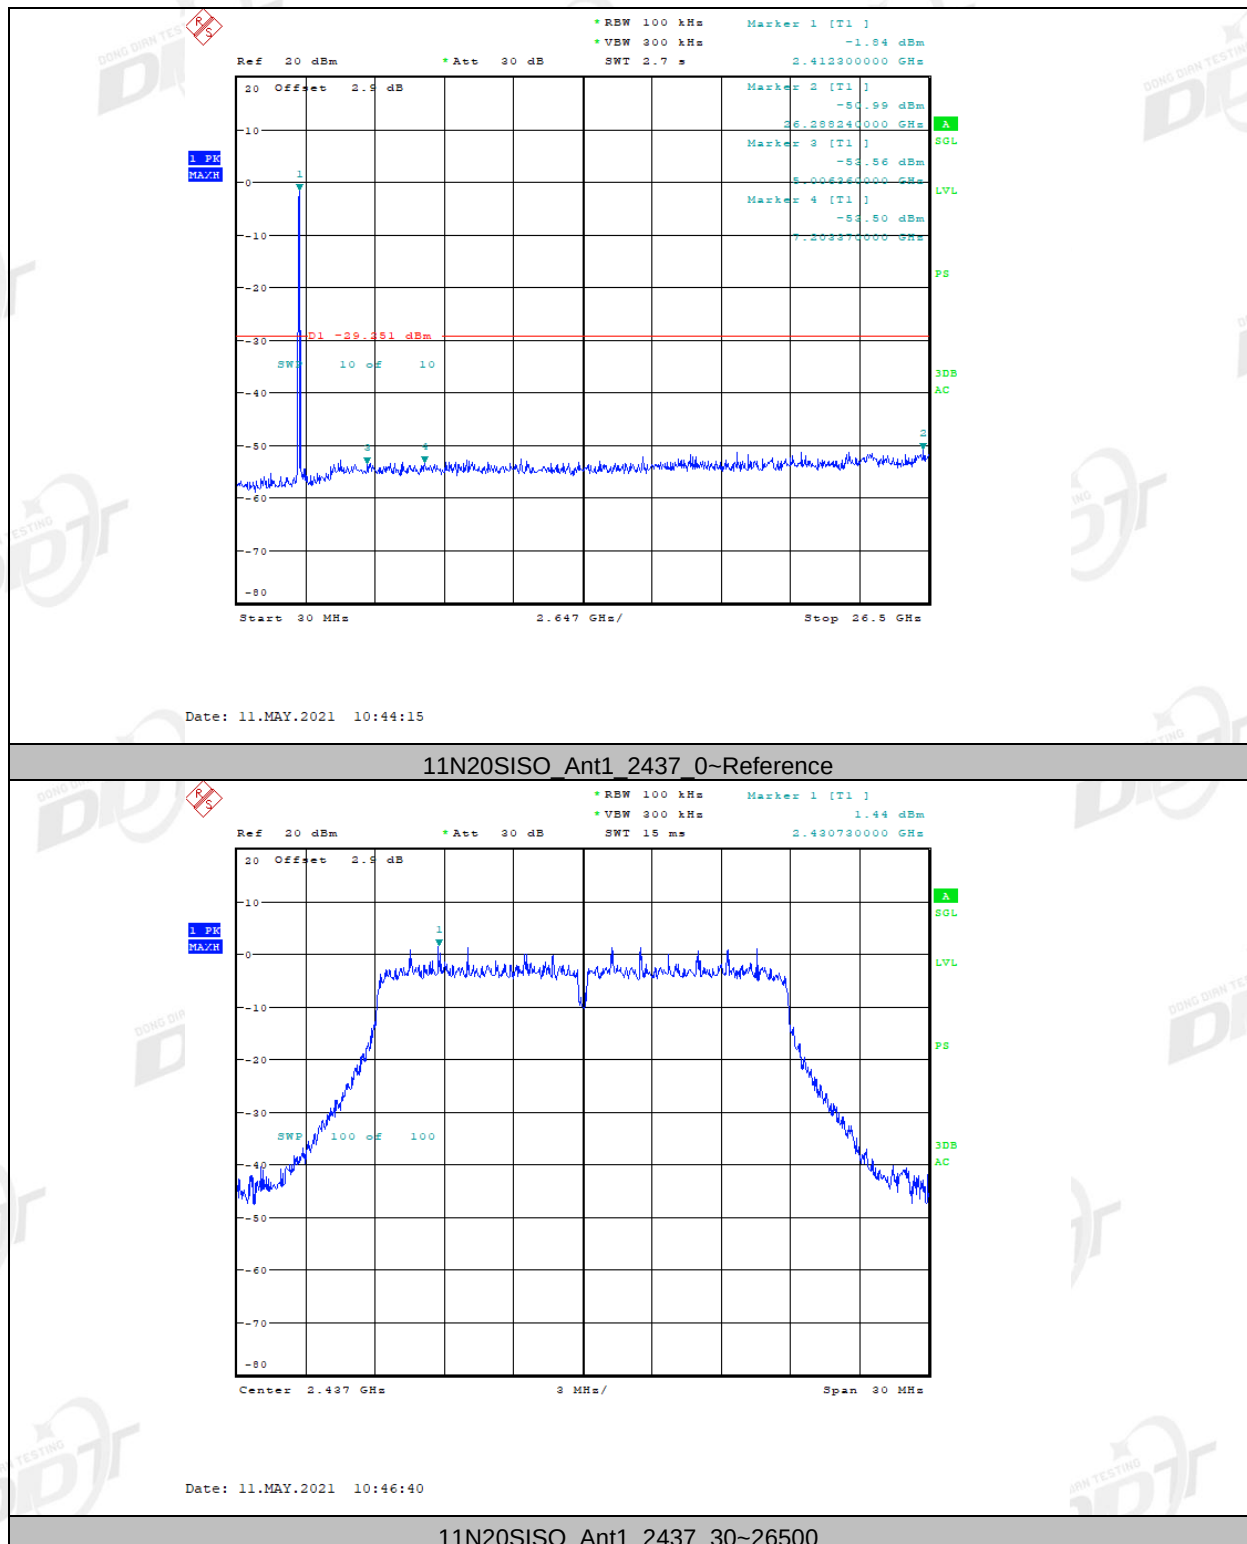

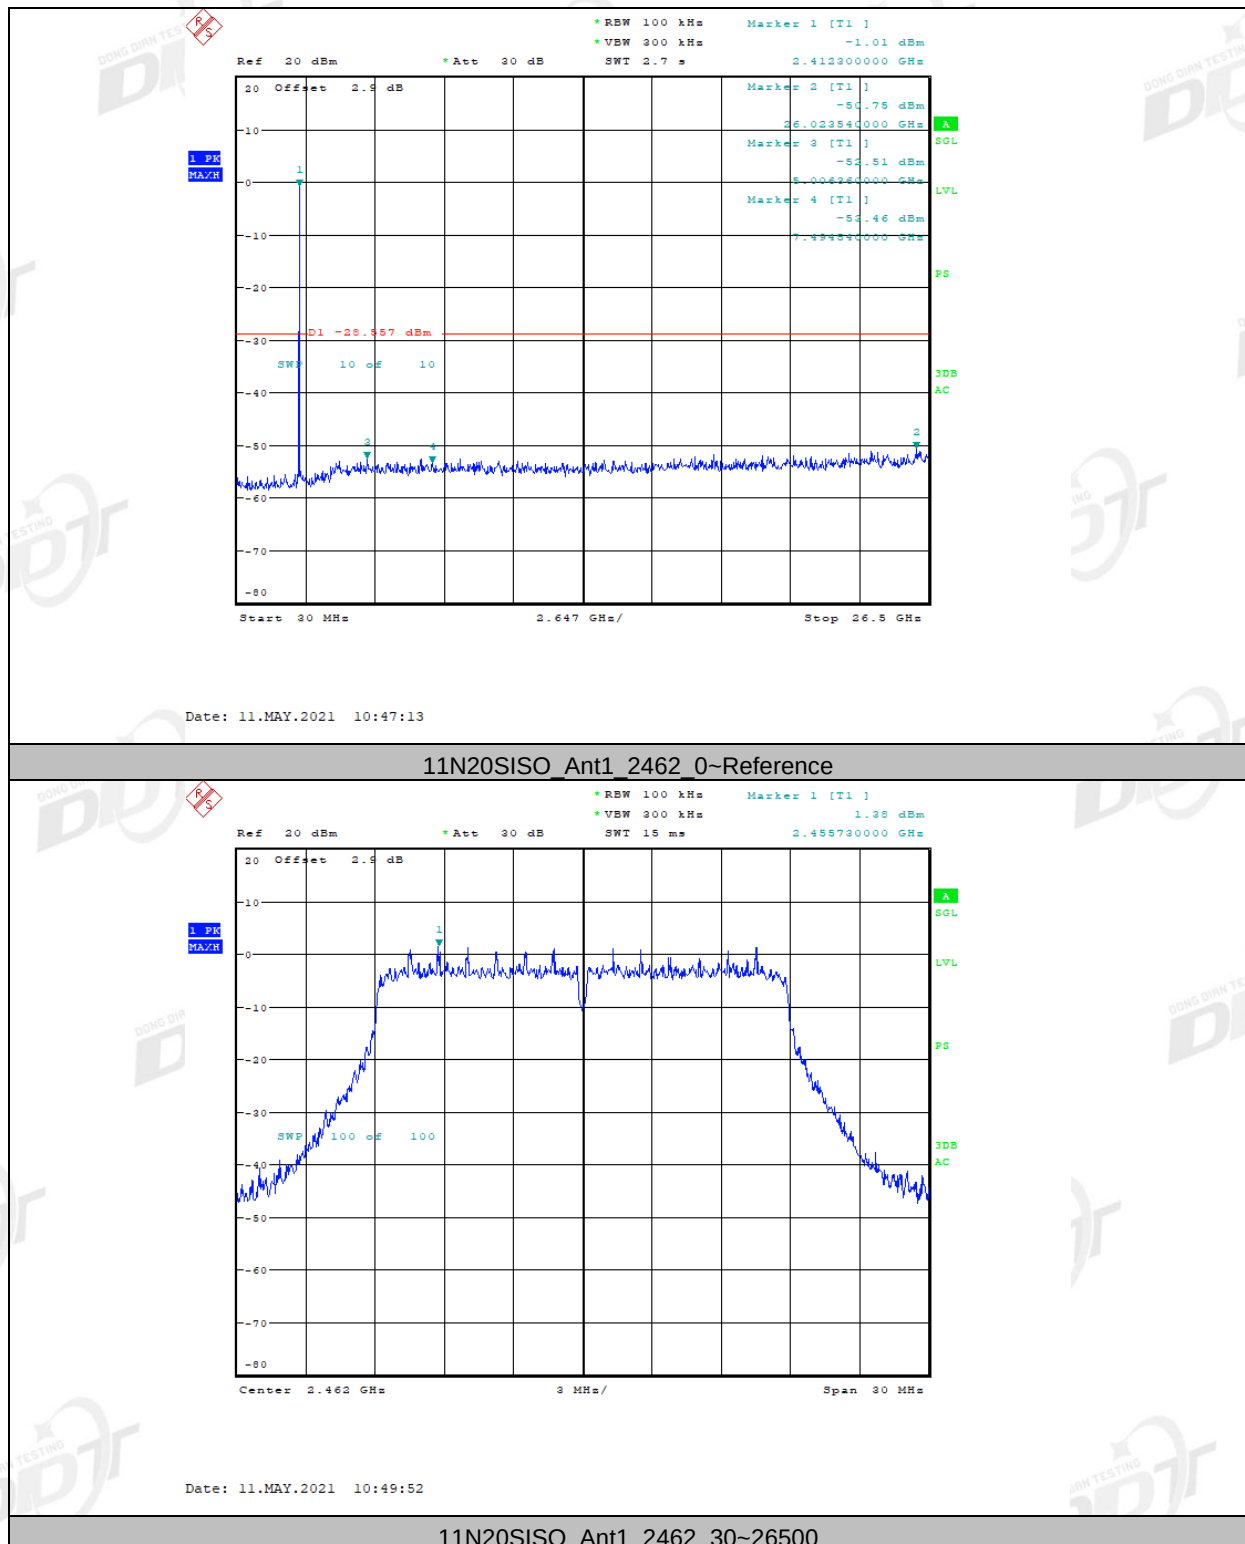


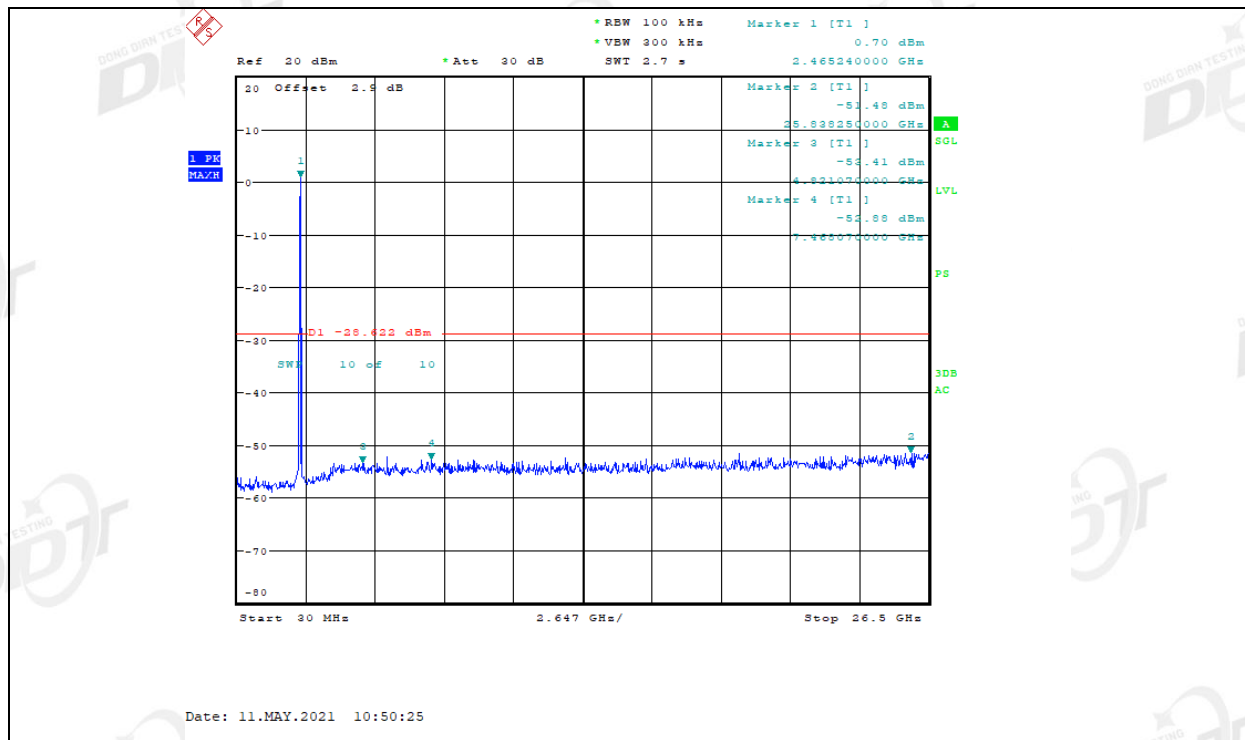


8. Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

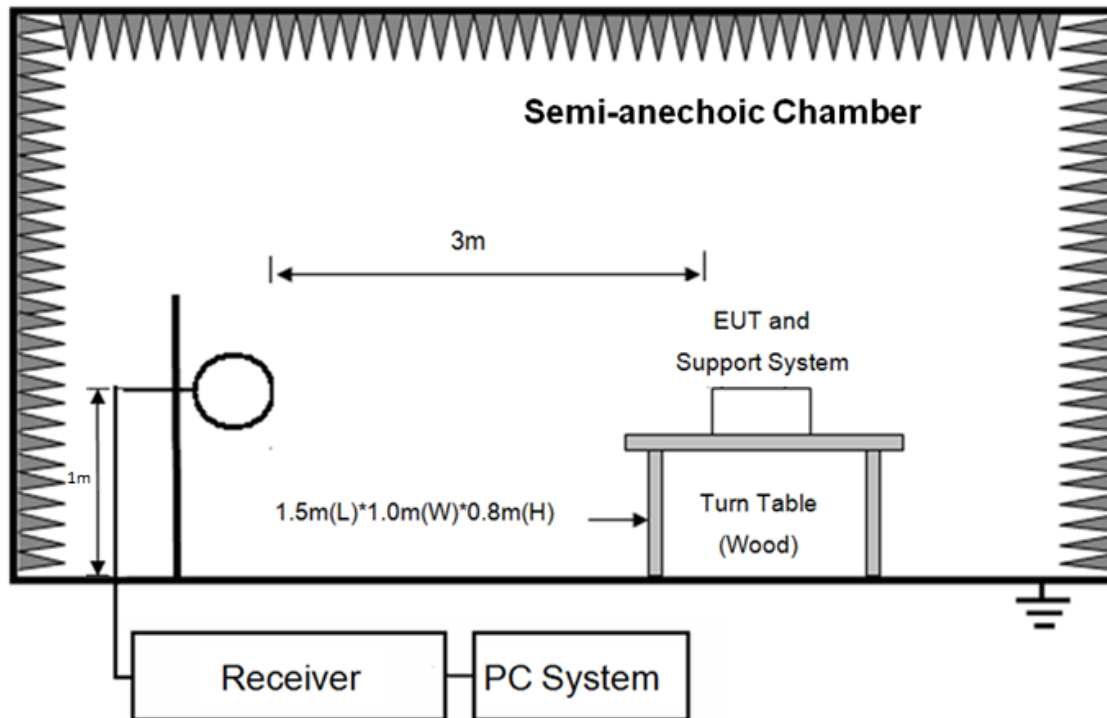

In 3 m Anechoic Chamber, test setup diagram for 30 MHz – 1 GHz:

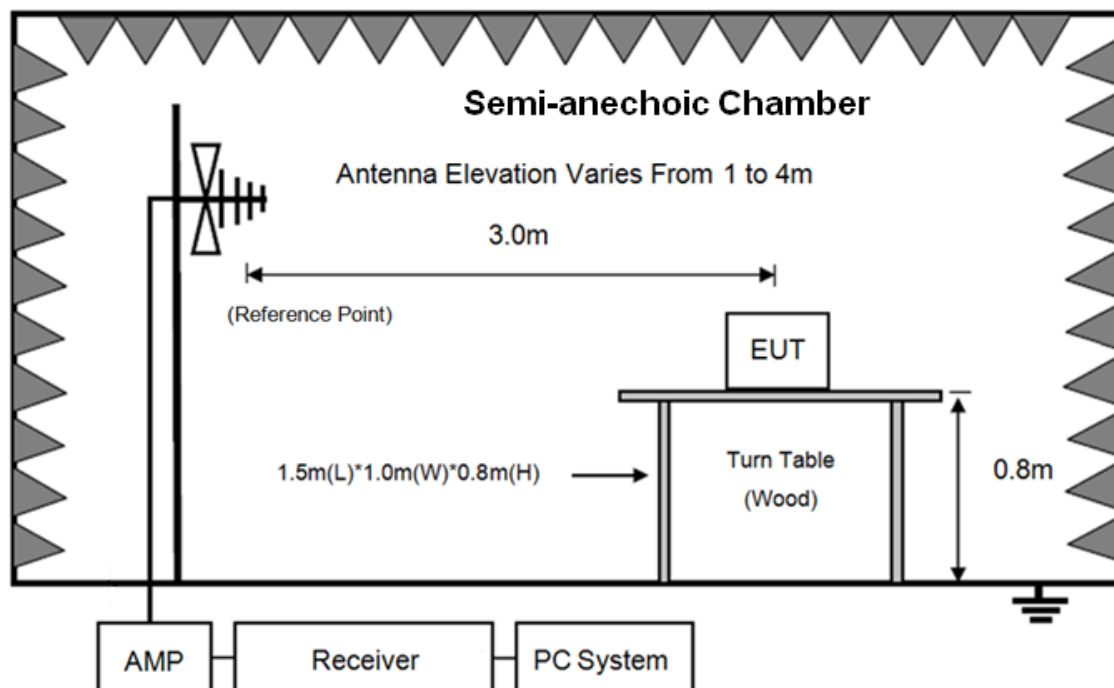

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

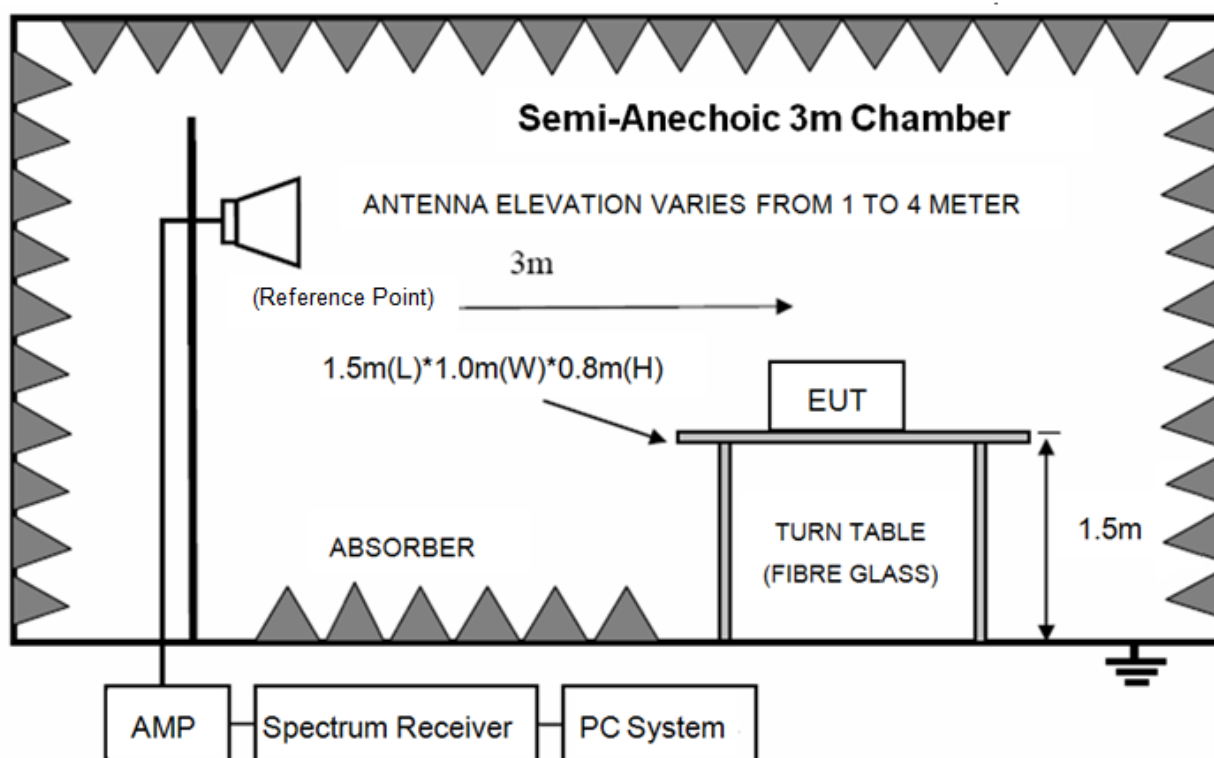

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure.

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 11b mode.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

Test Date : 2021-05-14

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3


Power Supply : DC 5V

Test Mode : WIFI mode

Condition : Temp:24.5'C,Humi:55%,Press:100.1kPa

Memo :

Data: 51

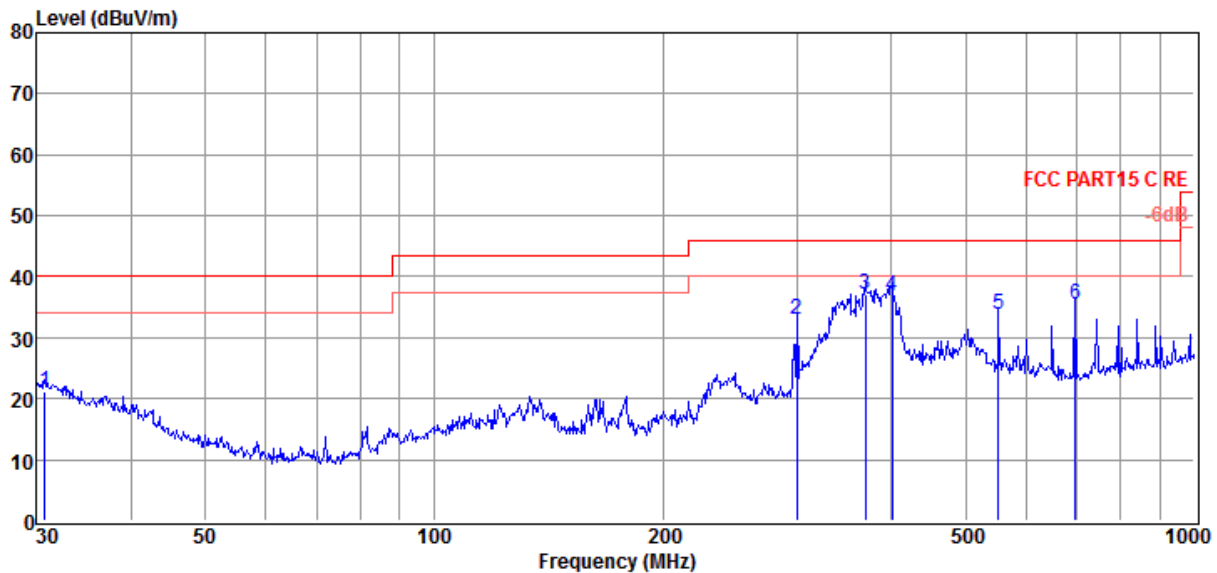

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	30.75	25.88	24.53	-29.37	21.04	40.00	-18.96	QP	HORIZONTAL
2	300.37	41.20	19.21	-27.45	32.96	46.00	-13.04	QP	HORIZONTAL
3	369.41	43.46	20.89	-27.20	37.15	46.00	-8.85	QP	HORIZONTAL
4	400.43	42.11	22.02	-27.18	36.95	46.00	-9.05	QP	HORIZONTAL
5	552.88	34.98	24.94	-26.14	33.78	46.00	-12.22	QP	HORIZONTAL
6	696.86	36.39	24.83	-25.81	35.41	46.00	-10.59	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

Test Date : 2021-05-14

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3


Power Supply : DC 5V

Test Mode : WIFI mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Memo :

Data: 52

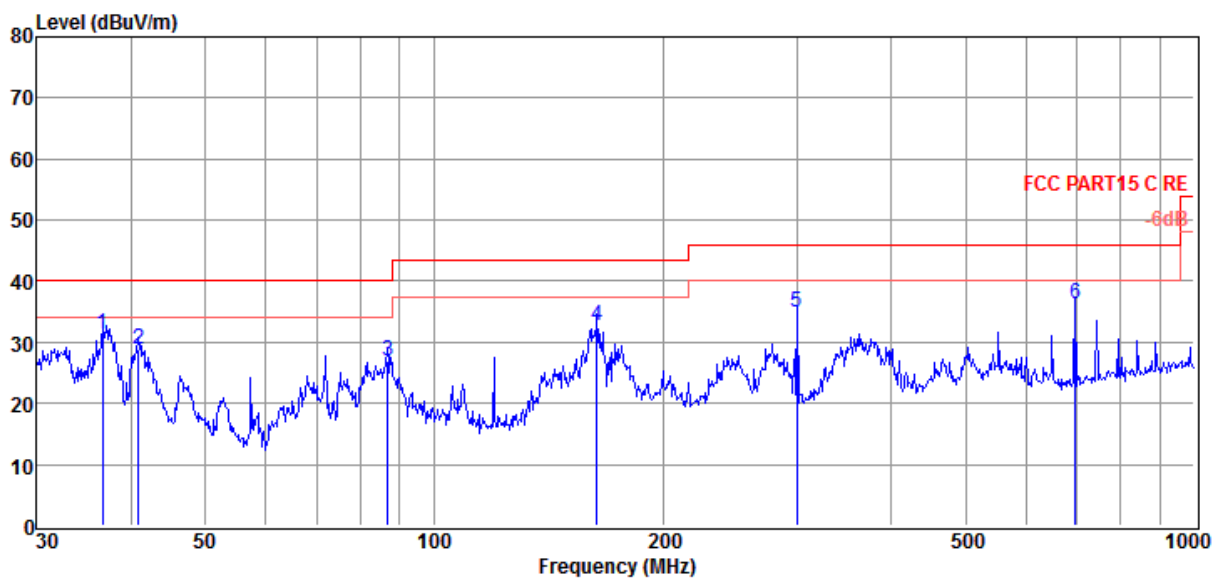

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	36.64	39.22	21.12	-29.10	31.24	40.00	-8.76	QP	VERTICAL
2	40.85	39.05	18.79	-28.95	28.89	40.00	-11.11	QP	VERTICAL
3	86.81	41.47	14.34	-28.96	26.85	40.00	-13.15	QP	VERTICAL
4	163.76	44.71	15.95	-28.06	32.60	43.50	-10.90	QP	VERTICAL
5	300.37	43.27	19.21	-27.45	35.03	46.00	-10.97	QP	VERTICAL
6	696.86	37.36	24.83	-25.81	36.38	46.00	-9.62	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11b 2412MHz									
4824.00	41.13	32.55	0.00	-31.72	41.96	54.00	-12.04	Average	HORIZONTAL
4824.00	55.71	32.55	0.00	-31.72	56.54	74.00	-17.46	Peak	HORIZONTAL
7236.00	43.99	36.98	0.00	-30.79	50.18	74.00	-23.82	Peak	HORIZONTAL
9648.00	41.52	38.09	0.00	-30.01	49.60	74.00	-24.40	Peak	HORIZONTAL
13755.00	38.80	40.91	0.00	-28.95	50.76	74.00	-23.24	Peak	HORIZONTAL
14595.00	36.11	40.38	0.00	-26.84	49.65	74.00	-24.35	Peak	HORIZONTAL
4824.00	43.07	32.55	0.00	-31.72	43.90	54.00	-10.10	Average	VERTICAL
4824.00	58.31	32.55	0.00	-31.72	59.14	74.00	-14.86	Peak	VERTICAL
7236.00	46.99	36.98	0.00	-30.79	53.18	74.00	-20.82	Peak	VERTICAL
9648.00	41.03	38.09	0.00	-30.01	49.11	74.00	-24.89	Peak	VERTICAL
11745.00	37.33	38.65	0.00	-28.63	47.35	74.00	-26.65	Peak	VERTICAL
14070.00	37.97	41.30	0.00	-28.25	51.02	74.00	-22.98	Peak	VERTICAL
11b 2437MHz									
4874.00	46.69	32.65	0.00	-31.73	47.61	54.00	-6.39	Average	HORIZONTAL
4874.00	61.23	32.65	0.00	-31.73	62.15	74.00	-11.85	Peak	HORIZONTAL
7311.00	39.30	37.10	0.00	-30.76	45.64	54.00	-8.36	Average	HORIZONTAL
7311.00	47.99	37.10	0.00	-30.76	54.33	74.00	-19.67	Peak	HORIZONTAL
9300.00	40.90	37.88	0.00	-30.21	48.57	74.00	-25.43	Peak	HORIZONTAL
11280.00	38.11	38.70	0.00	-28.55	48.26	74.00	-25.74	Peak	HORIZONTAL
4874.00	46.34	32.65	0.00	-31.73	47.26	54.00	-6.74	Average	VERTICAL
4874.00	62.36	32.65	0.00	-31.73	63.28	74.00	-10.72	Peak	VERTICAL
7311.00	41.50	37.10	0.00	-30.76	47.84	54.00	-6.16	Average	VERTICAL
7311.00	51.81	37.10	0.00	-30.76	58.15	74.00	-15.85	Peak	VERTICAL
9748.00	40.65	38.15	0.00	-30.06	48.74	74.00	-25.26	Peak	VERTICAL
14205.00	37.93	41.11	0.00	-27.10	51.94	74.00	-22.06	Peak	VERTICAL
11b 2462MHz									
4924.00	45.60	32.75	0.00	-31.68	46.67	54.00	-7.33	Average	HORIZONTAL
4924.00	65.77	32.75	0.00	-31.68	66.84	74.00	-7.16	Peak	HORIZONTAL
7386.00	39.49	37.22	0.00	-30.98	45.73	54.00	-8.27	Average	HORIZONTAL
7386.00	55.32	37.22	0.00	-30.98	61.56	74.00	-12.44	Peak	HORIZONTAL
9848.00	41.37	38.21	0.00	-30.01	49.57	74.00	-24.43	Peak	HORIZONTAL
12310.00	39.09	38.60	0.00	-29.29	48.40	74.00	-25.60	Peak	HORIZONTAL
4924.00	47.04	32.75	0.00	-31.68	48.11	54.00	-5.89	Average	VERTICAL
4924.00	66.57	32.75	0.00	-31.68	67.64	74.00	-6.36	Peak	VERTICAL
7386.00	39.24	37.22	0.00	-30.98	45.48	54.00	-8.52	Average	VERTICAL
7386.00	54.36	37.22	0.00	-30.98	60.60	74.00	-13.40	Peak	VERTICAL
9848.00	44.08	38.21	0.00	-30.01	52.28	74.00	-21.72	Peak	VERTICAL
12310.00	38.98	38.60	0.00	-29.29	48.29	74.00	-25.71	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.


2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

3. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

4. Other emissions levels are attenuated 20dB below the limit, so it does not record in the report.

9. Radiated Band Edge Compliance

9.1. Block diagram of test setup

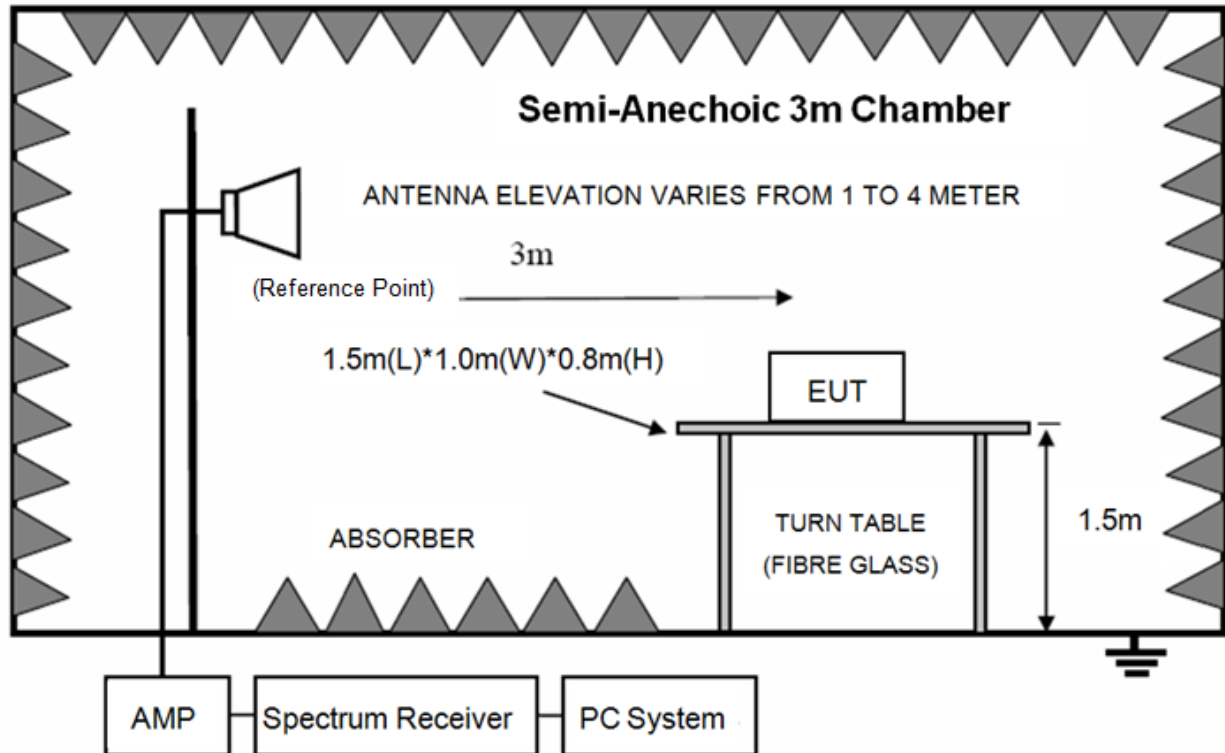

9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

9.3. Test procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2550 MHz.

Remark: All restriction band have been tested, and shown in report.

9.4. Test result

Pass. (See below detailed test result)

Note: All modes were test and record this report.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/VERTICAL

Memo : 11B 2412MHz

Data: 2

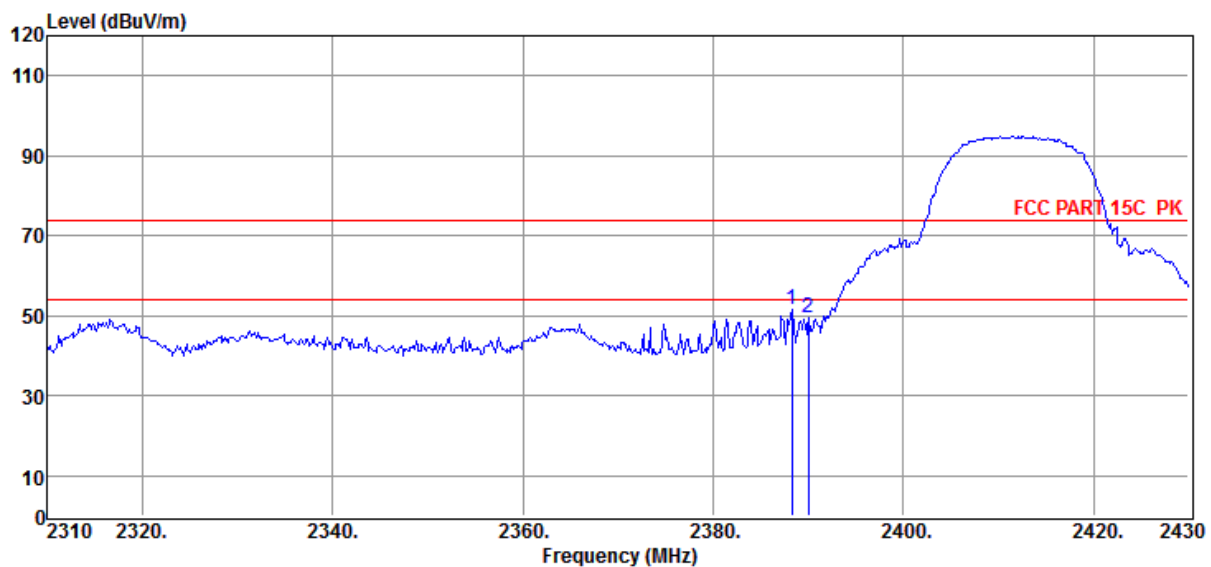

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.24	57.70	28.06	0.00	-34.01	51.75	74.00	-22.25	Peak	VERTICAL
2	2390.00	55.37	28.05	0.00	-34.02	49.40	74.00	-24.60	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/HORIZONTAL

Memo : 11B 2412MHz

Data: 3

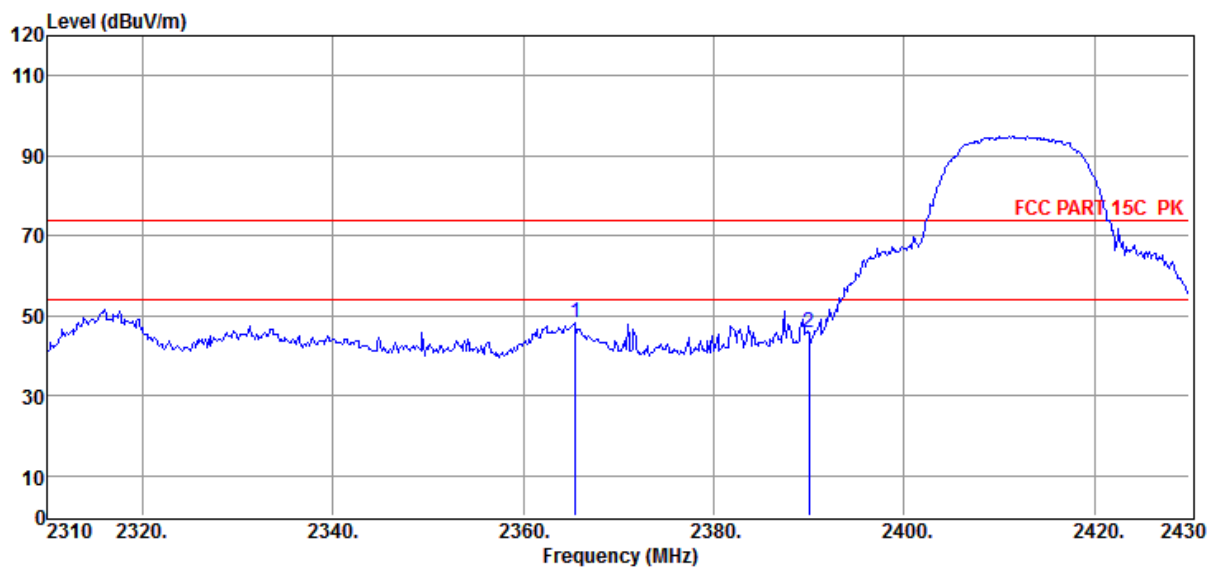

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2365.44	54.05	28.09	0.00	-33.98	48.16	74.00	-25.84	Peak	HORIZONTAL
2	2390.00	51.77	28.05	0.00	-34.02	45.80	74.00	-28.20	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/HORIZONTAL

Memo : 11B 2462MHz

Data: 4

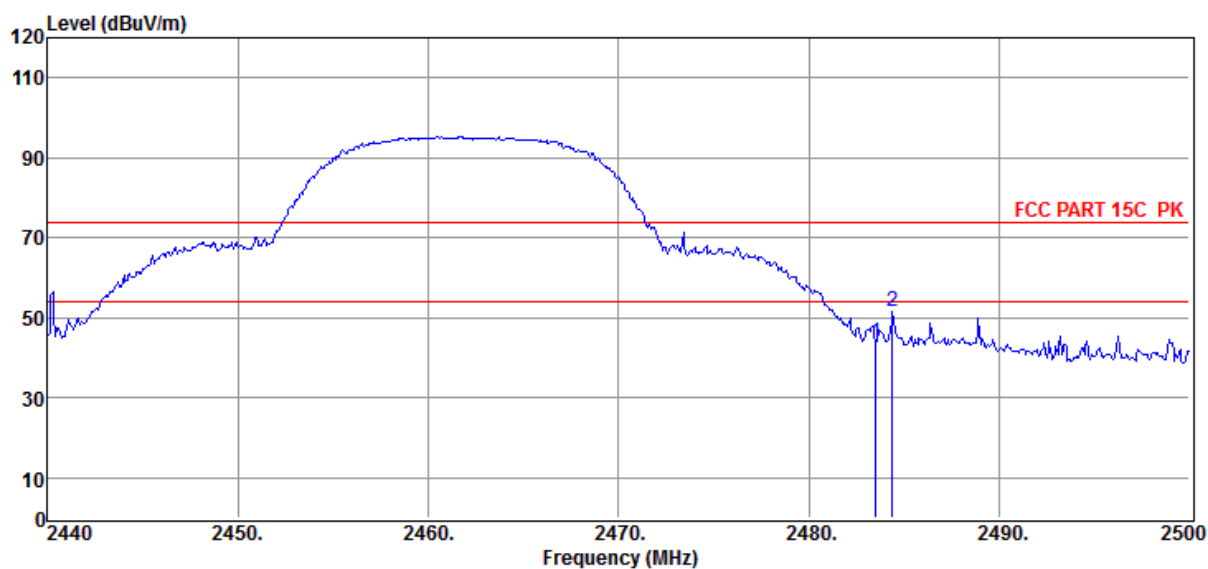

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	49.66	27.92	0.00	-33.79	43.79	74.00	-30.21	Peak	HORIZONTAL
2	2484.40	57.43	27.92	0.00	-33.78	51.57	74.00	-22.43	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5'C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/VERTICAL

Memo : 11B 2462MHz

Data: 5

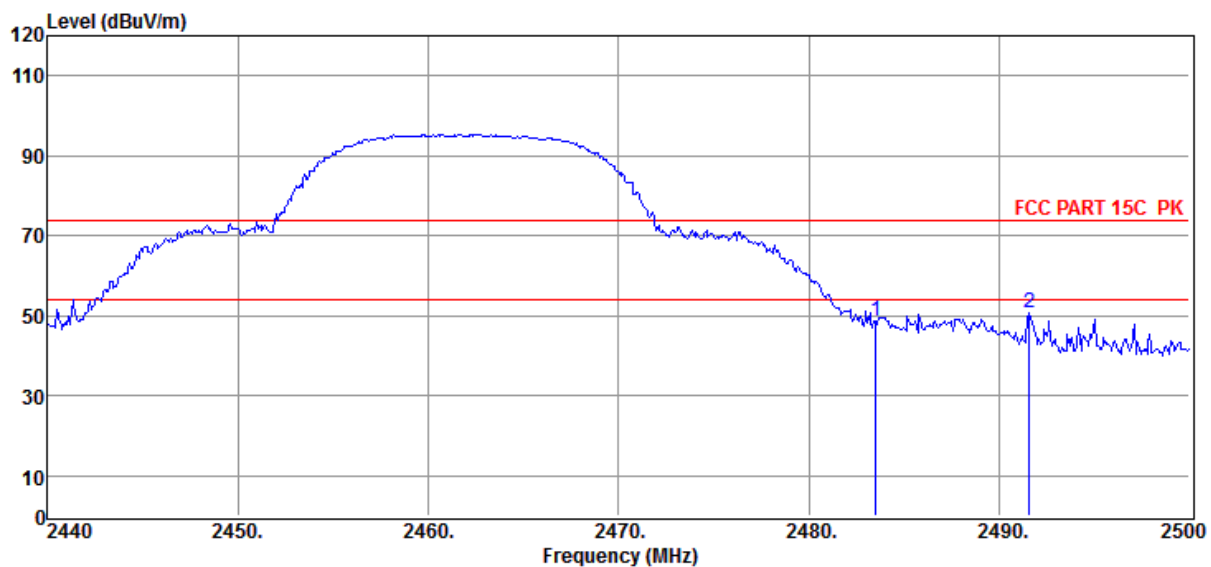

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	54.66	27.92	0.00	-33.79	48.79	74.00	-25.21	Peak	VERTICAL
2	2491.60	56.29	27.91	0.00	-33.66	50.54	74.00	-23.46	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/VERTICAL

Memo : 11G 2412MHz

Data: 6

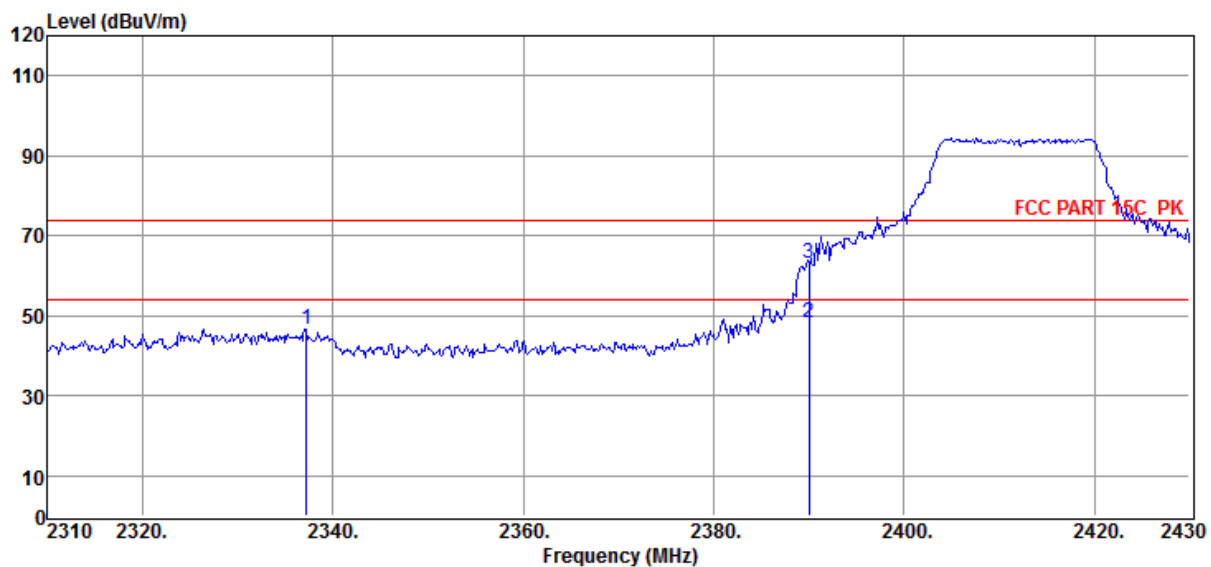

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2337.24	52.57	28.13	0.00	-33.97	46.73	74.00	-27.27	Peak	VERTICAL
2	2390.00	54.01	28.05	0.00	-34.02	48.04	54.00	-5.96	Average	VERTICAL
3	2390.00	68.90	28.05	0.00	-34.02	62.93	74.00	-11.07	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/HORIZONTAL

Memo : 11G 2412MHz

Data: 7

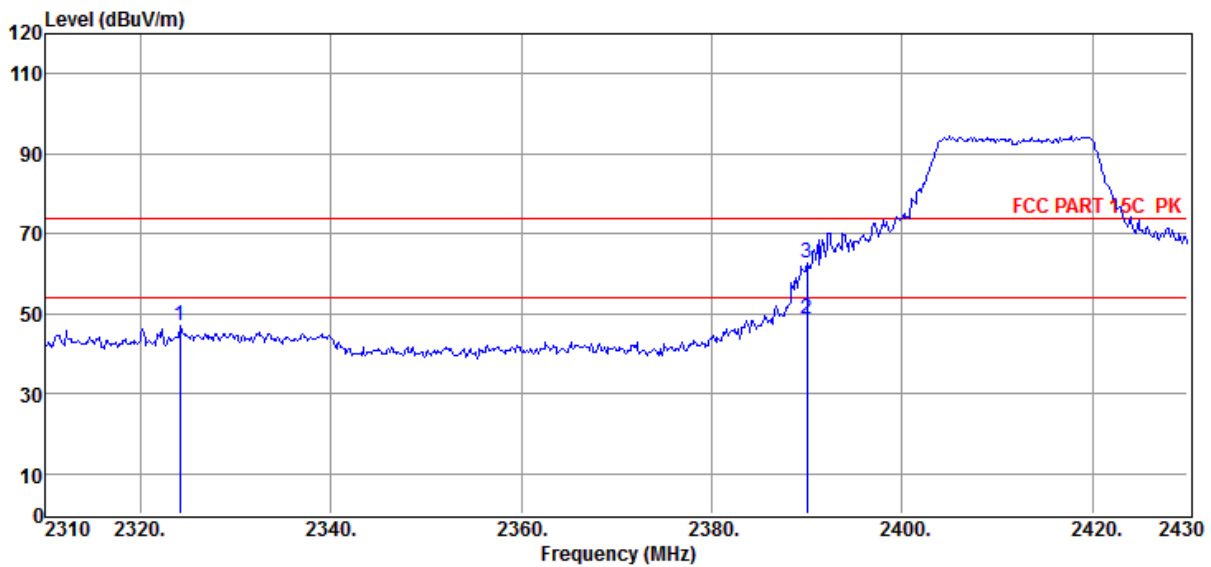

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2324.16	52.71	28.15	0.00	-34.04	46.82	74.00	-27.18	Peak	HORIZONTAL
2	2390.00	54.70	28.05	0.00	-34.02	48.73	54.00	-5.27	Average	HORIZONTAL
3	2390.00	68.60	28.05	0.00	-34.02	62.63	74.00	-11.37	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/VERTICAL

Memo : 11G 2462MHz

Data: 8

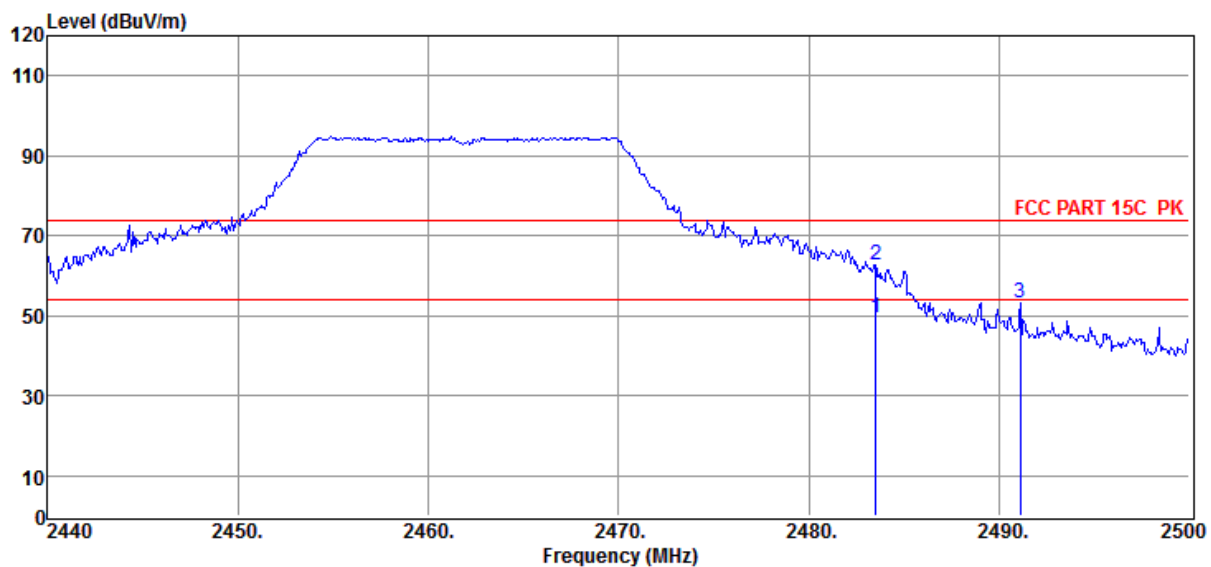

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	55.24	27.92	0.00	-33.79	49.37	54.00	-4.63	Average	VERTICAL
2	2483.50	68.54	27.92	0.00	-33.79	62.67	74.00	-11.33	Peak	VERTICAL
3	2491.12	59.01	27.91	0.00	-33.67	53.25	74.00	-20.75	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-13-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/HORIZONTAL

Memo : 11G 2462MHz

Data: 9

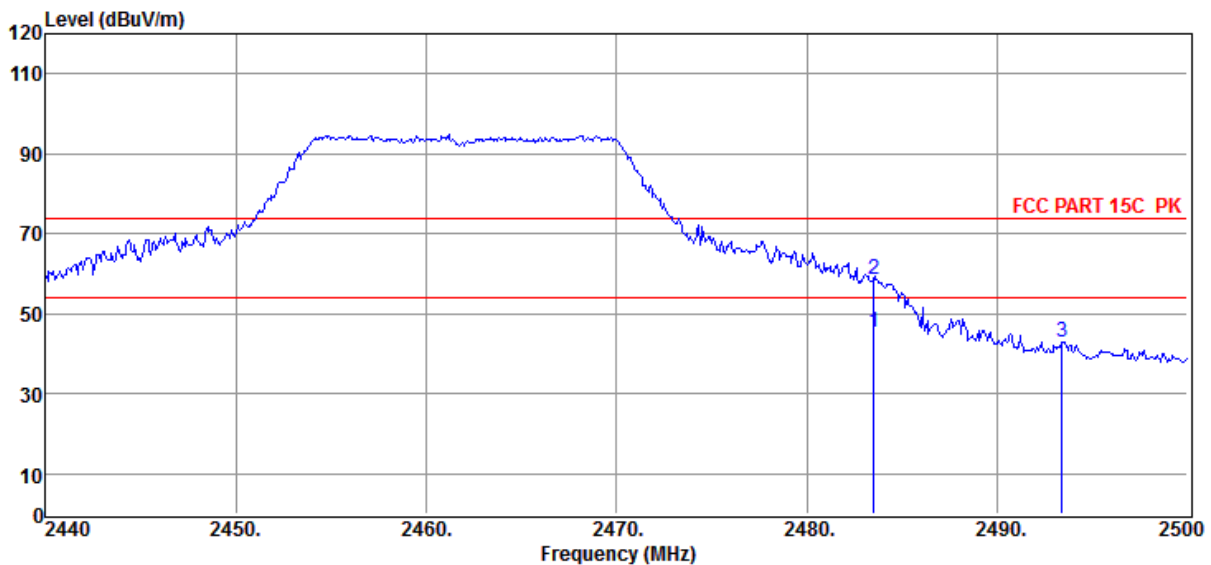

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.03	27.92	0.00	-33.79	45.16	54.00	-8.84	Average	HORIZONTAL
2	2483.50	64.37	27.92	0.00	-33.79	58.50	74.00	-15.50	Peak	HORIZONTAL
3	2493.40	48.61	27.91	0.00	-33.64	42.88	74.00	-31.12	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-19-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/VERTICAL

Memo : 11N20 2412MHz

Data: 40

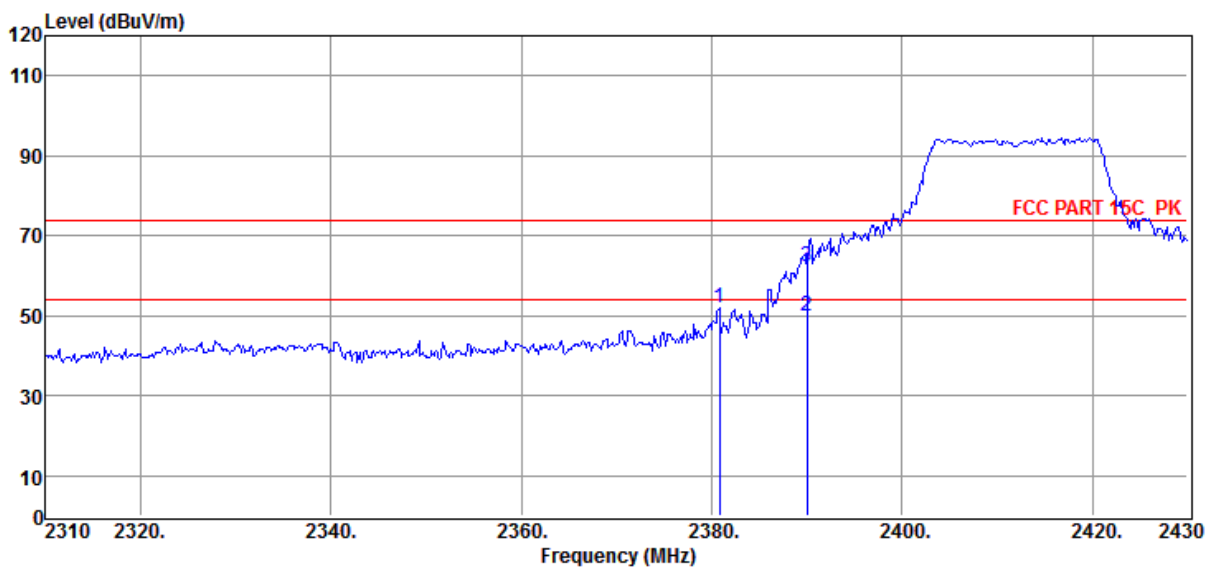

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2380.80	57.84	28.07	0.00	-33.99	51.92	74.00	-22.08	Peak	VERTICAL
2	2390.00	55.70	28.05	0.00	-34.02	49.73	54.00	-4.27	Average	VERTICAL
3	2390.00	68.17	28.05	0.00	-34.02	62.20	74.00	-11.80	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-19-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/HORIZONTAL

Memo : 11N20 2412MHz

Data: 41

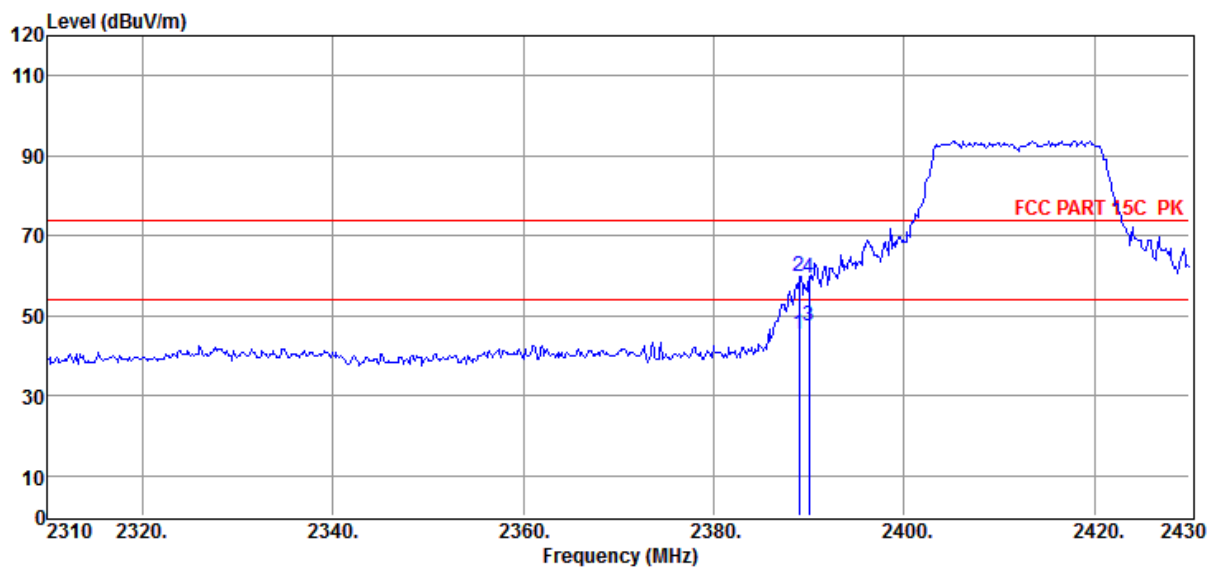

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.96	51.30	28.06	0.00	-34.02	45.34	54.00	-8.66	Average	HORIZONTAL
2	2388.96	65.67	28.06	0.00	-34.02	59.71	74.00	-14.29	Peak	HORIZONTAL
3	2390.00	53.57	28.05	0.00	-34.02	47.60	54.00	-6.40	Average	HORIZONTAL
4	2390.00	65.18	28.05	0.00	-34.02	59.21	74.00	-14.79	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-19-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/VERTICAL

Memo : 11N20 2462MHz

Data: 42

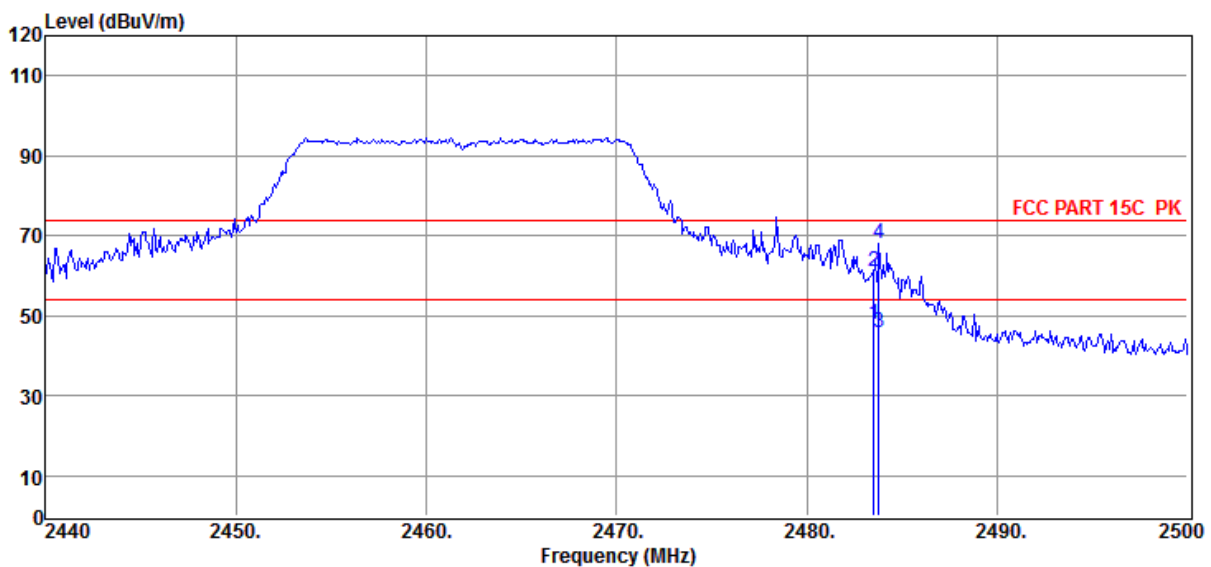

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	53.60	27.92	0.00	-33.79	47.73	54.00	-6.27	Average	VERTICAL
2	2483.50	66.79	27.92	0.00	-33.79	60.92	74.00	-13.08	Peak	VERTICAL
3	2483.80	51.80	27.92	0.00	-33.79	45.93	54.00	-8.07	Average	VERTICAL
4	2483.80	74.11	27.92	0.00	-33.79	68.24	74.00	-5.76	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

E:\E3_Report\TestData\Q21050704-1E WYZEC3\RF.EM6

Test Date : 05-19-2021

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : HF-907/3m/HORIZONTAL

Memo : 11N20 2462MHz

Data: 43

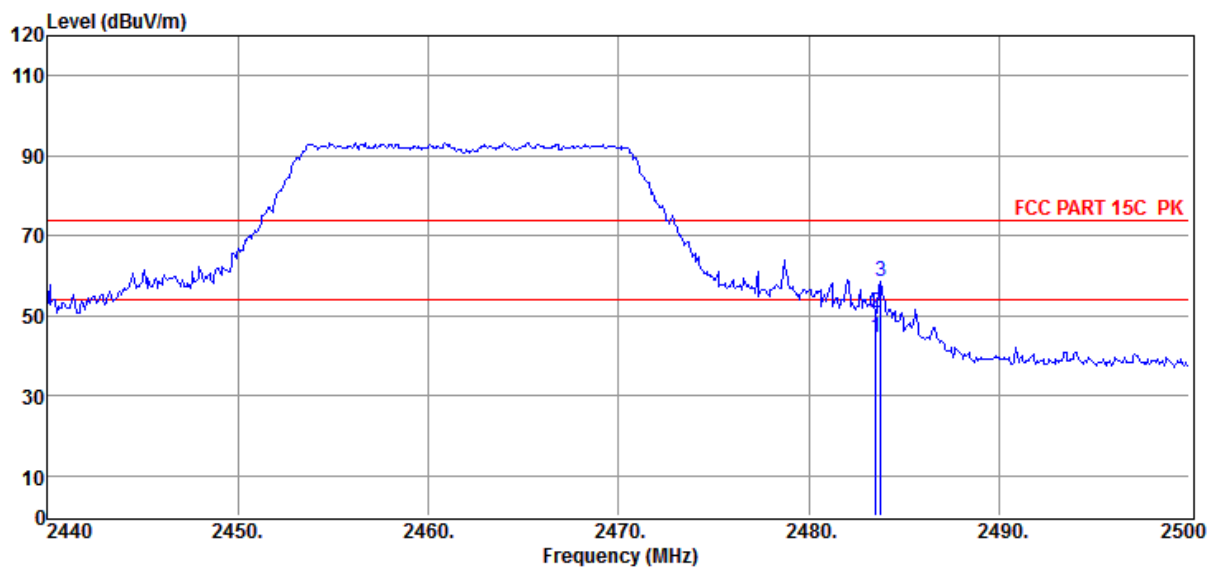

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.30	27.92	0.00	-33.79	44.43	54.00	-9.57	Average	HORIZONTAL
2	2483.50	56.54	27.92	0.00	-33.79	50.67	74.00	-23.33	Peak	HORIZONTAL
3	2483.80	64.58	27.92	0.00	-33.79	58.71	74.00	-15.29	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

10. Power Line Conducted Emission

10.1. Block diagram of test setup

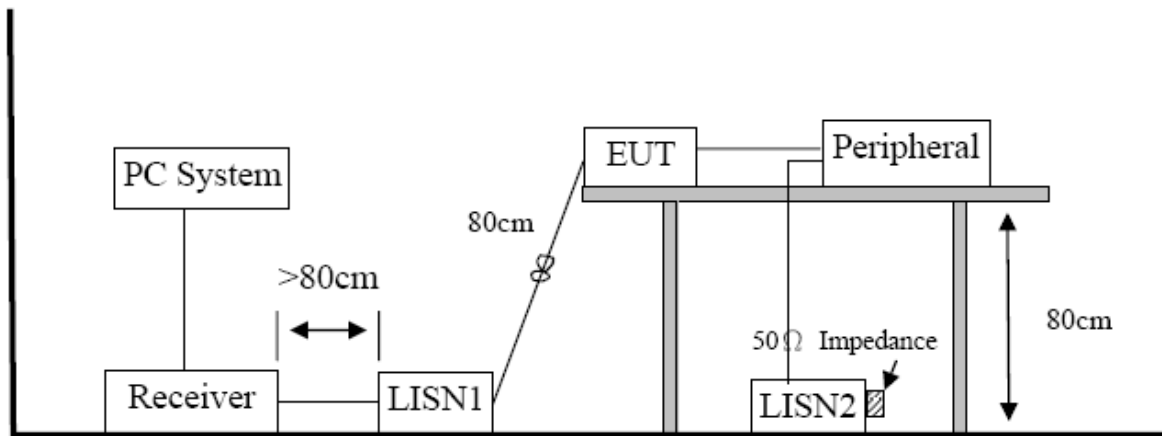

10.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

10.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means peak detection; “-----” means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 2# Shield Room

E:\2019E3ReportTestData\华来科技 V3\ce.EM6

Test Date : 2021-05-14

Tested By : Sunny

EUT : Wyze Cam v3

Model Number : WYZEC3

Power Supply : DC 5V


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
a

LISN : ENV216 N/NEUTRAL

Memo :

Data: 22

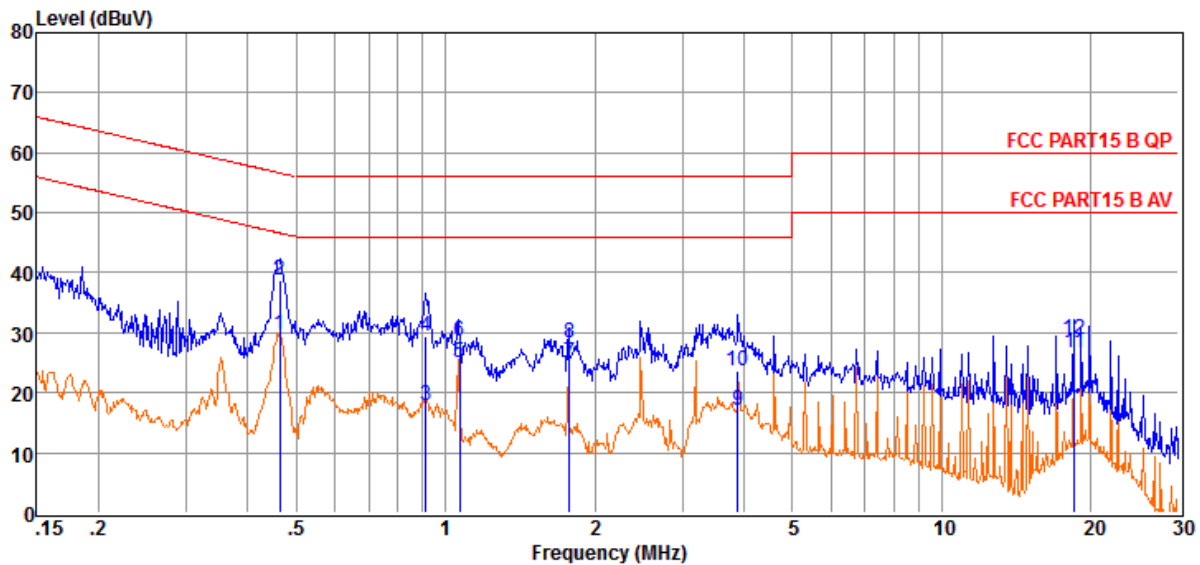

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Cable Loss (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.46	19.37	0.05	29.62	46.63	-17.01	Average	NEUTRAL
2	0.46	28.62	0.05	38.87	56.63	-17.76	QP	NEUTRAL
3	0.91	7.63	0.08	17.81	46.00	-28.19	Average	NEUTRAL
4	0.91	19.23	0.08	29.41	56.00	-26.59	QP	NEUTRAL
5	1.07	14.86	0.08	25.04	46.00	-20.96	Average	NEUTRAL
6	1.07	18.35	0.08	28.53	56.00	-27.47	QP	NEUTRAL
7	1.78	14.70	0.11	24.91	46.00	-21.09	Average	NEUTRAL
8	1.78	18.09	0.11	28.30	56.00	-27.70	QP	NEUTRAL
9	3.88	6.84	0.16	17.10	46.00	-28.90	Average	NEUTRAL
10	3.88	13.48	0.16	23.74	56.00	-32.26	QP	NEUTRAL
11	18.49	16.16	0.24	26.70	50.00	-23.30	Average	NEUTRAL
12	18.49	18.44	0.24	28.98	60.00	-31.02	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.


2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 2# Shield Room **E:\2019E3ReportTestData\华来科技 V3\ce.EM6**
Test Date : 2021-05-14 **Tested By** : Sunny
EUT : Wyze Cam v3 **Model Number** : WYZEC3
Power Supply : DC 5V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **LISN** : ENV216 L/LINE
Memo :

Data: 24

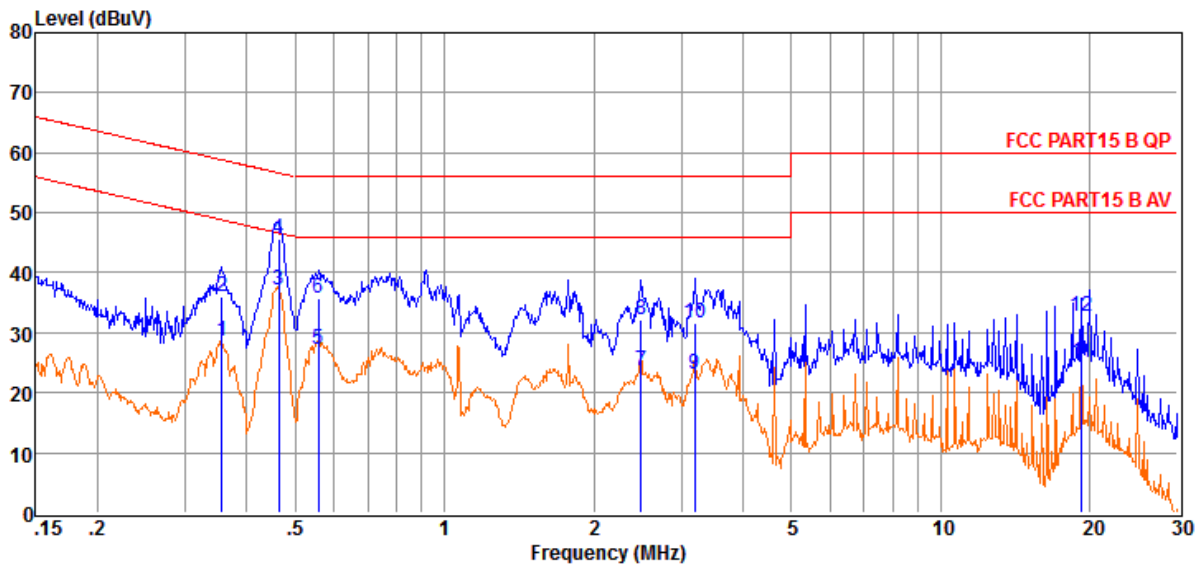

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Cable Loss (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.36	18.17	0.05	28.46	48.83	-20.37	Average	LINE
2	0.36	25.73	0.05	36.02	58.83	-22.81	QP	LINE
3	0.46	26.95	0.05	37.20	46.63	-9.43	Average	LINE
4	0.46	35.47	0.05	45.72	56.63	-10.91	QP	LINE
5	0.56	16.89	0.06	27.12	46.00	-18.88	Average	LINE
6	0.56	25.48	0.06	35.71	56.00	-20.29	QP	LINE
7	2.49	13.38	0.13	23.61	46.00	-22.39	Average	LINE
8	2.49	22.03	0.13	32.26	56.00	-23.74	QP	LINE
9	3.19	12.72	0.15	22.97	46.00	-23.03	Average	LINE
10	3.19	21.37	0.15	31.62	56.00	-24.38	QP	LINE
11	19.23	14.60	0.25	25.15	50.00	-24.85	Average	LINE
12	19.23	22.15	0.25	32.70	60.00	-27.30	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antenna used for this product is PIFA antenna and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 2.6 dBi.