



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: CTA25020800801

FCC ID.....: 2AQ9M-SIM730002

Compiled by

(position+printed name+signature)...: File administrators Joan Wu

Supervised by

(position+printed name+signature)...: Project Engineer Zoey Cao

Approved by

(position+printed name+signature)...: RF Manager Eric Wang

Date of issue.....: Mar. 06, 2025

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: Beijing Silion Technology Corp.,LTD.

Address: 5 Floor, Building A, No.3 Longyu North St., Changping District, Beijing, 102200 China

Test specification

Standard: FCC Part 15.247

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: RFID module

Trade Mark: N/A

Manufacturer: Beijing Silion Technology Corp.,LTD.

Model/Type reference.....: SIM7300

Listed Models: N/A

Frequency.....: From 902.75MHz to 927.25MHz

Rating: DC 5.0V from external circuit

Result.....: PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT

Equipment under Test : RFID module

Model /Type : SIM7300

Listed Models : N/A

Applicant : **Beijing Sillion Technology Corp.,LTD.**

Address : 5 Floor, Building A, No.3 Longyu North St., Changping District,
Beijing, 102200 China

Manufacturer : **Beijing Sillion Technology Corp.,LTD.**

Address : 5 Floor, Building A, No.3 Longyu North St., Changping District,
Beijing, 102200 China

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | | |
|----------|---|-----------|
| 1 | TEST STANDARDS | 4 |
| 2 | SUMMARY | 5 |
| 2.1 | General Remarks | 5 |
| 2.2 | Product Description | 5 |
| 2.3 | Equipment Under Test | 5 |
| 2.4 | Short description of the Equipment under Test (EUT) | 5 |
| 2.5 | EUT configuration | 6 |
| 2.6 | EUT operation mode | 6 |
| 2.7 | Block Diagram of Test Setup | 6 |
| 2.8 | Related Submittal(s) / Grant (s) | 6 |
| 2.9 | Modifications | 6 |
| 3 | TEST ENVIRONMENT | 7 |
| 3.1 | Address of the test laboratory | 7 |
| 3.2 | Test Facility | 7 |
| 3.3 | Environmental conditions | 7 |
| 3.4 | Summary of measurement results | 8 |
| 3.5 | Statement of the measurement uncertainty | 8 |
| 3.6 | Equipments Used during the Test | 9 |
| 4 | TEST CONDITIONS AND RESULTS | 11 |
| 4.1 | AC Power Conducted Emission | 11 |
| 4.2 | Radiated Emission | 14 |
| 4.3 | Maximum Peak Output Power | 20 |
| 4.4 | 20dB Bandwidth | 21 |
| 4.5 | Frequency Separation | 23 |
| 4.6 | Number of hopping frequency | 24 |
| 4.7 | Time of Occupancy (Dwell Time) | 25 |
| 4.8 | Out-of-band Emissions | 27 |
| 4.9 | Antenna Requirement | 31 |
| 5 | TEST SETUP PHOTOS OF THE EUT | 32 |
| 6 | PHOTOS OF THE EUT | 32 |

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

| | | |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Feb. 08, 2025 |
| Testing commenced on | : | Feb. 08, 2025 |
| Testing concluded on | : | Mar. 06, 2025 |

2.2 Product Description

| | |
|------------------------|---|
| Product Description: | RFID module |
| Model/Type reference: | SIM7300 |
| Power supply: | DC 5.0V from external circuit |
| Test board | Supplied by the manufacturer |
| Hardware version: | SIM7300_REV2.0 |
| Software version: | 24.11.05.01 |
| Testing sample ID: | CTA250208008-1# (Engineer sample), CTA250208008-2# (Normal sample) |
| RFID | |
| Modulation Technology: | ASK |
| Operation frequency: | 902.75MHz-927.25MHz |
| Channel number: | 50 |
| Antenna type: | External antenna |
| Antenna gain: | 6.00 dBi |
| Note: | Eight antennas cannot be used at the same time. |

2.3 Equipment Under Test

Power supply system utilised

| | | | |
|----------------------|---|---|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz | <input type="radio"/> 120V / 60Hz |
| | | <input type="radio"/> 12 V DC | <input type="radio"/> 24 V DC |
| | | <input checked="" type="radio"/> Other (specified in blank below) | |

DC 5.0V from external circuit

2.4 Short description of the Equipment under Test (EUT)

This is a RFID module.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

| | | |
|-----------|--|--|
| ○ Adapter | | Input: AC 100-240V 50/60Hz Output: DC 5V 3A |
| ○ PC | | Model: E470C Trade Mark: thinkpad |


2.6 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 50 channels provided to the EUT and Channel 01/25/50 were selected to test.

Operation Frequency:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 01 | 902.75 |
| 02 | 903.25 |
| ⋮ | ⋮ |
| 24 | 914.25 |
| 25 | 914.75 |
| 26 | 915.25 |
| ⋮ | ⋮ |
| 49 | 926.75 |
| 50 | 927.25 |

2.7 Block Diagram of Test Setup

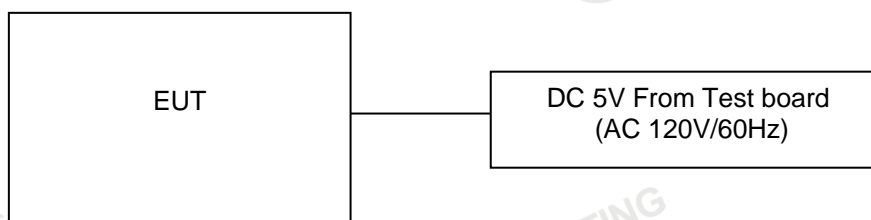

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

| | |
|-----------------------|--------------|
| Temperature: | 24 ° C |
| | |
| Humidity: | 45 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

AC Power Conducted Emission:

| | |
|-----------------------|--------------|
| Temperature: | 25 ° C |
| | |
| Humidity: | 46 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

| | |
|-----------------------|--------------|
| Temperature: | 25 ° C |
| | |
| Humidity: | 44 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

3.4 Summary of measurement results

| Test Specification clause | Test case | Test Mode | Test Channel | Recorded In Report | | Test result |
|---------------------------|---|-----------|---|--------------------|---|-------------|
| §15.247(a)(1) | Carrier Frequency separation | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Middle | Compliant |
| §15.247(a)(1) | Number of Hopping channels | ASK | <input checked="" type="checkbox"/> Full | ASK | <input checked="" type="checkbox"/> Full | Compliant |
| §15.247(a)(1) | Time of Occupancy (dwell time) | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Middle | Compliant |
| §15.247(a)(1) | Spectrum bandwidth of aFHSS system 20dB bandwidth | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | Compliant |
| §15.247(b)(1) | Maximum output peak power | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | Compliant |
| §15.247(d) | Band edge compliance conducted | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | Compliant |
| §15.205 | Band edge compliance radiated | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | Compliant |
| §15.247(d) | TX spurious emissions conducted | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | Compliant |
| §15.247(d) | TX spurious emissions radiated | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | Compliant |
| §15.209(a) | TX spurious Emissions radiated Below 1GHz | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Middle | Compliant |
| §15.107(a) §15.207 | Conducted Emissions 9KHz-30 MHz | ASK | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | ASK | <input checked="" type="checkbox"/> Middle | Compliant |

Remark: The measurement uncertainty is not included in the test result.

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

| Test | Range | Measurement Uncertainty | Notes |
|------------------------|-------------|-------------------------|-------|
| Radiated Emission | 9KHz~30MHz | 3.02 dB | (1) |
| Radiated Emission | 30~1000MHz | 4.06 dB | (1) |
| Radiated Emission | 1~18GHz | 5.14 dB | (1) |
| Radiated Emission | 18-40GHz | 5.38 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 2.14 dB | (1) |
| Output Peak power | 30MHz~18GHz | 0.55 dB | (1) |
| Power spectral density | / | 0.57 dB | (1) |
| Spectrum bandwidth | / | 1.1% | (1) |

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

| | | | |
|--|------------|---------|-----|
| Radiated spurious emission (30MHz-1GHz) | 30~1000MHz | 4.10 dB | (1) |
| Radiated spurious emission (1GHz-18GHz) | 1~18GHz | 4.32 dB | (1) |
| Radiated spurious emission (18GHz-40GHz) | 18-40GHz | 5.54 dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


| Test Equipment | Manufacturer | Model No. | Equipment No. | Calibration Date | Calibration Due Date |
|-------------------------------------|----------------|-----------------|---------------|------------------|----------------------|
| LISN | R&S | ENV216 | CTA-308 | 2024/08/03 | 2025/08/02 |
| LISN | R&S | ENV216 | CTA-314 | 2024/08/03 | 2025/08/02 |
| EMI Test Receiver | R&S | ESPI | CTA-307 | 2024/08/03 | 2025/08/02 |
| EMI Test Receiver | R&S | ESCI | CTA-306 | 2024/08/03 | 2025/08/02 |
| Spectrum Analyzer | Agilent | N9020A | CTA-301 | 2024/08/03 | 2025/08/02 |
| Spectrum Analyzer | R&S | FSU | CTA-337 | 2024/08/03 | 2025/08/02 |
| Vector Signal generator | Agilent | N5182A | CTA-305 | 2024/08/03 | 2025/08/02 |
| Analog Signal Generator | R&S | SML03 | CTA-304 | 2024/08/03 | 2025/08/02 |
| WIDEBAND RADIO COMMUNICATION TESTER | CMW500 | R&S | CTA-302 | 2024/08/03 | 2025/08/02 |
| Temperature and humidity meter | Chigo | ZG-7020 | CTA-326 | 2024/08/03 | 2025/08/02 |
| Ultra-Broadband Antenna | Schwarzbeck | VULB9163 | CTA-310 | 2023/10/17 | 2026/10/16 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | CTA-309 | 2023/10/13 | 2026/10/12 |
| Loop Antenna | Zhinan | ZN30900C | CTA-311 | 2023/10/17 | 2026/10/16 |
| Broadband Horn Antenna | A-INFOMW | LB-180500H-2.4F | CTA-336 | 2023/09/13 | 2026/09/12 |
| Amplifier | Schwarzbeck | BBV 9745 | CTA-312 | 2024/08/03 | 2025/08/02 |
| Amplifier | Taiwan chengyi | EMC051845B | CTA-313 | 2024/08/03 | 2025/08/02 |
| Directional coupler | NARDA | 4226-10 | CTA-303 | 2024/08/03 | 2025/08/02 |
| High-Pass Filter | XingBo | XBLBQ-GTA18 | CTA-402 | 2024/08/03 | 2025/08/02 |
| High-Pass Filter | XingBo | XBLBQ-GTA27 | CTA-403 | 2024/08/03 | 2025/08/02 |
| Automated filter bank | Tonscend | JS0806-F | CTA-404 | 2024/08/03 | 2025/08/02 |
| Power Sensor | Agilent | U2021XA | CTA-405 | 2024/08/03 | 2025/08/02 |
| Amplifier | Schwarzbeck | BBV9719 | CTA-406 | 2024/08/03 | 2025/08/02 |

| Test Equipment | Manufacturer | Model No. | Version number | Calibration Date | Calibration Due Date |
|-------------------|--------------|-------------|----------------|------------------|----------------------|
| EMI Test Software | Tonscend | TS@JS32-RE | 5.0.0.2 | N/A | N/A |
| EMI Test Software | Tonscend | TS@JS32-CE | 5.0.0.1 | N/A | N/A |
| RF Test Software | Tonscend | TS@JS1120-3 | 3.1.65 | N/A | N/A |
| RF Test Software | Tonscend | TS@JS1120 | 3.1.46 | N/A | N/A |

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

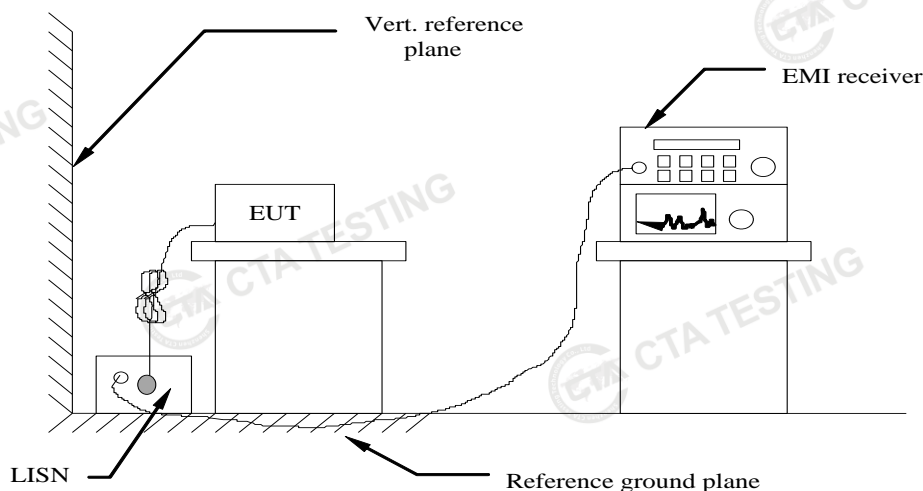

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST RESULTS


Remark:

1. RFID were test at Low, Middle, and High channel; only the worst result of RFID Middle Channel was reported as below:


Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

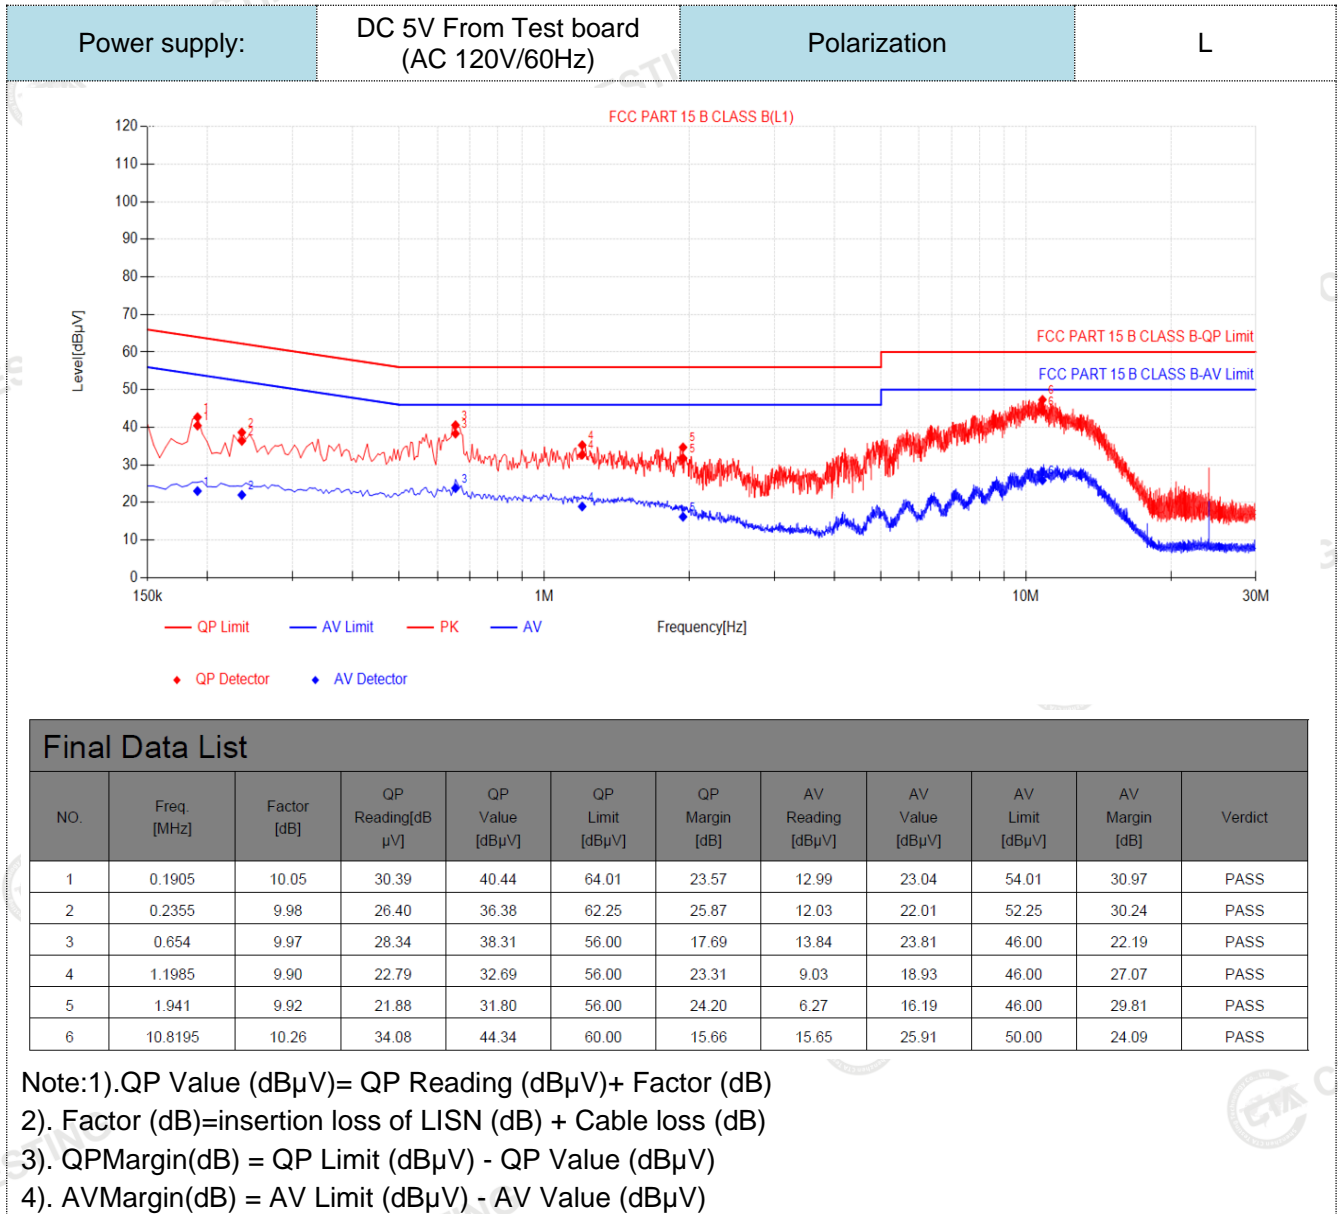

| | | | |
|---------------|---|--------------|---|
| Power supply: | DC 5V From Test board (AC 120V/60Hz) | Polarization | N |
|---------------|---|--------------|---|

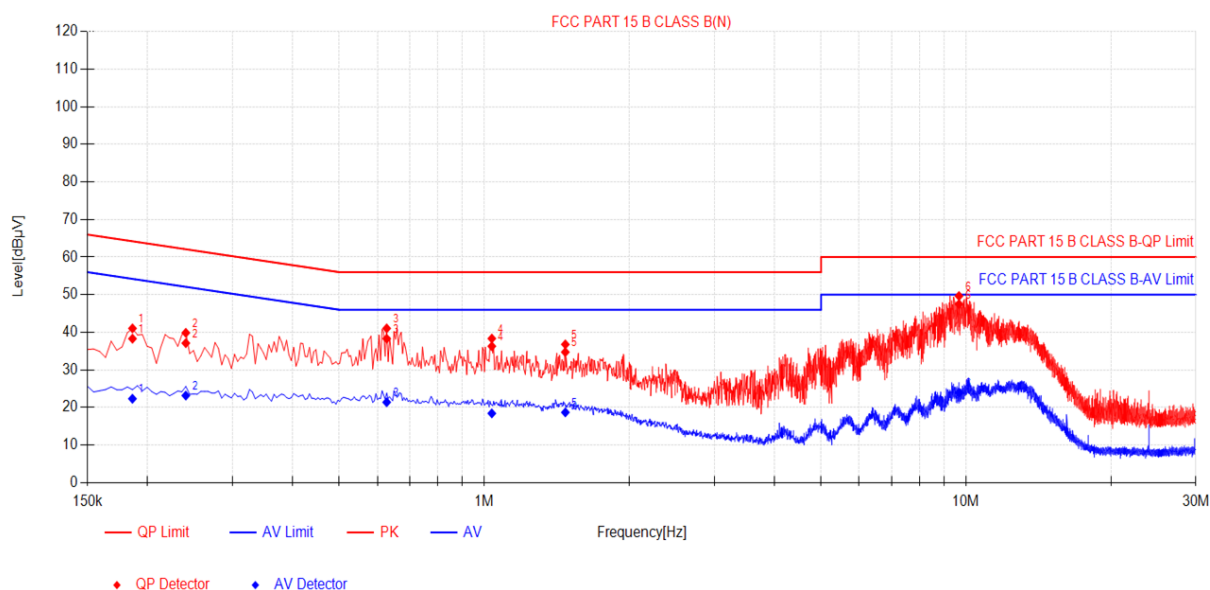

Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Reading[dB μV] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict |
|-----|----------------|----------------|-------------------------|-----------------------|-----------------------|----------------------|-------------------------|-----------------------|-----------------------|----------------------|---------|
| 1 | 0.186 | 10.01 | 28.29 | 38.30 | 64.21 | 25.91 | 12.32 | 22.33 | 54.21 | 31.88 | PASS |
| 2 | 0.24 | 10.01 | 27.11 | 37.12 | 62.10 | 24.98 | 13.16 | 23.17 | 52.10 | 28.93 | PASS |
| 3 | 0.627 | 10.13 | 28.18 | 38.31 | 56.00 | 17.69 | 11.26 | 21.39 | 46.00 | 24.61 | PASS |
| 4 | 1.0365 | 10.13 | 26.16 | 36.29 | 56.00 | 19.71 | 8.31 | 18.44 | 46.00 | 27.56 | PASS |
| 5 | 1.473 | 10.14 | 24.59 | 34.73 | 56.00 | 21.27 | 8.56 | 18.70 | 46.00 | 27.30 | PASS |
| 6 | 9.672 | 10.40 | 37.09 | 47.49 | 60.00 | 12.51 | 13.52 | 23.92 | 50.00 | 26.08 | PASS |

Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

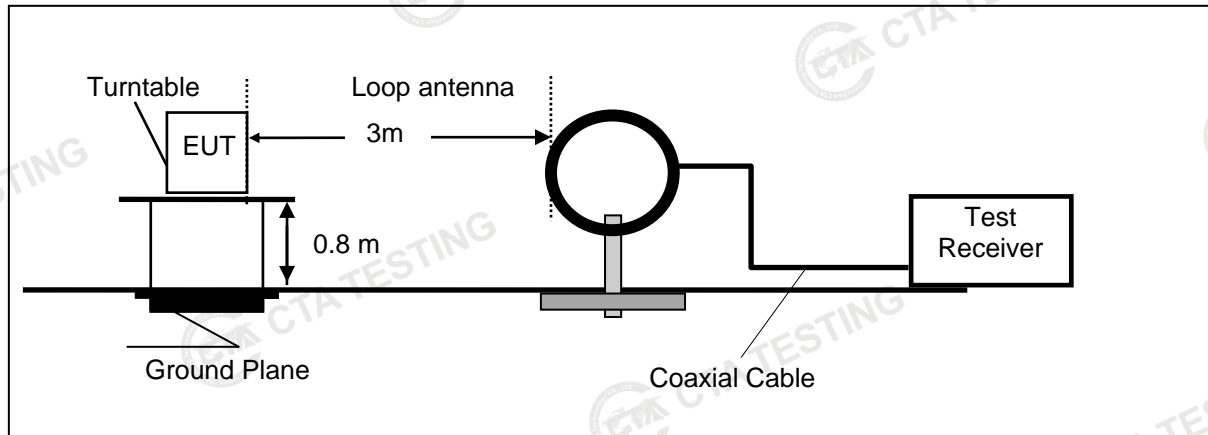

Frequency range 30MHz – 1000MHz

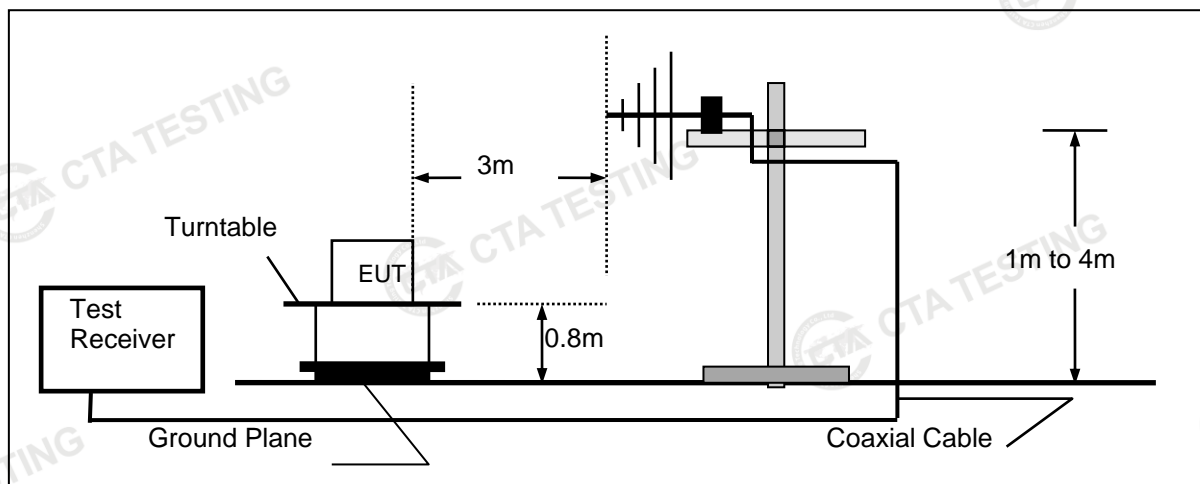

Frequency range above 1GHz-25GHz

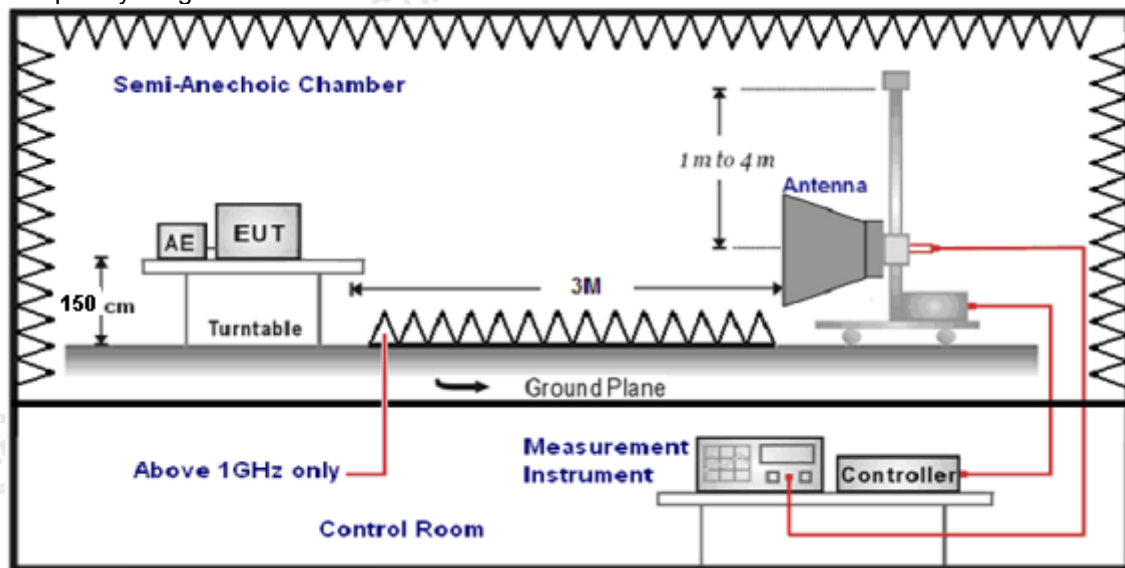

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Ultra-Broadband Antenna | 3 |
| 1GHz-18GHz | Double Ridged Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 1 |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|---|----------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz,Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz,Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz,Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | Peak |

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m) | Radiated (μV/m) |
|-----------------|-------------------|--|-----------------------|
| 0.009-0.49 | 3 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$ |
| 0.49-1.705 | 3 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30 | 3 | $20\log(30)+40\log(30/3)$ | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |


Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. For below 1GHz testing recorded worst at Low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

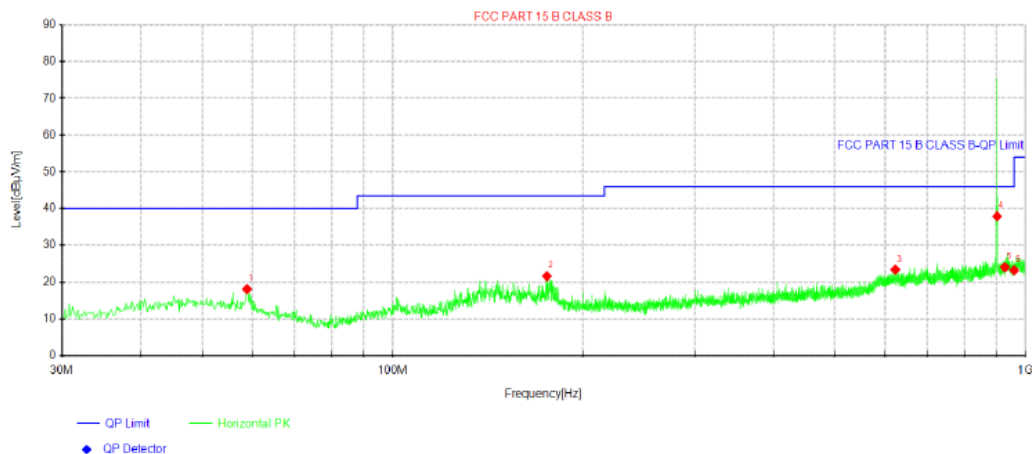
For 30MHz-1GHz**Horizontal****Suspected Data List**

| NO. | Freq. [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|------------|
| 1 | 58.8575 | 30.54 | 18.06 | -12.48 | 40.00 | 21.94 | 100 | 158 | Horizontal |
| 2 | 175.257 | 36.40 | 21.60 | -14.80 | 43.50 | 21.90 | 100 | 250 | Horizontal |
| 3 | 623.155 | 29.09 | 23.38 | -5.71 | 46.00 | 22.62 | 200 | 333 | Horizontal |
| 4 | 902 | 40.43 | 37.86 | -2.57 | 46.00 | 8.14 | 200 | 20 | Horizontal |
| 5 | 928 | 26.38 | 24.07 | -2.31 | 46.00 | 21.93 | 100 | 181 | Horizontal |
| 6 | 960 | 25.34 | 23.21 | -2.13 | 46.00 | 22.79 | 100 | 100 | Horizontal |

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

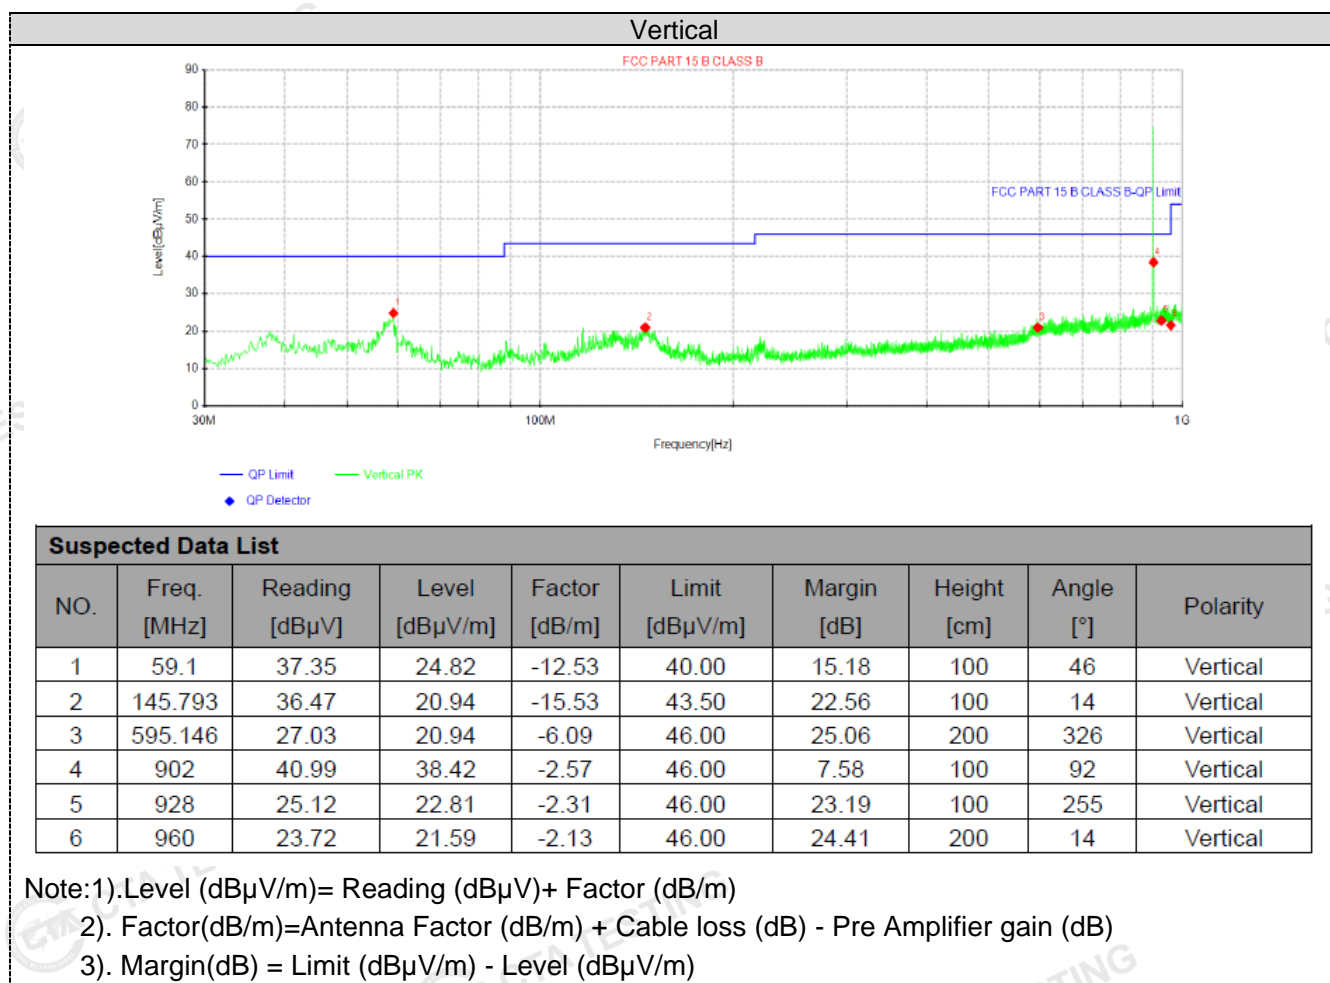

For 1GHz to 10GHz

| Frequency(MHz): | | | 902.75 | | Polarity: | | HORIZONTAL | | |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1805.5 | 59.87 | PK | 74 | 14.13 | 72.14 | 25.46 | 3.6 | 41.33 | -12.27 |
| 1805.5 | 42.01 | AV | 54 | 11.99 | 54.28 | 25.46 | 3.6 | 41.33 | -12.27 |
| 2708.25 | 51.90 | PK | 74 | 22.10 | 61.06 | 28.32 | 5.12 | 42.6 | -9.16 |
| 2708.25 | 40.33 | AV | 54 | 13.67 | 49.49 | 28.32 | 5.12 | 42.6 | -9.16 |

| Frequency(MHz): | | | 902.75 | | Polarity: | | VERTICAL | | |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1805.5 | 57.90 | PK | 74.00 | 16.10 | 70.17 | 25.46 | 3.6 | 41.33 | -12.27 |
| 1805.5 | 40.57 | AV | 54.00 | 13.43 | 52.84 | 25.46 | 3.6 | 41.33 | -12.27 |
| 2708.25 | 49.05 | PK | 74.00 | 24.95 | 58.21 | 28.32 | 5.12 | 42.6 | -9.16 |
| 2708.25 | 39.50 | AV | 54.00 | 14.50 | 48.66 | 28.32 | 5.12 | 42.6 | -9.16 |

| Frequency(MHz): | | | 914.75 | | Polarity: | | HORIZONTAL | | |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1829.5 | 59.07 | PK | 74.00 | 14.93 | 71.35 | 25.45 | 3.6 | 41.33 | -12.28 |
| 1829.5 | 41.87 | AV | 54.00 | 12.13 | 54.15 | 25.45 | 3.6 | 41.33 | -12.28 |
| 2744.25 | 50.61 | PK | 74.00 | 23.39 | 59.78 | 28.3 | 5.12 | 42.59 | -9.17 |
| 2744.25 | 40.53 | AV | 54.00 | 13.47 | 49.70 | 28.3 | 5.12 | 42.59 | -9.17 |

| Frequency(MHz): | | | 914.75 | | Polarity: | | VERTICAL | | |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1829.5 | 57.02 | PK | 74.00 | 16.98 | 69.30 | 25.45 | 3.6 | 41.33 | -12.28 |
| 1829.5 | 39.77 | AV | 54.00 | 14.23 | 52.05 | 25.45 | 3.6 | 41.33 | -12.28 |
| 2744.25 | 49.83 | PK | 74.00 | 24.17 | 59.00 | 28.3 | 5.12 | 42.59 | -9.17 |
| 2744.25 | 38.94 | AV | 54.00 | 15.06 | 48.11 | 28.3 | 5.12 | 42.59 | -9.17 |

| Frequency(MHz): | | | 927.25 | | Polarity: | | HORIZONTAL | | |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1854.5 | 58.58 | PK | 74.00 | 15.42 | 70.73 | 25.62 | 3.63 | 41.4 | -12.15 |
| 1854.5 | 41.70 | AV | 54.00 | 12.30 | 53.85 | 25.62 | 3.63 | 41.4 | -12.15 |
| 2781.75 | 48.94 | PK | 74.00 | 25.06 | 58.04 | 28.46 | 5.14 | 42.7 | -9.1 |
| 2781.75 | 39.38 | AV | 54.00 | 14.62 | 48.48 | 28.46 | 5.14 | 42.7 | -9.1 |

| Frequency(MHz): | | | 927.25 | | Polarity: | | VERTICAL | | |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1854.5 | 56.49 | PK | 74.00 | 17.51 | 68.64 | 25.62 | 3.63 | 41.4 | -12.15 |
| 1854.5 | 38.51 | AV | 54.00 | 15.49 | 50.66 | 25.62 | 3.63 | 41.4 | -12.15 |
| 2781.75 | 47.43 | PK | 74.00 | 26.57 | 56.53 | 28.46 | 5.14 | 42.7 | -9.1 |
| 2781.75 | 37.92 | AV | 54.00 | 16.08 | 47.02 | 28.46 | 5.14 | 42.7 | -9.1 |

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3 Maximum Peak Output Power

Limit

The Maximum Peak Output Power Measurement is 1W (30dBm).

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

Test Configuration



Test Results

| Channel | Output power (dBm) | Limit (dBm) | Result |
|---------|--------------------|-------------|--------|
| CH01 | 29.491 | 30.0 | Pass |
| CH25 | 29.543 | | |
| CH50 | 29.554 | | |

Note: 1.The test results including the cable loss.

4.4 20dB Bandwidth

Limit


For frequency hopping systems operating in the 902MHz-928MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration




Test Results


| Channel | 20dB bandwidth (MHz) | Result |
|---------|----------------------|--------|
| CH00 | 0.2016 | Pass |
| CH31 | 0.2076 | |
| CH63 | 0.2148 | |

Test plot as follows:


ASK

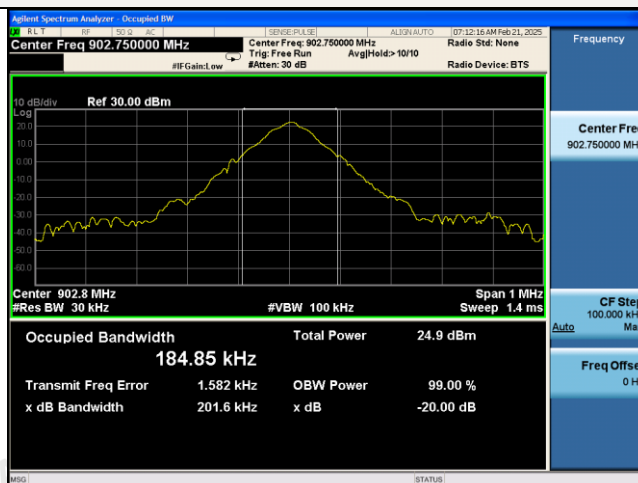

CH01

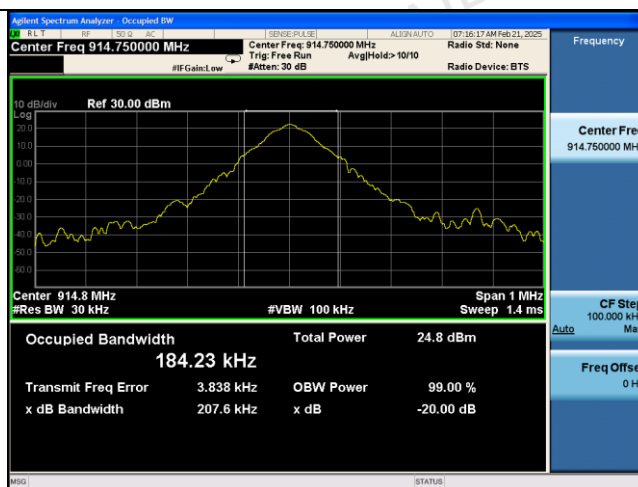

CH25

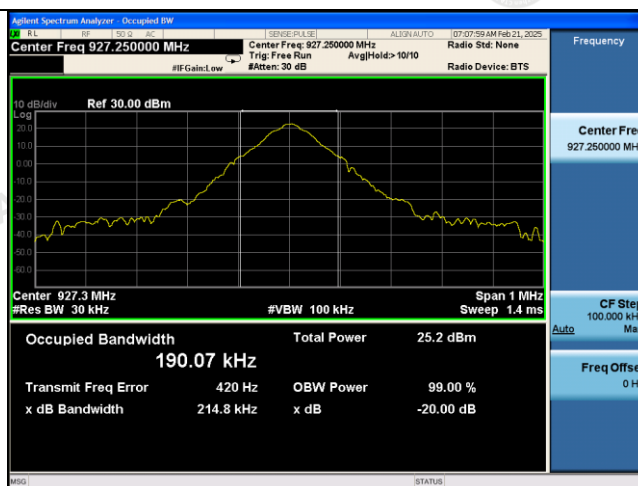

CH50

4.5 Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

TEST CONFIGURATION




TEST RESULTS

| Channel | Channel Separation (MHz) | Limit(MHz) | Result |
|---------|--------------------------|-------------------------|--------|
| CH24 | 0.5 | 25KHz or 20dB bandwidth | Pass |
| CH25 | | | |

Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:

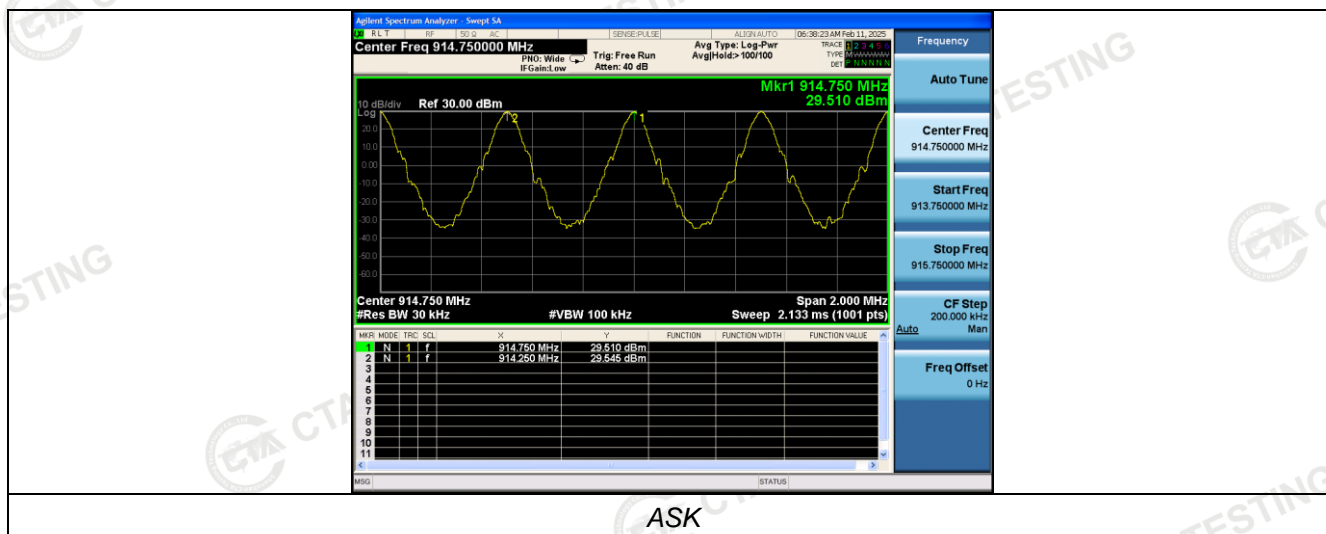

4.6 Number of hopping frequency

Limit

≥50 For Frequency hopping systems in the 902–928MHz band

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 903MHz to 906MHz with 100 KHz RBW and 300 KHz VBW.


Test Configuration



Test Results

| Number of Hopping Channel | Limit | Result |
|---------------------------|-------|--------|
| 50 | ≥50 | Pass |

Test plot as follows:

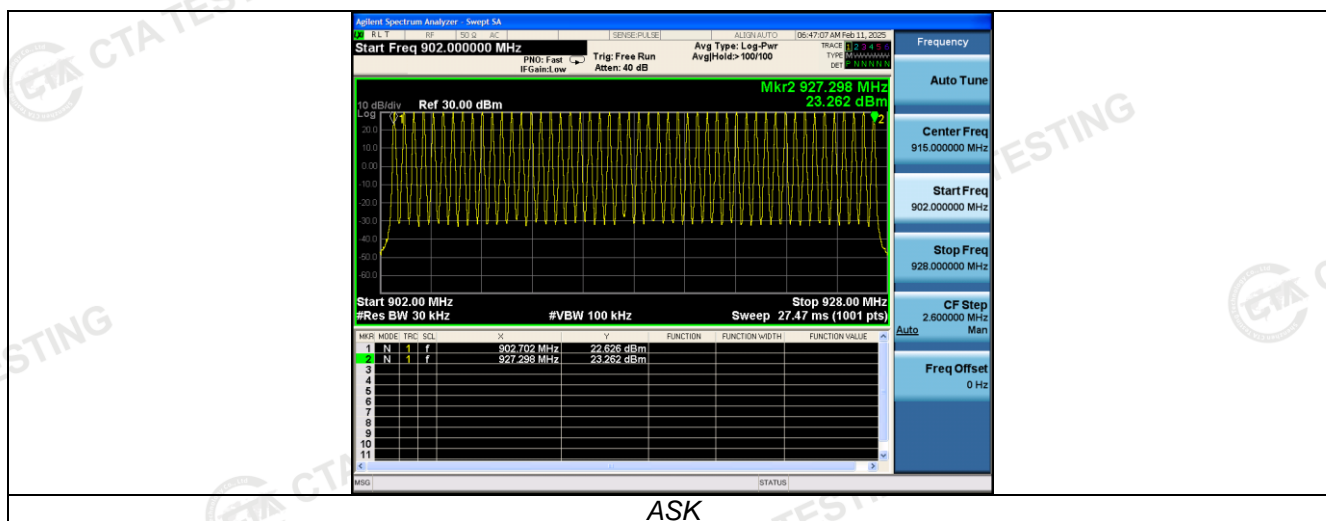

4.7 Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration




Test Results

| CH | Burst time (s) | Dwell time (s) | Limit (s) | Result |
|----|----------------|----------------|-----------|--------|
| 25 | 0.388 | 0.380 | 0.40 | Pass |


Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

Test plot as follows:

ASK

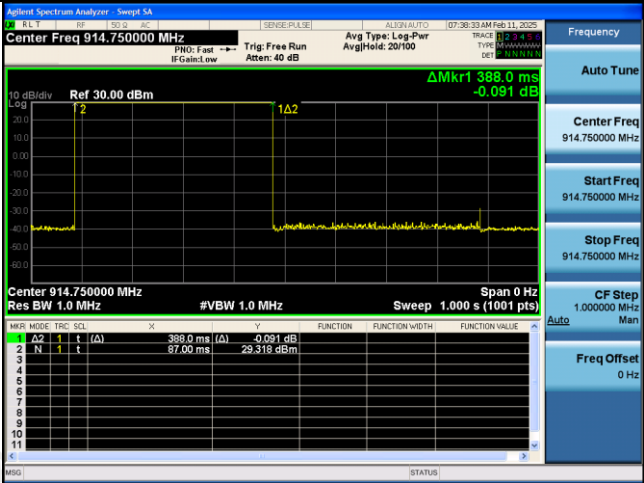

One*Burst

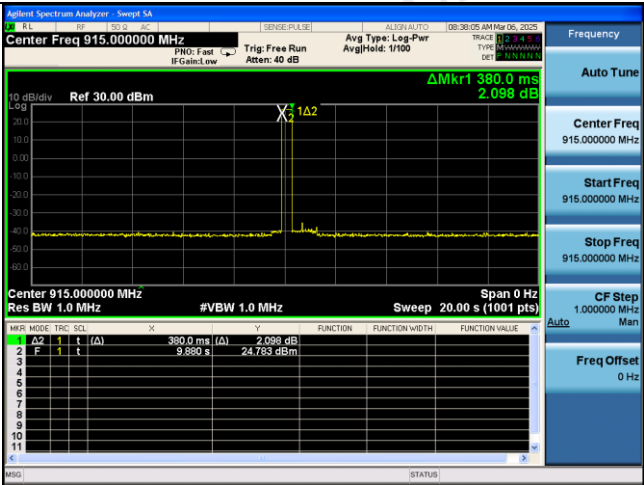

Burst total number in hopping mode within 20s

4.8 Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge and out-of-band emissions.


Test Configuration




Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.


Test plot as follows:

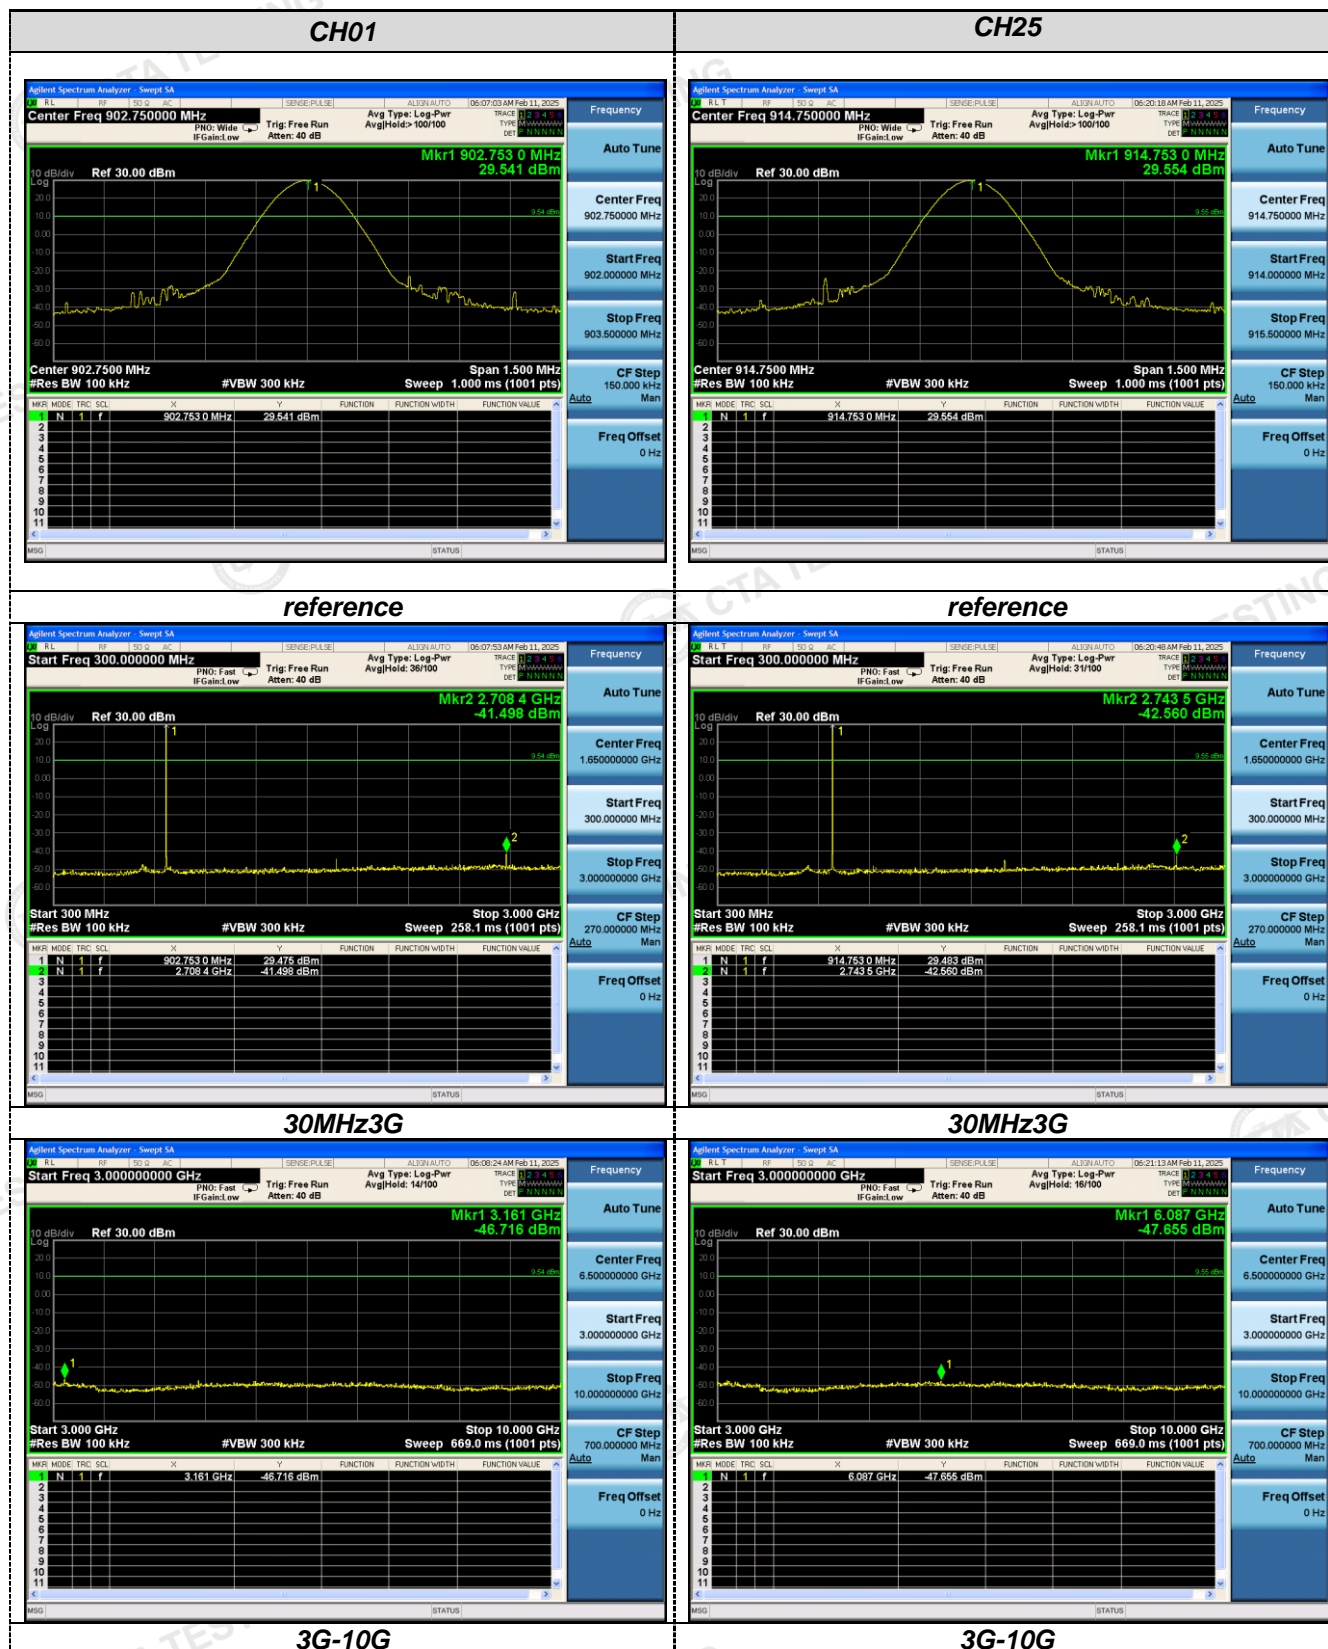


CH50

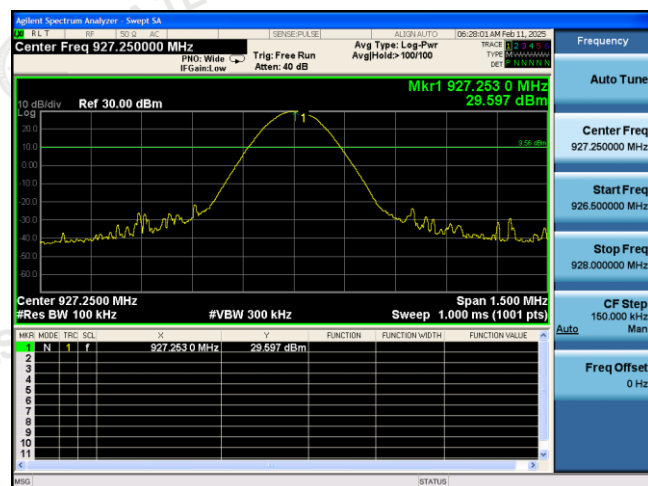

reference

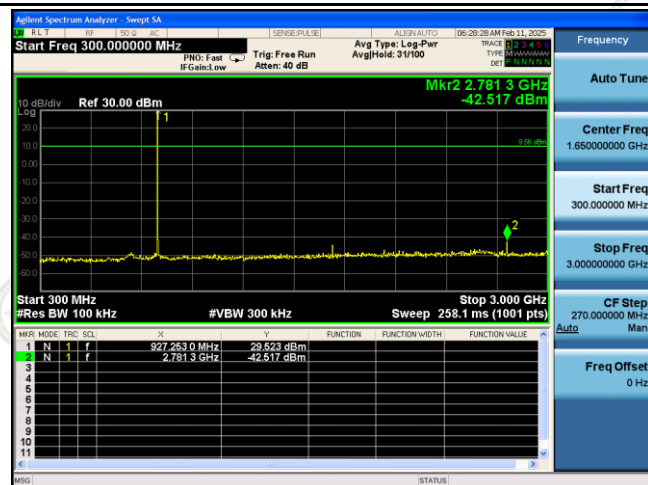


30MHz3G

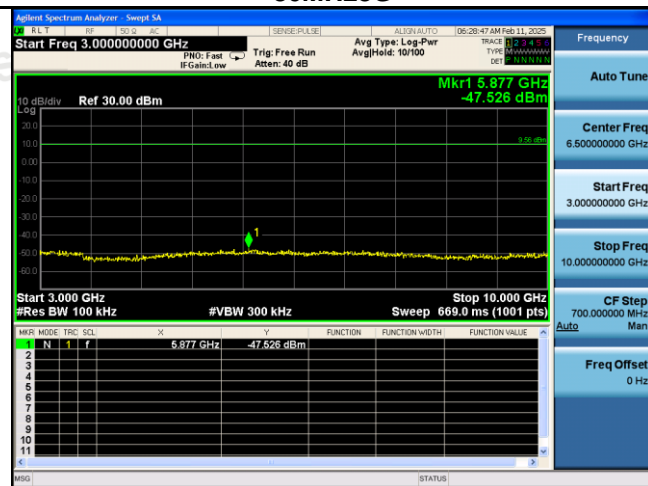


3G-10G

Band-edge Measurements for RF Conducted Emissions:


ASK

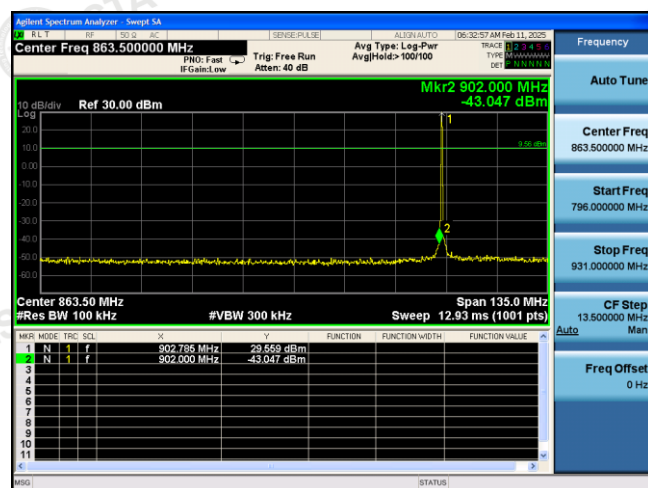


Left Band edge hopping off

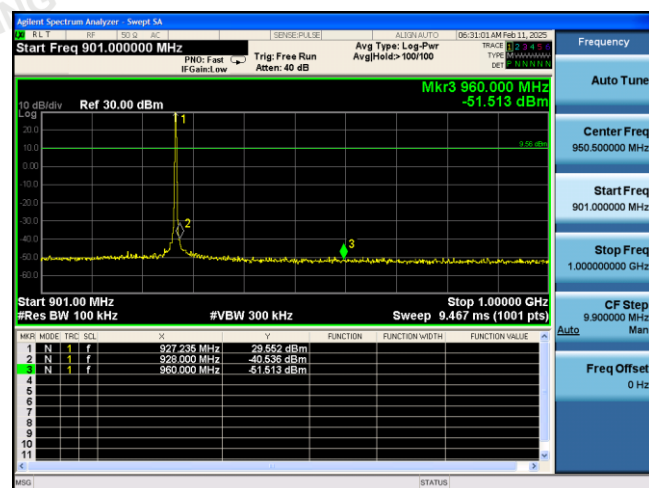

Right Band edge hopping off

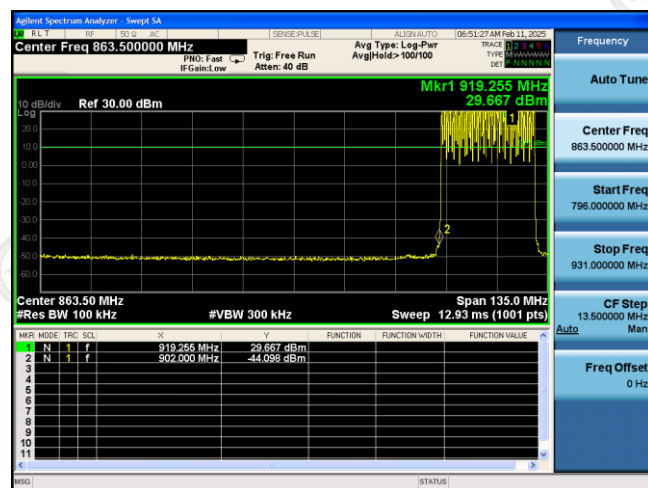

Left Band edge hopping on

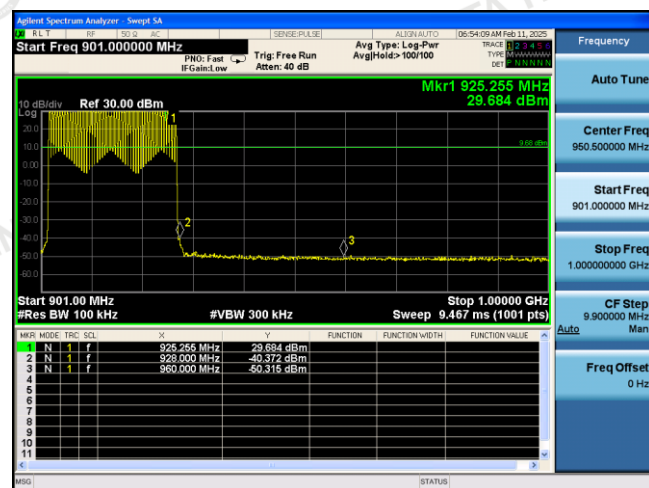

Right Band edge hopping on

4.9 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was 6.00 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 Photos of the EUT

Please refer to separated files for External & Internal Photos of the EUT.

*******End of Report*******