

FCC Radio Test Report

FCC ID: 2AYQ2-ES-T6

Original Grant

Report No. : TB-FCC178362
Applicant : SHENZHEN ESHINE INTERACTION TECHNOLOGY CO.,LTD
Equipment Under Test (EUT)
EUT Name : Bluetooth earphone
Model No. : ES-T6
Series Model No. : ES-T6S, ES-T8, ES-T8S, ES-T9, ES-T9S, ES-T5, ES-T5S
Brand Name : N/A
Sample ID : TBBJ-20201111-18-1# & TBBJ-20201111-18-2#
Receipt Date : 2020-12-04
Test Date : 2020-12-04 to 2021-01-16
Issue Date : 2021-01-16
Standards : FCC Part 15, Subpart C 15.247
Test Method : ANSI C63.10: 2013
Conclusions : PASS

In the configuration tested, the EUT complied with the standards specified above,

Test/Witness Engineer : Seven Wu

Engineer Supervisor : Ivan Su

Engineer Manager : Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility.....	9
2. TEST SUMMARY	10
3. TEST SOFTWARE.....	10
4. TEST EQUIPMENT.....	11
5. CONDUCTED EMISSION TEST	12
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode	13
5.6 Test Data.....	13
6. RADIATED EMISSION TEST	14
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Condition	17
6.6 Test Data.....	17
7. RESTRICTED BANDS REQUIREMENT	18
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	18
7.4 Deviation From Test Standard.....	19
7.5 EUT Operating Condition	19
7.6 Test Data.....	19
8. BANDWIDTH TEST.....	20
8.1 Test Standard and Limit.....	20
8.2 Test Setup.....	20
8.3 Test Procedure.....	20
8.4 Deviation From Test Standard.....	20
8.5 EUT Operating Condition	20

8.6 Test Data.....	20
9. PEAK OUTPUT POWER TEST.....	21
9.1 Test Standard and Limit.....	21
9.2 Test Setup.....	21
9.3 Test Procedure.....	21
9.4 Deviation From Test Standard.....	21
9.5 EUT Operating Condition	21
9.6 Test Data.....	21
10. POWER SPECTRAL DENSITY TEST	22
10.1 Test Standard and Limit	22
10.2 Test Setup.....	22
10.3 Test Procedure.....	22
10.4 Deviation From Test Standard.....	22
10.5 EUT Operating Condition	22
10.6 Test Data.....	22
11. ANTENNA REQUIREMENT.....	23
11.1 Standard Requirement.....	23
11.2 Deviation From Test Standard.....	23
11.3 Antenna Connected Construction	23
11.4 Result.....	23
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	24
ATTACHMENT B-- RADIATED EMISSION TEST DATA	26
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT AND BAND EDGE TEST DATA	34
ATTACHMENT D-- CHANNEL SEPARATION AND BANDWIDTH TEST DATA	44
ATTACHMENT E-- PEAK OUTPUT POWER TEST DATA.....	48
ATTACHMENT F-- POWER SPECTRAL DENSITY TEST DATA.....	52
ATTACHMENT G-- POWER SPECTRAL DENSITY TEST DATA	54

Revision History

1. General Information about EUT

1.1 Client Information

Applicant	:	SHENZHEN ESHINE INTERACTION TECHNOLOGY CO.,LTD
Address	:	4F, Flat C, SIDE OF JINPENG INDUSTRIAL ZONE, XUEXIANG COMMUNITY, BANTIAN STREET, LONGGANG DISTRICT, SHENZHEN, CHINA
Manufacturer	:	SHENZHEN ESHINE INTERACTION TECHNOLOGY CO.,LTD
Address	:	4F, Flat C, SIDE OF JINPENG INDUSTRIAL ZONE, XUEXIANG COMMUNITY, BANTIAN STREET, LONGGANG DISTRICT, SHENZHEN, CHINA

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Bluetooth earphone
Model(s) No.	:	ES-T6, ES-T6S, ES-T8, ES-T8S, ES-T9, ES-T9S, ES-T5, ES-T5S
Model Different	:	All these models are in the same PCB, layout and electrical circuit, the only difference is model.
Product Description	Operation Frequency:	Bluetooth 5.0(BLE): 2402MHz~2480MHz
	Number of Channel:	Bluetooth 5.0(BLE): 40 channels see note(3)
	RF Output Power:	2.555 dBm (Max)
	Antenna Gain:	-1 dBi Ceramic Antenna
	Modulation Type:	GFSK
	Bit Rate of Transmitter:	1Mbps&2Mbps
Power Supply (Earphone)	:	Input: Output DC 5V DC 3.7V by 55mAh Li-ion battery
Power Supply (Charger Box)	:	Input: Output DC 5V DC 3.7V by 2500mAh Li-ion battery
Software Version	:	N/A
Hardware Version	:	V2.1
Connecting I/O Port(S)	:	Please refer to the User's Manual

Note:

This Test Report is FCC Part 15.247 for Bluetooth, the test procedure follows the FCC KDB 558074 D01 15.247 Meas Guidance v05r02


- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Antenna information provided by the applicant.

(3) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

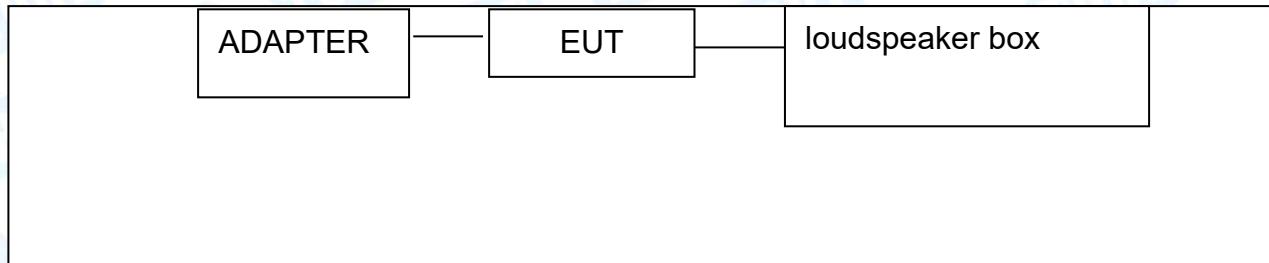

Radiated Test



1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used "✓"
---	---	---	---	---
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
---	---	---	---	---

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging + TX Mode Channel 00
For Radiated Test	
Final Test Mode	Description
Mode 2	TX Mode
Mode 3	TX 1Mbps Mode (Channel 00/20/39)
Mode 4	TX 2Mbps Mode (Channel 00/20/39)
Note : The adapter and antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.	

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

BLE Mode: GFSK Modulation Transmitting mode.

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software Version	Setup_SmartRF_Studio_7-v2.6.0		
Frequency	2402 MHz	2442MHz	2480 MHz
BLE GFSK	DEF	DEF	DEF

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at: 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2. Test Summary

FCC Part 15 Subpart C(15.247)/RSS 247 Issue 2					
Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
15.203		Antenna Requirement	TBBJ-20201111-18-2#	PASS	N/A
15.207(a)	RSS-GEN 7.2.4	Conducted Emission	TBBJ-20201111-18-1#	PASS	N/A
15.205&15.247(d)	RSS-GEN 7.2.2	Band-Edge & Unwanted Emissions into Restricted Frequency	TBBJ-20201111-18-2#	PASS	N/A
15.247(a)(2)	RSS 247 5.2 (1)	6dB Bandwidth	TBBJ-20201111-18-2#	PASS	N/A
15.247(b)(3)	RSS 247 5.4 (4)	Conducted Max Output Power	TBBJ-20201111-18-2#	PASS	N/A
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	TBBJ-20201111-18-2#	PASS	N/A
15.205, 15.209&15.247(d)	RSS 247 5.5	Transmitter Radiated Spurious &Unwanted Emissions into Restricted Frequency	TBBJ-20201111-18-2#	PASS	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 06, 2020	Jul. 05, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 06, 2020	Jul. 05, 2021
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 06, 2020	Jul. 05, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 06, 2020	Jul. 05, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 07, 2020	Jul. 06, 2021
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Mar.01, 2020	Feb. 28, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.01, 2020	Feb. 28, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard
FCC Part 15.207

5.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

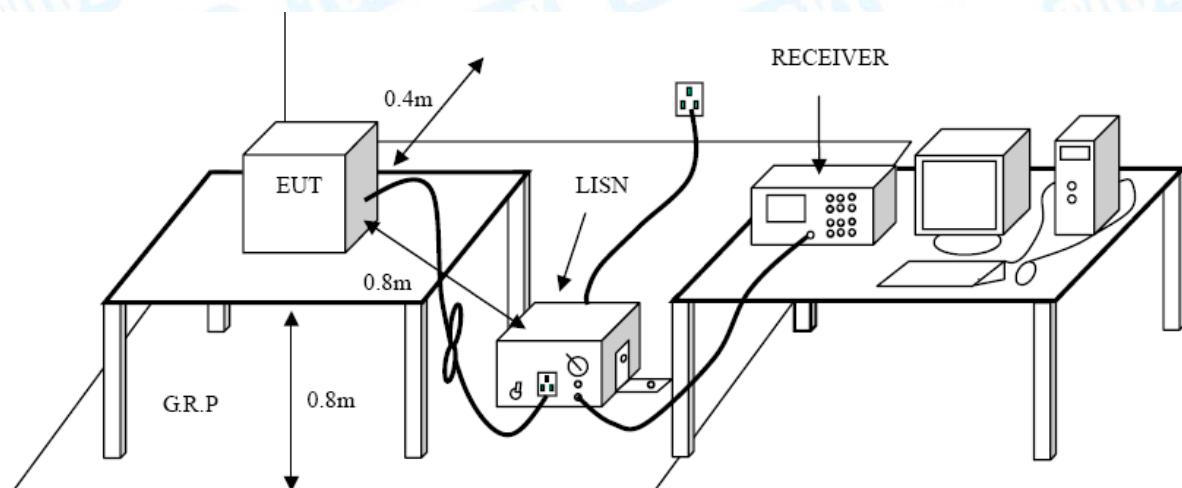

5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated Emission Test

6.1 Test Standard and Limit

- 6.1.1 Test Standard
FCC Part 15.247(d)
- 6.1.2 Test Limit

Radiated Emission Limits (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak (dBuV/m)	Average (dBuV/m)
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
(2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


6.2 Test Setup

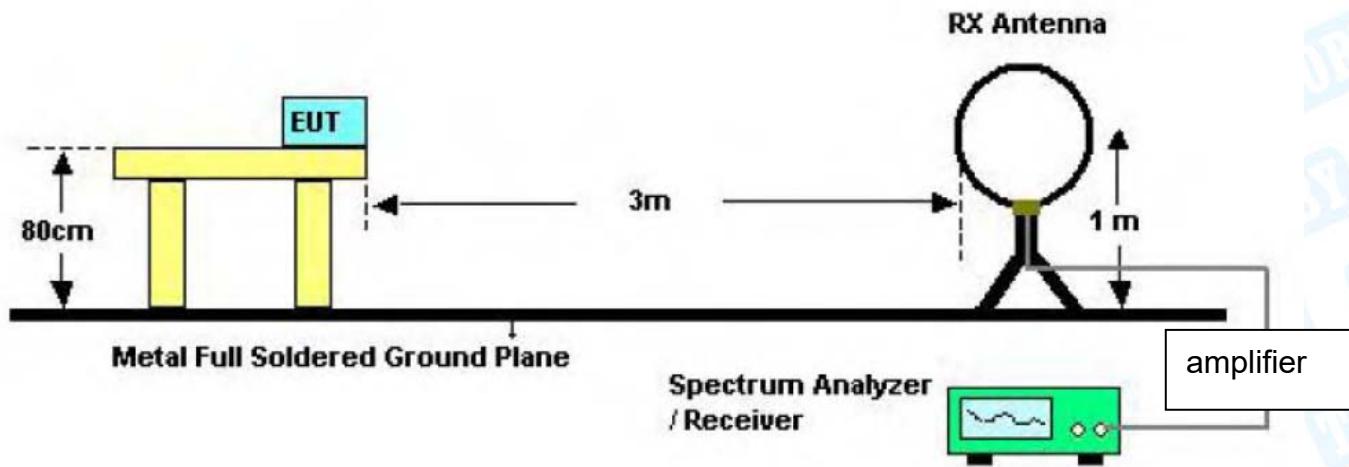

Below 30MHz Test Setup

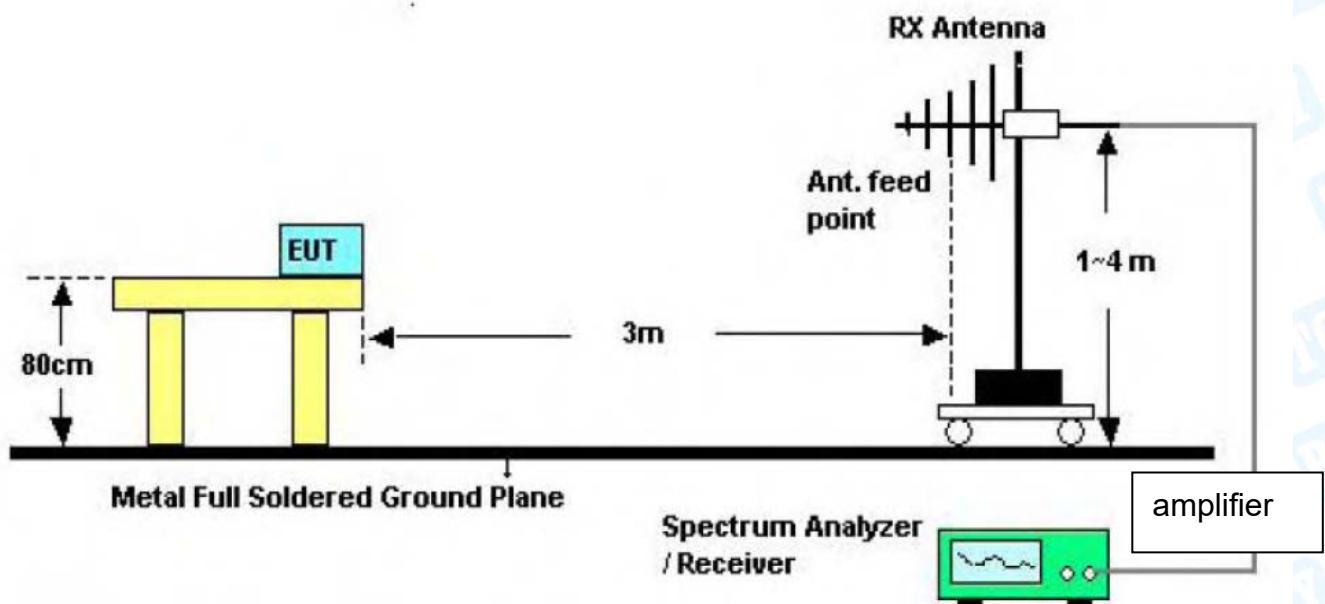

Below 1000MHz Test Setup

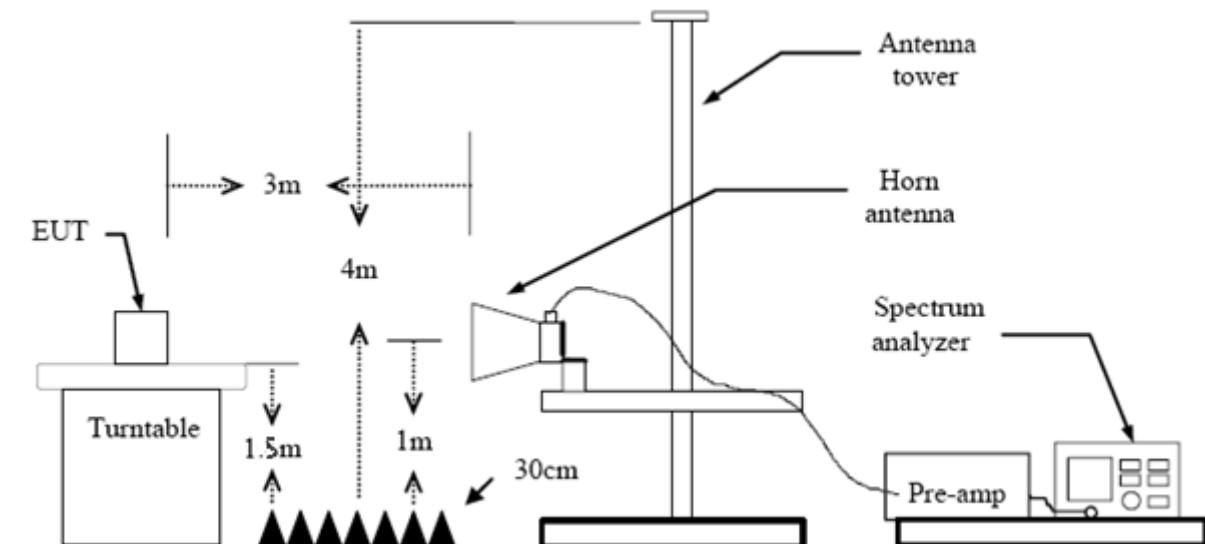

Above 1GHz Test Setup

6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

7. Restricted Bands Requirement

7.1 Test Standard and Limit

7.1.1 Test Standard


FCC Part 15.247(d)

FCC Part 15.205

7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance Meters(at 3m)	
	Peak (dBuV/m)	Average (dBuV/m)
2310 ~2390	74	54
2483.5 ~2500	74	54

7.2 Test Setup

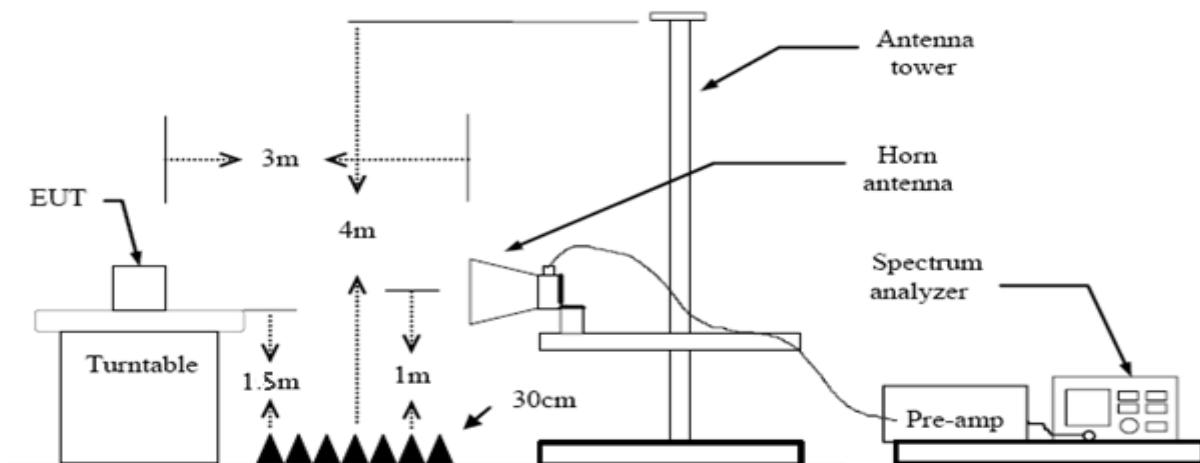

7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.

- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

7.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment C.


8. Bandwidth Test

8.1 Test Standard and Limit

- 8.1.1 Test Standard
FCC Part 15.247 (a)(2)
- 8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-247		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5

8.2 Test Setup

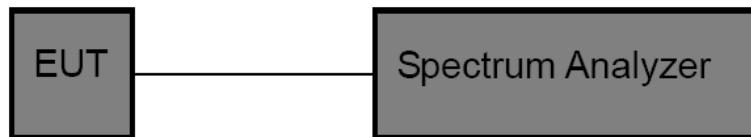

8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst -case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

8.6 Test Data

Please refer to the Attachment D.

9. Peak Output Power Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (b)(3)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-247		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

9.2 Test Setup

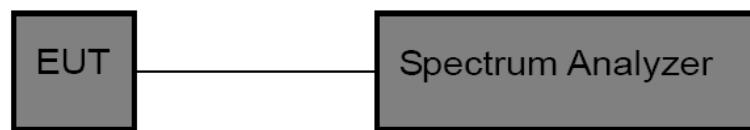

9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to section 9.1.1 of KDB 5558074 D01 15.247 Meas Guidance v05r02

Set the $RBW \geq DTS$ Bandwidth

- (1) Set $VBW \geq 2 * RBW$
- (2) Set Span $\geq 3 * RBW$
- (3) Sweep time=auto
- (4) Detector= peak
- (5) Trace mode= maxhold.
- (6) Allow trace to fully stabilize, and then use peak marker function to determine the peak amplitude level.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

9.6 Test Data

Please refer to the Attachment E.

10. Power Spectral Density Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247 (e)

10.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

10.2 Test Setup

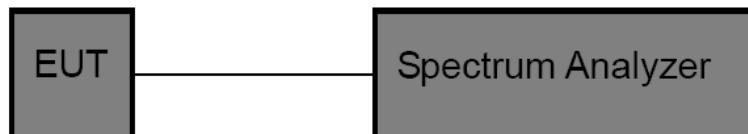

10.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 15.247 Meas Guidance v05r02

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to DTS channel centre frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

10.4 Deviation From Test Standard

No deviation

10.5 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

10.6 Test Data

Please refer to the Attachment F.

11. Antenna Requirement

11.1 Standard Requirement

10.1.1 Standard

FCC Part 15.203

10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Deviation From Test Standard

No deviation

11.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 4 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


11.4 Result

The EUT antenna is a Ceramic Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data

Temperature:	24.8 °C	Relative Humidity:	47%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported		

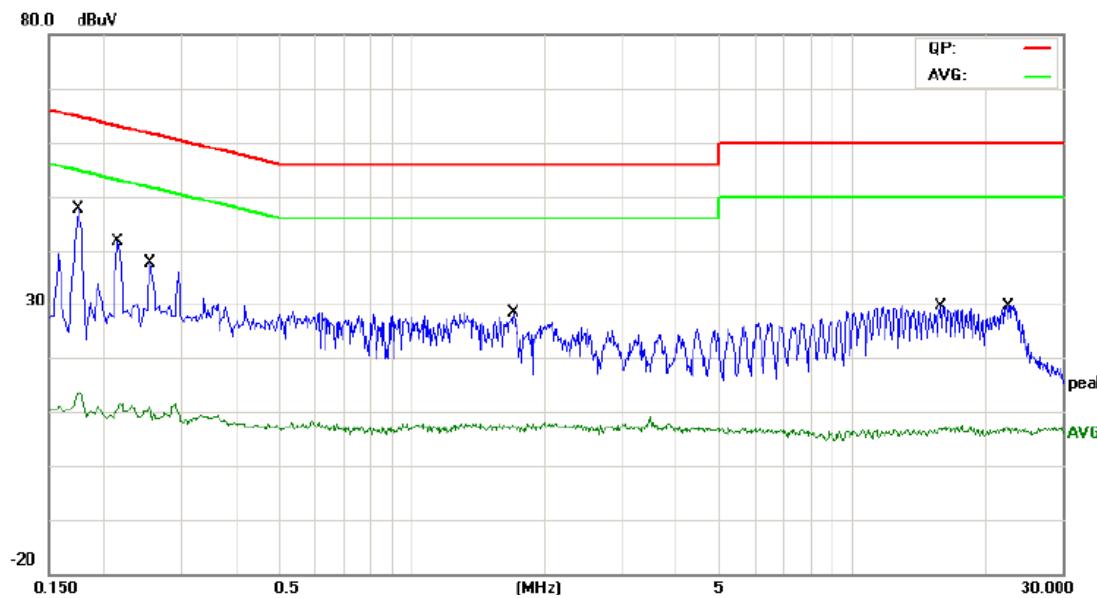

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Over Detector
1		0.1737	13.53	9.70	23.23	64.78	-41.55	QP
2		0.1737	-1.55	9.70	8.15	54.78	-46.63	AVG
3		0.2139	12.61	9.70	22.31	63.05	-40.74	QP
4		0.2139	-2.59	9.70	7.11	53.05	-45.94	AVG
5		0.2540	12.56	9.70	22.26	61.62	-39.36	QP
6		0.2540	-2.58	9.70	7.12	51.62	-44.50	AVG
7	*	1.7056	7.50	9.73	17.23	56.00	-38.77	QP
8		1.7056	-4.23	9.73	5.50	46.00	-40.50	AVG
9		15.8376	10.36	10.00	20.36	60.00	-39.64	QP
10		15.8376	-4.87	10.00	5.13	50.00	-44.87	AVG
11		22.5858	9.58	10.06	19.64	60.00	-40.36	QP
12		22.5858	-4.79	10.06	5.27	50.00	-44.73	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) =QuasiPeak/Average (dBuV)-Limit (dBuV)

Temperature:	24.8°C	Relative Humidity:	47%					
Test Voltage:	AC 120V/60 Hz							
Terminal:	Neutral							
Test Mode:	Mode 1							
Remark:	Only worse case is reported							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	dB Over Detector	
1	*	0.1620	22.46	9.80	32.26	65.36	-33.10	QP
2		0.1620	-0.75	9.80	9.05	55.36	-46.31	Avg
3		0.1779	16.33	9.80	26.13	64.58	-38.45	QP
4		0.1779	-1.68	9.80	8.12	54.58	-46.46	Avg
5		0.2162	16.32	9.80	26.12	62.96	-36.84	QP
6		0.2162	-0.70	9.80	9.10	52.96	-43.86	Avg
7		0.2379	16.32	9.80	26.12	62.17	-36.05	QP
8		0.2379	-2.51	9.80	7.29	52.17	-44.88	Avg
9		1.5020	6.35	9.80	16.15	56.00	-39.85	QP
10		1.5020	-4.36	9.80	5.44	46.00	-40.56	Avg
11		5.7019	6.40	9.84	16.24	60.00	-43.76	QP
12		5.7019	-4.71	9.84	5.13	50.00	-44.87	Avg
Remark:								
1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)								
2. Margin (dB) = QuasiPeak/Average (dBuV)-Limit (dBuV)								


Attachment B-- Radiated Emission Test Data

9KHz~30MHz


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

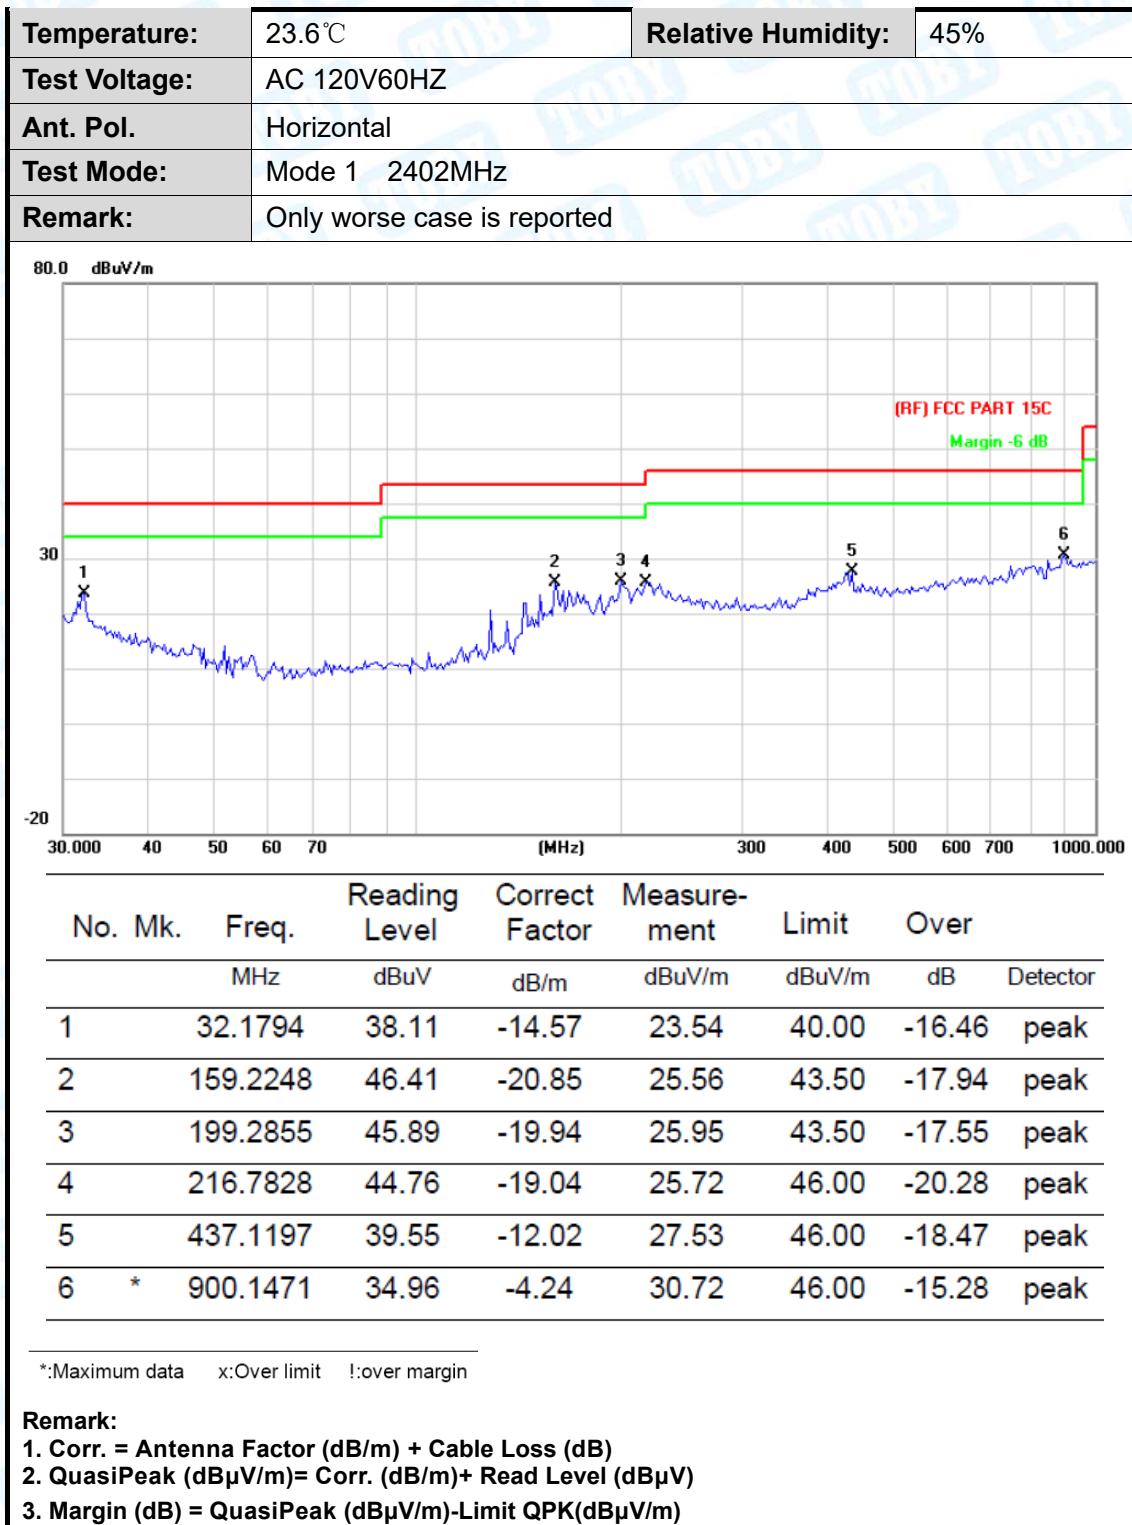

Temperature:	23.6°C	Relative Humidity:	45%
Test Voltage:	AC 120V60HZ		
Ant. Pol.	Vertical		
Test Mode:	Mode 1 2402MHz		
Remark:	Only worse case is reported		

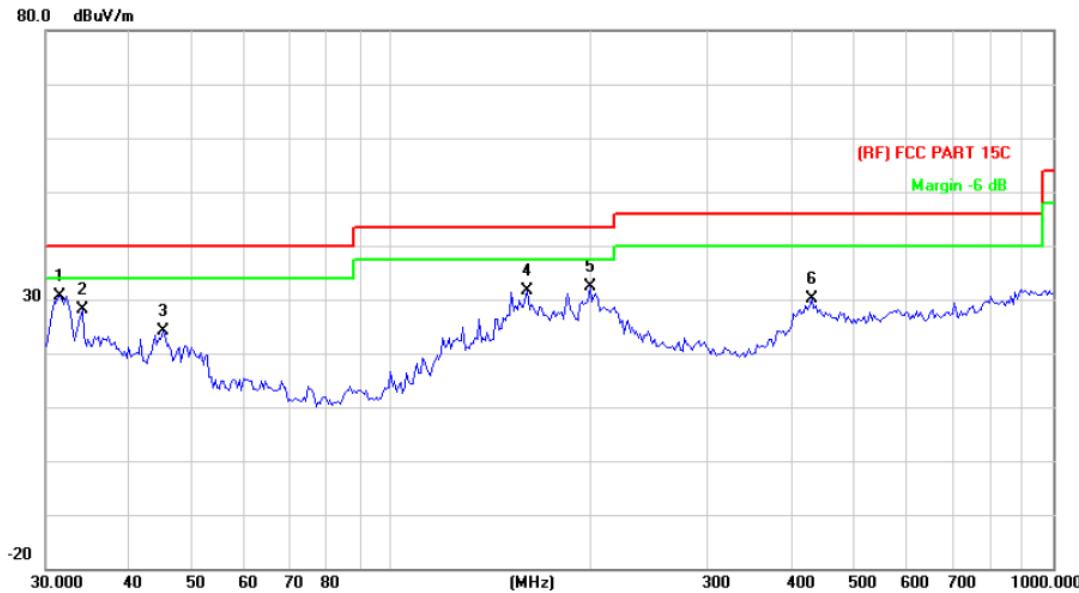

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB/m	ment dBuV/m		
1	*	31.5091	44.80	-14.08	30.72	40.00	-9.28 peak
2		34.0363	44.00	-15.96	28.04	40.00	-11.96 peak
3		45.0583	45.55	-21.44	24.11	40.00	-15.89 peak
4		160.3454	52.45	-20.79	31.66	43.50	-11.84 peak
5		199.2855	52.38	-19.94	32.44	43.50	-11.06 peak
6		431.0316	42.12	-12.07	30.05	46.00	-15.95 peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Above 1GHz(Only worse case is reported)

Temperature:	23.3°C		Relative Humidity:	43%																																		
Test Voltage:	DC 5V																																					
Ant. Pol.	Horizontal																																					
Test Mode:	BLE(1Mbps) Mode 2402MHz																																					
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measure-ment</th> <th>Limit</th> <th>Over</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBμV</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4803.800</td> <td>29.15</td> <td>13.01</td> <td>42.16</td> <td>54.00</td> <td>-11.84</td> </tr> <tr> <td>2</td> <td></td> <td>4804.100</td> <td>47.29</td> <td>13.01</td> <td>60.30</td> <td>74.00</td> <td>-13.70</td> </tr> </tbody> </table>							No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over			MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	1	*	4803.800	29.15	13.01	42.16	54.00	-11.84	2		4804.100	47.29	13.01	60.30	74.00	-13.70
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over																															
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB																															
1	*	4803.800	29.15	13.01	42.16	54.00	-11.84																															
2		4804.100	47.29	13.01	60.30	74.00	-13.70																															
Remark:	1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V) 3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)																																					

Temperature:	23.3°C		Relative Humidity:	43%																																		
Test Voltage:	DC 5V																																					
Ant. Pol.	Vertical																																					
Test Mode:	BLE(1Mbps) Mode 2402MHz																																					
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measure-ment</th> <th>Limit</th> <th>Over</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBμV</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4803.366</td> <td>33.19</td> <td>13.01</td> <td>46.20</td> <td>54.00</td> <td>-7.80</td> </tr> <tr> <td>2</td> <td></td> <td>4804.200</td> <td>49.16</td> <td>13.02</td> <td>62.18</td> <td>74.00</td> <td>-11.82</td> </tr> </tbody> </table>							No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over			MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	1	*	4803.366	33.19	13.01	46.20	54.00	-7.80	2		4804.200	49.16	13.02	62.18	74.00	-11.82
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over																															
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB																															
1	*	4803.366	33.19	13.01	46.20	54.00	-7.80																															
2		4804.200	49.16	13.02	62.18	74.00	-11.82																															
Remark:	1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V) 3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)																																					

Temperature:	23.3 °C		Relative Humidity:	43%					
Test Voltage:	DC 5V								
Ant. Pol.	Horizontal								
Test Mode:	BLE(1Mbps) Mode 2442MHz								
Remark:	No report for the emission which more than 20 dB below the prescribed limit.								
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
1	*	4883.791	47.94	13.59	61.53	74.00	-12.47	peak	
2	*	4884.064	32.00	13.60	45.60	54.00	-8.40	AVG	

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C		Relative Humidity:	43%					
Test Voltage:	DC 5V								
Ant. Pol.	Vertical								
Test Mode:	BLE(1Mbps) Mode 2442MHz								
Remark:	No report for the emission which more than 20 dB below the prescribed limit.								
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
1	*	4883.856	31.98	13.60	45.58	54.00	-8.42	AVG	
2		4884.172	47.67	13.60	61.27	74.00	-12.73	peak	

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Horizontal						
Test Mode:	BLE(1Mbps) Mode 2480MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB Detector
1	*	4959.695	29.02	14.15	43.17	54.00	-10.83 AVG
2		4960.311	47.85	14.16	62.01	74.00	-11.99 peak

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
 3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Vertical						
Test Mode:	BLE(1Mbps) Mode 2480MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB Detector
1		4959.662	47.34	14.15	61.49	74.00	-12.51 peak
2	*	4960.311	30.89	14.16	45.05	54.00	-8.95 AVG

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
 3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	BLE(2Mbps) Mode 2402MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB
1	*	4804.160	33.50	13.01	46.51	54.00	-7.49
2		4804.211	48.00	13.02	61.02	74.00	-12.98

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	BLE(2Mbps) Mode 2402MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB
1	*	4804.101	32.91	13.01	45.92	54.00	-8.08
2		4804.265	49.39	13.02	62.41	74.00	-11.59

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Horizontal						
Test Mode:	BLE(2Mbps) Mode 2442MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB Detector
1		4884.055	47.42	13.60	61.02	74.00	-12.98 peak
2	*	4884.621	30.67	13.61	44.28	54.00	-9.72 AVG

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
 3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Vertical						
Test Mode:	BLE(2Mbps) Mode 2442MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB Detector
1		4883.699	47.93	13.59	61.52	74.00	-12.48 peak
2	*	4884.022	33.13	13.60	46.73	54.00	-7.27 AVG

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
 3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Horizontal						
Test Mode:	BLE(2Mbps) Mode 2480MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB Detector
1		4959.582	46.23	14.15	60.38	74.00	-13.62 peak
2	*	4960.115	31.49	14.15	45.64	54.00	-8.36 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Vertical						
Test Mode:	BLE(2Mbps) Mode 2480MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB Detector
1		4959.288	46.41	14.15	60.56	74.00	-13.44 peak
2	*	4960.351	33.20	14.16	47.36	54.00	-6.64 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)


Attachment C-- Restricted Bands Requirement and Band Edge Test Data

(1) Radiation Test

Temperature:	23.3°C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Horizontal						
Test Mode:	TX BLE(1Mbps) Mode 2402MHz						
Remark:	Only worse case is reported						
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over Detector
1	X	2390.000	39.39	9.83	49.22	74.00	-24.78
2		2390.000	27.88	9.83	37.71	54.00	-16.29
3	X	2402.200	81.53	9.88	91.41	Fundamental Frequency	
4	*	2402.200	70.86	9.88	80.74	Fundamental Frequency	

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX BLE(1Mbps) Mode 2402MHz		
Remark:	Only worse case is reported		

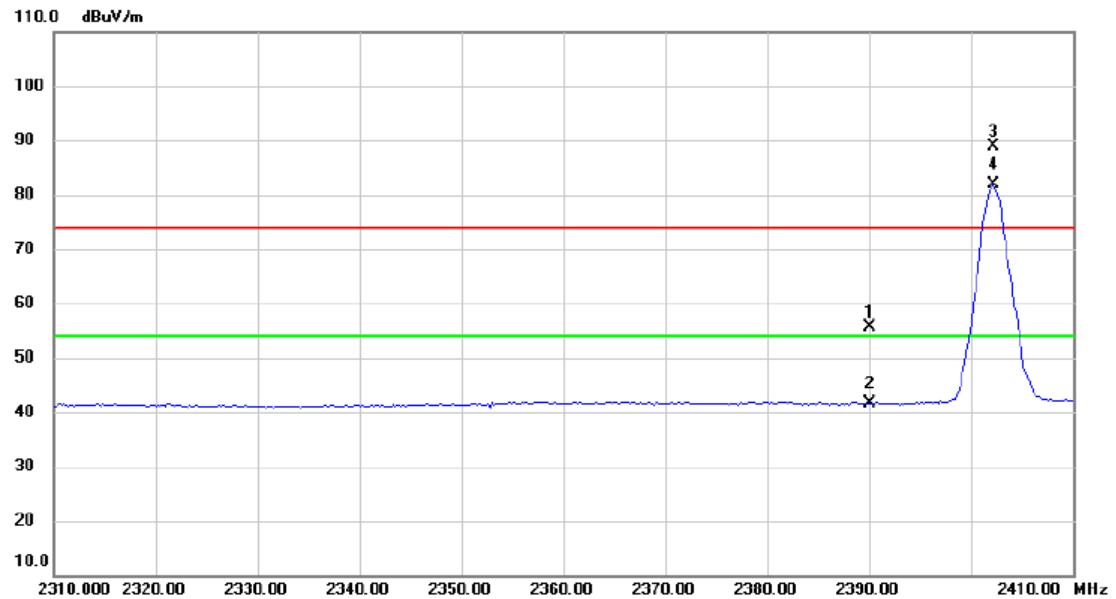


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2390.000	44.22	11.48	55.70	74.00	-18.30	peak
2		2390.000	30.18	11.48	41.66	54.00	-12.34	AVG
3	X	2402.200	77.22	11.56	88.78	Fundamental Frequency		peak
4	*	2402.200	70.22	11.56	81.78	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX BLE(1Mbps) Mode 2480 MHz		
Remark:	Only worse case is reported		

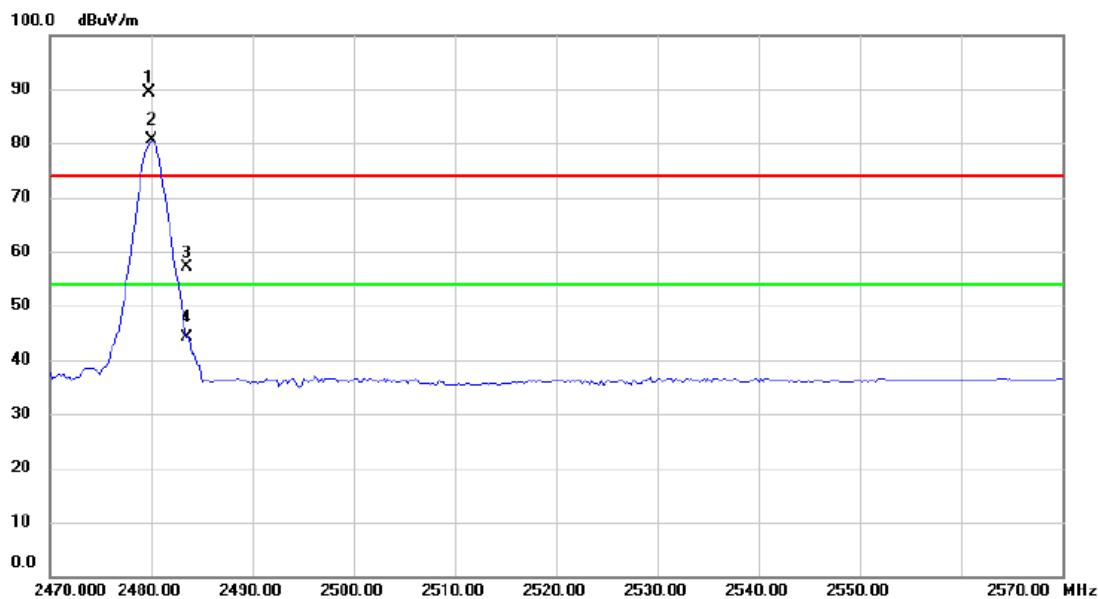


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	X	2479.800	87.47	1.85	89.32	Fundamental Frequency	peak	
2	*	2480.000	78.87	1.85	80.72	Fundamental Frequency	AVG	
3		2483.500	55.21	1.88	57.09	74.00	-16.91	peak
4		2483.500	42.17	1.88	44.05	54.00	-9.95	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX BLE(1Mbps) Mode 2480 MHz		
Remark:	Only worse case is reported		

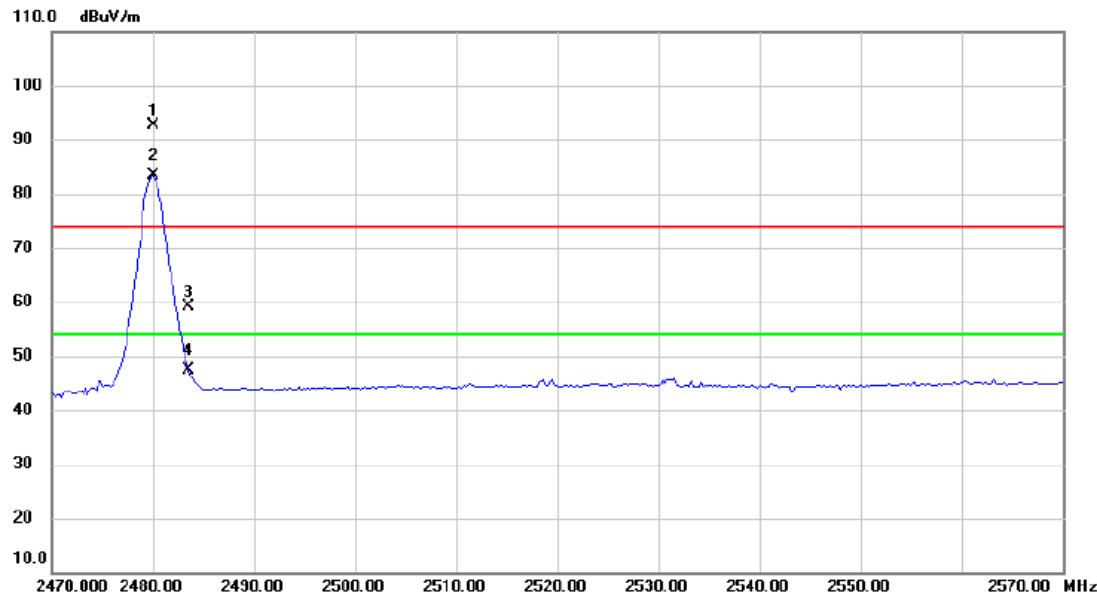

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB
1	X	2480.000	80.57	12.11	92.68	Fundamental Frequency	peak
2	*	2480.000	71.27	12.11	83.38	Fundamental Frequency	AVG
3		2483.500	47.03	12.14	59.17	74.00	-14.83
4		2483.500	35.27	12.14	47.41	54.00	-6.59

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3°C	Relative Humidity:	43%					
Test Voltage:	DC 5V							
Ant. Pol.	Horizontal							
Test Mode:	BLE(2Mbps) Mode 2402MHz							
Remark:	Only worse case is reported							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	Detector
1		2390.000	44.54	11.48	56.02	74.00	-17.98	peak
2		2390.000	34.31	11.48	45.79	54.00	-8.21	Avg
3	*	2402.000	73.21	11.56	84.77	Fundamental Frequency		Avg
4	X	2402.200	84.58	11.56	96.14	Fundamental Frequency		Peak


Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/Avg (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Peak/Avg (dB μ V/m) - Limit PK/Avg(dB μ V/m)

Temperature:	23.3°C	Relative Humidity:	43%				
Test Voltage:	DC 5V						
Ant. Pol.	Vertical						
Test Mode:	BLE(2Mbps) Mode 2402MHz						
Remark:	Only worse case is reported						
<p>100.0 dBuV/m</p> <p>90</p> <p>80</p> <p>70</p> <p>60</p> <p>50</p> <p>40</p> <p>30</p> <p>20</p> <p>10</p> <p>0.0</p> <p>2310.000 2320.00 2330.00 2340.00 2350.00 2360.00 2370.00 2380.00 2390.00 2402.00 2410.00 MHz</p>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		2390.000	42.77	11.48	54.25	74.00	-19.75 peak
2		2390.000	32.21	11.48	43.69	54.00	-10.31 AVG
3	X	2402.000	82.05	11.56	93.61	Fundamental Frequency	peak
4	*	2402.200	71.26	11.56	82.82	Fundamental Frequency	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3°C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	BLE(2Mbps) Mode 2480MHz		
Remark:	Only worse case is reported		

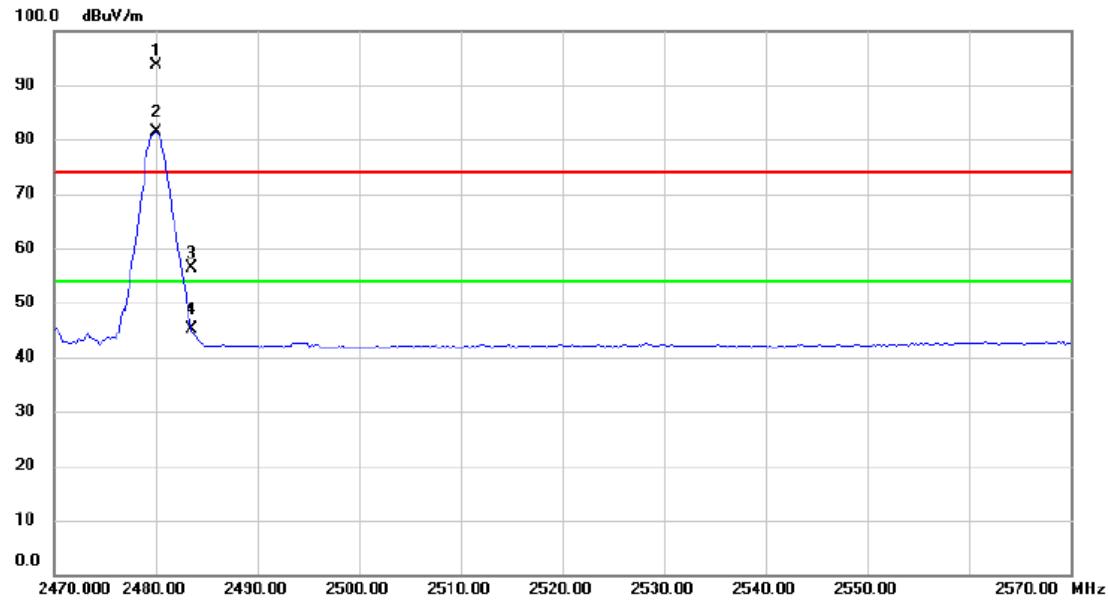


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB	Detector
1	X	2480.000	81.49	12.11	93.60	Fundamental Frequency	peak
2	*	2480.000	69.28	12.11	81.39	Fundamental Frequency	AVG
3		2483.500	44.30	12.14	56.44	74.00	-17.56
4		2483.500	32.96	12.14	45.10	54.00	-8.90

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

Temperature:	23.3 °C	Relative Humidity:	43%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	BLE(2Mbps) Mode 2480MHz		
Remark:	Only worse case is reported		

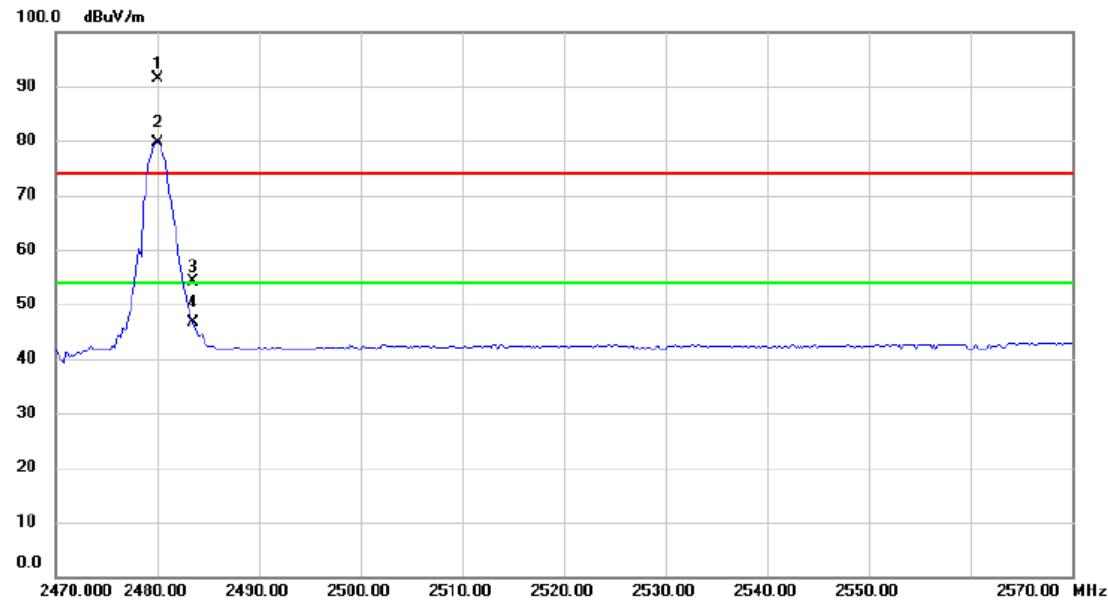



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1	X	2480.000	79.19	12.11	91.30	Fundamental Frequency	peak
2	*	2480.000	67.63	12.11	79.74	Fundamental Frequency	AVG
3		2483.500	41.97	12.14	54.11	74.00	-19.89
4		2483.500	34.43	12.14	46.57	54.00	-7.43

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dB μ V/m)= Corr. (dB/m)+ Read Level (dB μ V)
3. Margin (dB) = Peak/AVG (dB μ V/m)-Limit PK/AVG(dB μ V/m)

(2) Conducted Test

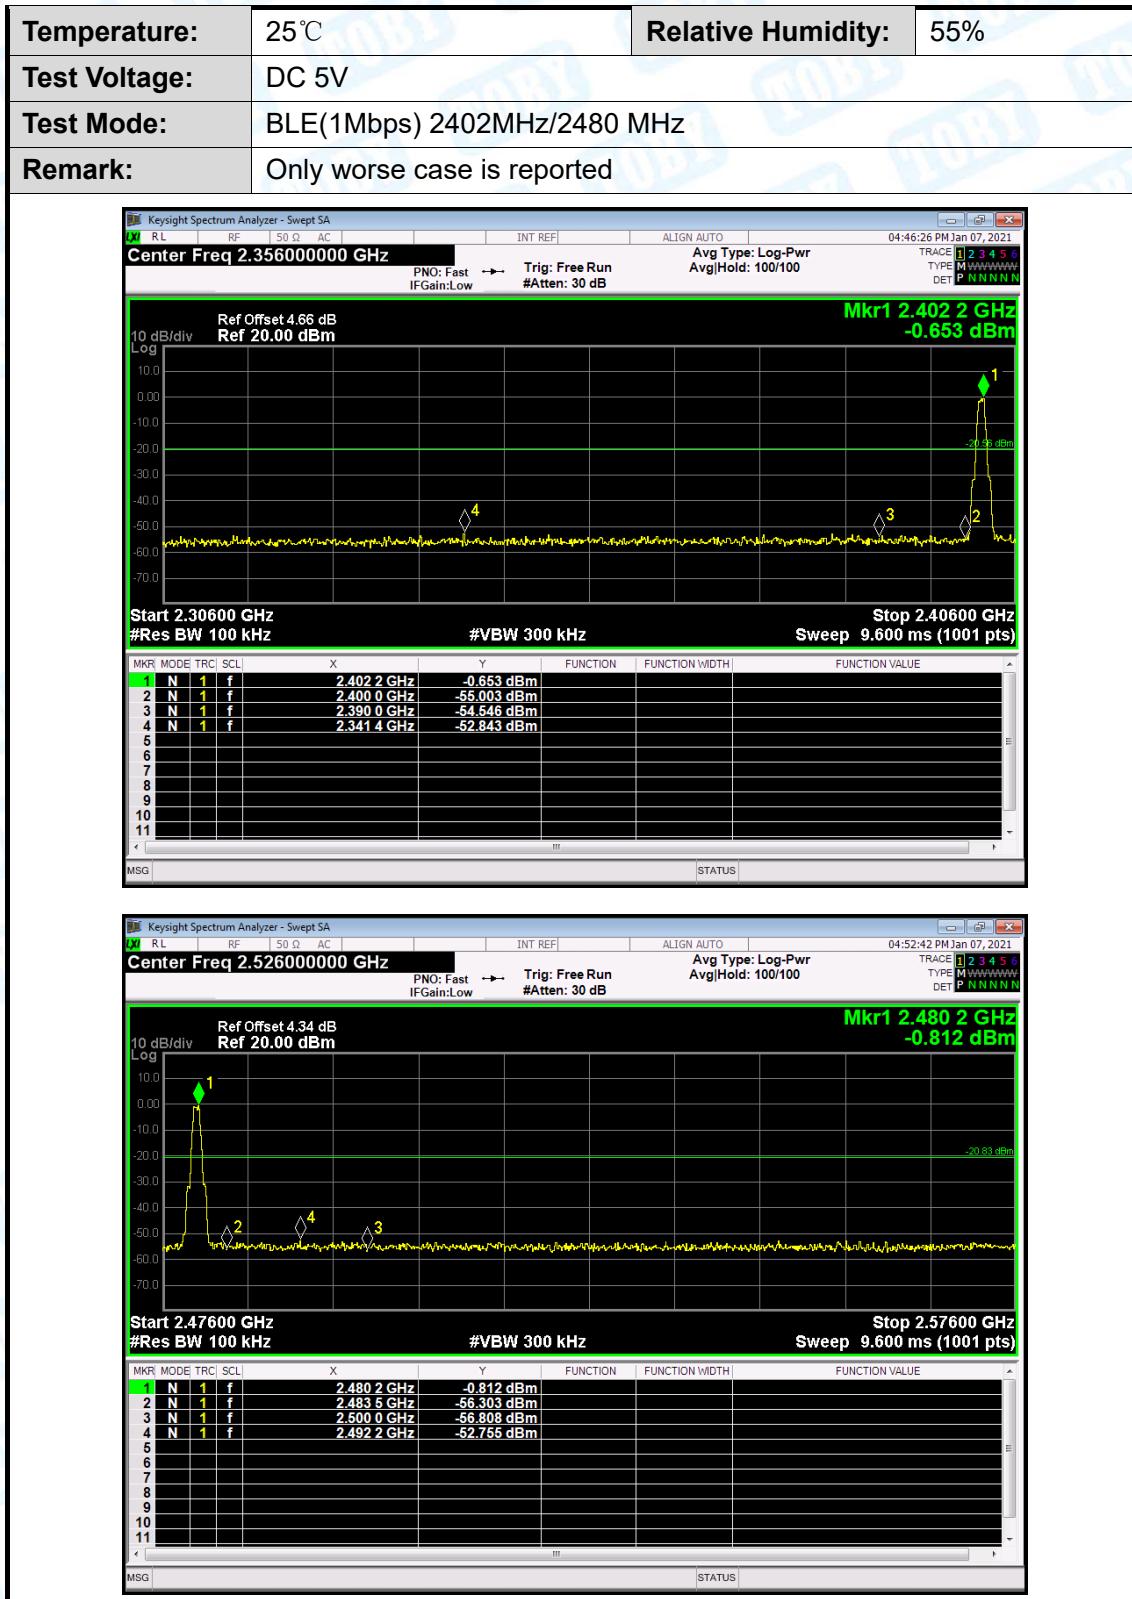

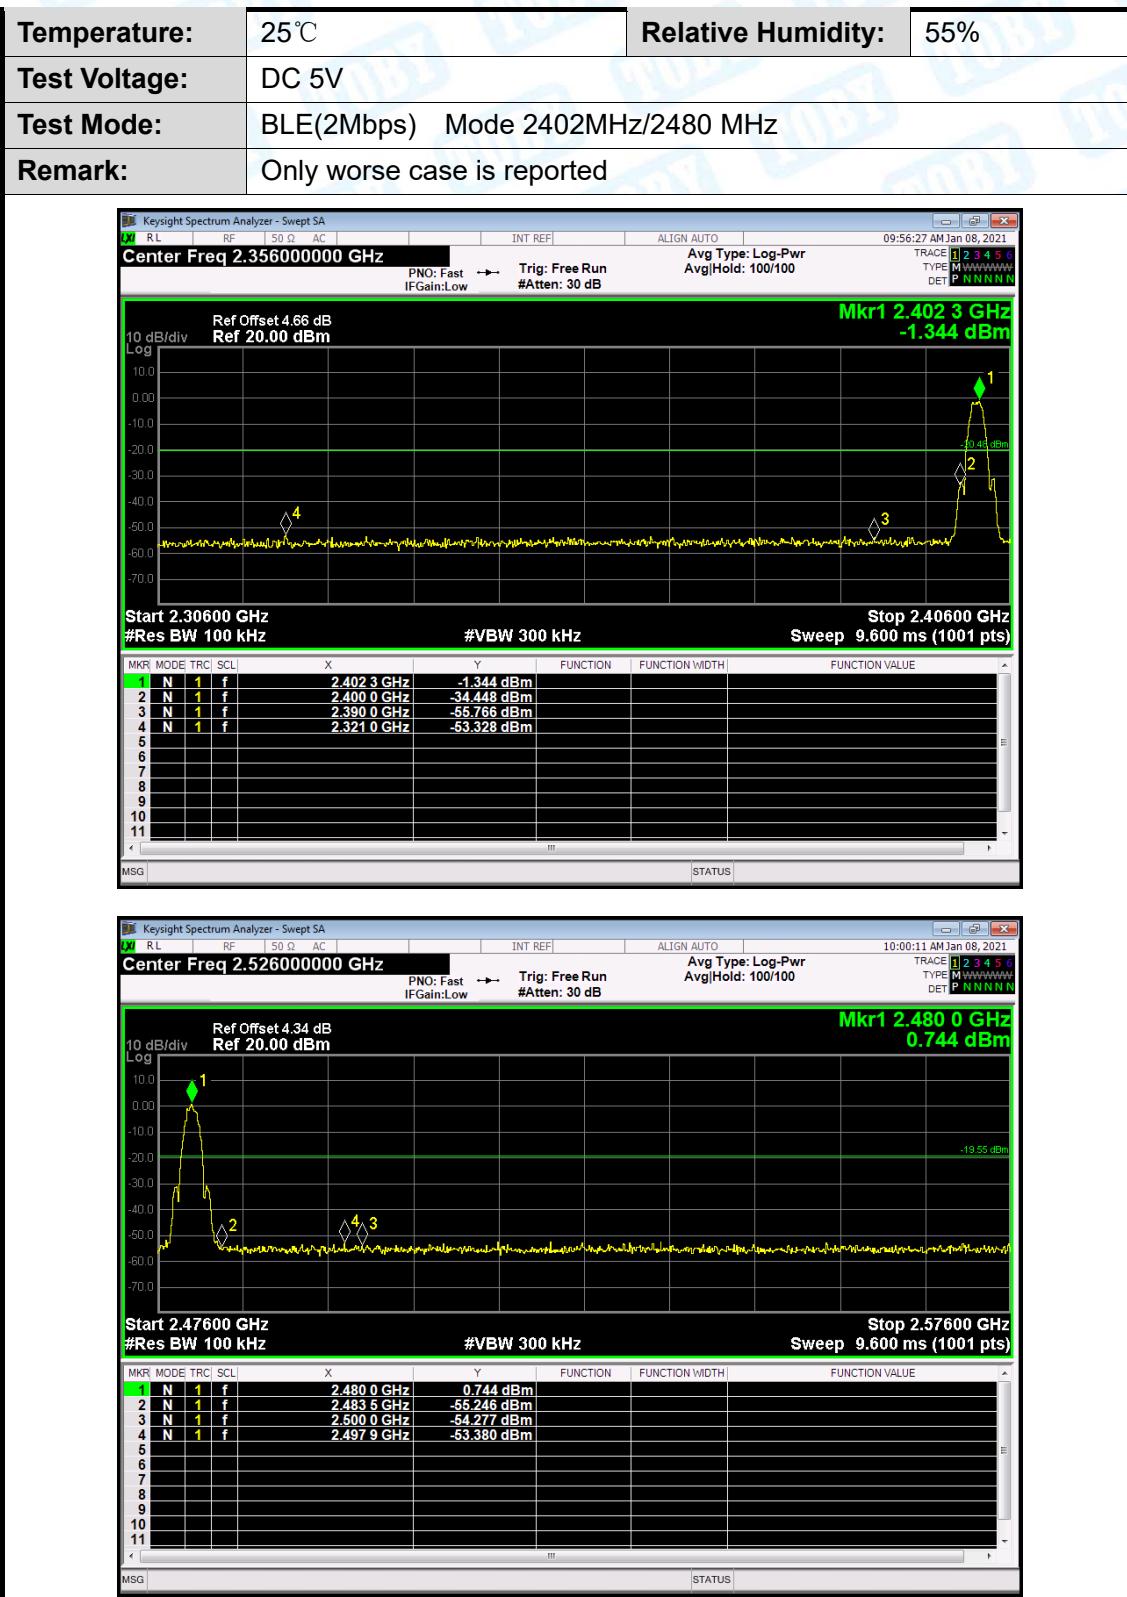


Attachment D-- Channel Separation and Bandwidth

Test Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	BLE TX Mode(1M)		
Channel frequency (MHz)	6dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)
2402	664.1	1021.6	
2442	670.7	1023.7	>=500
2480	660.0	1031.2	


BLE(1Mbps) TX Mode

2402 MHz

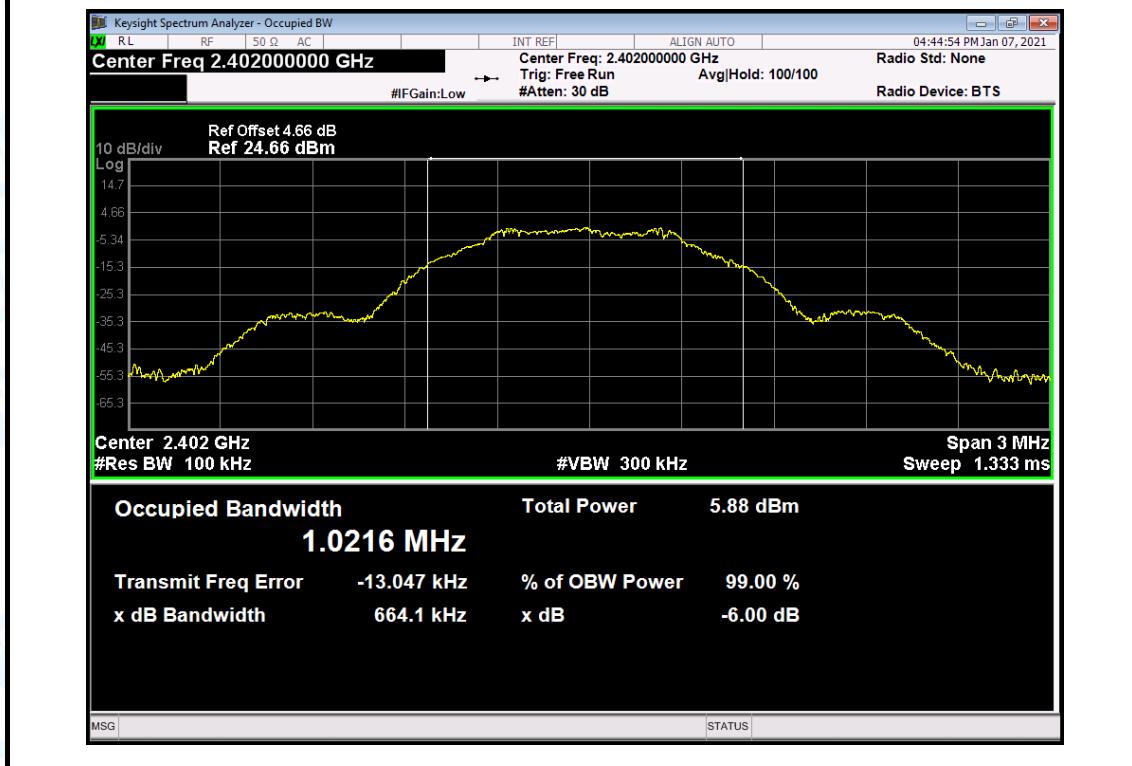


BLE(1Mbps) TX Mode

2442 MHz

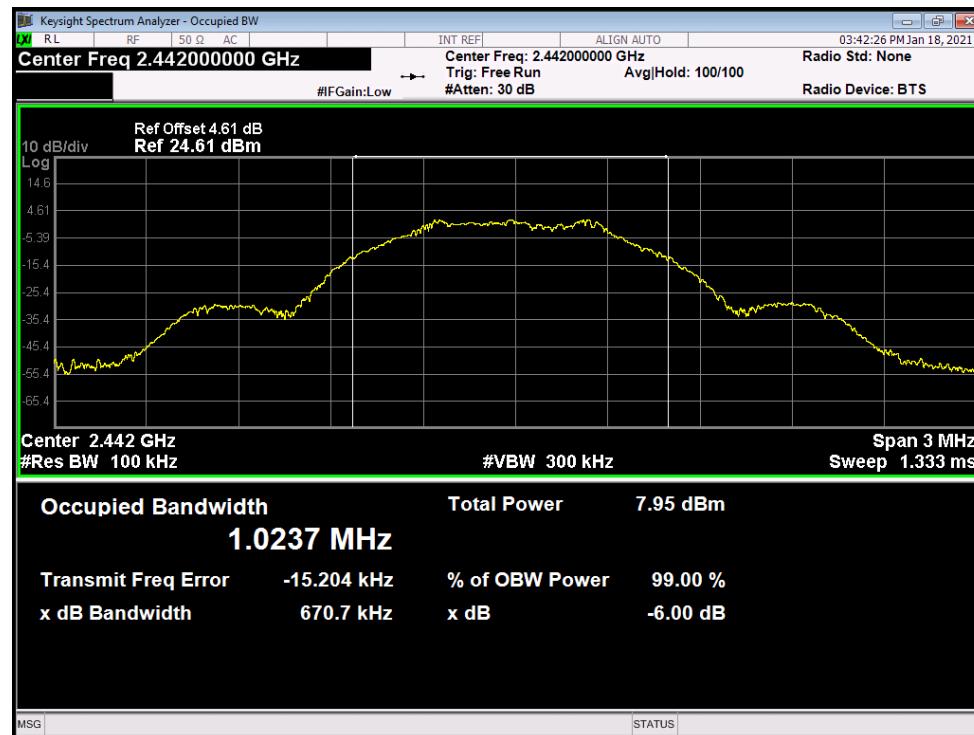



BLE(1Mbps) TX Mode

2480 MHz

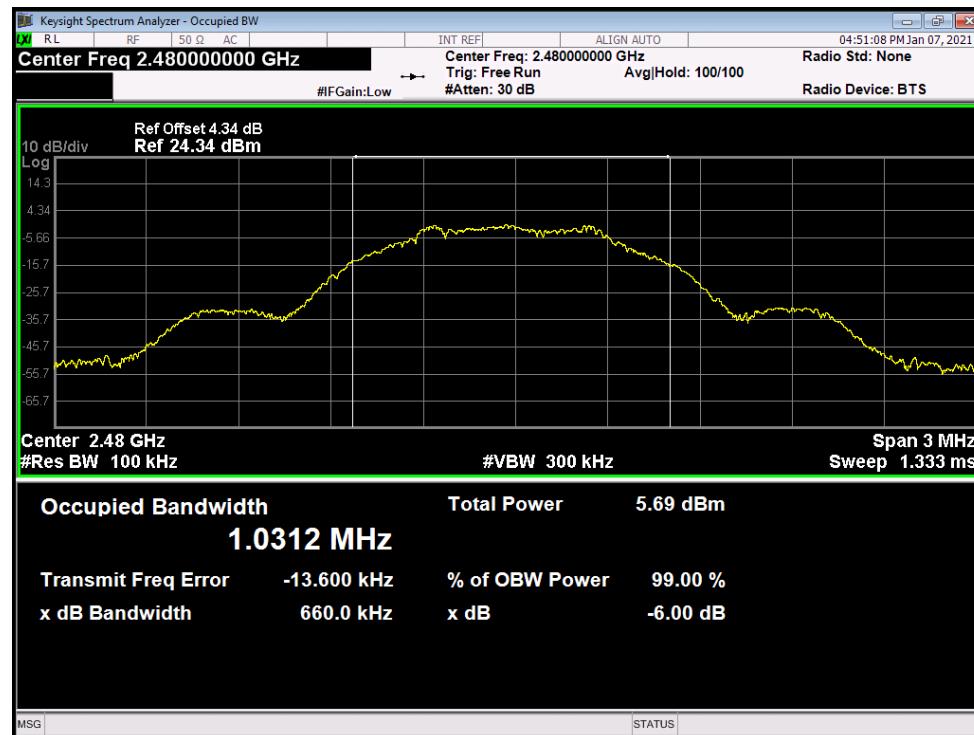



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	BLE TX Mode(2 Mbps)		
Channel frequency (MHz)	6dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)
2402	840.6	2073.1	
2442	865.5	2081.8	>=500
2480	863.0	2090.3	

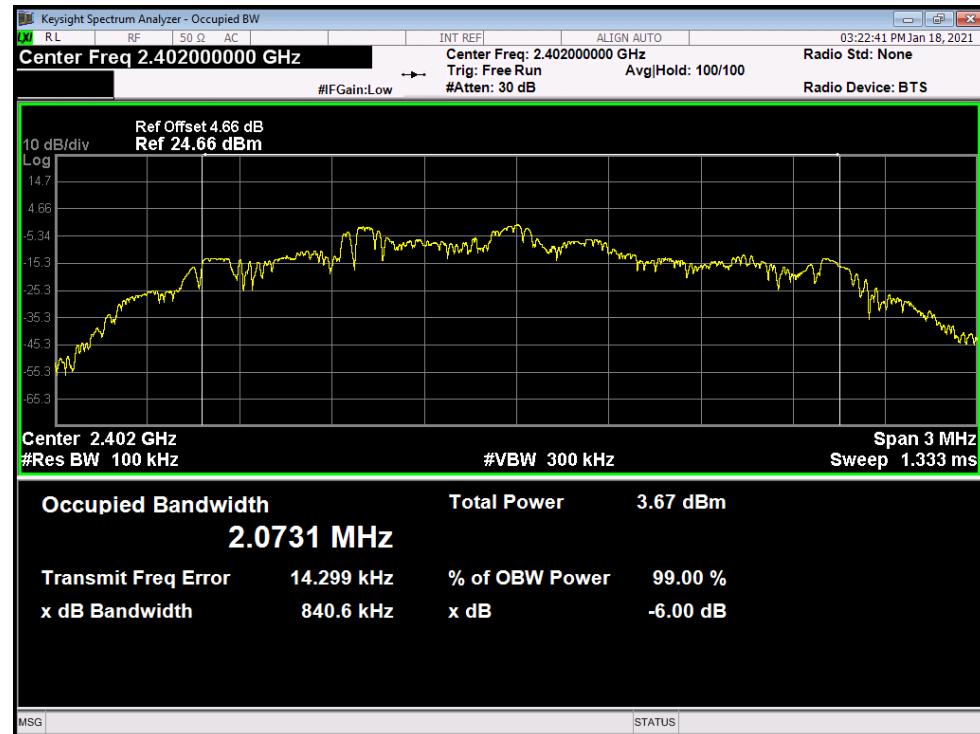
2402 MHz

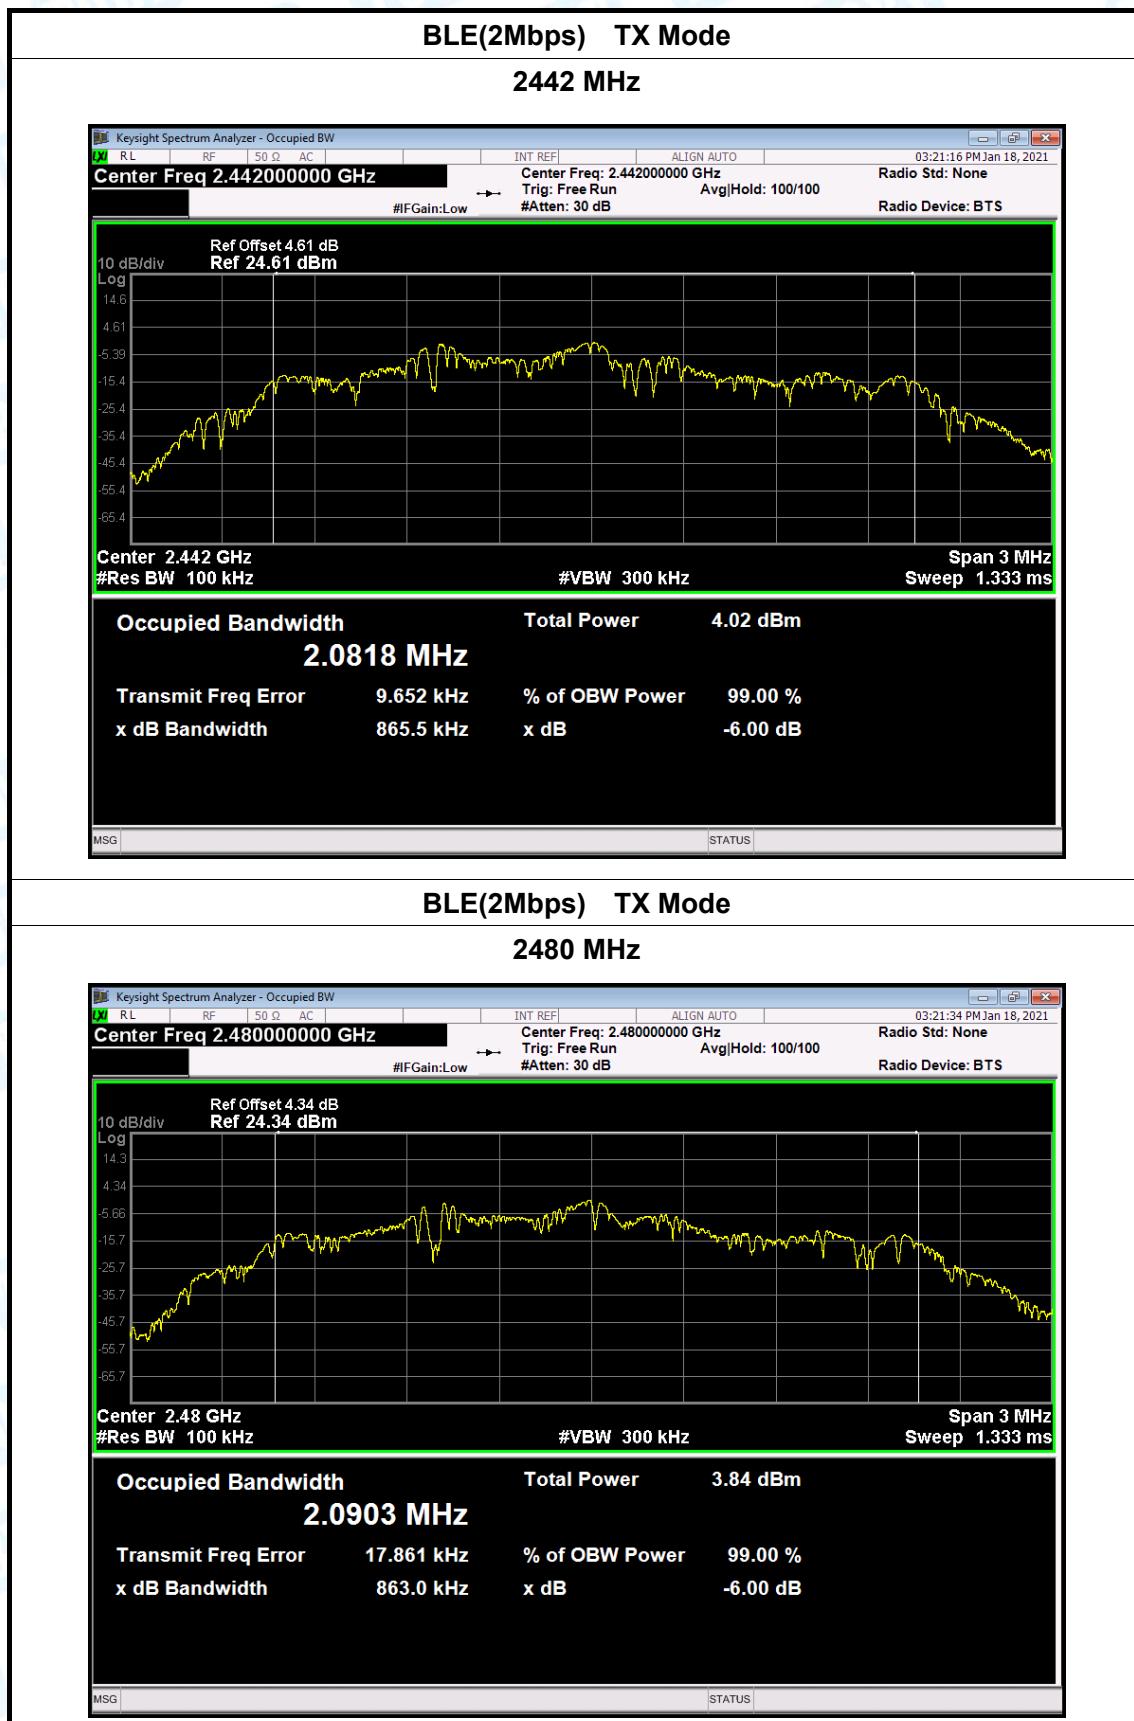


Attachment E-- Peak Output Power Test Data

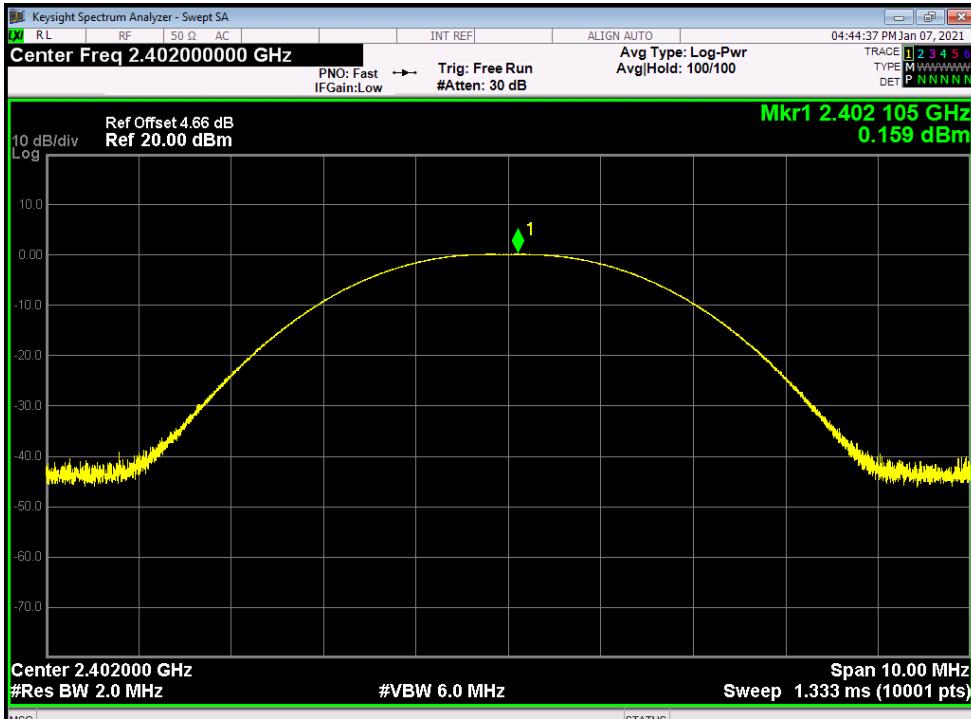
Temperature:	25°C	Relative Humidity:	55%		
Test Voltage:	DC 5V				
Test Mode:	TX Mode (BLE1Mbps)				
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)			
2402	0.159	30			
2442	0.623				
2480	0.030				
BLE(1Mbps) TX Mode					
2402 MHz					
					

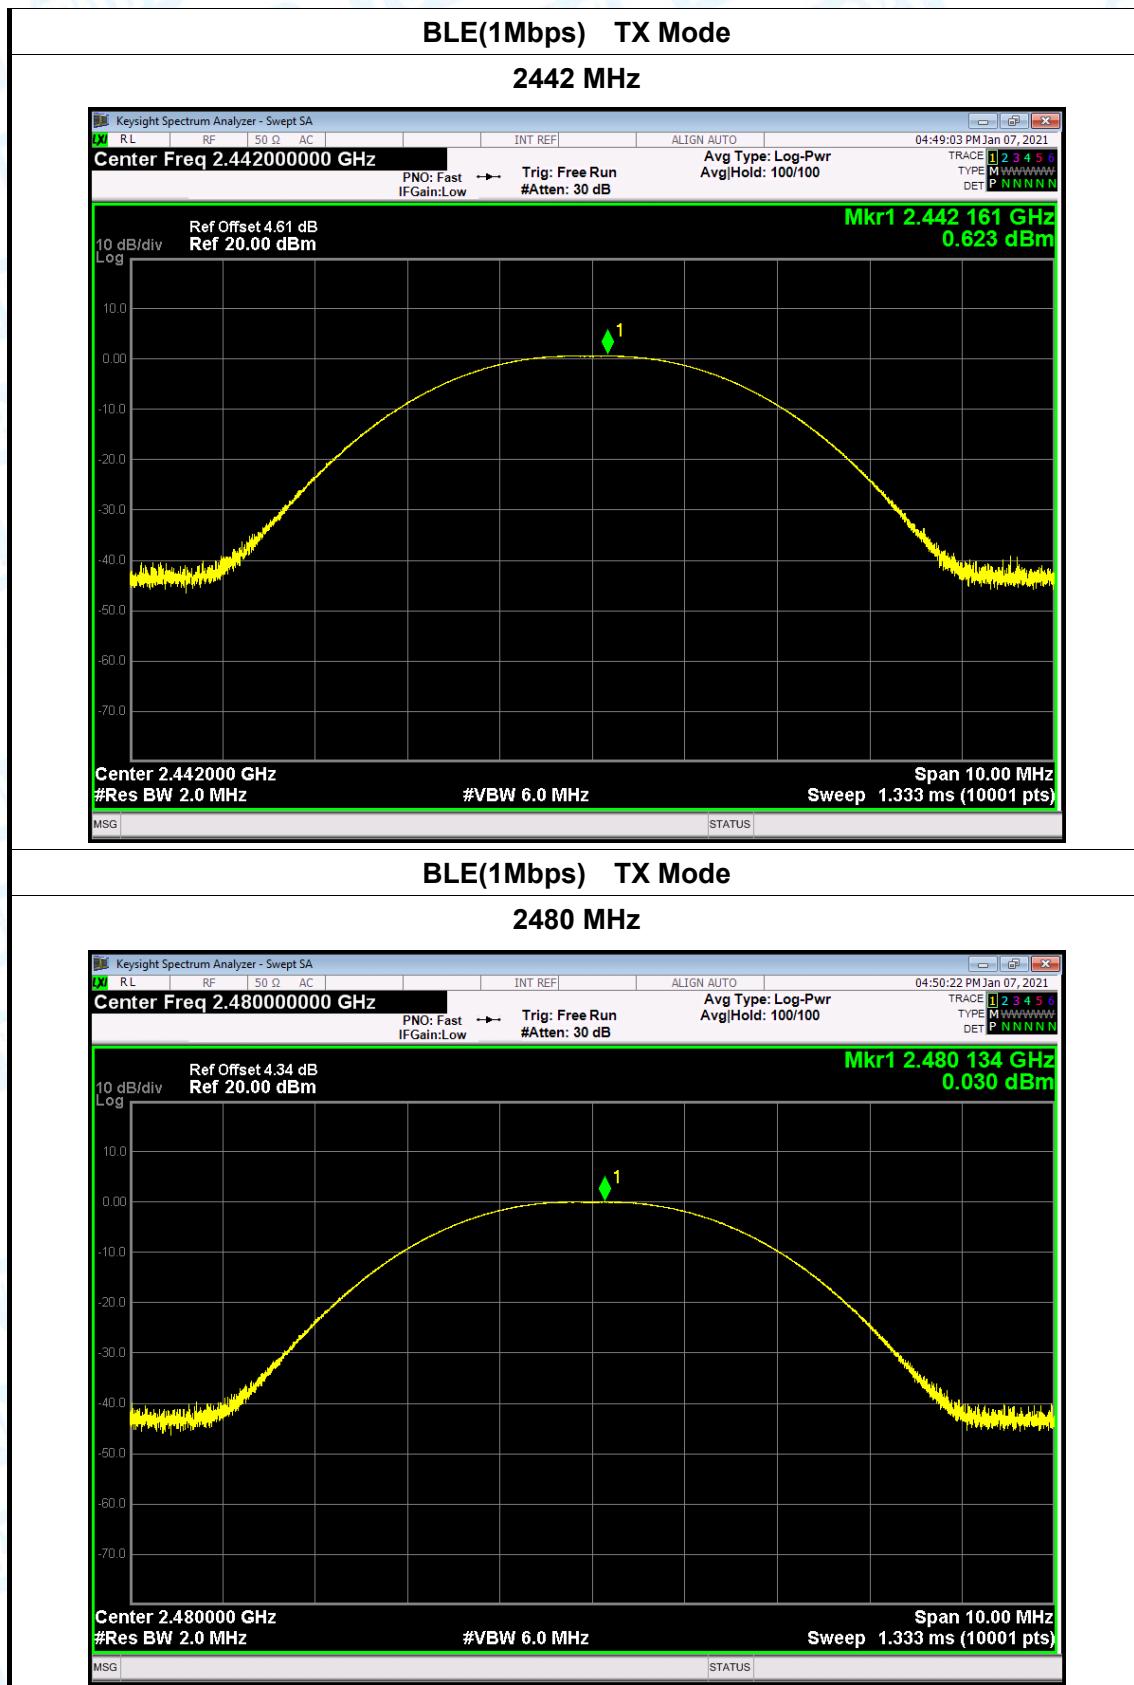


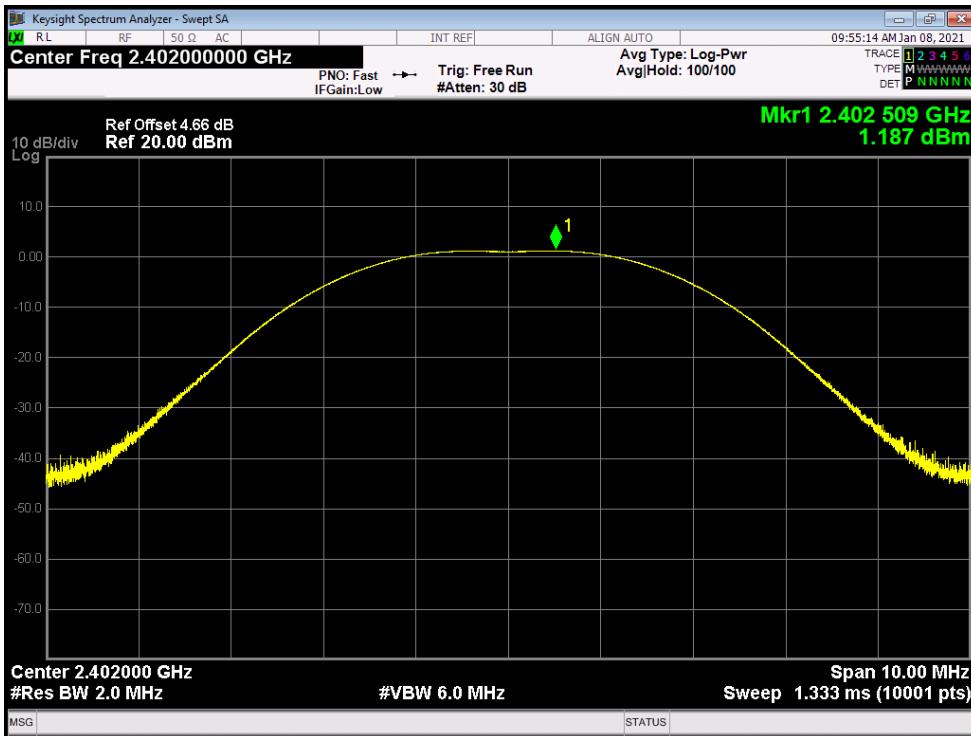Temperature:	25°C	Relative Humidity:	55%				
Test Voltage:	DC 5V						
Test Mode:	TX Mode (BLE2Mbps)						
Channel frequency (MHz)	Test Result (dBm)		Limit (dBm)				
2402	1.187		30				
2442	2.555						
2480	2.017						
BLE(2Mbps) TX Mode							
2402 MHz							
							

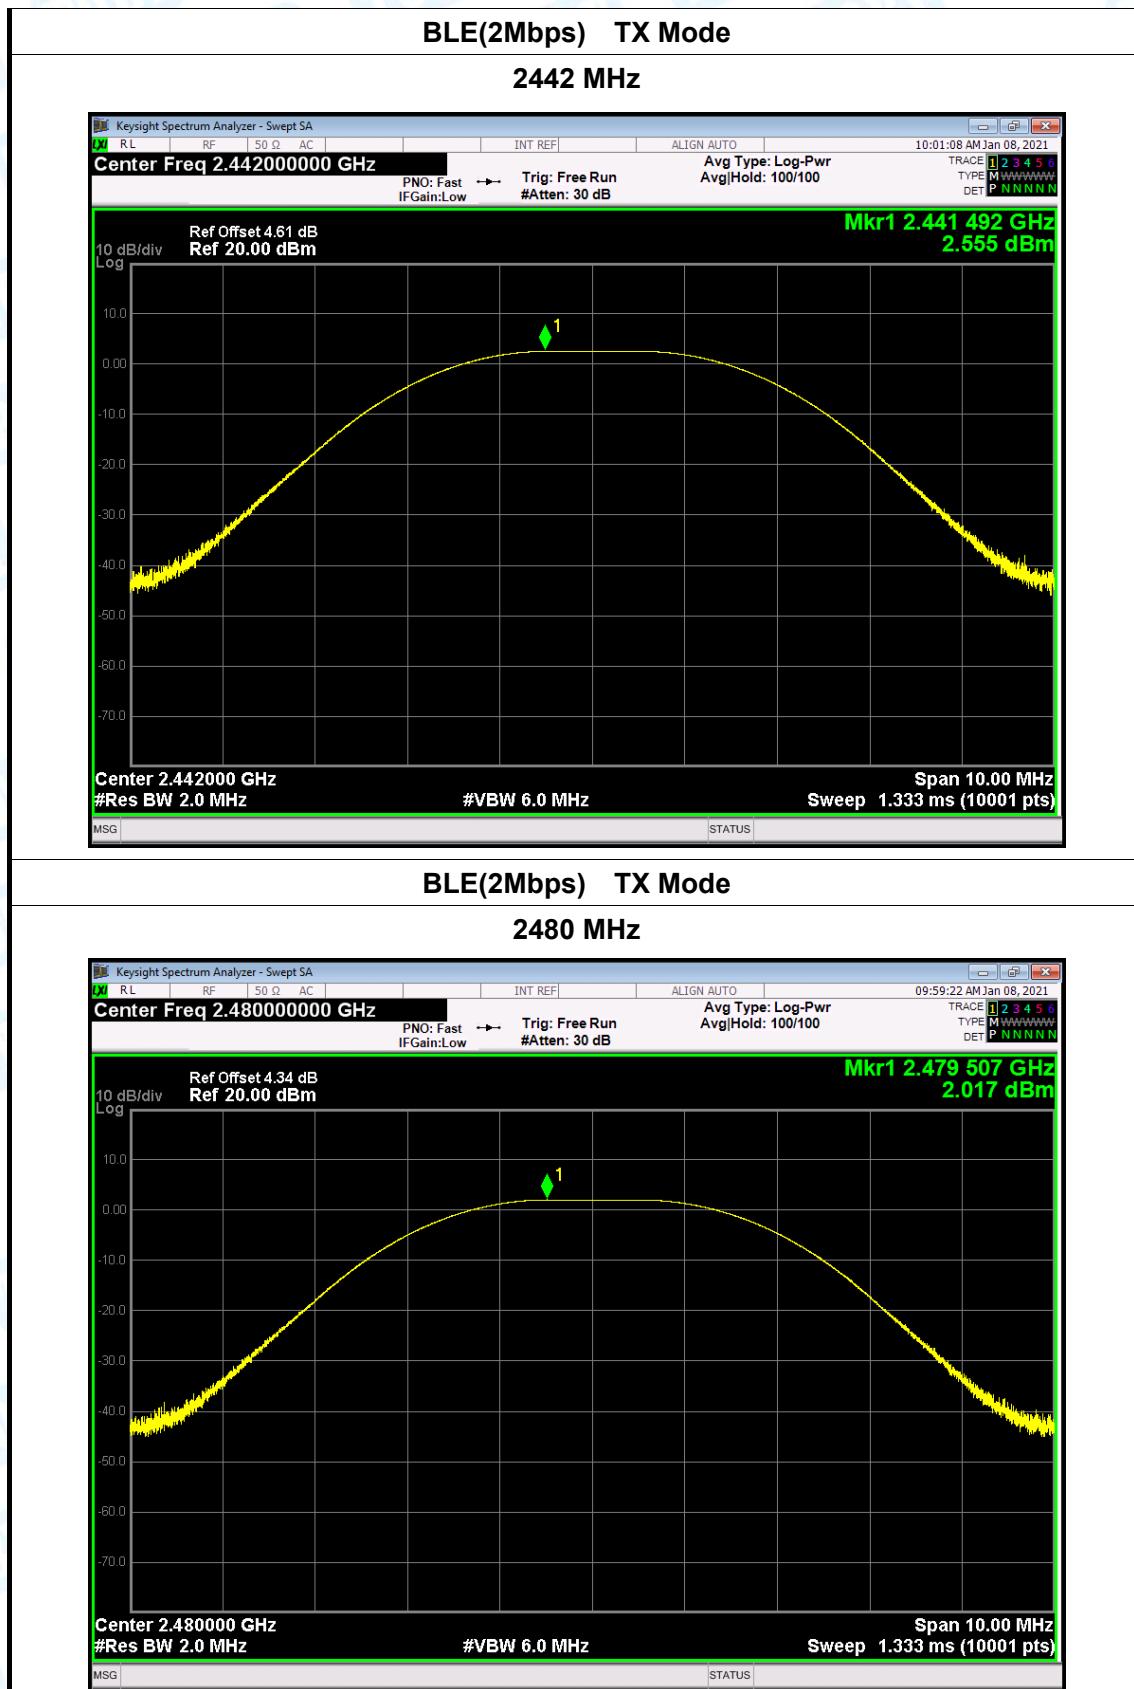



Attachment F-- Power Spectral Density Test Data

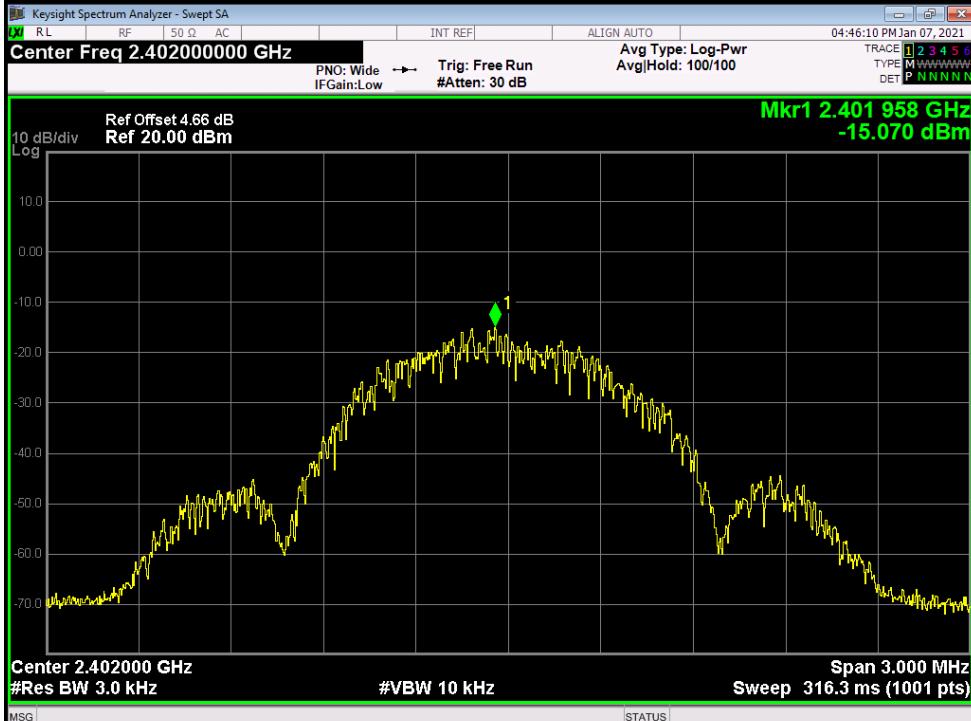Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	BLE TX Mode(1Mbps)		
Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402	-15.070	8	PASS
2442	-14.689		
2480	-15.291		
BLE Mode			
2402 MHz			
			

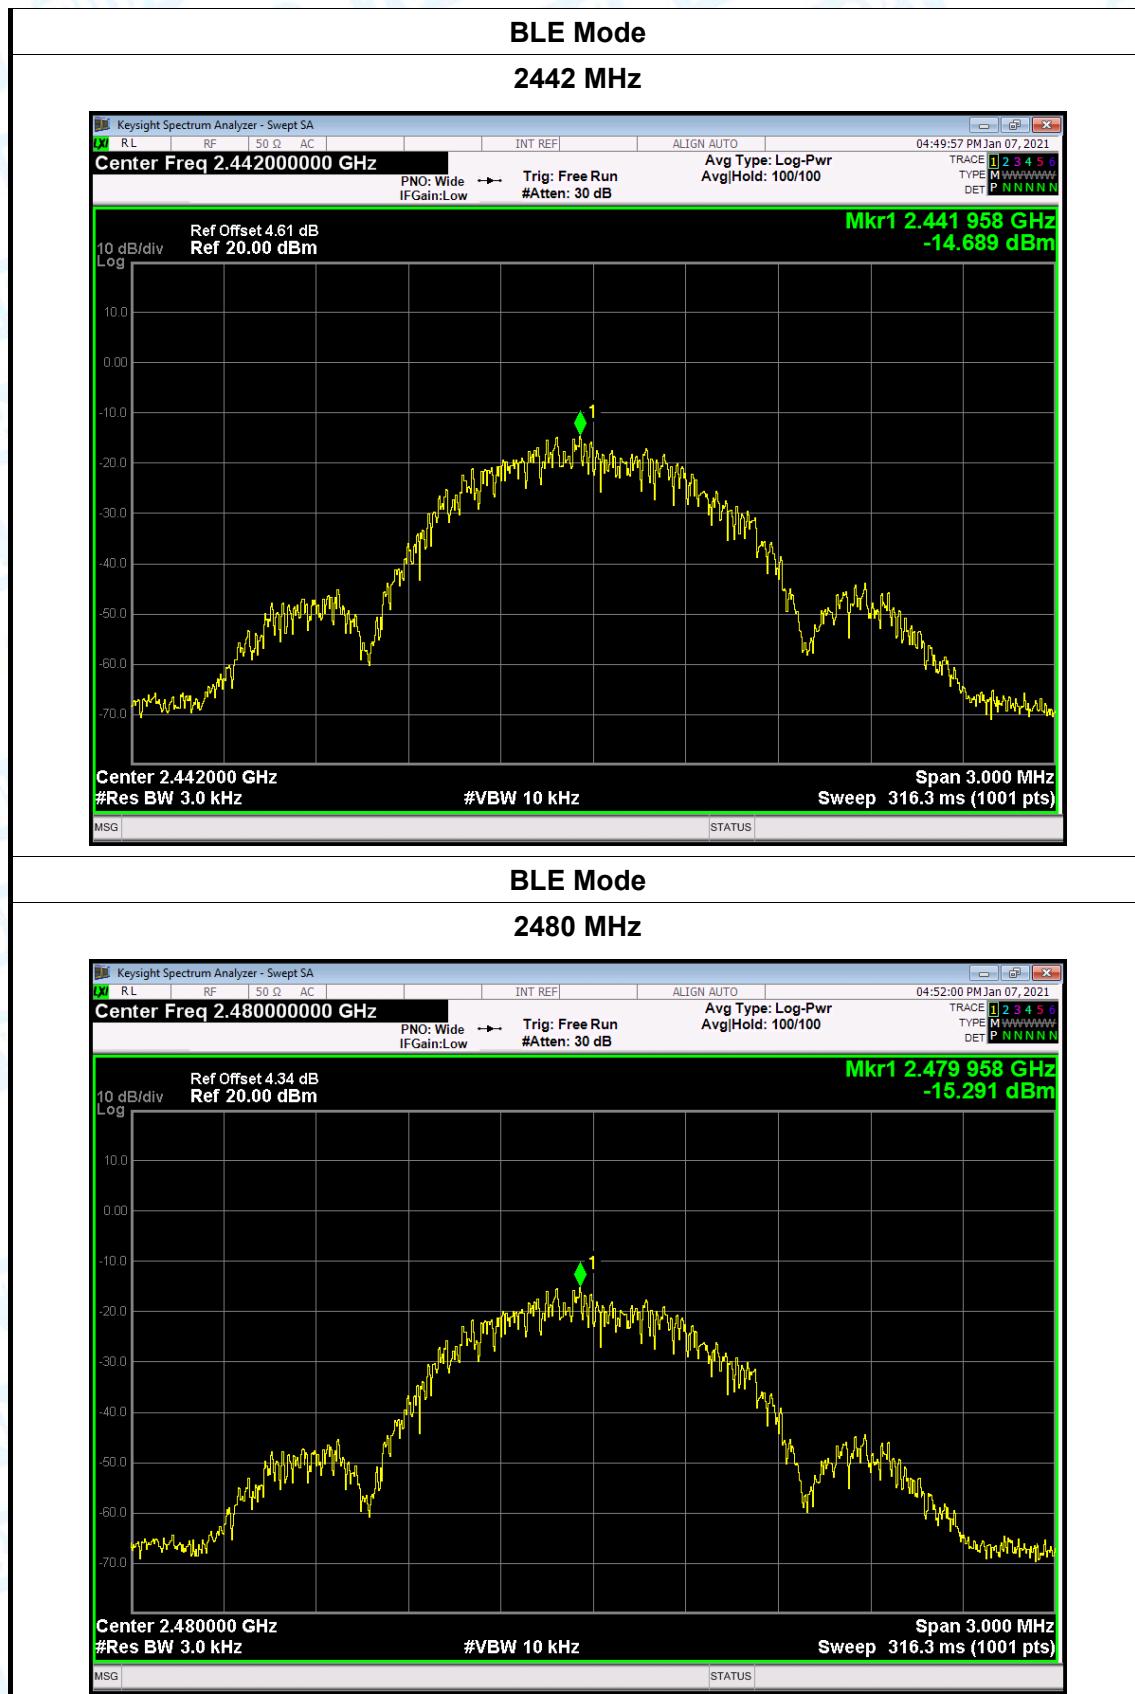

Attachment G-- Power Spectral Density Test Data

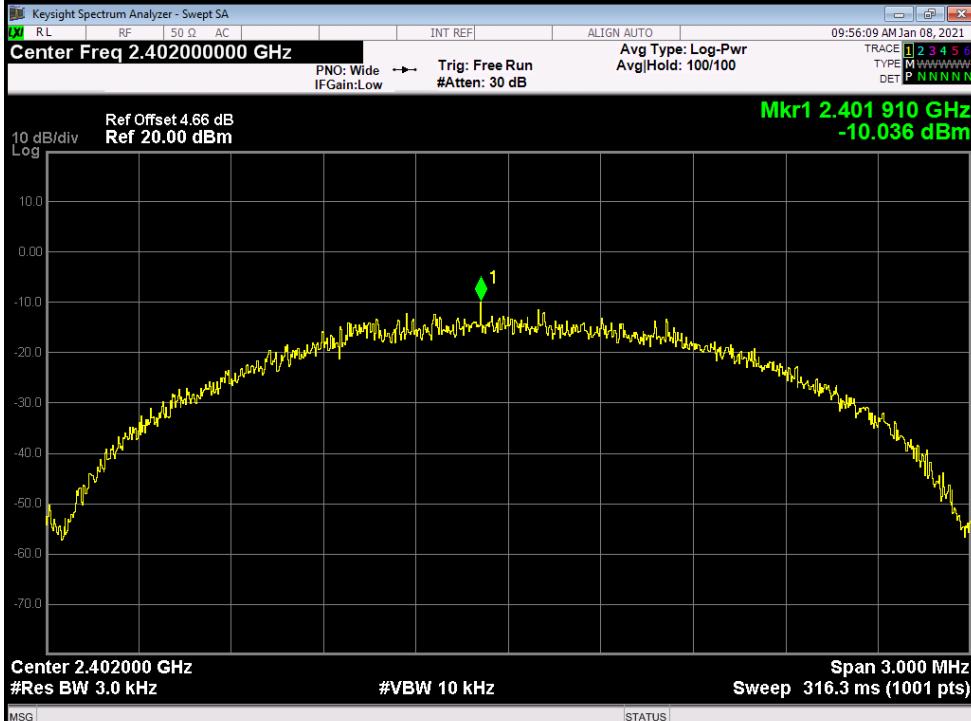Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	BLE TX Mode(2Mbps)		
Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402	-10.036	8	PASS
2442	-9.704		
2480	-10.269		
BLE(2Mbps) TX Mode			
2402 MHz			
			

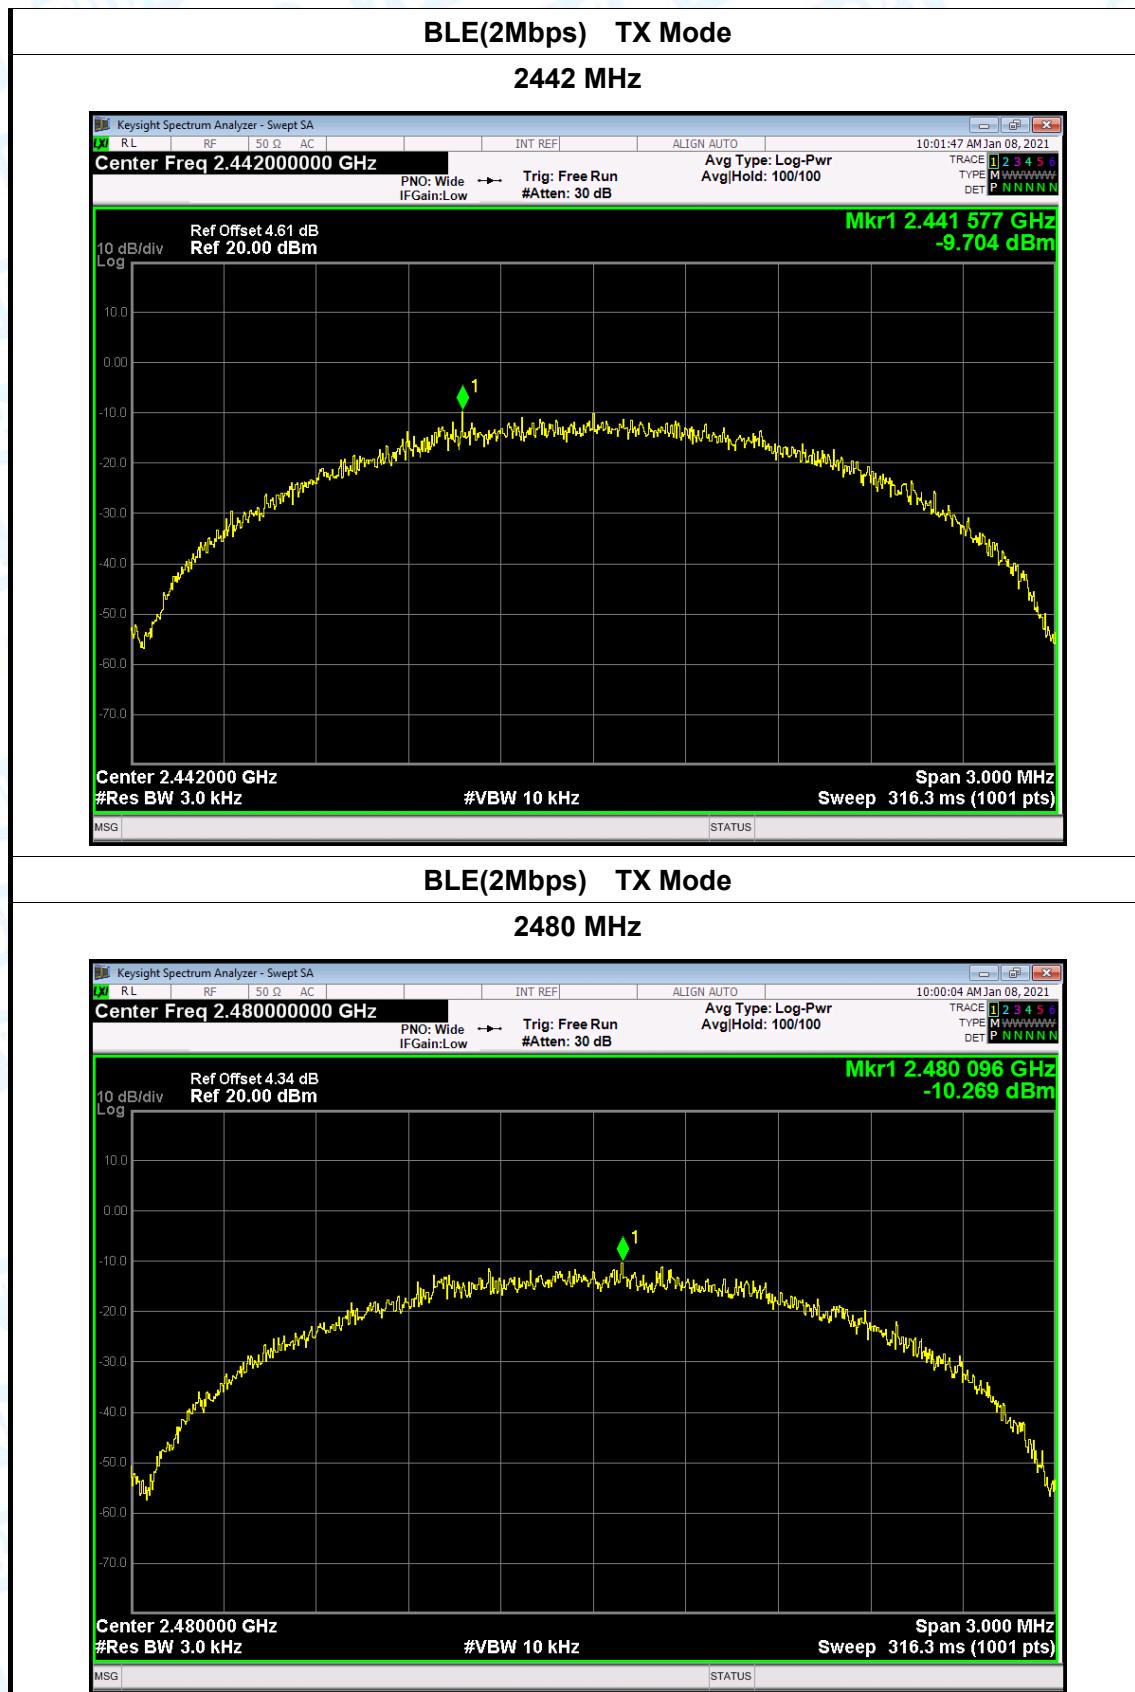

-----END OF REPORT-----