

# RF Exposure Report

Report No.: AGC05803191104FH03

**FCC ID** : ZBCWD-216A

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Wireless Charge Power bank, Power Bank

**BRAND NAME** : DNS, iLuv

**MODEL NAME** : WD-216A, MYPOWER10QBK

**APPLICANT** : SHENZHEN DNS INDUSTRIES CO., LTD.

**DATE OF ISSUE** : Dec. 10, 2019

**STANDARD(S)** : KDB 680106 D01 RF Exposure Wireless Charging Base  
App v03

**REPORT VERSION** : V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 10, 2019	Valid	Initial Release



## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION .....	5
<b>3. DESCRIPTION OF TEST MODES .....</b>	<b>6</b>
<b>4. SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
<b>5. TEST FACILITY .....</b>	<b>7</b>
<b>6. RADIO FREQUENCY (RF) EXPOSURE TEST .....</b>	<b>8</b>
6.1. LIMITS .....	8
6.2. TEST SETUP .....	8
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>11</b>

## 1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN DNS INDUSTRIES CO., LTD.
Address	23/F Building A, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian, Shenzhen, China
Manufacturer	SHENZHEN DNS INDUSTRIES CO., LTD.
Address	23/F Building A, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian, Shenzhen, China
Product Designation	Wireless Charge Power bank, Power Bank
Brand Name	DNS, iLuv
Test Model	WD-216A
Series Model	MYPOWER10QBK
Difference description	All the same except for brand name and model name, the corresponding relationship are as follow: <b>DNS</b> is corresponding <b>WD-216A</b> ; <b>iLuv</b> is corresponding <b>MYPOWER10QBK</b> ;
Date of test	Nov. 21, 2019 to Dec. 10, 2019
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in KDB 680106 D01.

The results of testing in this report apply to the product/system which was tested only.

Prepared By

*Jeast zhan*

Jeast Zhan  
(Project Engineer)

Dec. 10, 2019

Reviewed By

*Max Zhang*

Max Zhang  
(Reviewer)

Dec. 10, 2019

Approved By

*Forrest Lei*

Forrest Lei  
(Authorized Officer)

Dec. 10, 2019



## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	110-205 kHz
Test Frequency	178.6 kHz
Maximum field strength	55.65dBuV/m(PK)@3m
Number of channels	1
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	WD-216A/B-WL-5W
Software Version	V1.0
Power Supply	DC 5V 2A by Micro B or DC 5V 3A by Type C



### 3. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(half load)
3	Wireless charging Mode(Null load)
Note: 1. The mode 1 was the worst case and only the data of the worst case record in this report. 2. Both adaptors are tested and reported the worst-case data.	

### 4. SYSTEM TEST CONFIGURATION

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Charge Power bank, Power Bank	WD-216A	ZBCWD-216A	EUT
2	Load	N/A	5W	Accessory
3	Adapter	N/A	DC 5V 2A	Accessory
4	USB Cable	N/A	1.0m, Unshielded	Accessory



## 5. TEST FACILITY

<b>Test Site</b>	Attestation of Global Compliance (Shenzhen) Co., Ltd
<b>Location</b>	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
<b>Designation Number</b>	CN1259
<b>FCC Test Firm Registration Number</b>	975832
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	J-0004	Jun.12, 2019	Jun.11, 2020
Probe FHP	Narda Safety Test Solutions GmbH	EHP-50F	J-0015	Jun.12, 2019	Jun.11, 2020




## 6. RADIO FREQUENCY (RF) EXPOSURE TEST

### 6.1. LIMITS

For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

### 6.2. TEST SETUP

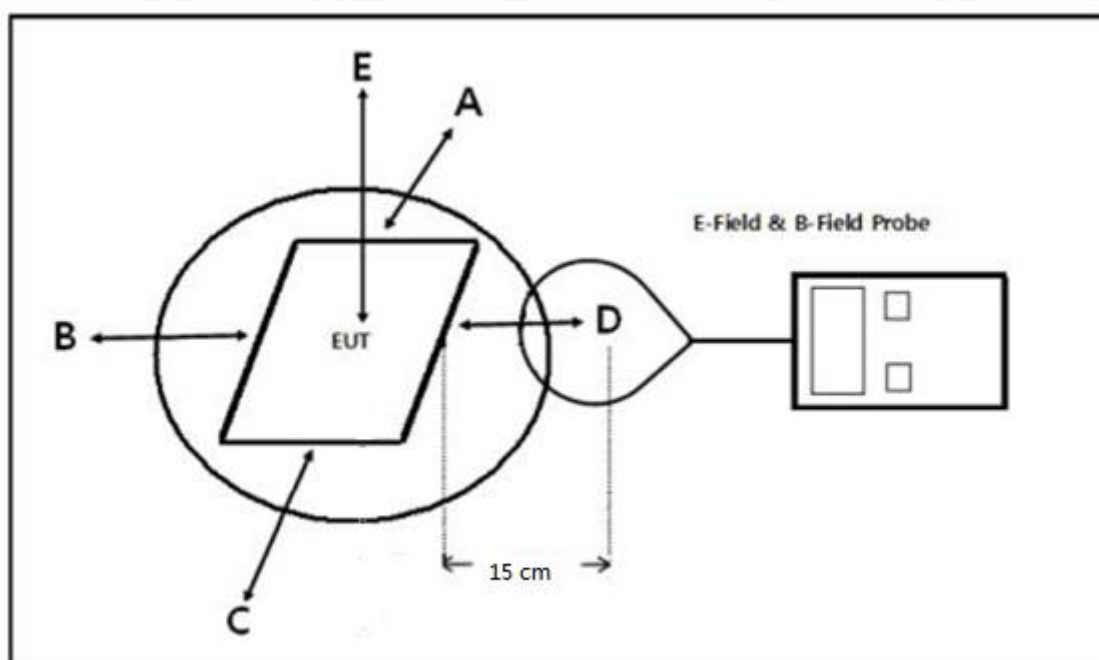

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT(20 cm measure distance);



### 6.3. TEST PROCEDURE

The EUT was placed on a non-conductive table top and the ancillary equipment (e.g. mobile phone) was placed on the EUT for charging.

Maximum E-field and H-field measurements were tested 15cm from each side of the EUT. For top side the measure distance is 20cm.

Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.

### 6.4. TEST RESULT

Test condition: Mode 1

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limit (V/m)
178.6kHz	0.16	0.16	0.16	0.16	2.52	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limit (A/m)
178.6kHz	0.08	0.08	0.08	0.08	0.53	1.63

Test condition: Mode 2

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limit (V/m)
191.8kHz	0.16	0.16	0.16	0.16	1.59	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limit (A/m)
191.8kHz	0.08	0.08	0.08	0.08	0.28	1.63

Test condition: Mode 3

E-field strength test result:

Frequency Range	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Limit (V/m)
203.2kHz	0.16	0.16	0.16	0.16	1.37	614

H-field strength test result:

Frequency Range	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Limit (A/m)
203.2kHz	0.13	0.13	0.13	0.13	0.28	1.63



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline: 400 089 2118

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Position E

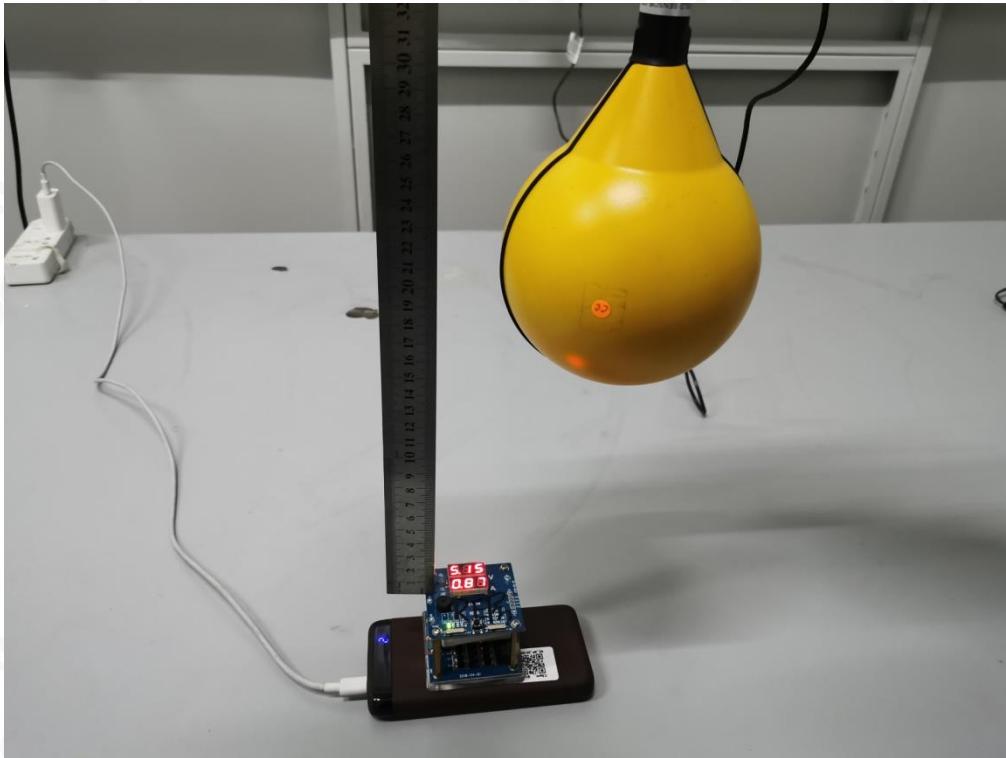


Position A

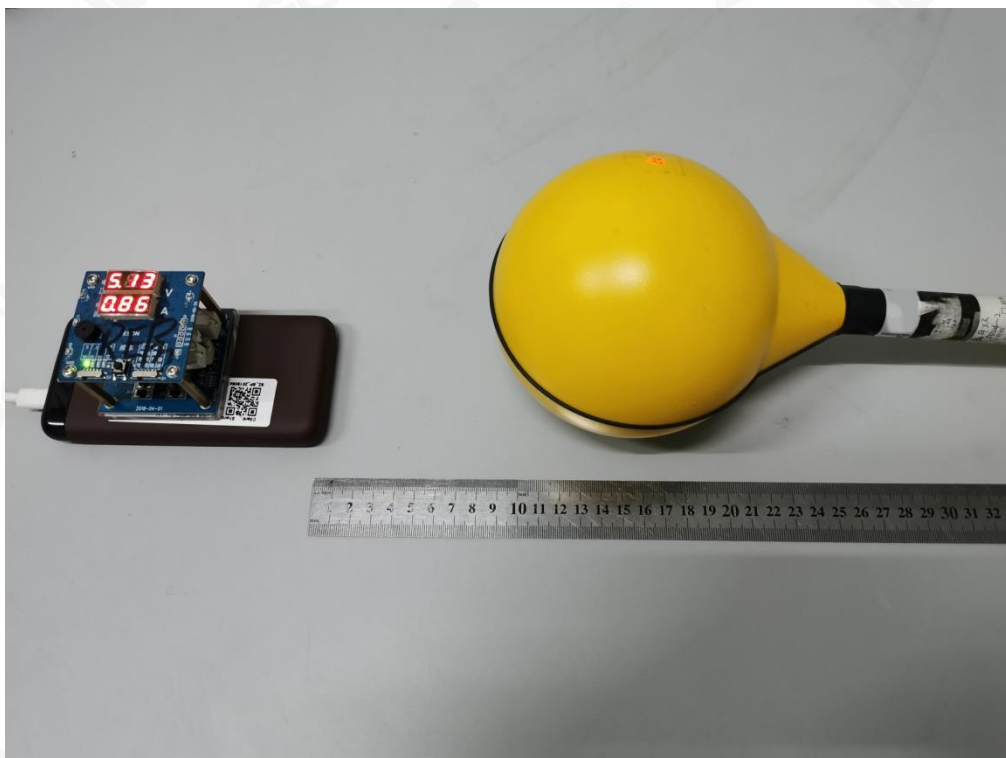

Position B




Position C

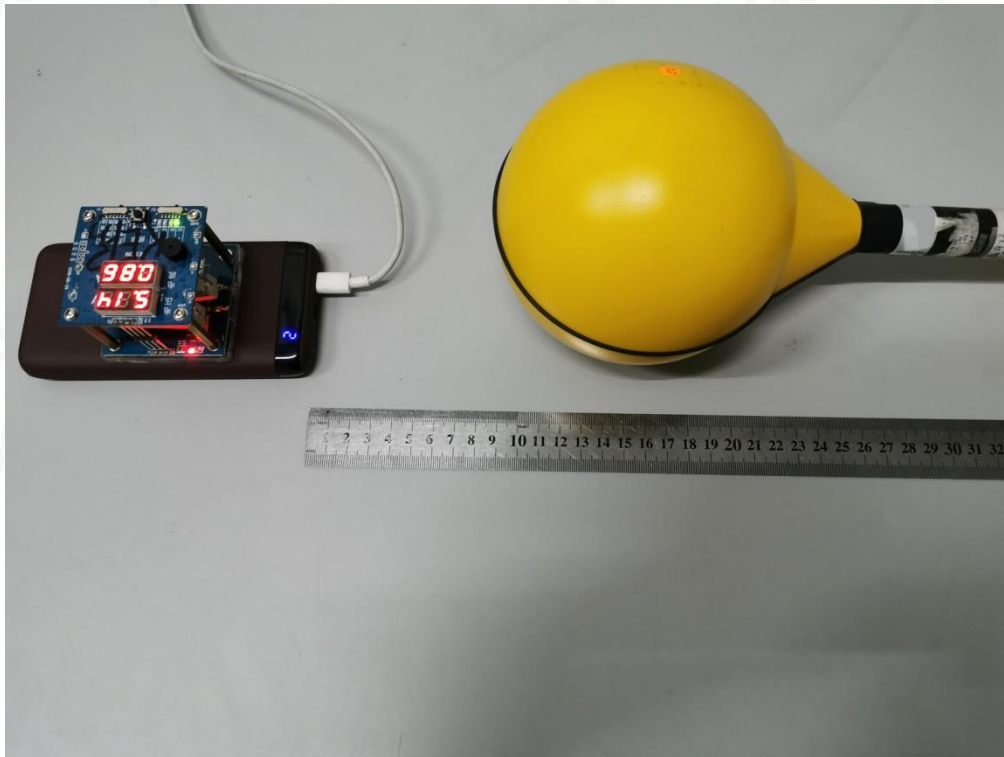



Position D

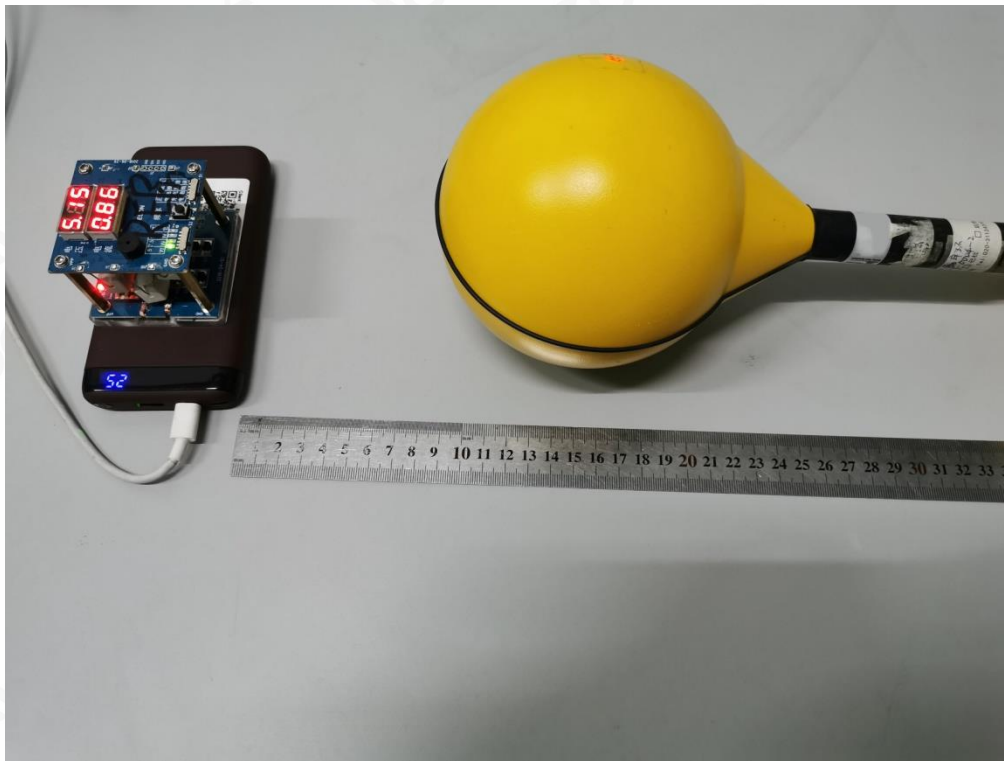

----END OF REPORT----