



FCC PART 15C TEST REPORT No.I22Z60589-IOT05

for

Sonim Technologies, Inc.

Smart phone

XP9900(P14001), XP9900(P14002), XP9900(P14003), XP9900(P14004),

XP9900(P14005), XP9900(P14006), XP9900(P14010)

With

FCC ID: WYPP14010

Hardware Version: V1.0

Software Version: 10.0.0-01-12.0.0-10.60.10

Issued Date: 2022-08-16

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z60589-IOT05	Rev.0	1st edition	2022-07-21
I22Z60589-IOT05	Rev.1	Add the model number used for the test on page 8 Update the power and band edge result of 802.11n20 Adding the radiated band edge for channel 2 and 10 of 802.11n20.	2022-08-16

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATE	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. GENERAL DESCRIPTION.....	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	9
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS.....	10
5.2. STATEMENTS.....	10
5.3. TEST CONDITIONS	10
6. TEST FACILITIES UTILIZED	11
7. MEASUREMENT UNCERTAINTY	12
7.1. MAXIMUM OUTPUT POWER.....	12
7.2. PEAK POWER SPECTRAL DENSITY	12
7.3. DTS 6-DB SIGNAL BANDWIDTH.....	12
7.4. BAND EDGES COMPLIANCE	12
7.5. TRANSMITTER SPURIOUS EMISSION	12
7.6. AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A: DETAILED TEST RESULTS.....	13
A.1. MEASUREMENT METHOD.....	13
A.2. MAXIMUM OUTPUT POWER.....	14
A.2.1. PEAK OUTPUT POWER-CONDUCTED	14

A.3. PEAK POWER SPECTRAL DENSITY	17
A.4. DTS 6-DB SIGNAL BANDWIDTH	24
A.5. BAND EDGES COMPLIANCE	30
A.5.1 BAND EDGES COMPLIANCE –CONDUCTED	30
A.5.2 BAND EDGES COMPLIANCE –RADIATED.....	38
A.6. TRANSMITTER SPURIOUS EMISSION.....	44
A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED	44
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED.....	97
A.7. AC POWER-LINE CONDUCTED EMISSION	107
ANNEX B: EUT PARAMETERS.....	110
ANNEX C: ACCREDITATION CERTIFICATE	111

1. Test Laboratory

1.1.Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176


1.3. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%


1.4. Project date

Testing Start Date: 2022-05-05
Testing End Date: 2022-07-20

1.5. Signature



Xie Xiuzhen
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Hu Xiaoyu
(Approved this test report)

2. Client Information

2.1.Applicant Information

Company Name: Sonim Technologies, Inc.
Address: 6500 River Place Blvd., Building 7, Suite 250
City: Austin
Postal Code: TX 78730
Country: USA
Telephone: 1-650-378-8100
Fax: /

2.2.Manufacturer Information

Company Name: Sonim Technologies, Inc.
Address: 6500 River Place Blvd., Building 7, Suite 250
City: Austin
Postal Code: TX 78730
Country: USA
Telephone: 1-650-378-8100
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart phone
Model name	XP9900(P14001),XP9900(P14002),XP9900(P14003), XP9900(P14004),XP9900(P14005),XP9900(P14006), XP9900(P14010)
FCC ID	WYPP14010
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
Antenna Gain	-2.18dBi(Ant8); -0.53dBi(Ant9)
MAX Conducted Power	26.19dBm
Power Supply	3.9V

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
UT76a	016188000003678	V1.0	10.0.0-01-12.0.0-10.60.10
UT86a	01618800000363	V1.0	10.0.0-01-12.0.0-10.60.10

*The model of XP9900 (P14001) is used for the test.

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable

AE1

Model	BAT-05000-01S
Manufacturer	Dongguan Veken Battery Co., Ltd.

AE2

Model	1-CHUSQ302-097
Manufacturer	HUIZHOU PUAN ELECTRONICS CO.,LTD

AE3

Model	336278
Manufacturer	SUNTOPS ELECTRONICS CO.,LTD

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Smart phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2018
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2013
	American National Standard of Procedures for Compliance	
	Testing of Unlicensed Wireless Devices	
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division	2019
	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON	
	DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	

5. Test Results

5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

The model XP9900(P14002), XP9900(P14003), XP9900(P14004), XP9900(P14005), XP9900(P14006), XP9900(P14010) is a variant product of XP9900(P14001). For detail differences between two models please refer the Declaration of Changes document.

5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.9V
Humidity	H nom	20-75%

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2023-05-30
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2023-02-21
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2022-09-25
2	Test Receiver	FSV40	101047	Rohde & Schwarz	1 year	2023-06-09
3	BiLog Antenna	VULB9163	01176	Schwarzbeck	1 year	2022-11-25
4	EMI Antenna	3117	00139065	ETS-Lindgren	1 year	2022-09-13
5	EMI Antenna	LB-7180-NF	J203001300005	A-INFO	1 year	2023-02-23
6	EMI Antenna	LB-180400-25-C-KF	J211060826	A-INFO	1 year	2023-02-27

7. Measurement Uncertainty

7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

7.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB) k=2
$f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.58
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.37

7.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

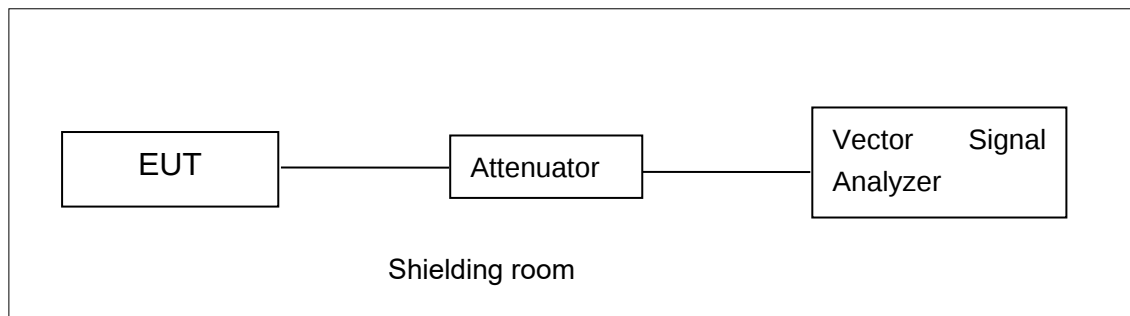


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

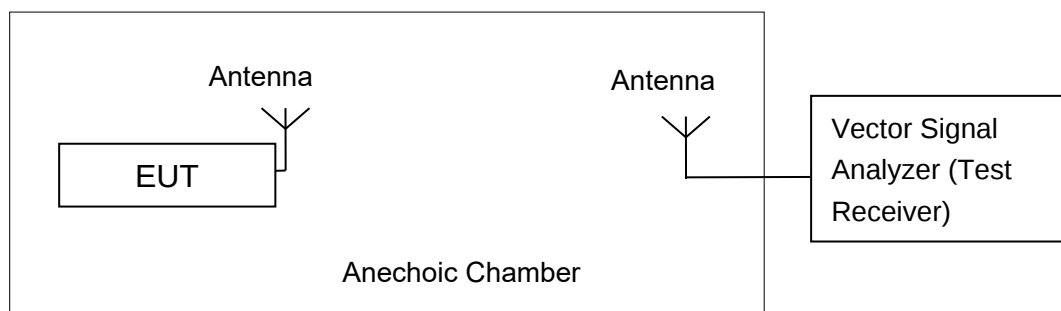


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

A.2. Maximum Output Power

Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.1

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

EUT ID: UT86a

A.2.1. Peak Output Power-conducted

Measurement Results:

SISO-Ant8

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	23.42	22.82	22.95
802.11g	6	24.51	23.60	22.35

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2417MHz (Ch2)	2422 MHz (Ch3)
802.11n(20MHz)	MCS0	20.29	24.62	25.00
		2427MHz (Ch4)	2432MHz (Ch5)	2437MHz (Ch6)
		24.98	24.96	23.66
		2442MHz (Ch7)	2447MHz (Ch8)	2452MHz (Ch9)
		24.71	24.54	24.59
		2457MHz (Ch10)	2462MHz (Ch11)	
		24.69	20.13	

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

SISO-Ant9

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	23.29	22.56	22.49
802.11g	6	23.89	23.18	22.11

The data rate 1Mbps and 6Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2417MHz (Ch2)	2422 MHz (Ch3)
802.11n(20MHz)	MCS0	19.88	23.93	24.05
		2427MHz (Ch4)	2432MHz (Ch5)	2437MHz (Ch6)
		24.02	24.00	23.24
		2442MHz (Ch7)	2447MHz (Ch8)	2452MHz (Ch9)
		24.01	24.08	24.34
		2457MHz (Ch10)	2462MHz (Ch11)	
		24.26	20.31	

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

MIMO
802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2417MHz (Ch2)	2422 MHz (Ch3)
802.11n(20MHz)	MCS0	22.86	26.62	26.86
		2427MHz (Ch4)	2432MHz (Ch5)	2437MHz (Ch6)
		26.80	27.33	26.19
		2442MHz (Ch7)	2447MHz (Ch8)	2452MHz (Ch9)
		27.23	26.86	26.76
		2457MHz (Ch10)	2462MHz (Ch11)	
		26.90	22.80	

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Duty cycles of all mode are meet the 98% requirement.

Conclusion: Pass

A.3. Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-2013-clause 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to RBW = 3 kHz.
- Set the VBW = 10 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

Measurement Results:

SISO-Ant8

802.11b/g mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11b	1	Fig.A.3.1	-5.10	P
	6	Fig.A.3.2	-5.22	P
	11	Fig.A.3.3	-4.27	P
802.11g	1	Fig.A.3.4	-6.58	P
	6	Fig.A.3.5	-7.69	P
	11	Fig.A.3.6	-7.37	P

802.11n-HT20 mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-7.27	P
	6	Fig.A.3.8	-7.48	P
	11	Fig.A.3.9	-7.80	P

MIMO

802.11n-HT20 mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (HT20)	1	Fig.A.3.10	-5.01	P
	6	Fig.A.3.11	-5.22	P
	11	Fig.A.3.12	-5.75	P

Note: All Antenna are tested, only the worst-case plot have been reported.(Ant8)

Conclusion: Pass

Test graphs as below:

SISO-Ant8

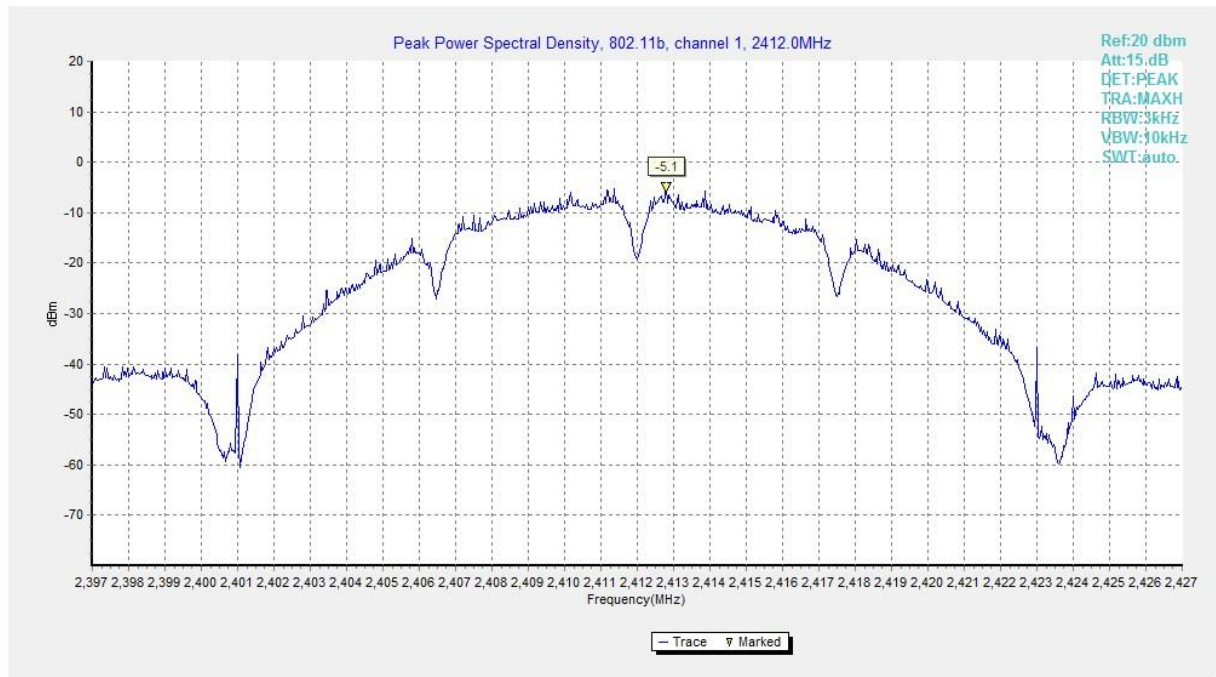


Fig.A.3.1 Power Spectral Density(802.11b,Ch1)

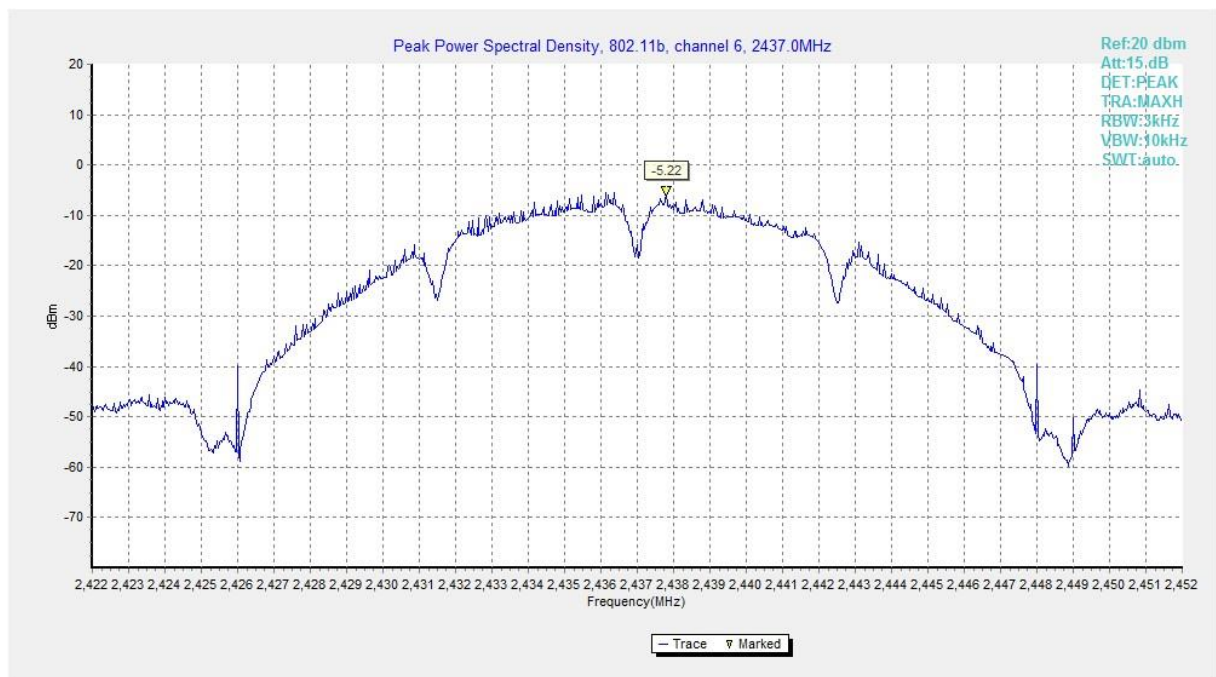


Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)

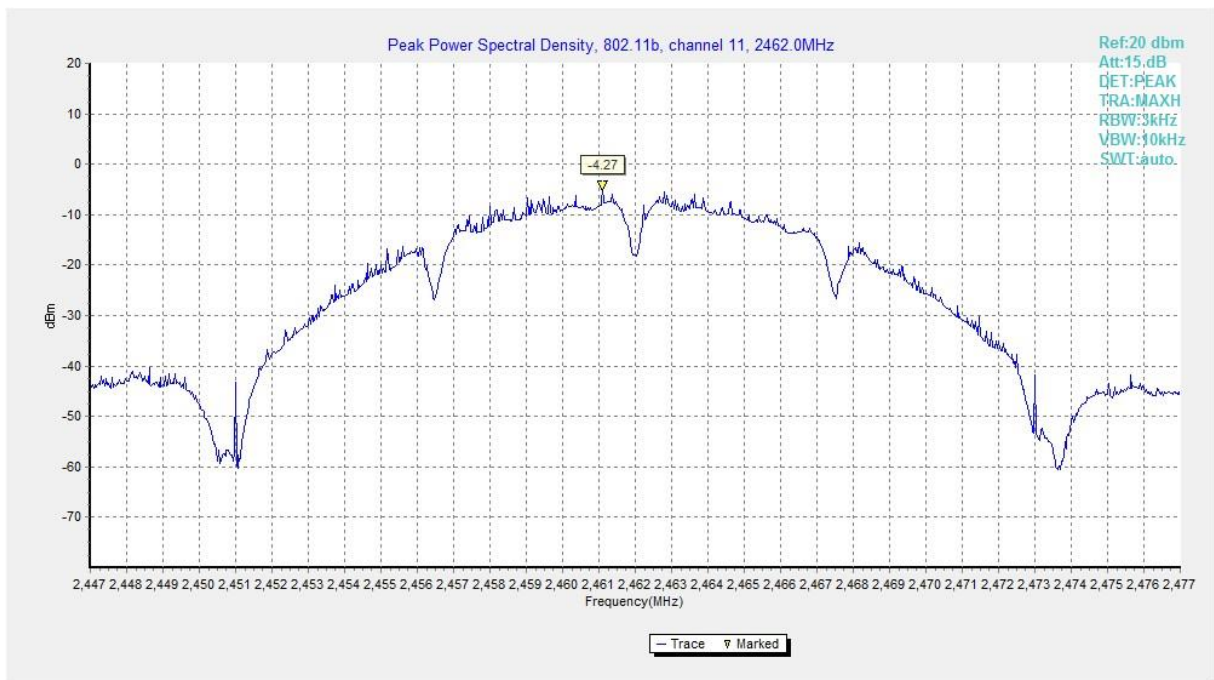


Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)

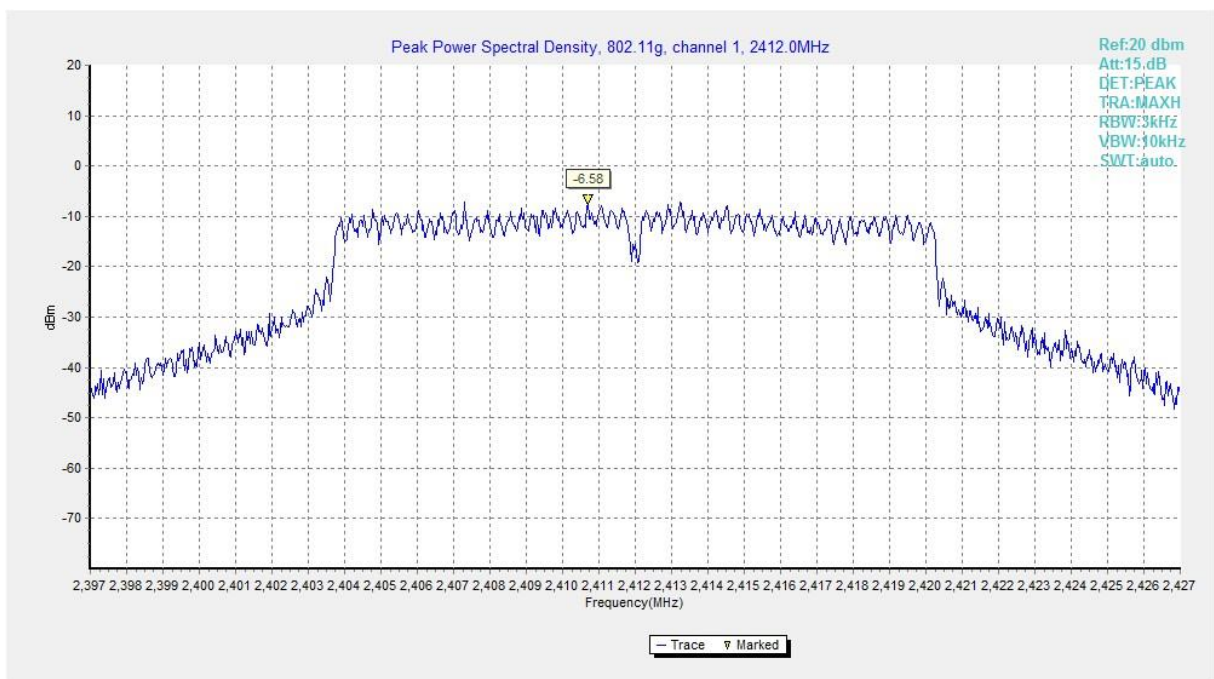


Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)

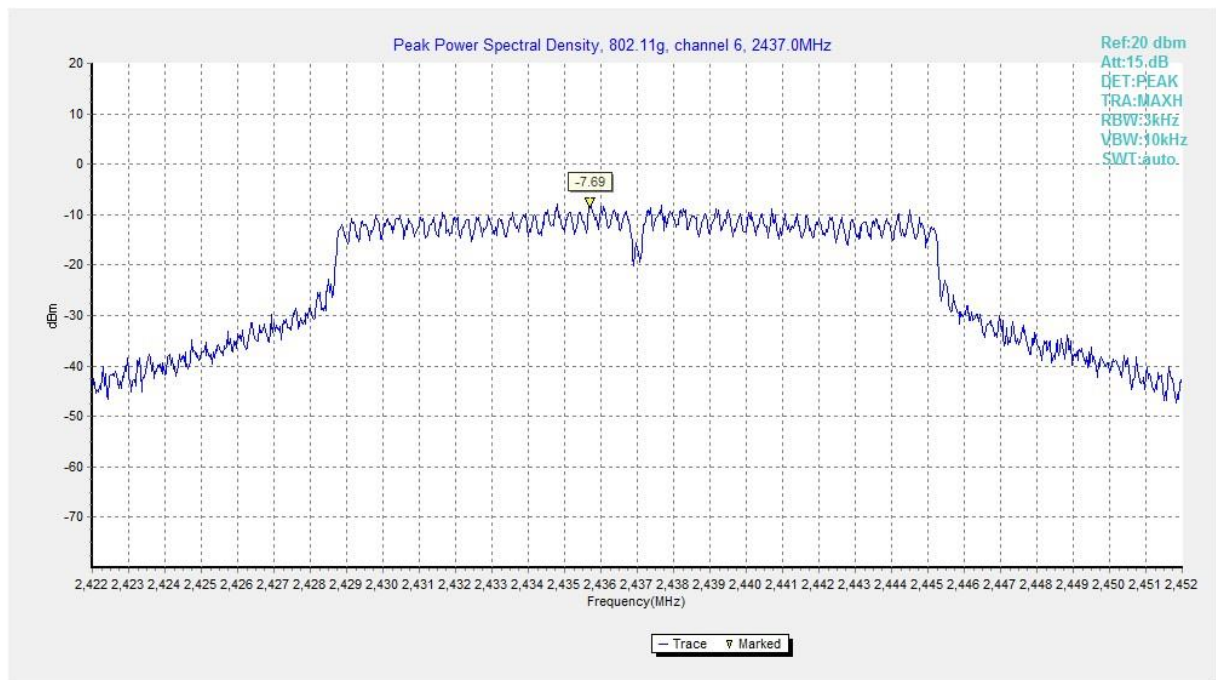


Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)

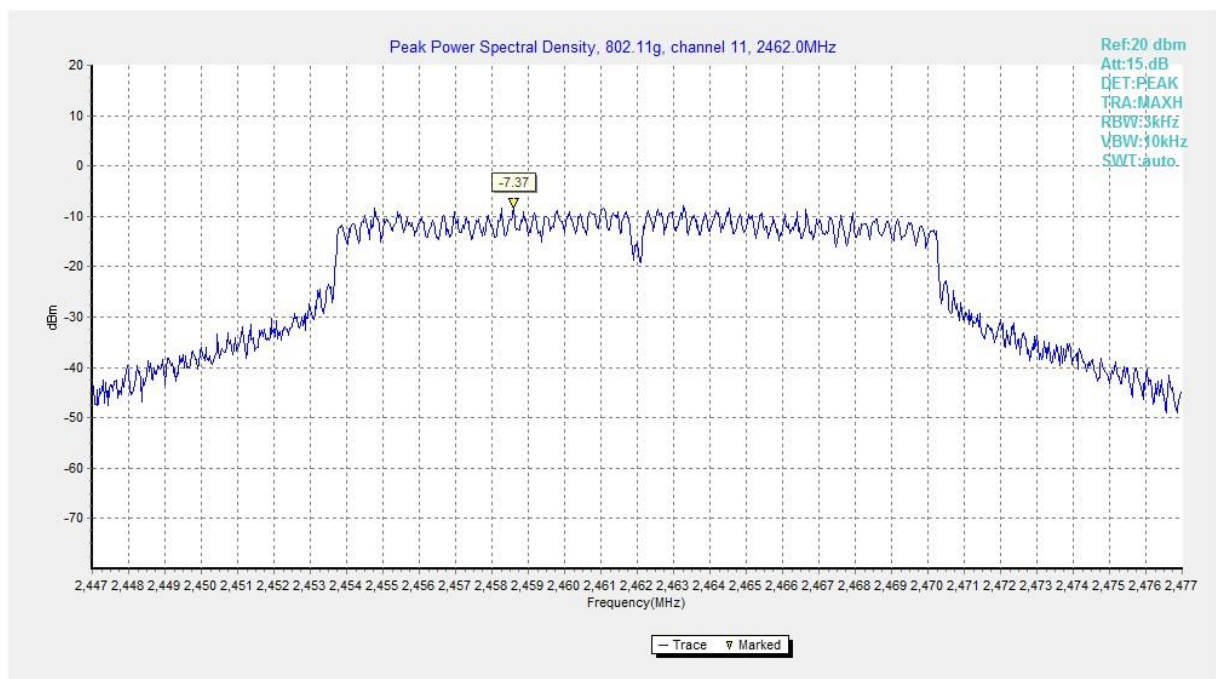


Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)

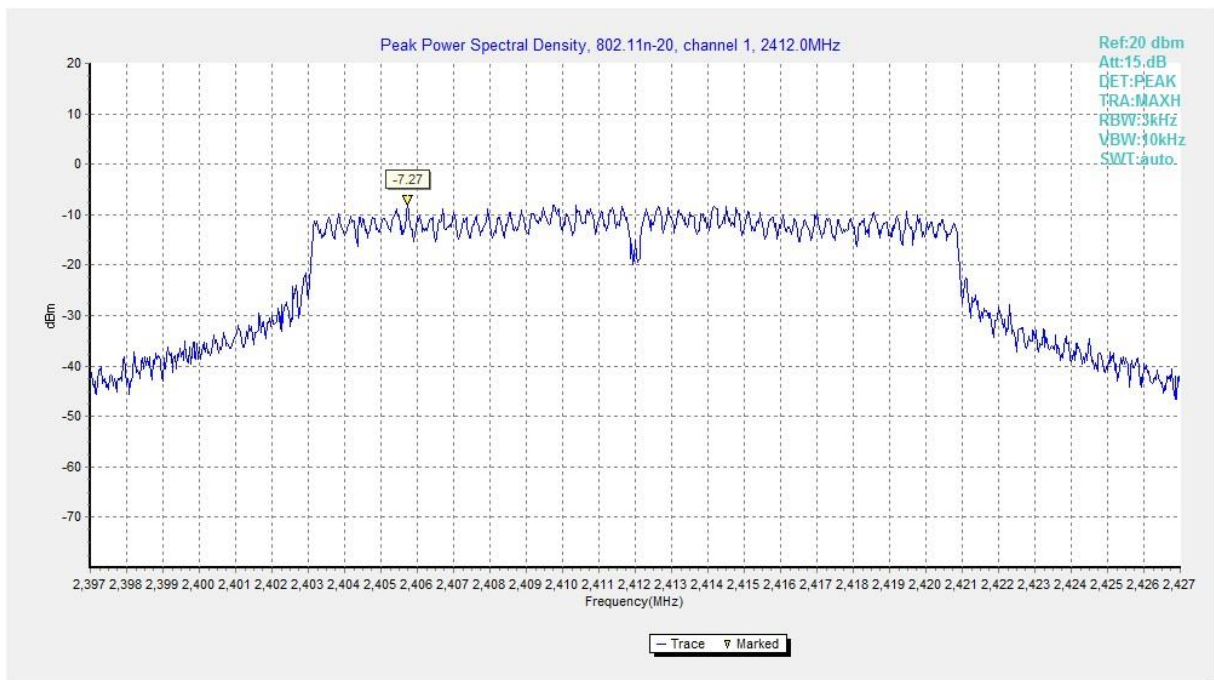


Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)

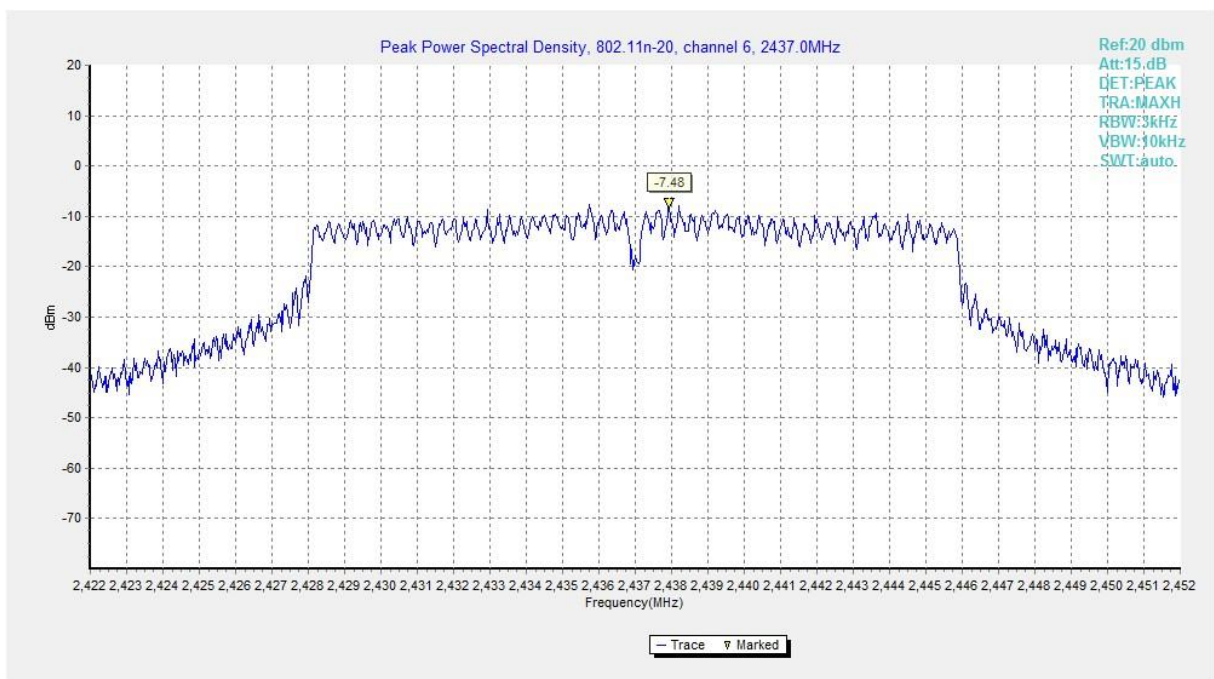


Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)

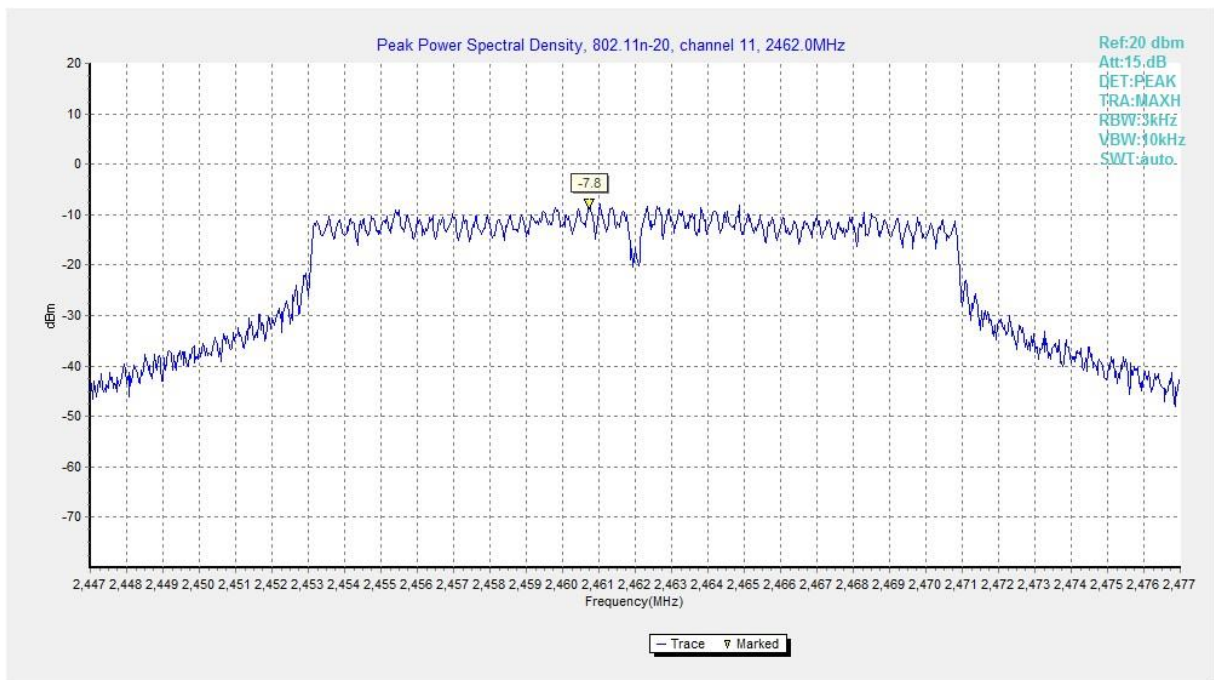


Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)

MIMO-Ant8

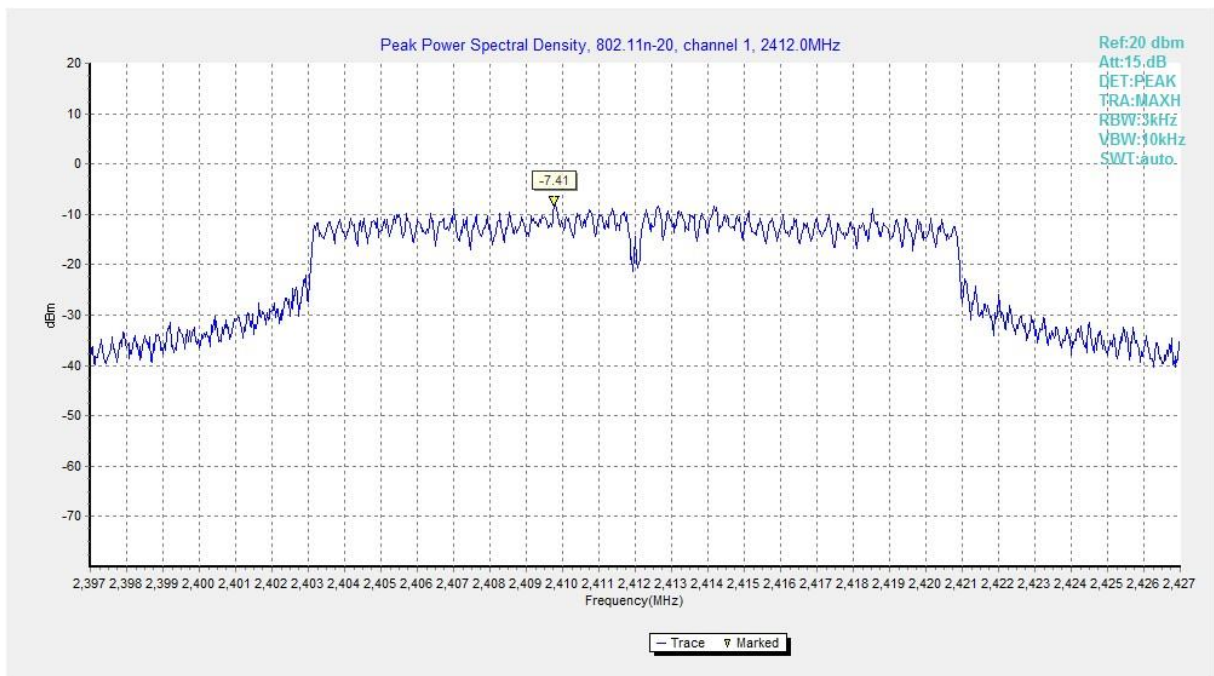


Fig.A.3.10 Power Spectral Density (802.11n-HT20, Ch 1)

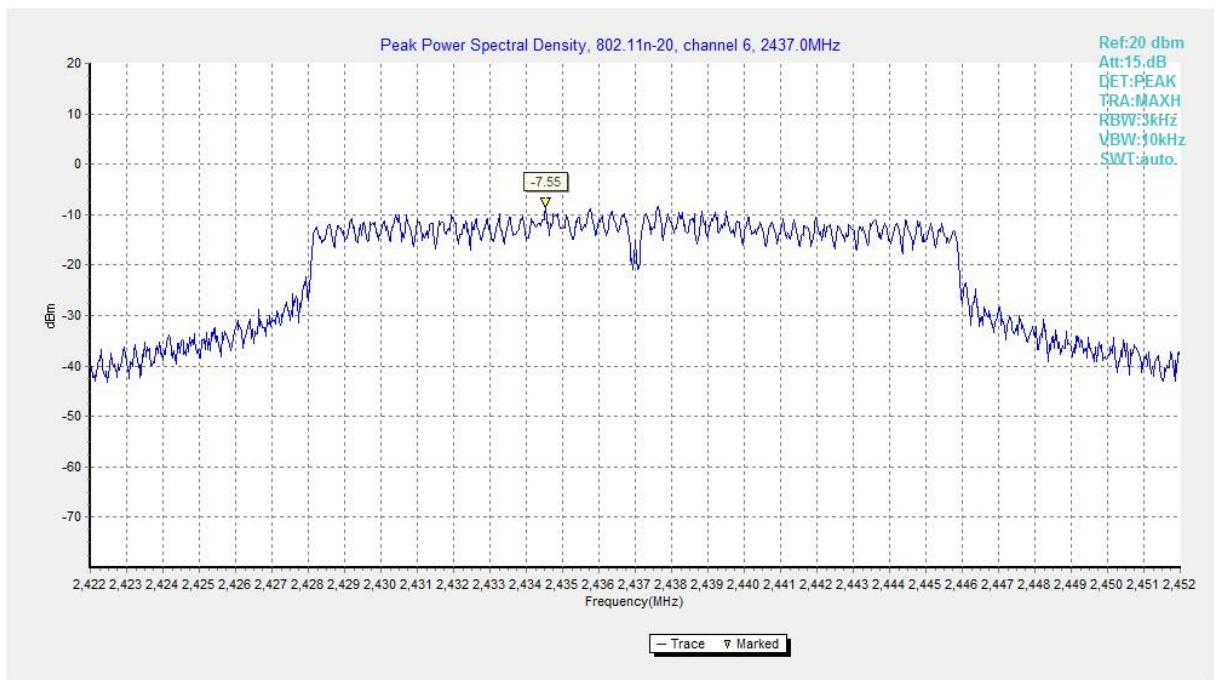


Fig.A.3.11 Power Spectral Density (802.11n-HT20, Ch 6)

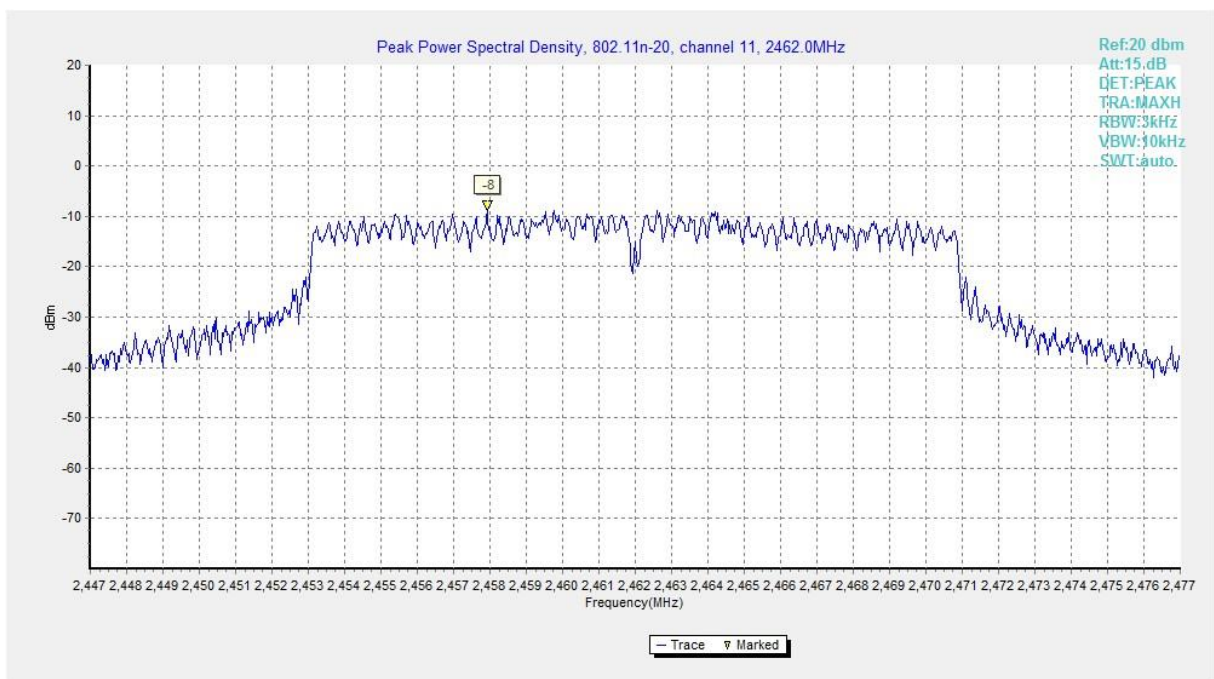


Fig.A.3.12 Power Spectral Density (802.11n-HT20, Ch 11)

A.4. DTS 6-dB Signal Bandwidth

Method of Measurement: See ANSI C63.10-2013 section 11.8.1.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

EUT ID: UT86a

Measurement Result:

802.11b/g mode

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11b	1	Fig.A.4.1	8.10	P
	6	Fig.A.4.2	8.10	P
	11	Fig.A.4.3	8.10	P
802.11g	1	Fig.A.4.4	15.55	P
	6	Fig.A.4.5	15.10	P
	11	Fig.A.4.6	15.10	P

802.11n-HT20 mode

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	16.00	P
	6	Fig.A.4.8	15.50	P
	11	Fig.A.4.9	15.95	P

Conclusion: Pass

Test graphs as below:

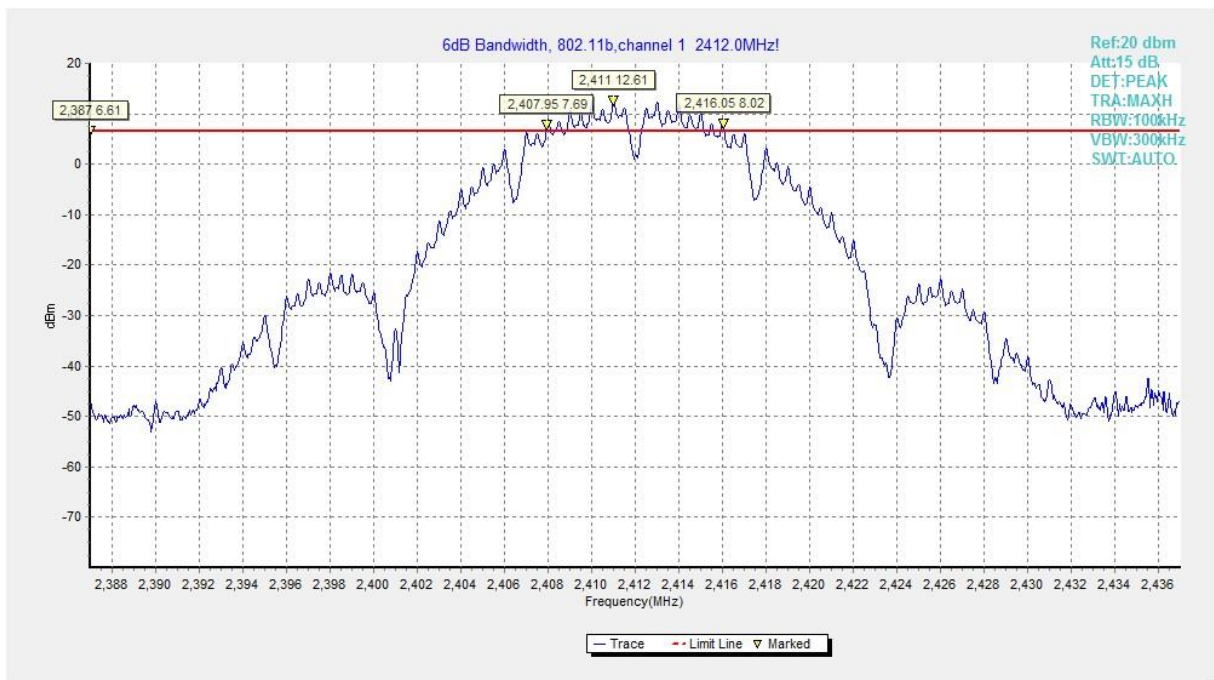


Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)

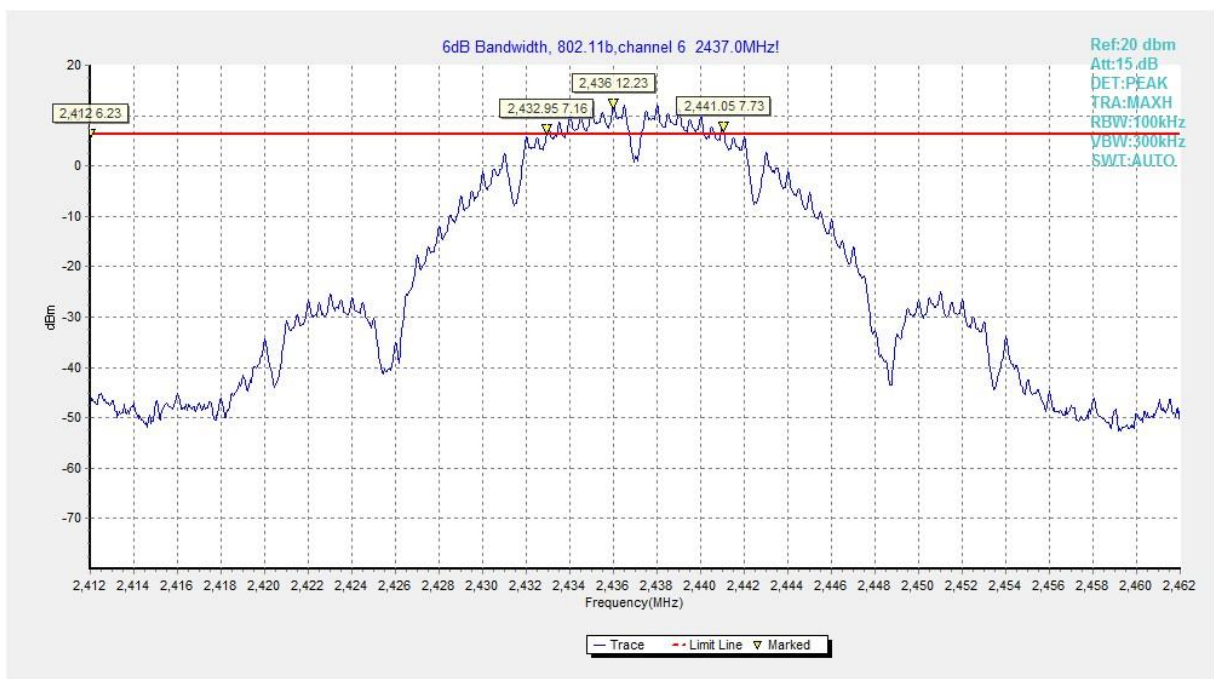


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)

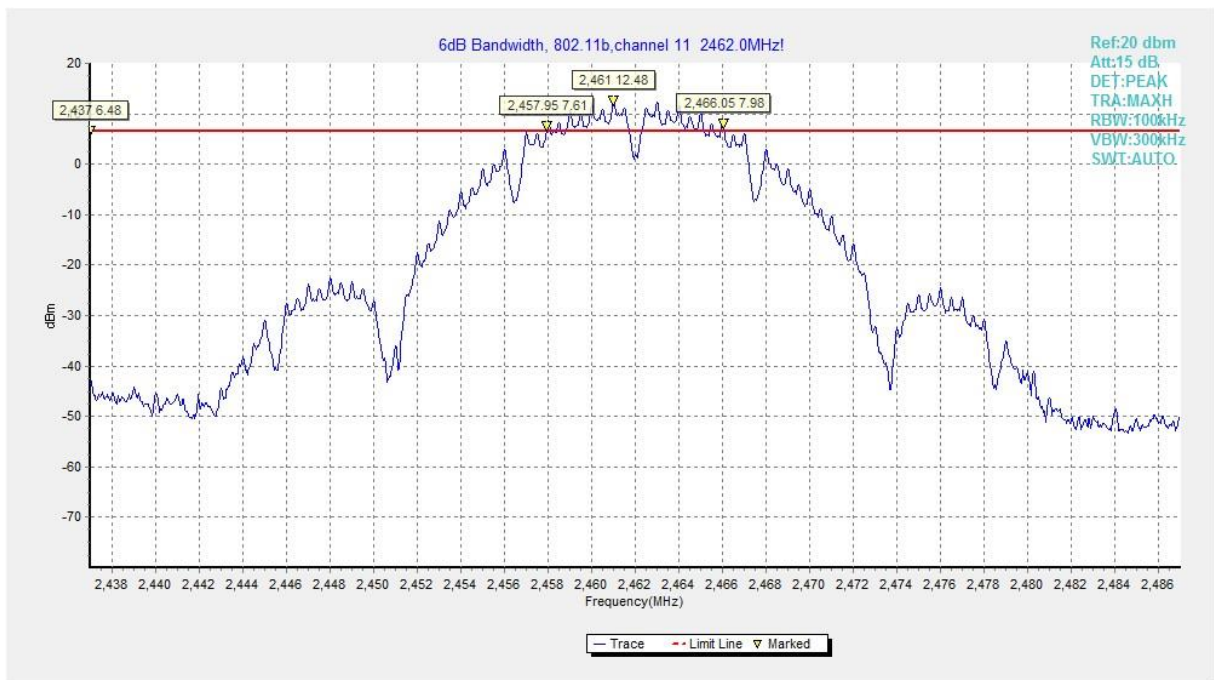


Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

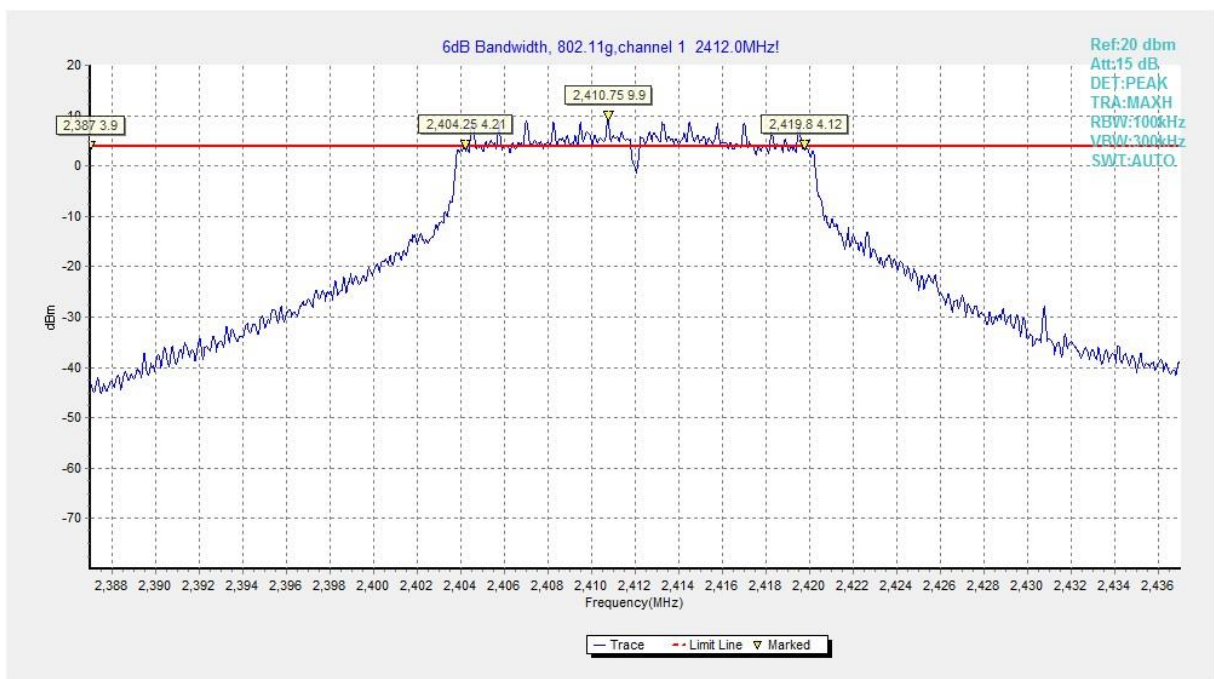


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

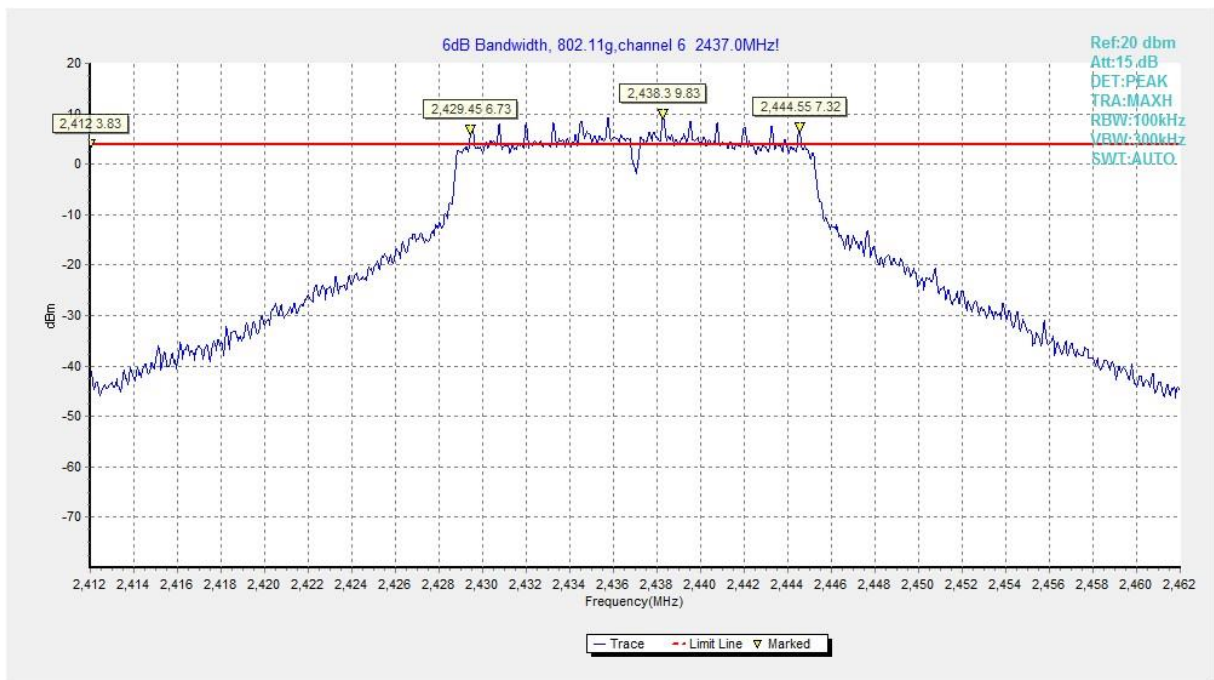


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

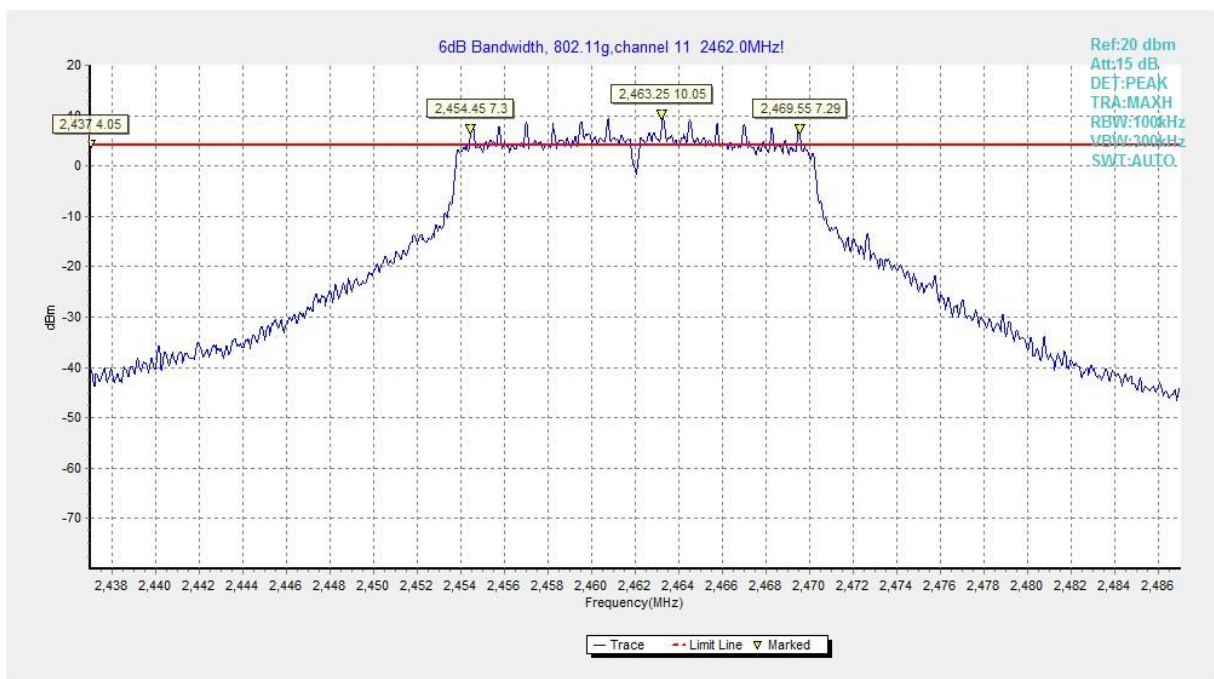


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)

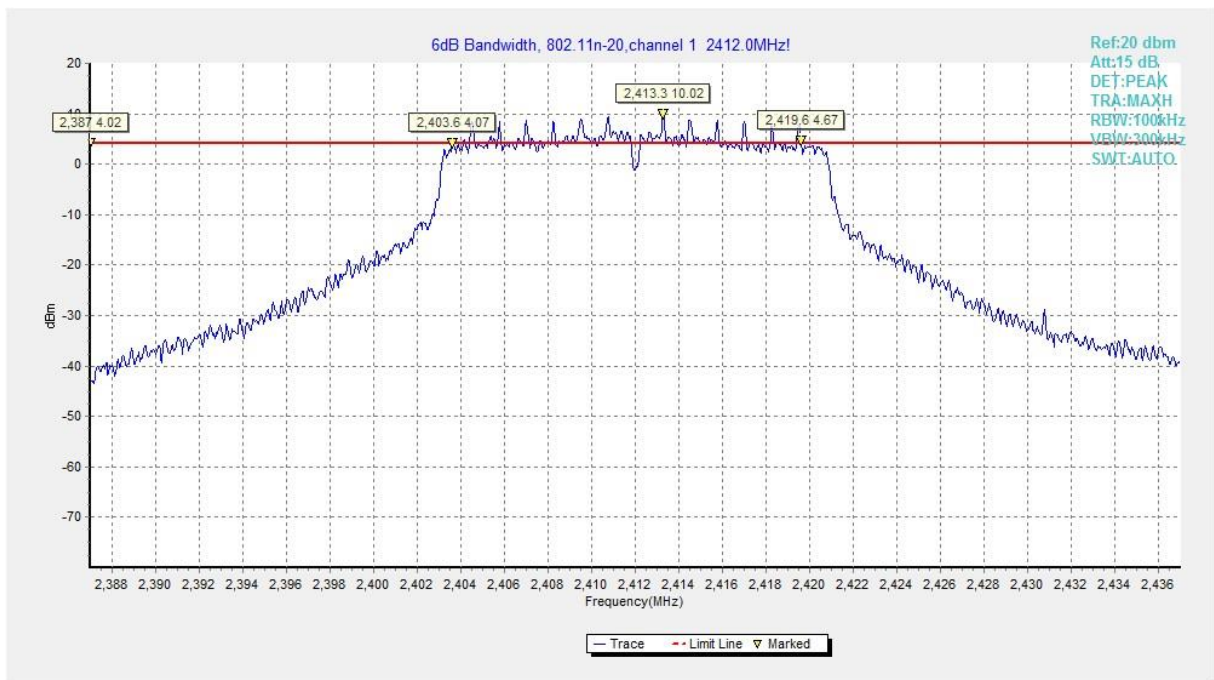


Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)

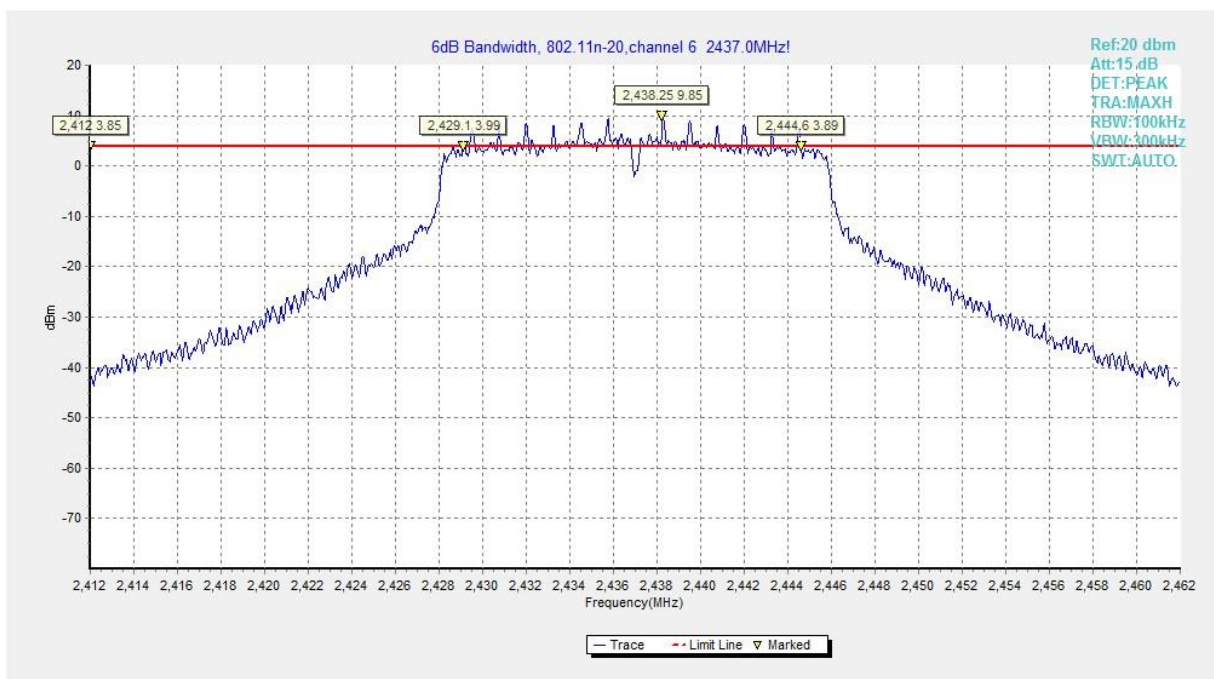


Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)

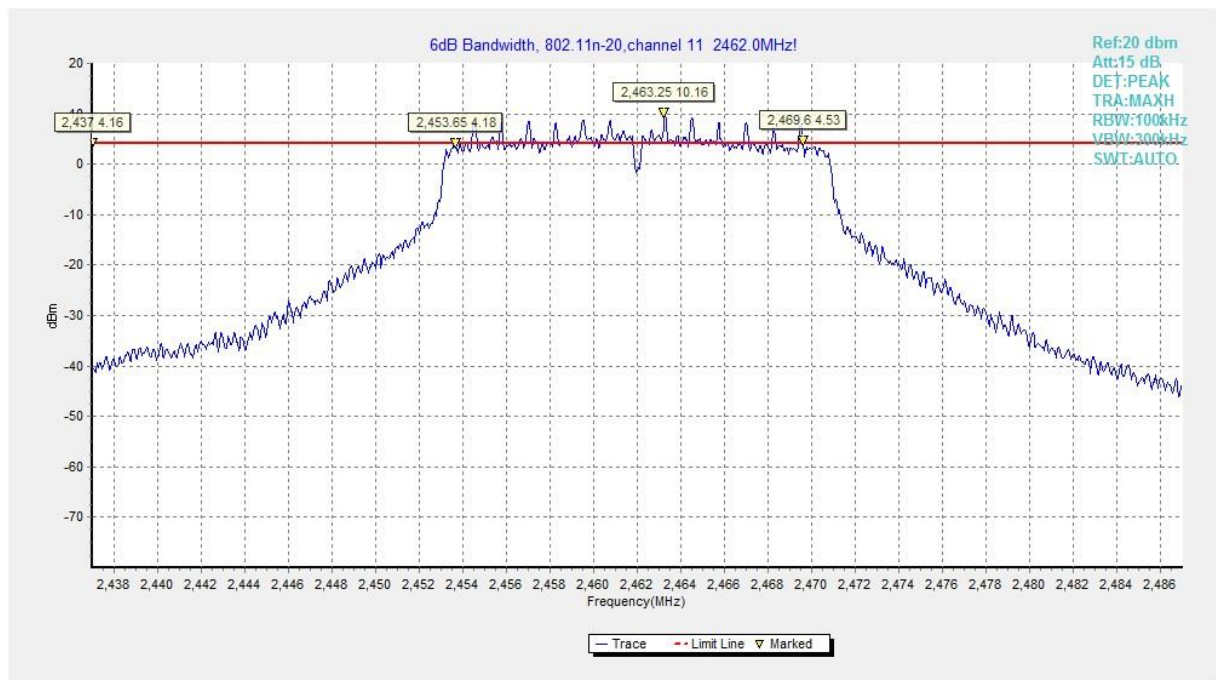


Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

A.5. Band Edges Compliance

A.5.1 Band Edges Compliance –Conducted

Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

EUT ID: UT86a

Measurement Result:

SISO-Ant8

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1.1	P
	11	Fig.A.5.1.2	P
802.11g	1	Fig.A.5.1.3	P
	11	Fig.A.5.1.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.1.5	P
	11	Fig.A.5.1.6	P
	2	Fig.A.5.1.7	P
	10	Fig.A.5.1.8	P

MIMO-Ant8

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.1.9	P
	11	Fig.A.5.1.10	P
	2	Fig.A.5.1.11	P
	10	Fig.A.5.1.12	P

Note: All Antenna are tested, only the worst-case plot have been reported.(Ant8)

Conclusion: Pass

Test graphs as below:

SISO-Ant8

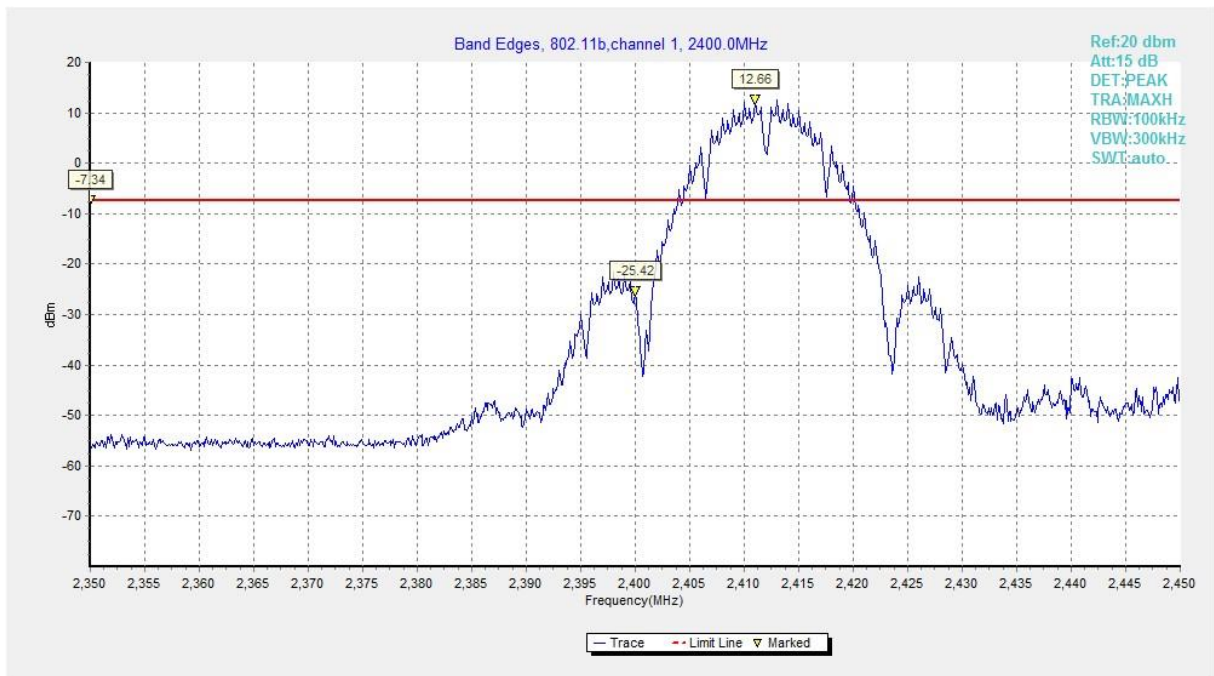


Fig.A.5.1.1 Band Edges (802.11b, Ch 1)

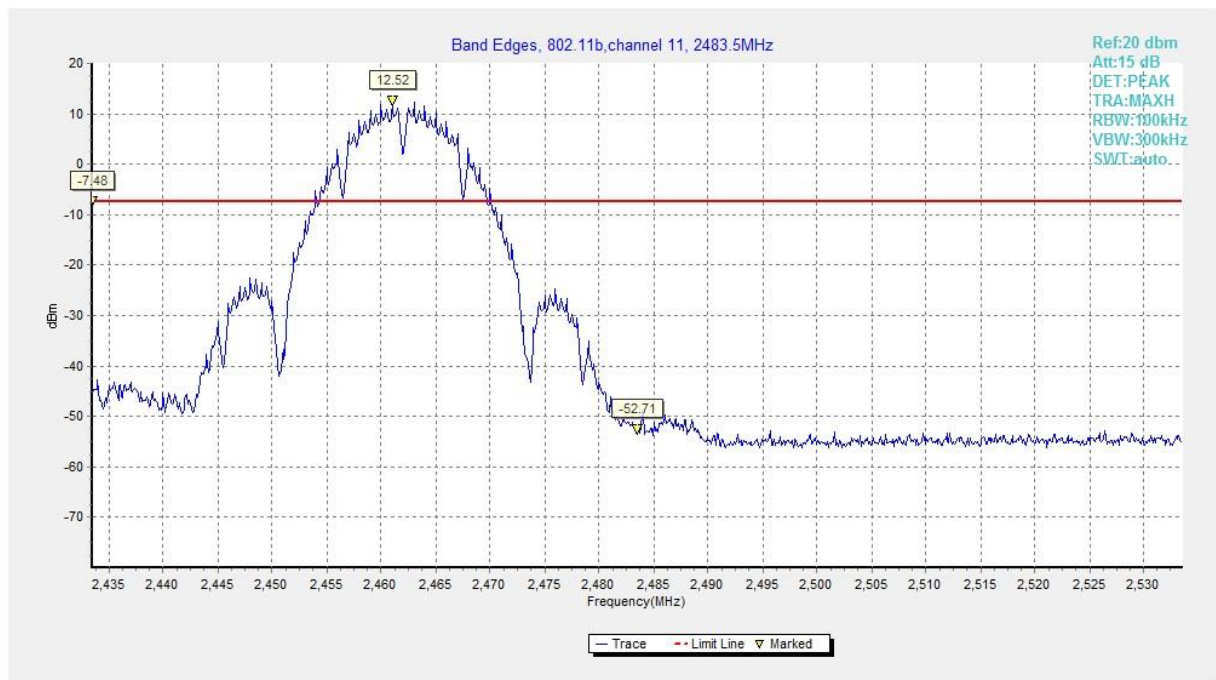


Fig.A.5.1.2 Band Edges (802.11b, Ch 11)

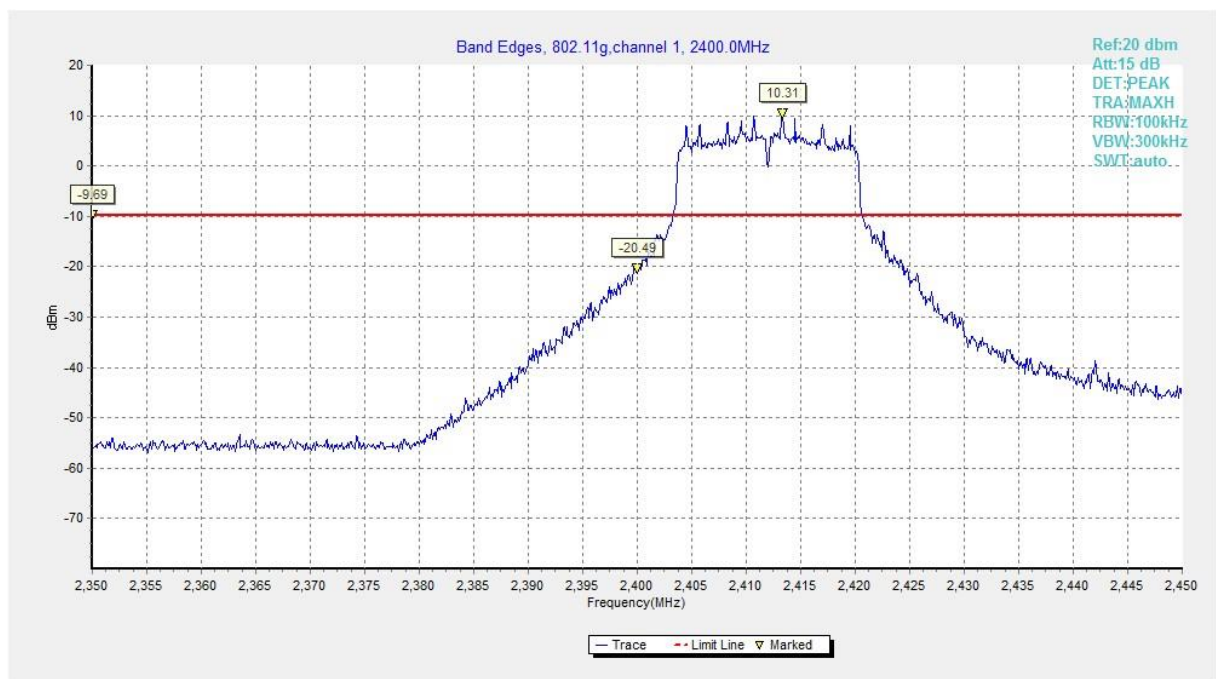


Fig.A.5.1.3 Band Edges (802.11g, Ch 1)

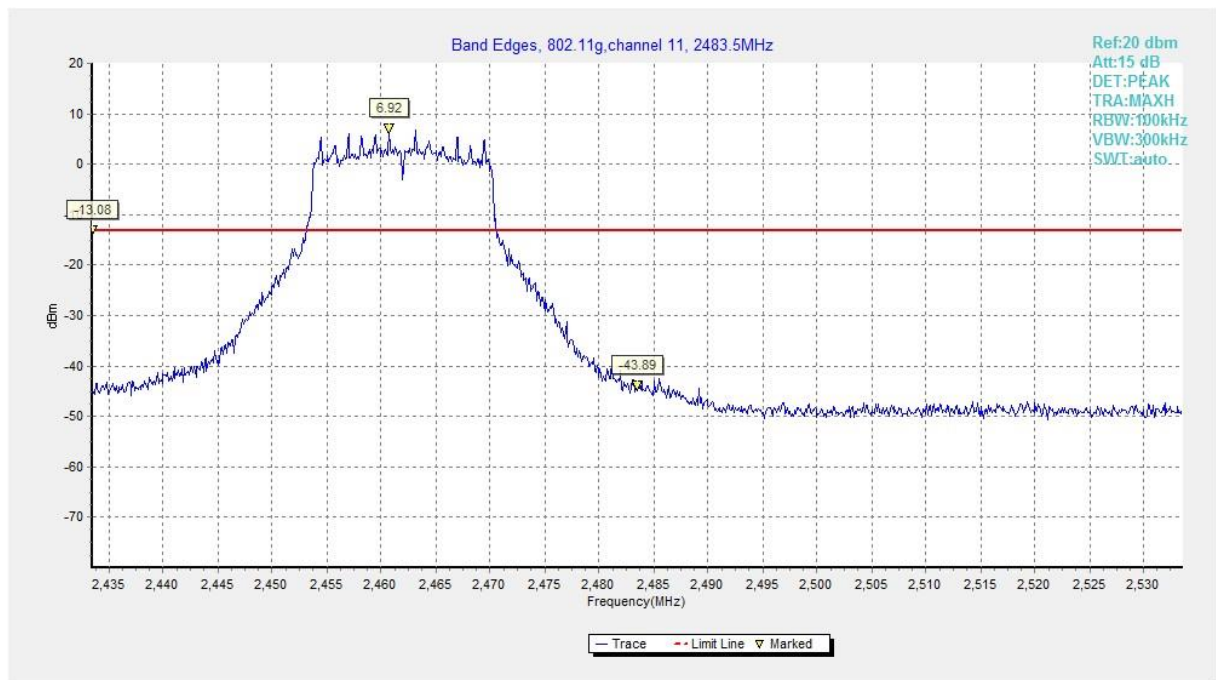


Fig.A.5.1.4 Band Edges (802.11g, Ch 11)

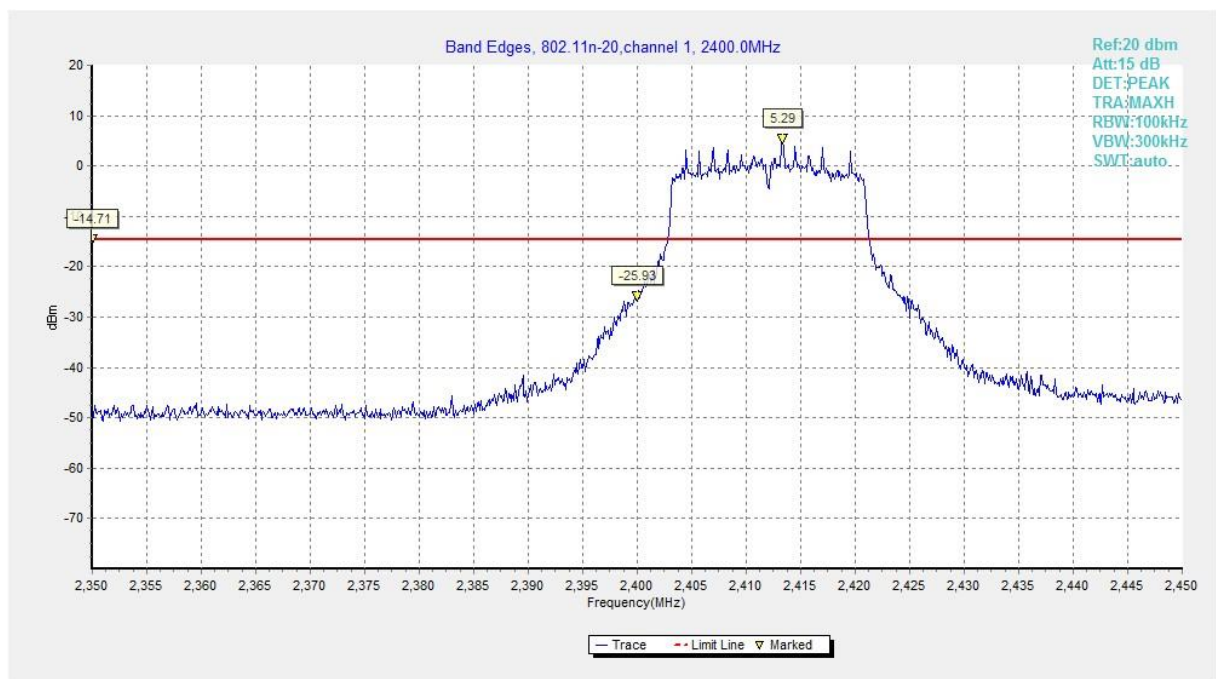


Fig.A.5.1.5 Band Edges (802.11n-HT20, Ch 1)



Fig.A.5.1.6 Band Edges (802.11n-HT20, Ch 11)

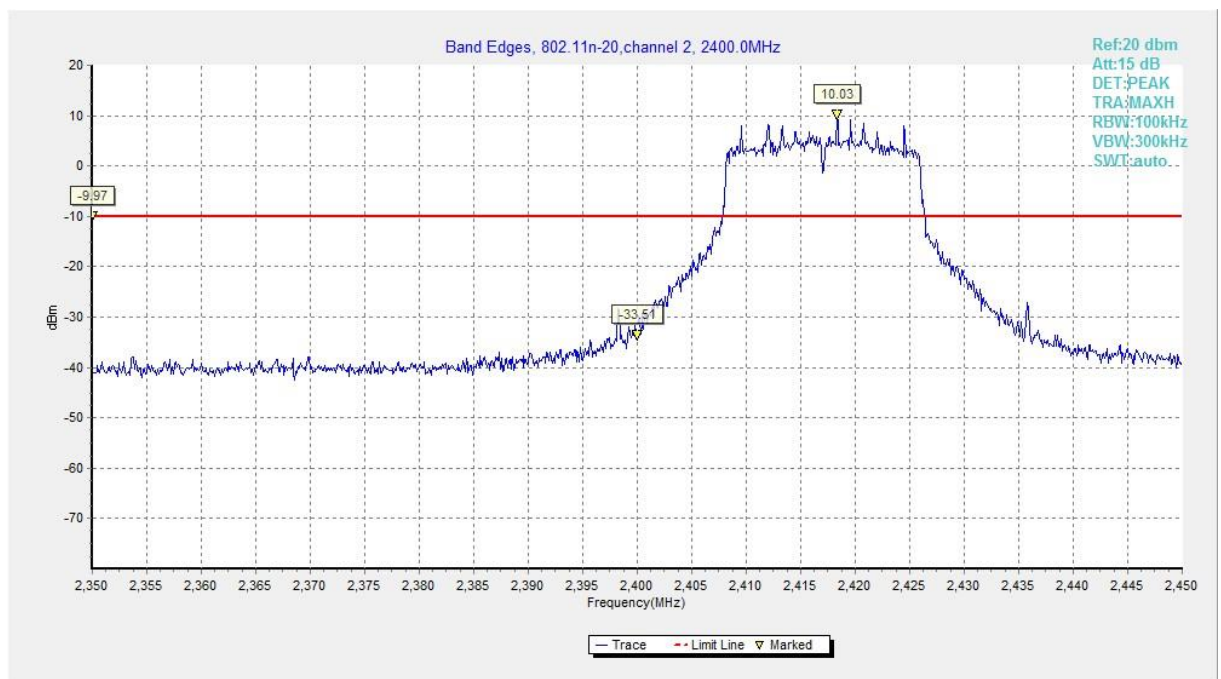


Fig.A.5.1.7 Band Edges (802.11n-HT20, Ch 2)

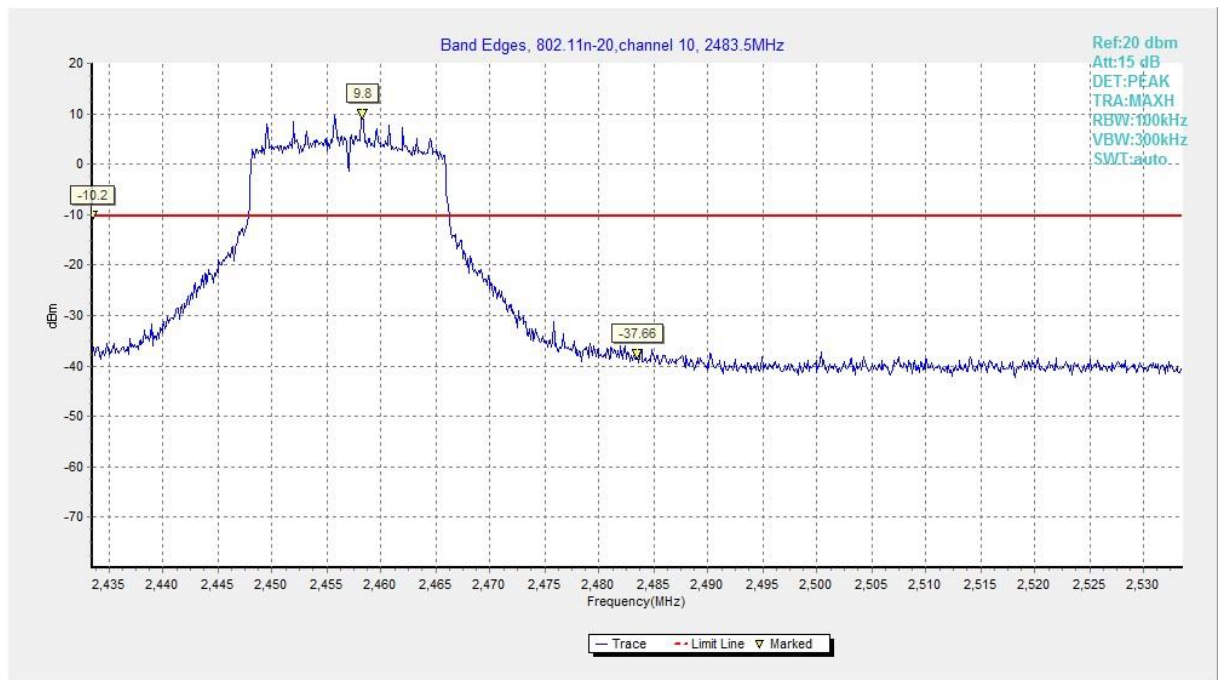


Fig.A.5.1.8 Band Edges (802.11n-HT20, Ch 10)

MIMO-Ant8

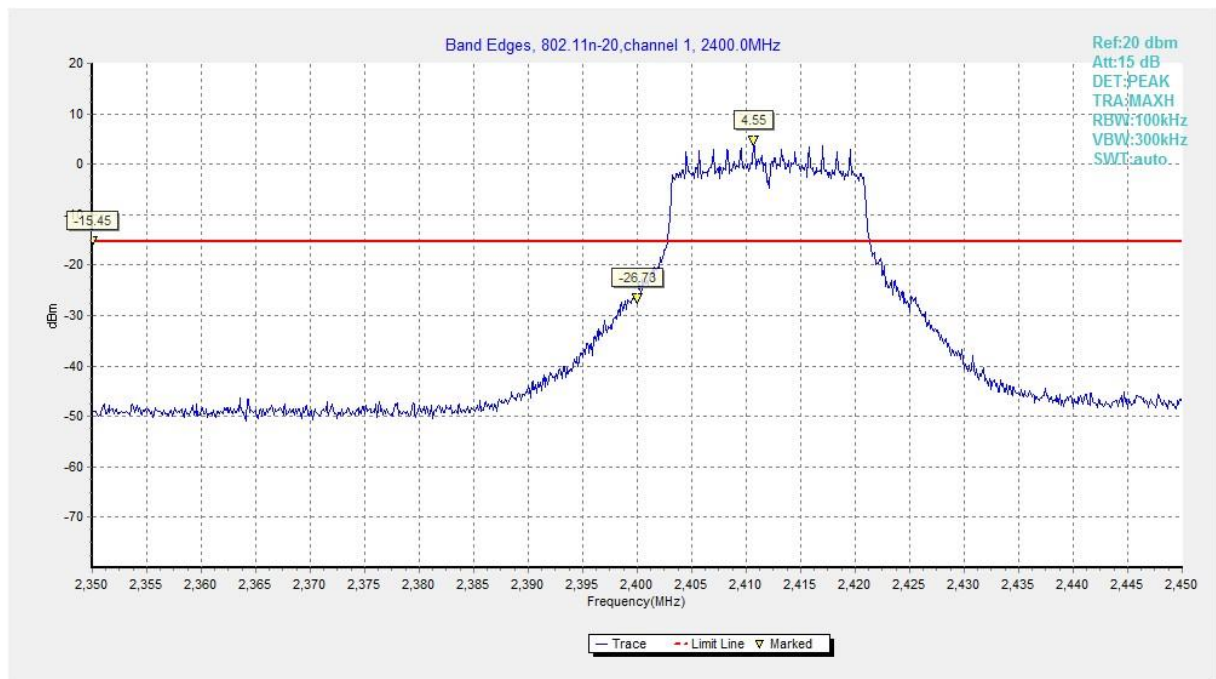


Fig.A.5.1.9 Band Edges (802.11n-HT20, Ch 1)

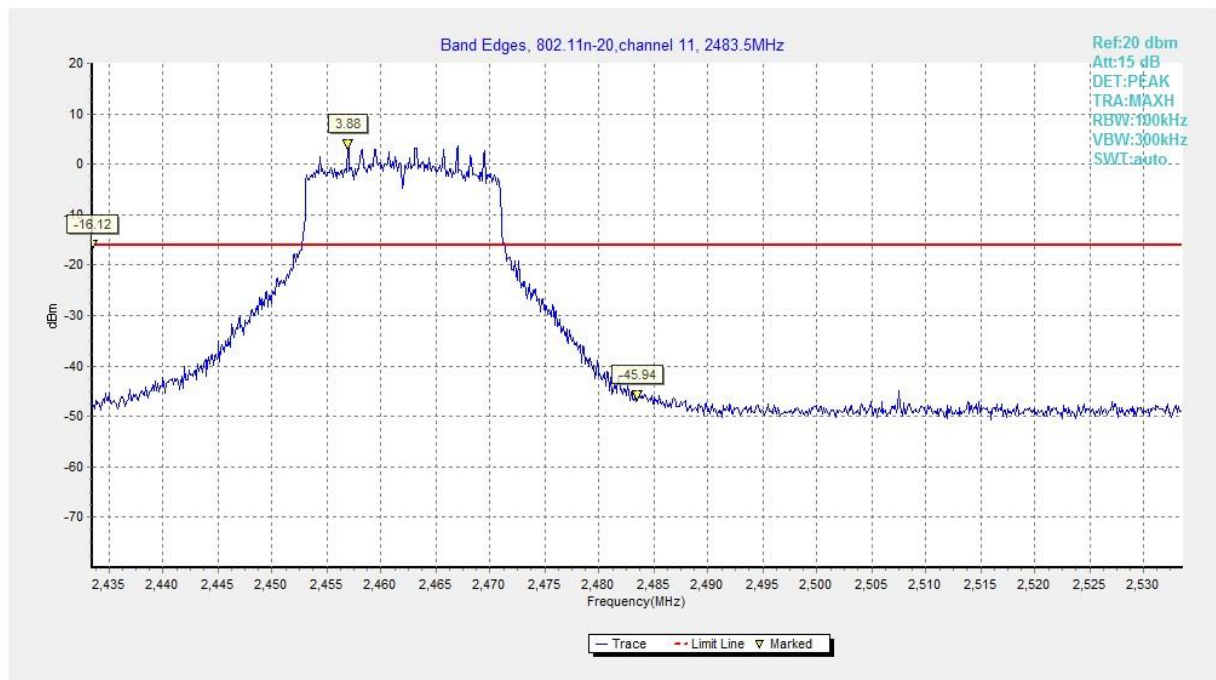


Fig.A.5.1.10 Band Edges (802.11n-HT20, Ch 11)

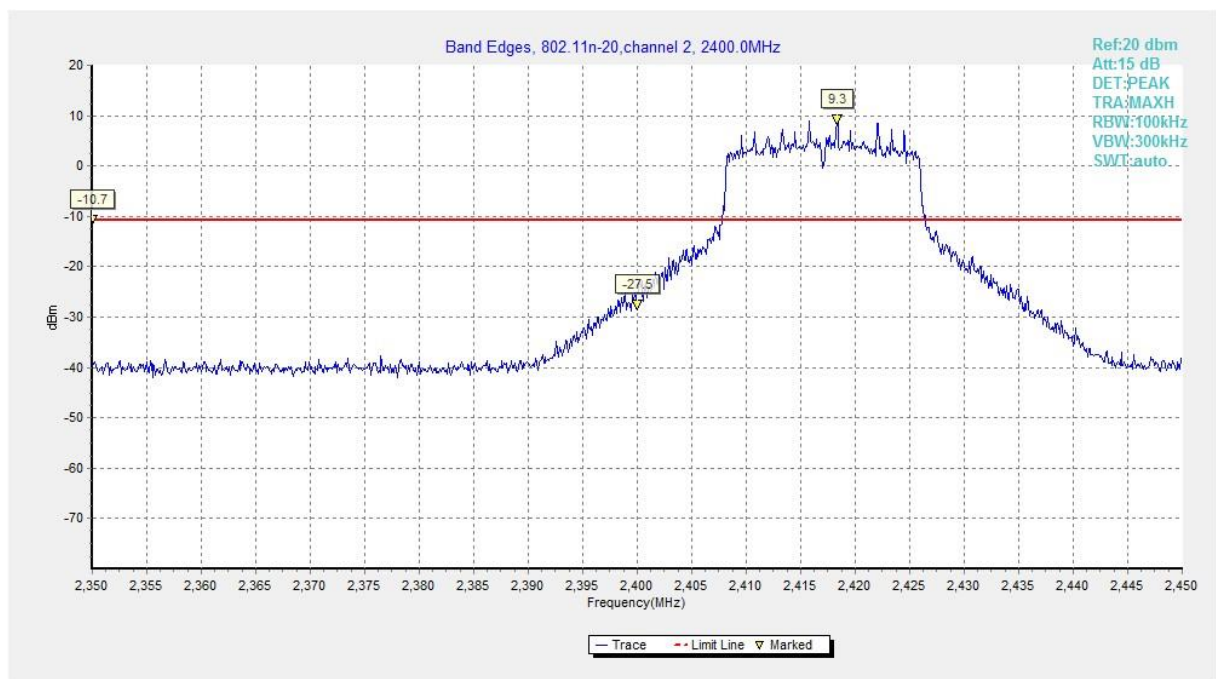


Fig.A.5.1.11 Band Edges (802.11n-HT20, Ch 2)

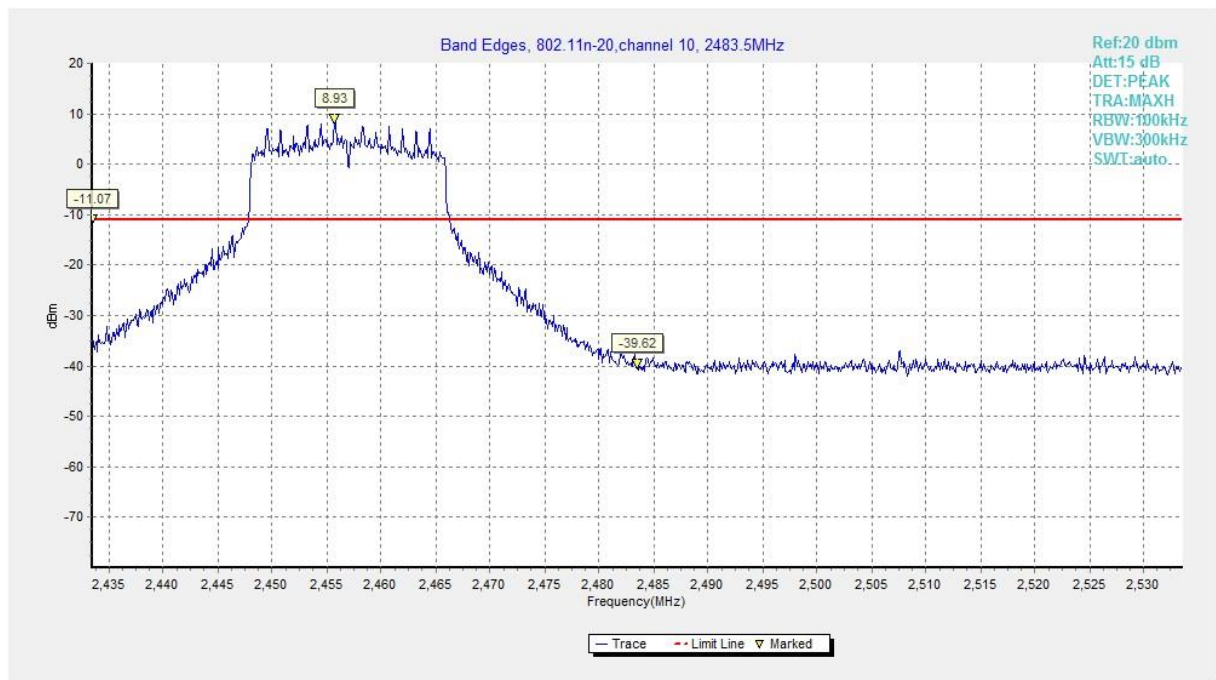


Fig.A.5.1.12 Band Edges (802.11n-HT20, Ch 10)

A.5.2 Band Edges Compliance –Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral

display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required. For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Measurement Result:

EUT ID: UT76a

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.2.1	P
	11	Fig.A.5.2.2	P
802.11g	1	Fig.A.5.2.3	P
	11	Fig.A.5.2.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.2.5	P
	2	Fig.A.5.2.6	P
	10	Fig.A.5.2.7	P

	11	Fig.A.5.2.8	P
--	----	-------------	---

Conclusion: Pass

Note: The plot above is the combination results of both vertical and horizontal polarizations
Test graphs as below:

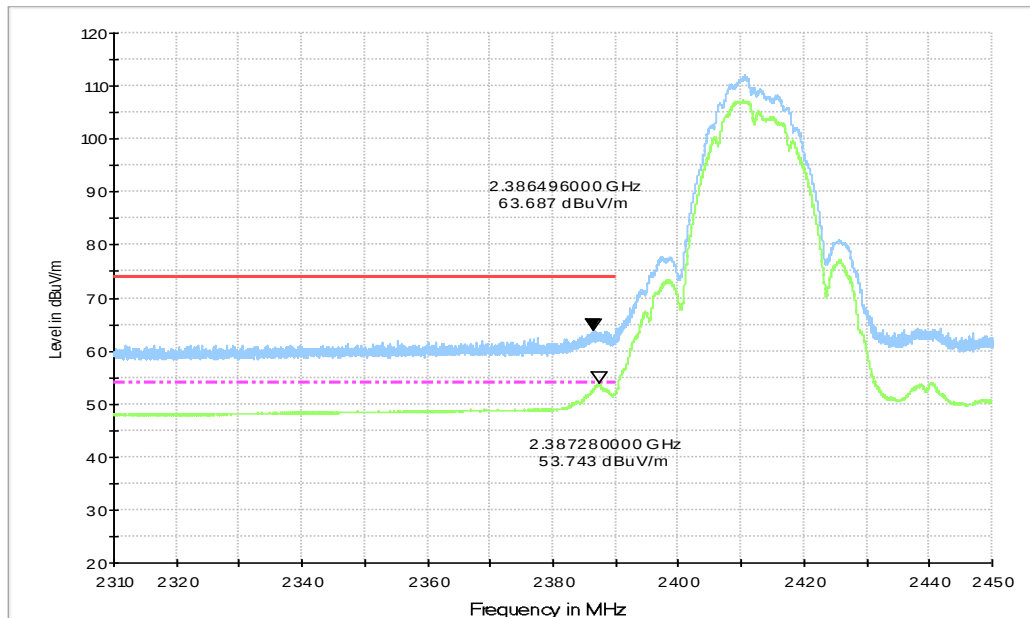


Fig.A.5.2.1 Radiated band Edges (802.11b, Ch 1)

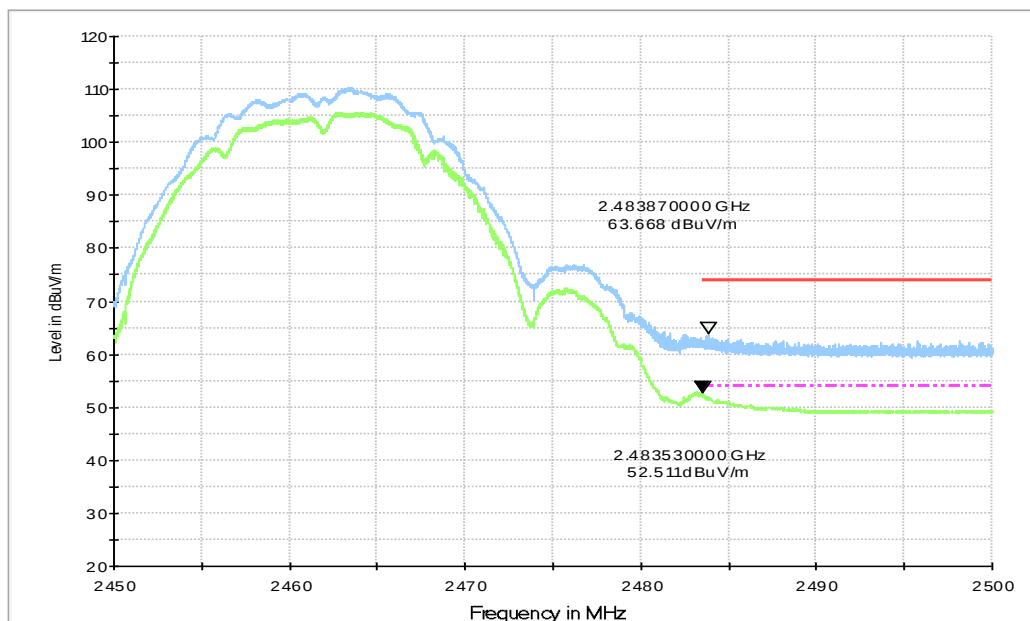


Fig.A.5.2.2 Radiated band Edges (802.11b, Ch 11)

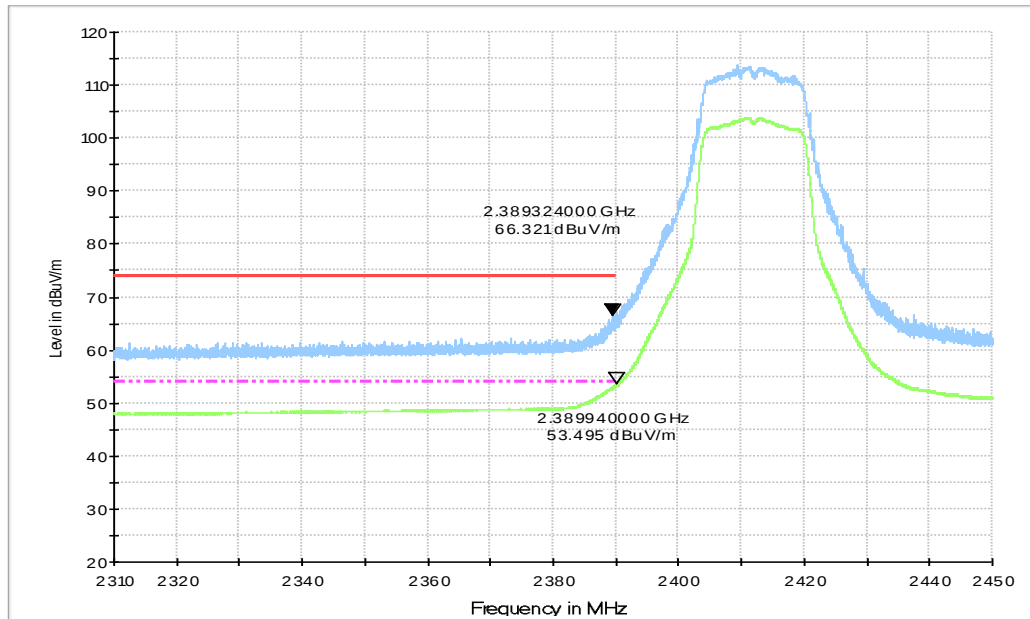


Fig.A.5.2.3 Radiated band Edges (802.11g, Ch 1)

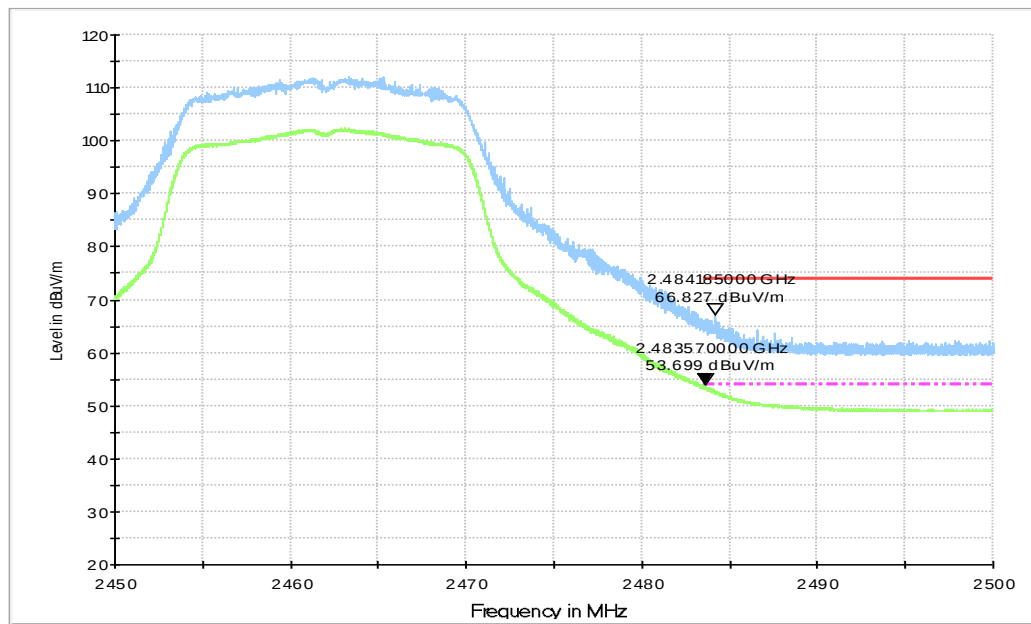


Fig.A.5.2.4 Radiated band Edges (802.11g, Ch 11)

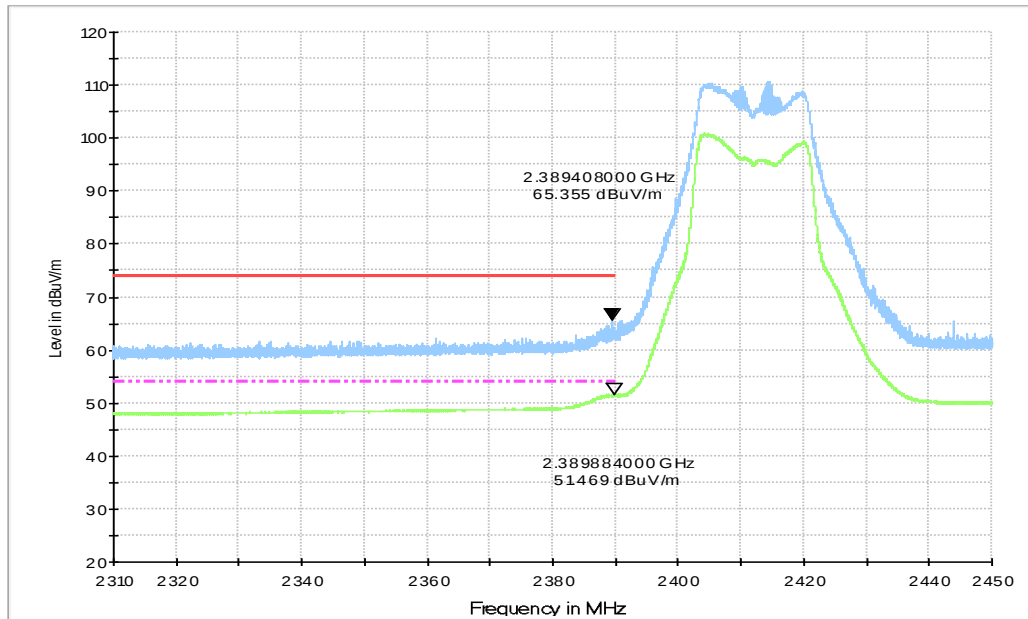


Fig.A.5.2.5 Radiated band Edges (802.11n-HT20, Ch 1)

Full Spectrum

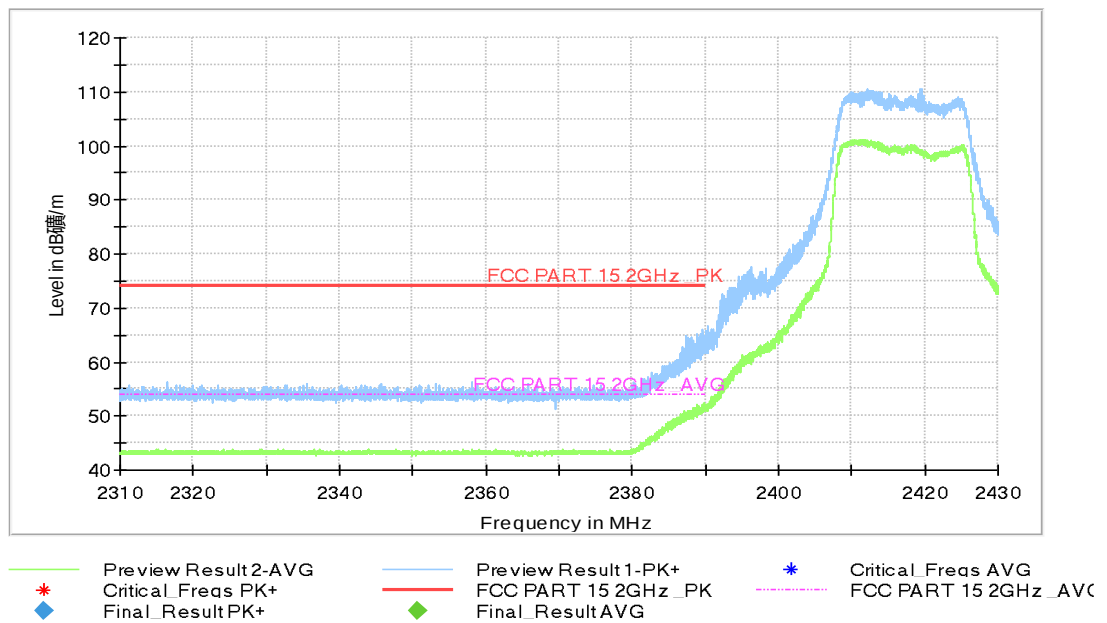


Fig.A.5.2.6 Radiated band Edges (802.11n-HT20, Ch 2)

Full Spectrum

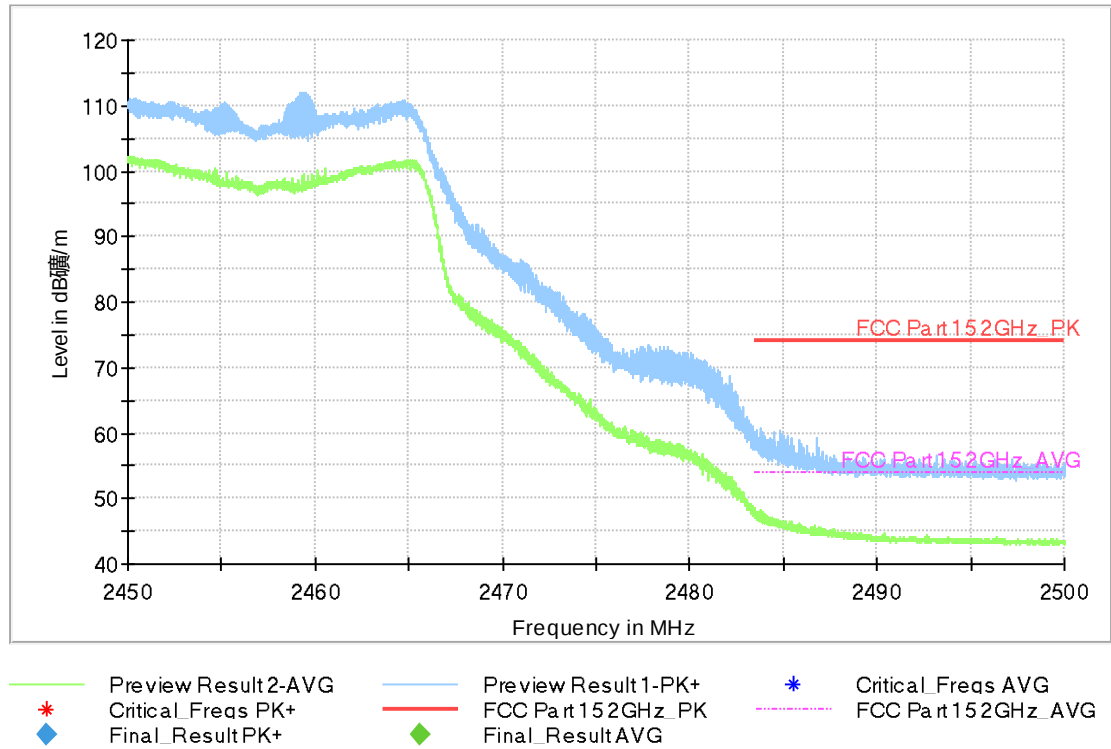


Fig.A.5.2.7 Radiated band Edges (802.11n-HT20, Ch 10)

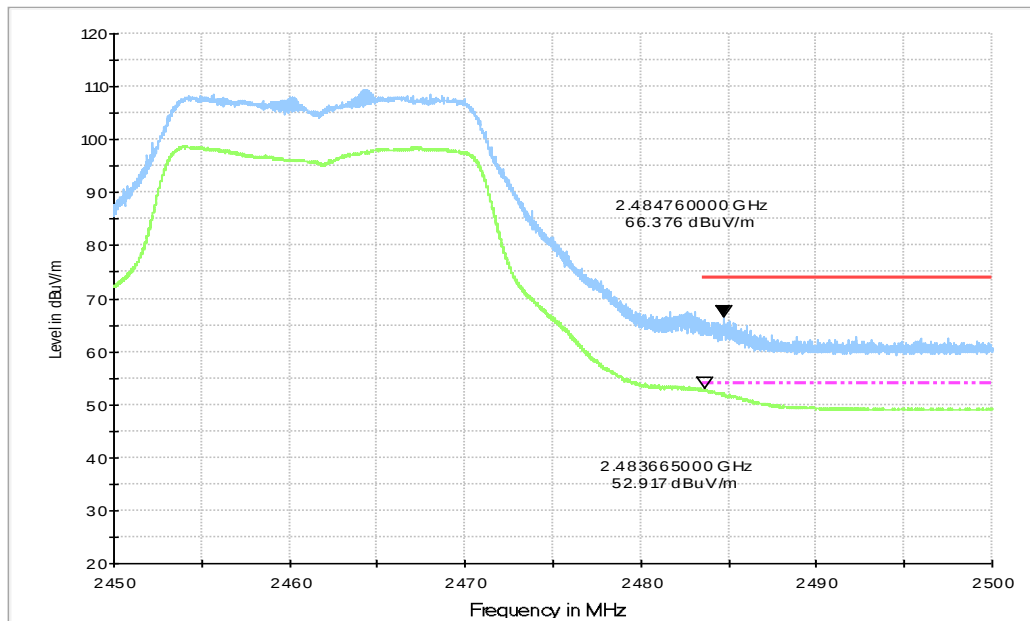


Fig.A.5.2.8 Radiated band Edges (802.11n-HT20, Ch 11)

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission – Conducted

Method of Measurement: See ANSI C63.10-2013-clause 11.11

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to ≥ 1.5 times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

EUT ID: UT86a

Measurement Results:

SISO-Ant8
802.11b mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.A.6.1.1	P
		30 MHz ~ 1 GHz	Fig.A.6.1.2	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.3	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.4	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.5	P
		10 GHz ~ 15 GHz	Fig.A.6.1.6	P
		15 GHz ~ 20 GHz	Fig.A.6.1.7	P
		20 GHz ~ 26 GHz	Fig.A.6.1.8	P
	6	2.437 GHz	Fig.A.6.1.9	P
		30 MHz ~ 1 GHz	Fig.A.6.1.10	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.11	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.12	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.13	P
		10 GHz ~ 15 GHz	Fig.A.6.1.14	P
		15 GHz ~ 20 GHz	Fig.A.6.1.15	P
		20 GHz ~ 26 GHz	Fig.A.6.1.16	P
	11	2.462 GHz	Fig.A.6.1.17	P
		30 MHz ~ 1 GHz	Fig.A.6.1.18	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.19	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.20	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.21	P
		10 GHz ~ 15 GHz	Fig.A.6.1.22	P
		15 GHz ~ 20 GHz	Fig.A.6.1.23	P
		20 GHz ~ 26 GHz	Fig.A.6.1.24	P

802.11g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.412 GHz	Fig.A.6.1.25	P
		30 MHz ~ 1 GHz	Fig.A.6.1.26	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.27	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.28	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.29	P
		10 GHz ~ 15 GHz	Fig.A.6.1.30	P
		15 GHz ~ 20 GHz	Fig.A.6.1.31	P
		20 GHz ~ 26 GHz	Fig.A.6.1.32	P
	6	2.437 GHz	Fig.A.6.1.33	P
		30 MHz ~ 1 GHz	Fig.A.6.1.34	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.35	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.36	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.37	P
		10 GHz ~ 15 GHz	Fig.A.6.1.38	P
		15 GHz ~ 20 GHz	Fig.A.6.1.39	P
		20 GHz ~ 26 GHz	Fig.A.6.1.40	P
	11	2.462 GHz	Fig.A.6.1.41	P
		30 MHz ~ 1 GHz	Fig.A.6.1.42	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.43	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.44	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.45	P
		10 GHz ~ 15 GHz	Fig.A.6.1.46	P
		15 GHz ~ 20 GHz	Fig.A.6.1.47	P
		20 GHz ~ 26 GHz	Fig.A.6.1.48	P

802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.49	P
		30 MHz ~ 1 GHz	Fig.A.6.1.50	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.51	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.52	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.53	P
		10 GHz ~ 15 GHz	Fig.A.6.1.54	P
		15 GHz ~ 20 GHz	Fig.A.6.1.55	P
		20 GHz ~ 26 GHz	Fig.A.6.1.56	P
	6	2.437 GHz	Fig.A.6.1.57	P
		30 MHz ~ 1 GHz	Fig.A.6.1.58	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.59	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.60	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.61	P
		10 GHz ~ 15 GHz	Fig.A.6.1.62	P
		15 GHz ~ 20 GHz	Fig.A.6.1.63	P
		20 GHz ~ 26 GHz	Fig.A.6.1.64	P
	11	2.462 GHz	Fig.A.6.1.65	P
		30 MHz ~ 1 GHz	Fig.A.6.1.66	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.67	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.68	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.69	P
		10 GHz ~ 15 GHz	Fig.A.6.1.70	P
		15 GHz ~ 20 GHz	Fig.A.6.1.71	P
		20 GHz ~ 26 GHz	Fig.A.6.1.72	P

MIMO-Ant8
802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.73	P
		30 MHz ~ 1 GHz	Fig.A.6.1.74	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.75	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.76	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.77	P
		10 GHz ~ 15 GHz	Fig.A.6.1.78	P
		15 GHz ~ 20 GHz	Fig.A.6.1.79	P
		20 GHz ~ 26 GHz	Fig.A.6.1.80	P
	6	2.437 GHz	Fig.A.6.1.81	P
		30 MHz ~ 1 GHz	Fig.A.6.1.82	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.83	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.84	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.85	P
		10 GHz ~ 15 GHz	Fig.A.6.1.86	P
		15 GHz ~ 20 GHz	Fig.A.6.1.87	P
		20 GHz ~ 26 GHz	Fig.A.6.1.88	P
	11	2.462 GHz	Fig.A.6.1.89	P
		30 MHz ~ 1 GHz	Fig.A.6.1.90	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.91	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.92	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.93	P
		10 GHz ~ 15 GHz	Fig.A.6.1.94	P
		15 GHz ~ 20 GHz	Fig.A.6.1.95	P
		20 GHz ~ 26 GHz	Fig.A.6.1.96	P

Note: All Antenna are tested, only the worst-case plot have been reported.(Ant8)

Conclusion: Pass

Test graphs as below:

SISO-Ant8

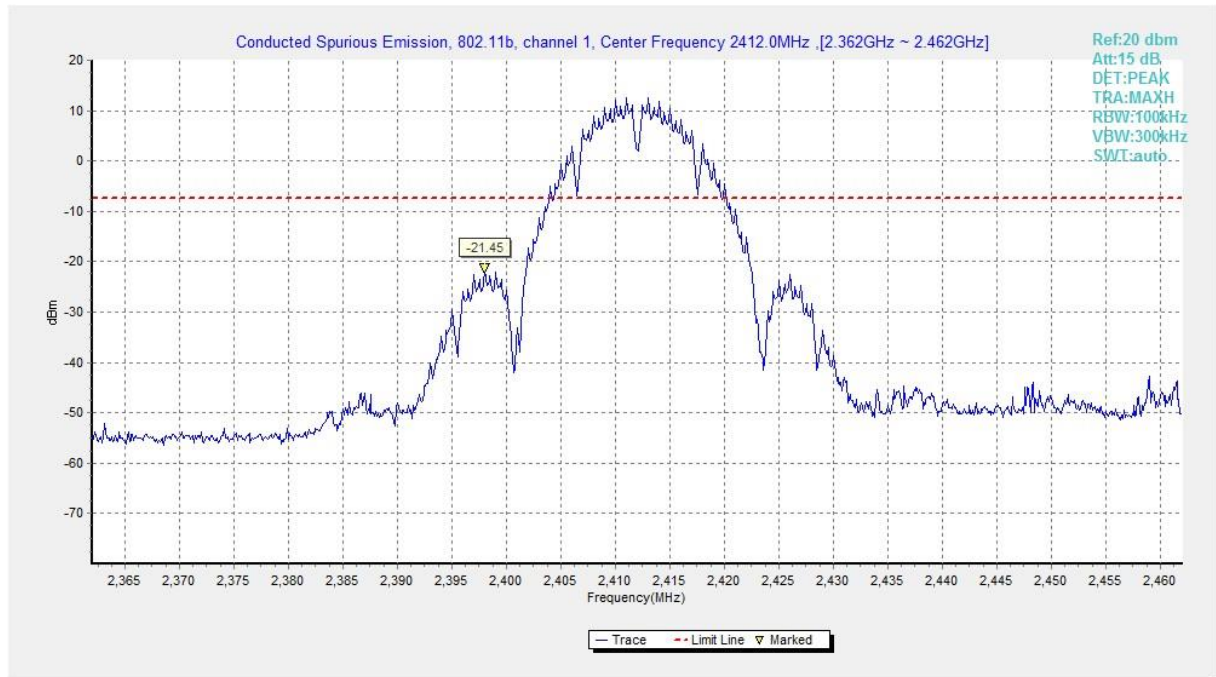


Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)

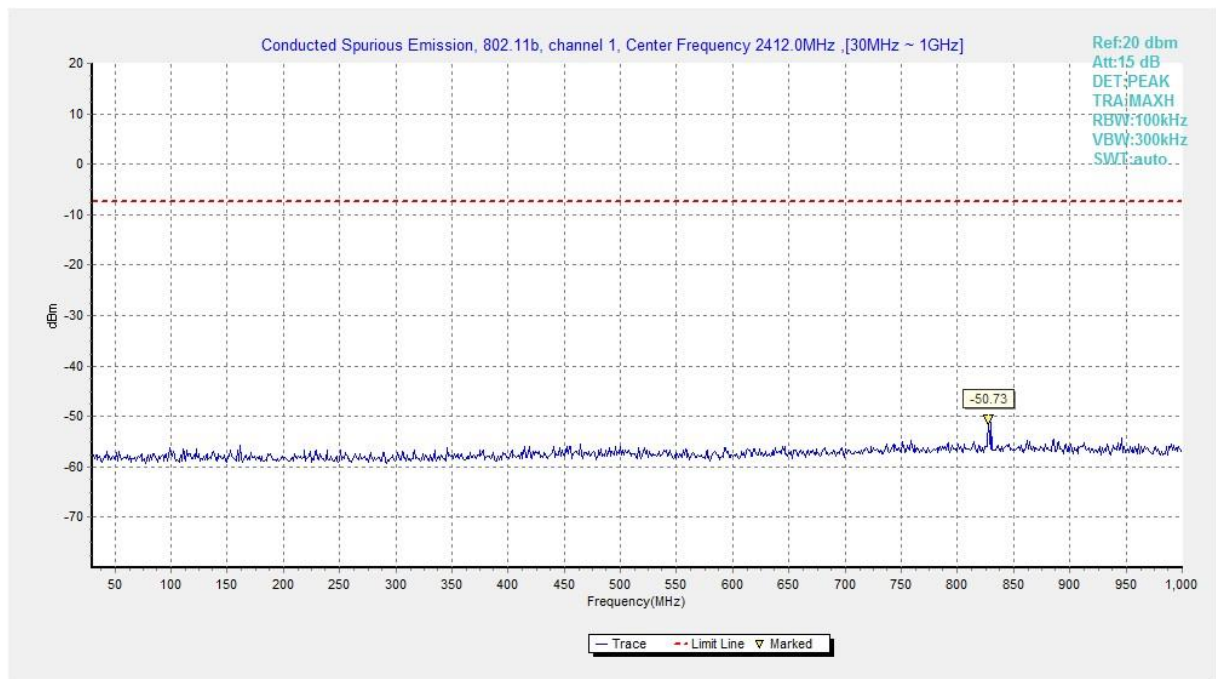


Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-1 GHz)

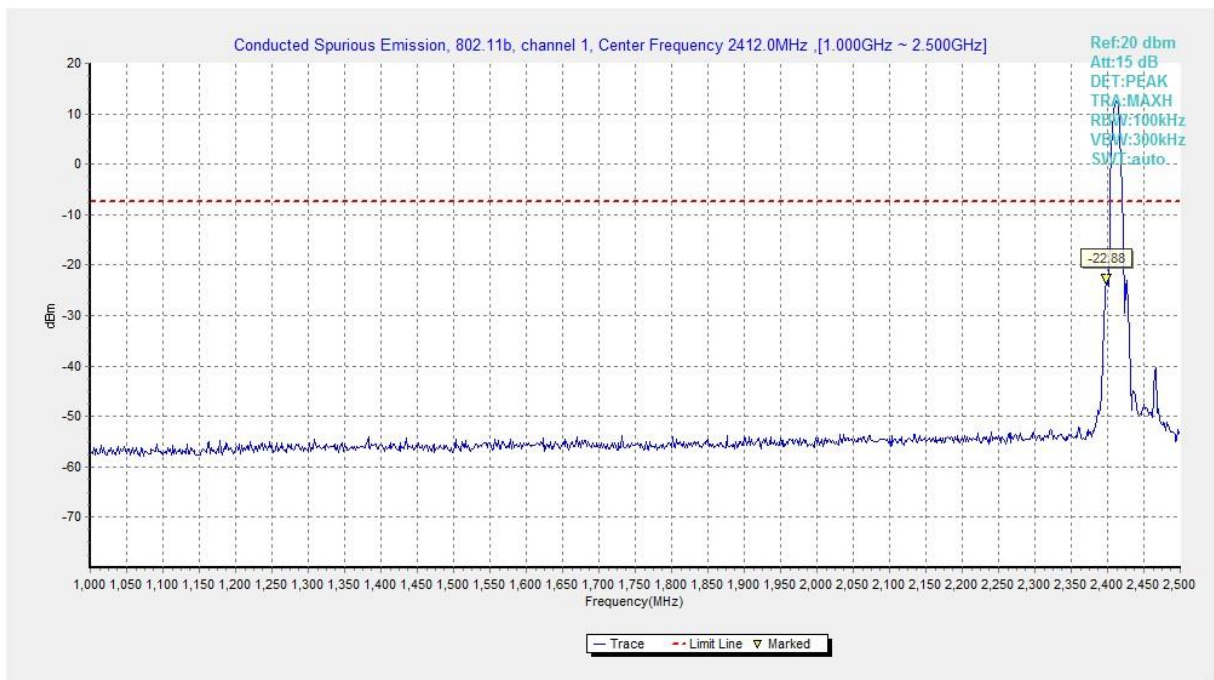


Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 1 GHz-2.5 GHz)

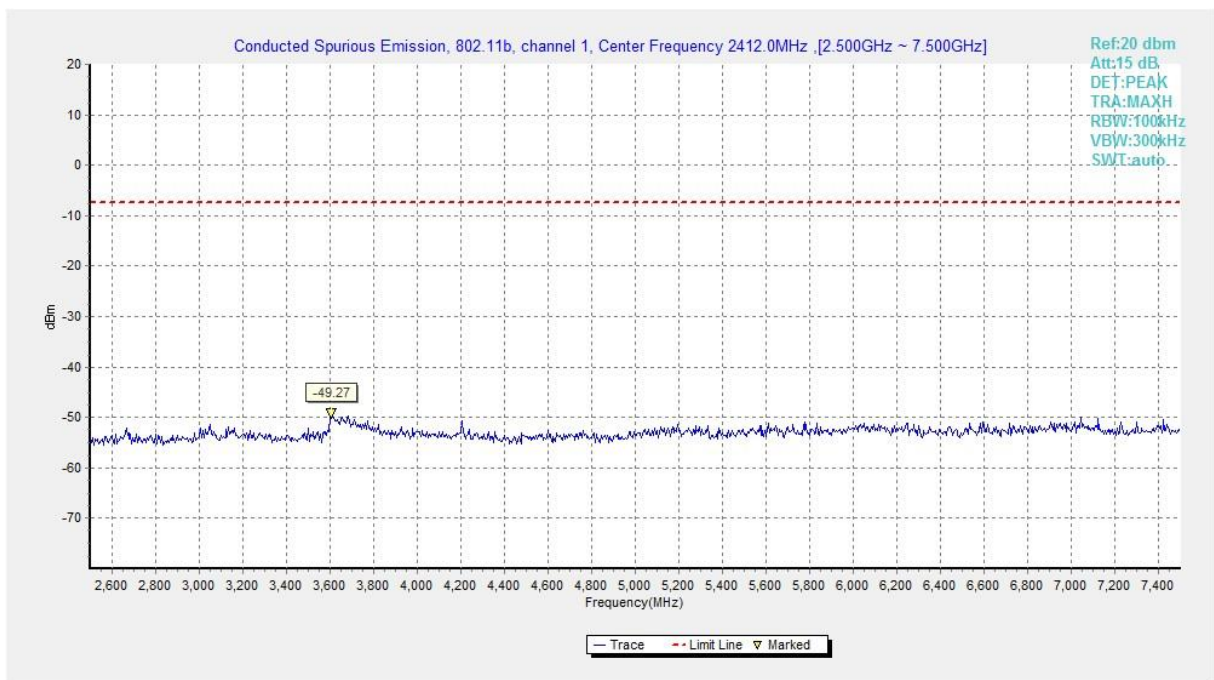


Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 2.5 GHz-7.5 GHz)

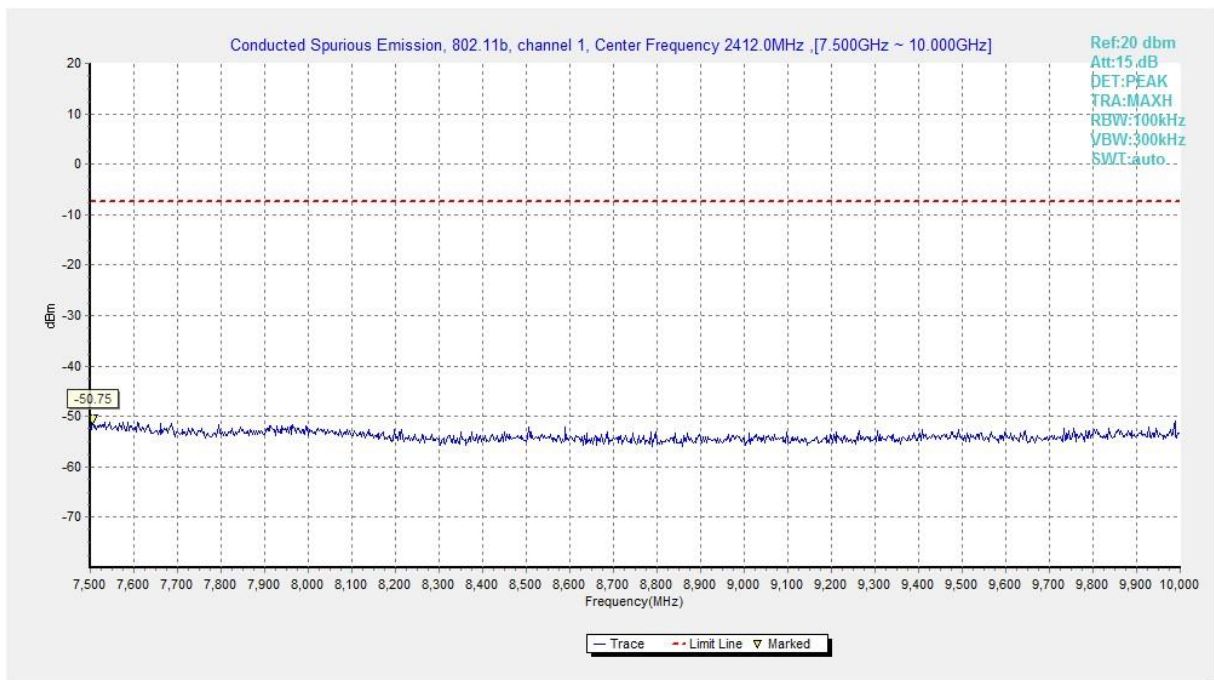


Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 7.5 GHz-10 GHz)

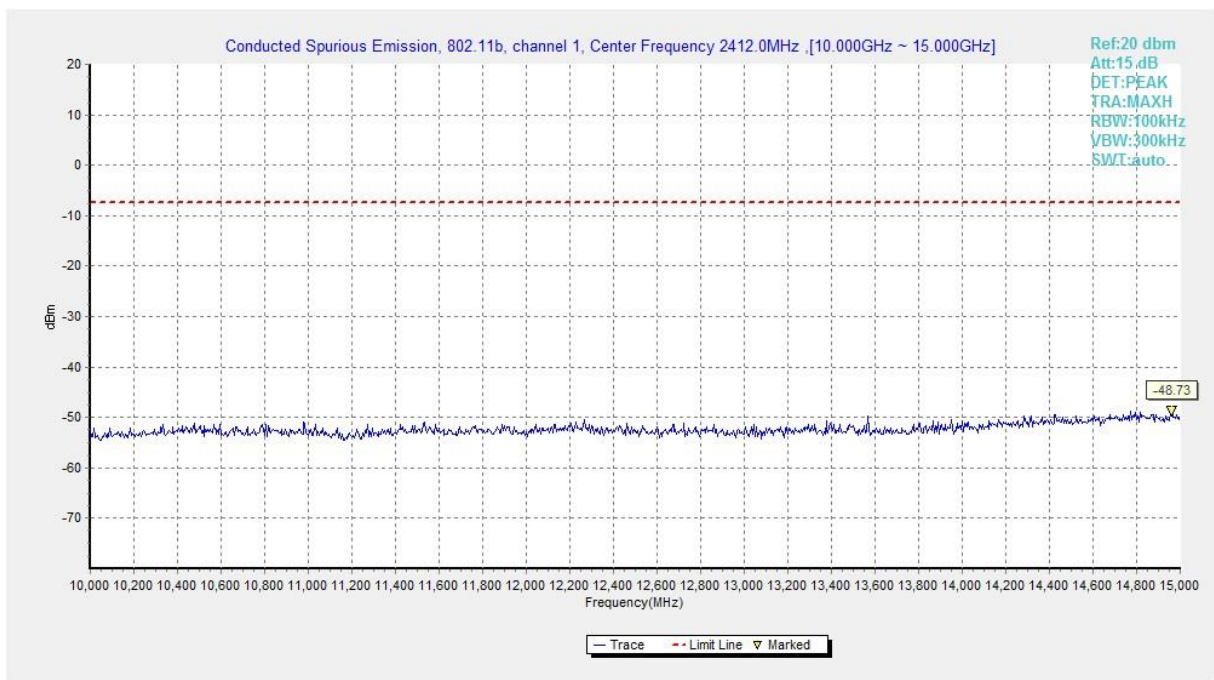


Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 10 GHz-15 GHz)

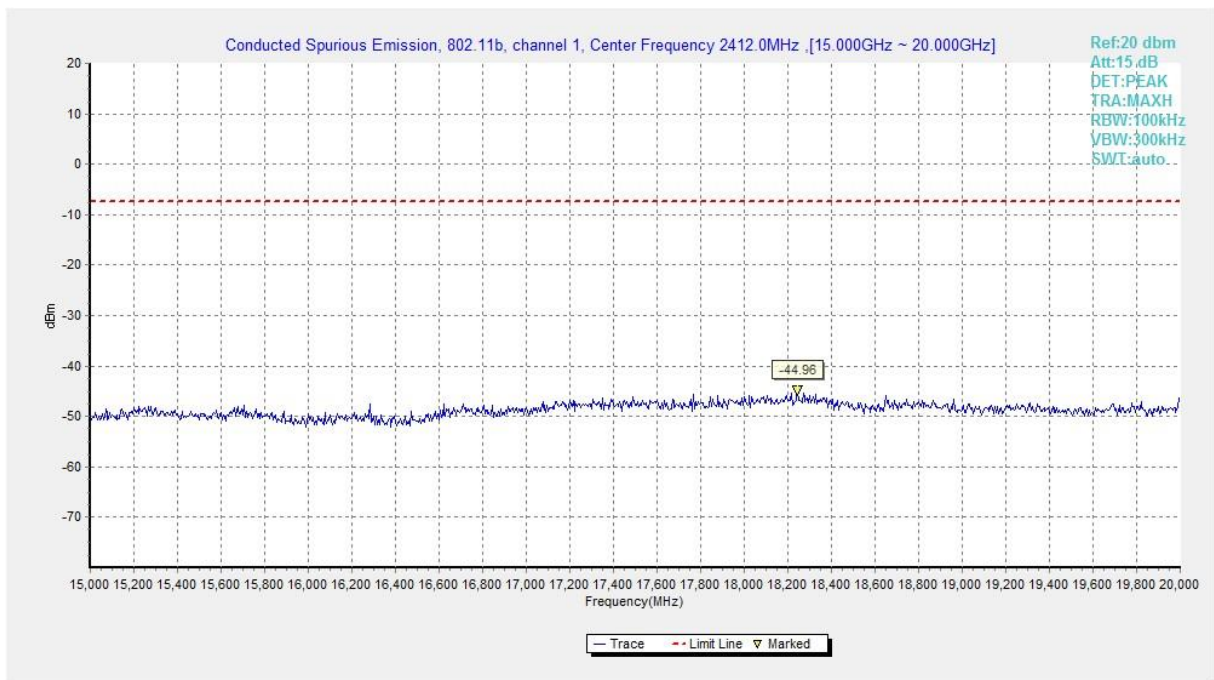


Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 15 GHz-20 GHz)

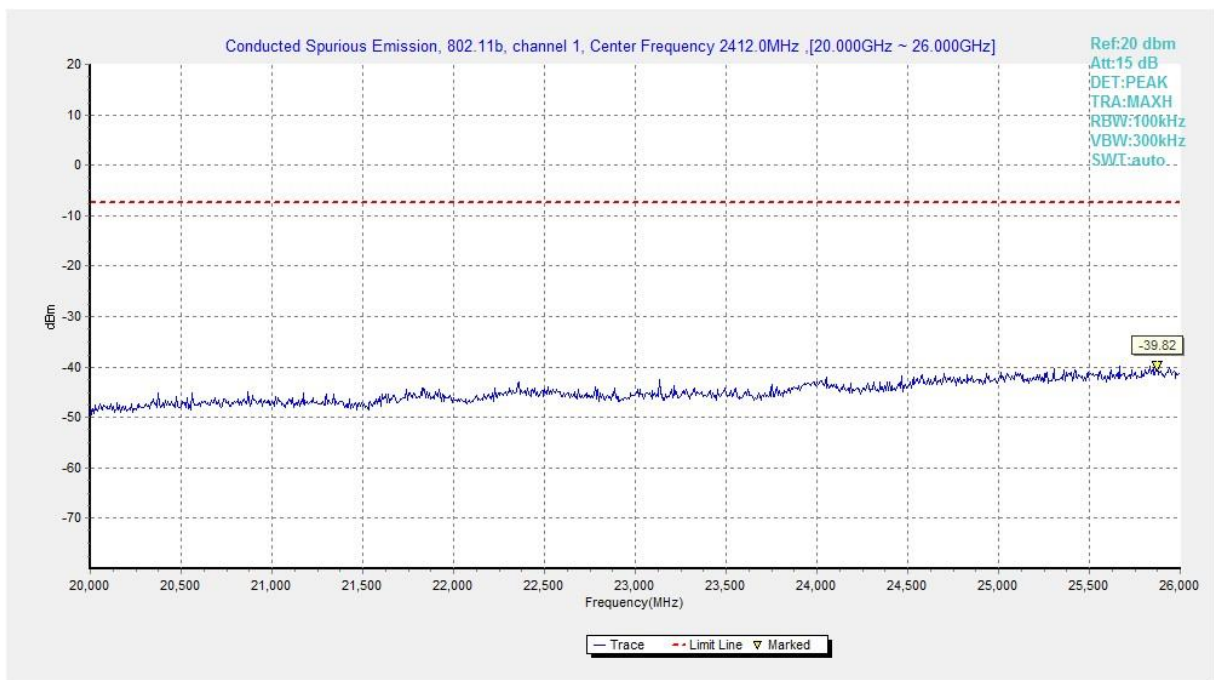


Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 20 GHz-26 GHz)

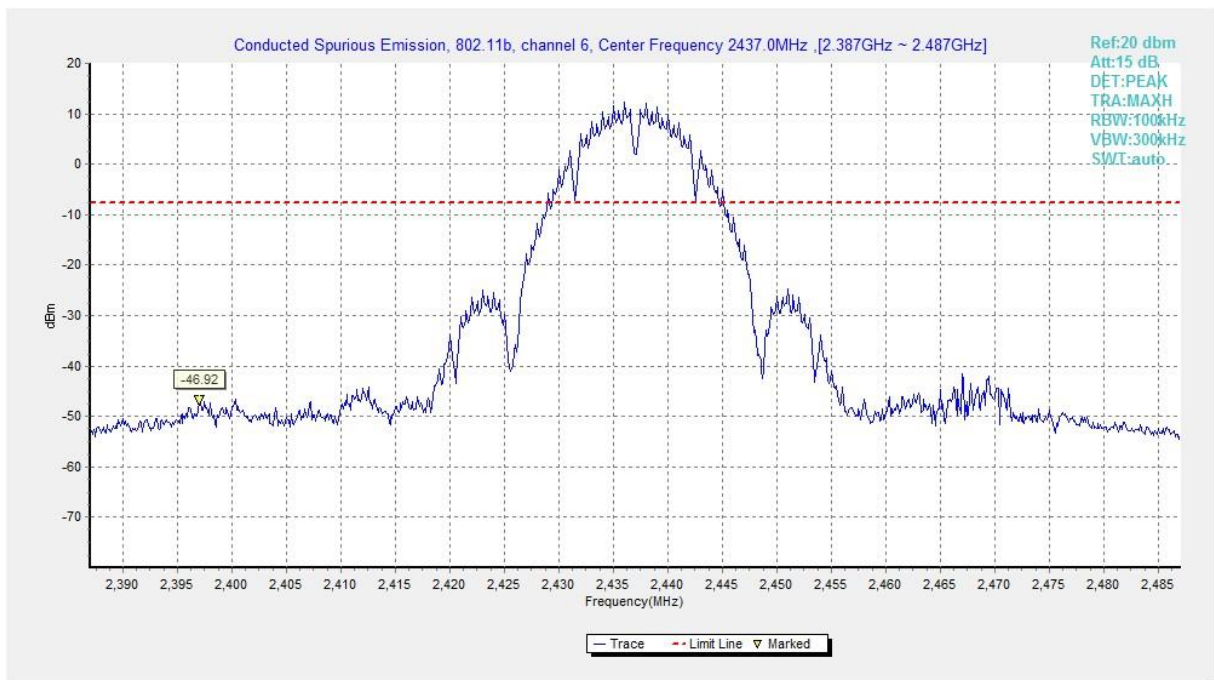


Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)

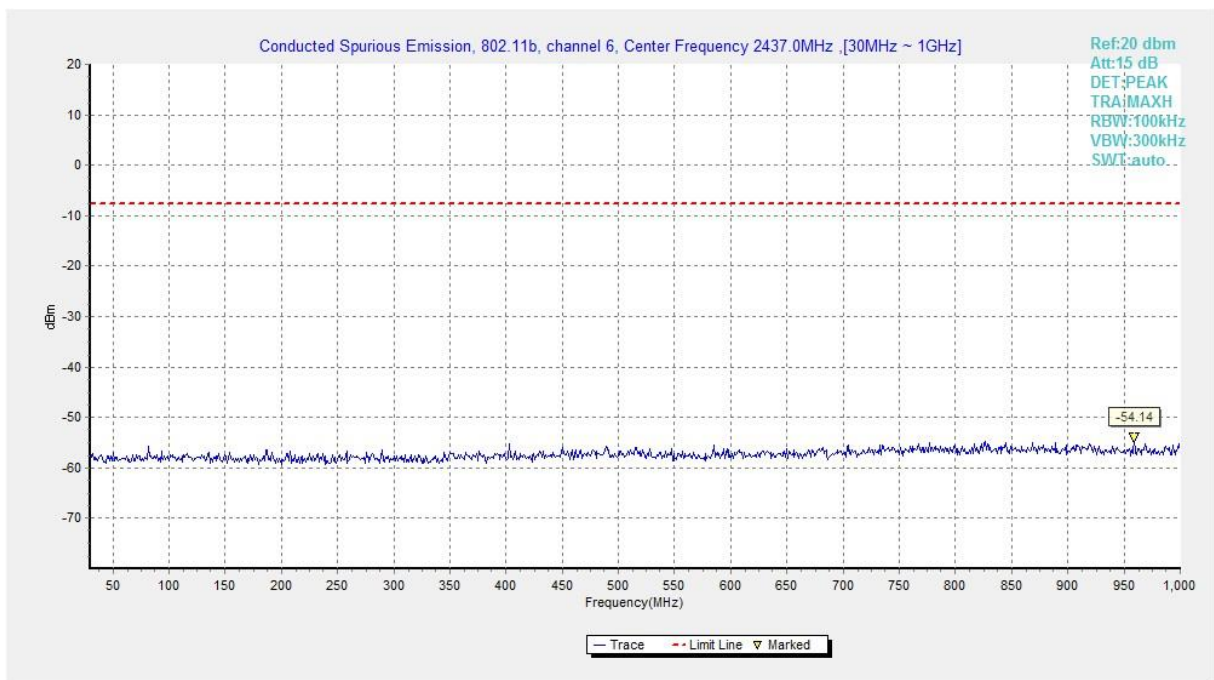


Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-1 GHz)

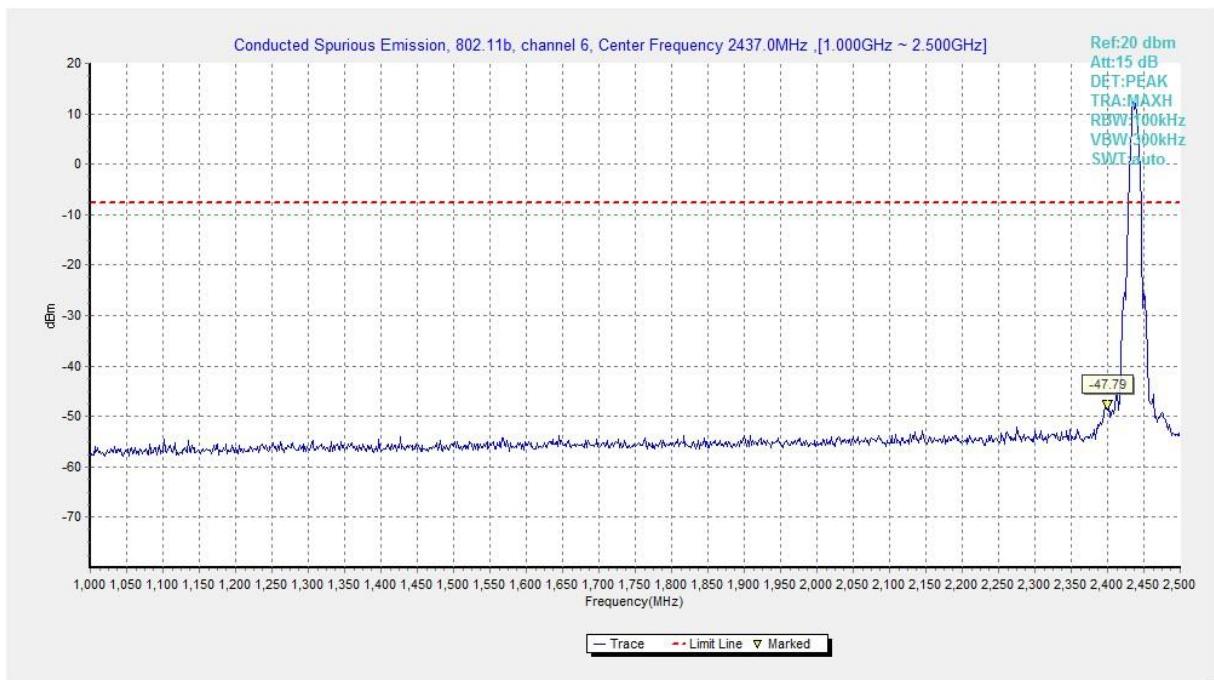


Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 1 GHz-2.5 GHz)

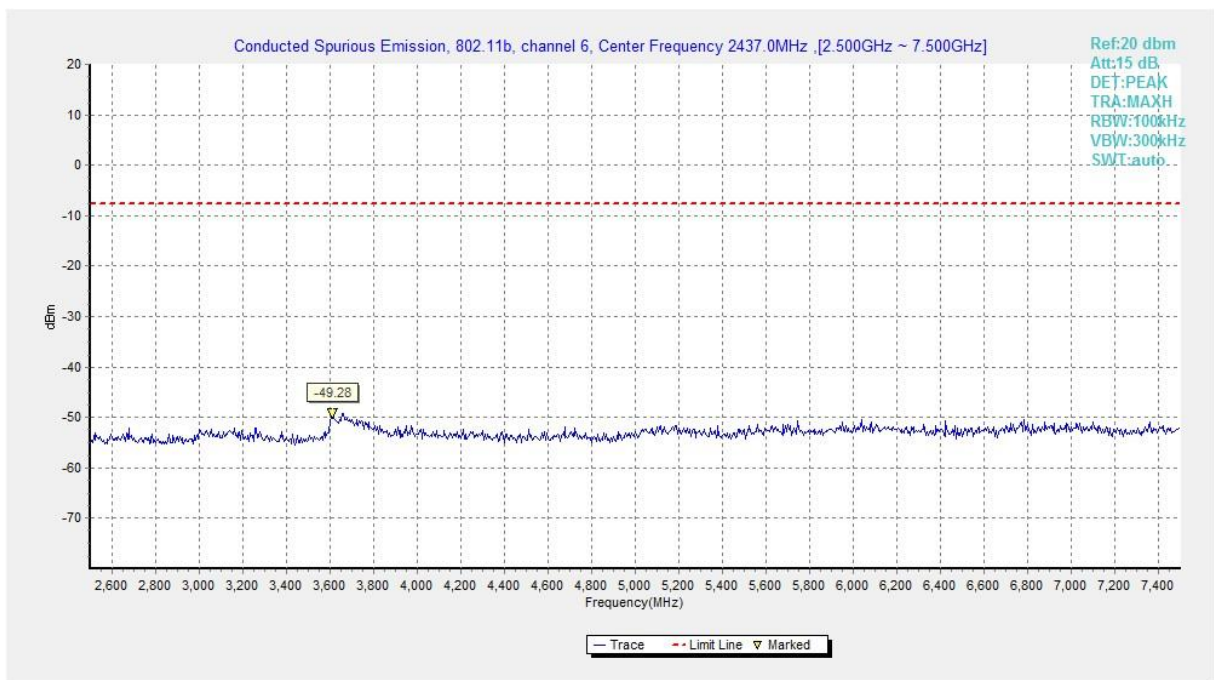


Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 2.5 GHz-7.5 GHz)

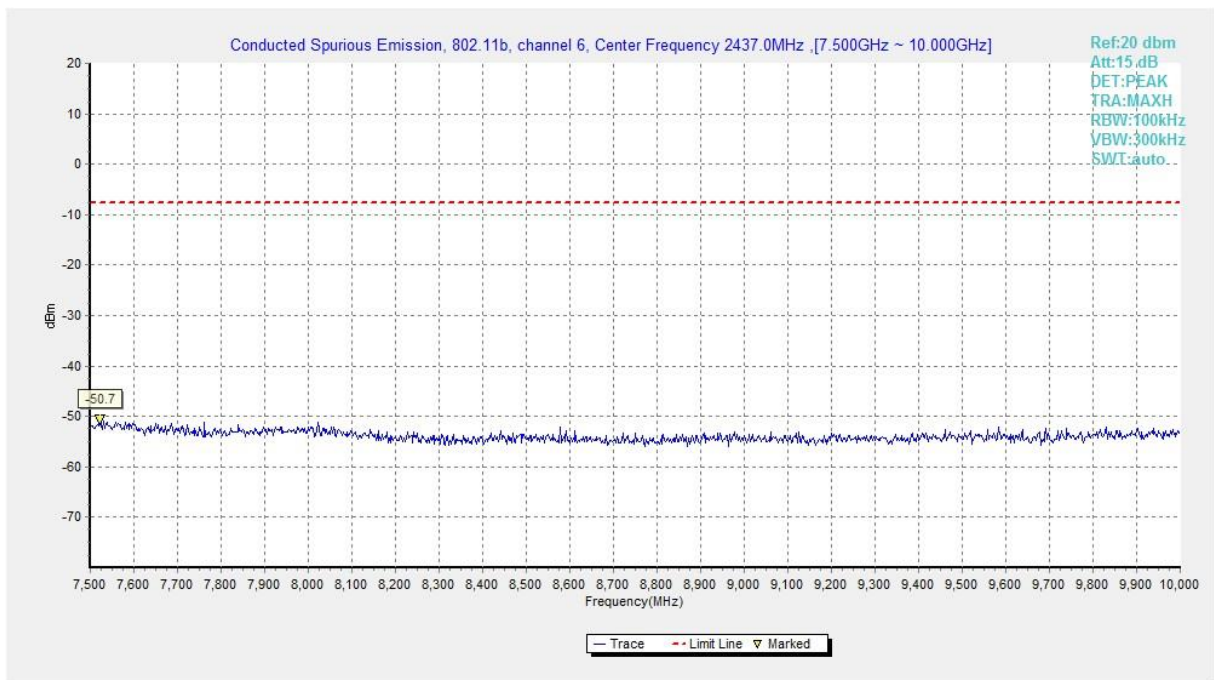


Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 7.5 GHz-10 GHz)

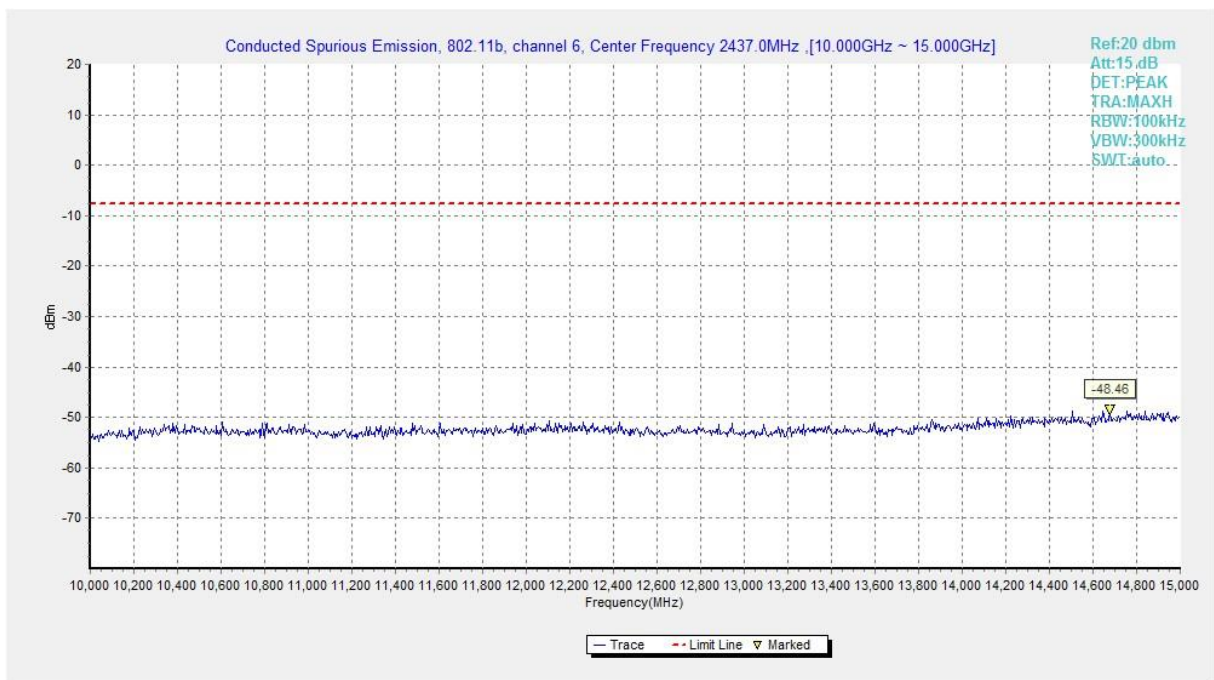


Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 10 GHz-15 GHz)

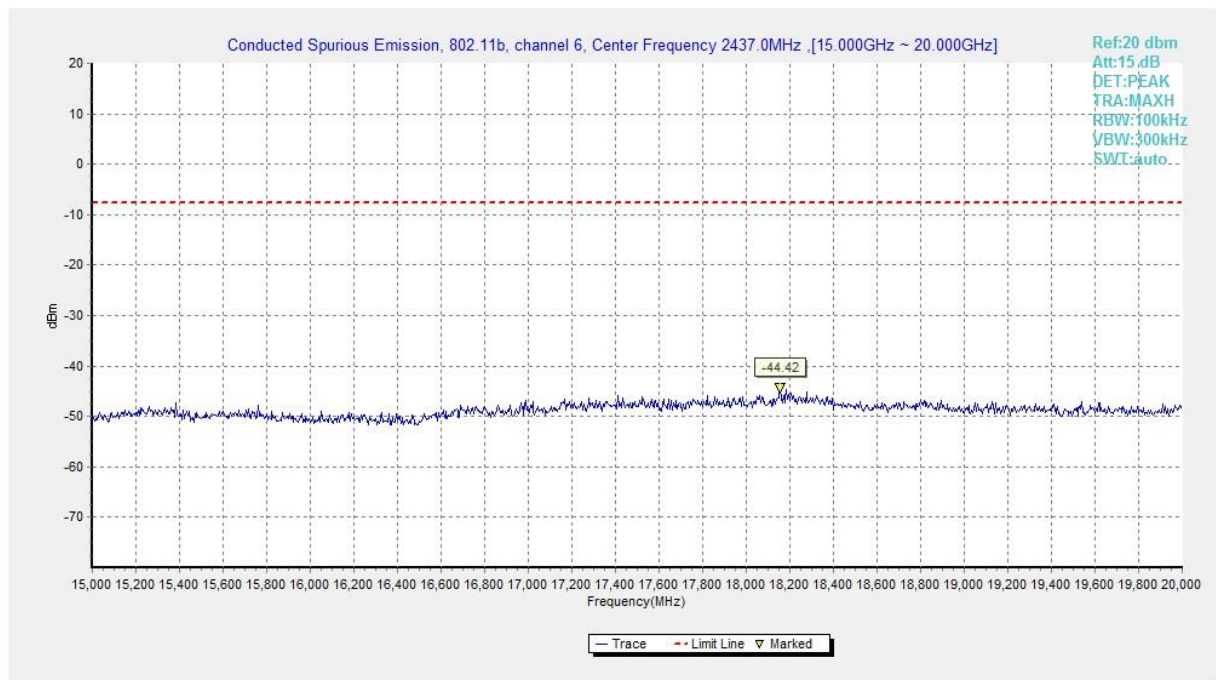


Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 15 GHz-20 GHz)

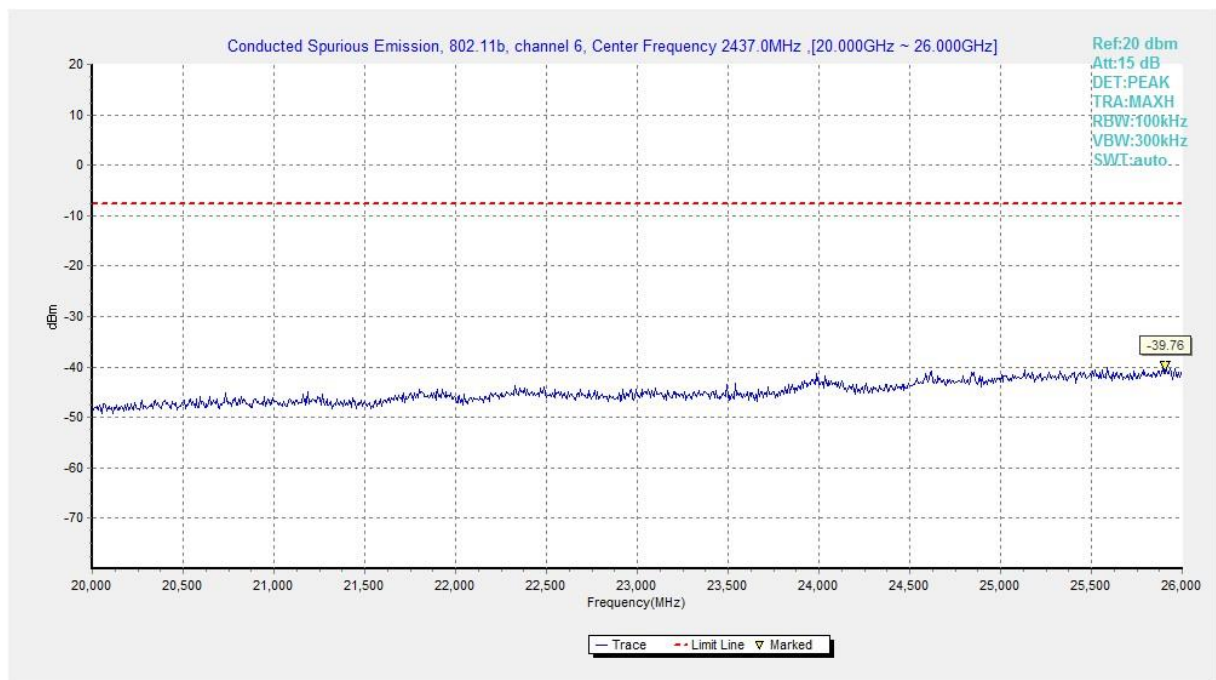


Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 20 GHz-26 GHz)

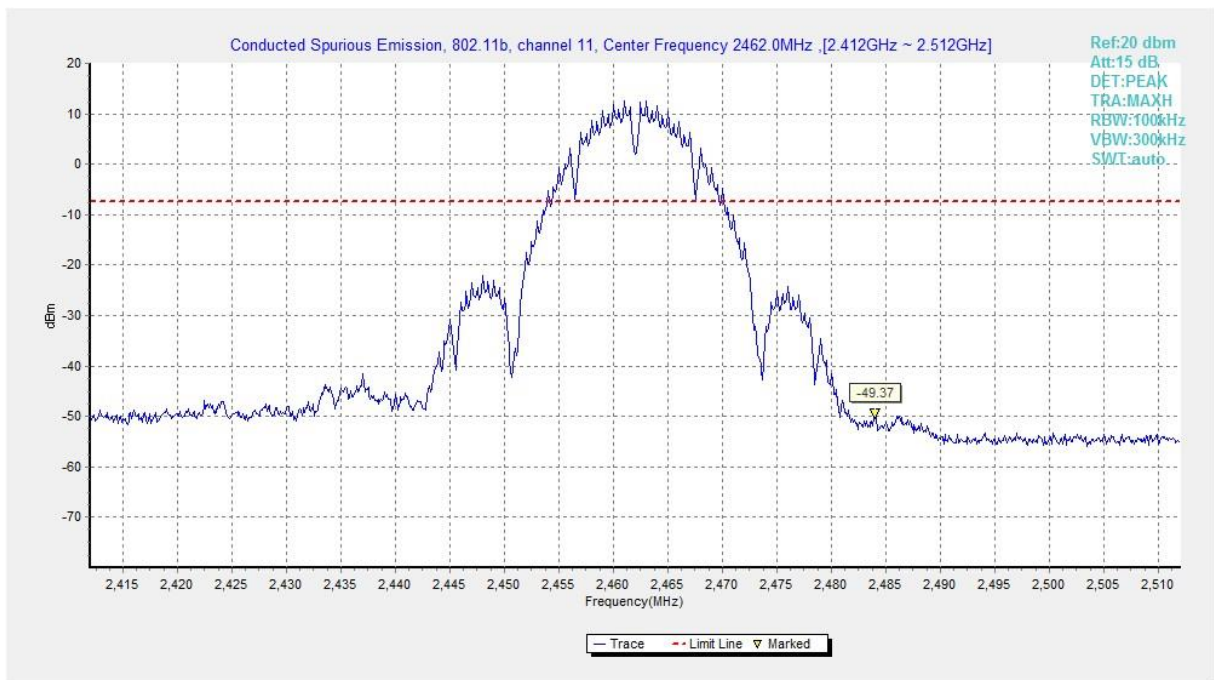


Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)

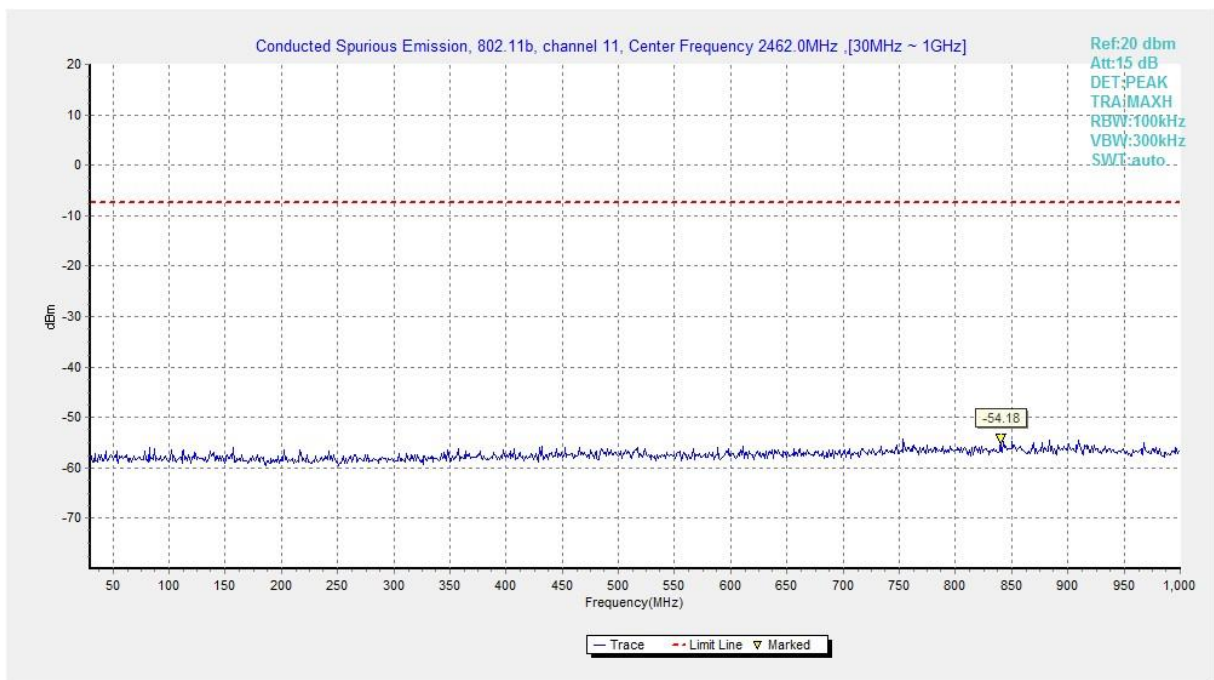


Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-1 GHz)

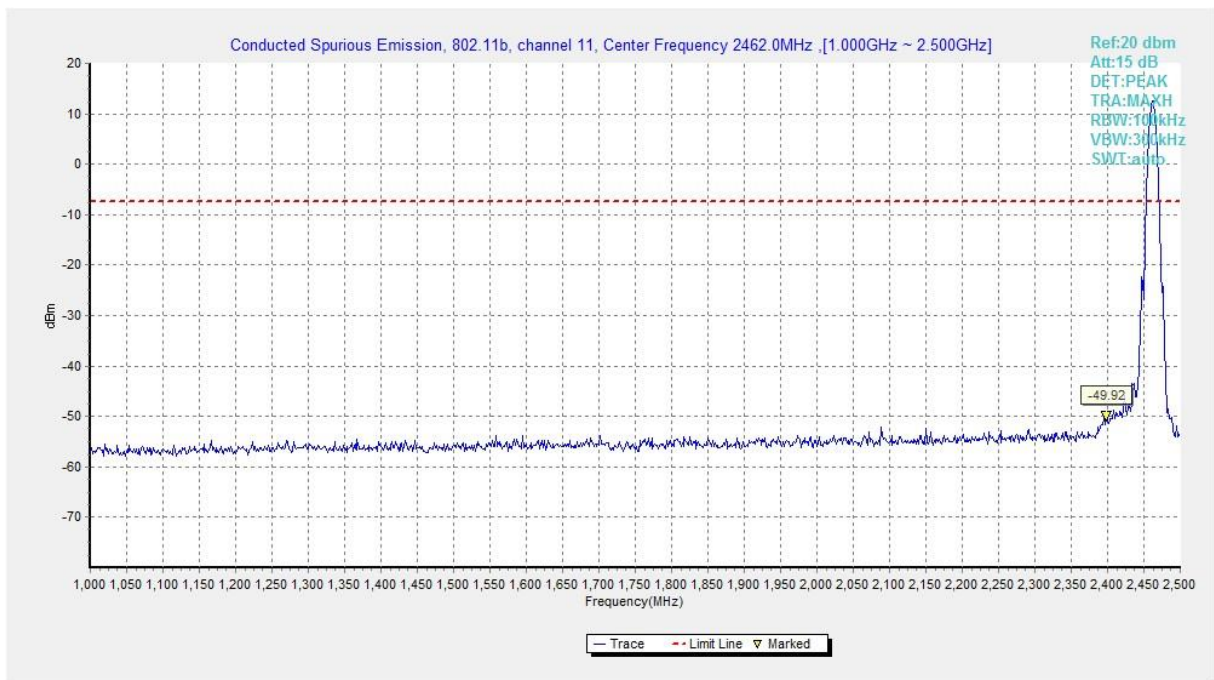


Fig.A.6.1.19 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 1 GHz-2.5 GHz)

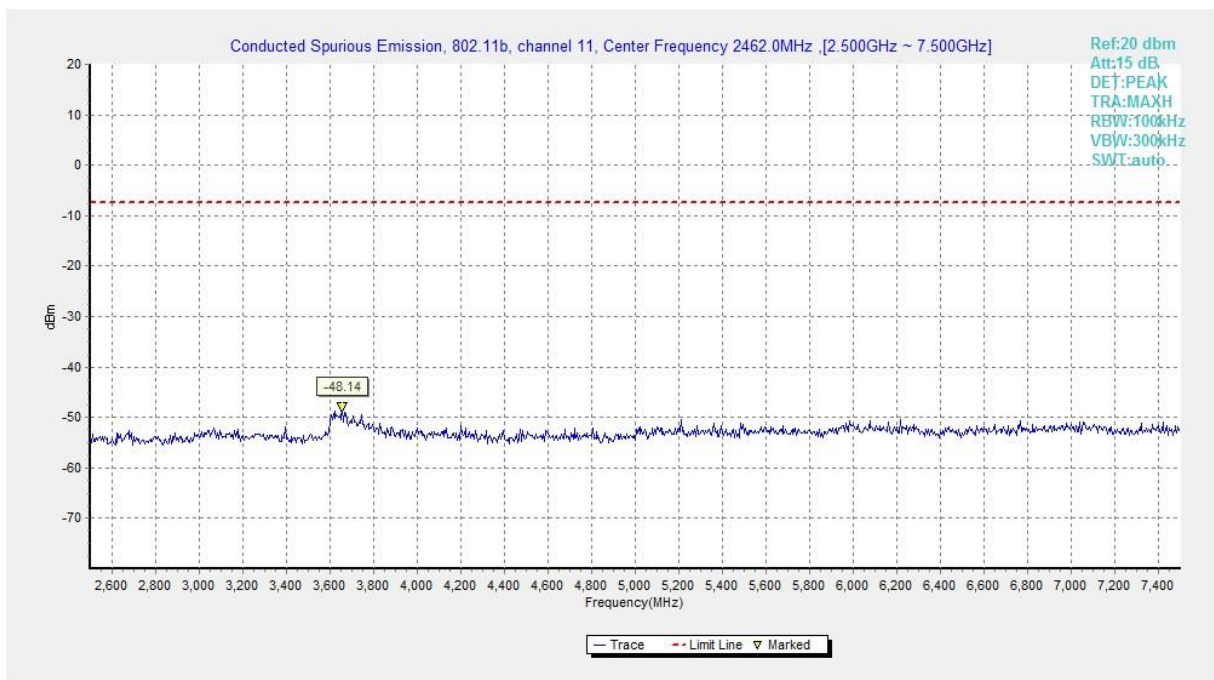


Fig.A.6.1.20 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 2.5 GHz-7.5 GHz)

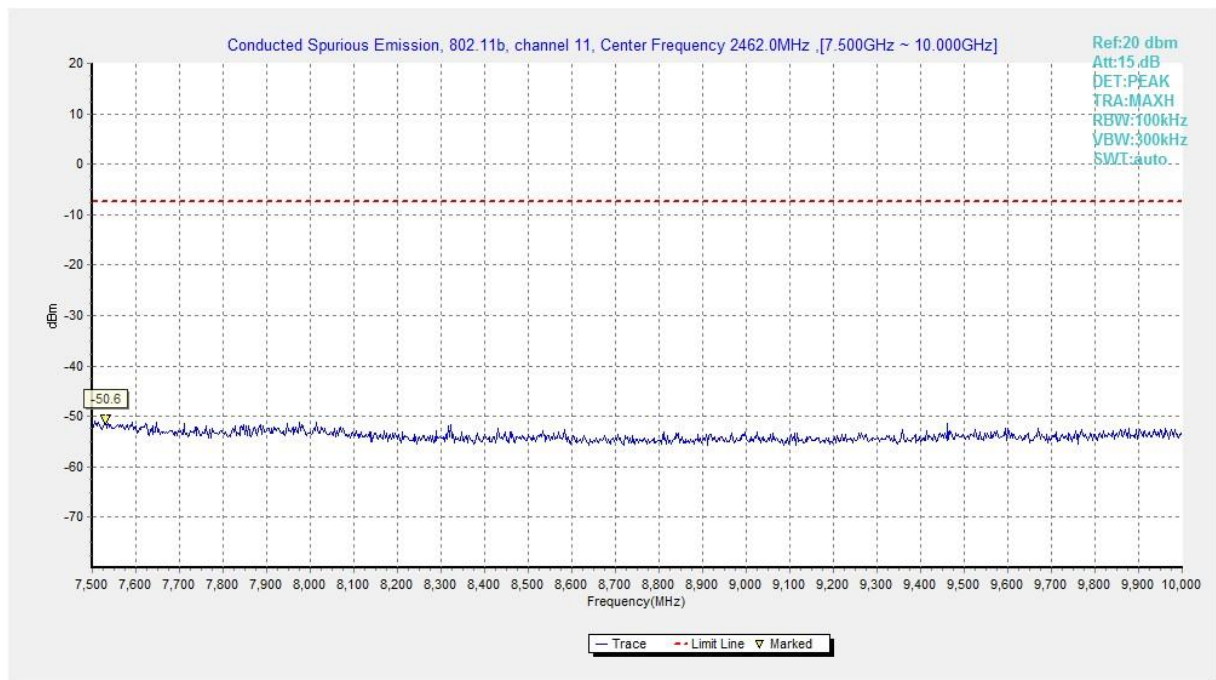


Fig.A.6.1.21 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 7.5 GHz-10 GHz)

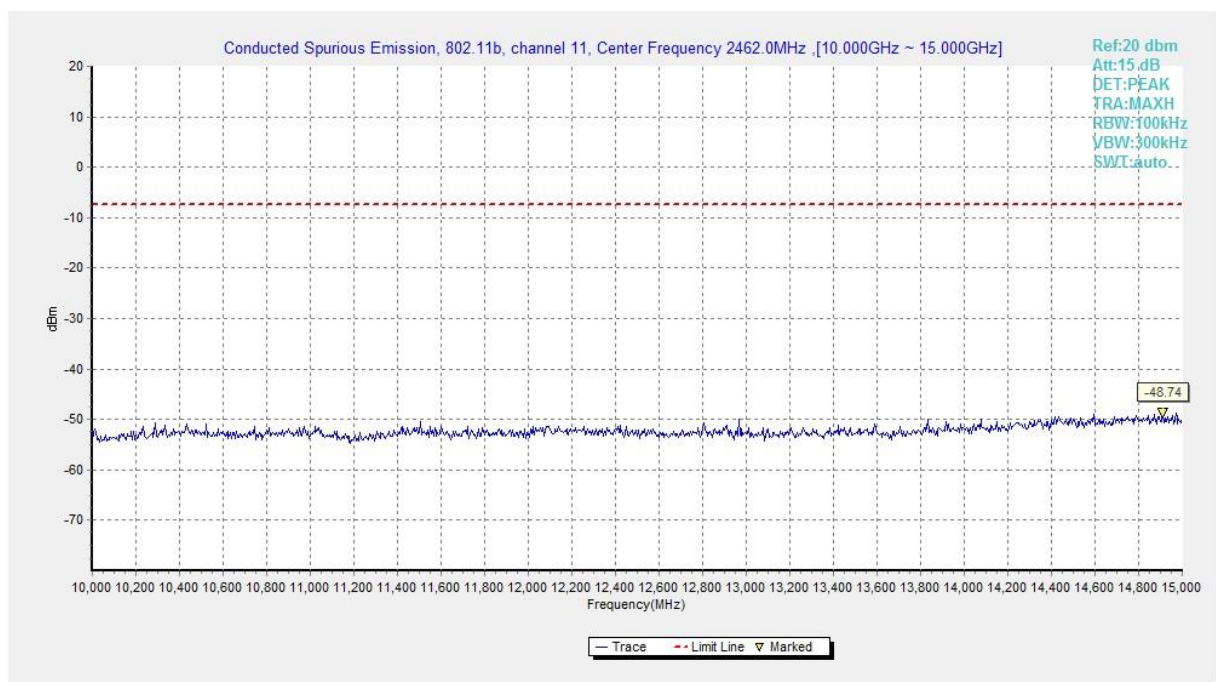


Fig.A.6.1.22 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 10 GHz-15 GHz)

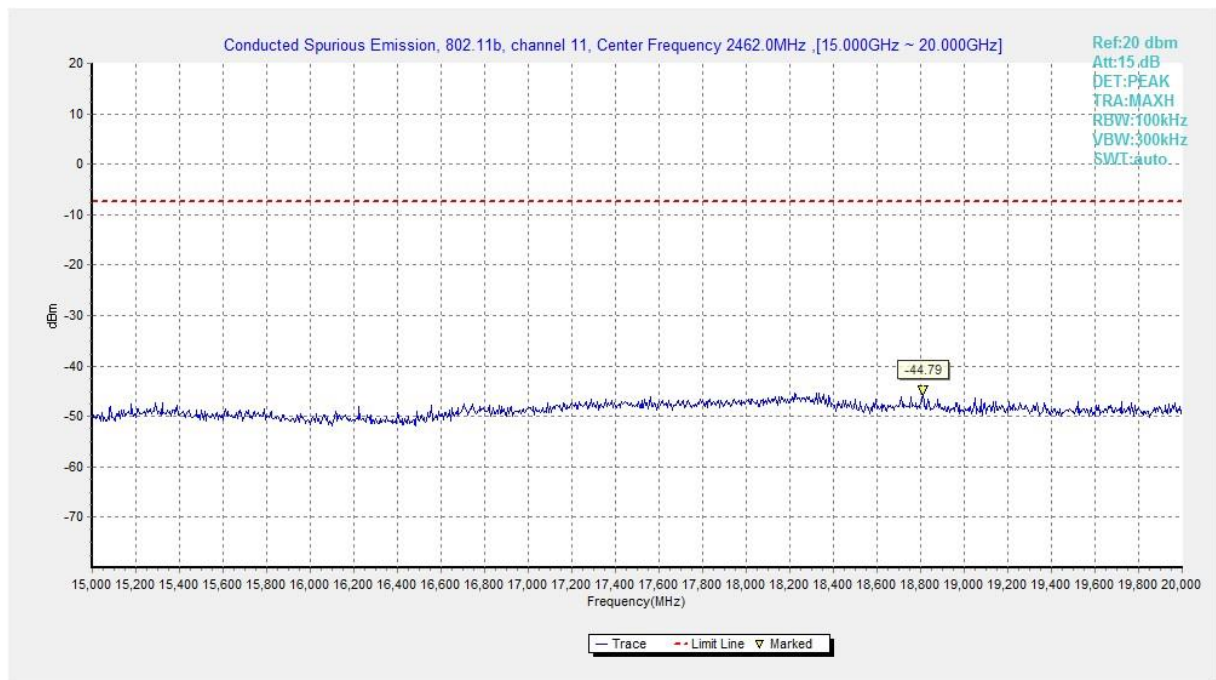


Fig.A.6.1.23 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 15 GHz-20 GHz)

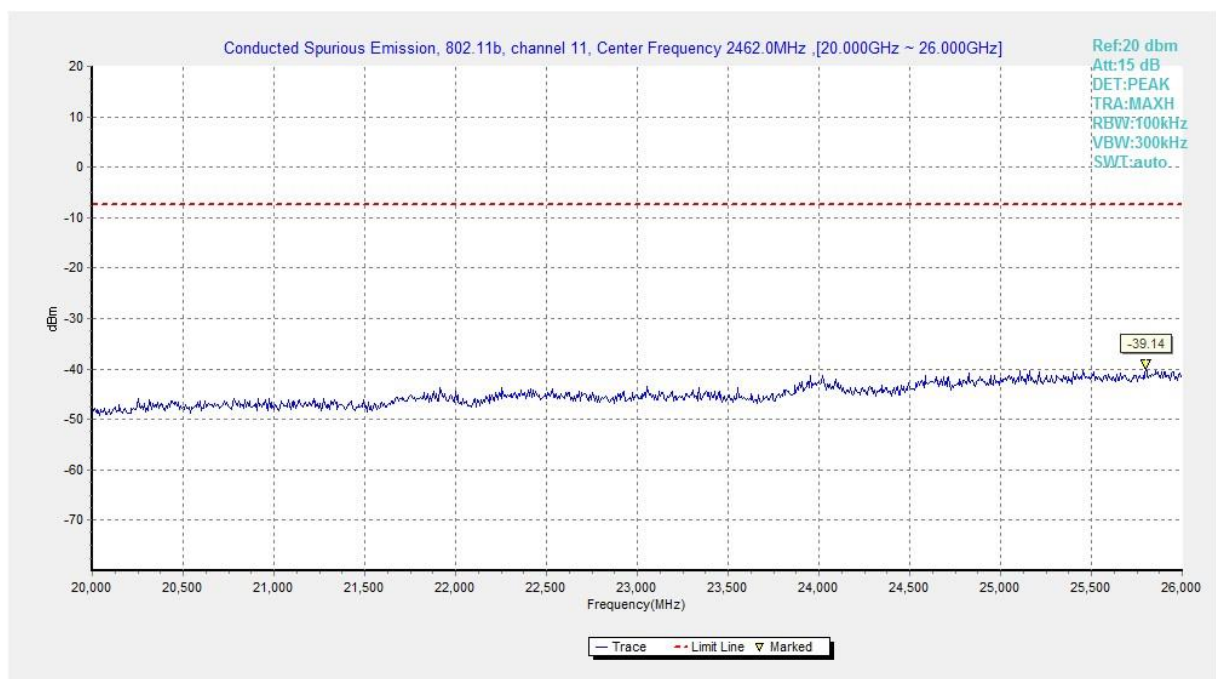


Fig.A.6.1.24 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 20 GHz-26 GHz)