


# SAR EVALUATION REPORT

For

## Advanced Mobile Payment Inc.

Units 401-403, 15 Wertheim Court. Richmond Hill, Ontario L4B 3H7 Canada

**FCC ID: 2AKJB-AMP9000-2**

|                                                                                                                                                                                                                                                       |                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                | <b>Product Type:</b><br>POS Payment Terminal |
| <b>Report Number:</b> RSZ170511006-20                                                                                                                                                                                                                 |                                              |
| <b>Report Date:</b> 2017-05-20                                                                                                                                                                                                                        |                                              |
| Oscar Ye                                                                                                                                                         |                                              |
| <b>Reviewed By:</b> Engineer                                                                                                                                                                                                                          |                                              |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan)<br>No.248 Chenghu Road, Kunshan,<br>Jiangsu province, China.<br>Tel: +86-0512-86175000<br>Fax: +86-0512-88934268<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                              |

| Attestation of Test Results |                     |                                  |                              |              |
|-----------------------------|---------------------|----------------------------------|------------------------------|--------------|
| <b>EUT Information</b>      |                     | <b>Company Name</b>              | Advanced Mobile Payment Inc. |              |
|                             |                     | <b>EUT Description</b>           | POS Payment Terminal         |              |
|                             |                     | <b>Model Number</b>              | AMP 9000-CO                  |              |
|                             |                     | <b>FCC ID</b>                    | 2AKJB-AMP9000-2              |              |
|                             |                     | <b>Serial Number</b>             | 17051100603                  |              |
|                             |                     | <b>Test Date</b>                 | 2017-05-15 and 2017-05-16    |              |
| MODE                        |                     | Max. SAR Level(s) Reported(W/Kg) |                              | Limit (W/Kg) |
| <b>Body-worn</b>            | <b>GSM 850</b>      | 1g SAR                           | 0.49                         | <b>1.6</b>   |
|                             | <b>PCS 1900</b>     | 1g SAR                           | 0.59                         |              |
|                             | <b>WCDMA Band 5</b> | 1g SAR                           | 0.73                         |              |
|                             | <b>WCDMA Band 2</b> | 1g SAR                           | 0.77                         |              |
| <b>Handheld</b>             | <b>GSM 850</b>      | 10g SAR                          | 1.07                         | <b>4.0</b>   |
|                             | <b>PCS 1900</b>     | 10g SAR                          | 0.45                         |              |
|                             | <b>WCDMA Band 5</b> | 10g SAR                          | 1.37                         |              |
|                             | <b>WCDMA Band 2</b> | 10g SAR                          | 1.37                         |              |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicable Standards</b>                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>FCC 47 CFR part 2.1093</b><br>Radiofrequency radiation exposure evaluation: portable devices                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>IEEE1528:2013</b><br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>IEC 62209-2:2010</b><br>Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>KDB procedures</b><br>KDB 447498 D01 General RF Exposure Guidance v06.<br>KDB 648474 D04 Handset SAR v01r03.<br>KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04<br>KDB 865664 D02 RF Exposure Reporting v01r02<br>KDB 941225 D01 3G SAR Procedures v03r01                                                                                                  |
| <p><b>Note:</b> This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.</p> <p><b>The results and statements contained in this report pertain only to the device(s) evaluated.</b></p> |                                                                                                                                                                                                                                                                                                                                                                      |

## **TABLE OF CONTENTS**

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>            | <b>4</b>  |
| <b>EUT DESCRIPTION .....</b>                      | <b>5</b>  |
| TECHNICAL SPECIFICATION .....                     | 5         |
| <b>REFERENCE, STANDARDS, AND GUIDELINES .....</b> | <b>6</b>  |
| SAR LIMITS .....                                  | 7         |
| <b>FACILITIES.....</b>                            | <b>8</b>  |
| POWER REFERENCE MEASUREMENT .....                 | 9         |
| AREA SCAN .....                                   | 9         |
| ZOOM SCAN .....                                   | 10        |
| POWER DRIFT MEASUREMENT .....                     | 10        |
| Z-SCAN.....                                       | 10        |
| <b>DESCRIPTION OF TEST SYSTEM .....</b>           | <b>11</b> |
| <b>EQUIPMENT LIST AND CALIBRATION .....</b>       | <b>16</b> |
| EQUIPMENTS LIST & CALIBRATION INFORMATION .....   | 16        |
| <b>SAR MEASUREMENT SYSTEM VERIFICATION .....</b>  | <b>17</b> |
| LIQUID VERIFICATION .....                         | 17        |
| <b>EUT TEST STRATEGY AND METHODOLOGY .....</b>    | <b>21</b> |
| TEST POSITIONS FOR HAND-HELD DEVICE.....          | 22        |
| SAR EVALUATION PROCEDURE.....                     | 22        |
| <b>CONDUCTED OUTPUT POWER MEASUREMENT .....</b>   | <b>23</b> |
| PROVISION APPLICABLE .....                        | 23        |
| TEST PROCEDURE .....                              | 23        |
| <b>SAR MEASUREMENT RESULTS.....</b>               | <b>28</b> |
| <b>MEASUREMENT UNCERTAINTY .....</b>              | <b>33</b> |

---

**DOCUMENT REVISION HISTORY**

---

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 0               | RSZ170511006-20 | Original Report         | 2017-05-20       |

## EUT DESCRIPTION

This report has been prepared on behalf of Advanced Mobile Payment Inc. and their product, FCC ID: 2AKJB-AMP9000-2, Model: AMP 9000-CO or the EUT (Equipment under Test) as referred to in the rest of this report.

**Note:**

1. All measurement and test data in this report was gathered from production sample serial number: 17051100603(Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2017-05-14.
2. The device is POS Payment Terminal, its intended use is handheld mode. Meanwhile we consider the device can be mounted on body (the device's back side), so we also test Body-worn mode.

## Technical Specification

|                               |                                                                                                                                                                                                   |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Type</b>           | Portable                                                                                                                                                                                          |
| <b>Exposure Category:</b>     | Population / Uncontrolled                                                                                                                                                                         |
| <b>Antenna Type(s):</b>       | Internal Antenna                                                                                                                                                                                  |
| <b>Body-Worn Accessories:</b> | None                                                                                                                                                                                              |
| <b>Face-Head Accessories:</b> | None                                                                                                                                                                                              |
| <b>Multi-slot Class:</b>      | Class12                                                                                                                                                                                           |
| <b>Operation Mode :</b>       | GPRS Data,<br>WCDMA( R99 , HSDPA)                                                                                                                                                                 |
| <b>Frequency Band:</b>        | GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX)<br>PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX)<br>WCDMA850: 824-849 MHz(TX) ; 869-894 MHz(RX)<br>WCDMA1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) |
| <b>Dimensions (L*W*H):</b>    | 140 mm (L) × 80 mm (W) × 29 mm (H)                                                                                                                                                                |
| <b>Power Source:</b>          | 3.7 V <sub>DC</sub> Rechargeable Battery                                                                                                                                                          |
| <b>Normal Operation:</b>      | Body-worn and Hand-held                                                                                                                                                                           |

---

## REFERENCE, STANDARDS, AND GUIDELINES

---

### **FCC:**

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For portable devices, the RF radiation exposure evaluation requirement was provided in part 2.1093. According to KDB447498 D01 “General RF Exposure Guidance”, the device should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices.

### **CE:**

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For portable devices, the limitation of exposure of the general public to electromagnetic fields was recommended on Council Recommendation 1999/519/EC. According to the Standard IEC62209-1/2, the device should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body portable devices.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

**SAR Limits**

## FCC Limit (1g Tissue)

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 1 g of tissue)                | 1.60                                                           | 8.0                                                    |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

## CE Limit (10g Tissue)

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 10 g of tissue)               | 2.0                                                            | 10                                                     |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

## **FACILITIES**

---

The test site used by Bay Area Compliance Laboratories Corp. (kunshan) to collect test data is located on No.248 Chenghu Road, Kunshan, Jiangsu province, China.

## DASY4 SAR Evaluation Procedure

### Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. By default, the Minimum distance of probe sensors to surface is 4mm. This distance can be modified by the user, but cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.


### Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids.

The scanning area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the Area Scan's property sheet is brought-up, grid settings can be edited by a user.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2013, IEC 62209-1:2006 and IEC 62209-2:2010 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

After measurement is completed, all maxima and their coordinates are listed in the Results property page. The maximum selected in the list is highlighted in the 3-D view. For the secondary maxima returned from an Area Scan, the user can specify a lower limit (peak SAR value), in addition to the Find secondary maxima within x dB condition. Only the primary maximum and any secondary maxima within x dB from the primary maximum and above this limit will be measured.

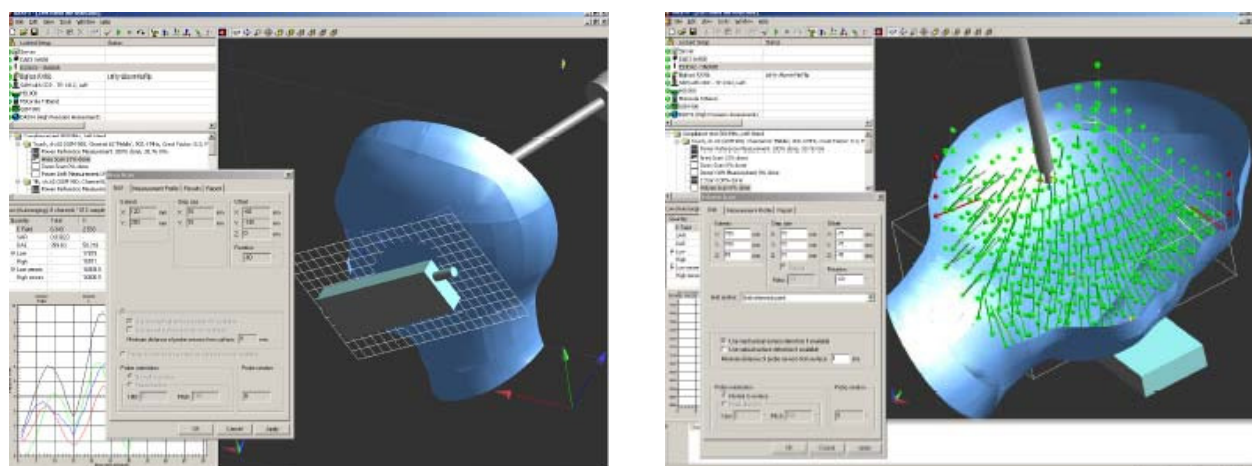

## Zoom Scan


Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

## Power drift measurement

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

## Z-Scan

The Z Scan job measures points along a vertical straight line. The line runs along the Z axis of a one-dimensional grid. A user can anchor the grid to the section reference point, to any defined user point or to the current probe location. As with any other grids, the local Z axis of the anchor location establishes the Z axis of the grid.

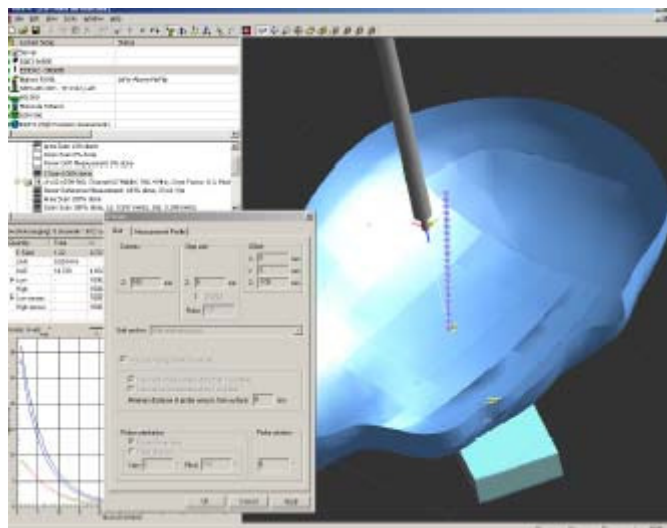


## DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### DASY4 System Description

The DASY4 system for performing compliance tests consists of the following items:

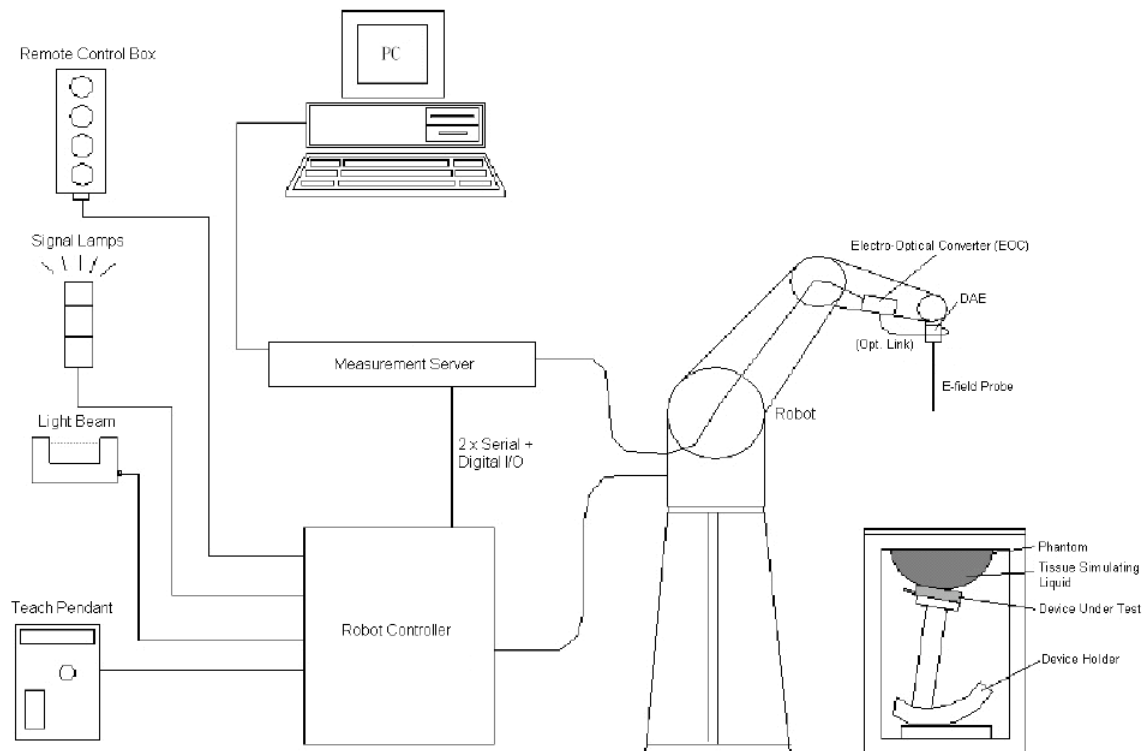

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 profesional operating system and the DASY42 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **DASY4 Measurement Server**

The DASY4 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY4 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

**EX3DV4 E-Field Probes**

|                      |                                                                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency</b>     | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                                                                |
| <b>Directivity</b>   | $\pm 0.3$ dB in TSL (rotation around probe axis)<br>$\pm 0.5$ dB in TSL (rotation normal to probe axis)                                                                                                       |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to > 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)                                                                                                                        |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                                                                          |
| <b>Application</b>   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |
| <b>Compatibility</b> | DASY3, DASY4, DASY42 SAR and higher, EASY4/MRI                                                                                                                                                                |

**SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- \_ Left hand
- \_ Right hand
- \_ Flat phantom

The phantom table for the DASY systems based on the TX90XL and RX160L robots have the size of 100 x 50 x 85 cm (L x W x H). The phantom table for the compact DASY systems based on the RX60L robot have the size of 100 x 75 x 91 cm (L x W x H); these tables are reinforced for mounting of the robot onto the table.

For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during o\_-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible.

Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



## Robots

The DASY4 system uses the high precision industrial robots RX90XL from Staubli SA (France). The TX robot family is the successor of the well known RX robot family and offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

## Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

## Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY4 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

## Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

### Recommended Tissue Dielectric Parameters for Head and Body

| Frequency<br>(MHz) | Head Tissue  |                | Body Tissue  |                |
|--------------------|--------------|----------------|--------------|----------------|
|                    | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) |
| 150                | 52.3         | 0.76           | 61.9         | 0.80           |
| 300                | 45.3         | 0.87           | 58.2         | 0.92           |
| 450                | 43.5         | 0.87           | 56.7         | 0.94           |
| 835                | 41.5         | 0.90           | 55.2         | 0.97           |
| 900                | 41.5         | 0.97           | 55.0         | 1.05           |
| 915                | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450               | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610               | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800-2000          | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450               | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000               | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800               | 35.3         | 5.27           | 48.2         | 6.00           |


## EQUIPMENT LIST AND CALIBRATION

### Equipments List & Calibration Information

| Equipment                         | Model         | S/N        | Calibration Date | Calibration Due Date |
|-----------------------------------|---------------|------------|------------------|----------------------|
| Robot                             | RX90          | 5L79A1     | N/A              | N/A                  |
| DASY4 Test Software               | DASY4.5       | N/A        | N/A              | N/A                  |
| DASY4 Measurement Server          | DASY 4.5.12   | 1180       | N/A              | N/A                  |
| Data Acquisition Electronics      | DAE4          | 772        | 2016/10/25       | 2017/10/24           |
| E-Field Probe                     | EX3DV4        | 7382       | 2016/10/26       | 2017/10/25           |
| Dipole, 835 MHz                   | D835V2        | 453        | 2015/08/17       | 2018/08/16           |
| Dipole, 1900 MHz                  | D1900V2       | 5d206      | 2015/07/14       | 2018/07/13           |
| Mounting Device                   | SD 000 H01 KA | N/A        | N/A              | N/A                  |
| Twin SAM                          | Twin SAM V5.0 | 1909       | N/A              | N/A                  |
| Simulated Tissue 835 MHz Body     | TS-835-B      | N/A        | Each Time        | /                    |
| Simulated Tissue 1900 MHz Body    | TS-1900-B     | N/A        | Each Time        | /                    |
| Network Analyzer                  | 8753B         | 2625A00809 | 2016/10/06       | 2017/10/05           |
| S-Parameter Test Set              | 85047A        | 3033A02428 | 2016/10/06       | 2017/10/05           |
| Dielectric probe kit              | 85070B        | US33020324 | N/A              | N/A                  |
| Signal Generator                  | SMBV100A      | 261558     | 2016/07/04       | 2017/07/03           |
| Wideband Radio Communication Test | CMU200        | 103113     | 2016/11/11       | 2017/11/10           |
| Power Meter                       | E4419B        | MY41291878 | 2017/01/23       | 2018/01/22           |
| Power Meter Sensor                | E9301A        | US39210953 | 2016/05/30       | 2017/05/29           |
| Power Amplifier                   | 10S1G4M1      | 18060      | N/A              | N/A                  |
| Directional Coupler               | 488Z          | N/A        | N/A              | N/A                  |
| Attenuator                        | 20dB, 100W    | N/A        | N/A              | N/A                  |
| Attenuator                        | 3dB, 150W     | N/A        | N/A              | N/A                  |

## SAR MEASUREMENT SYSTEM VERIFICATION

### Liquid Verification

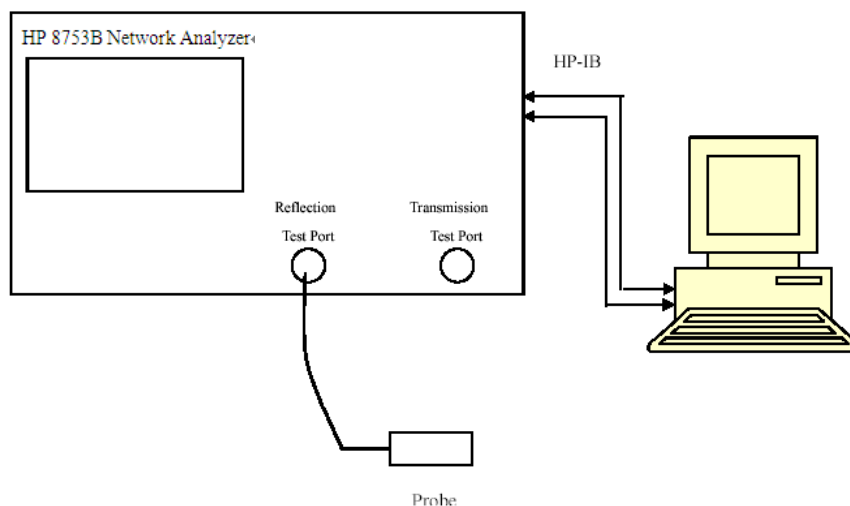

Liquid Verification Setup Block Diagram

### Liquid Verification Results

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 824.2           | Simulated Tissue 835MHz Body | 55.76            | 0.99           | 55.20        | 0.97           | 1.014              | 2.062                | $\pm 5$       |
| 826.4           | Simulated Tissue 835MHz Body | 55.35            | 1.00           | 55.20        | 0.97           | 0.272              | 3.093                | $\pm 5$       |
| 835             | Simulated Tissue 835MHz Body | 55.67            | 0.98           | 55.20        | 0.97           | 0.851              | 1.031                | $\pm 5$       |
| 836.6           | Simulated Tissue 835MHz Body | 55.32            | 0.99           | 55.20        | 0.97           | 0.217              | 2.062                | $\pm 5$       |
| 846.6           | Simulated Tissue 835MHz Body | 55.27            | 0.99           | 55.20        | 0.98           | 0.127              | 1.020                | $\pm 5$       |
| 848.8           | Simulated Tissue 835MHz Body | 54.84            | 0.98           | 55.20        | 0.98           | -0.652             | 0.000                | $\pm 5$       |

\*Liquid Verification was performed on 2017-05-15.


| Frequency (MHz) | Liquid Type                   | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|-------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                               | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 1850.2          | Simulated Tissue 1900MHz Body | 53.62            | 1.52           | 53.30        | 1.52           | 0.600              | 0.000                | $\pm 5$       |
| 1852.4          | Simulated Tissue 1900MHz Body | 54.10            | 1.53           | 53.30        | 1.52           | 1.501              | 0.658                | $\pm 5$       |
| 1880            | Simulated Tissue 1900MHz Body | 53.50            | 1.53           | 53.30        | 1.52           | 0.375              | 0.658                | $\pm 5$       |
| 1900            | Simulated Tissue 1900MHz Body | 52.85            | 1.54           | 53.30        | 1.52           | -0.844             | 1.316                | $\pm 5$       |
| 1907.6          | Simulated Tissue 1900MHz Body | 52.40            | 1.52           | 53.30        | 1.52           | -1.689             | 0.000                | $\pm 5$       |
| 1909.8          | Simulated Tissue 1900MHz Body | 52.77            | 1.53           | 53.30        | 1.52           | -0.994             | 0.658                | $\pm 5$       |

\*Liquid Verification was performed on 2017-05-16.

## System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

### System Verification Setup Block Diagram

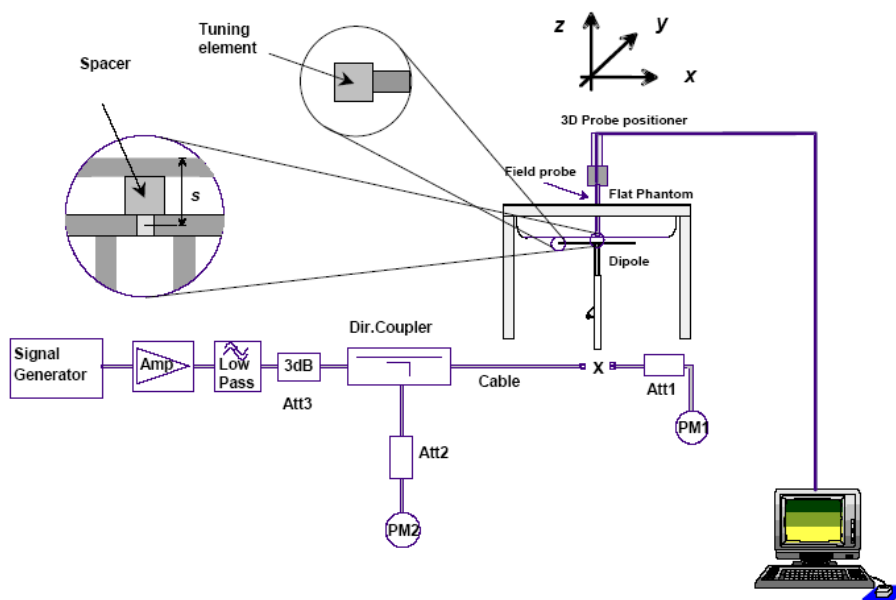

### System Accuracy Check Results

| Date       | Frequency Band | Liquid Type | Measured SAR (W/Kg) |      | Target Value (W/Kg) | Delta (%) | Tolerance (%) |
|------------|----------------|-------------|---------------------|------|---------------------|-----------|---------------|
| 2017-05-15 | 835            | Body        | 1g                  | 9.19 | 9.55                | -3.770    | $\pm 10$      |
|            |                |             | 10g                 | 5.93 | 6.27                | -5.423    | $\pm 10$      |
| 2017-05-16 | 1900           | Body        | 1g                  | 37.9 | 40.8                | -7.108    | $\pm 10$      |
|            |                |             | 10g                 | 20.6 | 21.9                | -5.936    | $\pm 10$      |

**Note:**

The power inputted to dipole is 0.1Watt; the SAR values are normalized to 1 Watt forward power by multiplying 10 times.

**SAR SYSTEM VALIDATION DATA****Test Laboratory: Bay Area Compliance Labs Corp.(Kunshan)****DUT: Dipole 835 MHz; Type: D835V2; S/N: 453****Program Name: 835 MHz Body**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.98 \text{ S/m}$ ;  $\epsilon_r = 55.67$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(10.54, 10.54, 10.54); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**835 Body system check /Area Scan (91x151x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (interpolated) = 1.03 mW/g


**835 Body system check /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 33.9 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.919 mW/g; SAR(10 g) = 0.593 mW/g**

Maximum value of SAR (measured) = 0.990 mW/g

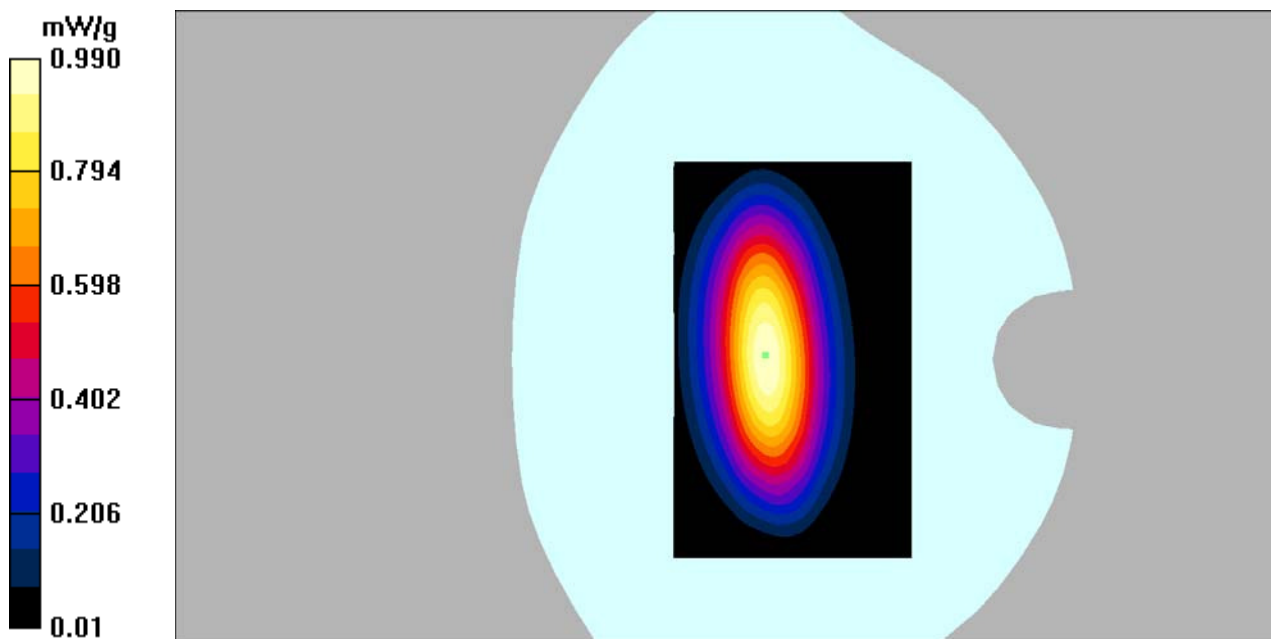

**Test Laboratory: Bay Area Compliance Labs Corp.(Kunshan)**

**DUT: Dipole 1900 MHz; Type: D1900V2; S/N: 5d206**

**Program Name: 1900MHz Body**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.54$  S/m;  $\epsilon_r = 52.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 – SN7382; ConvF(8.31, 8.31, 8.31); Calibrated: 26/10/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE – SN772; Calibrated: 25/10/2016
- Phantom: TWIN SAM; Type: Twin SAM V5.0; Serial: 1909
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

**1900 Body system check/Area Scan (91x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.22 mW/g


**1900 Body system check/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.1 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 7.07 W/kg

**SAR(1 g) = 3.79 mW/g; SAR(10 g) = 2.06 mW/g**


Maximum value of SAR (measured) = 4.04 mW/g

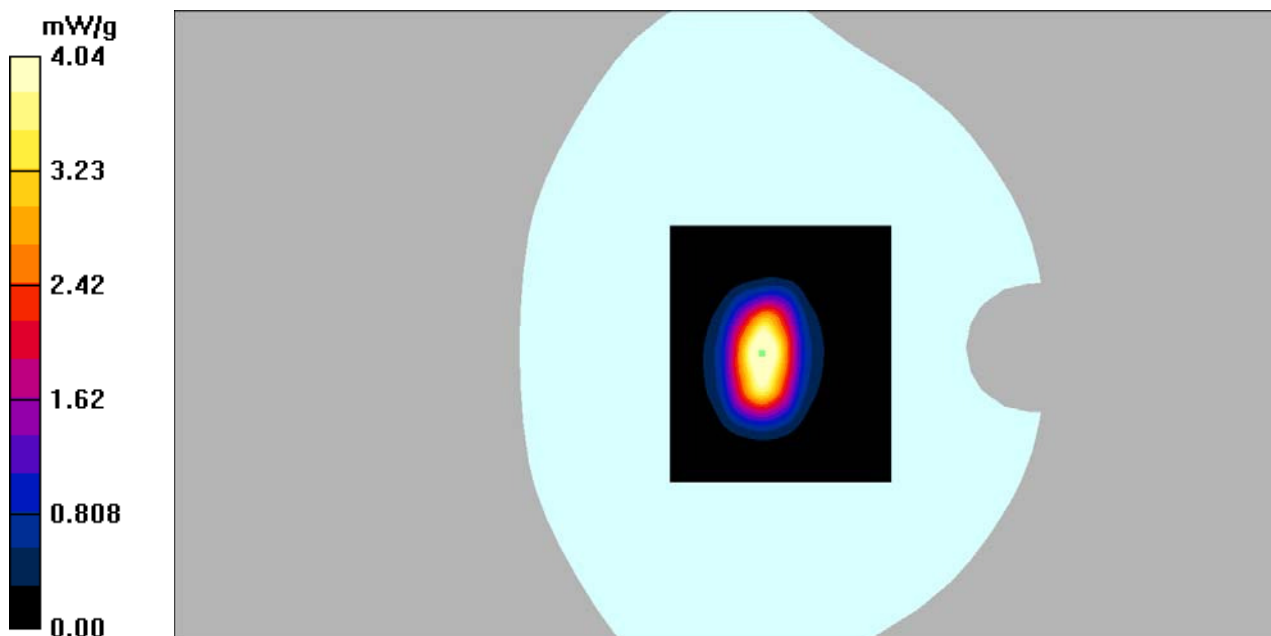

## EUT TEST STRATEGY AND METHODOLOGY

### Test Positions for front-of-face configurations

A typical example of a front-of-face device is a two-way radio that is held at a distance from the face of the user when transmitting. In these cases the device under test shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions. If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used.

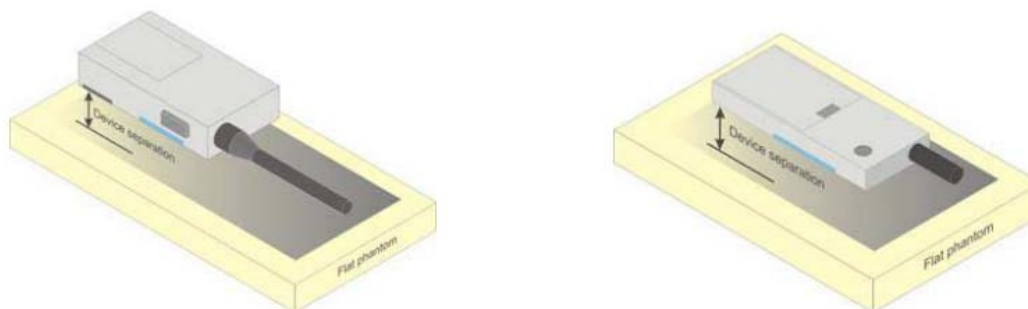

### Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

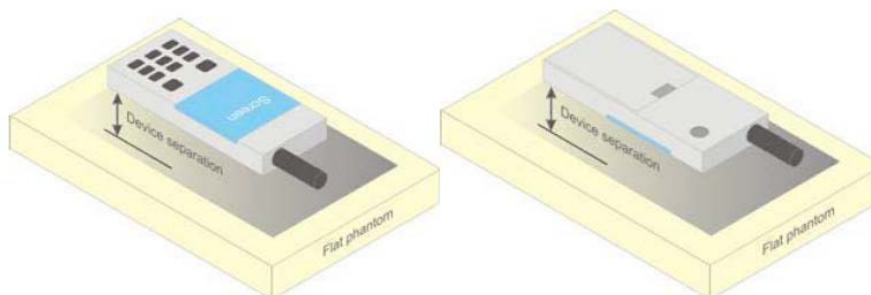
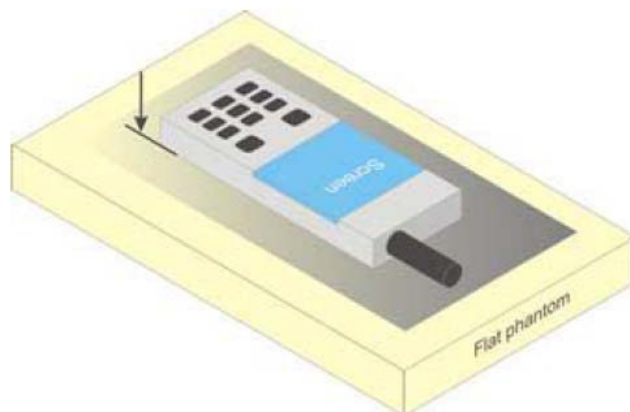


Figure 5 – Test positions for body-worn devices

## Test positions for Hand-held device

Hand-held device means a portable device which is located in a user's hand during its intended use. Hand-held usage of the device, not at the head or torso. The device shall be placed directly against the flat phantom as shown in Figure J.1, for those sides of the device that are in contact with the hand during intended use.



**Figure J.1 – Test position for hand-held devices, not used at the head or torso**

## SAR Evaluation Procedure

The evaluation was performed with the following procedure:

- Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.
- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

- Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


## CONDUCTED OUTPUT POWER MEASUREMENT

### Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

### Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

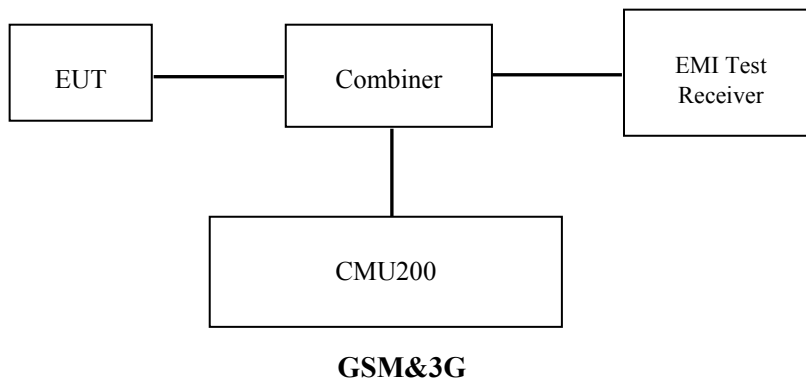

### Radio Configuration

The power measurement was configured by the Wireless Communication Test Set CMU200 for all Radio configurations.

#### GSM

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + only

MS Signal

> 33 dBm for GSM 850

> 30 dBm for PCS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

TCH > choose desired test channel

Hopping > Off

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

**GPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal: Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network: Coding Scheme > CS4 (GPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings.

**WCDMA Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

|                                   |                         |              |
|-----------------------------------|-------------------------|--------------|
| <b>WCDMA<br/>General Settings</b> | Loopback Mode           | Test Mode 1  |
|                                   | Rel99 RMC               | 12.2kbps RMC |
|                                   | Power Control Algorithm | Algorithm2   |
|                                   | $\beta_c / \beta_d$     | 8/15         |

**HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                        | <b>Mode<br/>Subset</b>          | <b>HSDPA<br/>1</b> | <b>HSDPA<br/>2</b> | <b>HSDPA<br/>3</b> | <b>HSDPA<br/>4</b> |
|----------------------------------------|---------------------------------|--------------------|--------------------|--------------------|--------------------|
| <b>WCDMA<br/>General<br/>Settings</b>  | Loopback Mode                   | Test Mode 1        |                    |                    |                    |
|                                        | Rel99 RMC                       | 12.2kbps RMC       |                    |                    |                    |
|                                        | HSDPA FRC                       | H-Set1             |                    |                    |                    |
|                                        | Power Control Algorithm         | Algorithm2         |                    |                    |                    |
|                                        | $\beta_c$                       | 2/15               | 12/15              | 15/15              | 15/15              |
|                                        | $\beta_d$                       | 15/15              | 15/15              | 8/15               | 4/15               |
|                                        | $\beta_d$ (SF)                  | 64                 |                    |                    |                    |
|                                        | $\beta_c / \beta_d$             | 2/15               | 12/15              | 15/8               | 15/4               |
|                                        | $\beta_{hs}$                    | 4/15               | 24/15              | 30/15              | 30/15              |
|                                        | MPR(dB)                         | 0                  | 0                  | 0.5                | 0.5                |
| <b>HSDPA<br/>Specific<br/>Settings</b> | DACK                            | 8                  |                    |                    |                    |
|                                        | DNAK                            | 8                  |                    |                    |                    |
|                                        | DCQI                            | 8                  |                    |                    |                    |
|                                        | Ack-Nack repetition factor      | 3                  |                    |                    |                    |
|                                        | CQI Feedback                    | 4ms                |                    |                    |                    |
|                                        | CQI Repetition Factor           | 2                  |                    |                    |                    |
|                                        | $A_{hs} = \beta_{hs} / \beta_c$ | 30/15              |                    |                    |                    |

**Maximum Output Power among production units**

| Max Target Power for Production Unit (dBm) |                 |         |        |       |
|--------------------------------------------|-----------------|---------|--------|-------|
| Mode/Band                                  |                 | Channel |        |       |
|                                            |                 | Low     | Middle | High  |
| GSM 850                                    | GPRS 1 TX Slot  | 33.60   | 33.60  | 33.60 |
|                                            | GPRS 2 TX Slots | 31.50   | 31.50  | 31.50 |
|                                            | GPRS 3 TX Slots | 30.20   | 30.20  | 30.20 |
|                                            | GPRS 4 TX Slots | 29.10   | 29.10  | 29.10 |
| PCS 1900                                   | GPRS 1 TX Slot  | 29.40   | 29.40  | 29.40 |
|                                            | GPRS 2 TX Slots | 27.40   | 27.40  | 27.40 |
|                                            | GPRS 3 TX Slots | 26.50   | 26.50  | 26.50 |
|                                            | GPRS 4 TX Slots | 25.50   | 25.50  | 25.50 |
| WCDMA Band 5                               | Rel 99          | 22.60   | 22.60  | 22.60 |
|                                            | HSDPA           | 22.00   | 22.00  | 22.00 |
| WCDMA Band 2                               | Rel 99          | 22.20   | 22.20  | 22.20 |
|                                            | HSDPA           | 21.50   | 21.50  | 21.50 |

**Test Results:****GPRS:**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |         |         |         |
|----------|-------------|-----------------|-----------------------|---------|---------|---------|
|          |             |                 | 1 slot                | 2 slots | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 33.52                 | 31.44   | 30.13   | 29.06   |
|          | 190         | 836.6           | 33.47                 | 31.40   | 30.10   | 29.03   |
|          | 251         | 848.8           | 33.37                 | 31.31   | 29.95   | 28.93   |
| PCS 1900 | 512         | 1850.2          | 29.20                 | 27.18   | 26.27   | 25.30   |
|          | 661         | 1880            | 29.38                 | 27.33   | 26.40   | 25.41   |
|          | 810         | 1909.8          | 29.36                 | 27.37   | 26.43   | 25.47   |

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

| Number of Time slot                                  | 1     | 2     | 3        | 4     |
|------------------------------------------------------|-------|-------|----------|-------|
| Duty Cycle                                           | 1:8   | 1:4   | 1:2.66   | 1:2   |
| Time based Ave. power compared to slotted Ave. power | -9 dB | -6 dB | -4.25 dB | -3 dB |
| Crest Factor                                         | 8     | 4     | 2.66     | 2     |

**The time based average power for GPRS**

| Band     | Channel No. | Frequency (MHz) | Time based average Power (dBm) |        |         |              |
|----------|-------------|-----------------|--------------------------------|--------|---------|--------------|
|          |             |                 | 1 slot                         | 2 slot | 3 slots | 4 slots      |
| GSM 850  | 128         | 824.2           | 24.52                          | 25.44  | 25.88   | <b>26.06</b> |
|          | 190         | 836.6           | 24.47                          | 25.40  | 25.85   | 26.03        |
|          | 251         | 848.8           | 24.37                          | 25.31  | 25.70   | 25.93        |
| PCS 1900 | 512         | 1850.2          | 20.20                          | 21.18  | 22.02   | 22.30        |
|          | 661         | 1880            | 20.38                          | 21.33  | 22.15   | 22.41        |
|          | 810         | 1909.8          | 20.36                          | 21.37  | 22.18   | <b>22.47</b> |

**Note:**

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).

**Results (12.2kbps RMC)****WCDMA Band 5:**

| Test Condition | Test Mode | 3GPP Sub Test | Averaged Mean Power (dBm) |               |                |
|----------------|-----------|---------------|---------------------------|---------------|----------------|
|                |           |               | Low Frequency             | Mid Frequency | High Frequency |
| Normal         | RMC12.2k  |               | 22.58                     | 22.56         | 22.59          |
|                | HSDPA     | 1             | 21.98                     | 21.94         | 21.92          |
|                |           | 2             | 21.02                     | 21.02         | 20.98          |
|                |           | 3             | 20.95                     | 20.92         | 20.92          |
|                |           | 4             | 20.92                     | 20.83         | 20.82          |

**WCDMA Band 2:**

| Test Condition | Test Mode | 3GPP Sub Test | Averaged Mean Power (dBm) |               |                |
|----------------|-----------|---------------|---------------------------|---------------|----------------|
|                |           |               | Low Frequency             | Mid Frequency | High Frequency |
| Normal         | RMC12.2k  |               | 21.99                     | 22.04         | 22.11          |
|                | HSDPA     | 1             | 21.18                     | 21.16         | 21.15          |
|                |           | 2             | 21.21                     | 21.25         | 21.14          |
|                |           | 3             | 21.32                     | 21.36         | 21.41          |
|                |           | 4             | 21.14                     | 21.21         | 21.12          |

**Note:**

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.

## SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

### SAR Test Data

#### Environmental Conditions

|                    |              |              |
|--------------------|--------------|--------------|
| Temperature:       | 21.8-22.9 °C | 22.3-23.5 °C |
| Relative Humidity: | 61 %         | 63 %         |
| ATM Pressure:      | 1007 mbar    | 1007 mbar    |
| Test Date:         | 2017-05-15   | 2017-05-16   |

Testing was performed by Jack Xu, Apple Wu, Judy Huang.

### GSM 850:

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/Kg) |           |              |      |
|----------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|--------------|------|
|                      |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR   | Plot |
| Body-Worn-Back (0mm) | 836.6           | GPRS      | 29.03                  | 29.10                  | 1.016         | 0.480     | <b>0.488</b> | 1#   |

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/Kg) |           |              |      |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-----------|--------------|------|
|                      |                 |           |                        |                        | Scaled Factor  | Meas. SAR | Scaled SAR   | Plot |
| Handheld-Left (0mm)  | 836.6           | GPRS      | 29.03                  | 29.10                  | 1.016          | 0.119     | 0.121        | 2#   |
| Handheld-Right (0mm) | 836.6           | GPRS      | 29.03                  | 29.10                  | 1.016          | 0.089     | 0.090        | 3#   |
| Handheld-Top (0mm)   | 836.6           | GPRS      | 29.03                  | 29.10                  | 1.016          | 1.05      | <b>1.067</b> | 4#   |

#### Note:

1. For Body-worn mode, when the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. For Handheld mode, when the 10-g SAR is  $\leq 2.0\text{W/Kg}$ , testing for other channels are optional.
3. The EUT transmit and receive through the same GSM antenna while testing SAR.
4. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
5. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
6. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

**PCS 1900:**

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/Kg) |           |              |      |
|----------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|--------------|------|
|                      |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR   | Plot |
| Body-Worn-Back (0mm) | 1880            | GPRS      | 25.41                  | 25.50                  | 1.021         | 0.576     | <b>0.588</b> | 5#   |

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/Kg) |           |              |           |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-----------|--------------|-----------|
|                      |                 |           |                        |                        | Scaled Factor  | Meas. SAR | Scaled SAR   | Plot      |
| Handheld-Left (0mm)  | 1880            | GPRS      | 25.41                  | 25.50                  | 1.021          | 0.027     | 0.028        | 6#        |
| Handheld-Right (0mm) | 1880            | GPRS      | 25.41                  | 25.50                  | 1.021          | 0.00755   | 0.008        | 7#        |
| Handheld-Top (0mm)   | 1880            | GPRS      | 25.41                  | 25.50                  | 1.021          | 0.440     | <b>0.449</b> | <b>8#</b> |

**Note:**

1. For Body-worn mode, when the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. For Handheld mode, when the 10-g SAR is  $\leq 2.0\text{W/Kg}$ , testing for other channels are optional.
3. The EUT transmit and receive through the same GSM antenna while testing SAR.
4. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
5. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
6. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

**WCDMA Band 5:**

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/Kg) |           |              |      |
|----------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|--------------|------|
|                      |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR   | Plot |
| Body-Worn-Back (0mm) | 836.6           | RMC       | 22.56                  | 22.60                  | 1.009         | 0.727     | <b>0.734</b> | 9#   |

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/Kg) |           |              |            |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-----------|--------------|------------|
|                      |                 |           |                        |                        | Scaled Factor  | Meas. SAR | Scaled SAR   | Plot       |
| Handheld-Left (0mm)  | 836.6           | RMC       | 22.56                  | 22.60                  | 1.009          | 0.120     | 0.121        | 10#        |
| Handheld-Right (0mm) | 836.6           | RMC       | 22.56                  | 22.60                  | 1.009          | 0.049     | 0.049        | 11#        |
| Handheld-Top (0mm)   | 836.6           | RMC       | 22.56                  | 22.60                  | 1.009          | 1.36      | <b>1.373</b> | <b>12#</b> |

**WCDMA Band 2:**

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/Kg) |           |              |      |
|----------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|--------------|------|
|                      |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR   | Plot |
| Body-Worn-Back (0mm) | 1852.4          | RMC       | 22.04                  | 22.20                  | 1.038         | 0.746     | <b>0.774</b> | 13#  |

| EUT Position         | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/Kg) |           |              |            |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-----------|--------------|------------|
|                      |                 |           |                        |                        | Scaled Factor  | Meas. SAR | Scaled SAR   | Plot       |
| Handheld-Left (0mm)  | 1852.4          | RMC       | 22.04                  | 22.20                  | 1.038          | 0.248     | 0.257        | 14#        |
| Handheld-Right (0mm) | 1852.4          | RMC       | 22.04                  | 22.20                  | 1.038          | 0.039     | 0.040        | 15#        |
| Handheld-Top (0mm)   | 1852.4          | RMC       | 22.04                  | 22.20                  | 1.038          | 1.32      | <b>1.370</b> | <b>16#</b> |

**Note:**

1. For Body-worn mode, when the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. For Handheld mode, when the 10-g SAR is  $\leq 2.0\text{W/Kg}$ , testing for other channels are optional.
3. The EUT transmit and receive through the same antenna while testing SAR.
4. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
5. KDB 941225 D01-Body SAR is not required for HSDPA when the maximum average output of each RF channel is less than  $\frac{1}{4}$  dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.
6. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

## SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

### The Highest Measured SAR Configuration in Each Frequency Band


#### Body-worn

| Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) |          | Largest to Smallest SAR Ratio |
|----------------|------------|--------------|------------------|----------|-------------------------------|
|                |            |              | Original         | Repeated |                               |
| /              | /          | /            | /                | /        | /                             |

#### Handheld

| Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) |          | Largest to Smallest SAR Ratio |
|----------------|------------|--------------|------------------|----------|-------------------------------|
|                |            |              | Original         | Repeated |                               |
| /              | /          | /            | /                | /        | /                             |

## SAR TEST DESCRIPTION

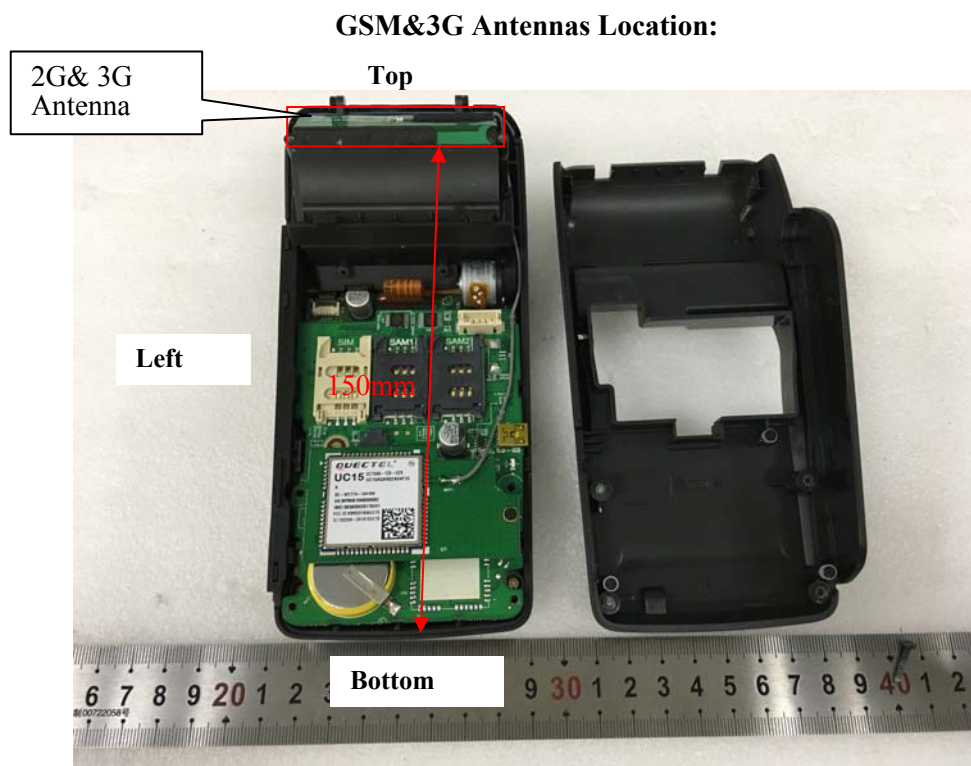

### SAR test exclusion for the EUT edge considerations Result

| SAR Test Exclusion for the EUT Edges Considerations |          |          |           |          |          |        |
|-----------------------------------------------------|----------|----------|-----------|----------|----------|--------|
| Mode                                                | Left     | Right    | Front     | Back     | Top      | Bottom |
| GSM/WCDMA                                           | Required | Required | Exclusion | Required | Required | No     |

**Note:**

**Required:** The distance is less than 25mm, the SAR test is required.

**No:** The distance is more than 25mm, the SAR test is not required.

**Exclusion:** In normal operation mode, the Front Edge orientated human body when operating is not accepted as a type of intend use, so SAR is not required..

## MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

| Source of uncertainty                                   | Tolerance/<br>uncertainty<br>± % | Probability<br>distribution | Divisor    | ci<br>(1 g) | ci<br>(10 g) | Standard<br>uncertainty<br>± %, (1 g) | Standard<br>uncertainty<br>± %, (10 g) |
|---------------------------------------------------------|----------------------------------|-----------------------------|------------|-------------|--------------|---------------------------------------|----------------------------------------|
| <b>Measurement system</b>                               |                                  |                             |            |             |              |                                       |                                        |
| Probe calibration                                       | 6.55                             | N                           | 1          | 1           | 1            | 6.6                                   | 6.6                                    |
| Axial Isotropy                                          | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Hemispherical Isotropy                                  | 9.6                              | R                           | $\sqrt{3}$ | 0           | 0            | 0.0                                   | 0.0                                    |
| Boundary effect                                         | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Linearity                                               | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Detection limits                                        | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Readout electronics                                     | 0.3                              | N                           | 1          | 1           | 1            | 0.3                                   | 0.3                                    |
| Response time                                           | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Integration time                                        | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| RF ambient conditions –<br>noise                        | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| RF ambient<br>conditions–reflections                    | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Probe positioner mech.<br>Restrictions                  | 0.8                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.5                                   | 0.5                                    |
| Probe positioning with<br>respect to phantom shell      | 6.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 3.9                                   | 3.9                                    |
| Post-processing                                         | 2.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 1.2                                   | 1.2                                    |
| <b>Test sample related</b>                              |                                  |                             |            |             |              |                                       |                                        |
| Test sample positioning                                 | 2.8                              | N                           | 1          | 1           | 1            | 2.8                                   | 2.8                                    |
| Device holder uncertainty                               | 6.3                              | N                           | 1          | 1           | 1            | 6.3                                   | 6.3                                    |
| Drift of output power                                   | 5.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.9                                   | 2.9                                    |
| <b>Phantom and set-up</b>                               |                                  |                             |            |             |              |                                       |                                        |
| Phantom uncertainty (shape<br>and thickness tolerances) | 4.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.3                                   | 2.3                                    |
| Liquid conductivity target)                             | 5.0                              | R                           | $\sqrt{3}$ | 0.64        | 0.43         | 1.8                                   | 1.2                                    |
| Liquid conductivity meas.)                              | 2.5                              | N                           | 1          | 0.64        | 0.43         | 1.6                                   | 1.1                                    |
| Liquid permittivity target)                             | 5.0                              | R                           | $\sqrt{3}$ | 0.6         | 0.49         | 1.7                                   | 1.4                                    |
| Liquid permittivity meas.)                              | 2.5                              | N                           | 1          | 0.6         | 0.49         | 1.5                                   | 1.2                                    |
| Combined standard<br>uncertainty                        |                                  | RSS                         |            |             |              | 12.2                                  | 12.0                                   |
| Expanded uncertainty 95 %<br>confidence interval)       |                                  |                             |            |             |              | 24.3                                  | 23.9                                   |

## Measurement uncertainty evaluation for IEC62209-2 SAR test

| Source of uncertainty                                                              | Tolerance/<br>uncertainty<br>± % | Probability<br>distribution | Divisor    | ci<br>(1 g) | ci<br>(10 g) | Standard<br>uncertainty<br>± %, (1 g) | Standard<br>uncertainty<br>± %, (10 g) |
|------------------------------------------------------------------------------------|----------------------------------|-----------------------------|------------|-------------|--------------|---------------------------------------|----------------------------------------|
| <b>Measurement system</b>                                                          |                                  |                             |            |             |              |                                       |                                        |
| Probe calibration                                                                  | 6.55                             | N                           | 1          | 1           | 1            | 6.6                                   | 6.6                                    |
| Axial Isotropy                                                                     | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Hemispherical Isotropy                                                             | 9.6                              | R                           | $\sqrt{3}$ | 0           | 0            | 0.0                                   | 0.0                                    |
| Linearity                                                                          | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Modulation Response                                                                | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Detection limits                                                                   | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Boundary effect                                                                    | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Readout electronics                                                                | 0.3                              | N                           | 1          | 1           | 1            | 0.3                                   | 0.3                                    |
| Response time                                                                      | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Integration time                                                                   | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| RF ambient conditions –<br>noise                                                   | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| RF ambient<br>conditions–reflections                                               | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Probe positioner mech.<br>Restrictions                                             | 0.8                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.5                                   | 0.5                                    |
| Probe positioning with<br>respect to phantom shell                                 | 6.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 3.9                                   | 3.9                                    |
| Post-processing                                                                    | 2.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 1.2                                   | 1.2                                    |
| <b>Test sample related</b>                                                         |                                  |                             |            |             |              |                                       |                                        |
| Device holder Uncertainty                                                          | 6.3                              | N                           | 1          | 1           | 1            | 6.3                                   | 6.3                                    |
| Test sample positioning                                                            | 2.8                              | N                           | 1          | 1           | 1            | 2.8                                   | 2.8                                    |
| Power scaling                                                                      | 4.5                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.6                                   | 2.6                                    |
| Drift of output power                                                              | 5.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.9                                   | 2.9                                    |
| <b>Phantom and set-up</b>                                                          |                                  |                             |            |             |              |                                       |                                        |
| Phantom uncertainty (shape<br>and thickness tolerances)                            | 4.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.3                                   | 2.3                                    |
| Algorithm for correcting SAR<br>for deviations in permittivity<br>and conductivity | 1.9                              | N                           | 1          | 1           | 0.84         | 1.1                                   | 0.9                                    |
| Liquid conductivity (meas.)                                                        | 2.5                              | N                           | 1          | 0.64        | 0.43         | 1.6                                   | 1.1                                    |
| Liquid permittivity (meas.)                                                        | 2.5                              | N                           | 1          | 0.6         | 0.49         | 1.5                                   | 1.2                                    |
| Temp. unc. - Conductivity                                                          | 1.7                              | R                           | $\sqrt{3}$ | 0.78        | 0.71         | 0.8                                   | 0.7                                    |
| Temp. unc. - Permittivity                                                          | 0.3                              | R                           | $\sqrt{3}$ | 0.23        | 0.26         | 0.0                                   | 0.0                                    |
| Combined standard<br>uncertainty                                                   |                                  | RSS                         |            |             |              | 12.2                                  | 12.1                                   |
| Expanded uncertainty 95 %<br>confidence interval)                                  |                                  |                             |            |             |              | 24.5                                  | 24.2                                   |

## **Appendixes**

Refer to separated files for the following appendixes.

**APPENDIX A SAR Plots.**

**APPENDIX B PROBE & DIPOLES CALIBRATION CERTIFICATES.**

**APPENDIX C TEST POSITION PHOTOS.**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***