



FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant : Unitech Electronics Co., Ltd.
Product Type : BT Barcode Scanner
Trade Name : unitech
Model Number : MS926
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Sep. 01, 2016
Test Period : Sep. 20~Oct. 13, 2016
Issue Date : Oct. 19, 2016

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Oct. 19, 2016	Initial Issue	Janice Huang



Verification of Compliance

Issued Date: Oct. 19, 2016

Applicant : Unitech Electronics Co., Ltd.
Product Type : BT Barcode Scanner
Trade Name : unitech
Model Number : MS926
FCC ID : HLEMS926BT
EUT Rated Voltage : DC 5.0V, 0.5A
Test Voltage : 120 Vac / 60 Hz , DC 3.7V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)

Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu

(Manager)

(Fly Lu)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information.....	6
1.1.	Summary of Test Result.....	6
1.2.	Measurement Uncertainty.....	6
2	EUT Description.....	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software.....	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment.....	10
4	Maximum Conducted Output Power Measurement	11
4.1.	Limit.....	11
4.2.	Test Setup.....	11
4.3.	Test Instruments	11
4.4.	Test Procedure.....	11
4.5.	Test Result	12
5	AC Power Line Conducted Emission Measurement.....	13
5.1.	Limit.....	13
5.2.	Test Instruments	13
5.3.	Test Setup.....	13
5.4.	Test Procedure.....	14
5.5.	Test Result	15
6	Radiated Interference Measurement	17
6.1.	Limit.....	17
6.2.	Test Instruments	17
6.3.	Setup	18
6.4.	Test Procedure.....	20
6.5.	Test Result	21
7	20dB RF Bandwidth Measurement.....	29
7.1.	Limit.....	29
7.2.	Test Setup.....	29
7.3.	Test Instruments	29
7.4.	Test Procedure.....	30
7.5.	Test Result	30
7.6.	Test Graphs	31

8	Carrier Frequency Separation Measurement	33
8.1.	Limit	33
8.2.	Test Setup.....	33
8.3.	Test Instruments	33
8.4.	Test Procedure.....	34
8.5.	Test Result	34
8.6.	Test Graphs	35
9	Number of Hopping Measurement	37
9.1.	Limit	37
9.2.	Test Setup.....	37
9.3.	Test Instruments	37
9.4.	Test Procedure.....	37
9.5.	Test Result	38
9.6.	Test Graphs	39
10	Time of Occupancy (Dwell Time) Measurement.....	41
10.1.	Limit	41
10.2.	Test Setup.....	41
10.3.	Test Instruments	41
10.4.	Test Procedure.....	41
10.5.	Test Result	42
10.6.	Test Graphs	44
11	Out of Band Conducted Emissions Measurement.....	46
11.1.	Limit	46
11.2.	Test Setup.....	46
11.3.	Test Instruments	46
11.4.	Test Procedure.....	46
11.5.	Test Graphs	47
12	Antenna Measurement	51
12.1.	Limit	51
12.2.	Antenna Connector Construction.....	51



1 General Information

1.1. Summary of Test Result

FCC Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	9kHz ~ 30MHz	1.457
	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	Unitech Electronics Co., Ltd. 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan				
Manufacturer	Unitech Electronics Co., Ltd. 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan				
Product	BT Barcode Scanner				
Trade Name	unitech				
Model Number	MS926				
FCC ID	HLEMS926BT				
Frequency Range	2402 ~ 2480 MHz				
Modulation Type	GFSK for 1Mbps				
	$\pi/4$ -DQPSK for 2Mbps				
	8DPSK for 3Mbps				
Antenna Type	Chip antenna				
Antenna Gain	3.0 dBi				
RF Output Power (Conducted)	GFSK for 1Mbps	-0.83	dBm /	0.001	W
	$\pi/4$ -DQPSK for 2Mbps	-2.90	dBm /	0.001	W
	8DPSK for 3Mbps	-2.86	dBm /	0.001	W

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 3: $\pi/4$ -DQPSK Link Mode
Mode 4: 8DPSK Link Mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Final-Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 4: 8DPSK Link Mode

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA


3.2. EUT Exercise Software

1	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2	Turn on the power of all equipment.
3	Turn on Bluetooth function and link to Bluetooth tester
4	EUT run test program.

Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emission

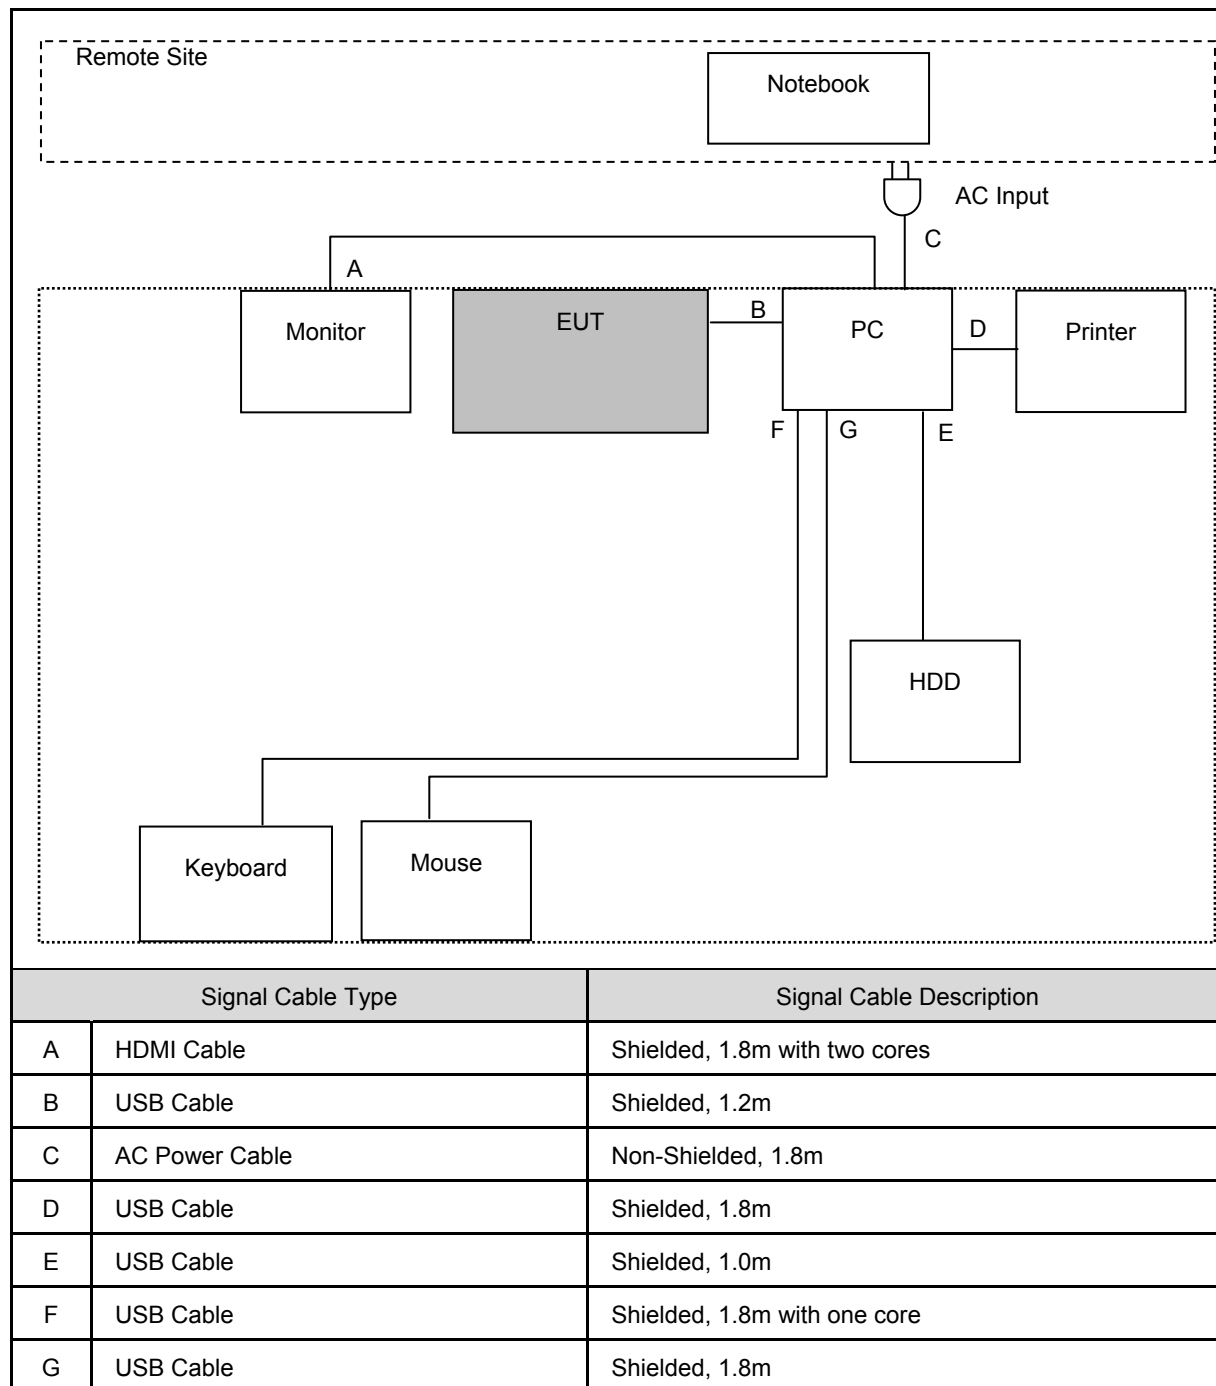

Radiated Emissions

<div style="border: 1px solid black; width: 100px; height: 50px; margin: 0 auto; background-color: #cccccc; display: flex; align-items: center; justify-content: center;"> EUT </div>	
Signal Cable Type	Signal Cable Description
A	---

3.4. Test Site Environment


Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Maximum Conducted Output Power Measurement

4.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

4.2. Test Setup

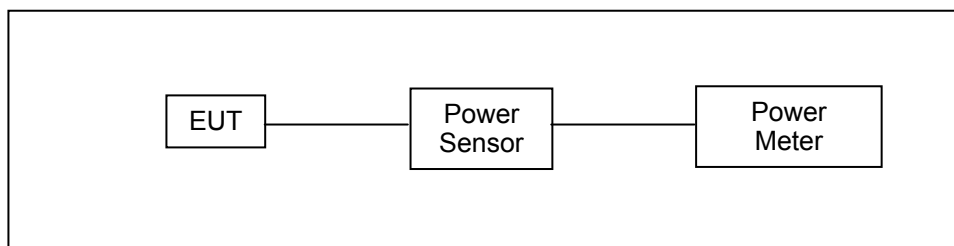

4.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/11/2015	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/11/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

4.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.5. Test Result

Test Mode	Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
			(dBm)	(W)	(dBm)	(W)	
Mode 2	2402	DH1	-5.16	0.00030	-4.92	0.00032	< 0.125
		DH3	-5.14	0.00031	-4.90	0.00032	< 0.125
		DH5	-5.14	0.00031	-4.88	0.00033	< 0.125
	2441	DH1	-3.01	0.00050	-2.79	0.00053	< 0.125
		DH3	-2.96	0.00051	-2.74	0.00053	< 0.125
		DH5	-2.95	0.00051	-2.73	0.00053	< 0.125
	2480	DH1	-1.16	0.00077	-0.93	0.00081	< 0.125
		DH3	-1.11	0.00077	-0.90	0.00081	< 0.125
		DH5	-1.05	0.00079	-0.83	0.00083	< 0.125
Mode 3	2402	2DH1	-9.04	0.00012	-6.88	0.00021	< 0.125
		2DH3	-8.73	0.00013	-6.83	0.00021	< 0.125
		2DH5	-8.46	0.00014	-6.79	0.00021	< 0.125
	2441	2DH1	-7.15	0.00019	-4.91	0.00032	< 0.125
		2DH3	-6.91	0.00020	-4.84	0.00033	< 0.125
		2DH5	-6.77	0.00021	-4.70	0.00034	< 0.125
	2480	2DH1	-5.38	0.00029	-3.29	0.00047	< 0.125
		2DH3	-5.06	0.00031	-3.11	0.00049	< 0.125
		2DH5	-4.68	0.00034	-2.90	0.00051	< 0.125
Mode 4	2402	3DH1	-8.82	0.00013	-6.68	0.00021	< 0.125
		3DH3	-8.68	0.00014	-6.64	0.00022	< 0.125
		3DH5	-8.37	0.00015	-6.61	0.00022	< 0.125
	2441	3DH1	-6.97	0.00020	-4.70	0.00034	< 0.125
		3DH3	-6.91	0.00020	-4.55	0.00035	< 0.125
		3DH5	-6.69	0.00021	-4.54	0.00035	< 0.125
	2480	3DH1	-5.07	0.00031	-2.93	0.00051	< 0.125
		3DH3	-4.80	0.00033	-2.90	0.00051	< 0.125
		3DH5	-4.33	0.00037	-2.86	0.00052	< 0.125

Note: The relevant measured result has the offset with cable loss already.

5 AC Power Line Conducted Emission Measurement

5.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


5.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	05/31/2016	(1)
LISN	R&S	ENV216	101040	03/15/2016	(1)
LISN	R&S	ENV216	101041	03/07/2016	(1)
RF Cable	Woken	00100D1380194M	TE-02-02	05/31/2016	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

5.3. Test Setup

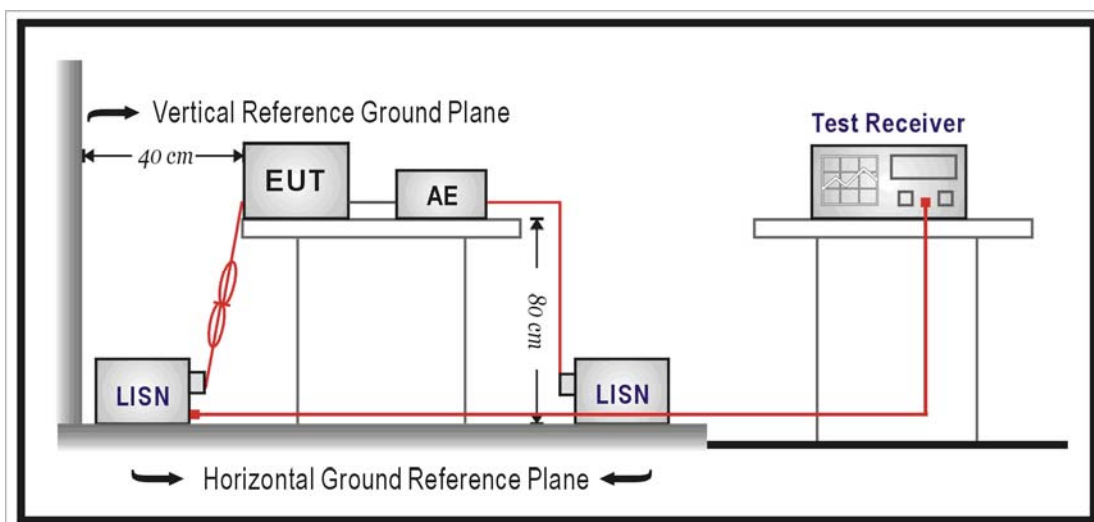

5.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega//50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega//50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

5.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	09/20/2016
		Test By:	Eric Ou Yang
Description:			

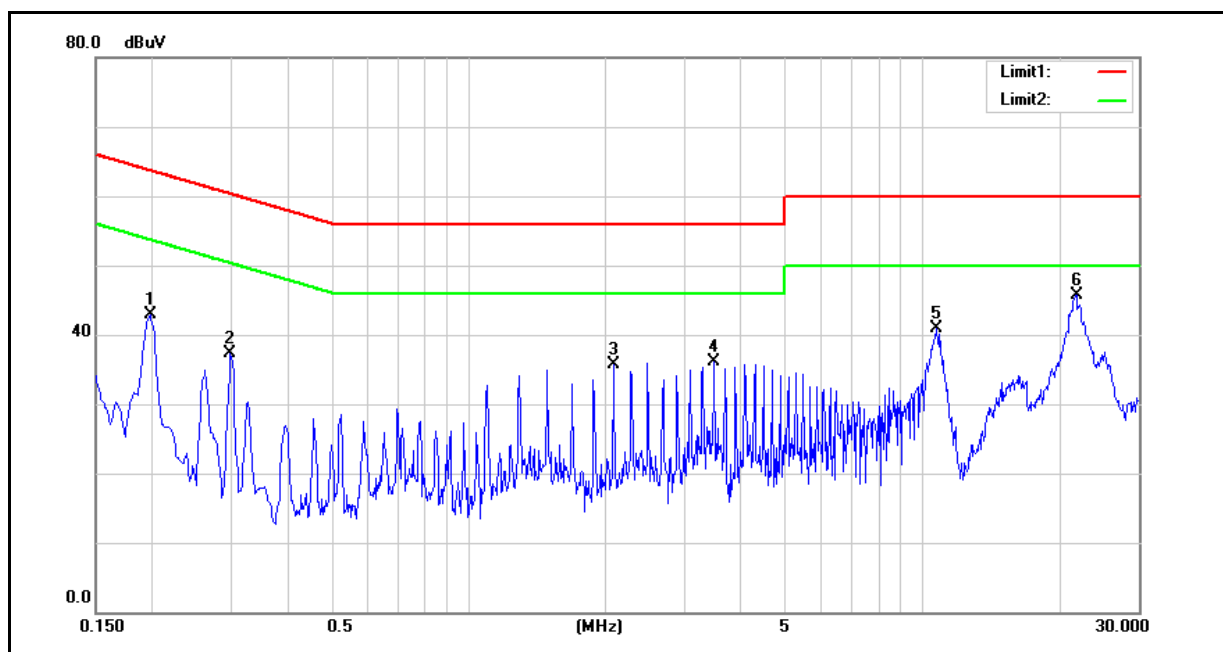


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1980	30.67	26.94	9.59	40.26	36.53	63.69	53.69	-23.43	-17.16	Pass
2	0.2980	26.82	26.76	9.60	36.42	36.36	60.30	50.30	-23.88	-13.94	Pass
3	2.0860	24.24	21.00	9.69	33.93	30.69	56.00	46.00	-22.07	-15.31	Pass
4	3.4740	24.93	21.84	9.74	34.67	31.58	56.00	46.00	-21.33	-14.42	Pass
5	10.7780	29.62	21.17	9.90	39.52	31.07	60.00	50.00	-20.48	-18.93	Pass
6	21.9460	33.11	22.88	9.97	43.08	32.85	60.00	50.00	-16.92	-17.15	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	09/20/2016
		Test By:	Eric Ou Yang
Description:			

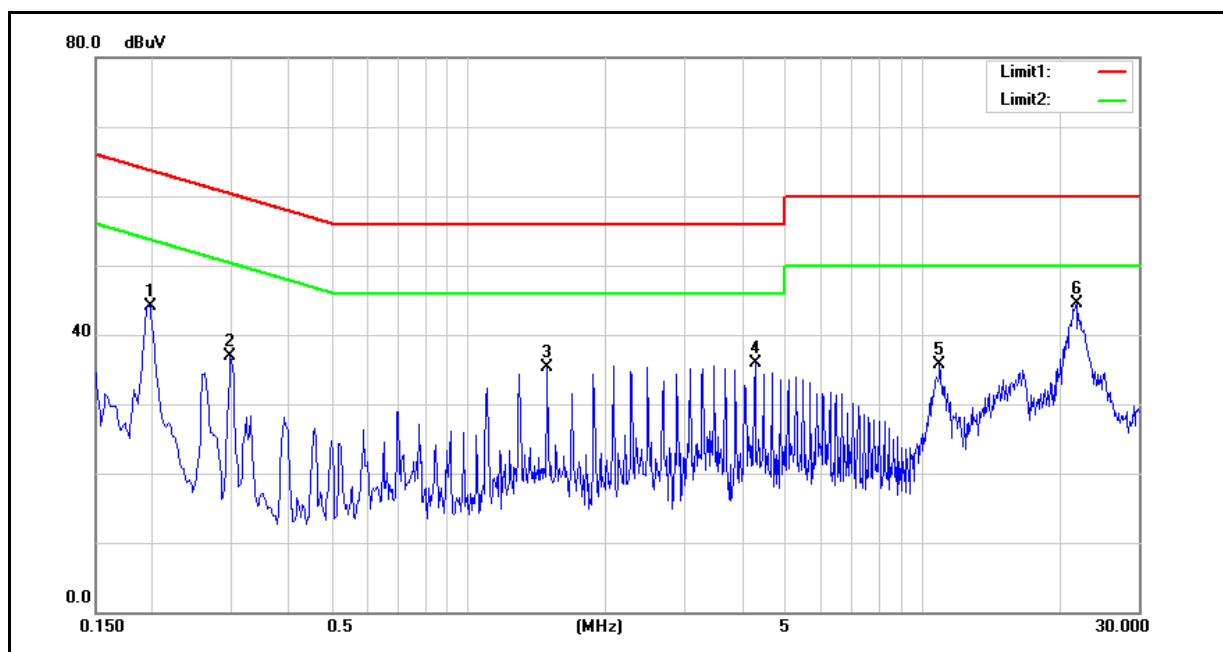

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1980	31.86	28.92	9.58	41.44	38.50	63.69	53.69	-22.25	-15.19	Pass
2	0.2980	26.40	26.10	9.59	35.99	35.69	60.30	50.30	-24.31	-14.61	Pass
3	1.4900	24.27	22.81	9.65	33.92	32.46	56.00	46.00	-22.08	-13.54	Pass
4	4.2700	24.87	21.45	9.76	34.63	31.21	56.00	46.00	-21.37	-14.79	Pass
5	10.9060	24.31	16.44	9.93	34.24	26.37	60.00	50.00	-25.76	-23.63	Pass
6	21.9460	32.41	21.40	10.13	42.54	31.53	60.00	50.00	-17.46	-18.47	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



6 Radiated Interference Measurement

6.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

6.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/08/2016	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	(1)
Pre Amplifier	Agilent	8449B	3008A02237	10/07/2016	(1)
Pre Amplifier	Agilent	8447D	2944A11119	01/11/2016	(1)
Broadband Antenna	Schwarzbeck	VULB9168	416	09/26/2016	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/06/2016	(1)
Horn Antenna (18~40GHz)	ETS	3116	86467	09/05/2016	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/01/2016	(1)
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/23/2016	(1)
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	02/23/2016	(1)
Microwave Cable	EMCI	EMC104-SM-SM-600	140301	02/23/2016	(1)
Test Site	ATL	TE01	TE01	08/29/2016	(1)

Remark: (1) Calibration period 1 year.


NOTE: N.C.R. = No Calibration Request.

6.3. Setup


9kHz ~ 30MHz

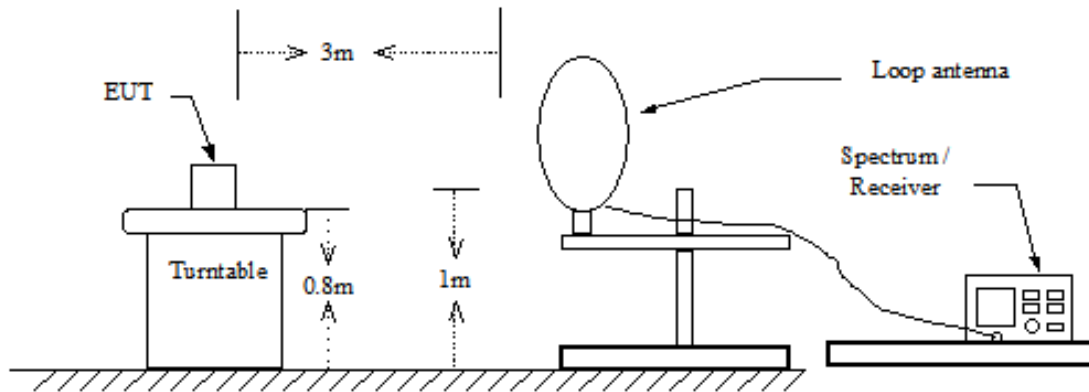

Below 1GHz

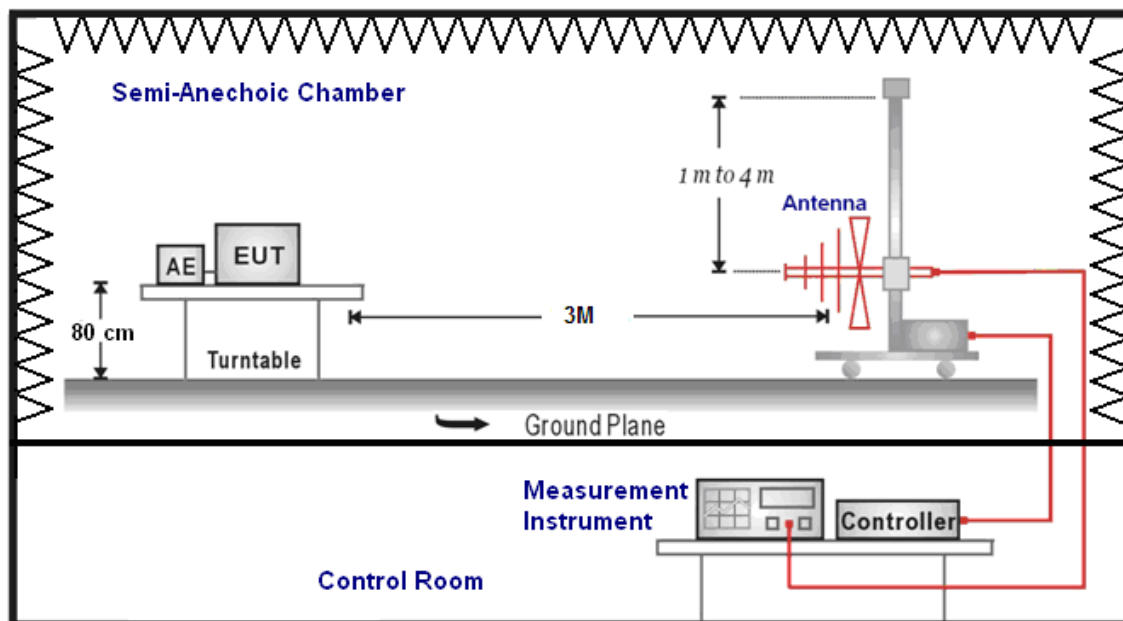

Above 1GHz

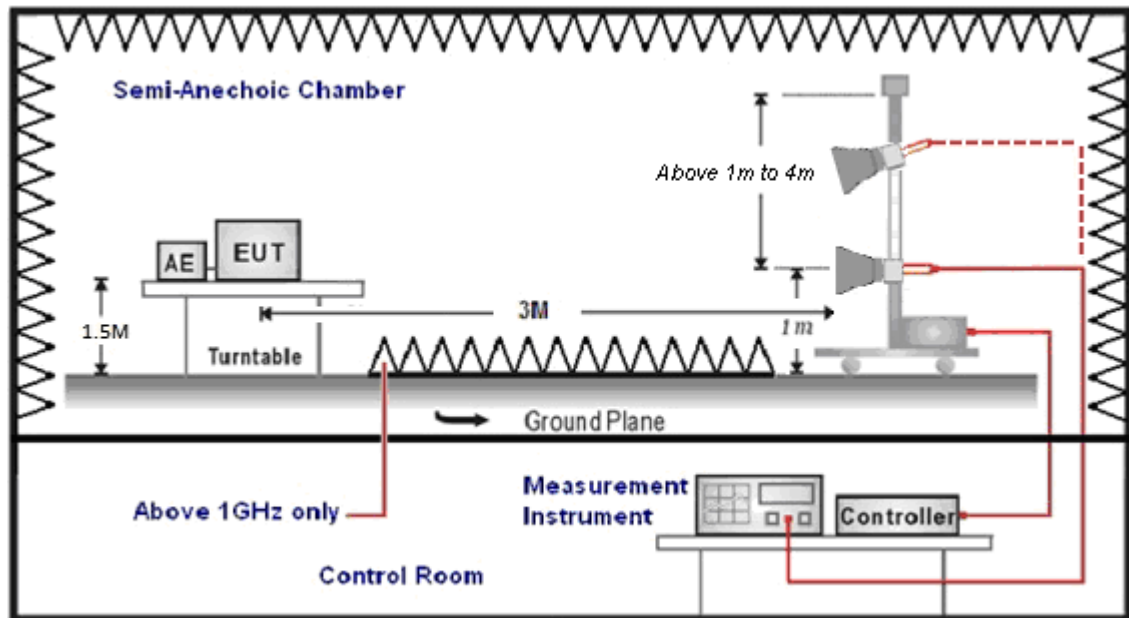

6.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



6.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		DC 3.7V	
Model Number:		MS926		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Test Mode:		Mode 1		Date:		10/04/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
200.0000	33.44	-7.82	25.62	43.50	-17.88	QP	H
312.0000	31.74	-3.20	28.54	46.00	-17.46	QP	H
429.5000	32.16	-0.80	31.36	46.00	-14.64	QP	H
587.0000	31.01	2.53	33.54	46.00	-12.46	QP	H
685.5000	27.65	4.44	32.09	46.00	-13.91	QP	H
831.5000	25.26	7.23	32.49	46.00	-13.51	QP	H
200.0000	33.19	-7.82	25.37	43.50	-18.13	QP	V
312.0000	32.05	-3.20	28.85	46.00	-17.15	QP	V
415.0000	34.89	-1.24	33.65	46.00	-12.35	QP	V
487.0000	37.36	0.50	37.86	46.00	-8.14	QP	V
617.0000	26.29	3.25	29.54	46.00	-16.46	QP	V
718.0000	32.00	5.15	37.15	46.00	-8.85	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

**Above 1GHz**

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 2		Power:		DC 3.7V	
Frequency:		2402 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4804.000	57.68	-8.01	49.67	74.00	-24.33	peak	H
4804.000	63.13	-8.01	55.12	74.00	-18.88	peak	V
4804.000	53.59	-8.01	45.58	54.00	-8.42	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 2		Power:		DC 3.7V	
Frequency:		2441 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4882.000	57.15	-7.77	49.38	74.00	-24.62	peak	H
4882.000	58.91	-7.77	51.14	74.00	-22.86	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 2		Power:		DC 3.7V	
Frequency:		2480 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4960.000	58.57	-7.52	51.05	74.00	-22.95	peak	H
4960.000	60.69	-7.52	53.17	74.00	-20.83	peak	V
4960.000	56.42	-7.52	48.90	54.00	-5.10	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 4		Power:		DC 3.7V	
Frequency:		2402 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4804.000	50.13	-8.01	42.12	74.00	-31.88	peak	H
4804.000	52.71	-8.01	44.70	74.00	-29.30	peak	V



Standard: FCC Part 15C				Test Distance: 3m			
Test Mode: Mode 4				Power: DC 3.7V			
Frequency: 2441 MHz				Temp.(°C)/Hum.(%RH): 26(°C)/60%RH			
				Date: 10/03/2016			
				Test By: Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4882.000	51.77	-7.77	44.00	74.00	-30.00	peak	H
4882.000	49.37	-7.77	41.60	74.00	-32.40	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 4		Power:		DC 3.7V	
Frequency:		2480 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4960.000	50.35	-7.52	42.83	74.00	-31.17	peak	H
4960.000	49.35	-7.52	41.83	74.00	-32.17	peak	V

**Band Edge**

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 2		Power:		DC 3.7V	
Frequency:		2402 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.760	40.33	-0.34	39.99	74.00	-34.01	peak	H
2390.000	39.61	-0.34	39.27	74.00	-34.73	peak	H
2389.530	42.20	-0.34	41.86	74.00	-32.14	peak	V
2390.000	40.65	-0.34	40.31	74.00	-33.69	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 2		Power:		DC 3.7V	
Frequency:		2480 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	43.89	0.03	43.92	74.00	-30.08	peak	H
2484.020	42.42	0.04	42.46	74.00	-31.54	peak	H
2483.500	47.05	0.03	47.08	74.00	-26.92	peak	V
2486.100	47.81	0.04	47.85	74.00	-26.15	peak	V



Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 2		Power:		DC 3.7V	
Frequency:		Hopping		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.230	40.10	-0.34	39.76	74.00	-34.24	peak	H
2390.000	38.71	-0.34	38.37	74.00	-35.63	peak	H
2483.500	37.88	0.03	37.91	74.00	-36.09	peak	H
2493.540	39.77	0.07	39.84	74.00	-34.16	peak	H
2388.850	41.94	-0.34	41.60	74.00	-32.40	peak	V
2390.000	42.02	-0.34	41.68	74.00	-32.32	peak	V
2483.500	39.68	0.03	39.71	74.00	-34.29	peak	V
2485.940	47.84	0.04	47.88	74.00	-26.12	peak	V



Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 4		Power:		DC 3.7V	
Frequency:		2402 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.640	40.51	-0.34	40.17	74.00	-33.83	peak	H
2390.000	38.29	-0.34	37.95	74.00	-36.05	peak	H
2389.530	41.89	-0.34	41.55	74.00	-32.45	peak	V
2390.000	39.73	-0.34	39.39	74.00	-34.61	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 4		Power:		DC 3.7V	
Frequency:		2480 MHz		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	44.46	0.03	44.49	74.00	-29.51	peak	H
2483.760	44.88	0.03	44.91	74.00	-29.09	peak	H
2483.500	41.24	0.03	41.27	74.00	-32.73	peak	V
2483.840	47.90	0.03	47.93	74.00	-26.07	peak	V




Standard:		FCC Part 15C		Test Distance:		3m	
Test Mode:		Mode 4		Power:		DC 3.7V	
Frequency:		Hopping		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		10/03/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.850	40.19	-0.34	39.85	74.00	-34.15	peak	H
2390.000	38.93	-0.34	38.59	74.00	-35.41	peak	H
2483.500	38.91	0.03	38.94	74.00	-35.06	peak	H
2486.700	40.24	0.04	40.28	74.00	-33.72	peak	H
2389.040	44.28	-0.34	43.94	74.00	-30.06	peak	V
2390.000	43.38	-0.34	43.04	74.00	-30.96	peak	V
2483.500	39.39	0.03	39.42	74.00	-34.58	peak	V
2484.230	41.87	0.04	41.91	74.00	-32.09	peak	V

7 20dB RF Bandwidth Measurement

7.1. Limit

N/A

7.2. Test Setup

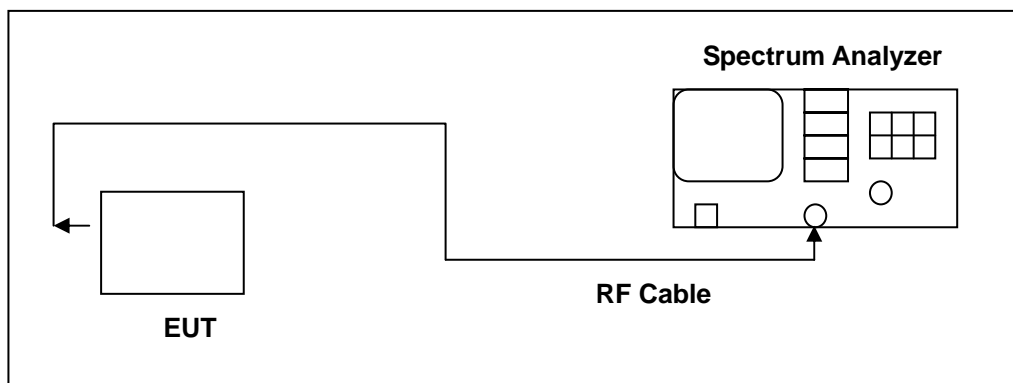

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/23/2016	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.




7.5. Test Result

Test Mode	Frequency (MHz)	Measurement Results (MHz)
Mode 2	2402	0.946
	2441	0.942
	2480	0.945
Mode 4	2402	1.212
	2441	1.209
	2480	1.211

7.6. Test Graphs

Mode 2: GFSK Link Mode	
2402 MHz	
2441 MHz	
2480 MHz	

Mode 4: 8DPSK Link Mode

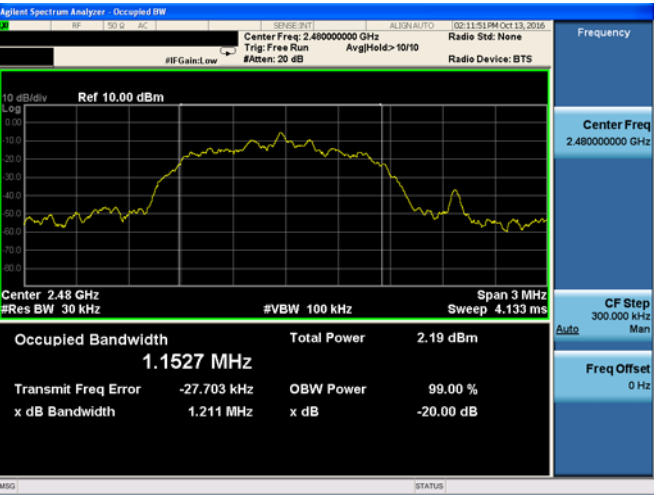
2402 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz Trig: Free Run #IF Gain: Low #Atten: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1526 MHz</p> <p>Total Power -1.27 dBm</p> <p>Transmit Freq Error -27.132 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.212 MHz</p> <p>x dB -20.00 dB</p> <p>MSG STATUS</p>
2441 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.44100000 GHz Trig: Free Run #IF Gain: Low #Atten: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 300.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1550 MHz</p> <p>Total Power 0.40 dBm</p> <p>Transmit Freq Error -27.458 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.209 MHz</p> <p>x dB -20.00 dB</p> <p>MSG STATUS</p>
2480 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.48000000 GHz Trig: Free Run #IF Gain: Low #Atten: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Frequency</p> <p>Center Freq 2.48000000 GHz</p> <p>CF Step 300.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1527 MHz</p> <p>Total Power 2.19 dBm</p> <p>Transmit Freq Error -27.703 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.211 MHz</p> <p>x dB -20.00 dB</p> <p>MSG STATUS</p>

8 Carrier Frequency Separation Measurement

8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

8.2. Test Setup

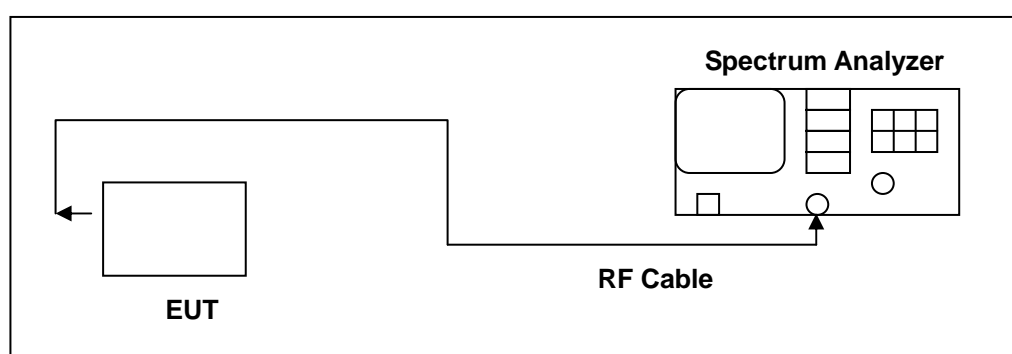

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/23/2016	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold




The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

8.5. Test Result




Test Mode	Frequency (MHz)	Measurement Results (MHz)	Limit (MHz)
Mode 2	2402	1.000	> 0.631
	2441	1.000	> 0.628
	2480	1.000	> 0.630
Mode 4	2402	1.000	> 0.808
	2441	1.000	> 0.806
	2480	1.000	> 0.807

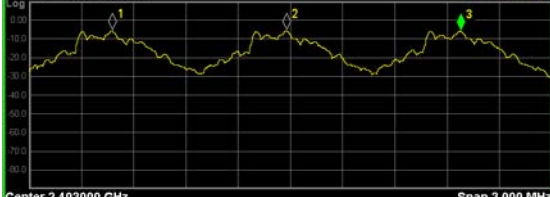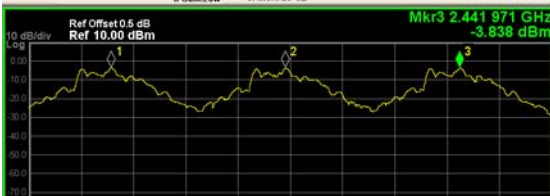

8.6. Test Graphs

Mode 2: GFSK Link Mode																																																																																																													
2402 MHz	<div><div><div><div>Agilent Spectrum Analyzer - Sweep 5A</div><div><div>PRW: Wide</div><div>Trig: Free Run</div><div>Avg Type: Log-Pwr</div><div>Trace 1</div></div><div><div>IF Gain: Low</div><div>#Amen: 20 dB</div><div>AvgHold: 100/100</div><div>TYPE: S</div></div><div>102:38:31 PM Oct 13, 2016</div></div><div><div>Ref Offset: 0.5 dB</div><div>Ref: 10.00 dBm</div><div>Mkr3 2.403 977 GHz</div><div>-5.857 dBm</div><div>Center 2.403000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts)</div><table><thead><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 977 GHz</td><td>-5.722 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402 977 GHz</td><td>-5.692 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403 977 GHz</td><td>-5.857 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table><div>Mkr3</div><div>(STATUS)</div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.40300000 GHz</div><div>Start Freq 2.401500000 GHz</div><div>Stop Freq 2.404500000 GHz</div><div>CF Step 300.000 kHz Man</div><div>Freq Offset 0 Hz</div></div></div></div>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 977 GHz	-5.722 dBm				2	N	1	f	2.402 977 GHz	-5.692 dBm				3	N	1	f	2.403 977 GHz	-5.857 dBm				4									5									6									7									8									9									10									11								
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.401 977 GHz	-5.722 dBm																																																																																																								
2	N	1	f	2.402 977 GHz	-5.692 dBm																																																																																																								
3	N	1	f	2.403 977 GHz	-5.857 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2441 MHz	<div><div><div><div>Agilent Spectrum Analyzer - Sweep 5A</div><div><div>PRW: Wide</div><div>Trig: Free Run</div><div>Avg Type: Log-Pwr</div><div>Trace 1</div></div><div><div>IF Gain: Low</div><div>#Amen: 20 dB</div><div>AvgHold: 100/100</div><div>TYPE: S</div></div><div>102:20:28 PM Oct 13, 2016</div></div><div><div>Ref Offset: 0.5 dB</div><div>Ref: 10.00 dBm</div><div>Mkr3 2.441 971 GHz</div><div>-3.838 dBm</div><div>Center 2.441000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts)</div><table><thead><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 971 GHz</td><td>-3.765 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440 971 GHz</td><td>-4.001 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441 971 GHz</td><td>-3.838 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table><div>Mkr3</div><div>(STATUS)</div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.44100000 GHz</div><div>Start Freq 2.439500000 GHz</div><div>Stop Freq 2.442500000 GHz</div><div>CF Step 300.000 kHz Man</div><div>Freq Offset 0 Hz</div></div></div></div>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 971 GHz	-3.765 dBm				2	N	1	f	2.440 971 GHz	-4.001 dBm				3	N	1	f	2.441 971 GHz	-3.838 dBm				4									5									6									7									8									9									10									11								
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.439 971 GHz	-3.765 dBm																																																																																																								
2	N	1	f	2.440 971 GHz	-4.001 dBm																																																																																																								
3	N	1	f	2.441 971 GHz	-3.838 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2480 MHz	<div><div><div><div>Agilent Spectrum Analyzer - Sweep 5A</div><div><div>PRW: Wide</div><div>Trig: Free Run</div><div>Avg Type: Log-Pwr</div><div>Trace 1</div></div><div><div>IF Gain: Low</div><div>#Amen: 20 dB</div><div>AvgHold: 100/100</div><div>TYPE: S</div></div><div>102:23:39 PM Oct 13, 2016</div></div><div><div>Ref Offset: 0.5 dB</div><div>Ref: 10.00 dBm</div><div>Mkr3 2.479 974 GHz</div><div>-1.835 dBm</div><div>Center 2.479000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts)</div><table><thead><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.477 974 GHz</td><td>-1.855 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.478 974 GHz</td><td>-1.849 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.479 974 GHz</td><td>-1.835 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table><div>Mkr3</div><div>(STATUS)</div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.47900000 GHz</div><div>Start Freq 2.477500000 GHz</div><div>Stop Freq 2.480500000 GHz</div><div>CF Step 300.000 kHz Man</div><div>Freq Offset 0 Hz</div></div></div></div>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477 974 GHz	-1.855 dBm				2	N	1	f	2.478 974 GHz	-1.849 dBm				3	N	1	f	2.479 974 GHz	-1.835 dBm				4									5									6									7									8									9									10									11								
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.477 974 GHz	-1.855 dBm																																																																																																								
2	N	1	f	2.478 974 GHz	-1.849 dBm																																																																																																								
3	N	1	f	2.479 974 GHz	-1.835 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

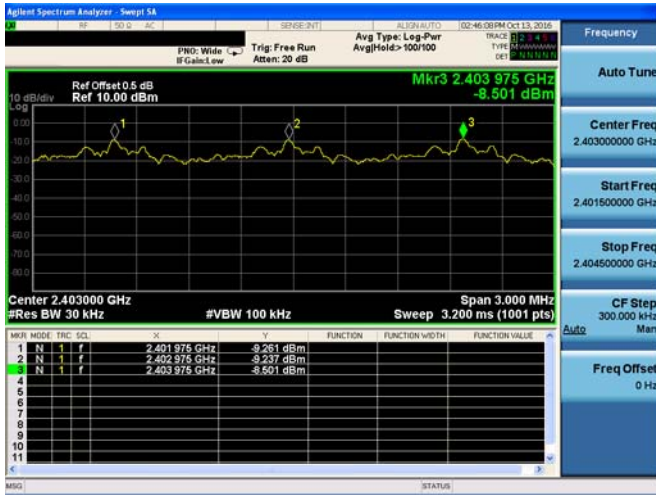Mode 4: 8DPSK Link Mode


2402 MHz	 <table><tr><th>MARKER</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401975 GHz</td><td>-9.261 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402975 GHz</td><td>-9.237 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403975 GHz</td><td>-8.501 dBm</td><td></td><td></td><td></td></tr></table>	MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401975 GHz	-9.261 dBm				2	N	1	f	2.402975 GHz	-9.237 dBm				3	N	1	f	2.403975 GHz	-8.501 dBm			
MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.401975 GHz	-9.261 dBm																																
2	N	1	f	2.402975 GHz	-9.237 dBm																																
3	N	1	f	2.403975 GHz	-8.501 dBm																																
2441 MHz	 <table><tr><th>MARKER</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439969 GHz</td><td>-7.194 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440969 GHz</td><td>-7.062 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441969 GHz</td><td>-6.896 dBm</td><td></td><td></td><td></td></tr></table>	MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439969 GHz	-7.194 dBm				2	N	1	f	2.440969 GHz	-7.062 dBm				3	N	1	f	2.441969 GHz	-6.896 dBm			
MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.439969 GHz	-7.194 dBm																																
2	N	1	f	2.440969 GHz	-7.062 dBm																																
3	N	1	f	2.441969 GHz	-6.896 dBm																																
2480 MHz	 <table><tr><th>MARKER</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.477971 GHz</td><td>-5.120 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.478971 GHz</td><td>-5.662 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.479971 GHz</td><td>-5.054 dBm</td><td></td><td></td><td></td></tr></table>	MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477971 GHz	-5.120 dBm				2	N	1	f	2.478971 GHz	-5.662 dBm				3	N	1	f	2.479971 GHz	-5.054 dBm			
MARKER	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.477971 GHz	-5.120 dBm																																
2	N	1	f	2.478971 GHz	-5.662 dBm																																
3	N	1	f	2.479971 GHz	-5.054 dBm																																

9 Number of Hopping Measurement

9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

9.2. Test Setup

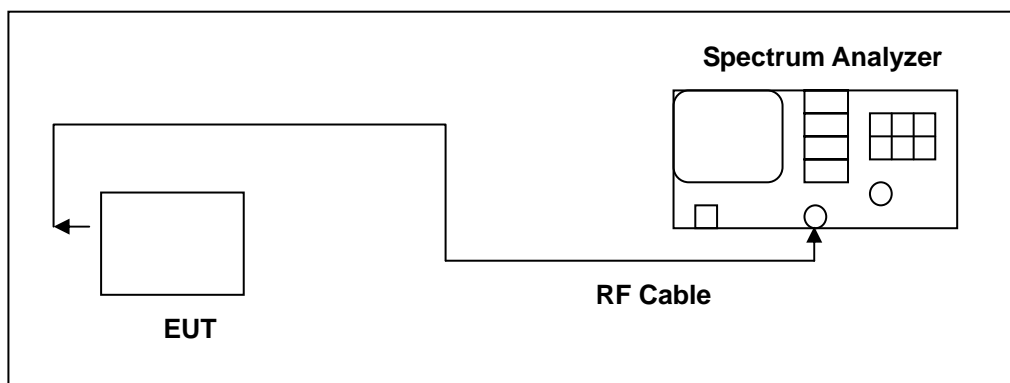

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.




9.5. Test Result

Test Mode	Frequency Range (MHz)	Measurement Results (Ch)	Limit (ch)
Mode 2	2402 - 2480	79	> 15
Mode 3	2402 - 2480	79	> 15
Mode 4	2402 - 2480	79	> 15




9.6. Test Graphs

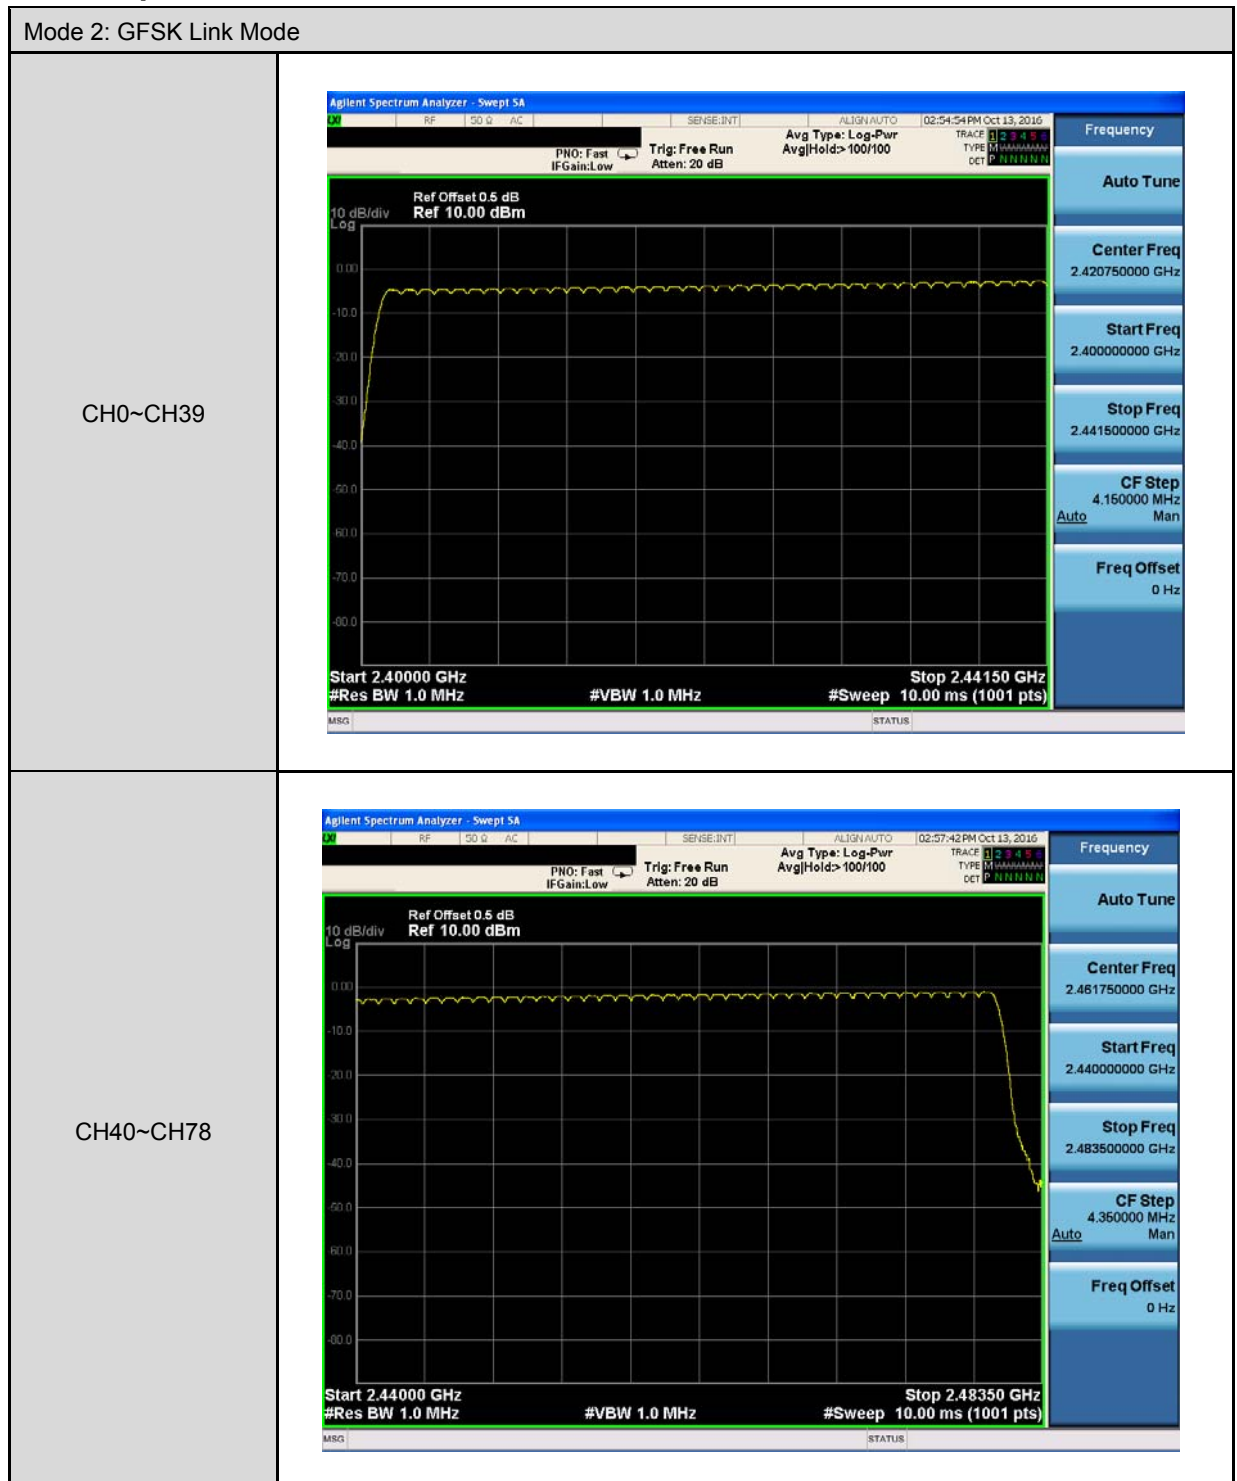

Mode 4: 8DPSK Link Mode

CH0~CH39

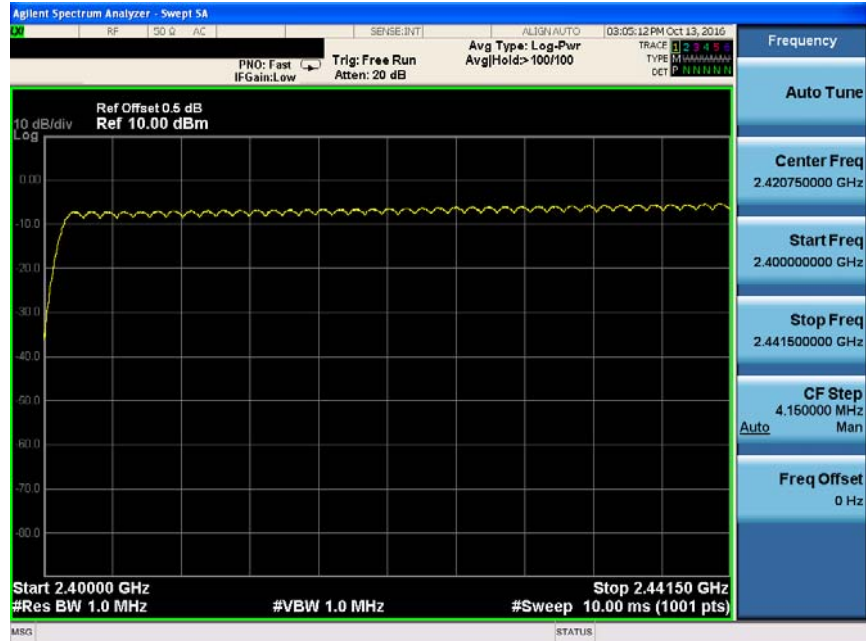

CH40~CH78




10 Time of Occupancy (Dwell Time) Measurement

10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. Test Setup

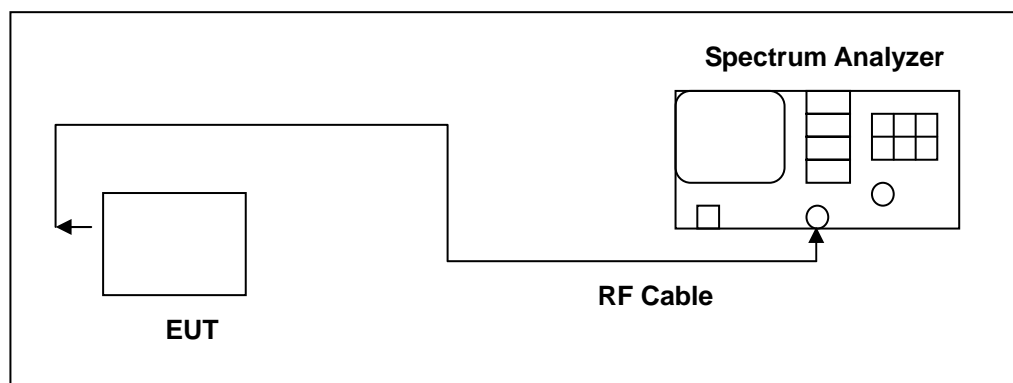

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.




10.5. Test Result

Mode 2: GFSK Link Mode	
DH1	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108(\text{times})$
Each Channel Dwell Times (2)	0.530 ms (sec)
Dwell Times on Cycle (1) * (2)	169.657 ms (sec)
LIMIT(msec)	$< = 400$
DH3	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16(\text{times})$
Each Channel Dwell Times (2)	1.800 ms (sec)
Dwell Times on Cycle (1) * (2)	287.813 ms (sec)
LIMIT(msec)	$< = 400$
DH5	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492(\text{times})$
Each Channel Dwell Times (2)	3.040 ms (sec)
Dwell Times on Cycle (1) * (2)	324.696 ms (sec)
LIMIT(msec)	$< = 400$

Mode 4: 8DPSK Link Mode	
3DH1	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108(\text{times})$
Each Channel Dwell Times (2)	0.550 ms (sec)
Dwell Times on Cycle (1) * (2)	176.059 ms (sec)
LIMIT(msec)	$< = 400$
3DH3	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16(\text{times})$
Each Channel Dwell Times (2)	1.790 ms (sec)
Dwell Times on Cycle (1) * (2)	286.214 ms (sec)
LIMIT(msec)	$< = 400$
3DH5	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492(\text{times})$
Each Channel Dwell Times (2)	3.060 ms (sec)
Dwell Times on Cycle (1) * (2)	326.832 ms (sec)
LIMIT(msec)	$< = 400$




10.6. Test Graphs

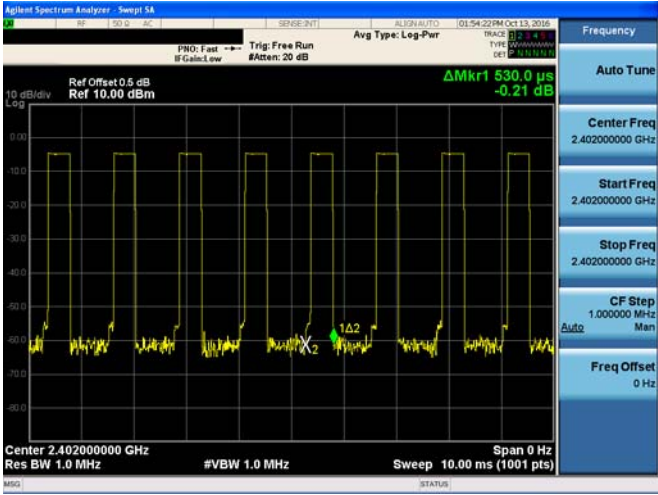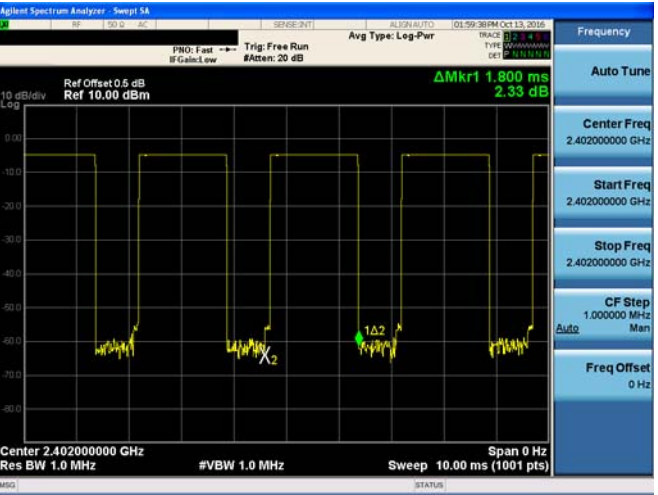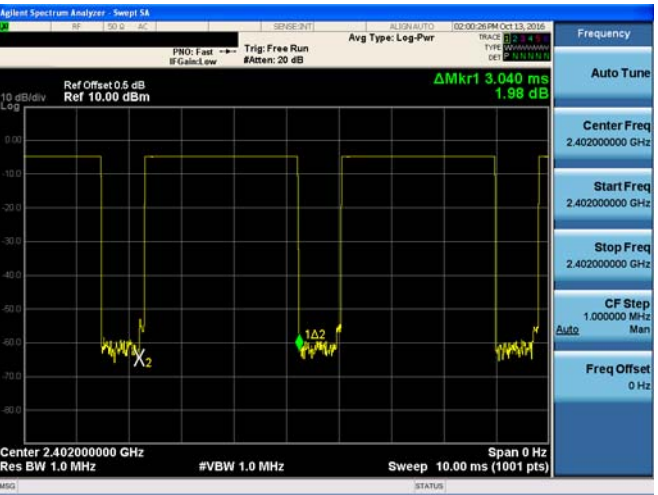
Mode 2: GFSK Link Mode	
DH1	
DH3	
DH5	

Mode 4: 8DPSK Link Mode


3DH1

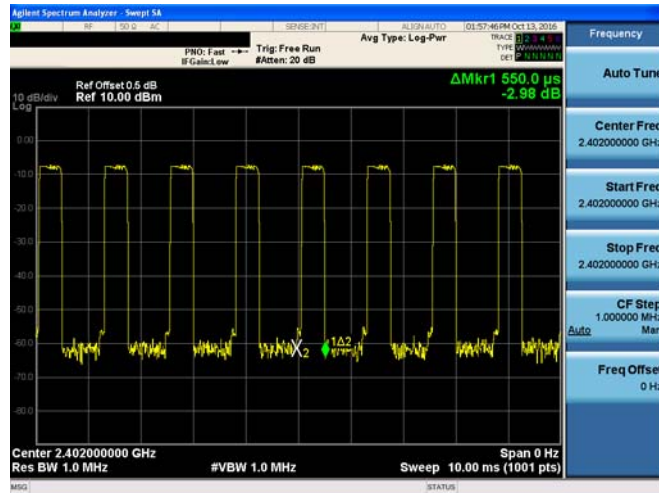

3DH3

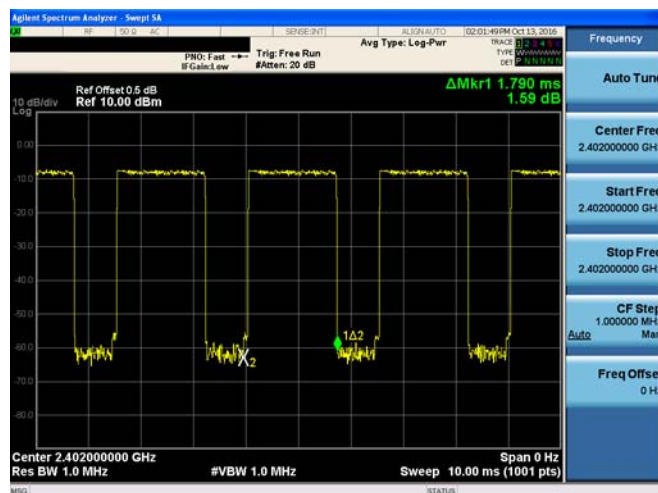

3DH5

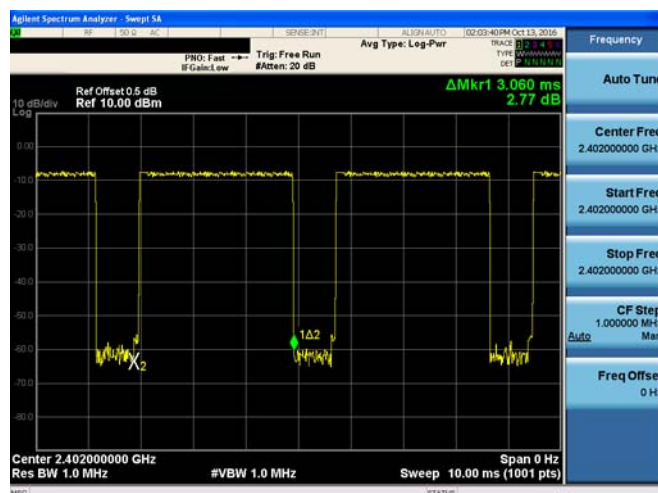


11 Out of Band Conducted Emissions Measurement

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2. Test Setup

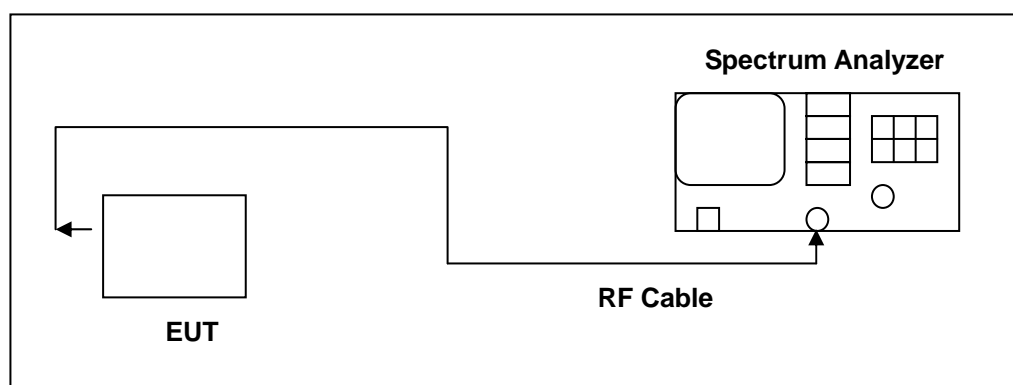

11.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.




NOTE: N.C.R. = No Calibration Request.

11.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)




11.5. Test Graphs

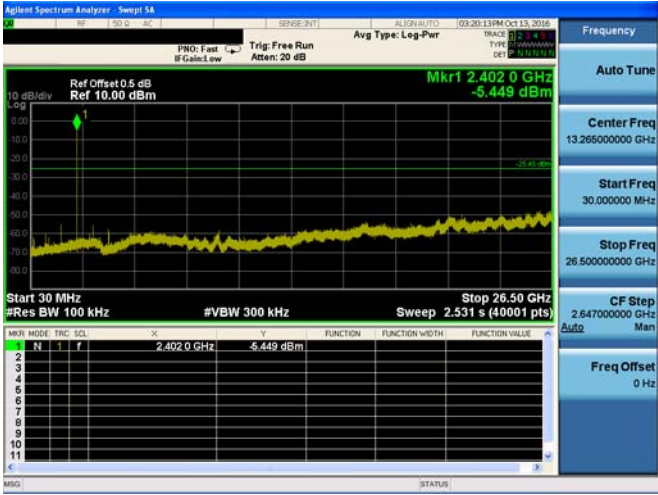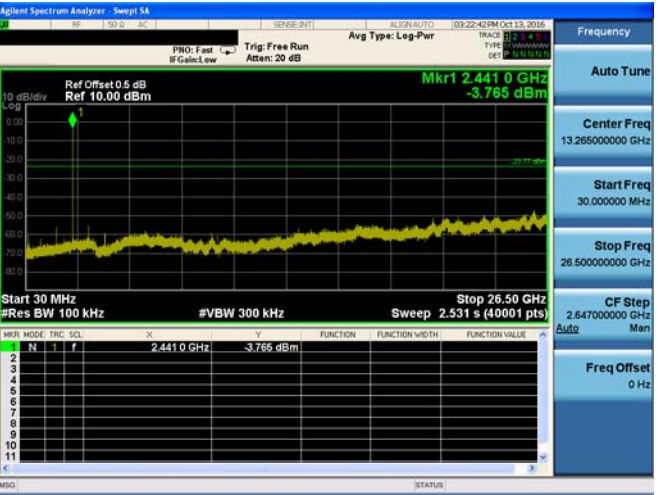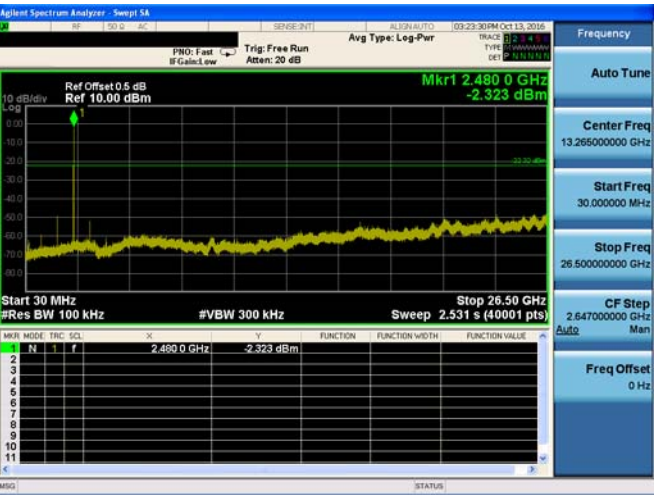Mode 2: GFSK Link Mode	
2402 MHz	
2441 MHz	
2480 MHz	

Mode 2: GFSK Link Mode _ Un-hopping



Mode 2: GFSK Link Mode _ Hopping

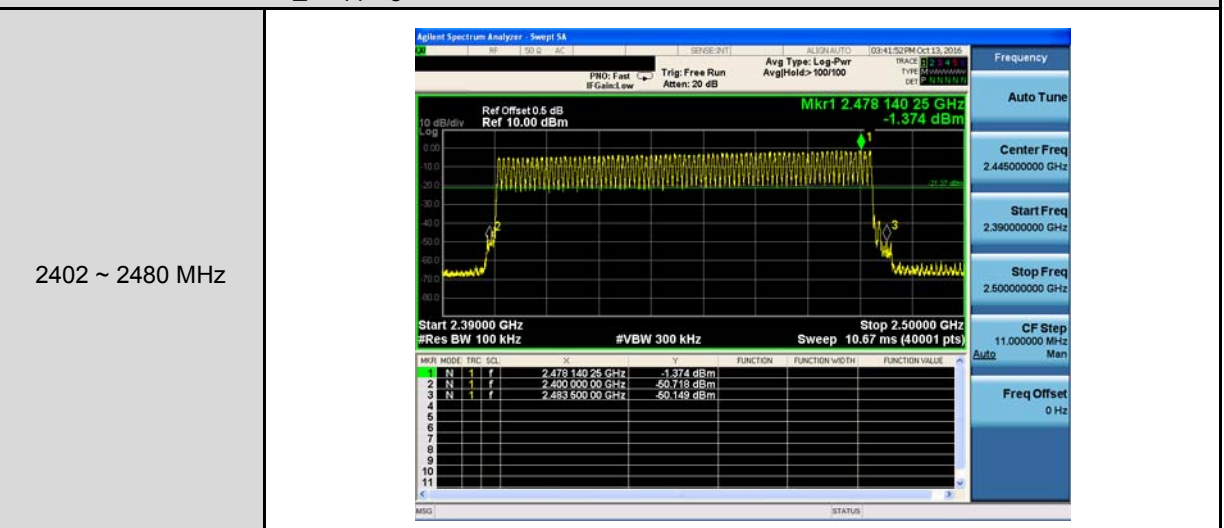

Mode 4: 8DPSK Link Mode


2402 MHz	
2441 MHz	
2480 MHz	



Mode 4: 8DPSK Link Mode _ Un-hopping



Mode 4: 8DPSK Link Mode _ Hopping

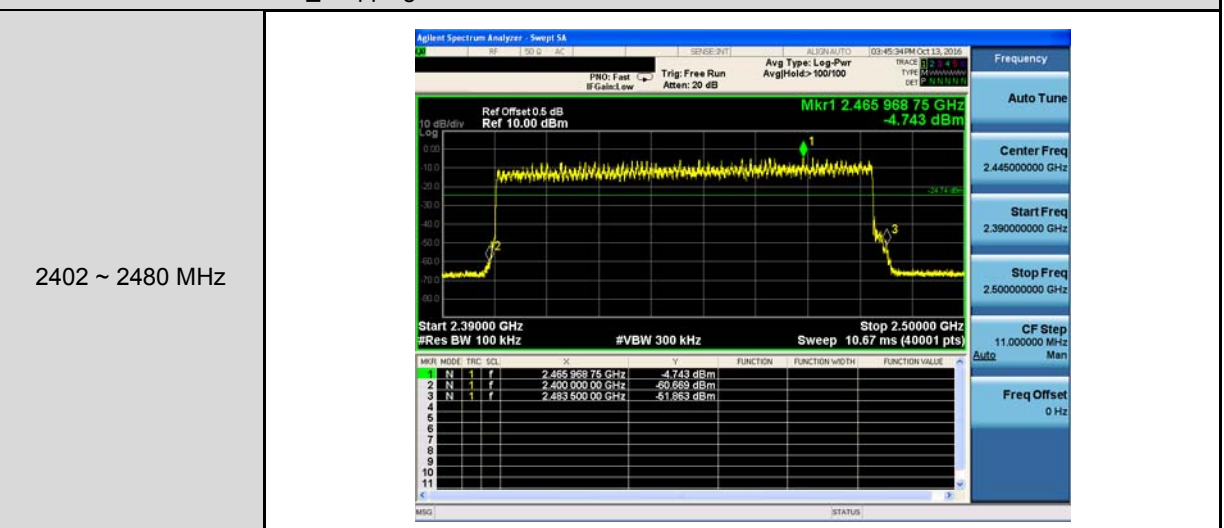



12 Antenna Measurement

12.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Antenna Connector Construction

See section 2 – antenna information.