

# TEST REPORT

**Product Name** : WiFi 6 Module  
**Model Number** : HWiFi6-1  
**FCC ID** : 2AQ5R-HWIFI6-1  
**IC** : 24301-HWIFI6

**Prepared for** : Shenzhen KTC Commercial Display Technology CO.,LTD.  
**Address** : No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China

**Prepared by** : EMTEK (SHENZHEN) CO., LTD.  
**Address** : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

**Report Number** : ENS2303150002W00201R  
**Date(s) of Tests** : May 18, 2023 to July 5, 2023  
**Date of issue** : July 7, 2023

## TABLE OF CONTENTS

<b>1</b>	<b>TEST RESULT CERTIFICATION</b>	<b>3</b>
<b>2</b>	<b>EUT TECHNICAL DESCRIPTION</b>	<b>5</b>
<b>3</b>	<b>SUMMARY OF TEST RESULT</b>	<b>6</b>
<b>4</b>	<b>TEST METHODOLOGY</b>	<b>7</b>
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
<b>5</b>	<b>FACILITIES AND ACCREDITATIONS</b>	<b>9</b>
5.1	FACILITIES	9
5.2	EQUIPMENT	9
5.3	LABORATORY ACCREDITATIONS AND LISTINGS	9
<b>6</b>	<b>TEST SYSTEM UNCERTAINTY</b>	<b>10</b>
<b>7</b>	<b>SETUP OF EQUIPMENT UNDER TEST</b>	<b>11</b>
7.1	RADIO FREQUENCY TEST SETUP 1	11
7.2	RADIO FREQUENCY TEST SETUP 2	11
7.3	CONDUCTED EMISSION TEST SETUP	14
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	15
7.5	SUPPORT EQUIPMENT	15
<b>8</b>	<b>TEST REQUIREMENTS</b>	<b>16</b>
8.1	DTS 6DB BANDWIDTH	16
8.2	DTS 99% BANDWIDTH	35
8.3	MAXIMUM PEAK CONDUCTED OUTPUT POWER	54
8.4	MAXIMUM POWER SPECTRAL DENSITY	73
8.5	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	92
8.6	RADIATED SPURIOUS EMISSION	162
8.7	CONDUCTED EMISSION TEST	184
8.8	ANTENNA APPLICATION	187

## 1 TEST RESULT CERTIFICATION

Applicant : Shenzhen KTC Commercial Display Technology CO.,LTD.

Address : No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China

Manufacturer : Shenzhen KTC Commercial Display Technology CO.,LTD.

Address : No.4023,Northern Wuhe Road,Bantian Street,Longgang District,Shenzhen City,Guangdong Province,P.R.China

EUT : WiFi 6 Module

Model Name : HWiFi6-1

Trademark : N/A


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15, Subpart C	PASS
IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017)	PASS


The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 2 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : May 18, 2023 to July 5, 2023

Prepared by :   
Una Yu /Editor

Reviewer :   
Sevin Li /Supervisor

Approve & Authorized Signer :   
Lisa Wang/Manager



## Modified History

Version	Report No.	Revision Date	Summary
V1.0	ENS2303150002W00201R	/	Original Report



## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>Product:</b>	WiFi 6 Module
<b>Model Number:</b>	HWiFi6-1
<b>Sample Number:</b>	2#
<b>IEEE 802.11 WLAN Mode Supported:</b>	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth)
<b>Modulation:</b>	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
<b>Operating Frequency Range:</b>	2412-2462MHz for 802.11b/g/n(HT20); 2422-2452MHz for 802.11n(HT40);
<b>Number of Channels:</b>	11 channels for 802.11b/g/n(HT20); 7 Channels for 802.11n(HT40);
<b>Transmit Power Max:</b>	17.28 dBm
<b>Antenna Type:</b>	PCB Antenna
<b>Antenna Gain:</b>	3.50 dBi
<b>FVIN</b>	V1.0.0
<b>Power Supply:</b>	120V/60Hz
<b>Date of Received</b>	March 17, 2023
<b>Temperature Range</b>	-10°C ~ +40°C

*Note: for more details, please refer to the User's manual of the EUT.*

### 3 SUMMARY OF TEST RESULT

FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	RSS-247 5.2(a) RSS-Gen 6.7	Emission Bandwidth	PASS	
15.247(b)(3)	RSS-247 5.4(d) RSS-Gen 6.12	Maximum Peak Conducted Output Power	PASS	
15.247(e)	RSS-247 5.2(b) RSS-Gen 6.12	Maximum Power Spectral Density Level	PASS	
15.247(d)	RSS-247 5.5	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d)	RSS-247 5.5	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209 15.205	RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13 RSS-247 3.3 RSS-247 5.5	Radiated Spurious Emission	PASS	
15.207	RSS-Gen 8.8	Conducted Emission Test	PASS	
15.203 15.247(b)	RSS-Gen 6.8 RSS-247 5.4	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.				

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID: 2AQ5R-HWIFI6-1** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for **IC: 24301-HWIFI6** filing to comply with RSS-247 Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021)

IC RSS-247 Issue 2(02-2017)

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

### 4.2 MEASUREMENT EQUIPMENT USED

#### Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCI	101384	May 14, 2023	1 Year
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 14, 2023	1 Year
L.I.S.N.	Kyoritsu	KNW-407	8-1492-9	N/A	N/A

#### For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	May 14, 2023	1 Year
Pre-Amplifier	Lunar EM	LNA30M3G-25	J10100000070	May 14, 2023	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	661	May 14, 2023	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	May 14, 2023	2 Year
Pre-Amplifier	SKET	LNPA_0118G-45	SK2019051801	May 14, 2023	1 Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	May 14, 2023	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 14, 2023	1 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	Aug. 22, 2021	2 Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400-2485MHz)	2	May 14, 2023	1 Year

#### For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal Analyzer	Agilent	N9010A	MY53470879	May 14, 2023	1Year
Vector Signal Generater	Agilent	N5182B	MY53050878	May 14, 2023	1Year
Analog Signal Generator	Agilent	N5171B	MY53050553	May 14, 2023	1Year
Power Meter	Agilent	PS-X10-100	\	May 15, 2023	1Year
Blocking Box	THEDA	AD211	TW5451140	May 14, 2023	1Year
Switchgroup	THEDA	ETF-025(VASC6)	TW5451008	N/A	N/A
MIMO Matrix Switch	THEDA	4P5TM18	TW5451009	N/A	N/A
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	May 14, 2023	1 Year



### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0; 802.11ax (HE20): MCS0; 802.11ax (HE40): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11n(HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

Test Frequency and Channel for 802.11 b/g/n(HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11n(HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

Multi-antenna correlation:

<input checked="" type="checkbox"/>	Transmit Signals are Correlated
	Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
<input type="checkbox"/>	All Transmit Signals are Completely Uncorrelated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

Directional gain =  $10 \log [(10^{3.5/20} + 10^{3.5/20})^2 / 2]$  dBi=6.51 dBi



## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

EMC Lab. : **Accredited by CNAS**  
The Certificate Registration Number is L2291.  
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

**Accredited by FCC**  
Designation Number: CN1204  
Test Firm Registration Number: 882943

**Accredited by A2LA**  
The Certificate Number is 4321.01.

Accredited by Industry Canada  
The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.  
Site Location : Building 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Test Parameter	Measurement Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Measurements shall be taken, using the following steps, at a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment (see RSS-Gen for applicable versions of ANSI and CISPR standards).

(1) Line the ground plane with absorbers between the transmitter and the receive antenna to minimize reflections. The absorbers used should have a minimum-rated attenuation of 20 dB through the measurement frequency range of interest. The absorbers shall be positioned to replicate the layout used when compliance with the applicable acceptability criterion was achieved, as set forth in the aforementioned standards on site validation.

(2) Set the height of the receive antenna to 1.5 m. The receive antenna must be one that was designed and fabricated to operate over the entire frequency range of interest, for example, an appropriate standard gain horn.

(3) The distance between the receive antenna and the radiating source shall be sufficient in order to ensure far-field conditions.

(4) Mount the transmitter at a height of 1.5 m.

(5) Configure the device under test (DUT) to produce the maximum power spectral density as measured while assessing compliance with Section 6.2.2 (i.e. channel frequency, modulation type and data rate). If the DUT is equipped with a detachable antenna and the antenna is intended for remote installation (i.e.

tower-mounted), the DUT may be substituted with a suitable signal generator. The level and frequency settings on the generator shall be set so as to reproduce the maximum power spectral density, measured within a 1 MHz bandwidth, obtained while assessing compliance to Section 6.2.2.

(6) Position the transmitter or the radiating antenna so that elevation pattern measurements can be taken.

(7) Find the 0° reference point in the horizontal plane.

(8) Care should be taken when positioning the receive antenna to avoid cross-polarization. Antennas of known mounting polarization should be assessed with the receive antenna oriented in the same polarity. If the polarization of the transmit antenna is unknown or the transmit antenna can be mounted in either polarization, e.i.r.p. measurements should be performed to find which mounting polarity provides the highest e.i.r.p. value. Testing shall be carried out with the receive antenna and the DUT mounted in each polarity.

(9) The emission shall be centred on the display of the spectrum analyzer with the following settings:

i. If the power spectral density of the DUT was assessed with a peak detector and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

ii. If the power spectral density of the DUT was assessed using a sample detector with power averaging and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a sample detector, configured to produce 100 power averages and set with a resolution bandwidth, as well as a video bandwidth of 1 MHz.

iii. If the antenna can be detached from the DUT, a continuous wave (CW) signal equal to that of the power spectral density measurement may be used, the spectrum analyzer shall be set to peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

(10) Rotate the turntable 360° recording the field strength at each step. Throughout the main beam of the antenna, the step size shall be kept to a maximum of 1°.

Once outside the main beam of the antenna, the maximum step size shall be as follows, when compared to the requirements of Section 6.2.2:

i. Between 0° and 8°, maximum step size of 2°;

ii. Between 8° and 40°, maximum step size of 4°;

iii. Between 40° and 45°, maximum step size of 1°;

iv. Between 45° and 90°, maximum step size of 5°.

Once the mask reaches 90°, the mask will be inverted and the step size will follow in the same manner as above.

For the purpose of this procedure, the main beam of the antenna is defined as the 3 dB beamwidth.

(11) Convert the measured field strength values in terms of e.i.r.p. density (dBW/1 MHz) using the following equation:

$$\text{e.i.r.p. density (dBW/MHz)} = 10 \log((E \cdot r)^2 / 30)$$

E = field strength in V/m

r = measurement distance in metres

(12) Plot the results against the emission mask with reference to the horizontal plane.


(13) Using the plot, the 0° can be rotated to determine the worst-case installation tilt angle.

(14) Testing shall be performed using the highest gain antenna for every antenna type, if applicable.


(15) Antenna type(s), antenna model number(s), and worst-case tilt angle(s) necessary to remain compliant with the elevation mask requirement set forth in Section 6.2.2(3) of RSS-247 shall be clearly indicated in the user manual.

The following figure is an example of a polar elevation mask measured using the Method 1 reference to dBμV/m at 3 m.


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

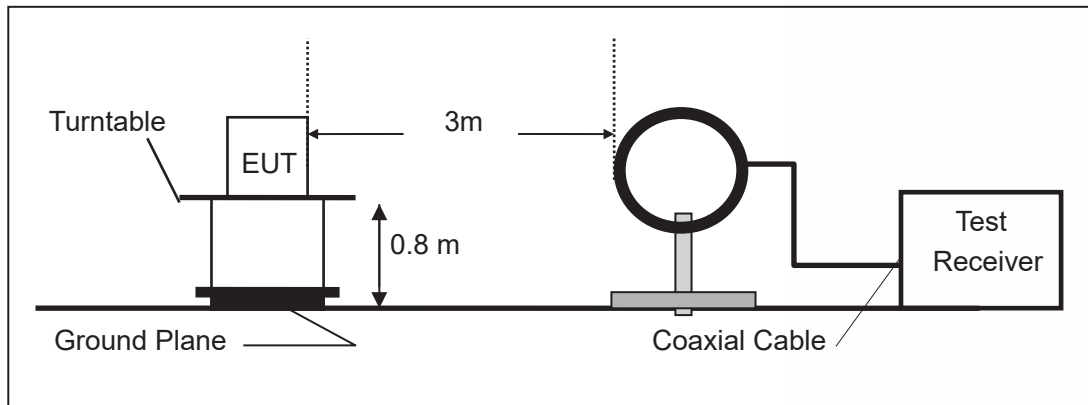

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

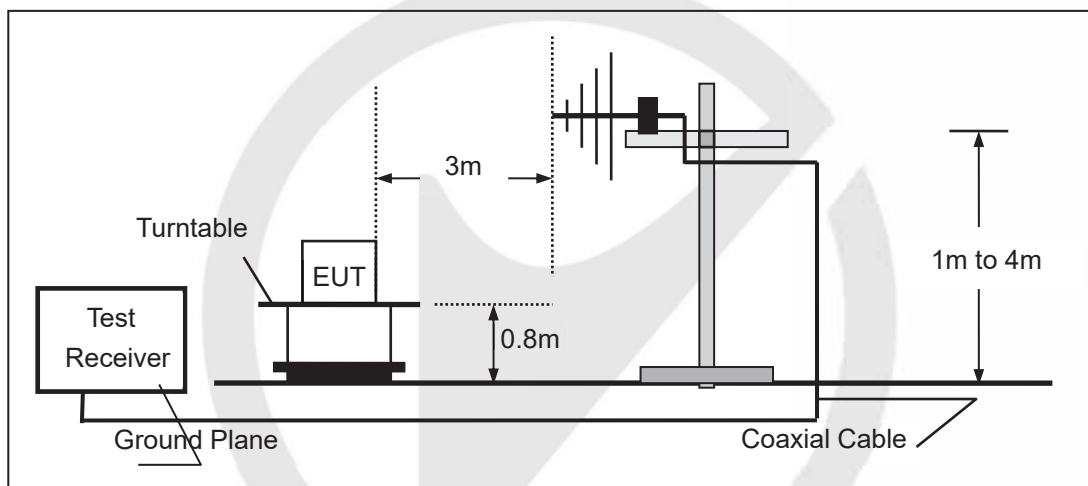

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

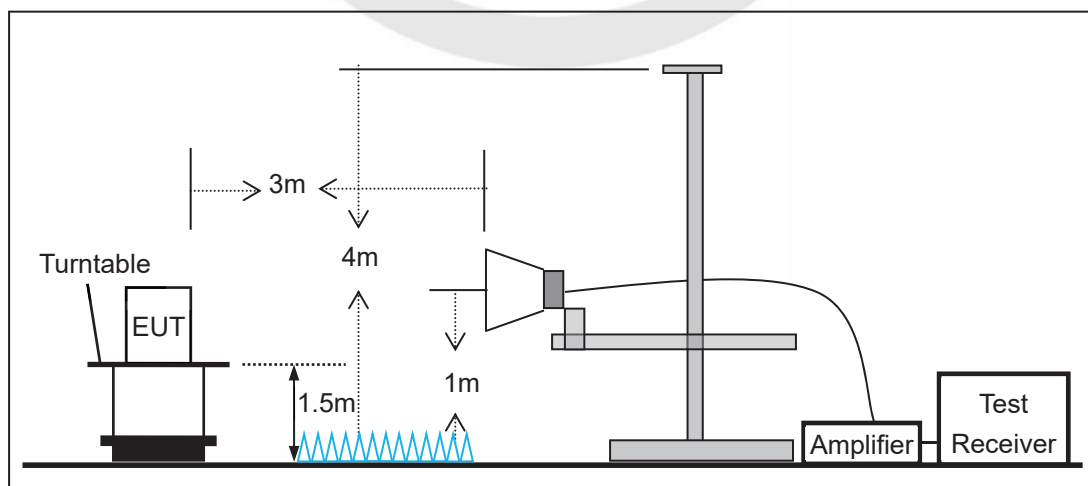


### 7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

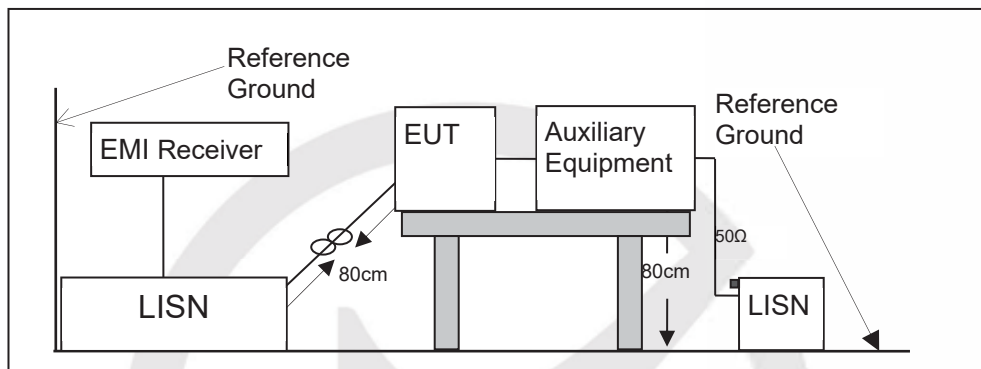

#### 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

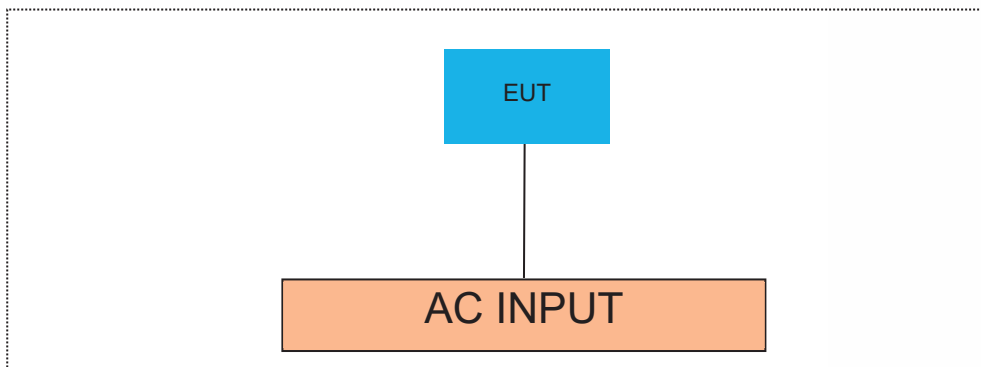

#### 7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 8 TEST REQUIREMENTS

### 8.1 DTS 6DB BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02  
According to RSS-247 5.2(a)

#### 8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

#### 8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

#### 8.1.4 Test Procedure

The EUT was operating in WIFI mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

#### 8.1.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

# BL-M7621AX7

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.680	2407.960	2415.640	0.5	PASS
	Ant2	2412	8.520	2408.000	2416.520	0.5	PASS
	Ant1	2437	7.520	2433.480	2441.000	0.5	PASS
	Ant2	2437	8.080	2432.960	2441.040	0.5	PASS
	Ant1	2462	7.040	2458.480	2465.520	0.5	PASS
	Ant2	2462	7.800	2458.000	2465.800	0.5	PASS
11G	Ant1	2412	13.440	2404.880	2418.320	0.5	PASS
	Ant2	2412	15.080	2404.480	2419.560	0.5	PASS
	Ant1	2437	15.080	2429.480	2444.560	0.5	PASS
	Ant2	2437	15.080	2429.440	2444.520	0.5	PASS
	Ant1	2462	14.400	2454.760	2469.160	0.5	PASS
	Ant2	2462	14.400	2454.520	2468.920	0.5	PASS
11N20MIMO	Ant1	2412	16.240	2404.240	2420.480	0.5	PASS
	Ant2	2412	15.120	2404.440	2419.560	0.5	PASS
	Ant1	2437	15.320	2429.480	2444.800	0.5	PASS
	Ant2	2437	15.400	2429.120	2444.520	0.5	PASS
	Ant1	2462	16.280	2453.880	2470.160	0.5	PASS
	Ant2	2462	16.960	2453.240	2470.200	0.5	PASS
11N40MIMO	Ant1	2422	35.040	2404.480	2439.520	0.5	PASS
	Ant2	2422	31.280	2405.760	2437.040	0.5	PASS
	Ant1	2437	33.920	2420.680	2454.600	0.5	PASS
	Ant2	2437	32.560	2420.760	2453.320	0.5	PASS
	Ant1	2452	33.760	2435.760	2469.520	0.5	PASS
	Ant2	2452	33.840	2434.480	2468.320	0.5	PASS

11B\_Ant1\_2412




11B\_Ant2\_2412



11B\_Ant1\_2437



11B\_Ant2\_2437





11G\_Ant1\_2412



11G\_Ant2\_2412



11G\_Ant1\_2437



11G\_Ant2\_2437



11G\_Ant1\_2462



11G\_Ant2\_2462



11N20MIMO\_Ant1\_2412



11N20MIMO\_Ant2\_2412



11N20MIMO\_Ant1\_2437





11N20MIMO\_Ant2\_2437



11N20MIMO\_Ant1\_2462



11N20MIMO\_Ant2\_2462



11N40MIMO\_Ant1\_2422




11N40MIMO\_Ant2\_2422



11N40MIMO\_Ant1\_2437



11N40MIMO\_Ant2\_2437

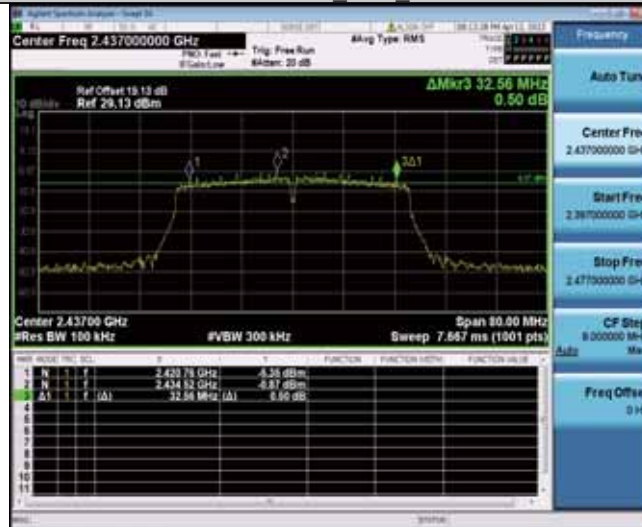

11N40MIMO\_Ant1\_2452



11N40MIMO\_Ant2\_2452



# BL-M8832AU1

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.120	2406.960	2417.080	0.5	PASS
	Ant2	2412	10.080	2406.960	2417.040	0.5	PASS
	Ant1	2437	10.120	2431.920	2442.040	0.5	PASS
	Ant2	2437	10.160	2431.920	2442.080	0.5	PASS
	Ant1	2462	10.160	2456.920	2467.080	0.5	PASS
	Ant2	2462	11.040	2456.000	2467.040	0.5	PASS
11G	Ant1	2412	16.160	2403.840	2420.000	0.5	PASS
	Ant2	2412	16.320	2403.840	2420.160	0.5	PASS
	Ant1	2437	16.320	2428.840	2445.160	0.5	PASS
	Ant2	2437	16.320	2428.840	2445.160	0.5	PASS
	Ant1	2462	16.320	2453.840	2470.160	0.5	PASS
	Ant2	2462	16.320	2453.840	2470.160	0.5	PASS
11N20MIMO	Ant1	2412	17.120	2403.400	2420.520	0.5	PASS
	Ant2	2412	17.040	2403.480	2420.520	0.5	PASS
	Ant1	2437	17.160	2428.480	2445.640	0.5	PASS
	Ant2	2437	17.400	2428.360	2445.760	0.5	PASS
	Ant1	2462	17.280	2453.360	2470.640	0.5	PASS
	Ant2	2462	17.240	2453.400	2470.640	0.5	PASS
11N40MIMO	Ant1	2422	35.680	2403.920	2439.600	0.5	PASS
	Ant2	2422	35.920	2404.080	2440.000	0.5	PASS
	Ant1	2437	35.840	2419.080	2454.920	0.5	PASS
	Ant2	2437	35.920	2419.000	2454.920	0.5	PASS
	Ant1	2452	35.760	2434.160	2469.920	0.5	PASS
	Ant2	2452	35.840	2434.080	2469.920	0.5	PASS



11B\_Ant1\_2412



11B\_Ant2\_2412



11B\_Ant1\_2437



11B\_Ant2\_2437




11B\_Ant1\_2462



11B\_Ant2\_2462



11G\_Ant1\_2412

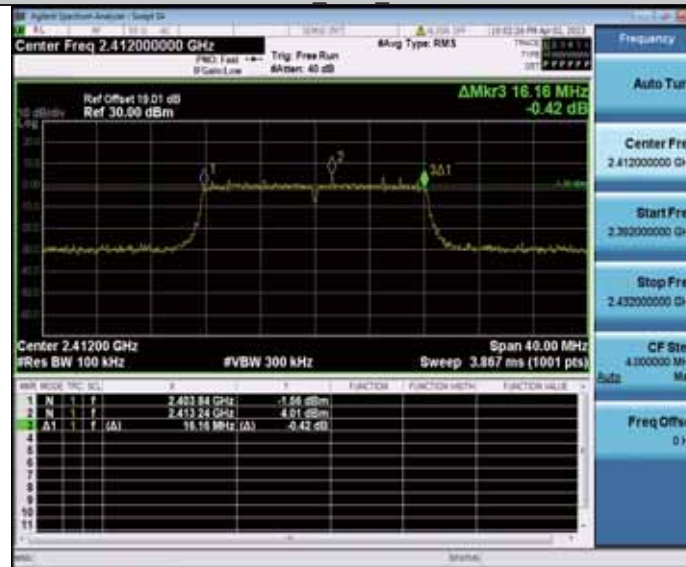

11G\_Ant2\_2412




11G\_Ant1\_2437





11G\_Ant2\_2437

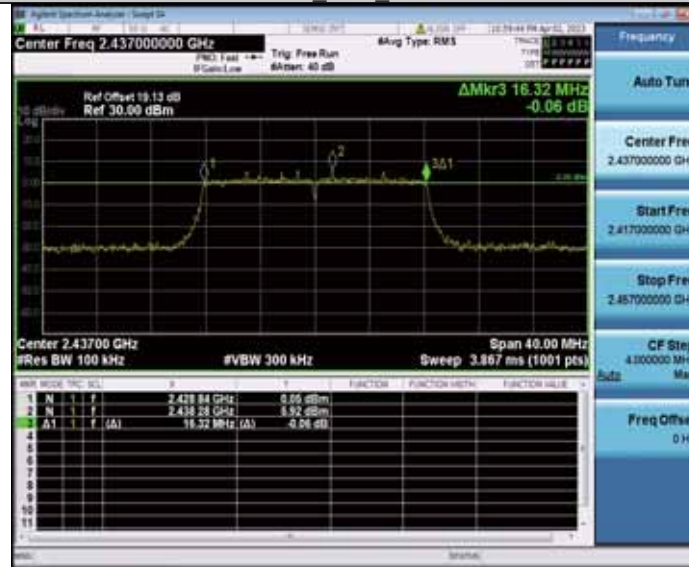

11G\_Ant1\_2462



11G\_Ant2\_2462



11N20MIMO\_Ant1\_2412



11N20MIMO\_Ant2\_2412



11N20MIMO\_Ant1\_2437



11N20MIMO\_Ant2\_2437



11N20MIMO\_Ant1\_2462



11N20MIMO\_Ant2\_2462





11N40MIMO\_Ant1\_2422



11N40MIMO\_Ant2\_2422



11N40MIMO\_Ant1\_2437




11N40MIMO\_Ant2\_2437



11N40MIMO\_Ant1\_2452



11N40MIMO\_Ant2\_2452

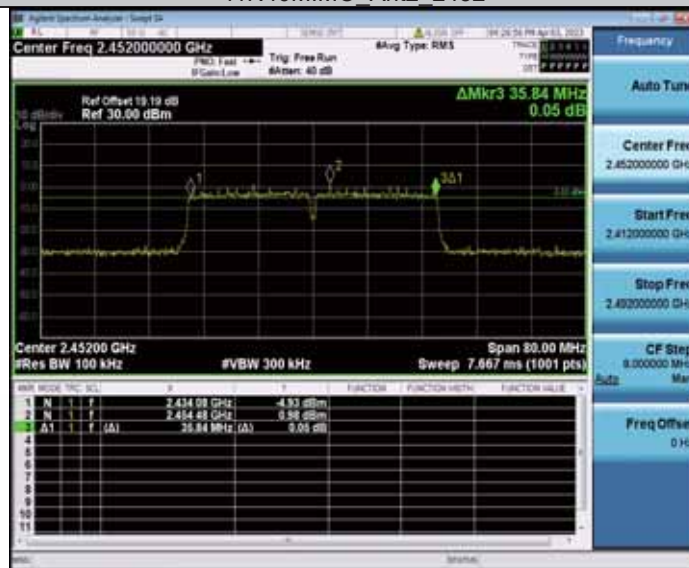

## 8.2 DTS 99% BANDWIDTH

### 8.2.1 Applicable Standard

According to RSS-Gen 6.7 and KDB 558074 D01 DTS Meas Guidance v05r02

### 8.2.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.2.3 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1%-5% OBW.

Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .

Set Span=approximately 2 to 3 times the 20 dB bandwidth.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Use the 99 % power bandwidth function of the instrument

Measure the maximum width of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

### 8.2.4 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

# BL-M7621AX7

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.671	2405.1883	2418.8593	---	---
	Ant2	2412	13.904	2405.0688	2418.9728	---	---
	Ant1	2437	13.699	2430.1938	2443.8928	---	---
	Ant2	2437	14.019	2430.0154	2444.0344	---	---
	Ant1	2462	13.617	2455.2360	2468.8530	---	---
	Ant2	2462	13.968	2455.0362	2469.0042	---	---
11G	Ant1	2412	16.894	2403.5965	2420.4905	---	---
	Ant2	2412	17.005	2403.5223	2420.5273	---	---
	Ant1	2437	16.919	2428.5576	2445.4766	---	---
	Ant2	2437	16.994	2428.5287	2445.5227	---	---
	Ant1	2462	16.843	2453.6139	2470.4569	---	---
	Ant2	2462	17.007	2453.5425	2470.5495	---	---
11N20MIMO	Ant1	2412	17.999	2402.9939	2420.9929	---	---
	Ant2	2412	17.794	2403.1027	2420.8967	---	---
	Ant1	2437	18.076	2428.0165	2446.0925	---	---
	Ant2	2437	17.800	2428.1276	2445.9276	---	---
	Ant1	2462	18.020	2453.0568	2471.0768	---	---
	Ant2	2462	17.816	2453.1145	2470.9305	---	---
11N40MIMO	Ant1	2422	36.819	2403.6332	2440.4522	---	---
	Ant2	2422	36.457	2403.7889	2440.2459	---	---
	Ant1	2437	36.840	2418.5665	2455.4065	---	---
	Ant2	2437	36.480	2418.8622	2455.3422	---	---
	Ant1	2452	36.749	2433.6491	2470.3981	---	---
	Ant2	2452	36.505	2433.8484	2470.3534	---	---



11B\_Ant1\_2412



11B\_Ant2\_2412



11B\_Ant1\_2437



11B\_Ant2\_2437



11B\_Ant1\_2462



11B\_Ant2\_2462




11G\_Ant1\_2412



11G\_Ant2\_2412




11G\_Ant1\_2437

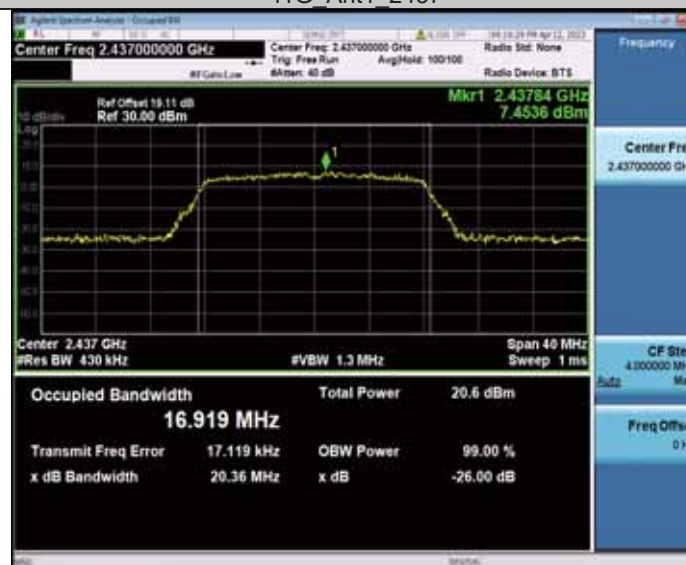

11G\_Ant2\_2437



11G\_Ant1\_2462

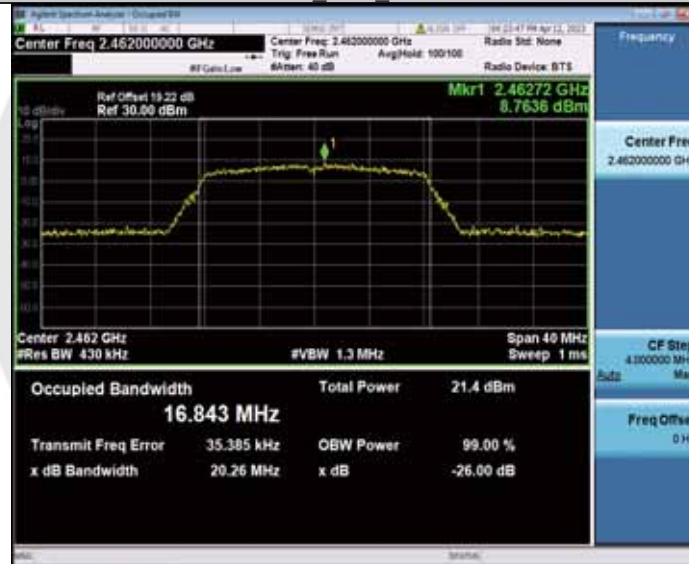

11G\_Ant2\_2462






11N20MIMO\_Ant1\_2412



11N20MIMO\_Ant2\_2412

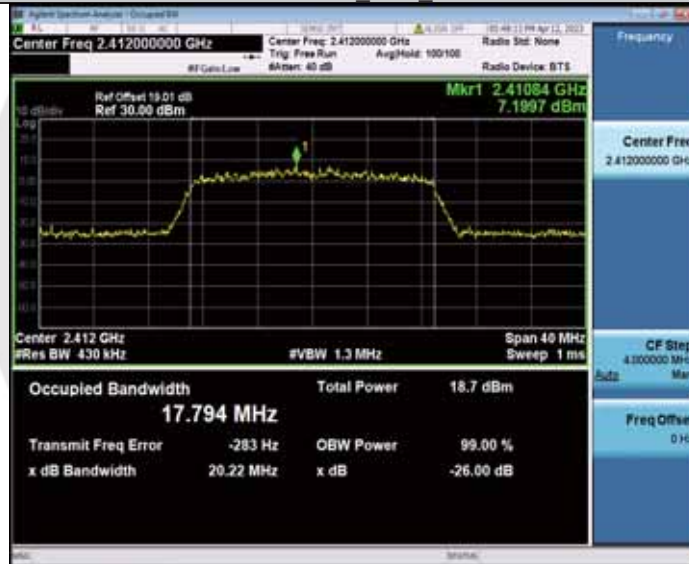


11N20MIMO\_Ant1\_2437






11N20MIMO\_Ant2\_2437

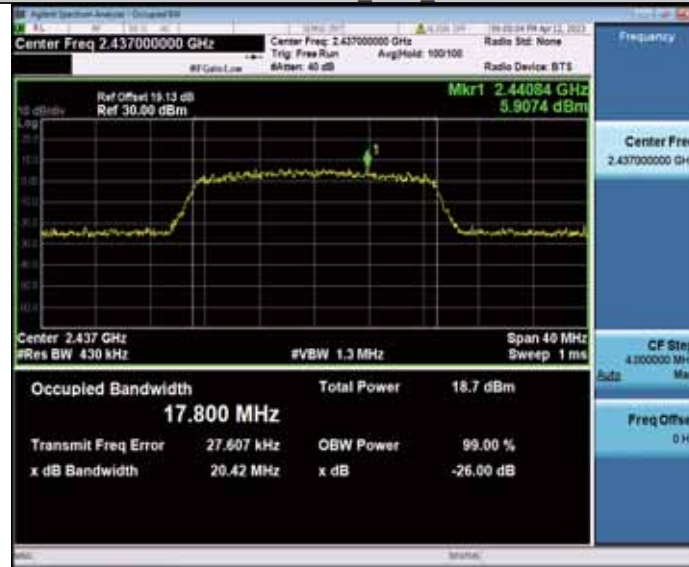

11N20MIMO\_Ant1\_2462

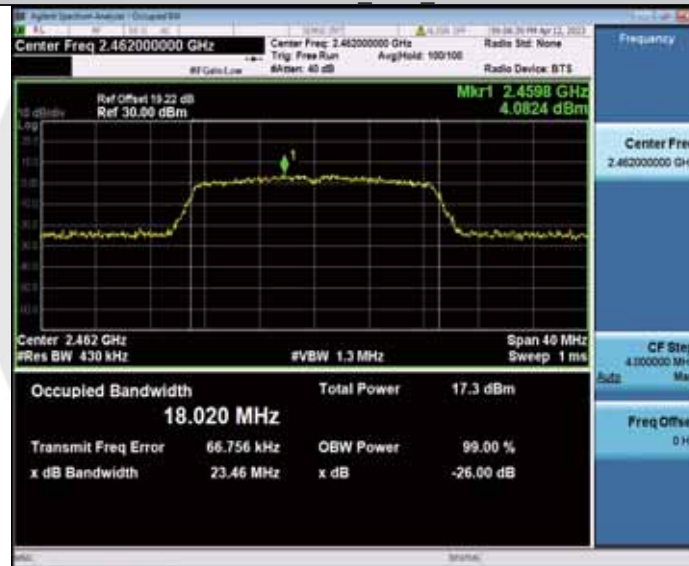


11N20MIMO\_Ant2\_2462



11N40MIMO\_Ant1\_2422




11N40MIMO\_Ant2\_2422

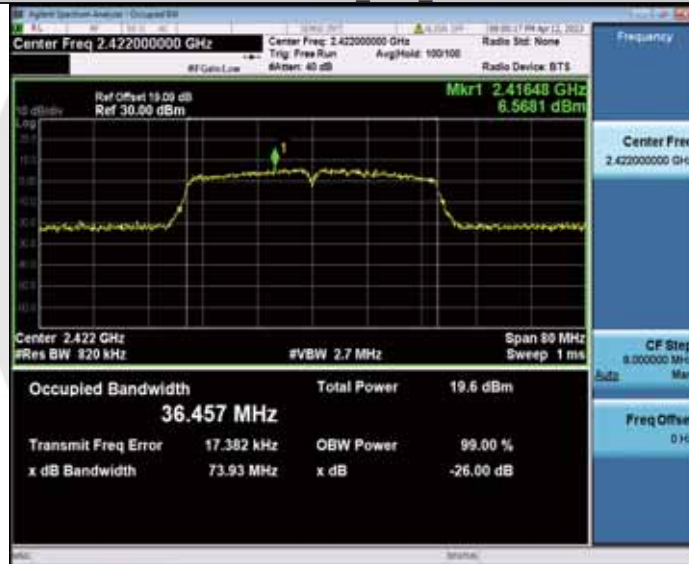


11N40MIMO\_Ant1\_2437




11N40MIMO\_Ant2\_2437

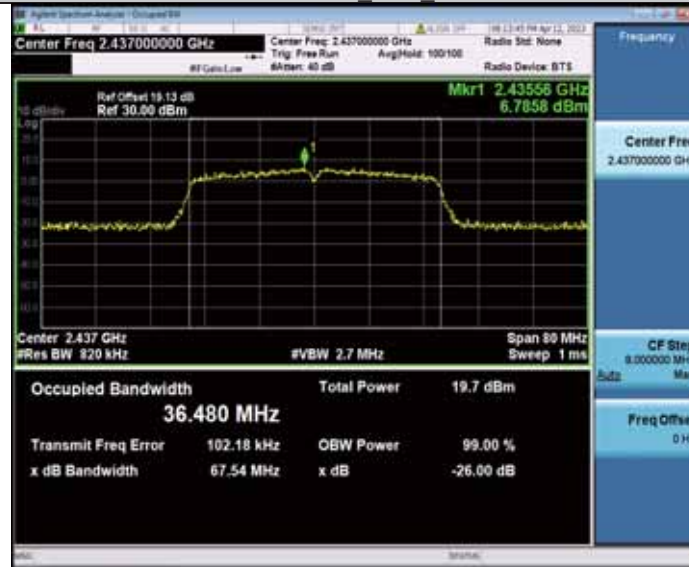

11N40MIMO\_Ant1\_2452

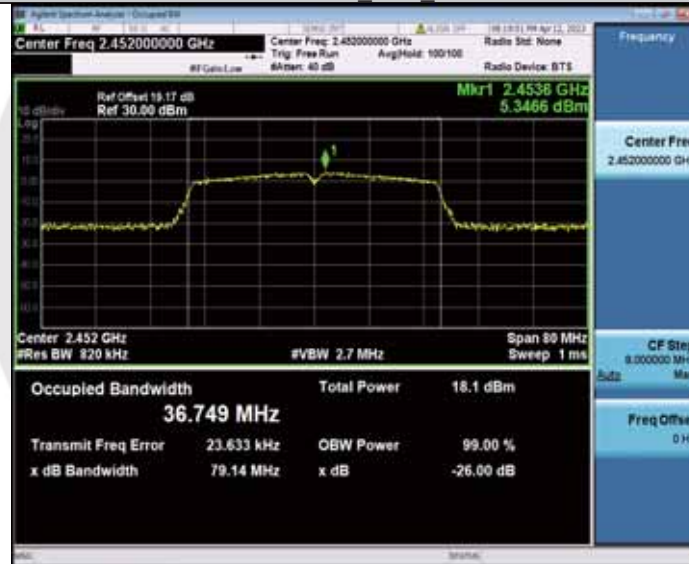

11N40MIMO\_Ant2\_2452

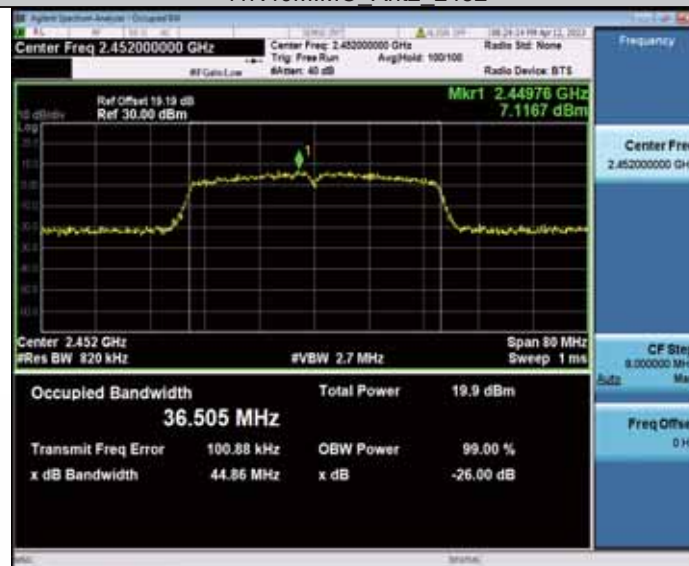

# BL-M8832AU1


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	15.740	2404.1152	2419.8552	---	---
	Ant2	2412	15.365	2404.3080	2419.6730	---	---
	Ant1	2437	15.546	2429.2152	2444.7612	---	---
	Ant2	2437	15.267	2429.3638	2444.6308	---	---
	Ant1	2462	15.649	2454.1363	2469.7853	---	---
	Ant2	2462	15.329	2454.3161	2469.6451	---	---
11G	Ant1	2412	16.590	2403.7070	2420.2970	---	---
	Ant2	2412	16.571	2403.7480	2420.3190	---	---
	Ant1	2437	16.580	2428.7257	2445.3057	---	---
	Ant2	2437	16.546	2428.7414	2445.2874	---	---
	Ant1	2462	16.565	2453.7310	2470.2960	---	---
	Ant2	2462	16.554	2453.7396	2470.2936	---	---
11N20MIMO	Ant1	2412	17.697	2403.1354	2420.8324	---	---
	Ant2	2412	17.644	2403.1731	2420.8171	---	---
	Ant1	2437	17.665	2428.1615	2445.8265	---	---
	Ant2	2437	17.667	2428.1607	2445.8277	---	---
	Ant1	2462	17.706	2453.1413	2470.8473	---	---
	Ant2	2462	17.636	2453.1728	2470.8088	---	---
11N40MIMO	Ant1	2422	36.497	2403.7718	2440.2688	---	---
	Ant2	2422	36.355	2403.8379	2440.1929	---	---
	Ant1	2437	36.536	2418.7151	2455.2511	---	---
	Ant2	2437	36.390	2418.7885	2455.1785	---	---
	Ant1	2452	36.437	2433.7623	2470.1993	---	---
	Ant2	2452	36.290	2433.8572	2470.1472	---	---



11B\_Ant1\_2412



11B\_Ant2\_2412

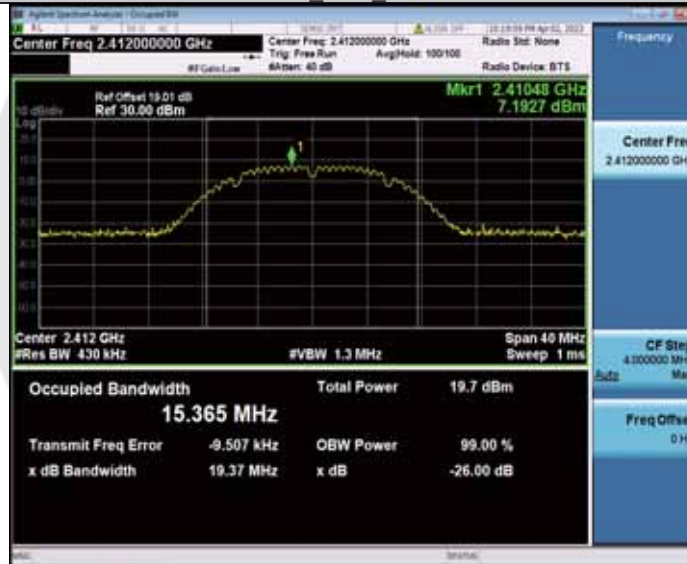

11B\_Ant1\_2437






11B\_Ant2\_2437




11B\_Ant1\_2462

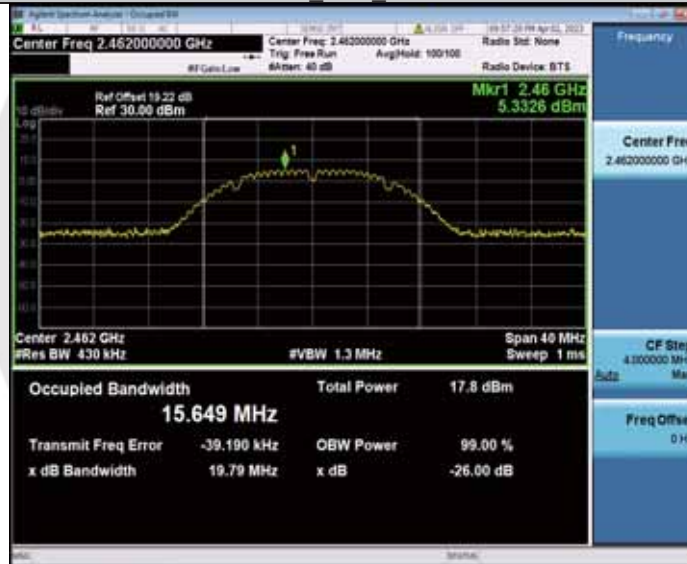


11B\_Ant2\_2462




11G\_Ant1\_2412

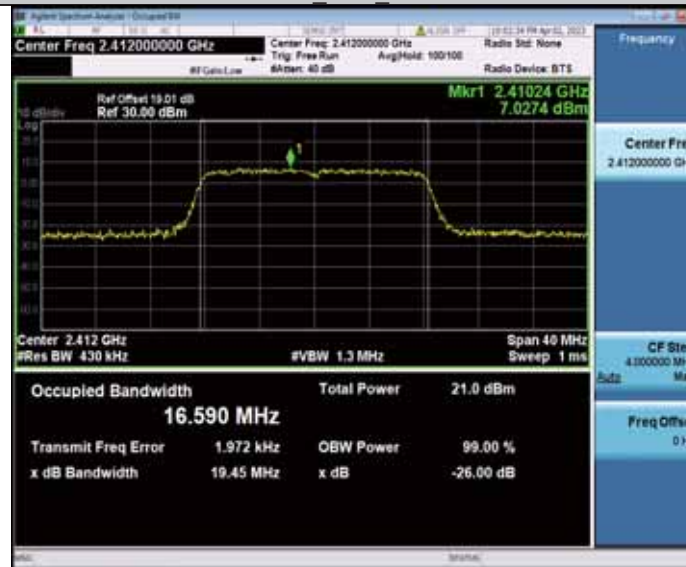

11G\_Ant2\_2412

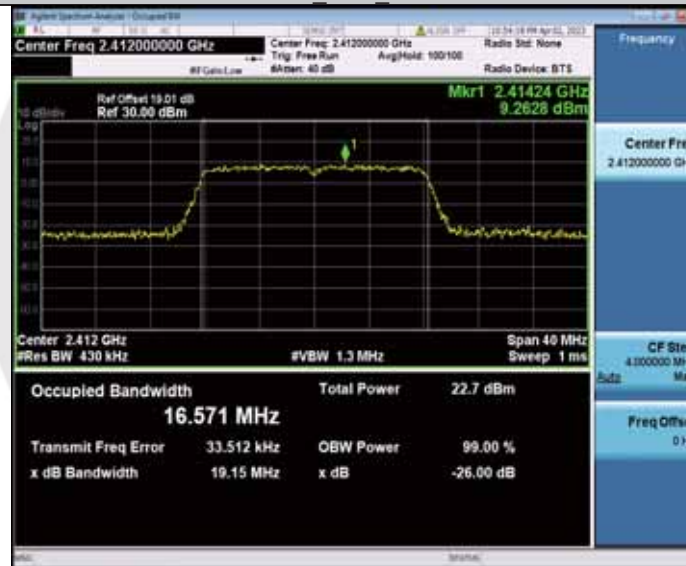

11G\_Ant1\_2437

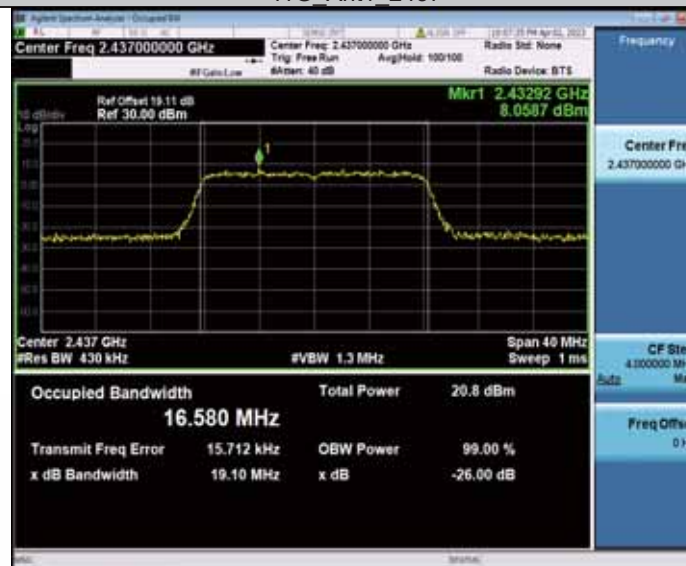


11G\_Ant2\_2437




11G\_Ant1\_2462




11G\_Ant2\_2462

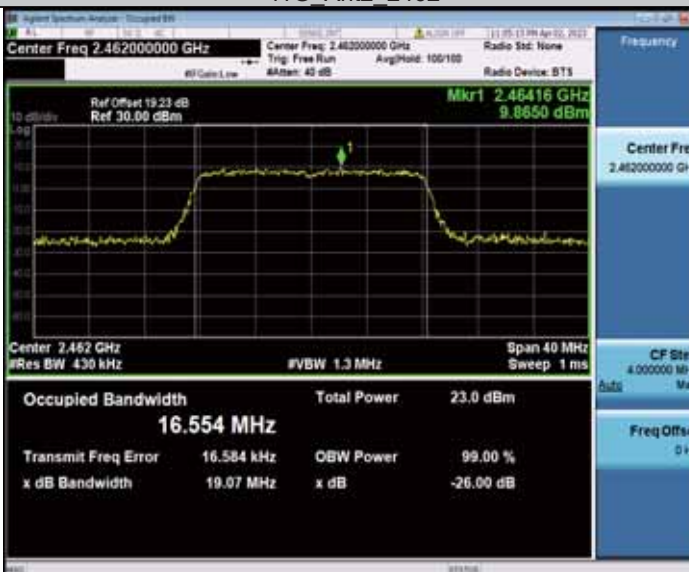

11N20MIMO\_Ant1\_2412

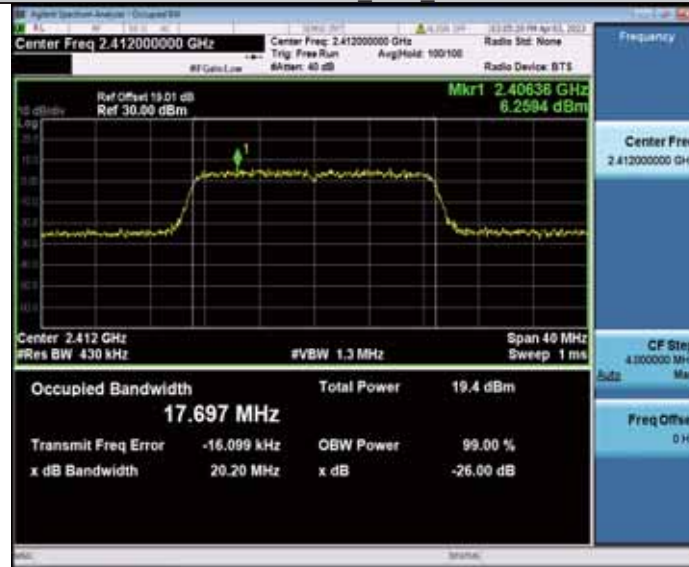

11N20MIMO\_Ant2\_2412

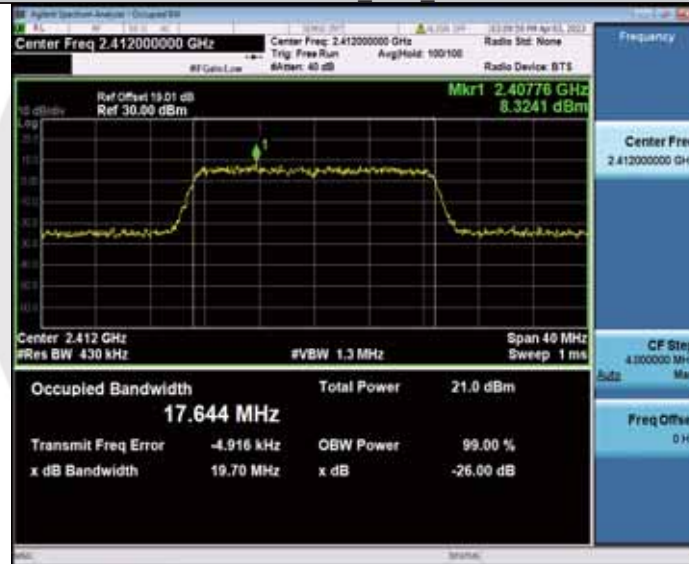

11N20MIMO\_Ant1\_2437






11N20MIMO\_Ant2\_2437



11N20MIMO\_Ant1\_2462



11N20MIMO\_Ant2\_2462

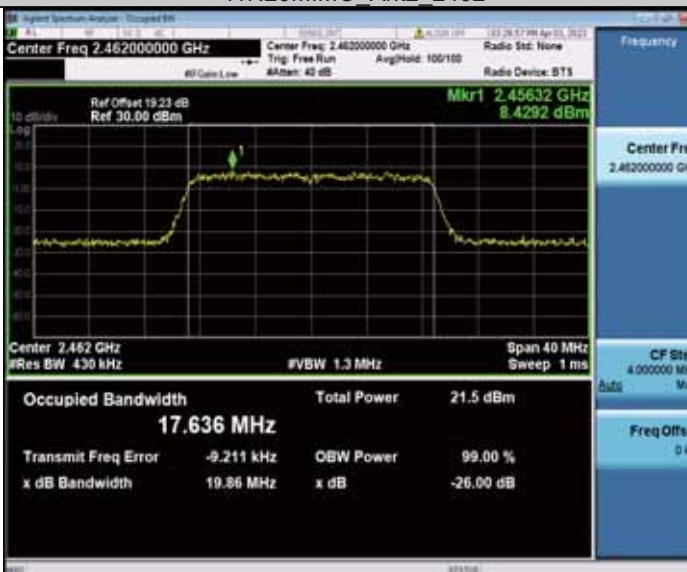





11N40MIMO\_Ant1\_2422




11N40MIMO\_Ant2\_2422

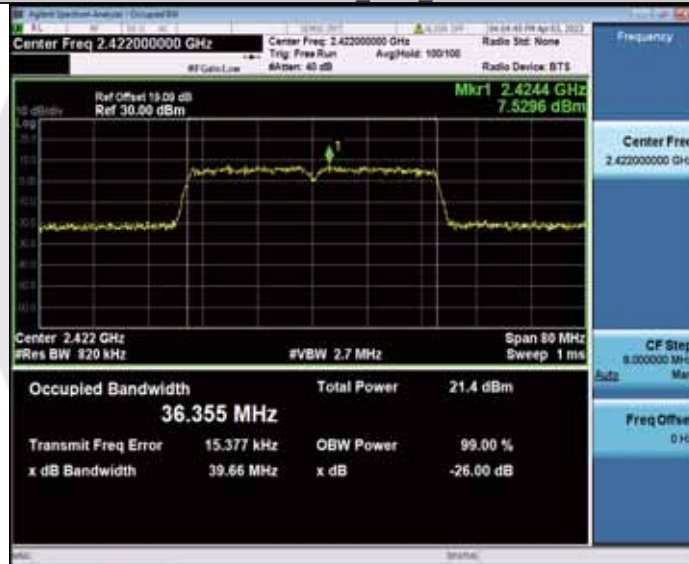


11N40MIMO\_Ant1\_2437

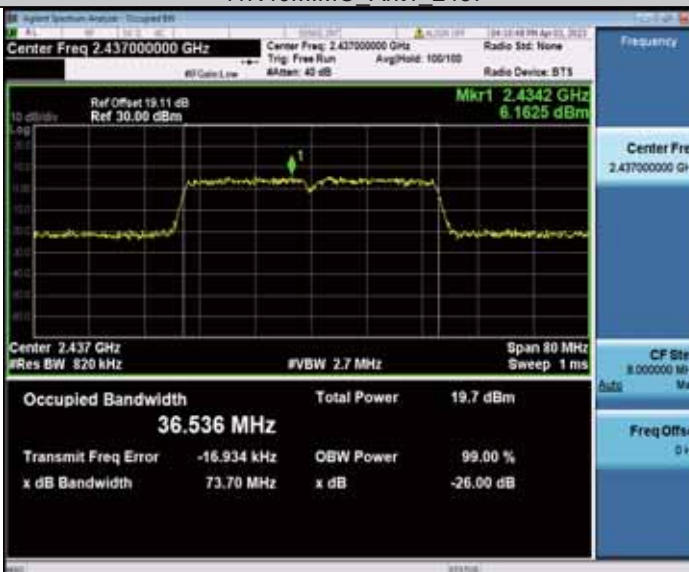


11N40MIMO\_Ant2\_2437

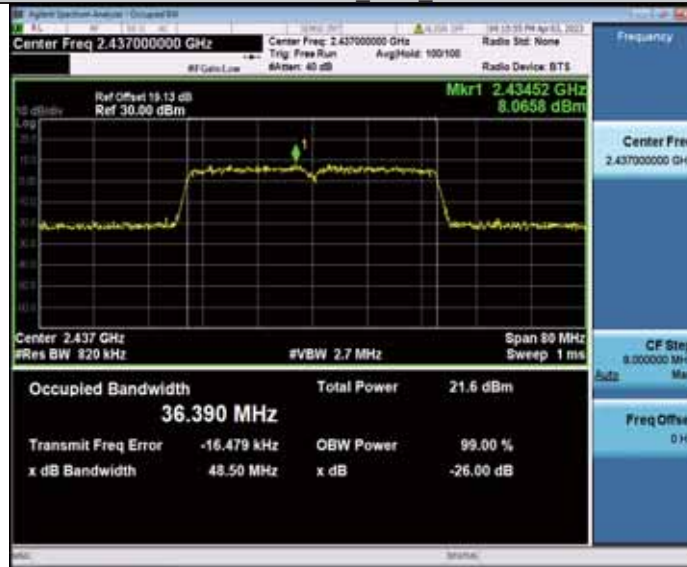

11N40MIMO\_Ant1\_2452

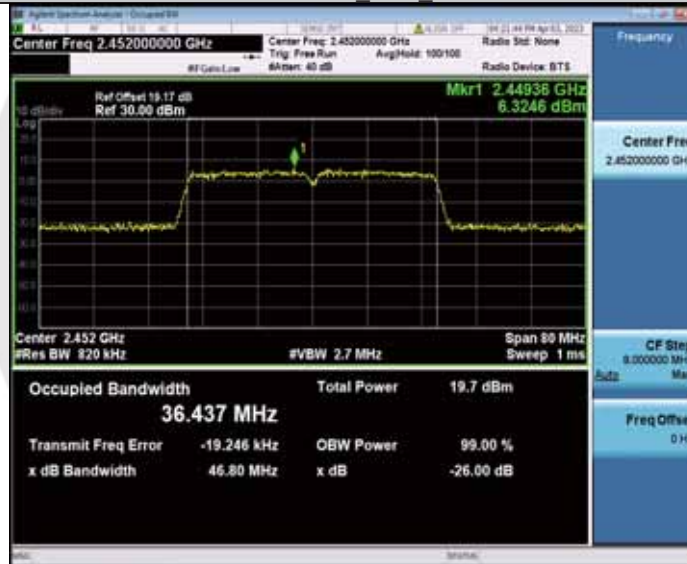

11N40MIMO\_Ant2\_2452

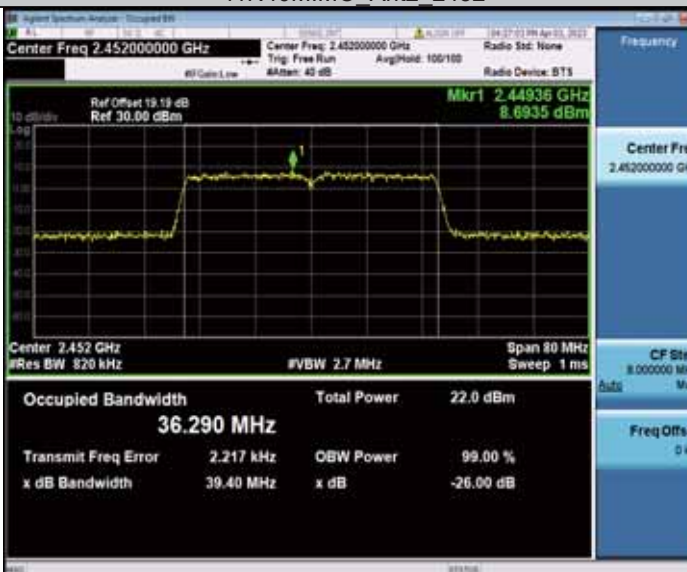

### 8.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER

#### 8.3.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02  
According to RSS-247 5.4(d) and RSS-Gen 6.12

#### 8.3.2 Conformance Limit

The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

#### 8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

#### 8.3.4 Test Procedure

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- Set VBW  $\geq 3 \times$  RBW.
- Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

#### ■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)

#### 8.3.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

# BL-M7621AX7

TestMode	Antenna	Frequen cy[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	14.31	≤30.00	17.81	≤36.00	PASS
	Ant2	2412	13.41	≤30.00	16.91	≤36.00	PASS
	Ant1	2437	14.39	≤30.00	17.89	≤36.00	PASS
	Ant2	2437	13.33	≤30.00	16.83	≤36.00	PASS
	Ant1	2462	14.91	≤30.00	18.41	≤36.00	PASS
	Ant2	2462	13.36	≤30.00	16.86	≤36.00	PASS
11G	Ant1	2412	14.41	≤30.00	17.91	≤36.00	PASS
	Ant2	2412	13.32	≤30.00	16.82	≤36.00	PASS
	Ant1	2437	14.19	≤30.00	17.69	≤36.00	PASS
	Ant2	2437	13.11	≤30.00	16.61	≤36.00	PASS
	Ant1	2462	15.04	≤30.00	18.54	≤36.00	PASS
	Ant2	2462	13.23	≤30.00	16.73	≤36.00	PASS
11N20MI MO	Ant1	2412	10.57	≤30.00	14.07	≤36.00	PASS
	Ant2	2412	11.79	≤30.00	15.29	≤36.00	PASS
	total	2412	14.23	≤30.00	17.73	≤36.00	PASS
	Ant1	2437	10.67	≤30.00	14.17	≤36.00	PASS
	Ant2	2437	11.91	≤30.00	15.41	≤36.00	PASS
	total	2437	14.34	≤30.00	17.84	≤36.00	PASS
	Ant1	2462	10.95	≤30.00	14.45	≤36.00	PASS
	Ant2	2462	11.98	≤30.00	15.48	≤36.00	PASS
	total	2462	14.51	≤30.00	18.01	≤36.00	PASS
11N40MI MO	Ant1	2422	11.03	≤30.00	14.53	≤36.00	PASS
	Ant2	2422	12.32	≤30.00	15.82	≤36.00	PASS
	total	2422	14.73	≤30.00	18.23	≤36.00	PASS
	Ant1	2437	11.03	≤30.00	14.53	≤36.00	PASS
	Ant2	2437	12.29	≤30.00	15.79	≤36.00	PASS
	total	2437	14.72	≤30.00	18.22	≤36.00	PASS
	Ant1	2452	11.00	≤30.00	14.50	≤36.00	PASS
	Ant2	2452	12.38	≤30.00	15.88	≤36.00	PASS
	total	2452	14.75	≤30.00	18.25	≤36.00	PASS



11B\_Ant1\_2412



11B\_Ant2\_2412



11B\_Ant1\_2437





11B\_Ant2\_2437




11B\_Ant1\_2462




11B\_Ant2\_2462



11G\_Ant1\_2412

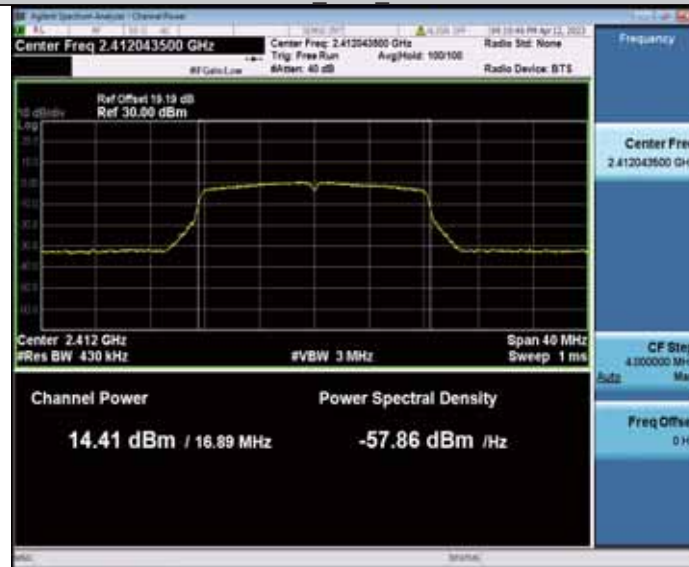


11G\_Ant2\_2412

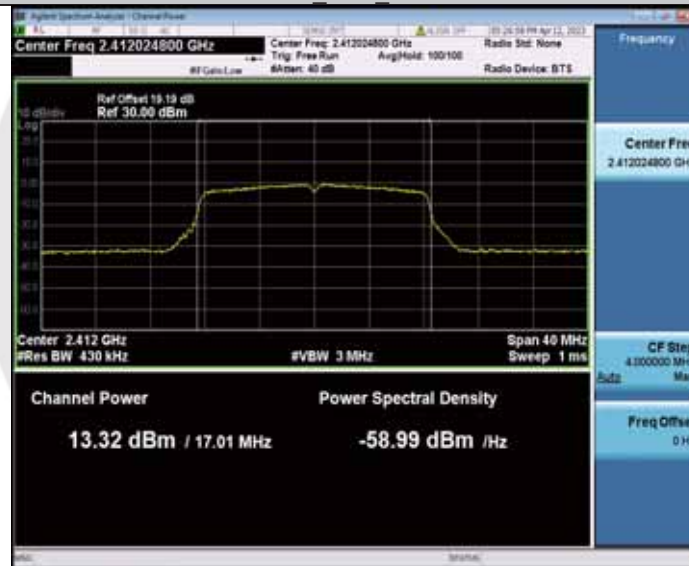

11G\_Ant1\_2437




11G\_Ant2\_2437

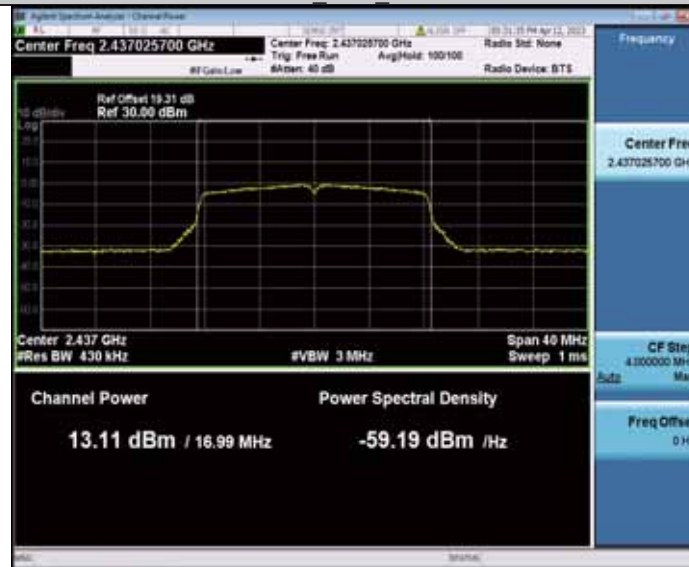

11G\_Ant1\_2462



11G\_Ant2\_2462

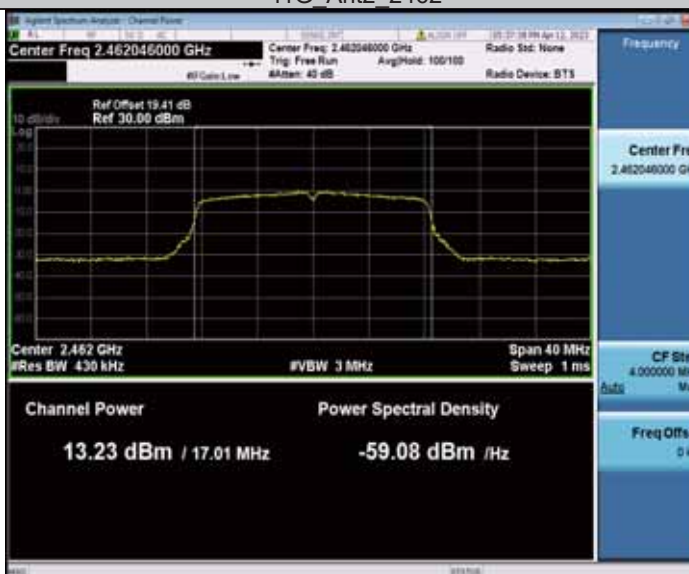

11N20MIMO\_Ant1\_2412



11N20MIMO\_Ant2\_2412



11N20MIMO\_Ant1\_2437





11N20MIMO\_Ant2\_2437



11N20MIMO\_Ant1\_2462



11N20MIMO\_Ant2\_2462







11N40MIMO\_Ant1\_2422



11N40MIMO\_Ant2\_2422

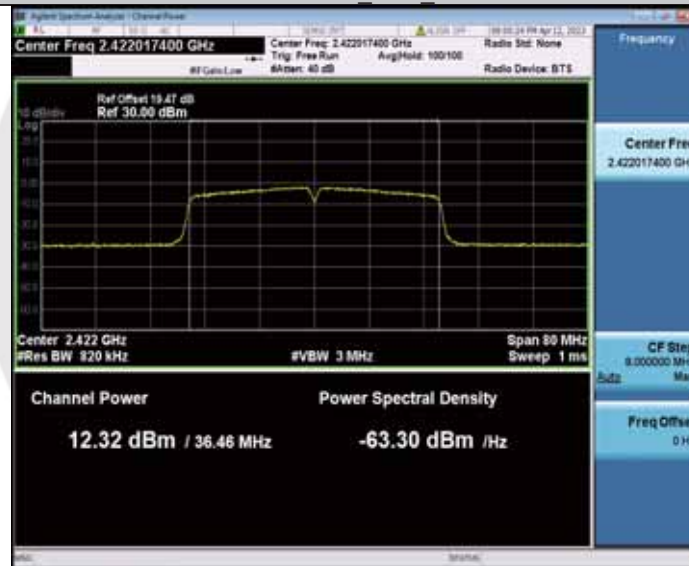


11N40MIMO\_Ant1\_2437

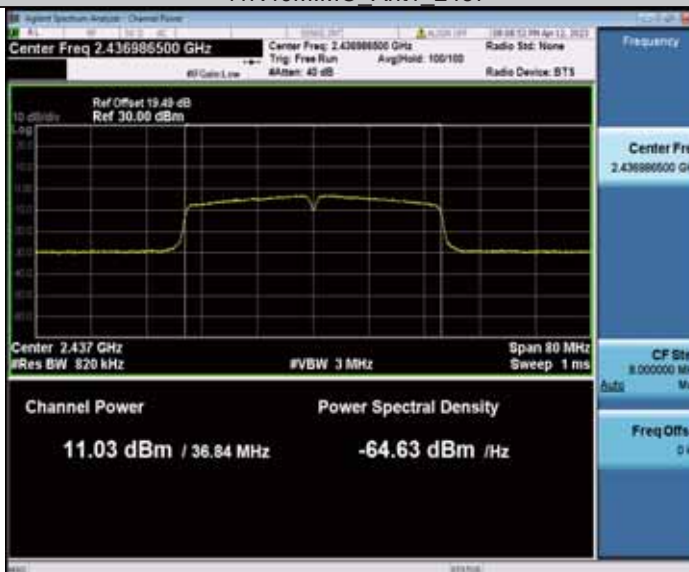

11N40MIMO\_Ant2\_2437



11N40MIMO\_Ant1\_2452

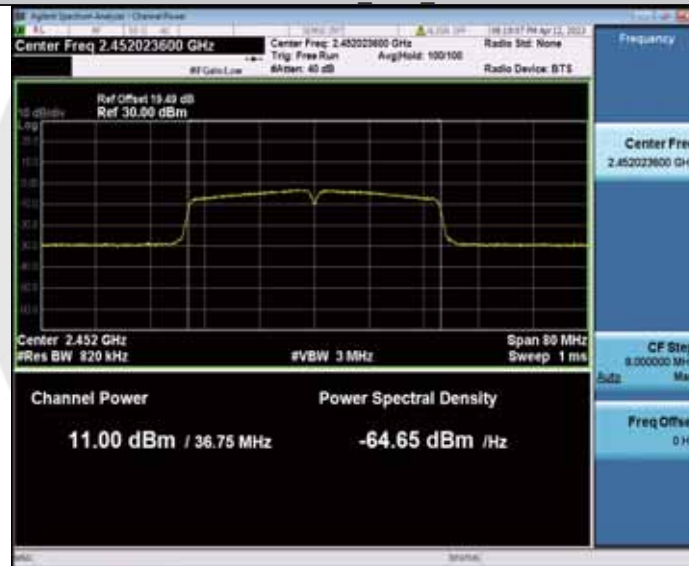

11N40MIMO\_Ant2\_2452




# BL-M8832AU1

TestMode	Antenna	Frequen cy[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	14.87	≤30.00	18.37	≤36.00	PASS
	Ant2	2412	16.63	≤30.00	20.13	≤36.00	PASS
	Ant1	2437	15.35	≤30.00	18.85	≤36.00	PASS
	Ant2	2437	16.92	≤30.00	20.42	≤36.00	PASS
	Ant1	2462	14.98	≤30.00	18.48	≤36.00	PASS
	Ant2	2462	16.88	≤30.00	20.38	≤36.00	PASS
11G	Ant1	2412	15.19	≤30.00	18.69	≤36.00	PASS
	Ant2	2412	16.85	≤30.00	20.35	≤36.00	PASS
	Ant1	2437	14.96	≤30.00	18.46	≤36.00	PASS
	Ant2	2437	17.01	≤30.00	20.51	≤36.00	PASS
	Ant1	2462	15.16	≤30.00	18.66	≤36.00	PASS
	Ant2	2462	17.16	≤30.00	20.66	≤36.00	PASS
11N20MI MO	Ant1	2412	12.99	≤30.00	16.49	≤36.00	PASS
	Ant2	2412	14.54	≤30.00	18.04	≤36.00	PASS
	total	2412	16.84	≤30.00	20.34	≤36.00	PASS
	Ant1	2437	12.78	≤30.00	16.28	≤36.00	PASS
	Ant2	2437	14.65	≤30.00	18.15	≤36.00	PASS
	total	2437	16.83	≤30.00	20.33	≤36.00	PASS
	Ant1	2462	12.93	≤30.00	16.43	≤36.00	PASS
	Ant2	2462	15.21	≤30.00	18.71	≤36.00	PASS
	total	2462	17.23	≤30.00	20.73	≤36.00	PASS
11N40MI MO	Ant1	2422	13.15	≤30.00	16.65	≤36.00	PASS
	Ant2	2422	14.83	≤30.00	18.33	≤36.00	PASS
	total	2422	17.08	≤30.00	20.58	≤36.00	PASS
	Ant1	2437	13.14	≤30.00	16.64	≤36.00	PASS
	Ant2	2437	14.77	≤30.00	18.27	≤36.00	PASS
	total	2437	17.04	≤30.00	20.54	≤36.00	PASS
	Ant1	2452	12.97	≤30.00	16.47	≤36.00	PASS
	Ant2	2452	15.27	≤30.00	18.77	≤36.00	PASS
	total	2452	17.28	≤30.00	20.78	≤36.00	PASS

11B\_Ant1\_2412



11B\_Ant2\_2412

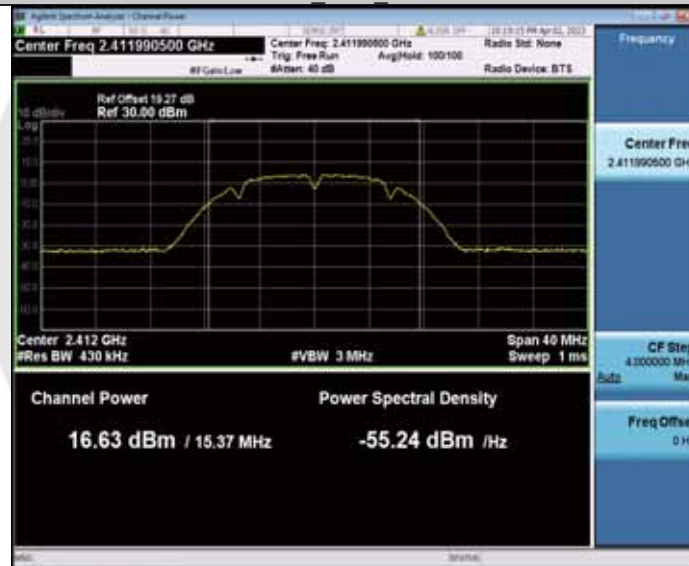

11B\_Ant1\_2437






11B\_Ant2\_2437



11B\_Ant1\_2462

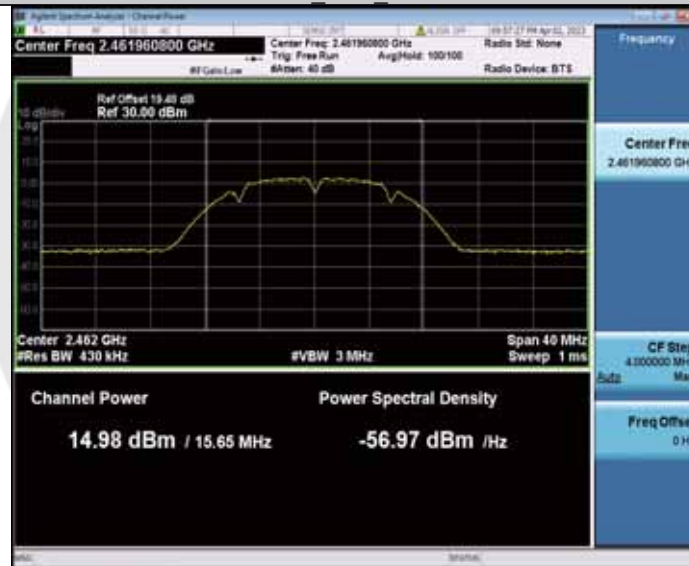


11B\_Ant2\_2462






11G\_Ant1\_2412

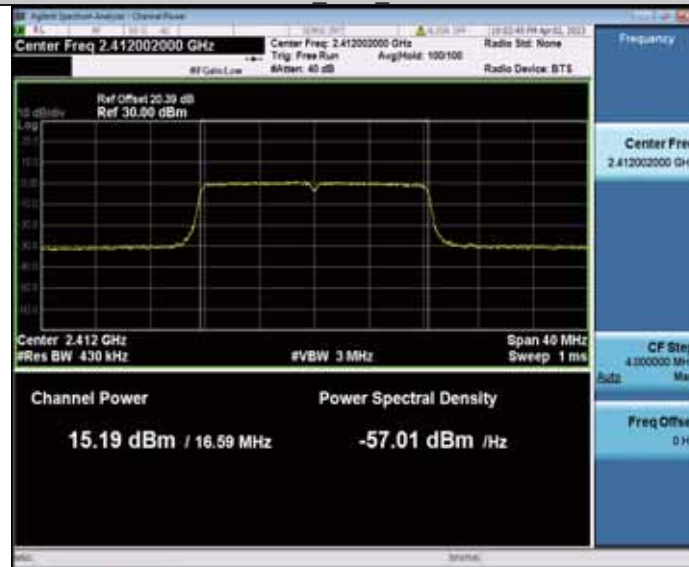

11G\_Ant2\_2412




11G\_Ant1\_2437

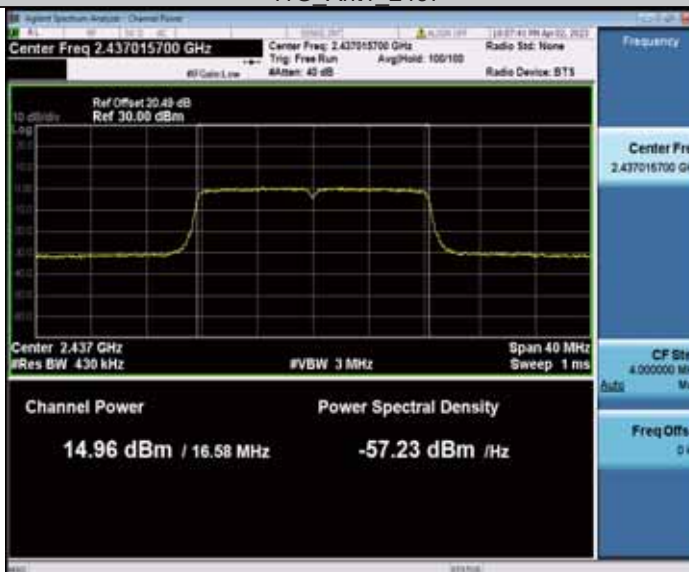


11G\_Ant2\_2437



11G\_Ant1\_2462

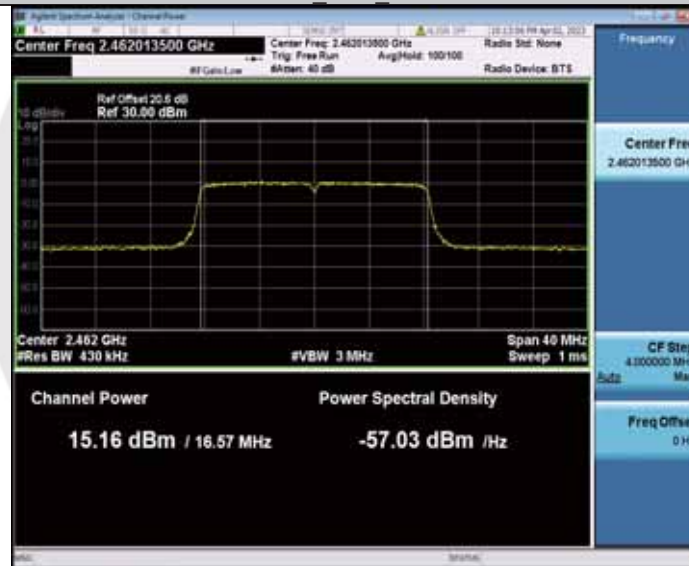

11G\_Ant2\_2462

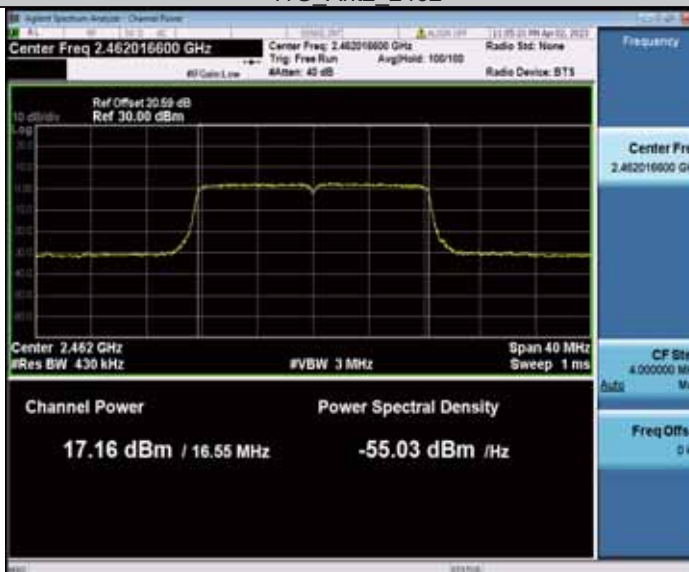

11N20MIMO\_Ant1\_2412




11N20MIMO\_Ant2\_2412



11N20MIMO\_Ant1\_2437




11N20MIMO\_Ant2\_2437

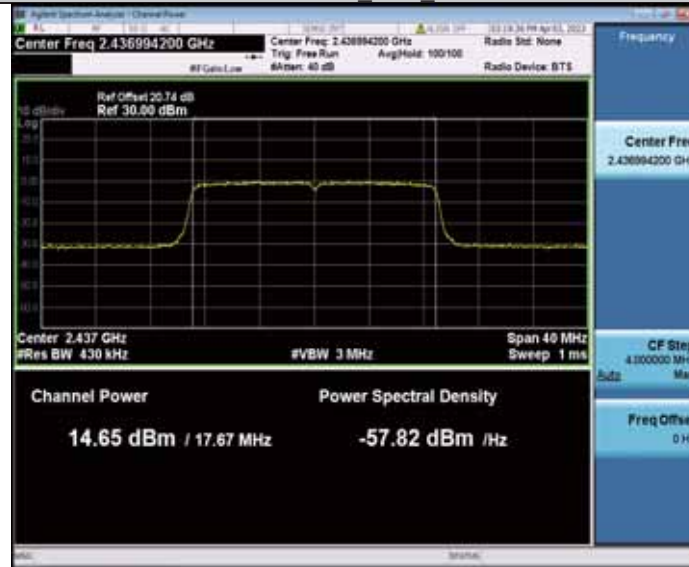

11N20MIMO\_Ant1\_2462



11N20MIMO\_Ant2\_2462

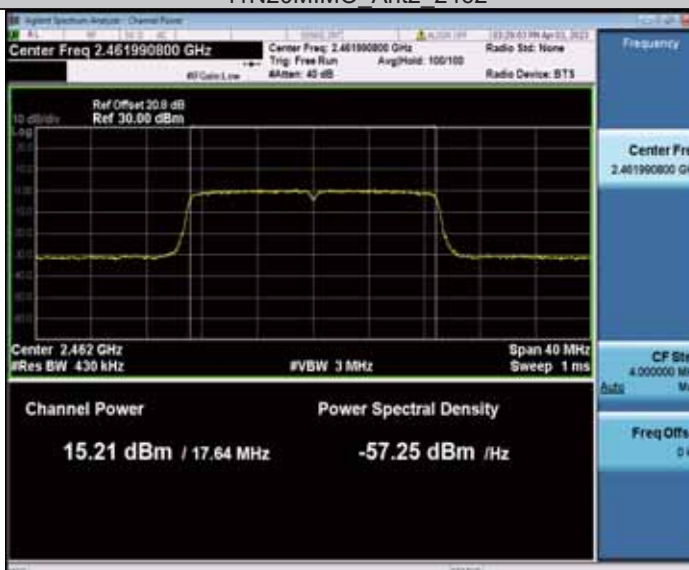





11N40MIMO\_Ant1\_2422



11N40MIMO\_Ant2\_2422

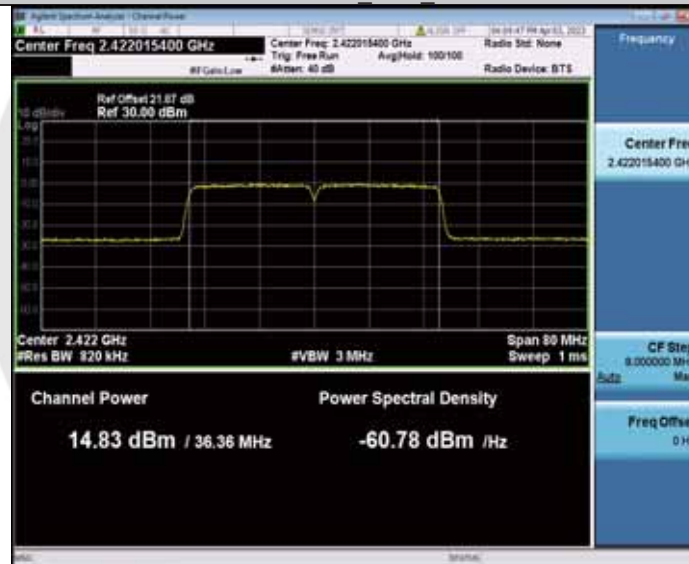

11N40MIMO\_Ant1\_2437

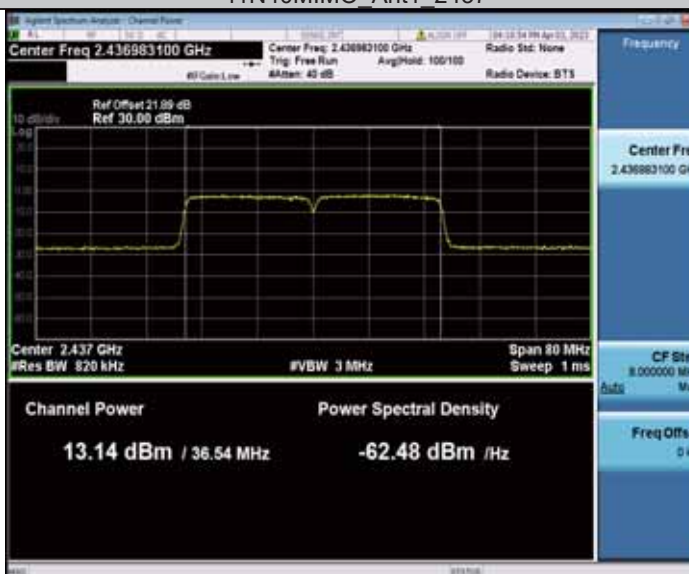


11N40MIMO\_Ant2\_2437



11N40MIMO\_Ant1\_2452



11N40MIMO\_Ant2\_2452

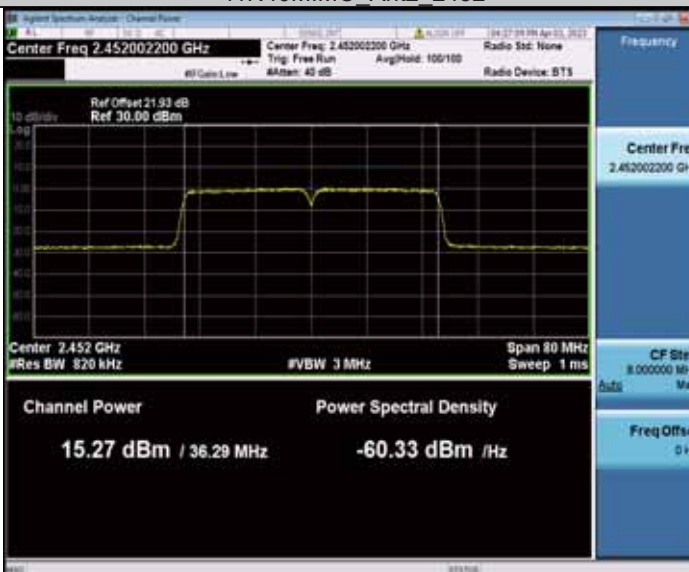

## 8.4 MAXIMUM POWER SPECTRAL DENSITY

### 8.4.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

According to RSS-247 5.2(b) and RSS-Gen 6.12

### 8.4.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 8.4.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

### 8.4.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

# BL-M7621AX7

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.06	≤8.00	PASS
	Ant2	2412	-14.77	≤8.00	PASS
	Ant1	2437	-12.29	≤8.00	PASS
	Ant2	2437	-14.94	≤8.00	PASS
	Ant1	2462	-12.9	≤8.00	PASS
	Ant2	2462	-14.06	≤8.00	PASS
11G	Ant1	2412	-16.81	≤8.00	PASS
	Ant2	2412	-17.66	≤8.00	PASS
	Ant1	2437	-16.62	≤8.00	PASS
	Ant2	2437	-18.2	≤8.00	PASS
	Ant1	2462	-15.83	≤8.00	PASS
	Ant2	2462	-17.72	≤8.00	PASS
11N20MIMO	Ant1	2412	-20.19	≤8.00	PASS
	Ant2	2412	-19.35	≤8.00	PASS
	total	2412	-16.74	≤8.00	PASS
	Ant1	2437	-20.32	≤8.00	PASS
	Ant2	2437	-18.96	≤8.00	PASS
	total	2437	-16.58	≤8.00	PASS
	Ant1	2462	-20.55	≤8.00	PASS
	Ant2	2462	-18.84	≤8.00	PASS
11N40MIMO	total	2462	-16.60	≤8.00	PASS
	Ant1	2422	-23.03	≤8.00	PASS
	Ant2	2422	-21.26	≤8.00	PASS
	total	2422	-19.05	≤8.00	PASS
	Ant1	2437	-22.51	≤8.00	PASS
	Ant2	2437	-22.32	≤8.00	PASS
	total	2437	-19.40	≤8.00	PASS
	Ant1	2452	-22.45	≤8.00	PASS
	Ant2	2452	-20.84	≤8.00	PASS
	total	2452	-18.56	≤8.00	PASS




11B\_Ant1\_2412



11B\_Ant2\_2412




11B\_Ant1\_2437

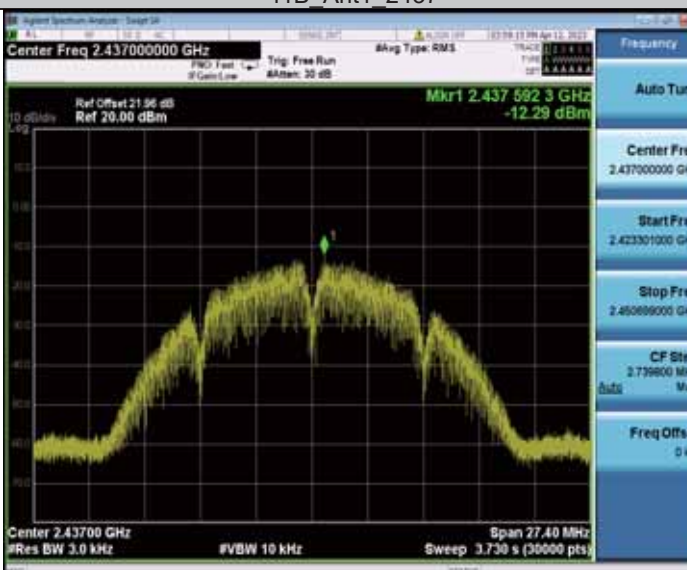

11B\_Ant2\_2437




11B\_Ant1\_2462

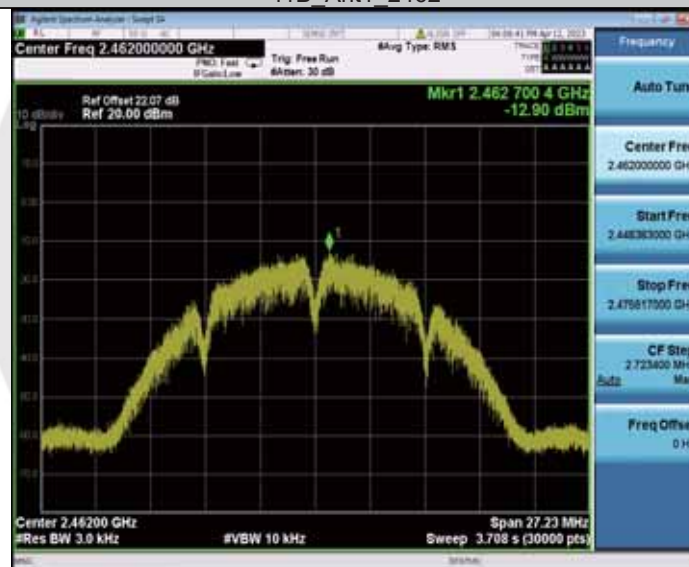


11B\_Ant2\_2462




11G\_Ant1\_2412

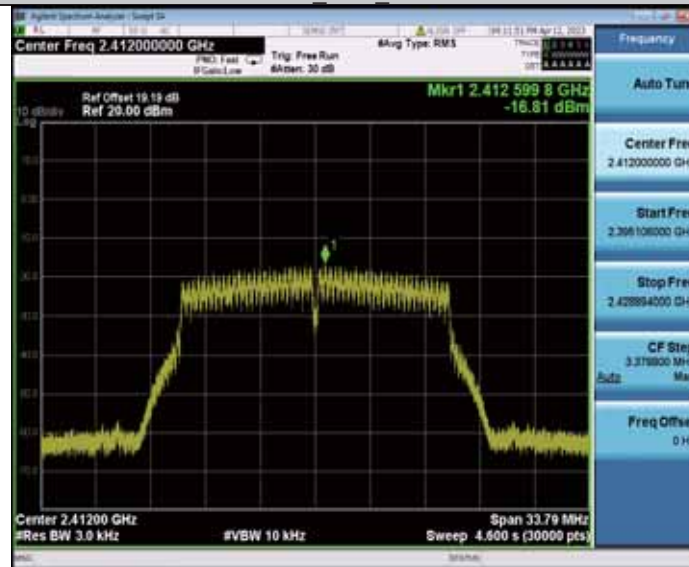


11G\_Ant2\_2412

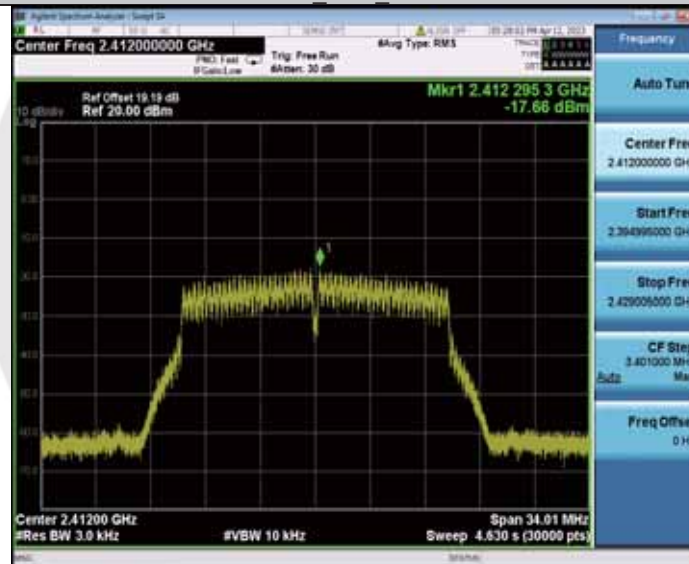


11G\_Ant1\_2437

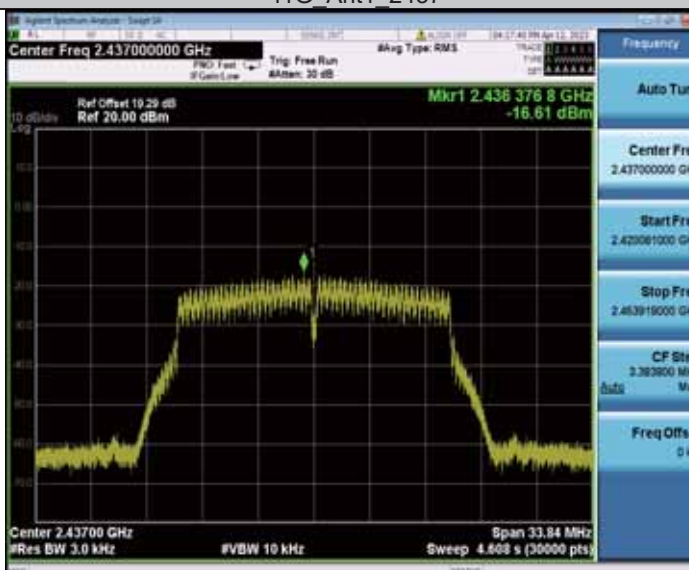


11G\_Ant2\_2437

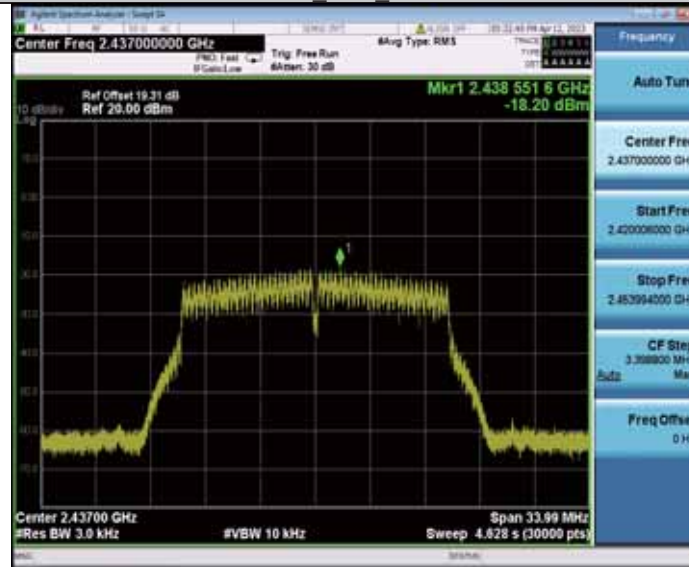

11G\_Ant1\_2462

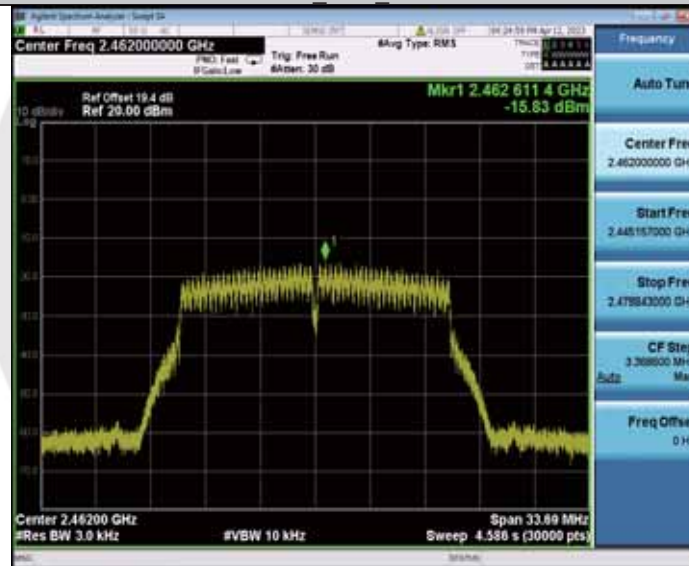

11G\_Ant2\_2462

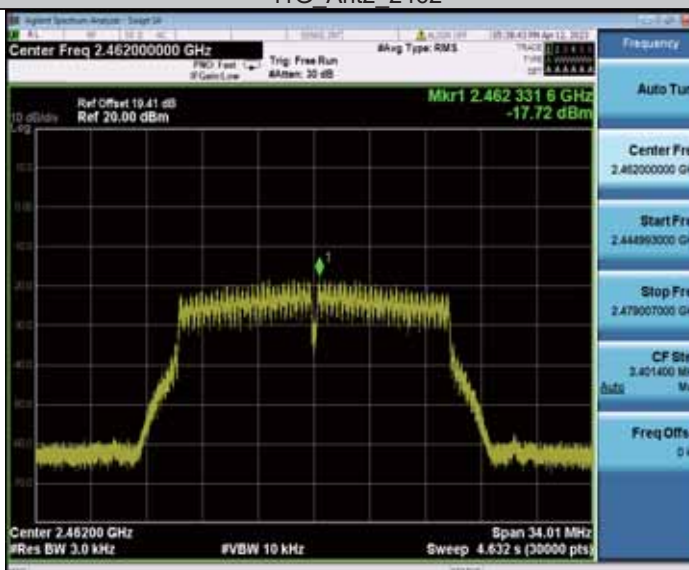





11N20MIMO\_Ant1\_2412




11N20MIMO\_Ant2\_2412

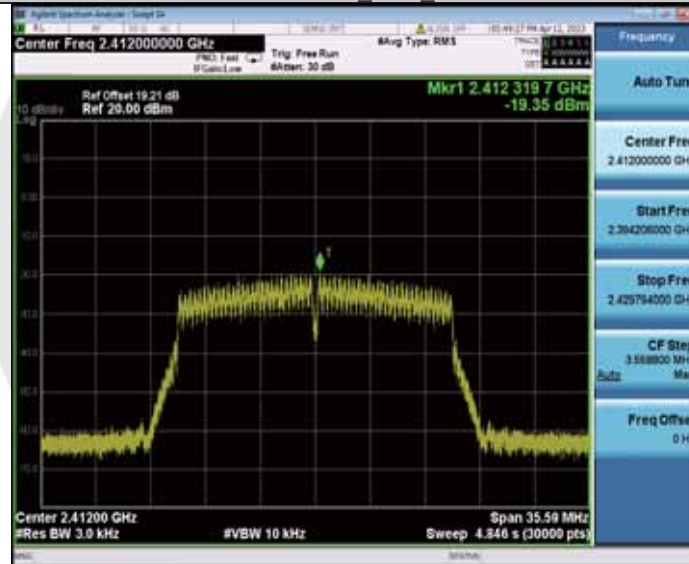


11N20MIMO\_Ant1\_2437

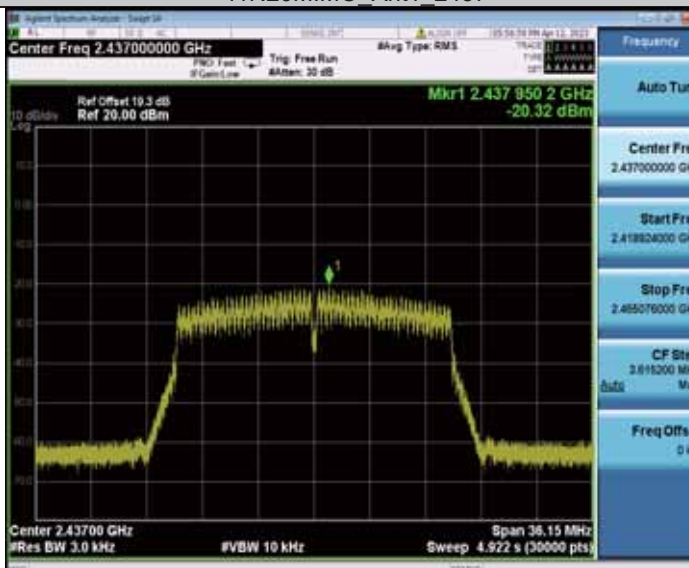


11N20MIMO\_Ant2\_2437

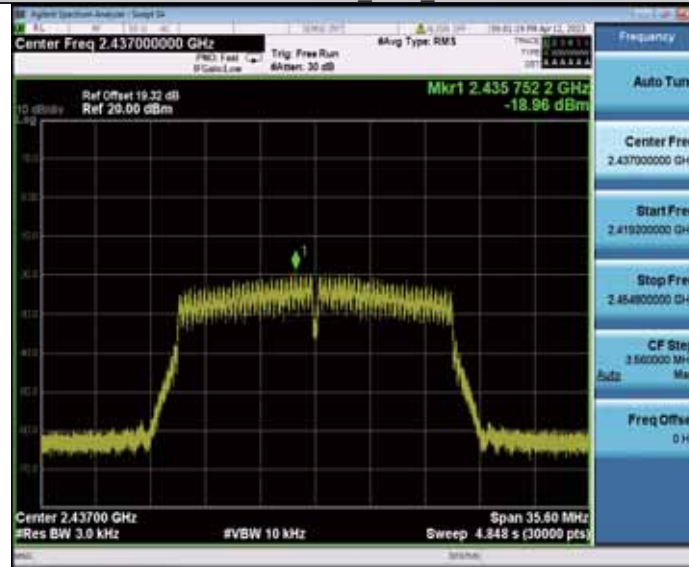


11N20MIMO\_Ant1\_2462

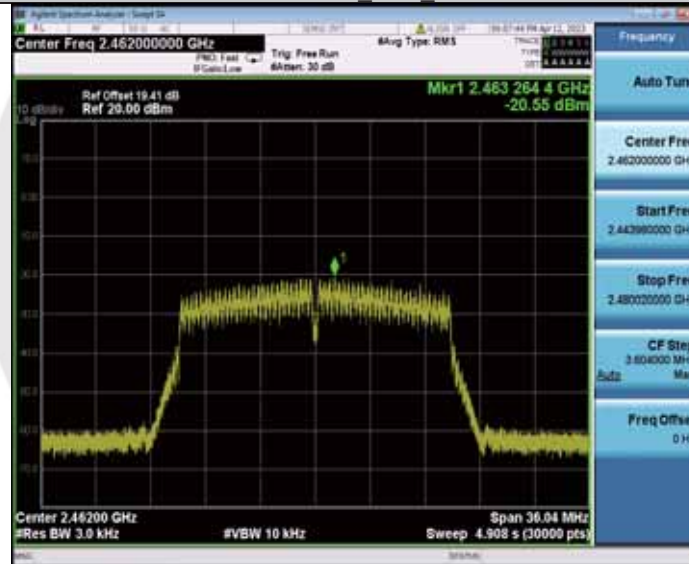


11N20MIMO\_Ant2\_2462

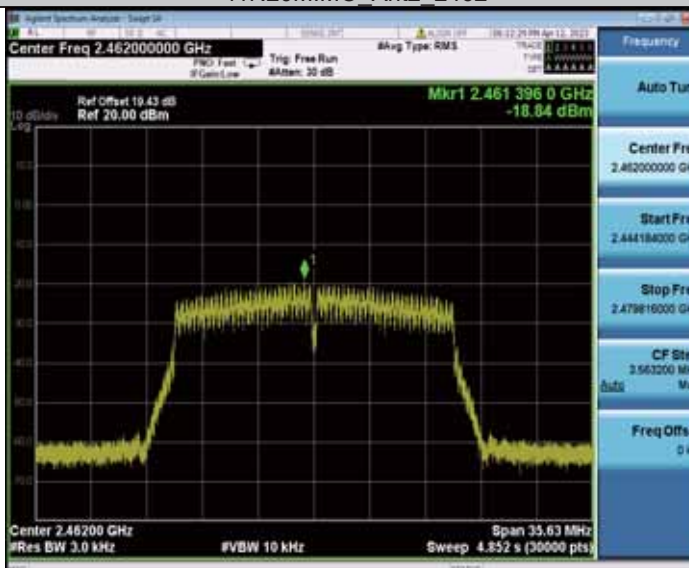


11N40MIMO\_Ant1\_2422

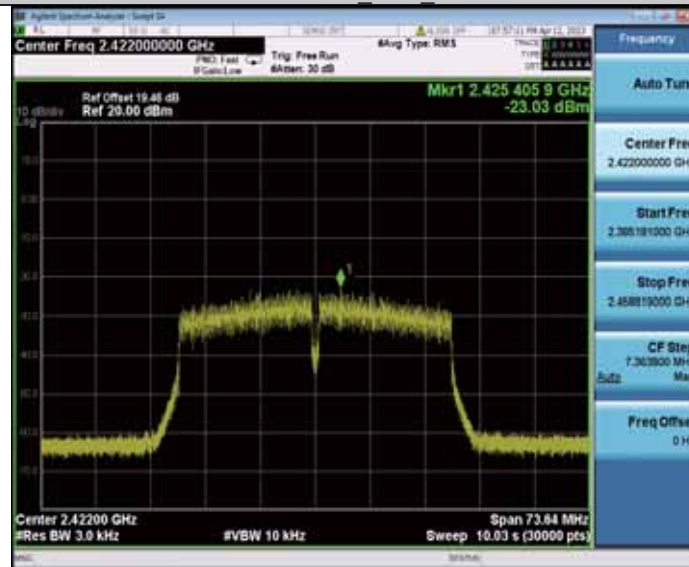


11N40MIMO\_Ant2\_2422

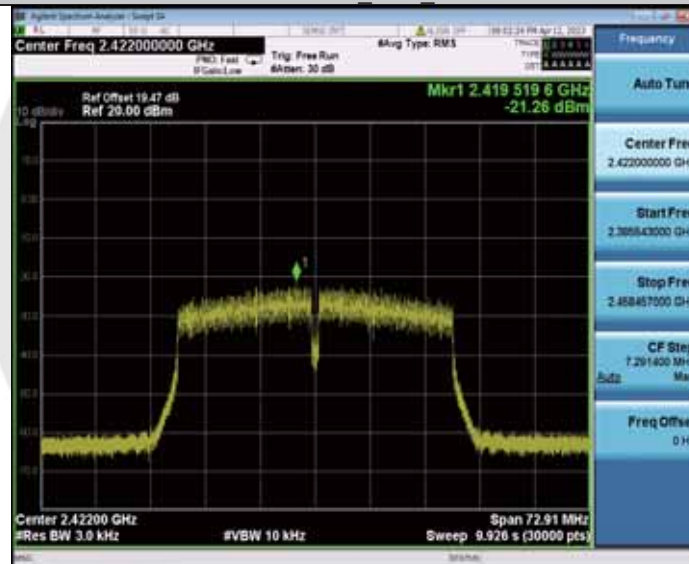


11N40MIMO\_Ant1\_2437

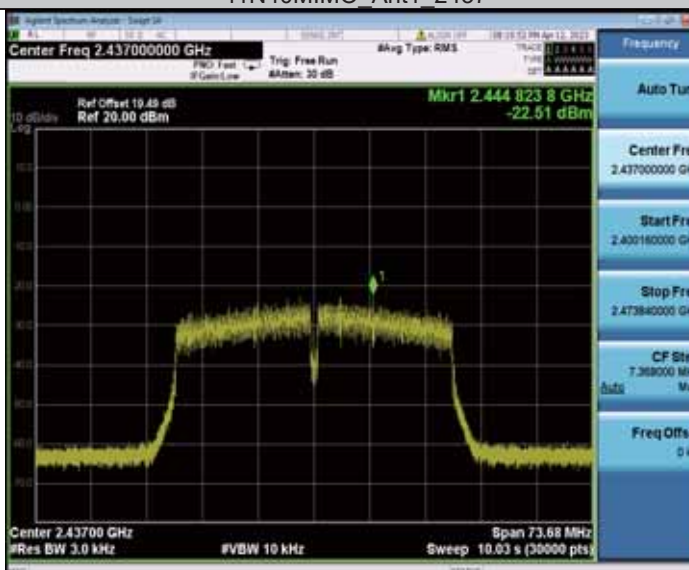


11N40MIMO\_Ant2\_2437

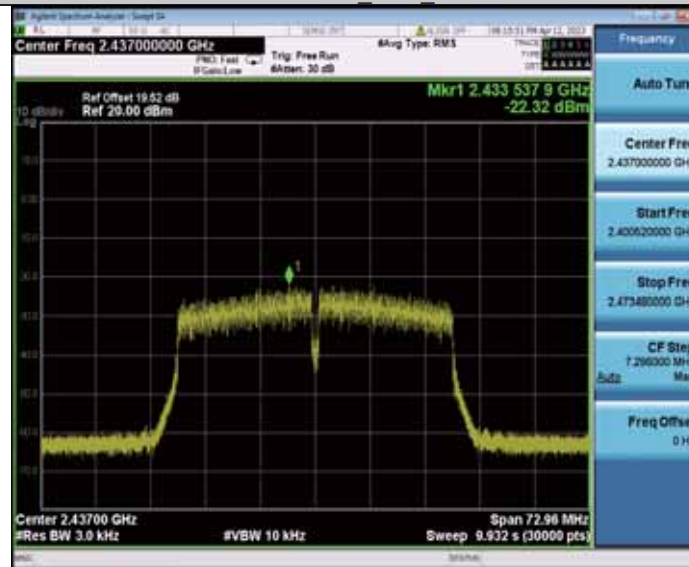

11N40MIMO\_Ant1\_2452

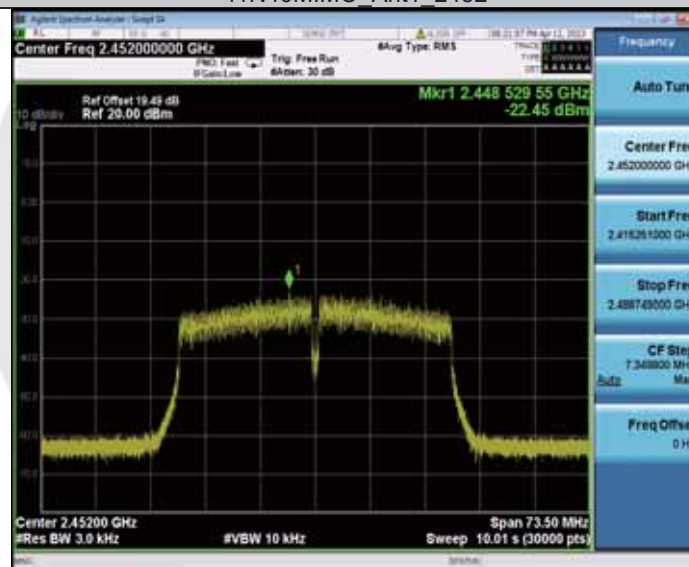

11N40MIMO\_Ant2\_2452

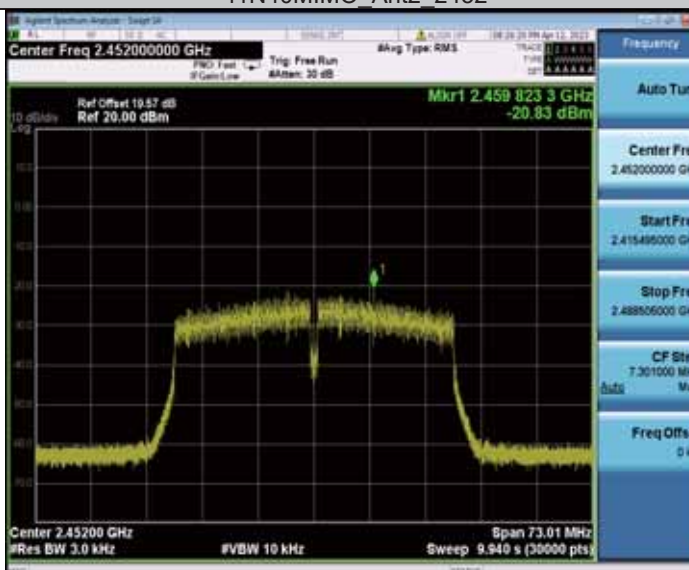



# BL-M8832AU1

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.37	≤8.00	PASS
	Ant2	2412	-13.72	≤8.00	PASS
	Ant1	2437	-15.49	≤8.00	PASS
	Ant2	2437	-12.81	≤8.00	PASS
	Ant1	2462	-15.21	≤8.00	PASS
	Ant2	2462	-13.97	≤8.00	PASS
11G	Ant1	2412	-16.16	≤8.00	PASS
	Ant2	2412	-13.59	≤8.00	PASS
	Ant1	2437	-15.79	≤8.00	PASS
	Ant2	2437	-14.28	≤8.00	PASS
	Ant1	2462	-16.34	≤8.00	PASS
	Ant2	2462	-14.42	≤8.00	PASS
11N20MIMO	Ant1	2412	-18.39	≤8.00	PASS
	Ant2	2412	-17.29	≤8.00	PASS
	total	2412	-14.79	≤8.00	PASS
	Ant1	2437	-18.7	≤8.00	PASS
	Ant2	2437	-16.79	≤8.00	PASS
	total	2437	-14.63	≤8.00	PASS
	Ant1	2462	-18.54	≤8.00	PASS
	Ant2	2462	-15.62	≤8.00	PASS
11N40MIMO	total	2462	-13.83	≤8.00	PASS
	Ant1	2422	-21.46	≤8.00	PASS
	Ant2	2422	-19.39	≤8.00	PASS
	total	2422	-17.29	≤8.00	PASS
	Ant1	2437	-19.82	≤8.00	PASS
	Ant2	2437	-19.48	≤8.00	PASS
	total	2437	-16.64	≤8.00	PASS
	Ant1	2452	-21.72	≤8.00	PASS
	Ant2	2452	-19.26	≤8.00	PASS
	total	2452	-17.31	≤8.00	PASS

11B\_Ant1\_2412



11B\_Ant2\_2412



11B\_Ant1\_2437



11B\_Ant2\_2437




11B\_Ant1\_2462




11B\_Ant2\_2462




11G\_Ant1\_2412

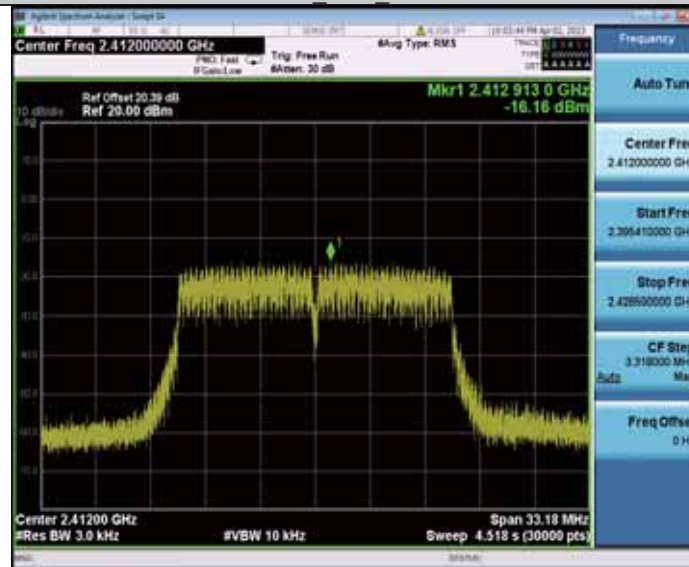

11G\_Ant2\_2412

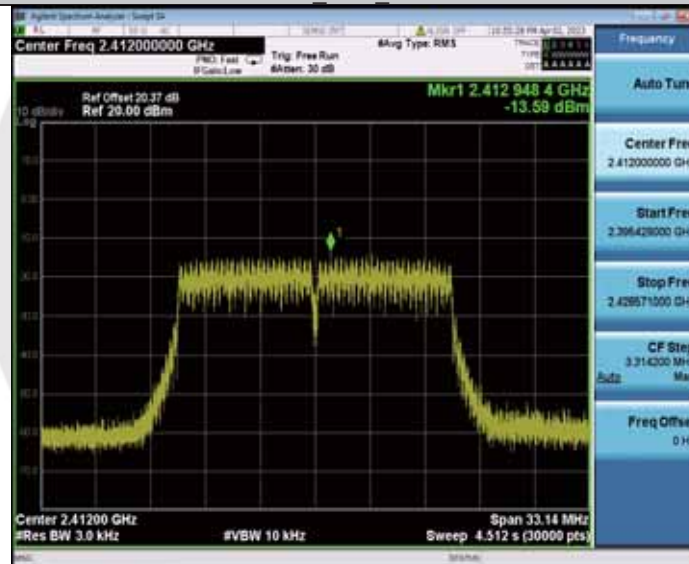


11G\_Ant1\_2437

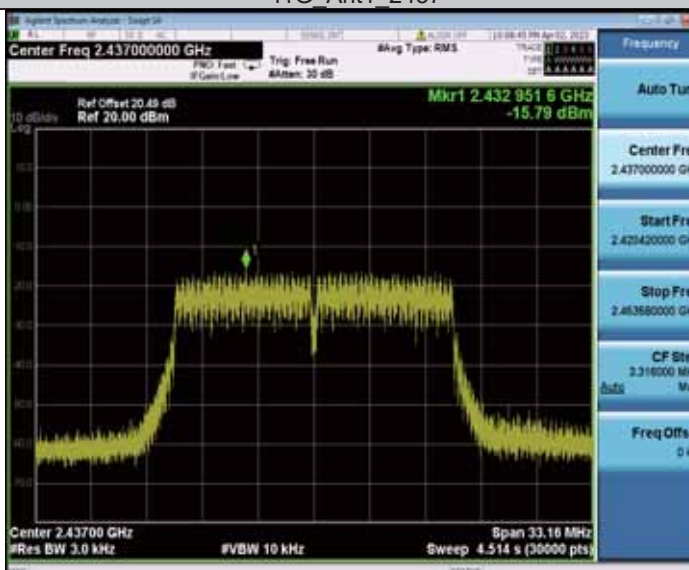





11G\_Ant2\_2437

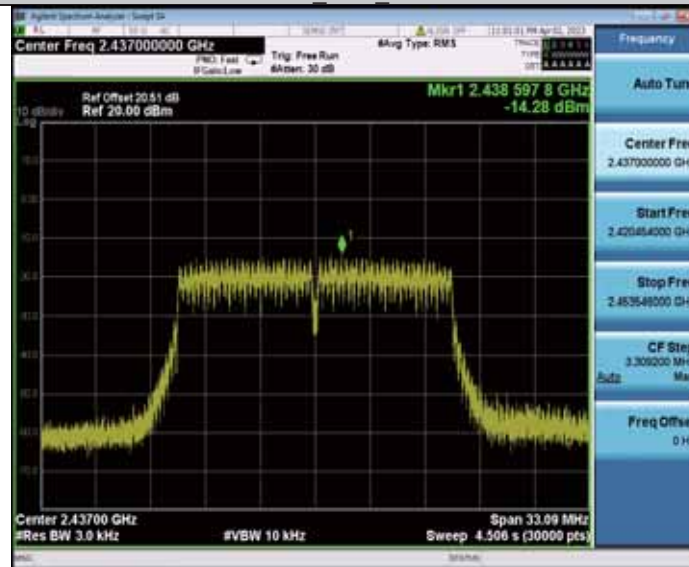


11G\_Ant1\_2462

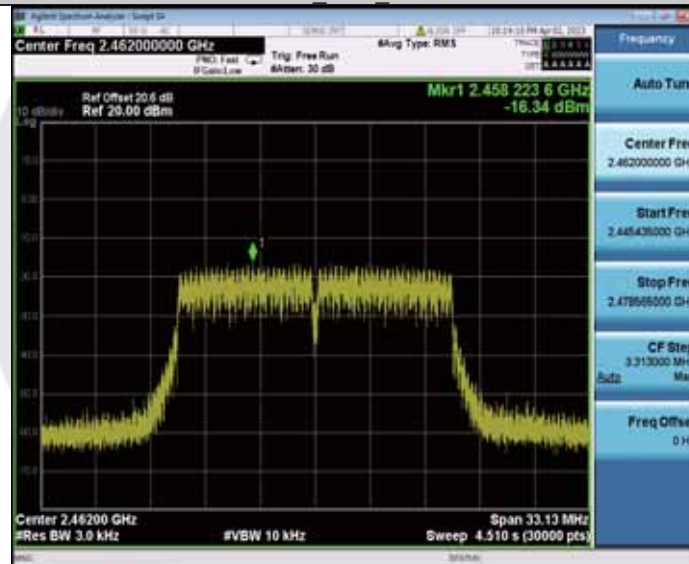


11G\_Ant2\_2462

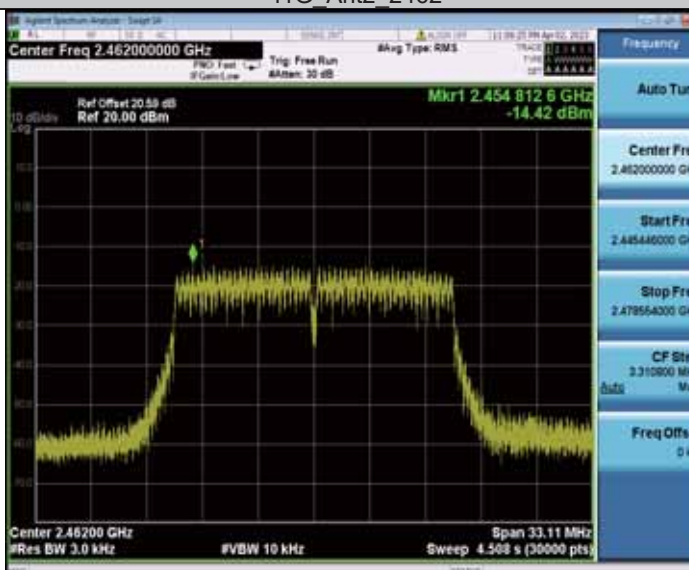


11N20MIMO\_Ant1\_2412

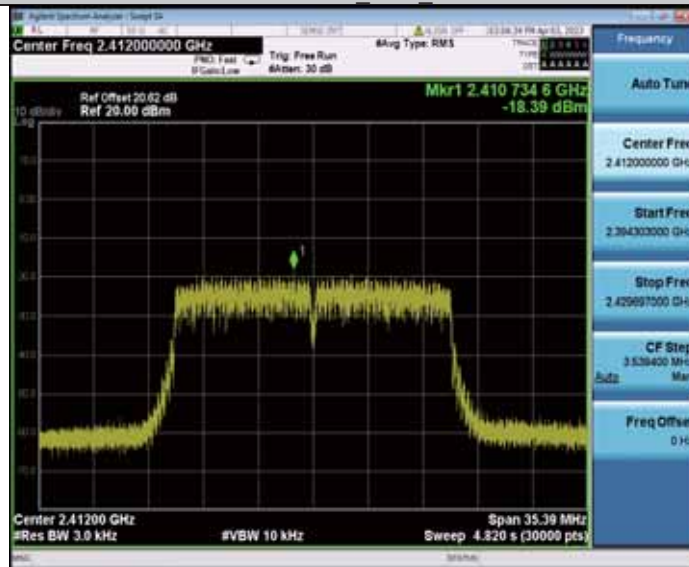


11N20MIMO\_Ant2\_2412

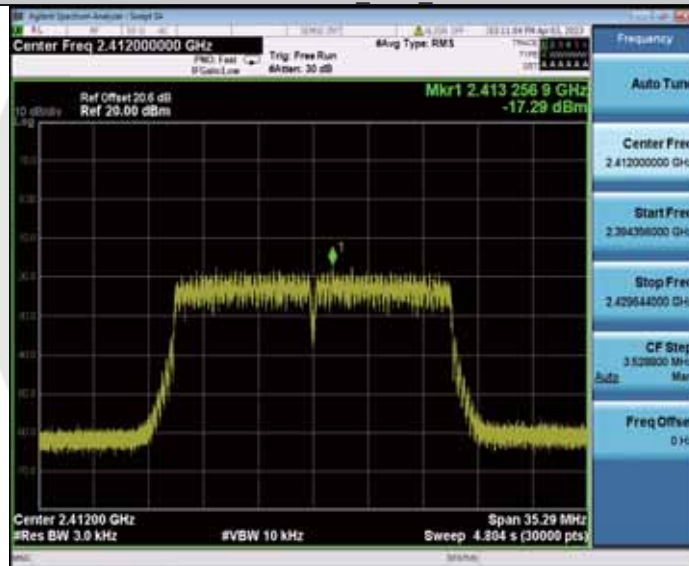


11N20MIMO\_Ant1\_2437

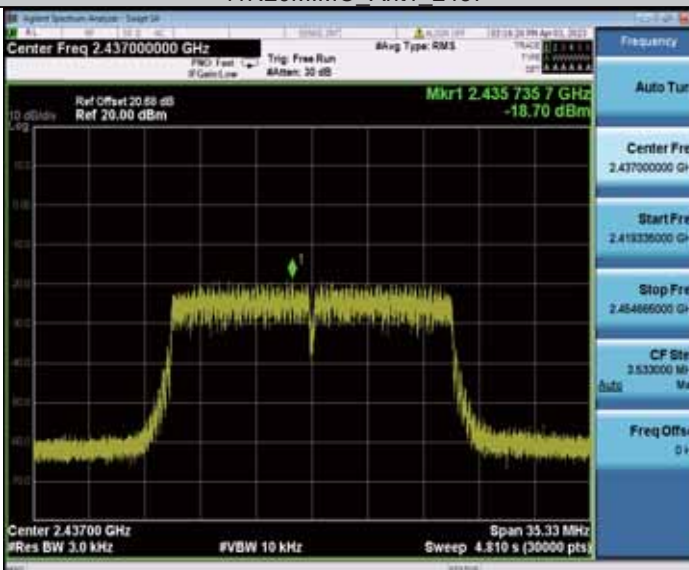


11N20MIMO\_Ant2\_2437

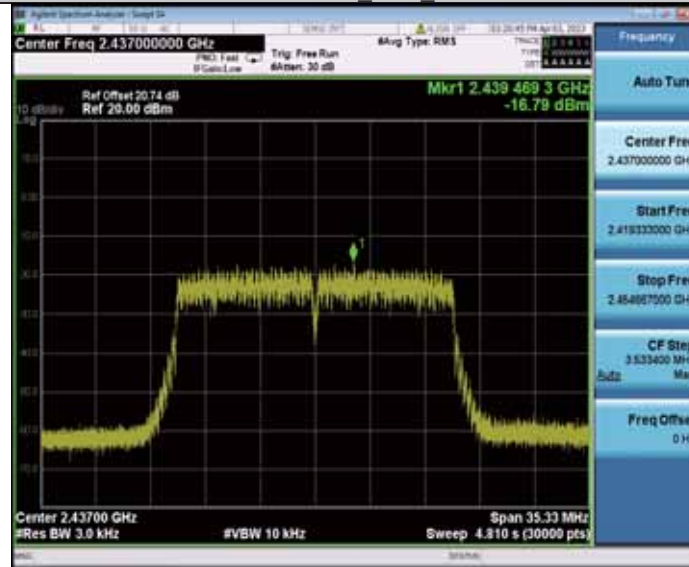


11N20MIMO\_Ant1\_2462

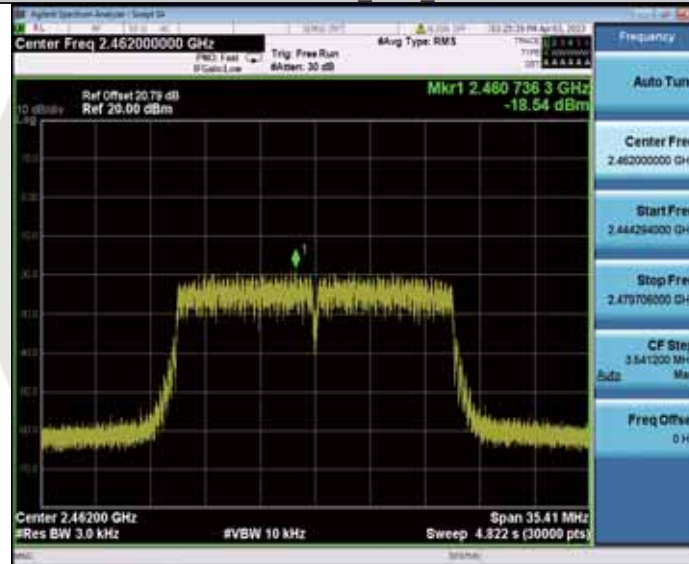


11N20MIMO\_Ant2\_2462

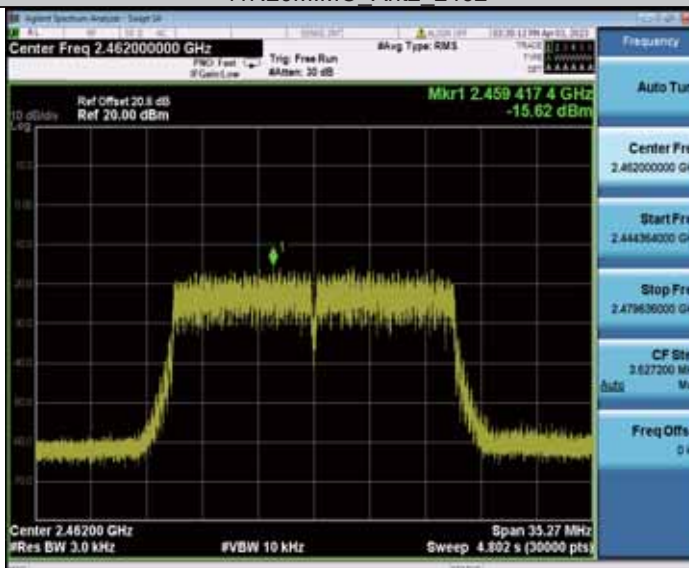


11N40MIMO\_Ant1\_2422

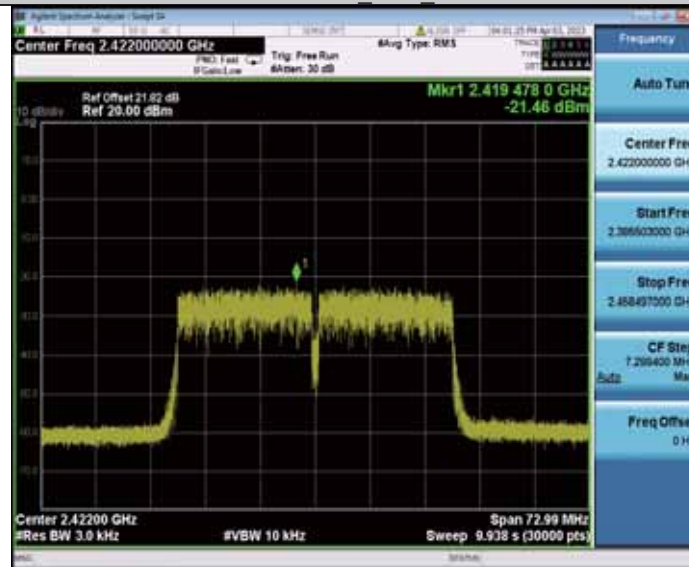

11N40MIMO\_Ant2\_2422

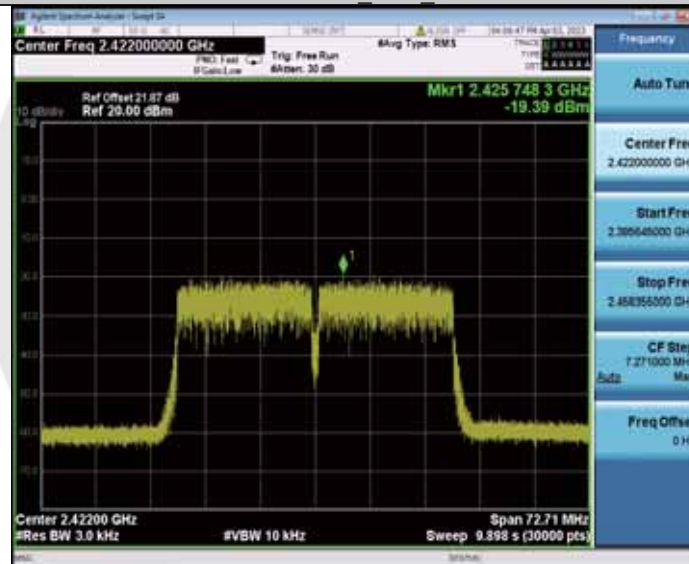


11N40MIMO\_Ant1\_2437

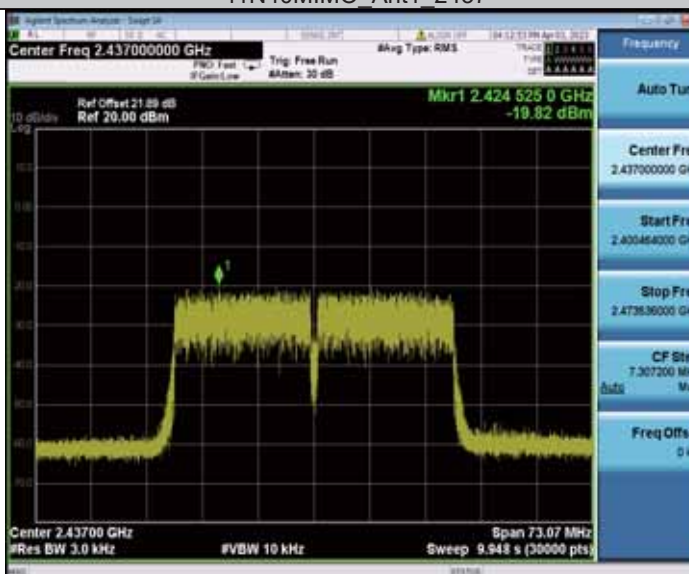





11N40MIMO\_Ant2\_2437

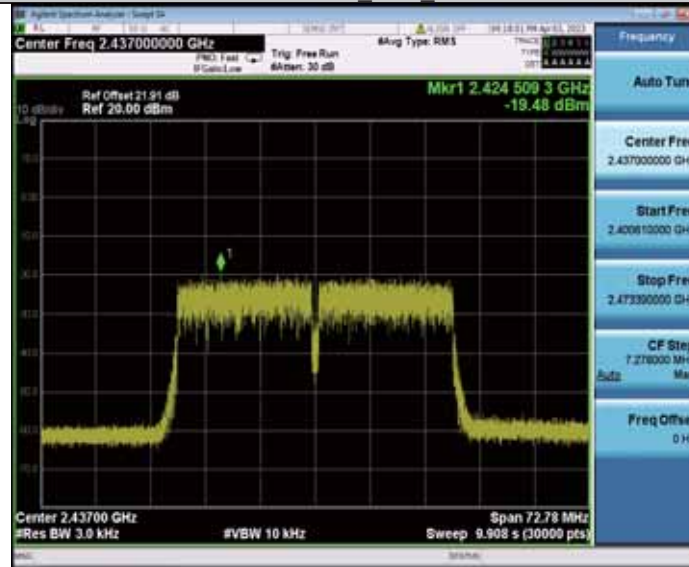

11N40MIMO\_Ant1\_2452

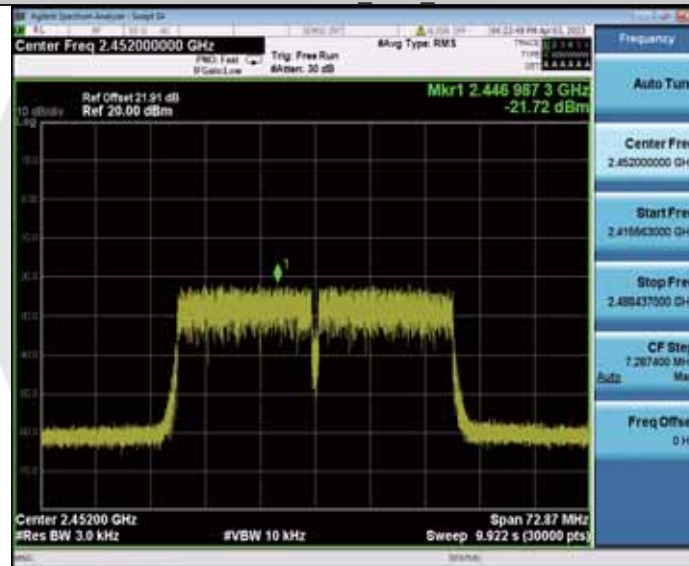

11N40MIMO\_Ant2\_2452

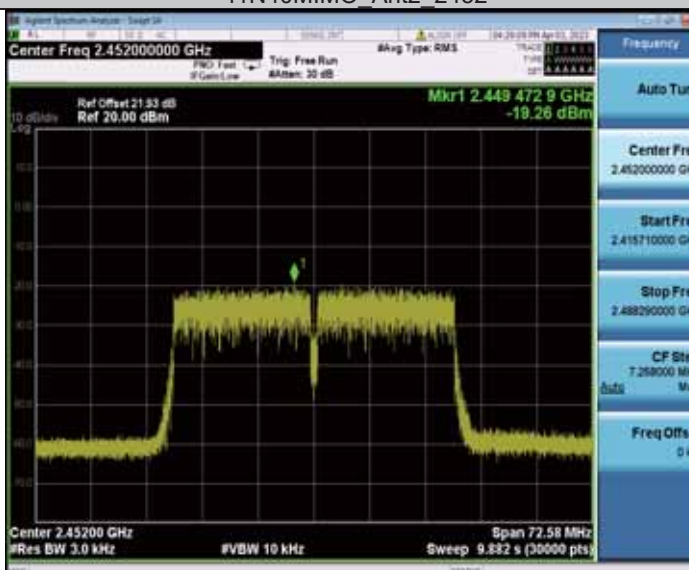

## 8.5 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

### 8.5.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02  
According to RSS-247 5.5

### 8.5.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 8.5.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 8.5.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### ■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq 1\%$  of the span=100kHz Set VBW  $\geq 3 \times$  RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

#### ■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding

restricted frequency bands) are attenuated by at least the minimum requirements . Report the three highest emissions relative to the limit.

### 8.5.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

### BL-M7621AX7

#### Band-edge measurement

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	6.43	-36.74	≤-23.57	PASS
	Ant2	Low	2412	5.55	-36.06	≤-24.45	PASS
	Ant1	High	2462	6.50	-35.93	≤-23.5	PASS
	Ant2	High	2462	4.72	-35.42	≤-25.28	PASS
11G	Ant1	Low	2412	4.72	-35.25	≤-25.28	PASS
	Ant2	Low	2412	3.30	-36.34	≤-26.7	PASS
	Ant1	High	2462	5.33	-36.3	≤-24.67	PASS
	Ant2	High	2462	2.83	-35.9	≤-27.17	PASS
11N20MIMO	Ant1	Low	2412	1.32	-36.44	≤-28.68	PASS
	Ant2	Low	2412	2.29	-36.52	≤-27.71	PASS
	Ant1	High	2462	1.09	-36.05	≤-28.91	PASS
	Ant2	High	2462	2.27	-36.09	≤-27.73	PASS
11N40MIMO	Ant1	Low	2422	-2.03	-37.21	≤-32.03	PASS
	Ant2	Low	2422	-0.51	-35.66	≤-30.51	PASS
	Ant1	High	2452	-1.60	-36.39	≤-31.6	PASS
	Ant2	High	2452	-0.31	-35.63	≤-30.31	PASS

#### Emission level measurement

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	6.13	6.13	---	PASS
			30~1000	6.13	-68.58	≤-23.87	PASS
			1000~26500	6.13	-52.42	≤-23.87	PASS
	Ant2	2412	Reference	5.61	5.61	---	PASS
			30~1000	5.61	-69.04	≤-24.39	PASS
			1000~26500	5.61	-44.67	≤-24.39	PASS
	Ant1	2437	Reference	6.18	6.18	---	PASS
			30~1000	6.18	-68.15	≤-23.82	PASS
			1000~26500	6.18	-53.35	≤-23.82	PASS
	Ant2	2437	Reference	4.86	4.86	---	PASS
			30~1000	4.86	-68.46	≤-25.14	PASS
			1000~26500	4.86	-52.13	≤-25.14	PASS
	Ant1	2462	Reference	6.33	6.33	---	PASS
			30~1000	6.33	-68.35	≤-23.67	PASS
			1000~26500	6.33	-53.03	≤-23.67	PASS
	Ant2	2462	Reference	5.43	5.43	---	PASS
			30~1000	5.43	-68.06	≤-24.57	PASS
			1000~26500	5.43	-52.66	≤-24.57	PASS
11G	Ant1	2412	Reference	4.73	4.73	---	PASS

	Ant2	2412	30~1000	4.73	-68.23	≤-25.27	PASS
			1000~26500	4.73	-53.77	≤-25.27	PASS
			Reference	3.02	3.02	---	PASS
			30~1000	3.02	-68.82	≤-26.98	PASS
			1000~26500	3.02	-53.24	≤-26.98	PASS
			Reference	4.27	4.27	---	PASS
	Ant1	2437	30~1000	4.27	-68.37	≤-25.73	PASS
			1000~26500	4.27	-49.87	≤-25.73	PASS
			Reference	3.30	3.30	---	PASS
	Ant2	2437	30~1000	3.30	-68.47	≤-26.7	PASS
			1000~26500	3.30	-53.06	≤-26.7	PASS
			Reference	5.22	5.22	---	PASS
11N20MIMO	Ant1	2412	30~1000	5.22	-67.87	≤-24.78	PASS
			1000~26500	5.22	-47.77	≤-24.78	PASS
			Reference	3.46	3.46	---	PASS
	Ant2	2462	30~1000	3.46	-68.78	≤-26.54	PASS
			1000~26500	3.46	-52.52	≤-26.54	PASS
			Reference	1.30	1.30	---	PASS
	Ant1	2412	30~1000	1.30	-68.88	≤-28.7	PASS
			1000~26500	1.30	-53.52	≤-28.7	PASS
			Reference	2.24	2.24	---	PASS
	Ant2	2412	30~1000	2.24	-68.37	≤-27.76	PASS
			1000~26500	2.24	-52.93	≤-27.76	PASS
			Reference	1.04	1.04	---	PASS
	Ant1	2437	30~1000	1.04	-68.42	≤-28.96	PASS
			1000~26500	1.04	-52.96	≤-28.96	PASS
			Reference	2.33	2.33	---	PASS
	Ant2	2437	30~1000	2.33	-67.38	≤-27.67	PASS
			1000~26500	2.33	-52.21	≤-27.67	PASS
			Reference	1.00	1.00	---	PASS
	Ant1	2462	30~1000	1.00	-68.65	≤-29	PASS
			1000~26500	1.00	-53.11	≤-29	PASS
			Reference	2.34	2.34	---	PASS
	Ant2	2462	30~1000	2.34	-67.24	≤-27.66	PASS
			1000~26500	2.34	-52.38	≤-27.66	PASS
			Reference	-1.89	-1.89	---	PASS
11N40MIMO	Ant1	2422	30~1000	-1.89	-68.36	≤-31.89	PASS
			1000~26500	-1.89	-53.77	≤-31.89	PASS
			Reference	-0.47	-0.47	---	PASS
	Ant2	2422	30~1000	-0.47	-68.91	≤-30.47	PASS
			1000~26500	-0.47	-53.4	≤-30.47	PASS
			Reference	-1.70	-1.70	---	PASS
	Ant1	2437	30~1000	-1.70	-68.41	≤-31.7	PASS
			1000~26500	-1.70	-52.99	≤-31.7	PASS
			Reference	-0.49	-0.49	---	PASS
	Ant2	2437	30~1000	-0.49	-67.83	≤-30.49	PASS
			1000~26500	-0.49	-53.78	≤-30.49	PASS
			Reference	-1.75	-1.75	---	PASS
	Ant1	2452	30~1000	-1.75	-68.67	≤-31.75	PASS
			1000~26500	-1.75	-52.78	≤-31.75	PASS
			Reference	-0.41	-0.41	---	PASS
	Ant2	2452	30~1000	-0.41	-68.38	≤-30.41	PASS
			1000~26500	-0.41	-52.68	≤-30.41	PASS
			Reference	-0.41	-0.41	---	PASS



## Band-edge measurement

11B Ant1 Low 2412



11B Ant2 Low 2412



11B Ant1 High 2462



11B Ant2 High 2462



11G Ant1 Low 2412




11G Ant2 Low 2412



11G\_Ant1\_High\_2462



11G\_Ant2\_High\_2462

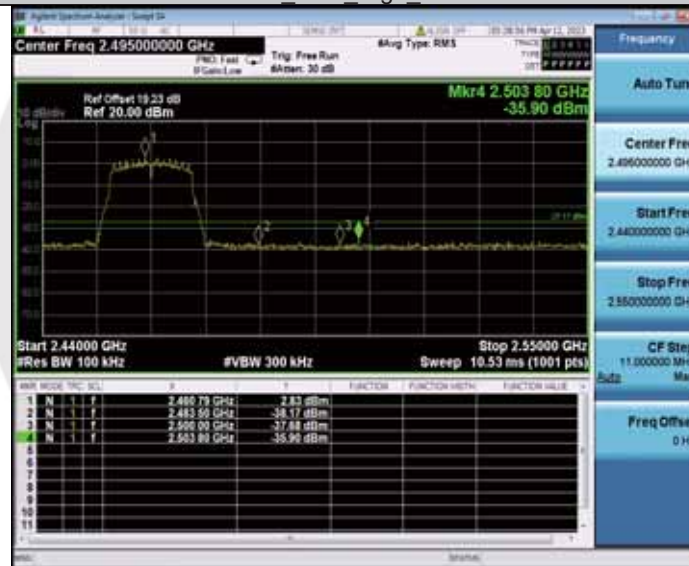

11N20MIMO\_Ant1\_Low\_2412





11N20MIMO\_Ant2\_Low\_2412



11N20MIMO\_Ant1\_High\_2462



11N20MIMO\_Ant2\_High\_2462





11N40MIMO\_Ant1\_Low\_2422



11N40MIMO\_Ant2\_Low\_2422



11N40MIMO\_Ant1\_High\_2452



11N40MIMO\_Ant2\_High\_2452

