

FCC REPORT

(GSM & WCDMA)

Applicant: SWAGTEK

Address of Applicant: 10205 NW 19th Street, STE 101, Miami, FL 33172 USA

Equipment Under Test (EUT)

Product Name: 2.4 inch Flip 3G Phone

Model No.: UNONU F3G, iSWAG PEARL, LOGIC F3G

Trade mark: UNONU, iSWAG, LOGIC

FCC ID: O55245017

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E

Date of sample receipt: 13 Dec., 2017

Date of Test: 13 Dec., 2017 to 23 Jan., 2018

Date of report issued: 24 Jan., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	24 Jan., 2018	Original

Tested by:

Zora Lee

Date:

24 Jan., 2018

Test Engineer

Reviewed by:

Wimer Zhang

Date:

24 Jan., 2018

Project Engineer

3. Contents

Page

1.	COVER PAGE	1
2.	VERSION	2
3.	CONTENTS	3
4.	TEST SUMMARY	4
5.	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF E.U.T	5
5.3	TEST MODES	7
5.4	DESCRIPTION OF SUPPORT UNITS	7
5.5	MEASUREMENT UNCERTAINTY	7
5.6	LABORATORY FACILITY	7
5.7	LABORATORY LOCATION	8
5.8	TEST INSTRUMENTS LIST	8
6.	TEST RESULTS	9
6.1	CONDUCTED OUTPUT POWER	9
6.2	OCCUPY BANDWIDTH	12
6.3	PEAK-TO-AVERAGE POWER RATIO	18
6.4	MODULATION CHARACTERISTIC	20
6.5	OUT OF BAND EMISSION AT ANTENNA TERMINALS	20
6.6	ERP, EIRP MEASUREMENT	29
6.7	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	31
6.8	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	36
6.9	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	39
7	TEST SETUP PHOTO	41
8	EUT CONSTRUCTIONAL DETAILS	42

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Peak-to-Average Power Ratio	Part 24.232 (d)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 22.355 Part 24.235 Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 2.1055(d)(2)	Pass
Pass: The EUT complies with the essential requirements in the standard.		

5. General Information

5.1 Client Information

Applicant:	SWAGTEK
Address:	10205 NW 19th Street, STE 101, Miami, FL 33172 USA
Manufacturer/Factory:	SWAGTEK
Address:	10205 NW 19th Street, STE 101, Miami, FL 33172 USA

5.2 General Description of E.U.T.

Product Name:	2.4 inch Flip 3G Phone										
Model No.:	UNONU F3G, iSWAG PEARL, LOGIC F3G										
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V: 826.4MHz-846.6MHz WCDMA Band II: 1852.4 MHz -1907.6 MHz										
Modulation type:	GSM/GPRS:GMSK, UMTS:QPSK										
Antenna type:	Internal Antenna										
Antenna gain:	GSM 850: 0.95 dBi PCS 1900: 1.00 dBi WCDMA Band V: 0.85 dBi WCDMA Band II: 0.91 dBi										
Power supply:	Rechargeable Li-ion Battery DC3.7V-800mAh										
AC adapter with two plugs :	Input: AC100-240V, 50/60Hz, 0.1A Output: DC 5.0V, 500mA										
Remark:	Model No.: UNONU F3G, iSWAG PEARL, LOGIC F3G were identical inside, the electrical circuit design, layout, components used and internal wiring, with only the difference being model name and trade mark. As shown below: <table border="1"> <tr> <td>Model No.</td><td>UNONU F3G</td><td>iSWAG PEARL</td><td>LOGIC F3G</td></tr> <tr> <td>Trade mark:</td><td>UNONU</td><td>iSWAG</td><td>LOGIC</td></tr> </table>			Model No.	UNONU F3G	iSWAG PEARL	LOGIC F3G	Trade mark:	UNONU	iSWAG	LOGIC
Model No.	UNONU F3G	iSWAG PEARL	LOGIC F3G								
Trade mark:	UNONU	iSWAG	LOGIC								

Operation Frequency List:

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....			
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60

5.3 Test modes

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.7Vdc, Extreme: Low 3.5Vdc, High 4.2Vdc
Test mode:	
GSM mode	Keep the EUT communication with simulated station in GSM mode
GPRS mode	Keep the EUT communication with simulated station in GPRS mode
RMC mode	Keep the EUT communication with simulated station in RMC mode
HSDPA	Keep the EUT communication with simulated station in HSDPA mode
HSUPA	Keep the EUT communication with simulated station in HSUPA mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	4.24 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	4.35 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	4.44 dB (k=2)
Radiated Emission (18GHz ~ 26.5GHz)	4.56 dB (k=2)
Radiated Emission (18GHz ~ 26.5GHz)	4.56 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

5.8 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	02-25-2017	02-24-2018
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2018
Horn Antenna	SCHWARZBECK	BBHA9120D	916	02-25-2017	02-24-2018
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	02-25-2017	02-24-2018
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A
Pre-amplifier	HP	8447D	2944A09358	02-25-2017	02-24-2018
Pre-amplifier	CD	PAP-1G18	11804	02-25-2017	02-24-2018
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	02-25-2017	02-24-2018
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	02-25-2017	02-24-2018
Spectrum Analyzer	Agilent	N9020A	MY50510123	10-29-2017	10-28- 2018
Signal Generator	Rohde & Schwarz	SMX	835454/016	02-25-2017	02-24- 2018
Signal Generator	R&S	SMR20	1008100050	02-25-2017	02-24-2018
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Cable	ZDECL	Z108-NJ-NJ-81	1608458	02-25-2017	02-24-2018
Cable	MICRO-COAX	MFR64639	K10742-5	02-25-2017	02-24-2018
Cable	SUHNER	SUCOFLEX100	58193/4PE	02-25-2017	02-24-2018
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	10-31-2017	10-30-2018
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	09-24-2017	09-23-2018
Simulated Station	Rohde & Schwarz	CMW500	140493	06-24-2017	06-23-2018

6. Test results

6.1 Conducted Output Power


Test Requirement:	FCC part 22.913(a)(2), FCC part 24.232(c)
Test Method:	ANSI/TIA-603-D 2010
Limit:	GSM 850: 7W, PCS 1900: 2W WCDMA Band V: 7W, WCDMA Band II: 2W
Test setup:	 The diagram illustrates the test setup. On the left is a blue rectangular box labeled 'System simulator'. A line connects it to a small black square labeled 'ATT' (attenuator). Another line connects the 'ATT' to a black rectangular box labeled 'EUT' (Equipment Under Test).
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

EUT Mode	Burst Average power (dBm)			Limit(dBm)
	128	190	251	
	824.20MHz	836.60MHz	848.80MHz	
GSM 850	32.36	32.25	32.31	38.45
GPRS 850 (1 Uplink slot)	32.35	32.15	32.27	
GPRS 850 (2 Uplink slot)	30.26	30.22	30.18	
GPRS 850 (3 Uplink slot)	28.39	28.35	28.28	
GPRS 850 (4 Uplink slot)	26.51	26.43	26.42	
EUT Mode	Burst Average power (dBm)			Limit(dBm)
	512	661	810	
	1850.20MHz	1880.00MHz	1909.80MHz	
PCS 1900	29.19	29.28	29.14	33.00
GPRS 1900 (1 Uplink slot)	29.13	29.21	29.10	
GPRS 1900 (2 Uplink slot)	27.12	27.08	27.11	
GPRS 1900 (3 Uplink slot)	25.48	25.56	25.71	
GPRS 1900 (4 Uplink slot)	23.66	23.71	23.65	

EUT Mode		Burst Average power (dBm)			Limit(dBm)
		4132	4183	4233	
		826.40MHz	836.60MHz	846.60MHz	
UMTS 850 HSDPA	Subtest 1	21.57	21.53	21.59	38.45
	Subtest 2	21.45	21.42	21.43	
	Subtest 3	21.08	20.86	20.97	
	Subtest 4	20.69	20.66	20.72	
UMTS 850 HSUPA	Subtest 1	21.14	21.12	21.15	
	Subtest 2	21.08	21.09	21.11	
	Subtest 3	20.71	20.83	20.87	
	Subtest 4	21.35	21.37	21.44	
	Subtest 5	21.21	21.13	21.07	
UMTS 850 RMC	12.2kbps	22.19	22.09	21.98	
UMTS 850 AMR	12.2kbps	22.14	22.05	21.87	
EUT Mode		Burst Average power (dBm)			Limit(dBm)
		9262	9400	9538	
		1852.40MHz	1880.00MHz	1907.60MHz	
UMTS 1900 HSDPA	Subtest 1	21.38	21.42	21.61	33.00
	Subtest 2	21.27	21.25	21.35	
	Subtest 3	20.87	20.93	20.91	
	Subtest 4	20.53	20.55	20.76	
UMTS 1900 HSUPA	Subtest 1	20.89	21.04	21.15	
	Subtest 2	20.85	20.92	21.02	
	Subtest 3	20.53	20.69	20.75	
	Subtest 4	21.18	21.19	21.29	
	Subtest 5	20.72	20.81	20.92	
UMTS 1900 RMC	12.2kbps	22.13	22.11	21.98	
UMTS 1900 AMR	12.2kbps	22.08	21.95	21.93	

6.2 Occupy Bandwidth

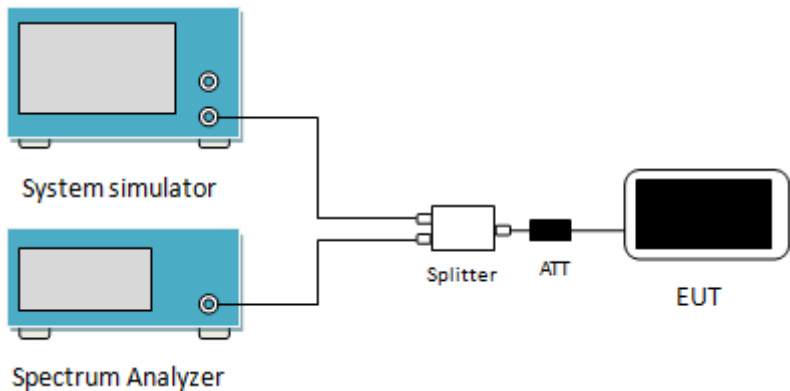Test Requirement:	FCC part 22.917(b), FCC part 24.238(b)
Test Method:	ANSI/TIA-603-D 2010
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular unit labeled 'Splitter'. The 'Splitter' has two output ports. One output port is connected to a black rectangular unit labeled 'ATT' (Attenuator). The other output port is connected to a black rectangular unit labeled 'EUT' (Equipment Under Test).
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.2	248	318
	190	836.6	248	320
	251	848.8	252	316
PCS 1900	512	1850.2	248	324
	661	1880.0	250	320
	810	1909.8	250	318
UMTS 850 12.2k RMC	4132	826.4	4120	4680
	4183	836.6	4100	4700
	4233	846.6	4120	4680
UMTS 1900 12.2k RMC	9262	1852.4	4120	4660
	9400	1880.0	4120	4680
	9538	1907.6	4120	4700

Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.

Test plot as follows:


GSM 850

99% Occupy bandwidth

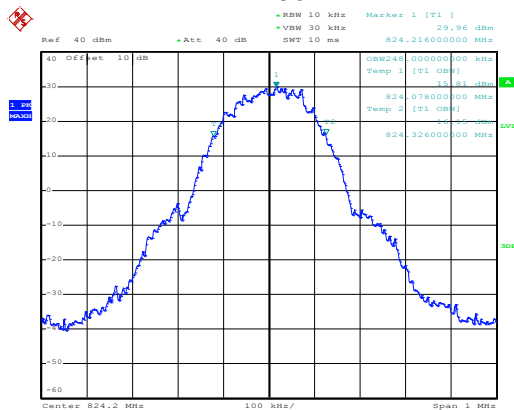


Date: 19.JAN.2018 10:43:57

26dB Emission Bandwidth

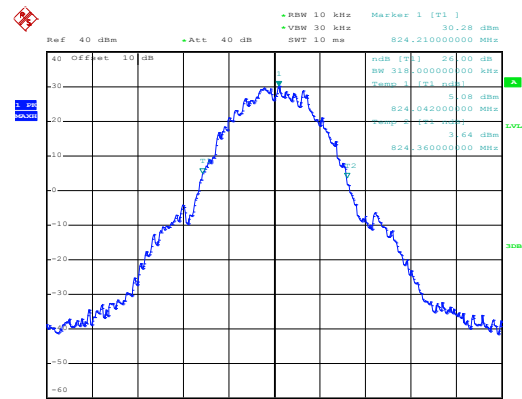


Date: 19.JAN.2018 10:44:11

Lowest channel

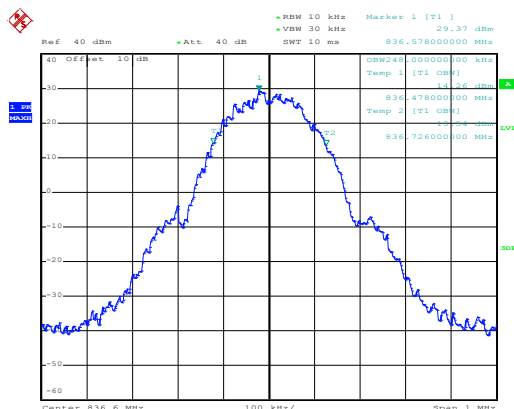


Date: 19.JAN.2018 10:44:51

Lowest channel

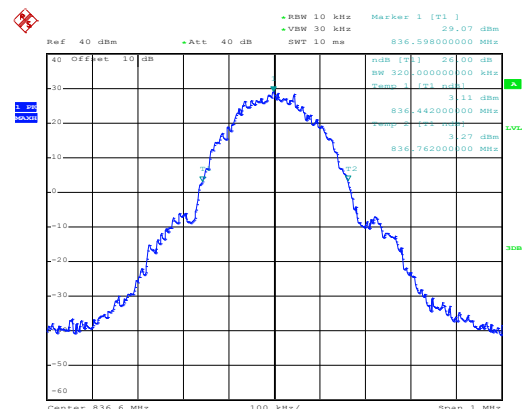


Date: 19.JAN.2018 10:44:34

Middle channel

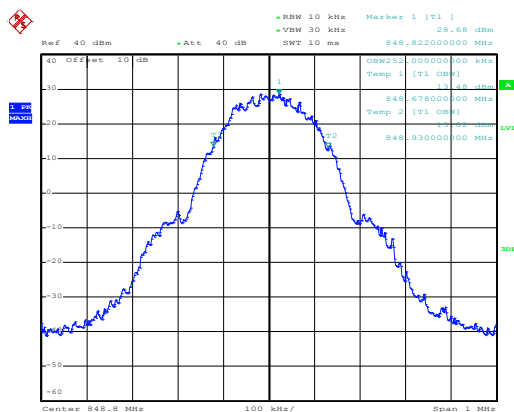

Date: 19.JAN.2018 10:45:19

Middle channel

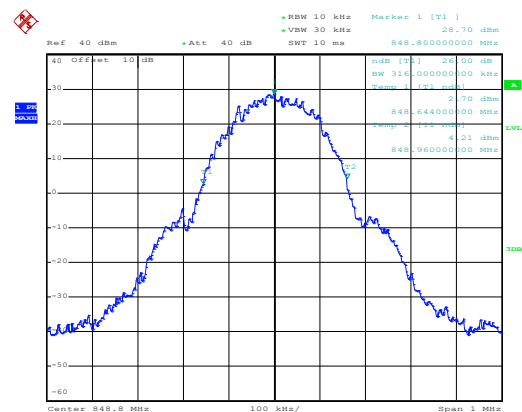


Date: 19.JAN.2018 10:45:34

Highest channel

Highest channel


PCS 1900

99% Occupy bandwidth

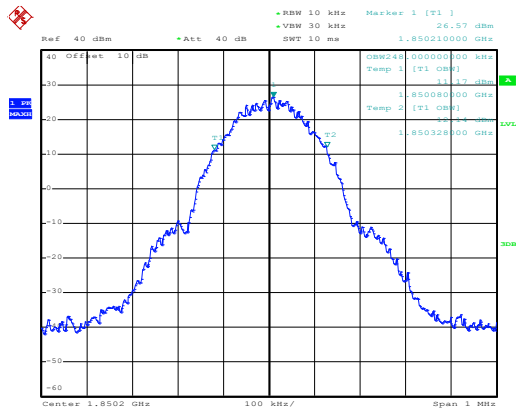


Date: 19.JAN.2018 10:46:25

Lowest channel

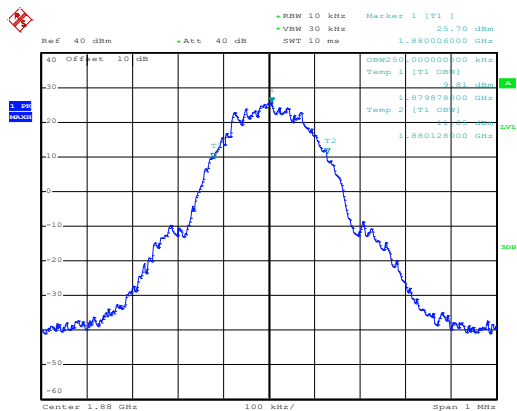

Date: 19.JAN.2018 10:46:48


Middle channel

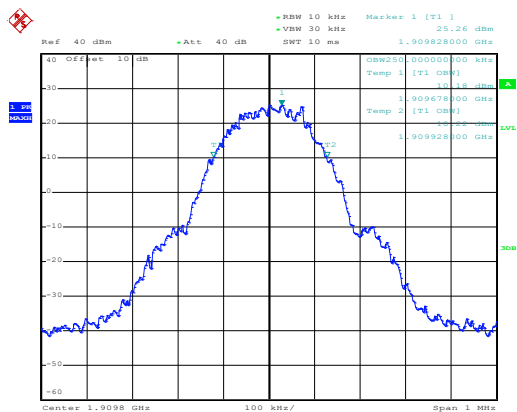

Date: 19.JAN.2018 10:47:40


Highest channel

26dB Emission Bandwidth

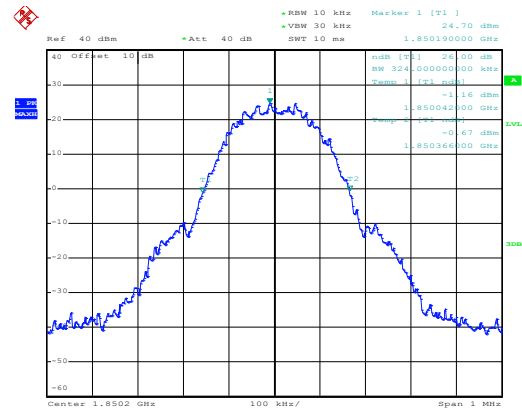


Date: 19.JAN.2018 10:46:09

Lowest channel

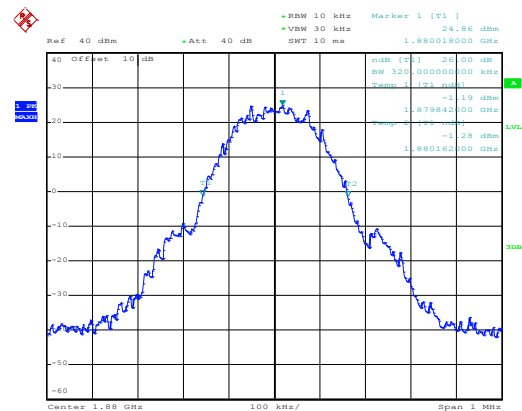

Date: 19.JAN.2018 10:47:03

Middle channel

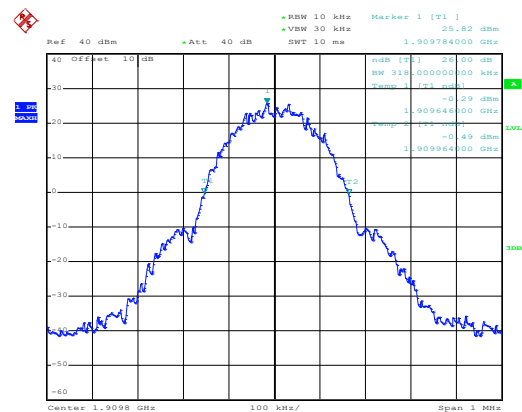


Date: 19.JAN.2018 10:47:24

Highest channel


UMTS 850 12.2k RMC

99% Occupancy bandwidth

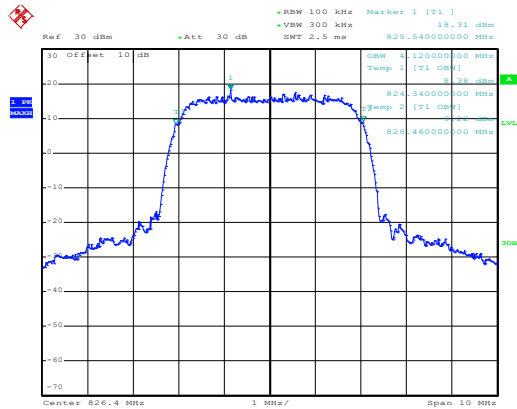


Date: 19.JAN.2018 10:58:43

26dB Emission Bandwidth

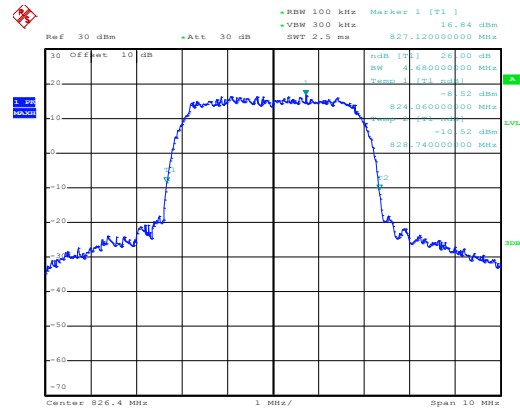


Date: 19.JAN.2018 10:58:52

Lowest channel

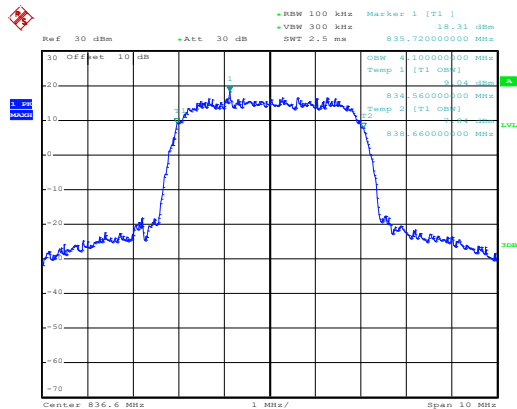


Date: 19.JAN.2018 10:59:22

Lowest channel

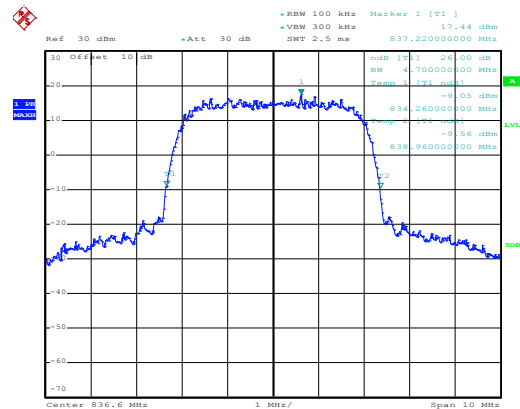


Date: 19.JAN.2018 10:59:14

Middle channel

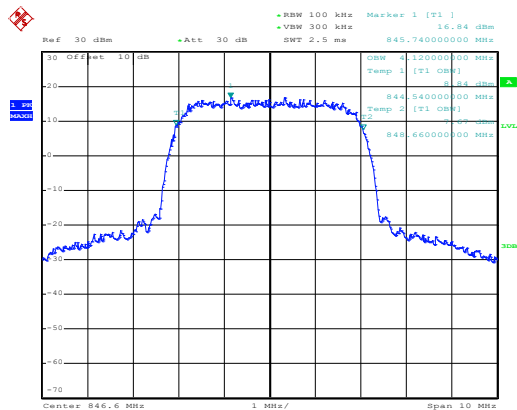

Date: 19.JAN.2018 10:59:45

Middle channel

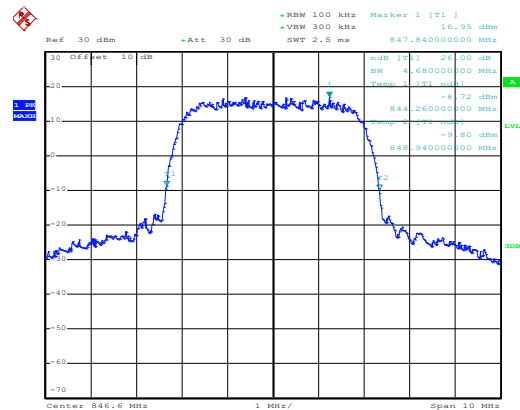


Date: 19.JAN.2018 10:59:55

Highest channel

Highest channel


UMTS 1900 12.2k RMC

99% Occupy bandwidth

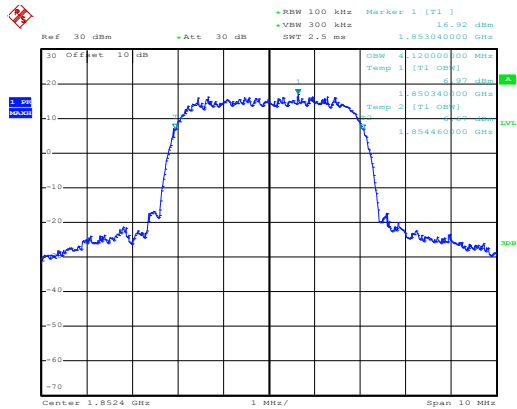


Date: 19.JAN.2018 11:01:28

26dB Emission Bandwidth

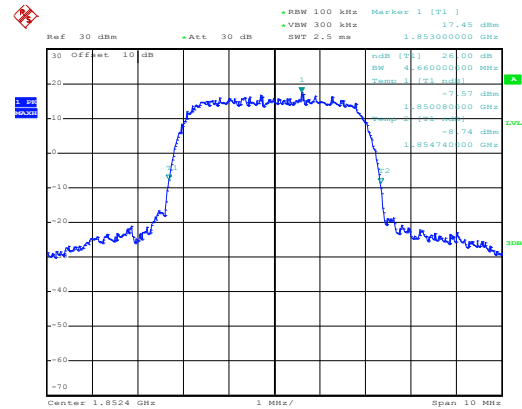


Date: 19.JAN.2018 11:01:17

Lowest channel

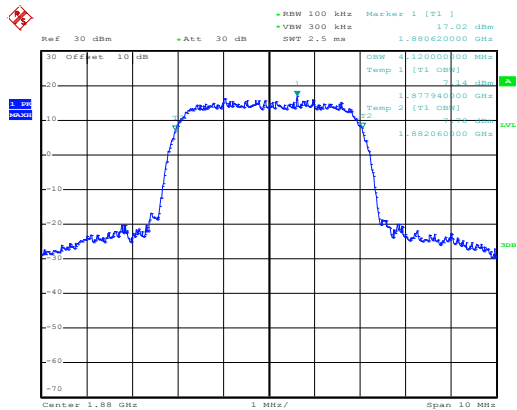


Date: 19.JAN.2018 11:01:48

Lowest channel

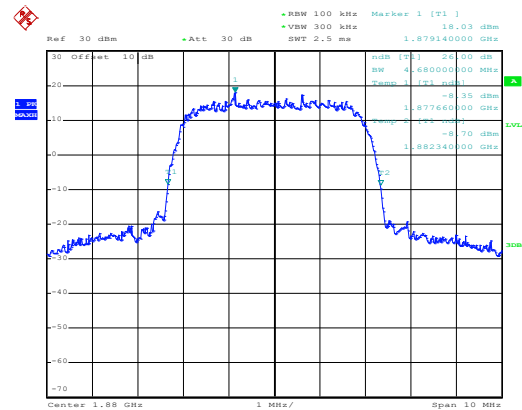


Date: 19.JAN.2018 11:01:57

Middle channel

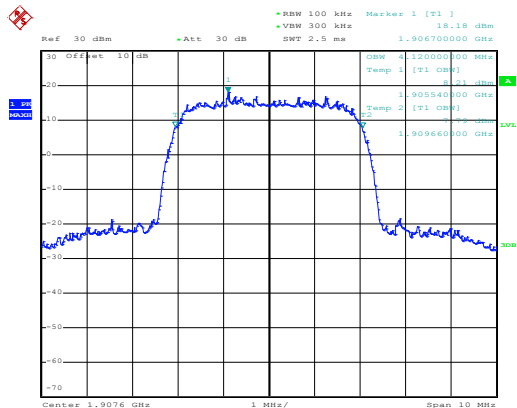

Date: 19.JAN.2018 11:02:29

Middle channel

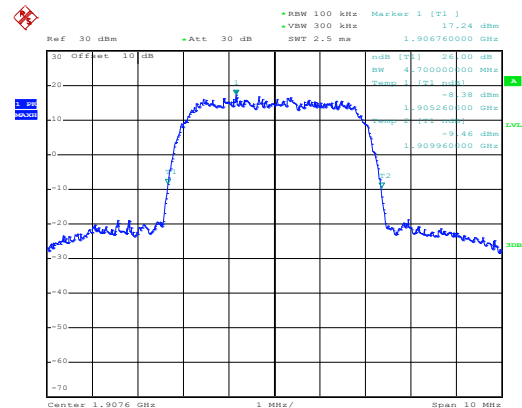


Date: 19.JAN.2018 11:02:17

Highest channel

Highest channel

6.3 Peak-to-Average Power Ratio

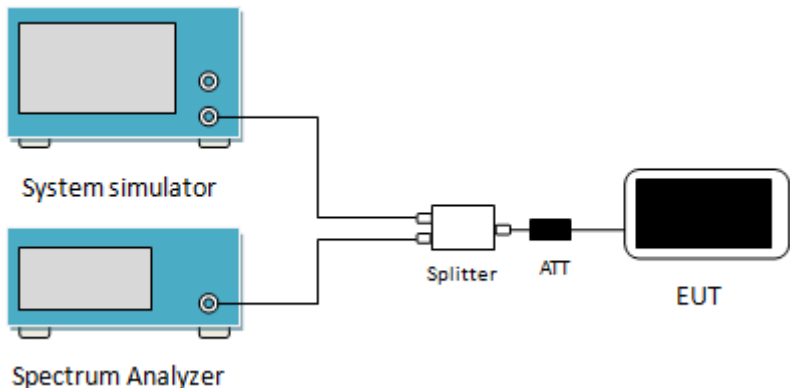Test Requirement:	FCC part 24.232(d)
Test Method	ANSI/TIA-603-D 2010
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	 The diagram shows a test setup. On the left, there are two blue rectangular devices: a 'System simulator' on top and a 'Spectrum Analyzer' on the bottom. Both have a single output port. These two ports are connected to a single input port of a 'Splitter' (a white rectangular box). The Splitter has two output ports. One output port is connected to an 'ATT' (Attenuator, a small black rectangular box). The other output port is connected to the 'EUT' (Equipment Under Test, a black rectangular box with rounded corners).
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Modulation	Test channel	PAPR
GSM 850	190	0.07
PCS 1900	661	0.10
UMTS 850 RMC	4183	3.04
UMTS 1900 RMC	9400	3.08

Test plots as below:

Middle channel


GSM 850

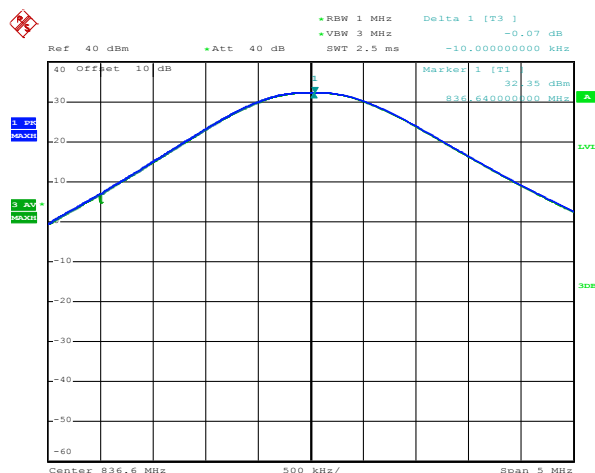

Date: 19.JAN.2018 10:51:00

Middle channel


PCS 1900

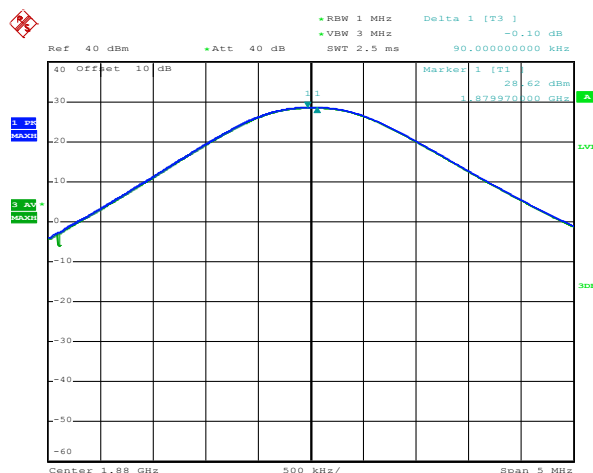

Date: 19.JAN.2018 10:50:09

Middle channel


UMTS 850 RMC

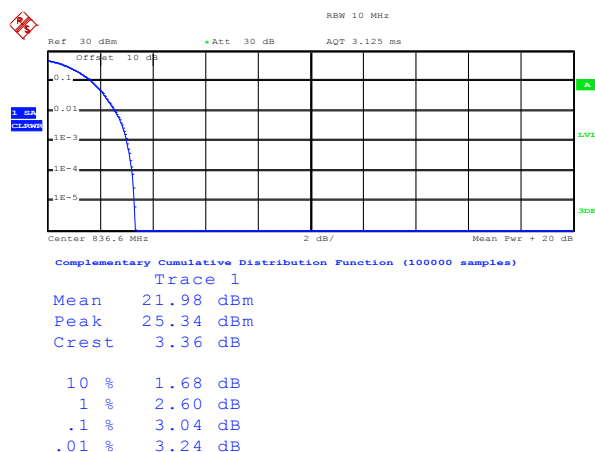

Date: 19.JAN.2018 10:57:42

Middle channel

UMTS 1900 RMC

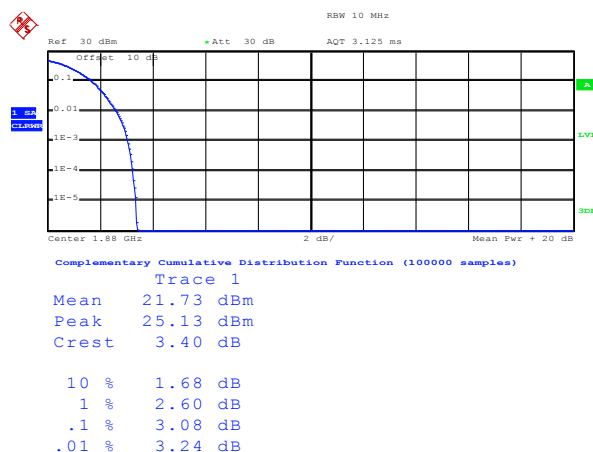


Date: 19.JAN.2018 10:57:18

6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

6.5 Out of band emission at antenna terminals

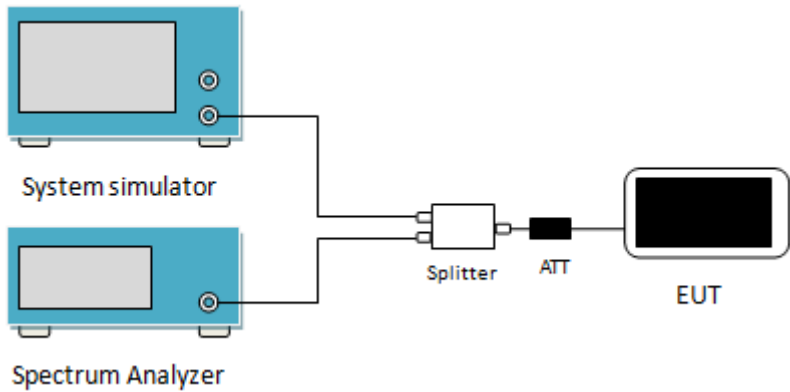
Test Requirement:	FCC part 22.917(a), FCC part 24.238(a)
Test Method:	ANSI/TIA-603-D 2010
Limit:	-13dBm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. A cable connects the output of the System simulator to a 'Splitter' (a white rectangular unit with two ports). From the other port of the Splitter, a cable goes to an 'ATT' (Attenuator, a small black rectangular unit). Finally, a cable connects the ATT to the 'EUT' (Equipment Under Test, represented by a black rectangular unit with rounded corners).
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows:

Spurious emission:


GSM 850

Lowest Channel

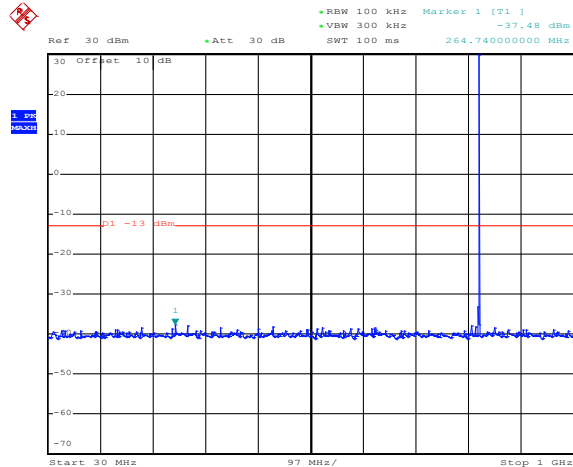

Date: 19.JAN.2018 10:40:01


30MHz~1GHz

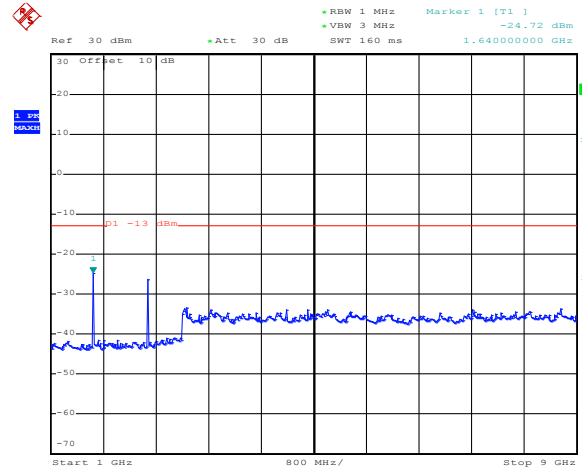

Date: 19.JAN.2018 10:37:58


1GHz~9GHz

Middle channel

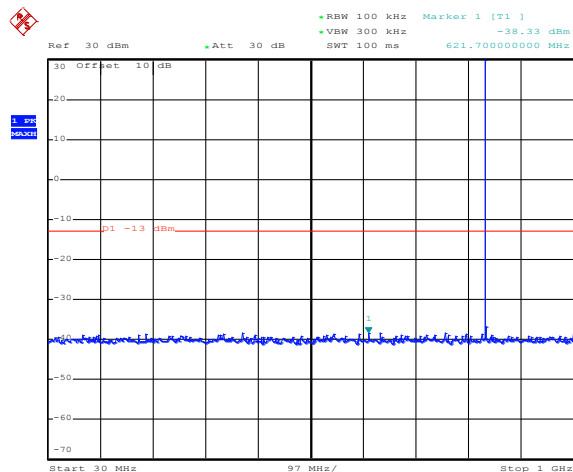

Date: 19.JAN.2018 10:40:53


30MHz~1GHz

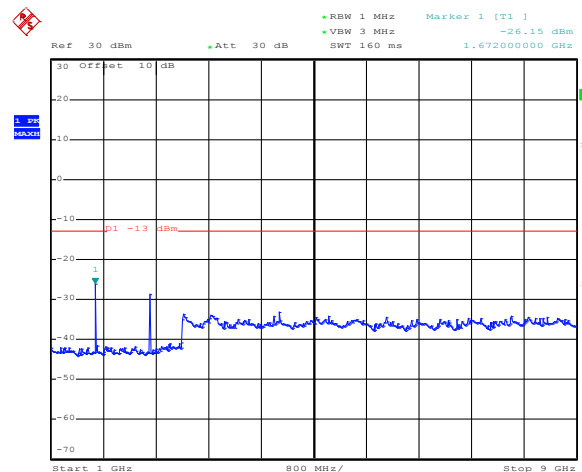

Date: 19.JAN.2018 10:38:17


1GHz~9GHz

Highest Channel

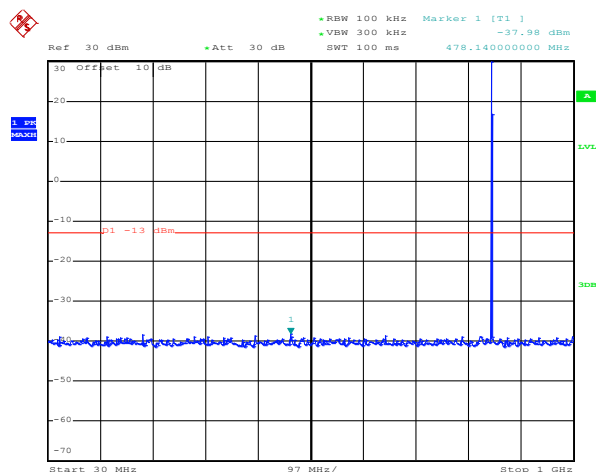

Date: 19.JAN.2018 10:41:28

30MHz~1GHz

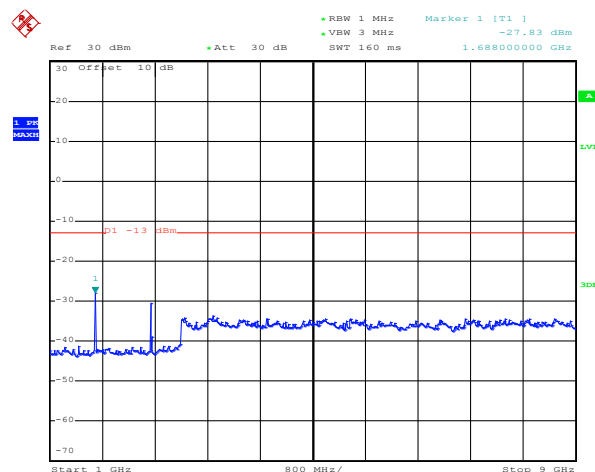


Date: 19.JAN.2018 10:38:40

1GHz~9GHz


PCS 1900

Lowest Channel

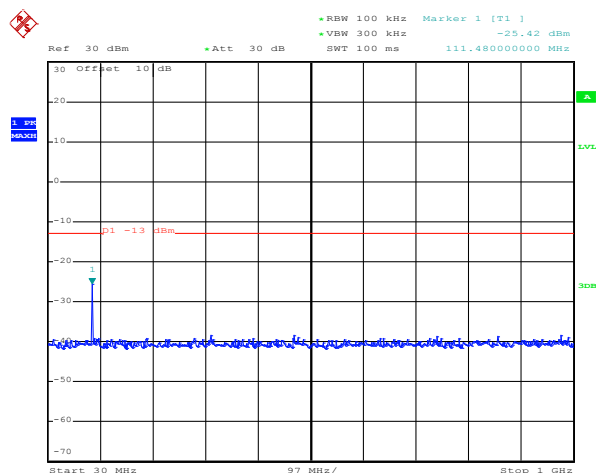

Date: 19.JAN.2018 10:32:20


30MHz~1GHz

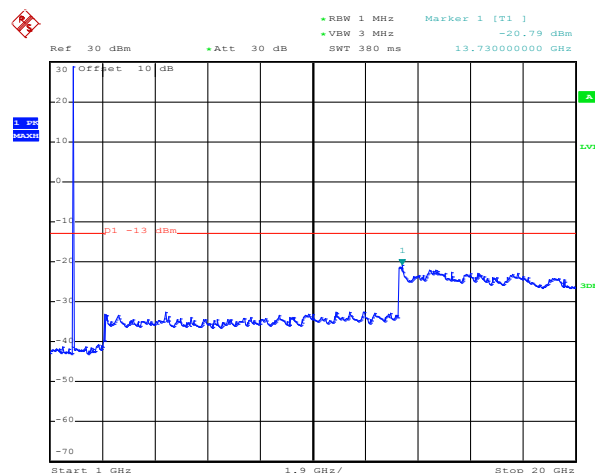

Date: 19.JAN.2018 10:34:27


1GHz~20GHz

Middle Channel

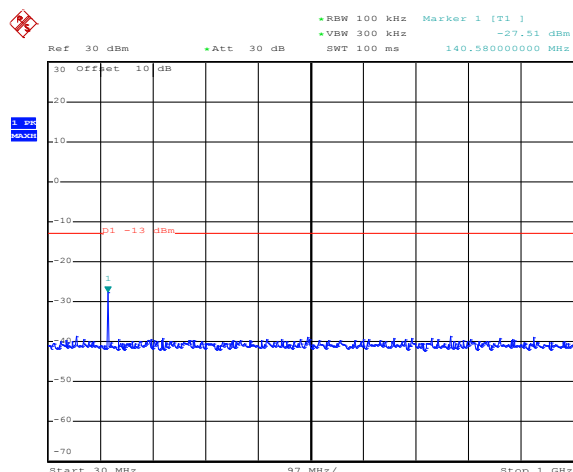

Date: 19.JAN.2018 10:32:41


30MHz~1GHz

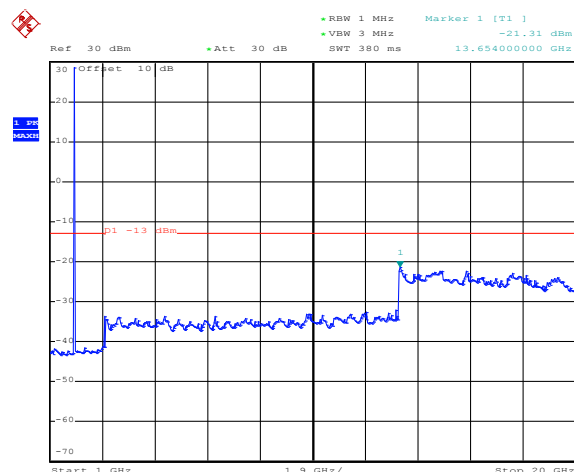

Date: 19.JAN.2018 10:35:55


1GHz~20GHz

Highest Channel

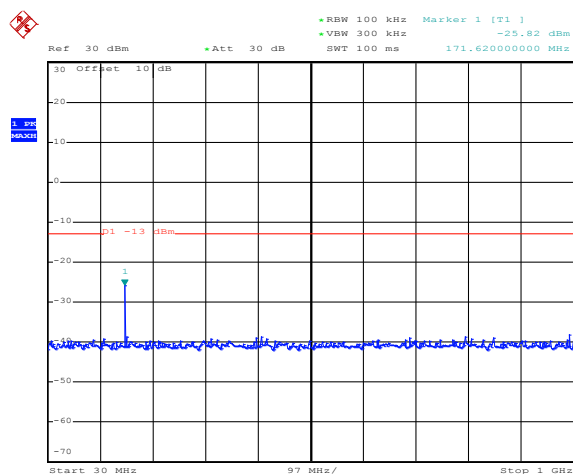

Date: 19.JAN.2018 10:32:58

30MHz~1GHz

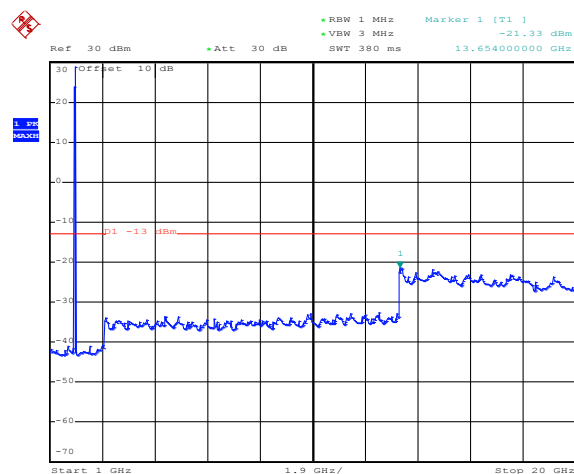


Date: 19.JAN.2018 10:37:04

1GHz~20GHz


UMTS 850 12.2k RMC

Lowest Channel

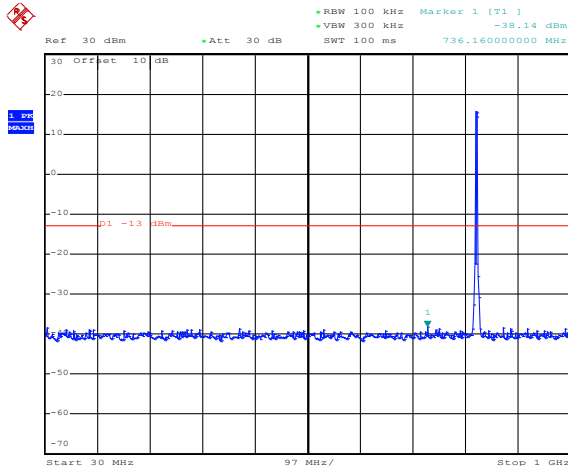

Date: 19.JAN.2018 11:16:00


30MHz~1GHz

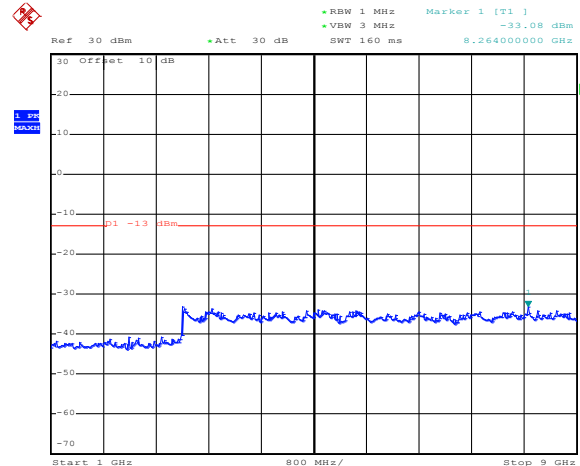

Date: 19.JAN.2018 11:12:14


1GHz~9GHz

Middle Channel

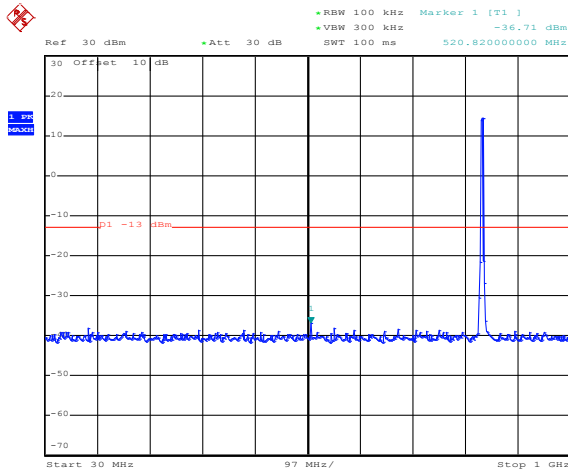

Date: 19.JAN.2018 11:16:34


30MHz~1GHz

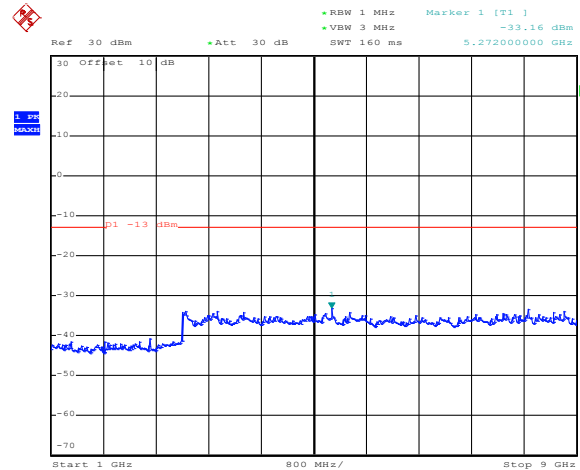

Date: 19.JAN.2018 11:12:35


1GHz~9GHz

Highest Channel

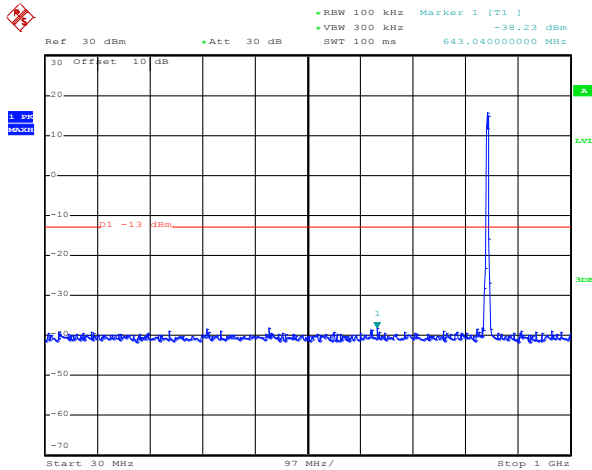

Date: 19.JAN.2018 11:17:07

30MHz~1GHz

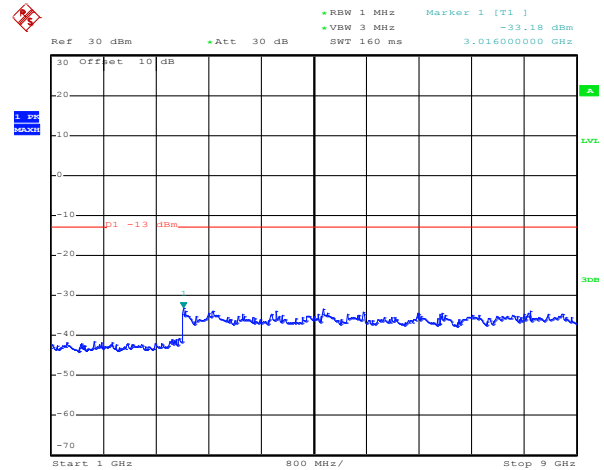


Date: 19.JAN.2018 11:12:55

1GHz~9GHz


UMTS 1900 12.2k RMC

Lowest Channel

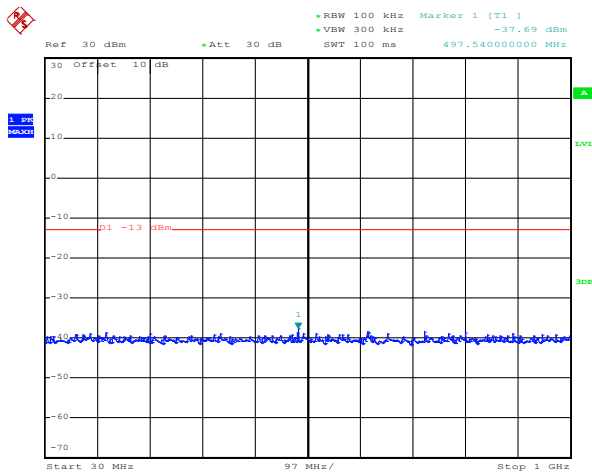

Date: 19.JAN.2018 11:07:20


30MHz~1GHz

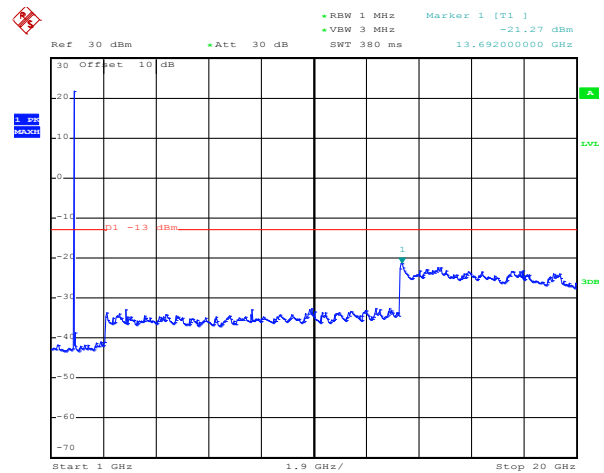

Date: 19.JAN.2018 11:09:27


1GHz~20GHz

Middle Channel

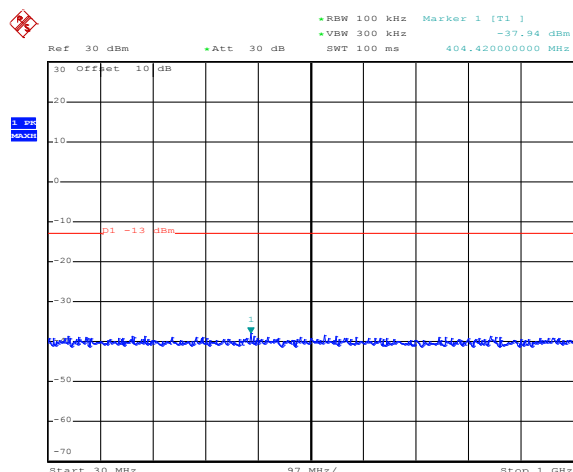

Date: 19.JAN.2018 11:08:15


30MHz~1GHz

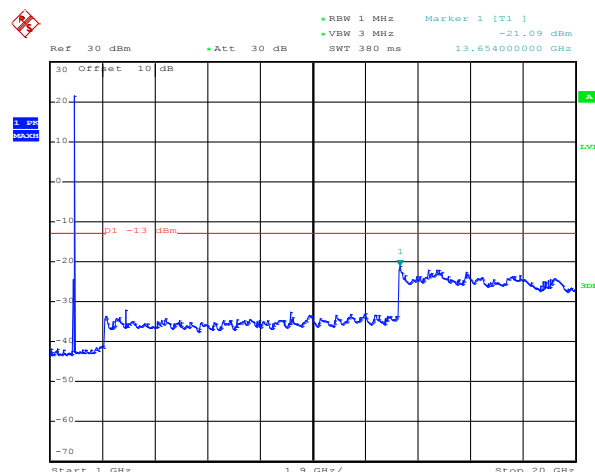

Date: 19.JAN.2018 11:10:04


1GHz~20GHz

Highest Channel

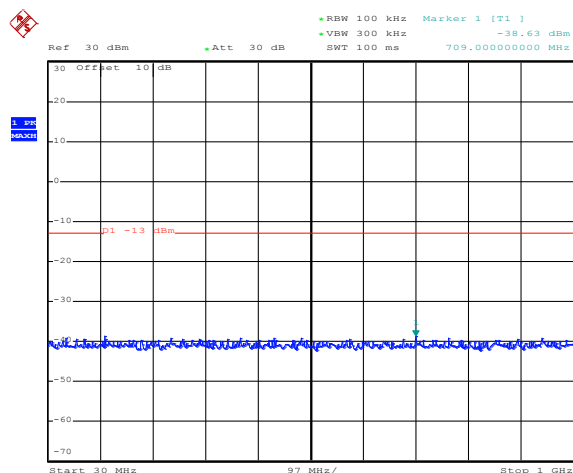

Date: 19.JAN.2018 11:08:36

30MHz~1GHz

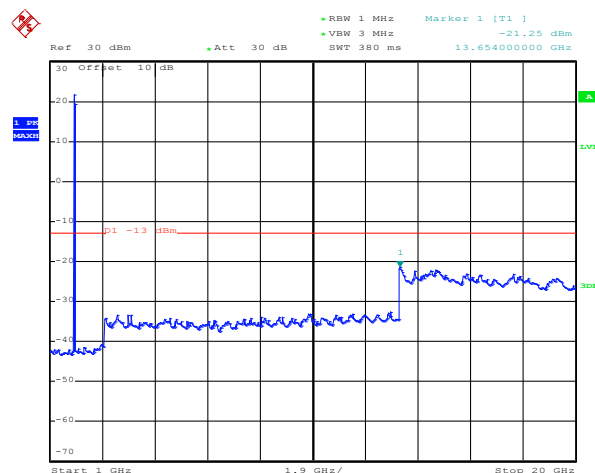


Date: 19.JAN.2018 11:10:49

1GHz~20GHz


Band edge emission:

GSM850

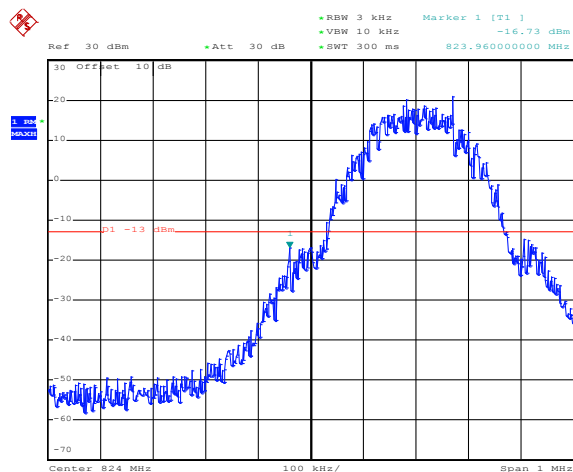

Date: 19.JAN.2018 10:27:57


Lowest channel

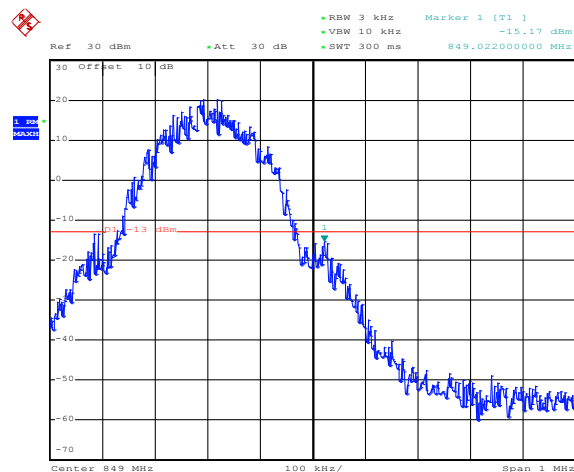

Date: 19.JAN.2018 10:29:03


Highest channel

PCS1900

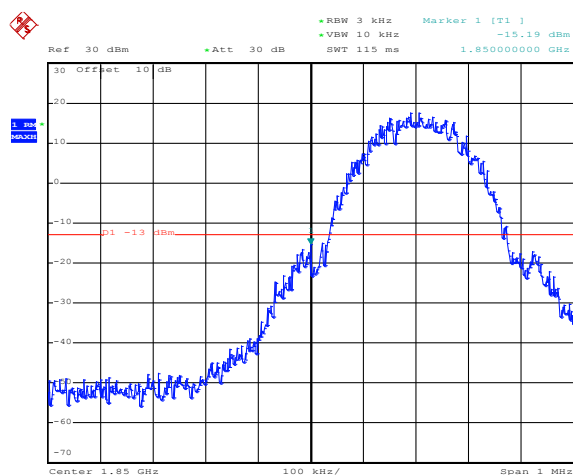

Date: 19.JAN.2018 10:30:16


Lowest channel

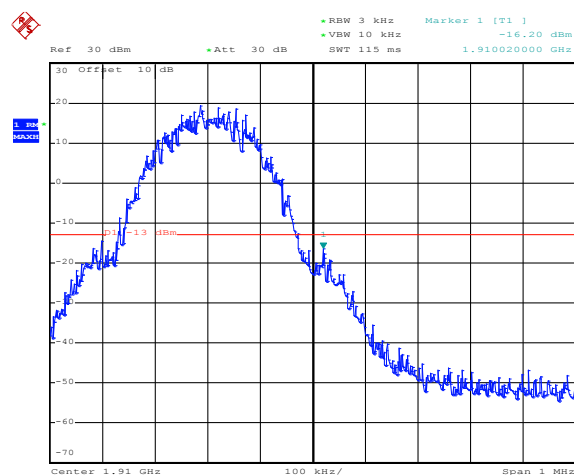

Date: 19.JAN.2018 10:30:47


Highest channel

UMTS 850 RMC 12.2kbps

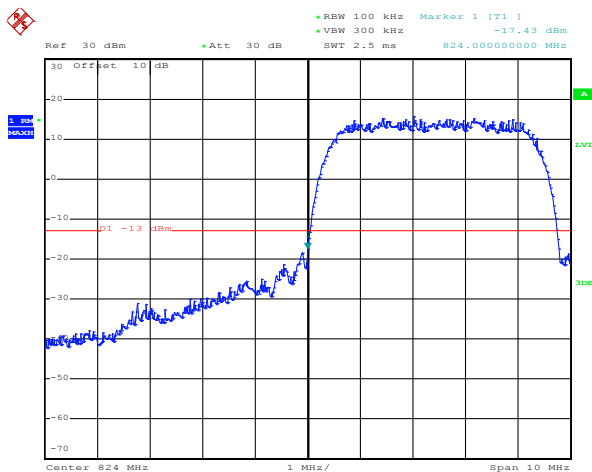

Date: 19.JAN.2018 11:19:52


Lowest channel

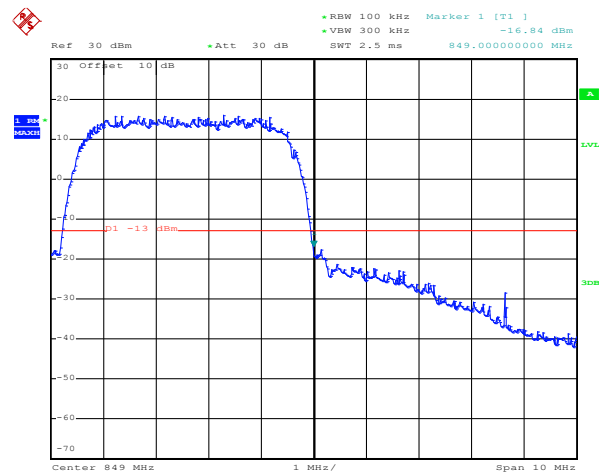

Date: 19.JAN.2018 11:20:51


Highest channel

UMTS 1900 RMC 12.2kbps

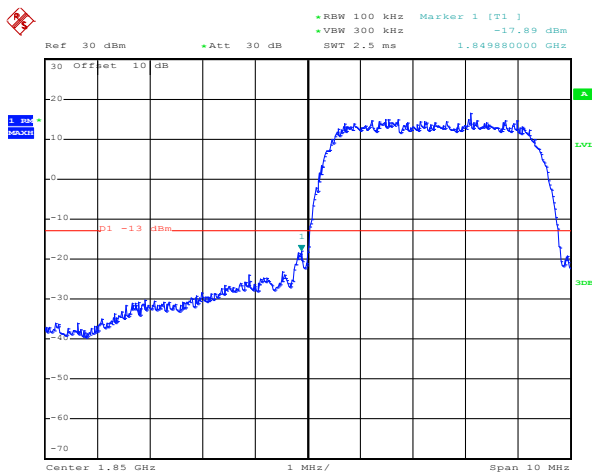

Date: 19.JAN.2018 11:21:56



Lowest channel

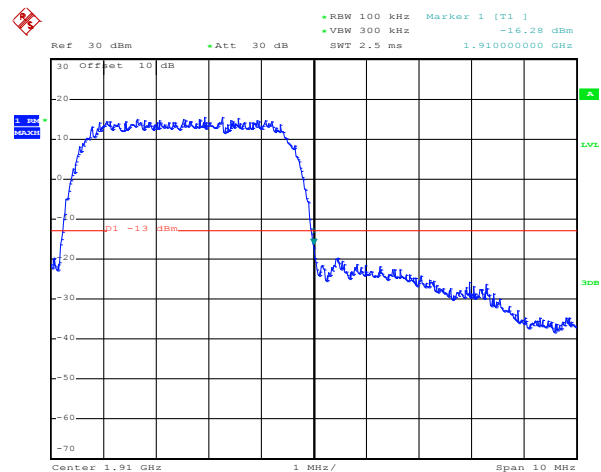

Date: 19.JAN.2018 11:22:34

Highest channel

6.6 ERP, EIRP Measurement

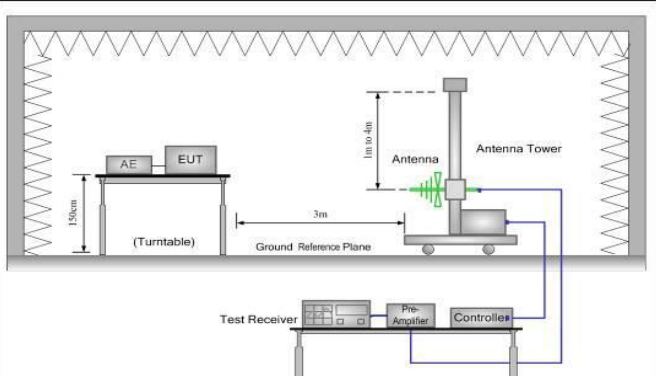
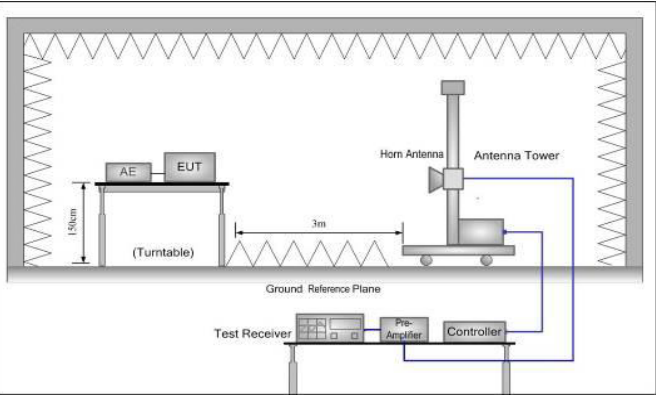
Test Requirement:	FCC part 22.913(a)(2), FCC part 24.232(c)
Test Method:	ANSI/TIA-603-D 2010
Limit:	GSM850 7W: ERP, PCS1900 2W: EIRP UMTS 850: 7W ERP, UMTS1900: 2W EIRP
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$ 5. The worse case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case):

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850	128	H	V	25.75	38.45	Pass
			H	24.87		
UMTS 850 12.2k RMC	4183	H	V	22.62		
			H	21.47		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
PCS1900	810	H	V	26.14	33.00	Pass
			H	23.25		
UMTS 1900 12.2k RMC	9262	H	V	23.19		
			H	20.17		

6.7 Field strength of spurious radiation measurement

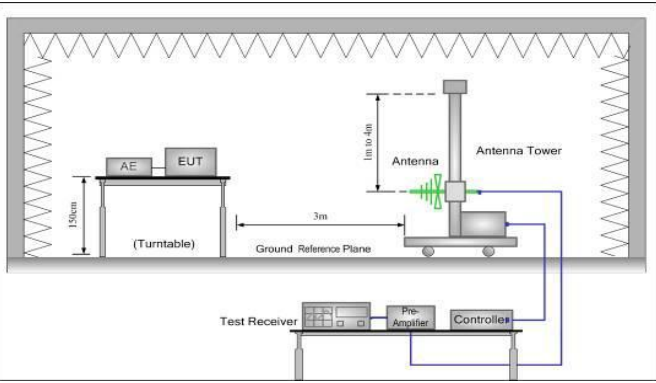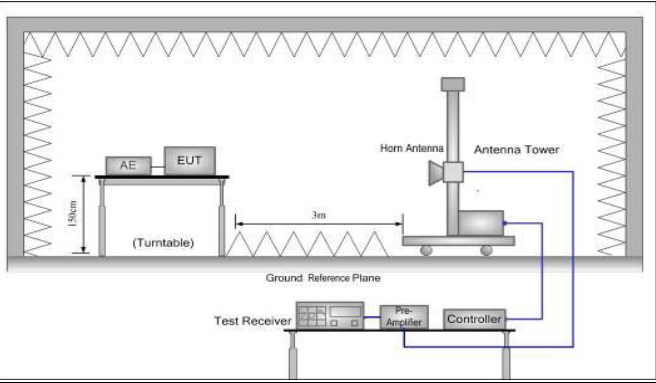Test Requirement:	FCC part 22.917(a), FCC part 24.238(a)
Test Method:	ANSI/TIA-603-D 2010
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed

Measurement Data (worst case):

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-28.12	-13.00	Pass
2472.60	V	-33.45		
3296.80	V	-43.78		
1648.40	Horizontal	-38.57	-13.00	Pass
2472.60	H	-36.86		
3296.80	H	-43.73		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-28.39	-13.00	Pass
2509.80	V	-41.55		
3346.40	V	-48.92		
1673.20	Horizontal	-37.56	-13.00	Pass
2509.80	H	-40.72		
3346.40	H	-43.58		
Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-31.66	-13.00	Pass
2546.40	V	-47.52		
3395.20	V	-47.23		
1697.60	Horizontal	-33.45	-13.00	Pass
2546.40	H	-46.39		
3395.20	H	-43.85		

Remark:

1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-36.12	-13.00	Pass
5550.60	V	-28.47		
3700.40	Horizontal	-28.69	-13.00	Pass
5550.60	H	-36.57		
Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-35.24	-13.00	Pass
5640.00	V	-31.43		
3760.00	Horizontal	-30.25	-13.00	Pass
5640.00	H	-37.42		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-28.56	-13.00	Pass
5729.40	V	-32.42		
3819.60	Horizontal	-33.12	-13.00	Pass
5729.40	H	-31.47		

Remark:

1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA BAND V 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-49.56	-13.00	Pass
2479.20	V	-47.25		
1652.80	Horizontal	-52.34	-13.00	Pass
2479.20	H	-48.15		
Test mode:	WCDMA BAND V 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-49.68	-13.00	Pass
2509.80	V	-48.25		
1673.20	Horizontal	-54.36	-13.00	Pass
2509.80	H	-48.75		
Test mode:	WCDMA BAND V 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-50.36	-13.00	Pass
2539.80	V	-48.15		
1693.20	Horizontal	-49.69	-13.00	Pass
2539.80	H	-47.53		

Remark:


1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-34.46	-13.00	Pass
5557.20	V	-36.21		
3704.80	Horizontal	-33.21		
5557.20	H	-34.12		
Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-32.45	-13.00	Pass
5640.00	V	-37.81		
3760.00	Horizontal	-36.56		
5640.00	H	-36.12		
Test mode:	WCDMA Band II 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-36.56	-13.00	Pass
5722.80	V	-42.17		
3815.20	Horizontal	-37.12		
5722.80	H	-42.52		

Remark:

1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

6.8 Frequency stability V.S. Temperature measurement

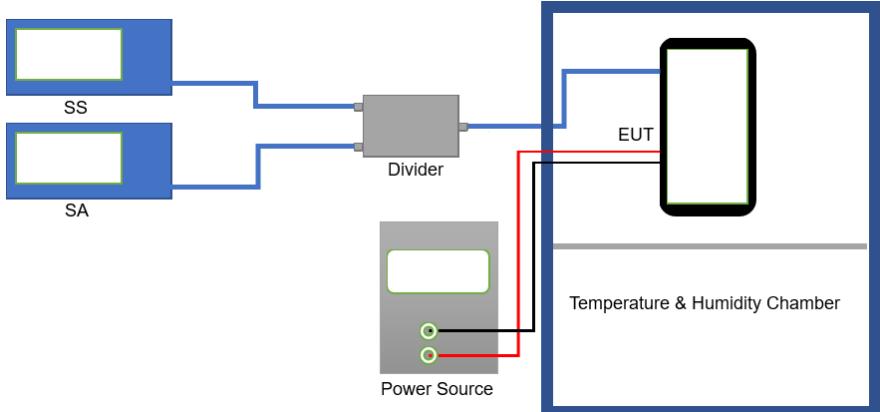Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(a)(1)(b)
Test Method:	ANSI/TIA-6-3-D 2010
Limit:	±2.5 ppm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular blocks labeled 'SS' (Signal Source) and 'SA' (Spectrum Analyzer). They are connected to a central grey block labeled 'Divider'. The output of the 'Divider' is connected to a black rectangular block labeled 'EUT' (Equipment Under Test) which is located inside a larger blue rectangular box labeled 'Temperature & Humidity Chamber'. Below the 'Divider' is a grey block labeled 'Power Source' with two green circles. Red lines connect the 'Power Source' to the 'EUT'.
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):


Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	199	0.237868	±2.5	Pass
	-20	181	0.216352		
	-10	197	0.235477		
	0	144	0.172125		
	10	171	0.204399		
	20	180	0.215157		
	30	126	0.150610		
	40	133	0.158977		
	50	105	0.125508		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	194	0.103191	±2.5	Pass
	-20	151	0.080319		
	-10	181	0.096277		
	0	175	0.093085		
	10	133	0.070745		
	20	180	0.095745		
	30	170	0.090426		
	40	144	0.076596		
	50	116	0.061702		

Note: Only the worst case shown in the report.

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	196	0.234282	±2.5	Pass
	-20	181	0.216352		
	-10	190	0.227110		
	0	165	0.197227		
	10	141	0.168539		
	20	171	0.204399		
	30	130	0.155391		
	40	125	0.149414		
	50	109	0.130289		
Reference Frequency: WCDMA BAND II 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	198	0.105319	±2.5	Pass
	-20	123	0.065426		
	-10	165	0.087766		
	0	188	0.100000		
	10	190	0.101064		
	20	144	0.076596		
	30	171	0.090957		
	40	105	0.055851		
	50	118	0.062766		

Note: Only the worst case shown in the report.

6.9 Frequency stability V.S. Voltage measurement

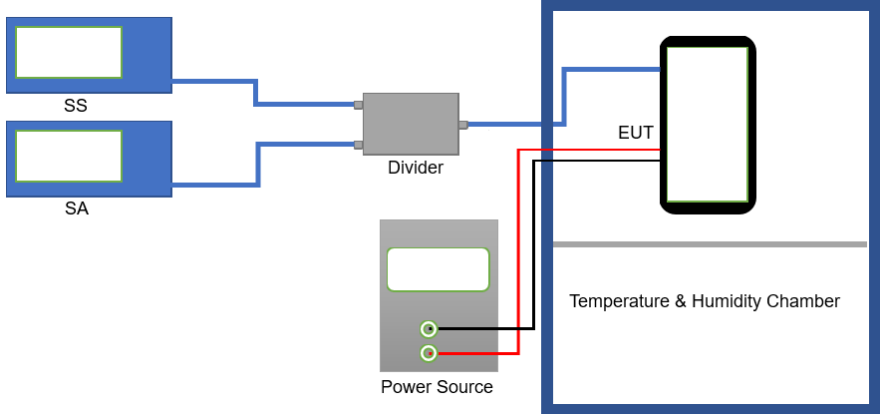Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(d)(2)
Test Method:	ANSI/TIA-603-D 2010
Limit:	$\pm 2.5\text{ppm}$
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue boxes labeled 'SS' (Signal Source) and 'SA' (Spectrum Analyzer). They are connected to a central grey box labeled 'Divider'. The 'Divider' is connected to a black box labeled 'EUT' (Equipment Under Test) which is located inside a larger blue box labeled 'Temperature & Humidity Chamber'. Below the 'Divider' is a grey box labeled 'Power Source' with two green indicator lights. Red and black wires connect the 'Power Source' to the 'EUT'.
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.20	99	0.118336	±2.5	Pass
	3.70	80	0.095625		
	3.50	63	0.075305		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.20	84	0.044681	±2.5	Pass
	3.70	70	0.037234		
	3.50	99	0.052660		
Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.20	68	0.081281	±2.5	Pass
	3.70	90	0.107578		
	3.50	74	0.088453		
Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.20	91	0.048404	±2.5	Pass
	3.70	80	0.042553		
	3.50	67	0.035638		

Note: Only the worst case shown in the report.