



# TEST REPORT

Applicant Name : Inrico Technologies Co., Ltd  
Address : 3/F, Building No.118, High Tech Industrial Park, 72 Guowei Road, Luohu District, Shenzhen, China  
Report Number : SZGMA210719-29774E-RF-00BA1  
FCC ID: 2AIV6-2-S300

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Smart Phone  
Model No.: S300  
Trade Mark: Inrico  
Date Received: 2021/07/19  
Date of Test: 2021/07/26~2021/10/21  
Report Date: 2021/11/29

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Black Ding*

Black Ding  
EMC Engineer

## Approved By:

*Candy Li*

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	7
EUT EXERCISE SOFTWARE .....	7
DUTY CYCLE .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP .....	11
<b>SUMMARY OF TEST RESULTS .....</b>	<b>13</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>14</b>
<b>FCC§15.247 (I), §1.1307 (B) (1) &amp; §2.1093 – RF EXPOSURE .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
ANTENNA CONNECTOR CONSTRUCTION .....	17
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP .....	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE .....	18
TRANSD FACTOR & MARGIN CALCULATION.....	19
TEST DATA .....	19
<b>FCC §15.209, §15.205 &amp; §15.247(D) - SPURIOUS EMISSIONS.....</b>	<b>22</b>
APPLICABLE STANDARD .....	22
EUT SETUP .....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	23
TEST PROCEDURE .....	23
FACTOR & MARGIN CALCULATION .....	23
TEST DATA .....	23
<b>FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH .....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST PROCEDURE .....	32
TEST DATA .....	32
<b>FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>42</b>
APPLICABLE STANDARD .....	42
TEST PROCEDURE .....	42
TEST DATA .....	42

<b>FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>44</b>
APPLICABLE STANDARD .....	44
TEST PROCEDURE .....	44
TEST DATA .....	44
<b>FCC §15.247(E) - POWER SPECTRAL DENSITY.....</b>	<b>50</b>
APPLICABLE STANDARD .....	50
TEST PROCEDURE .....	50
TEST DATA .....	50

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2472MHz
Maximum Conducted Peak Output Power	BLE: 0.47dBm Wi-Fi: 7.46dBm
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	1.5dBi(provided by the applicant)
Voltage Range	DC5V from adapter or DC 3.8V From Battery
Sample serial number	SZGMA210719-29774E-RFA1-S1 (CE&RE) SZGMA210719-29774E-RFA1-S2 (RF Conducted Test) (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: HJ-0502000W2-US Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2000mA

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.  
Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode, total 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 7 and 13.

802.11n-HT40 mode was tested with Channel 3, 7 and 11.

### For BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software


EUT was tested in engineering mode and the power level was provided by the manufacturer.

The device was tested with the worst case was performed as below:


Mode	Data rate	Power level*		
		Low channel	Middle channel	High channel
802.11b	1Mbps	9	9	10
802.11g	6Mbps	5	5	5
802.11n-HT20	MCS0	5	5	5
802.11n-HT40	MCS0	5	5	5
BLE	1Mbps	Default		

## Duty cycle

### 802.11b mode

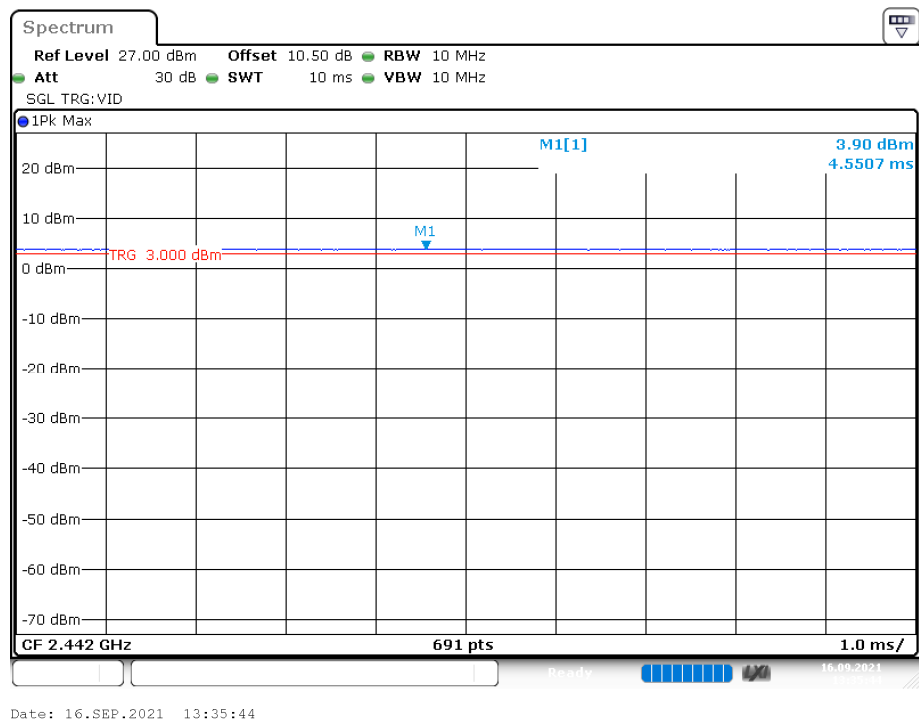


## 802.11g mode

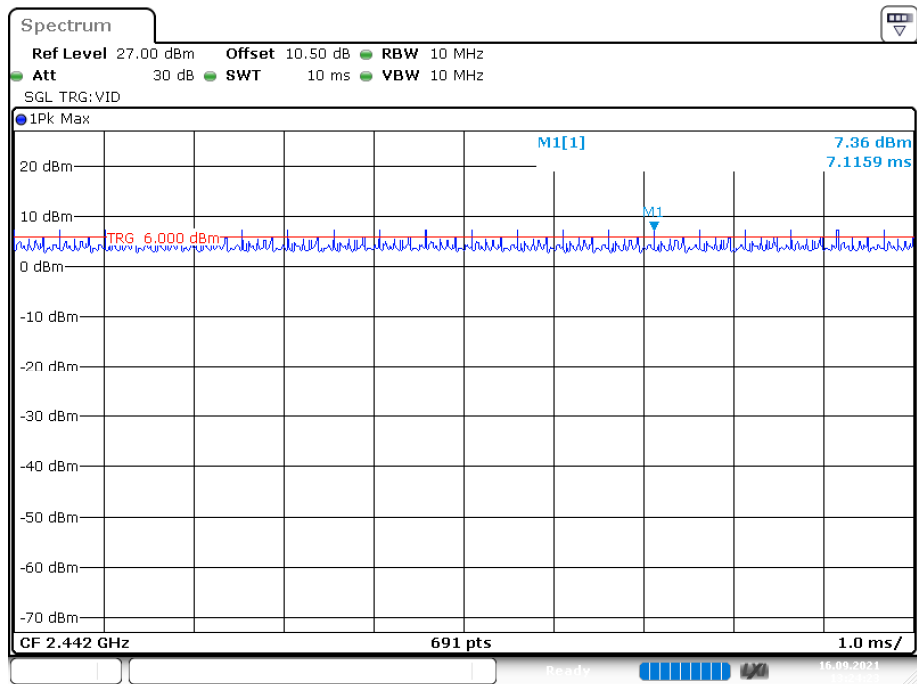

Date: 16.SEP.2021 13:24:23


## 802.11n-HT20 Mode

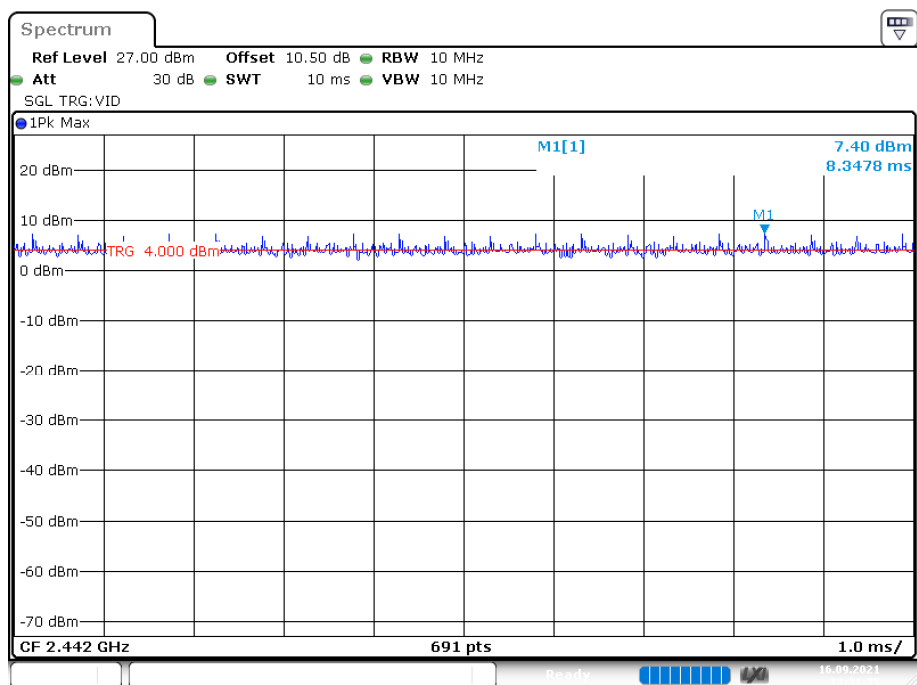

Date: 16.SEP.2021 13:31:35




## 802.11n-HT40 Mode

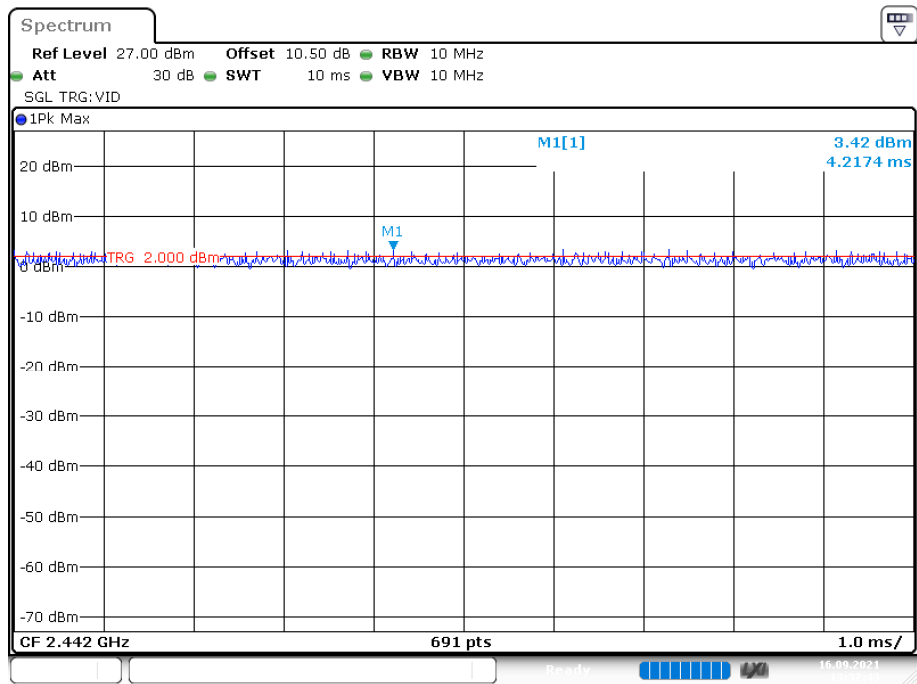

Date: 16.SEP.2021 13:32:43

## BLE

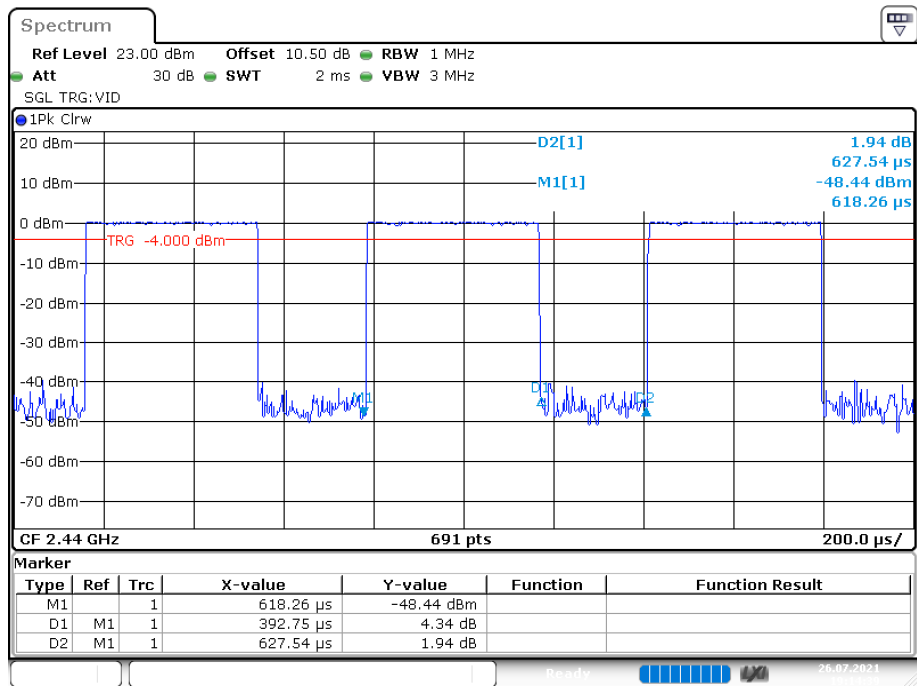

Date: 26.JUL.2021 19:14:39

Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle (%)
802.11b	/	/	100
802.11g	/	/	100
802.11n-HT20	/	/	100
802.11n-HT40	/	/	100
BLE 1M	0.393	0.628	62.58

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	Unknown

### External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable AC Cable	1.2	LISN	Receptacle
Un-shielding Detachable USB Cable	1.0	EUT	Adapter
Un-shielding Detachable Earphone Cable	1.0	EUT	Earphone

**Block Diagram of Test Setup**


For conducted emission

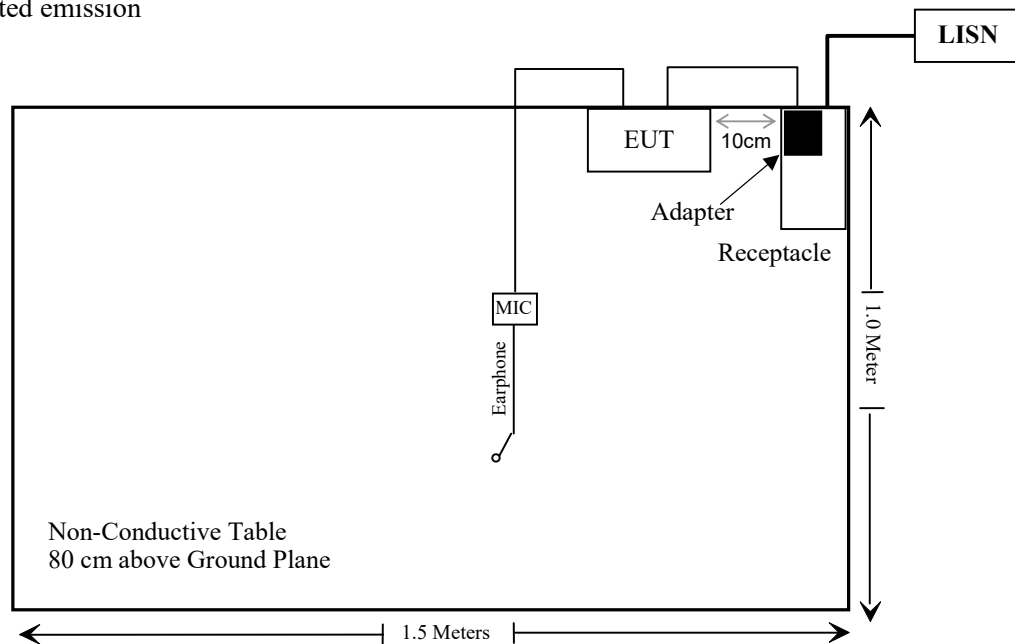

For Radiated Emissions(RE Below 1G)

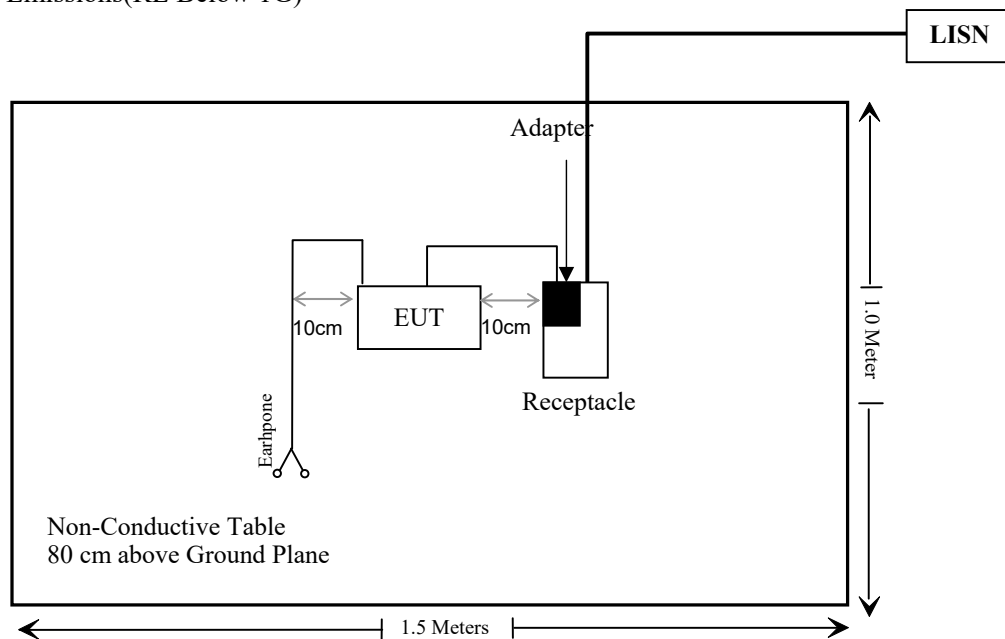

For Radiated Emissions(RE Above 1G)

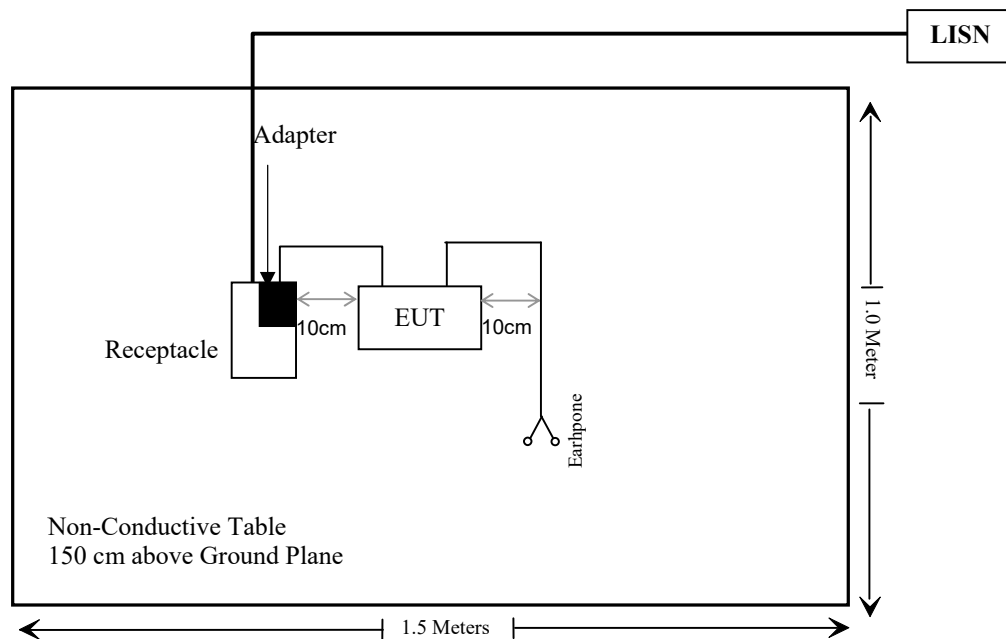

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: ES-K1 V1.71					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Wainwright	High Pass Filter	WHKX3.6/18G-10SS	5	2020/12/25	2021/12/24
Radiated Emission Test Software: EZ EMC V 1.1.4.2					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2020/12/24	2021/12/23
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2020/12/25	2021/12/24

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE**

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

### **Measurement Result**

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
2.4G Wi-Fi	2472	5.0	3.16	5	1.0	3	YES
BLE	2480	1.0	1.26	5	0.4	3	YES

**Result:** Compliant.



## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 1.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

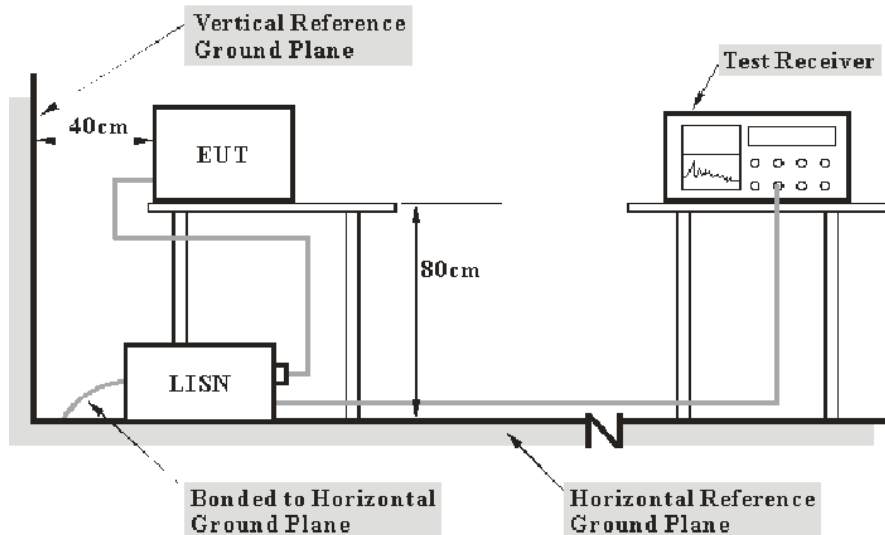

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{level}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$


## Test Data

### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

*The testing was performed by Bin Duan on 2021-10-19.*

*EUT operation mode: Transmitting (Worst case as below)*

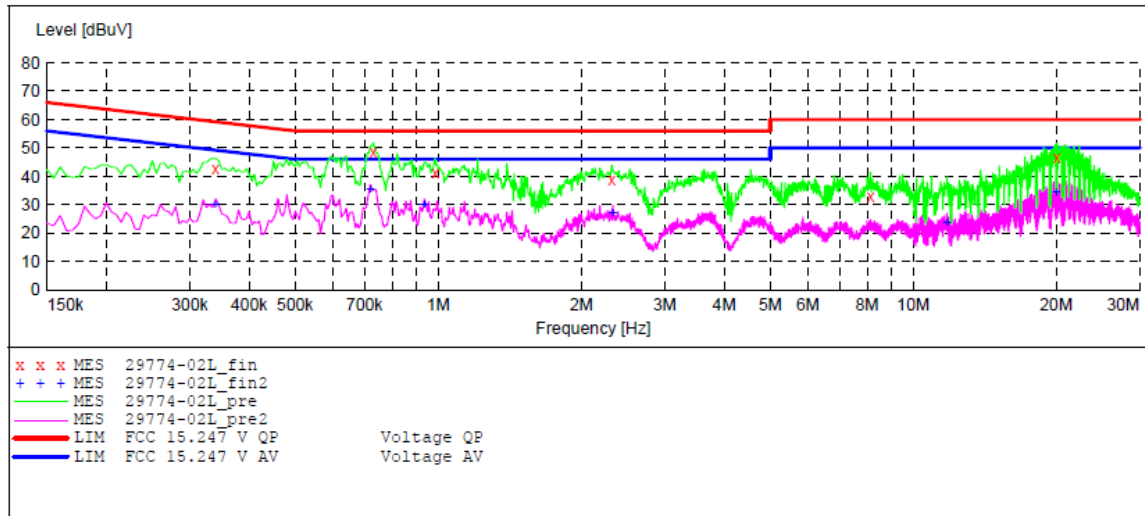**AC 120V/60 Hz, Line****MEASUREMENT RESULT: "29774-02L\_fin"**


2021-10-19 10:56

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.340000	42.60	10.9	59	16.4	QP	L1	GND
0.730000	48.70	11.1	56	7.3	QP	L1	GND
0.985000	41.30	11.1	56	14.7	QP	L1	GND
2.320000	38.90	11.3	56	17.1	QP	L1	GND
8.130000	33.20	11.5	60	26.8	QP	L1	GND
20.075000	46.70	11.7	60	13.3	QP	L1	GND

**MEASUREMENT RESULT: "29774-02L\_fin2"**

2021-10-19 10:56

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.340000	30.10	10.9	49	18.9	AV	L1	GND
0.720000	35.40	11.1	46	10.6	AV	L1	GND
0.935000	30.00	11.1	46	16.0	AV	L1	GND
2.330000	26.90	11.3	46	19.1	AV	L1	GND
11.775000	23.40	11.6	50	26.6	AV	L1	GND
20.025000	34.30	11.7	50	15.7	AV	L1	GND

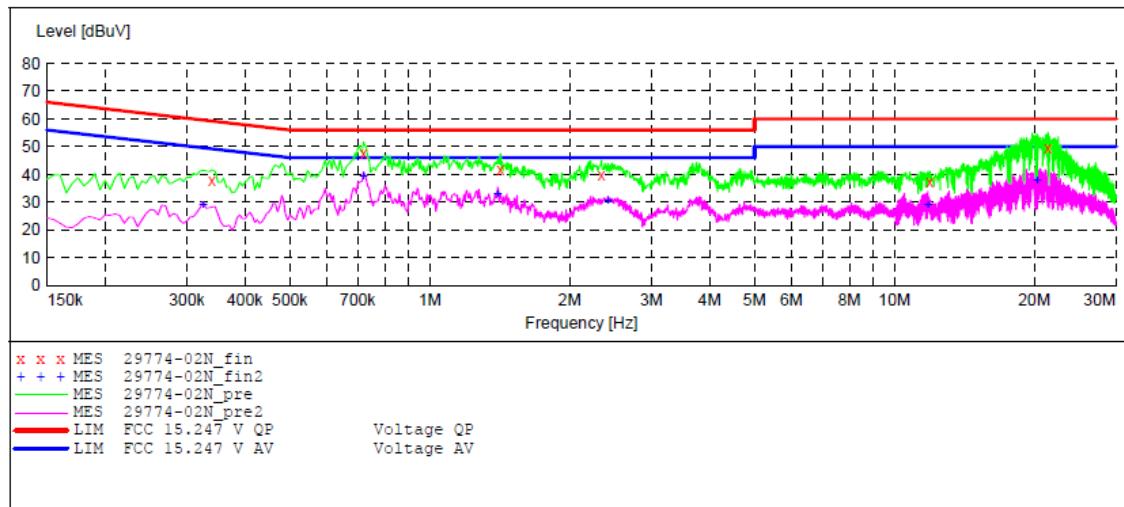**AC 120V/60 Hz, Neutral****MEASUREMENT RESULT: "29774-02N\_fin"**

2021-10-19 10:59

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.340000	37.60	10.9	59	21.4	QP	N	GND
0.720000	47.40	11.1	56	8.6	QP	N	GND
1.420000	41.90	11.2	56	14.1	QP	N	GND
2.340000	39.70	11.3	56	16.3	QP	N	GND
11.925000	37.30	11.6	60	22.7	QP	N	GND
21.400000	49.80	11.7	60	10.2	QP	N	GND

**MEASUREMENT RESULT: "29774-02N\_fin2"**

2021-10-19 10:59

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.325000	28.90	10.9	50	21.1	AV	N	GND
0.720000	39.50	11.1	46	6.5	AV	N	GND
1.400000	32.80	11.2	46	13.2	AV	N	GND
2.420000	30.60	11.3	46	15.4	AV	N	GND
11.800000	29.00	11.6	50	21.0	AV	N	GND
20.275000	37.90	11.7	50	12.1	AV	N	GND


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

Below 1 GHz:

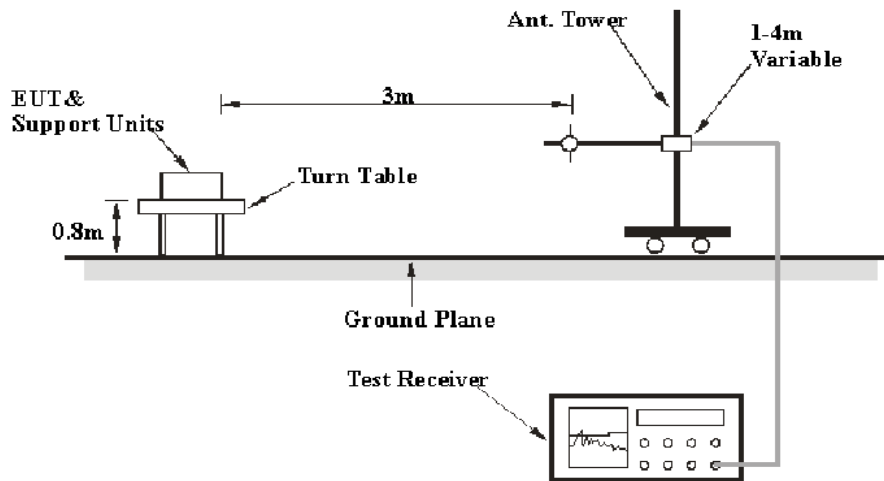

Above 1GHz:

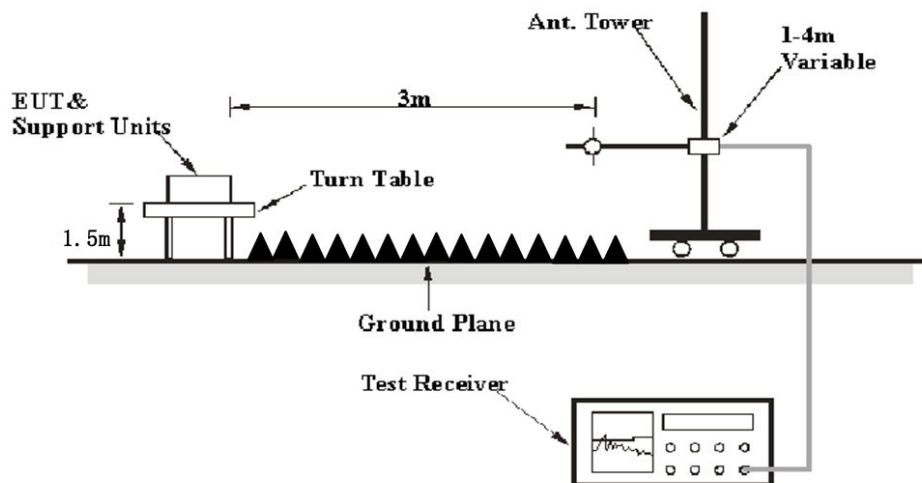

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	> 1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Result} / \text{Corrected Amplitude} &= \text{Reading} + \text{Factor} \end{aligned}$$

## Test Data



### Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chao Mo on 2021-10-16 to 2021-10-21.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz-1GHz: (Worst case is 802.11n40 low channel)

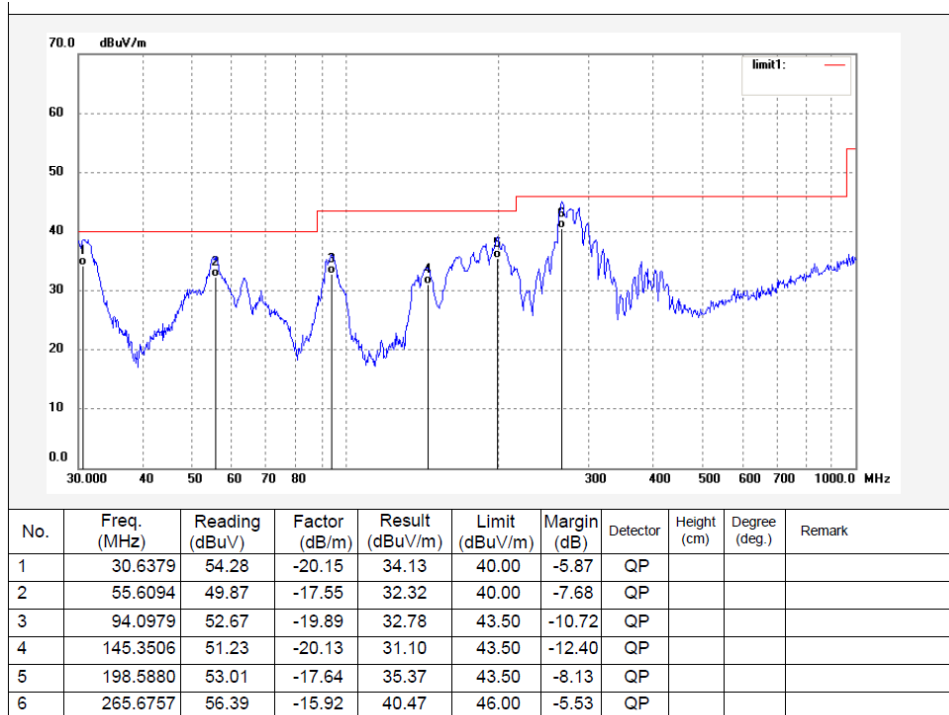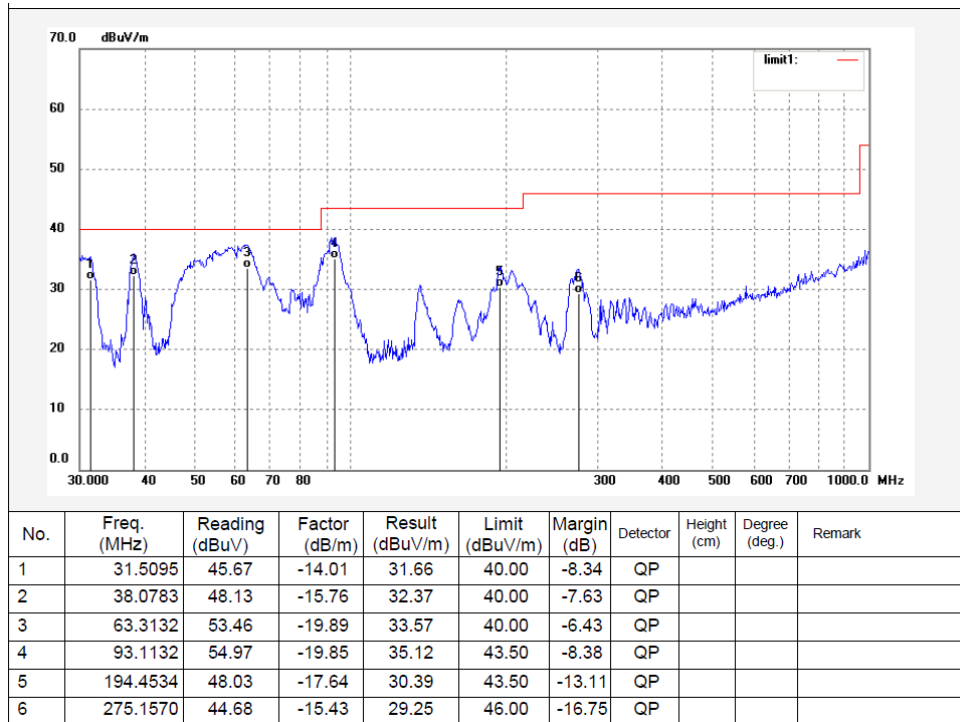**Horizontal****Vertical**



**1-25 GHz:****BLE:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
BLE 1M, Low Channel									
2310	55.53	PK	233	1.0	H	-6.84	48.69	74	-25.31
2310	57.2	PK	216	1.7	V	-6.84	50.36	74	-23.64
2390	57.53	PK	170	2.1	H	-6.44	51.09	74	-22.91
2390	59.33	PK	191	1.6	V	-6.44	52.89	74	-21.11
4804	39.67	PK	315	1.5	H	2.81	42.48	74	-31.52
4804	40.76	PK	33	1.4	V	2.81	43.57	74	-30.43
BLE 1M, Middle Channel									
4880	40.75	PK	173	1.4	H	3.04	43.79	74	-30.21
4880	42.32	PK	178	1.0	V	3.04	45.36	74	-28.64
BLE 1M, High Channel									
2483.5	56.84	PK	186	1.4	H	-5.96	50.88	74	-23.12
2483.5	57.28	PK	213	1.3	H	-5.96	51.32	74	-22.68
2500	54.55	PK	213	1.3	V	-5.96	48.59	74	-25.41
2500	54.32	PK	179	1.3	V	-5.96	48.36	74	-25.64
4960	42.07	PK	78	2.1	H	3.29	45.36	74	-28.64
4960	43.05	PK	112	2.1	V	3.29	46.34	74	-27.66

**Wi-Fi:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	55.53	PK	42	1.2	H	-6.84	48.69	74	-25.31
2310	56.22	PK	335	1.5	V	-6.84	49.38	74	-24.62
2390	57.27	PK	356	2.0	H	-6.44	50.83	74	-23.17
2390	58.11	PK	133	1.3	V	-6.44	51.67	74	-22.33
4824	41.29	PK	10	1.5	H	2.87	44.16	74	-29.84
4824	42.03	PK	127	1.5	V	2.87	44.9	74	-29.1
802.11B, Middle Channel									
4884	42.4	PK	329	2.1	H	3.04	45.44	74	-28.56
4884	43.53	PK	179	1.6	V	3.04	46.57	74	-27.43
802.11B, High Channel									
2483.5	57.85	PK	181	2.0	H	-5.96	51.89	74	-22.11
2483.5	58.88	PK	208	2.1	V	-5.96	52.92	74	-21.08
2500	54.18	PK	166	1.7	H	-5.88	48.3	74	-25.7
2500	52.97	PK	95	1.7	V	-5.88	47.09	74	-26.91
4944	42.68	PK	317	1.8	H	3.23	45.91	74	-28.09
4944	42.04	PK	237	1.1	V	3.23	45.27	74	-28.73

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11G, Low Channel									
2310	57	PK	256	1.3	H	-6.84	50.16	74	-23.84
2310	56.17	PK	98	1.2	V	-6.84	49.33	74	-24.67
2390	56.7	PK	257	2.1	H	-6.44	50.26	74	-23.74
2390	58.28	PK	296	1.1	V	-6.44	51.84	74	-22.16
4824	42.41	PK	358	1.2	H	2.87	45.28	74	-28.72
4824	43.04	PK	18	1.1	V	2.87	45.91	74	-28.09
802.11G, Middle Channel									
4884	43.32	PK	256	1.2	H	3.04	46.36	74	-27.64
4884	42.92	PK	60	1.8	V	3.04	45.96	74	-28.04
802.11G, High Channel									
2483.5	56.59	PK	341	1.4	H	-5.96	50.63	74	-23.37
2483.5	56.55	PK	38	1.2	V	-5.96	50.59	74	-23.41
2500	54.2	PK	344	1.7	H	-5.88	48.32	74	-25.68
2500	55.22	PK	314	1.7	V	-5.88	49.34	74	-24.66
4944	41.06	PK	24	1.3	H	3.23	44.29	74	-29.71
4944	41.73	PK	57	1.9	V	3.23	44.96	74	-29.04

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11N20, Low Channel									
2310	54.1	PK	272	1.7	H	-6.84	47.26	74	-26.74
2310	53.33	PK	250	1.4	V	-6.84	46.49	74	-27.51
2390	55.13	PK	192	2.2	H	-6.44	48.69	74	-25.31
2390	55.47	PK	201	2.2	V	-6.44	49.03	74	-24.97
4824	42.08	PK	235	1.6	H	2.87	44.95	74	-29.05
4824	42.3	PK	156	2.1	V	2.87	45.17	74	-28.83
802.11N20, Middle Channel									
4884	42.65	PK	131	1.5	H	3.04	45.69	74	-28.31
4884	43.47	PK	116	2.1	V	3.04	46.51	74	-27.49
802.11N20, High Channel									
2483.5	54.17	PK	300	1.3	H	-5.96	48.21	74	-25.79
2483.5	54.87	PK	35	1.7	V	-5.96	48.91	74	-25.09
2500	53.14	PK	181	2.2	H	-5.88	47.26	74	-26.74
2500	54.51	PK	20	1.2	V	-5.88	48.63	74	-25.37
4944	42	PK	260	1.2	H	3.23	45.23	74	-28.77
4944	43.31	PK	195	1.6	V	3.23	46.54	74	-27.46

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11N40, Low Channel									
2310	57.7	PK	68	1.8	H	-6.84	50.86	74	-23.14
2310	58.38	PK	251	1.6	V	-6.84	51.54	74	-22.46
2390	59.35	PK	302	1.3	H	-6.44	52.91	74	-21.09
2390	57.97	PK	94	1.3	V	-6.44	51.53	74	-22.47
4844	44.29	PK	359	2.1	H	2.92	47.21	74	-26.79
4844	45.72	PK	227	1.0	V	2.92	48.64	74	-25.36
802.11N40, Middle Channel									
4884	42.22	PK	354	1.5	H	3.04	45.26	74	-28.74
4884	43.53	PK	86	1.7	V	3.04	46.57	74	-27.43
802.11N40, High Channel									
2483.5	54.83	PK	90	1.4	H	-5.96	48.87	74	-25.13
2483.5	53.84	PK	75	2.2	V	-5.96	47.88	74	-26.12
2500	53.54	PK	142	1.9	H	-5.88	47.66	74	-26.34
2500	52.86	PK	118	1.8	V	-5.88	46.98	74	-27.02
4924	42.72	PK	17	1.7	H	3.17	45.89	74	-28.11
4924	43.34	PK	336	1.4	V	3.17	46.51	74	-27.49

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude (Absolute Level) = Corrected Factor + Reading


Margin = Corrected Amplitude (Absolute Level) - Limit

The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak value were recorded.

1-18 GHz:

Pre-scan for Peak  
802.11B Middle Channel  
Horizontal

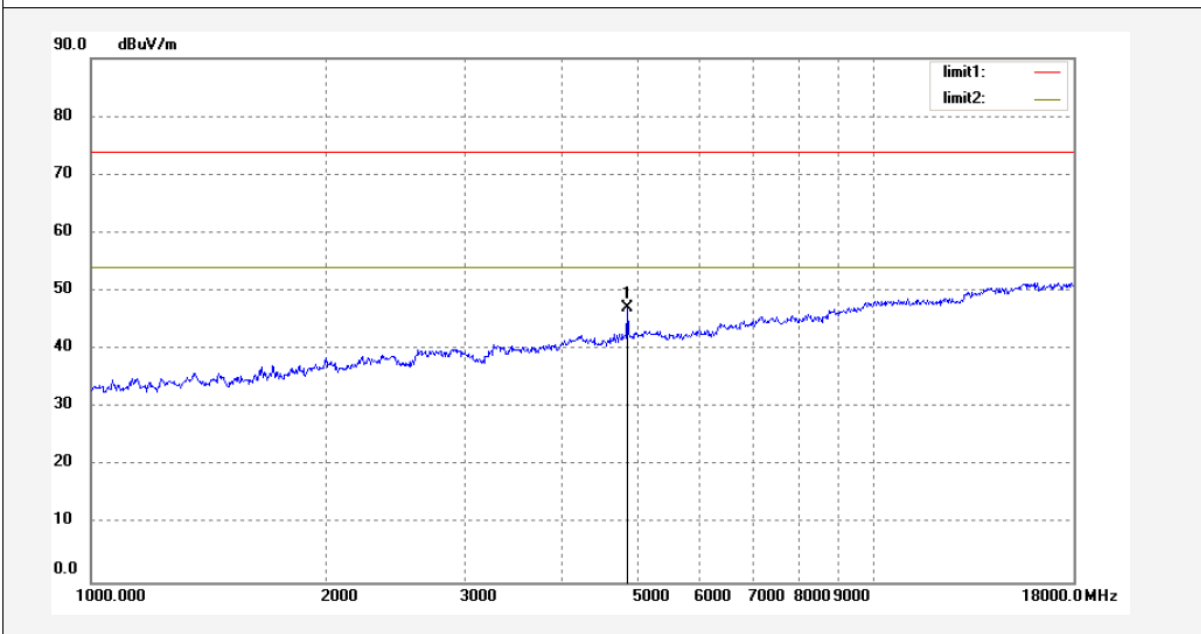


Vertical

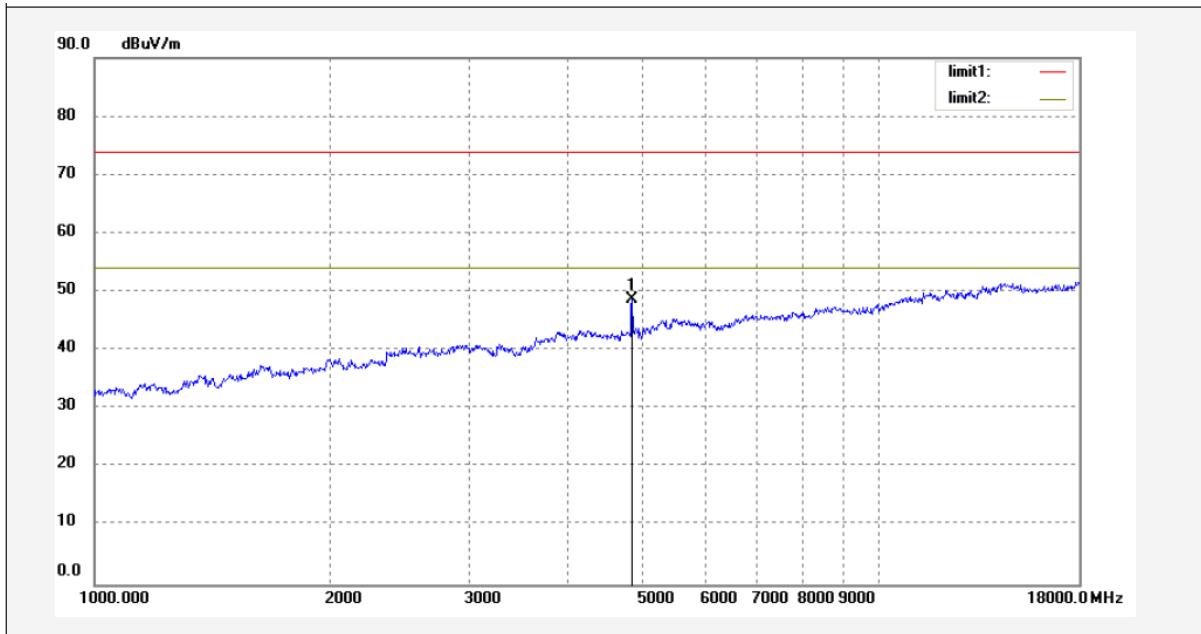


18 -25GHz:

Pre-scan for Peak  
802.11B Middle Channel  
Horizontal

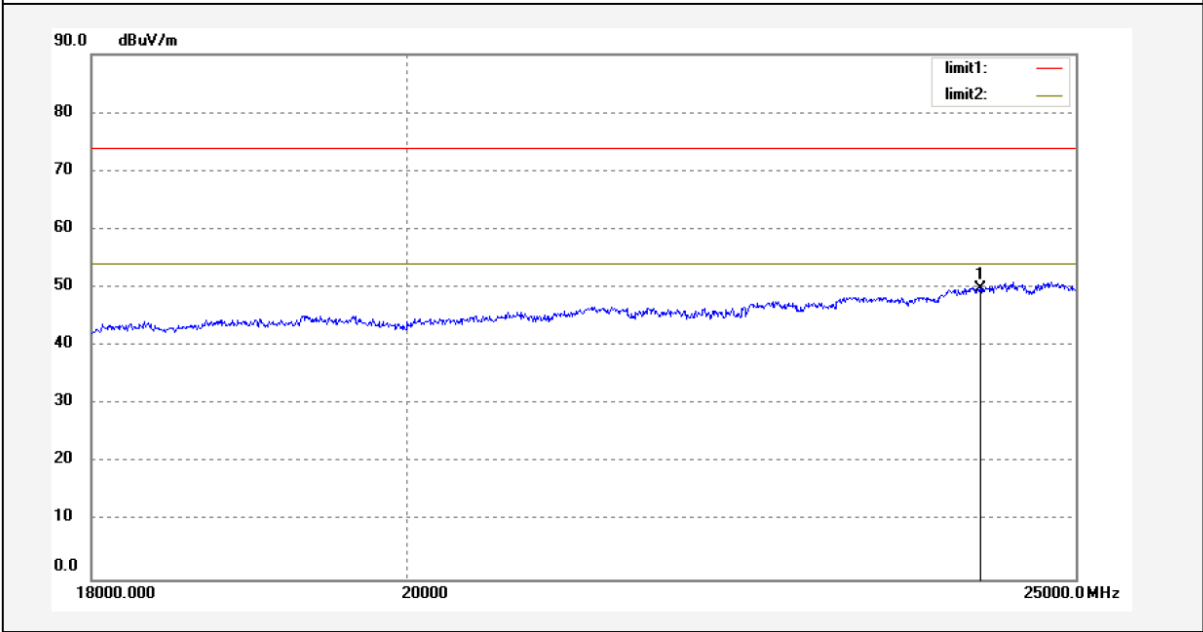

Vertical

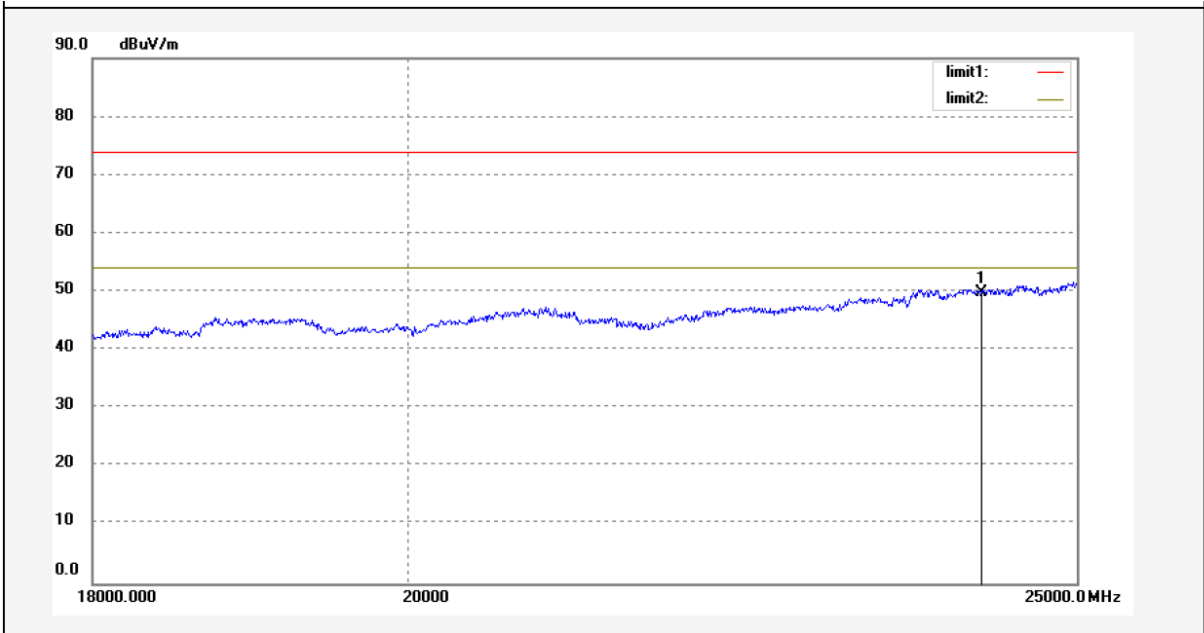


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Fan Yang from 2021-07-26 to 2021-09-16.*

**Test Result:** Pass.


Please refer to the following table and plots.



*EUT operation mode: Transmitting*


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	10.13	$\geq 500$
Middle	2442	10.116	$\geq 500$
High	2472	10.13	$\geq 500$
802.11g mode			
Low	2412	16.382	$\geq 500$
Middle	2442	16.368	$\geq 500$
High	2472	16.382	$\geq 500$
802.11n-HT20 mode			
Low	2412	17.656	$\geq 500$
Middle	2442	17.641	$\geq 500$
High	2472	17.656	$\geq 500$
802.11n-HT40 mode			
Low	2422	36.25	$\geq 500$
Middle	2442	36.28	$\geq 500$
High	2462	36.24	$\geq 500$
BLE mode			
Low	2402	0.703	$\geq 500$
Middle	2440	0.715	$\geq 500$
High	2480	0.718	$\geq 500$

## 6dB Bandwidth, 802.11b Low Channel

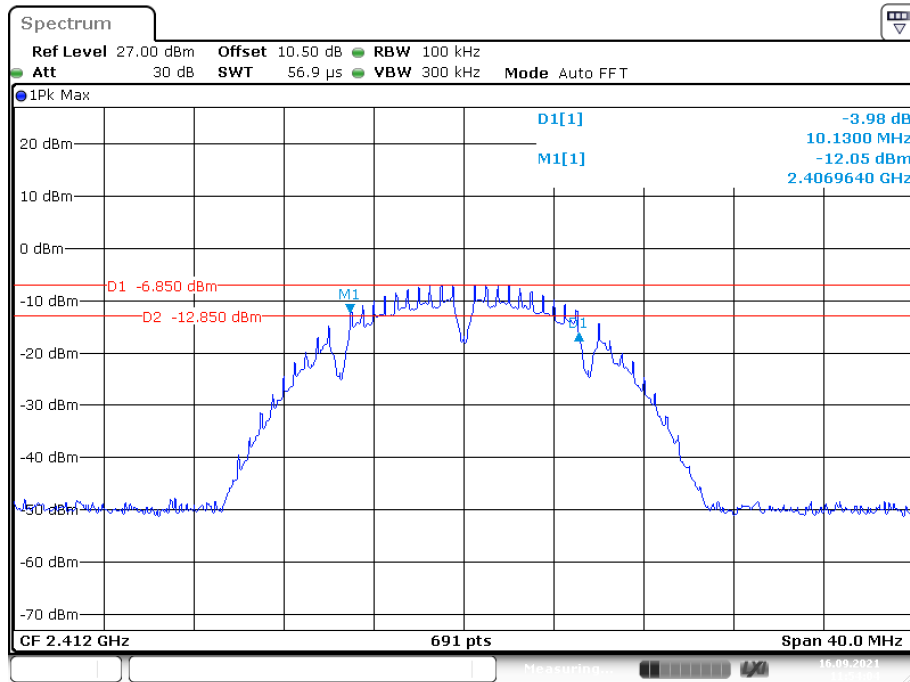


Date: 16.SEP.2021 11:54:05

## 6dB Bandwidth, 802.11b Middle Channel

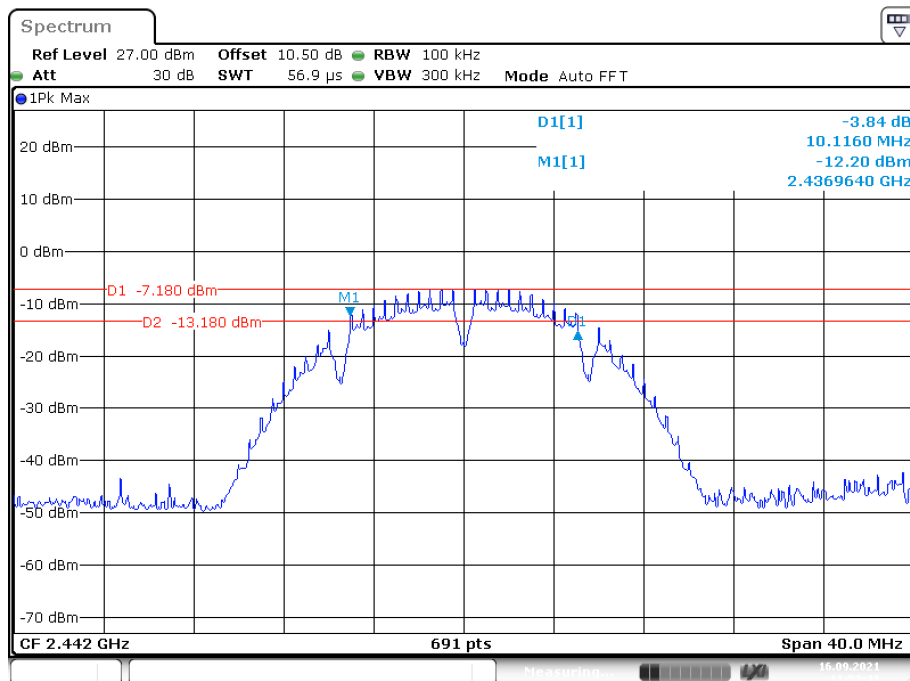


Date: 16.SEP.2021 11:52:42

## 6dB Bandwidth, 802.11b High Channel

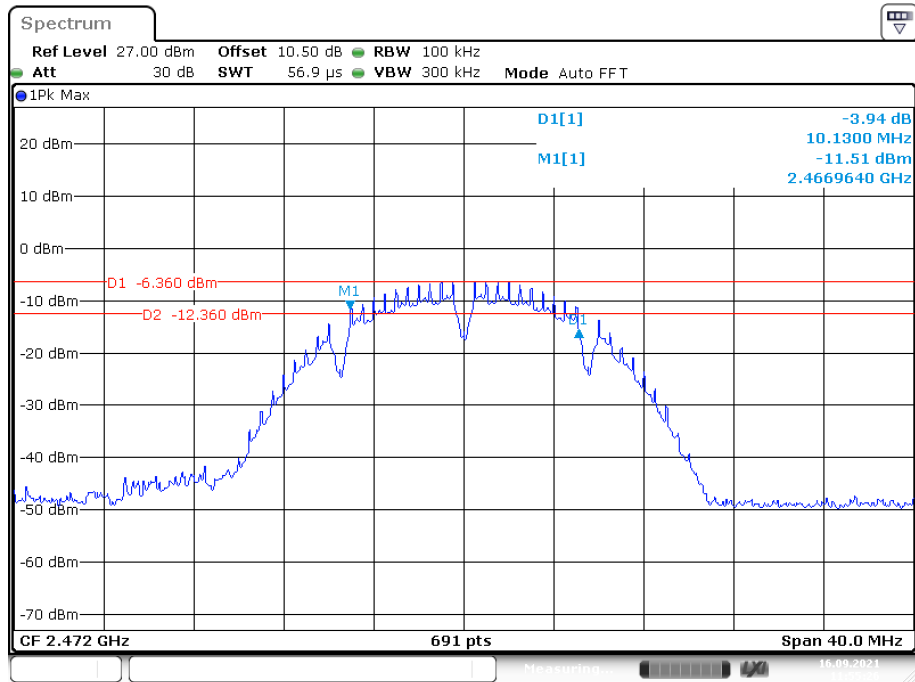


Date: 16.SEP.2021 11:55:27

## 6dB Bandwidth, 802.11g Low Channel

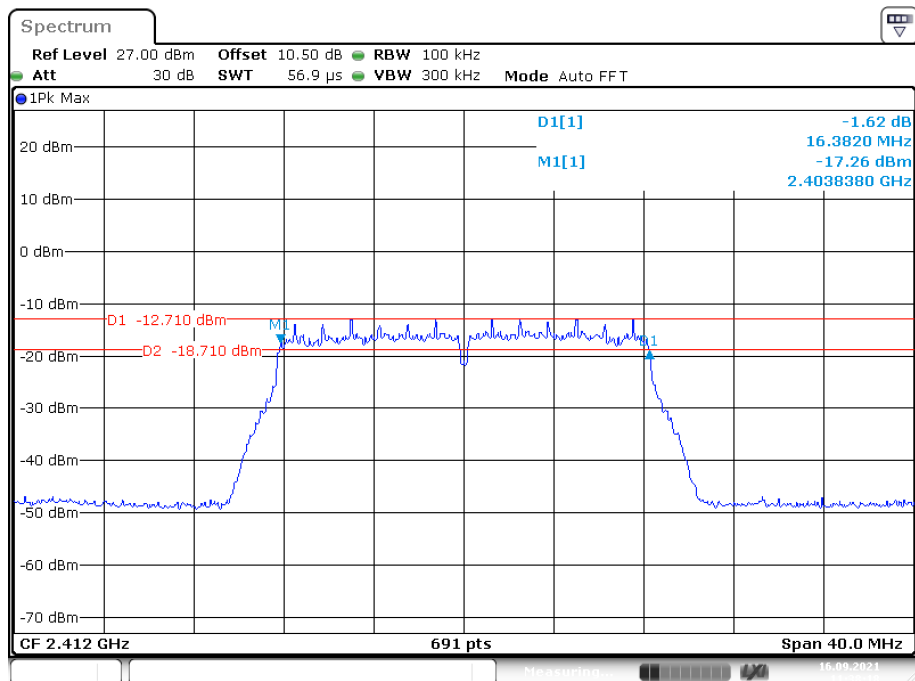


Date: 16.SEP.2021 11:38:19

## 6dB Bandwidth, 802.11g Middle Channel

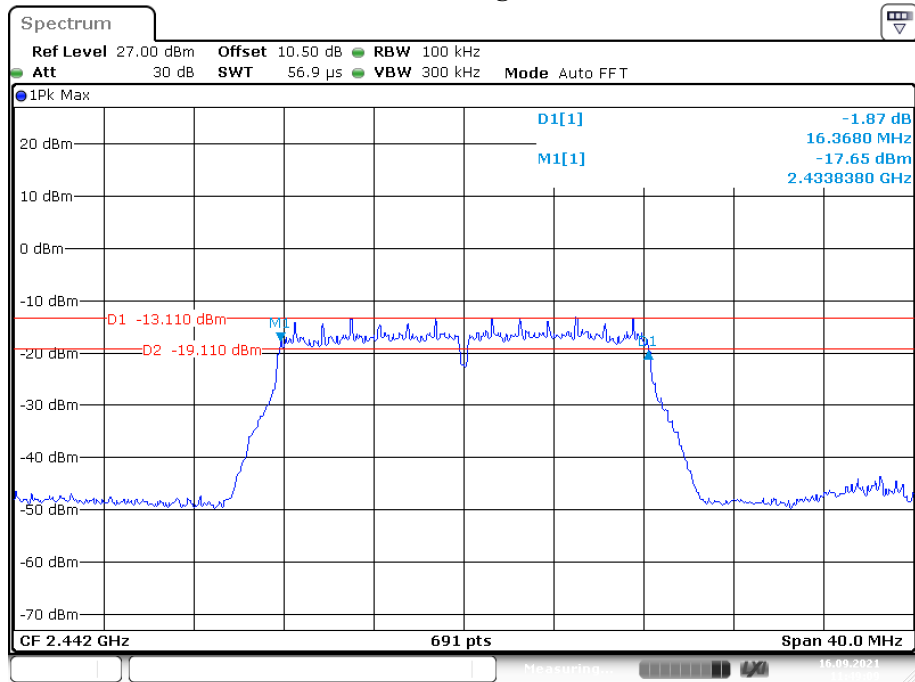


Date: 16.SEP.2021 11:49:10

## 6dB Bandwidth, 802.11g High Channel

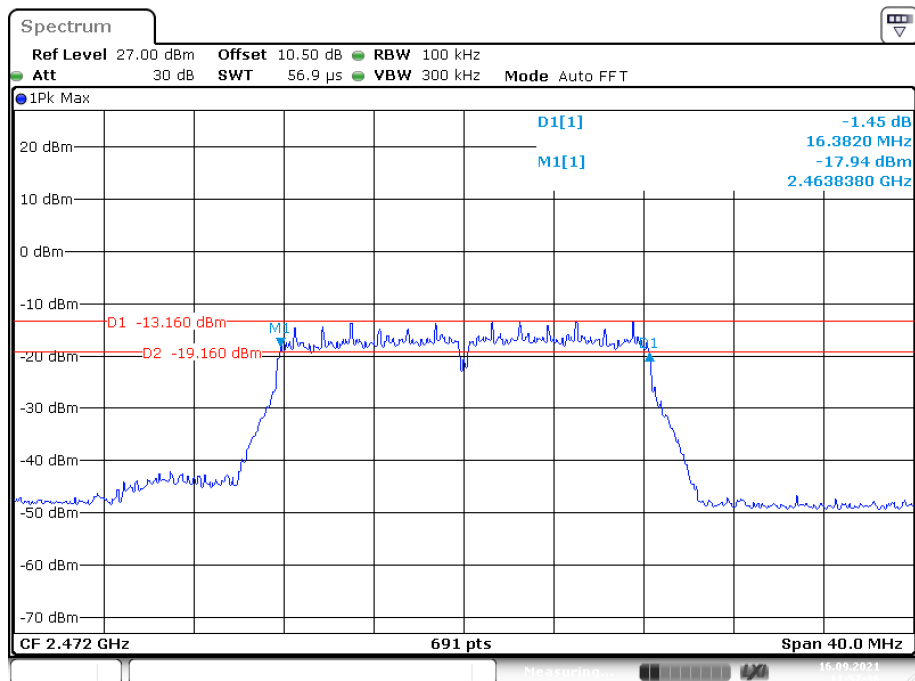


Date: 16.SEP.2021 11:57:36

## 6dB Bandwidth, 802.11n-HT20 Low Channel

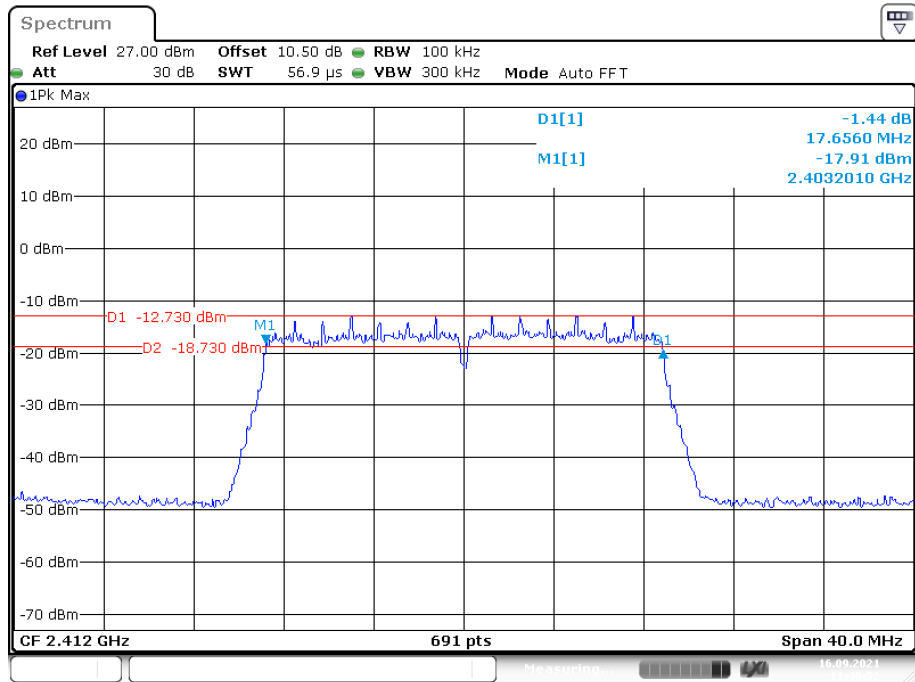


Date: 16.SEP.2021 11:40:52

## 6dB Bandwidth, 802.11n-HT20 Middle Channel

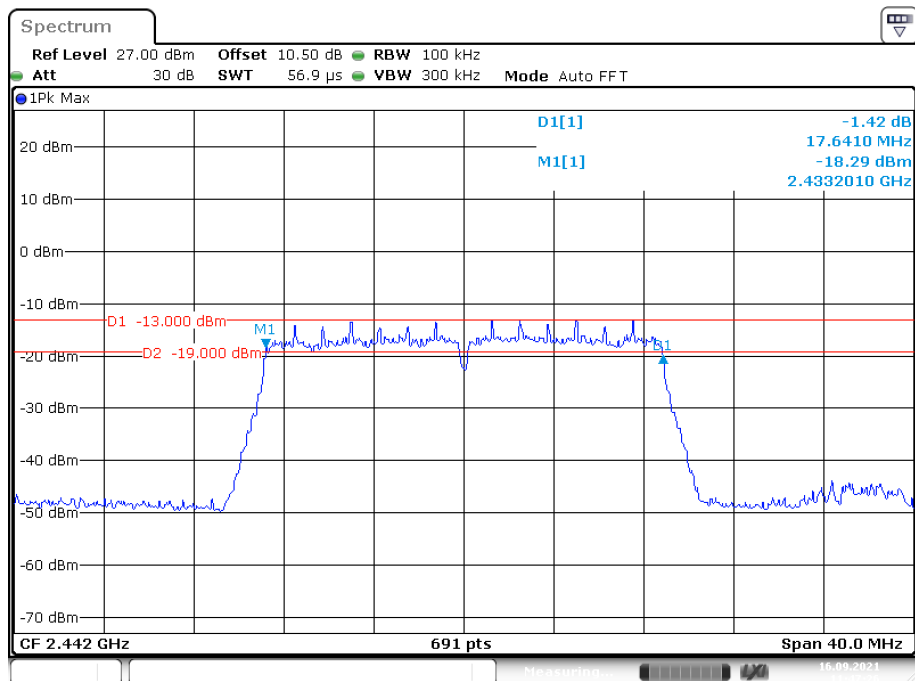


Date: 16.SEP.2021 11:47:27

## 6dB Bandwidth, 802.11n-HT20 High Channel

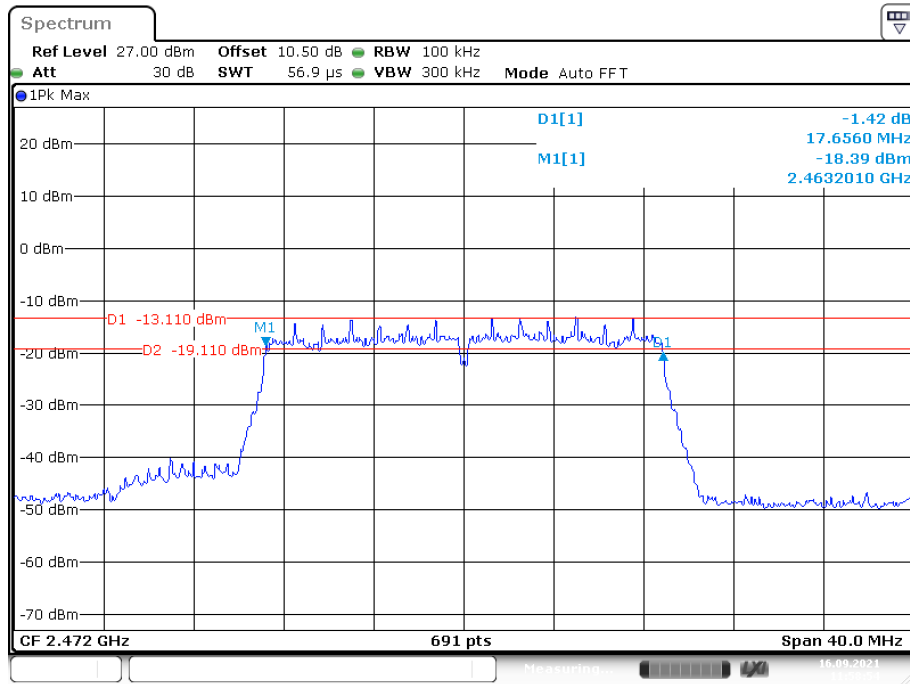


Date: 16.SEP.2021 11:58:54

## 6dB Bandwidth, 802.11n-HT40 Low Channel

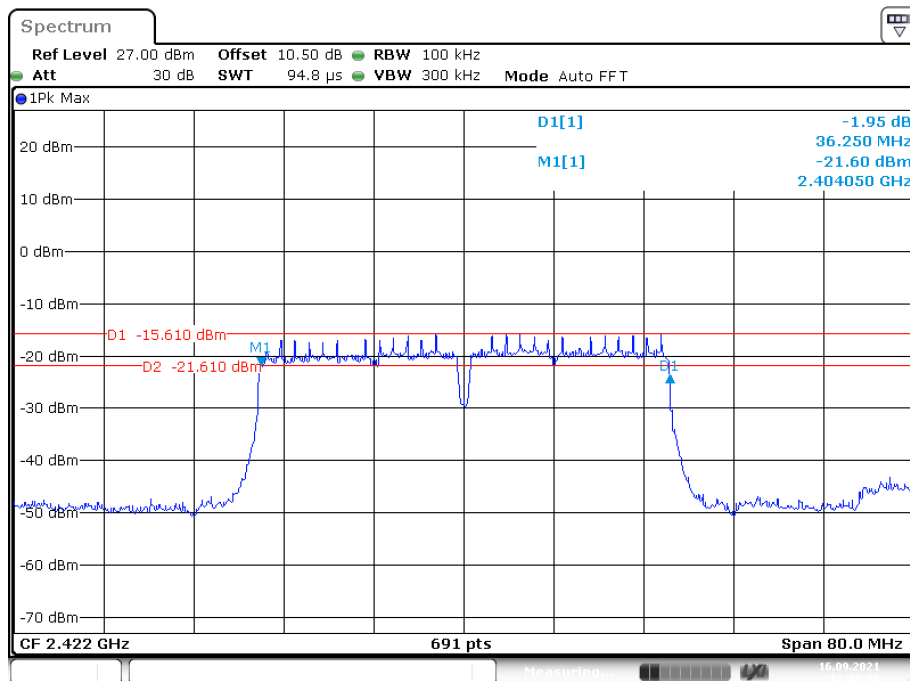


Date: 16.SEP.2021 11:43:39

## 6dB Bandwidth, 802.11n-HT40 Middle Channel

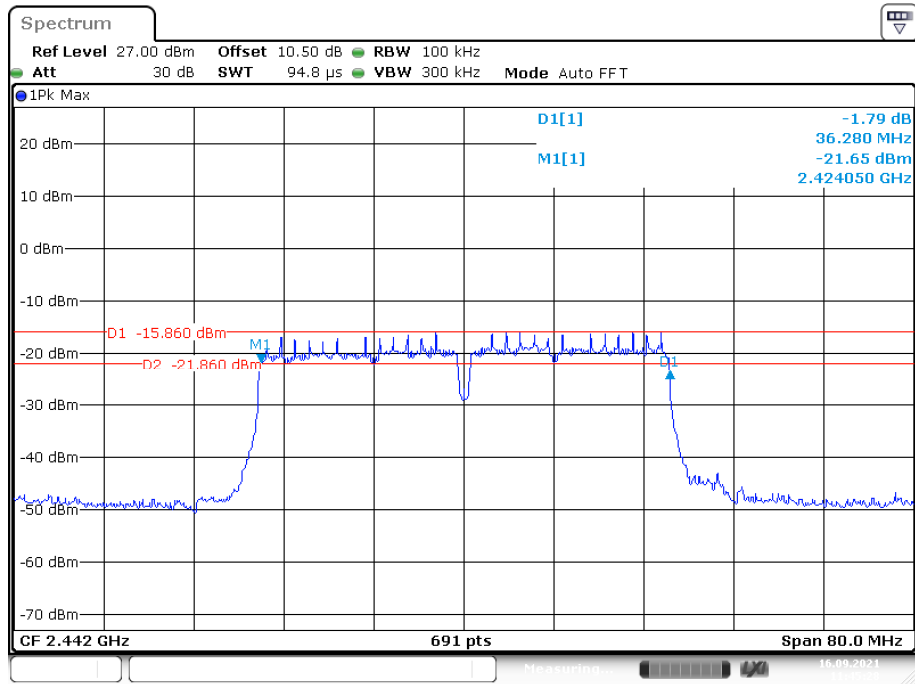


Date: 16.SEP.2021 11:45:29

## 6dB Bandwidth, 802.11n-HT40 High Channel

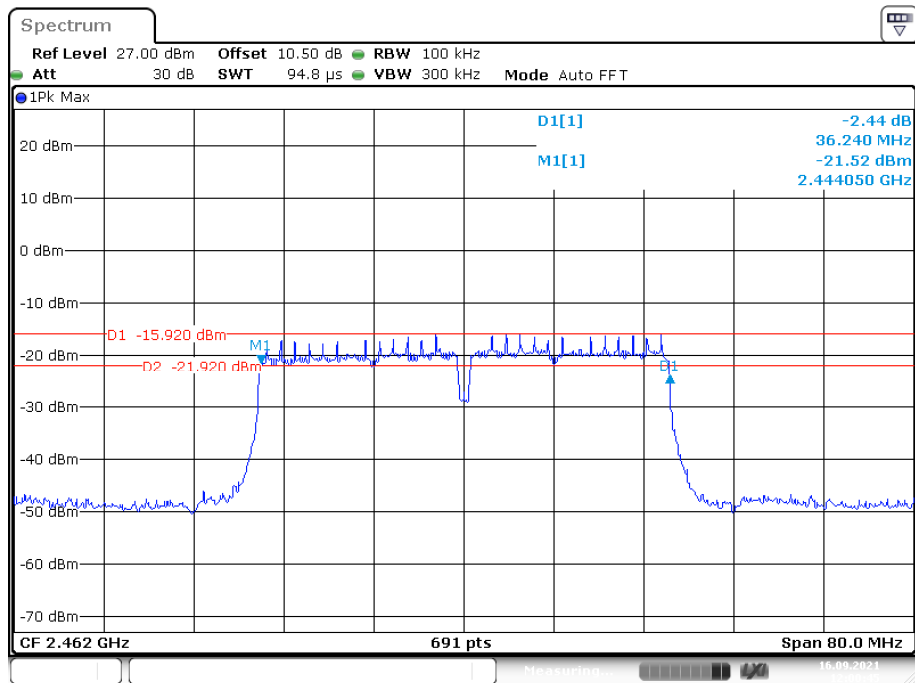


Date: 16.SEP.2021 12:00:45

## 6dB Bandwidth, BLE Low Channel

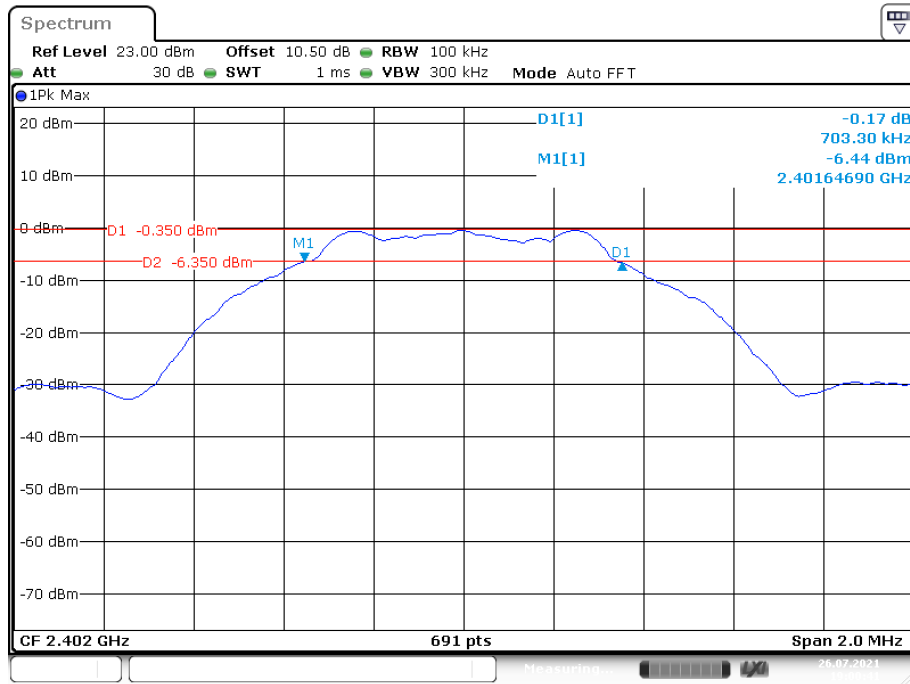

Date: 26.JUL.2021 19:00:41


## 6dB Bandwidth, BLE Middle Channel

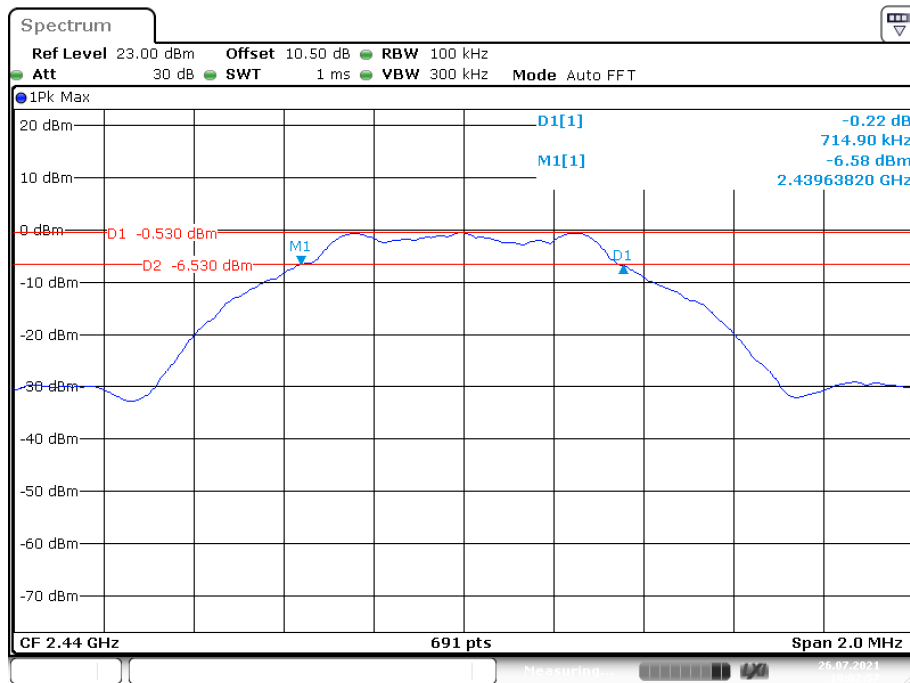

Date: 26.JUL.2021 19:02:57



## 6dB Bandwidth, BLE High Channel

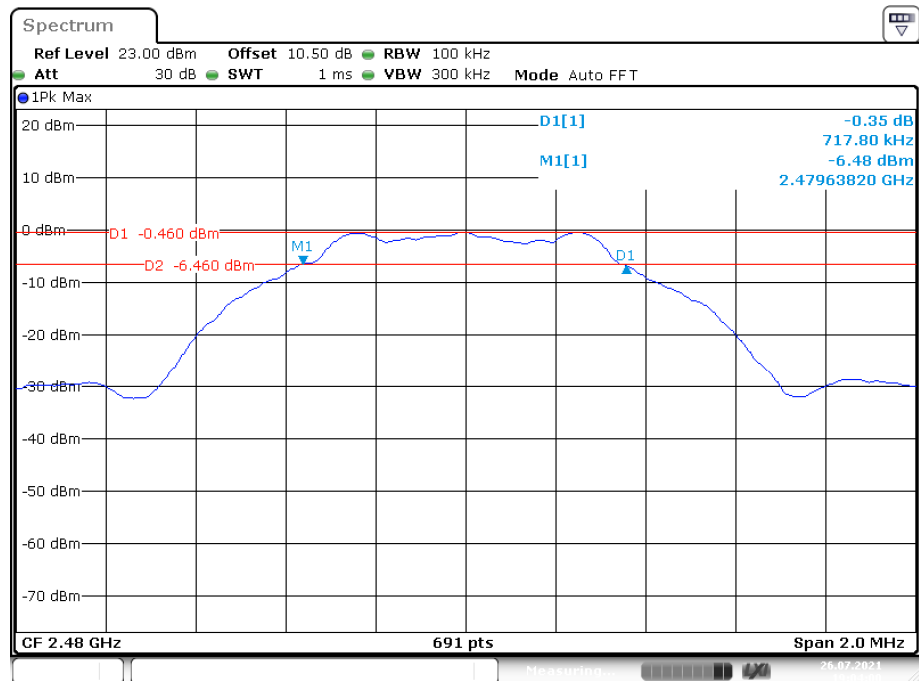

Date: 26.JUL.2021 19:04:00


## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Fan Yang from 2021-07-26 to 2021-09-16.*

*EUT operation mode: Transmitting*

**Wi-Fi mode**

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b mode				
Low	2412	5.30	3.48	30
Middle	2442	5.25	3.37	30
High	2472	6.21	4.21	30
802.11g mode				
Low	2412	6.81	3.85	30
Middle	2442	6.76	3.68	30
High	2472	6.88	3.84	30
802.11n HT20 mode				
Low	2412	7.23	3.92	30
Middle	2442	7.08	3.76	30
High	2472	6.81	3.55	30
802.11n HT40 mode				
Low	2422	7.14	3.92	30
Middle	2442	7.46	3.88	30
High	2462	6.92	3.68	30

**BLE mode**


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)
BLE 1M			
Low	2402	0.40	30
Middle	2440	0.41	30
High	2480	0.47	30

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE****Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Fan Yang from 2021-07-26 to 2021-09-16.*

*EUT operation mode: Transmitting*


**Test Result:** Compliant

Please refer to the following plots.

Date: 16.SEP.2021 11:21:00


Date: 16.SEP.2021 11:23:03

## 802.11g: Band Edge, Left Side

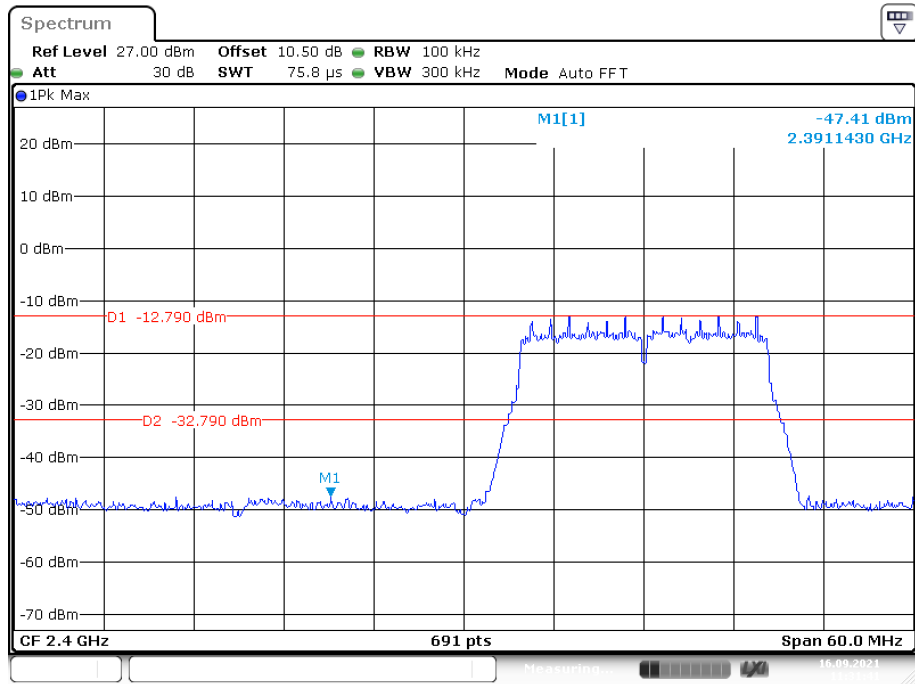


Date: 16.SEP.2021 11:31:41

## 802.11g: Band Edge, Right Side

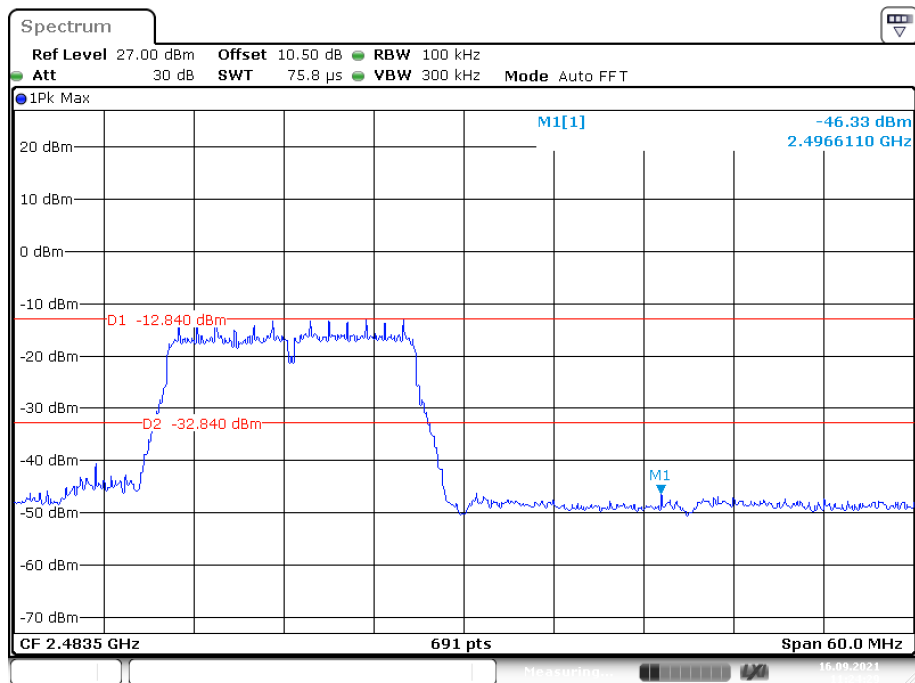


Date: 16.SEP.2021 11:24:30

## 802.11n-HT20: Band Edge, Left Side

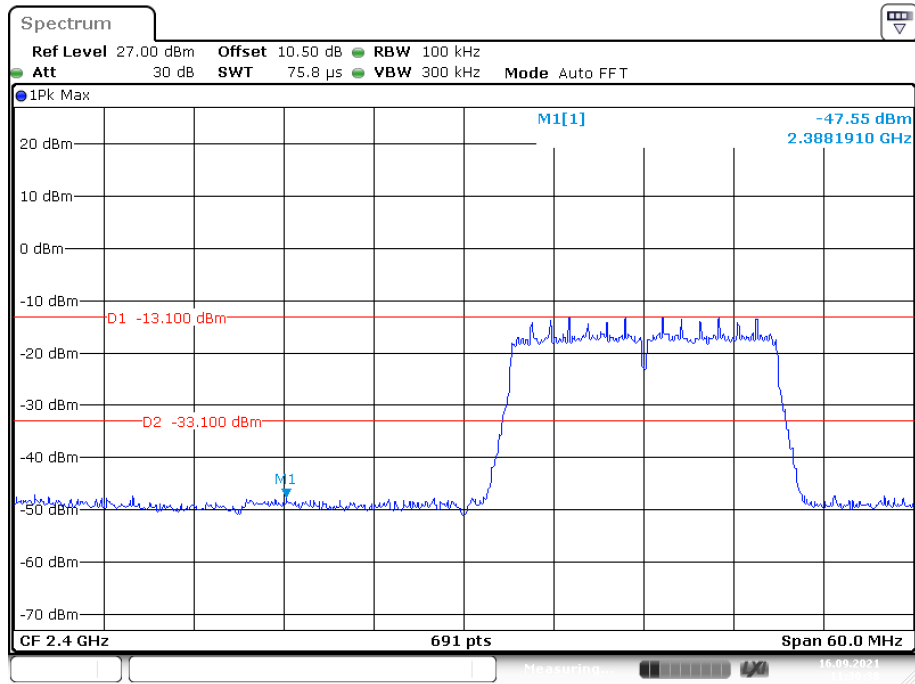


Date: 16.SEP.2021 11:30:38

## 802.11n-HT20: Band Edge, Right Side

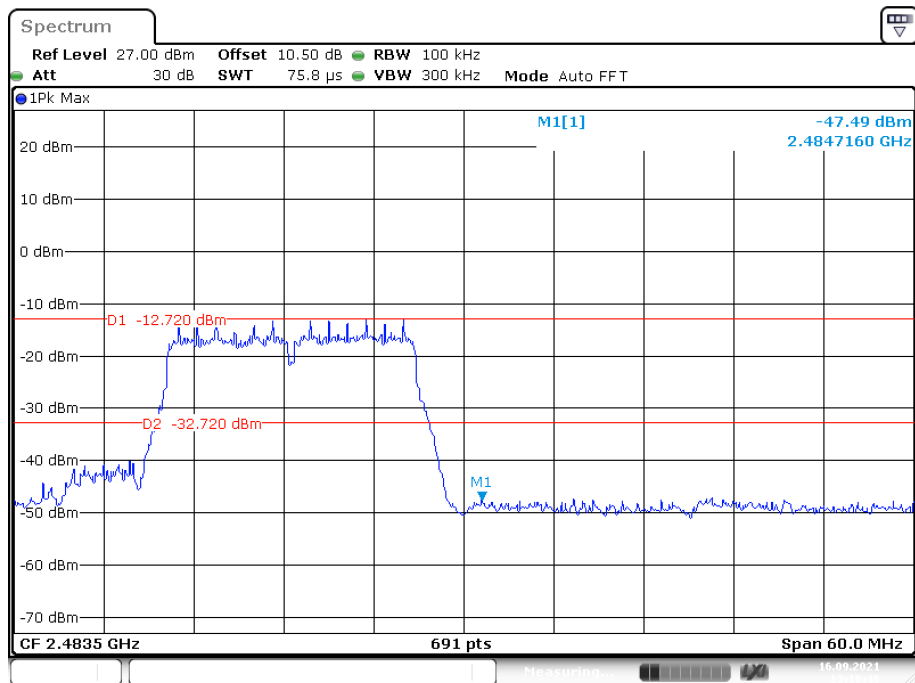


Date: 16.SEP.2021 13:18:48

## 802.11n-HT40: Band Edge, Left Side

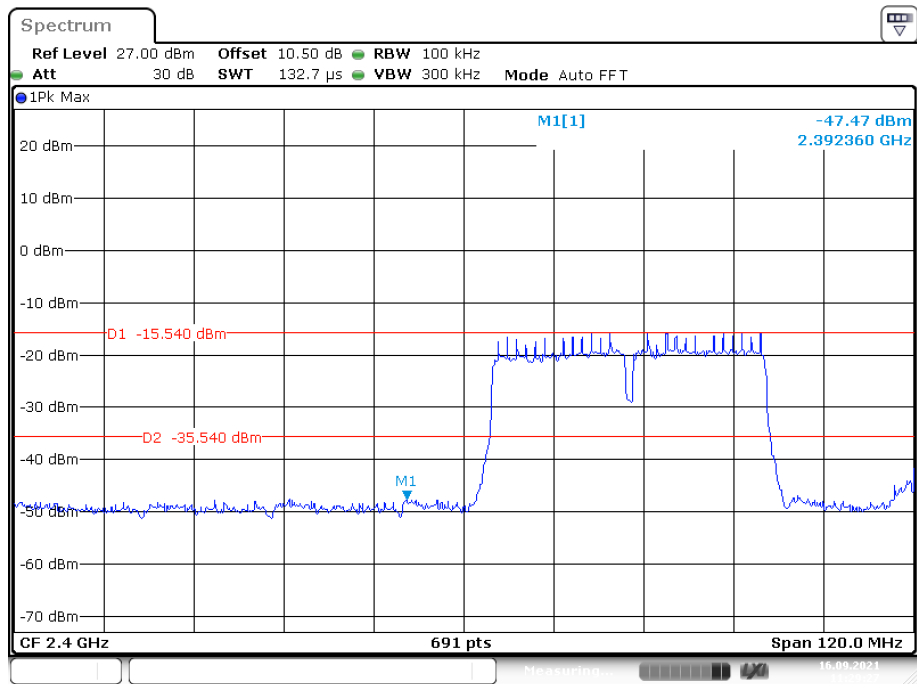

Date: 16.SEP.2021 11:29:28


## 802.11n-HT40: Band Edge, Right Side

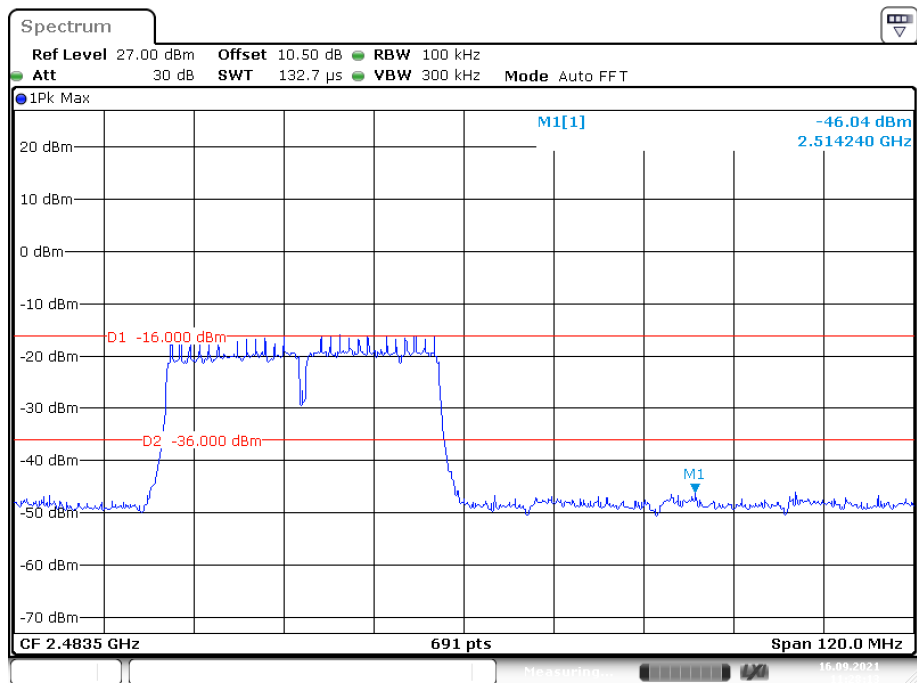

Date: 16.SEP.2021 11:28:13




## BLE: Band Edge, Left Side

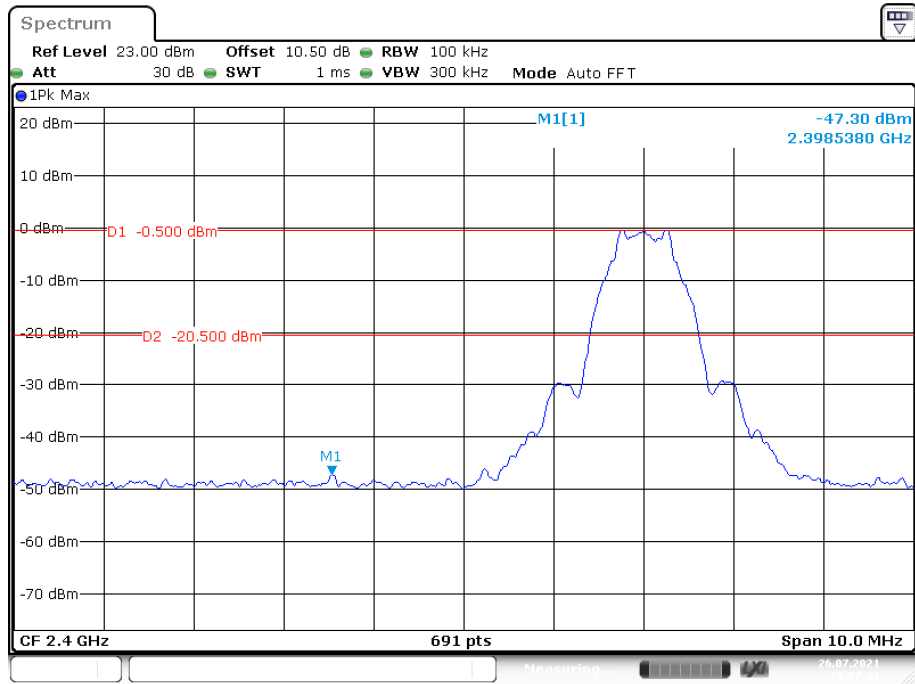

Date: 26.JUL.2021 19:07:01

## BLE: Band Edge, Right Side

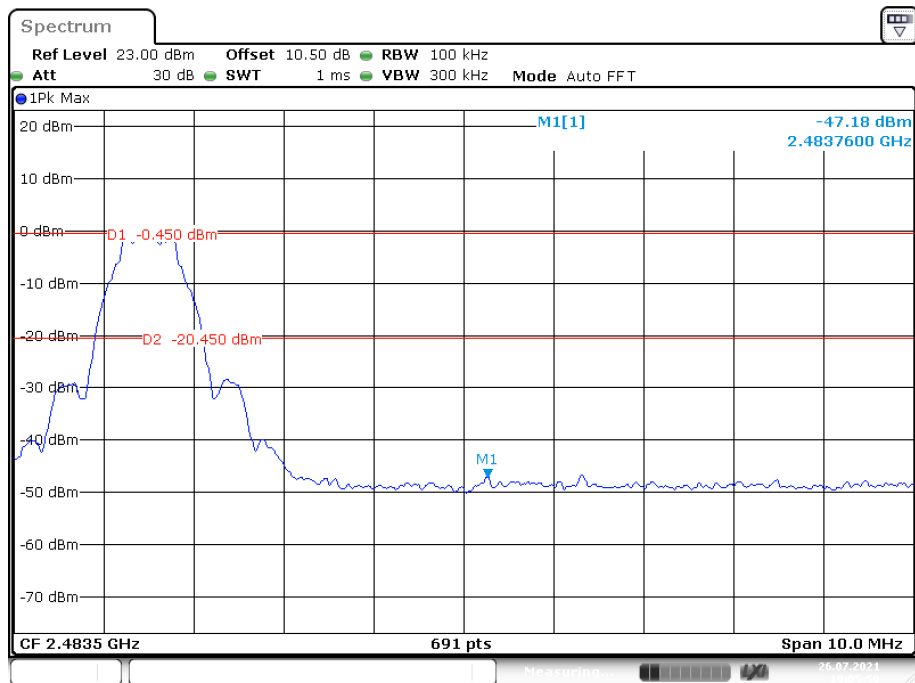

Date: 26.JUL.2021 19:05:50


## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



### Test Data

#### Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Fan Yang from 2021-07-26 to 2021-09-16.*


*EUT operation mode: Transmitting*

**Test Result:** Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-6.30	$\leq 8$
Middle	2442	-8.19	$\leq 8$
High	2472	-7.39	$\leq 8$
802.11g mode			
Low	2412	-25.66	$\leq 8$
Middle	2442	-23.73	$\leq 8$
High	2472	-24.27	$\leq 8$
802.11n-HT20 mode			
Low	2412	-24.97	$\leq 8$
Middle	2442	-24.34	$\leq 8$
High	2472	-24.86	$\leq 8$
802.11n-HT40 mode			
Low	2422	-27.83	$\leq 8$
Middle	2442	-27.73	$\leq 8$
High	2462	-29.38	$\leq 8$
BLE mode			
Low	2402	-14.95	$\leq 8$
Middle	2440	-14.92	$\leq 8$
High	2480	-14.92	$\leq 8$

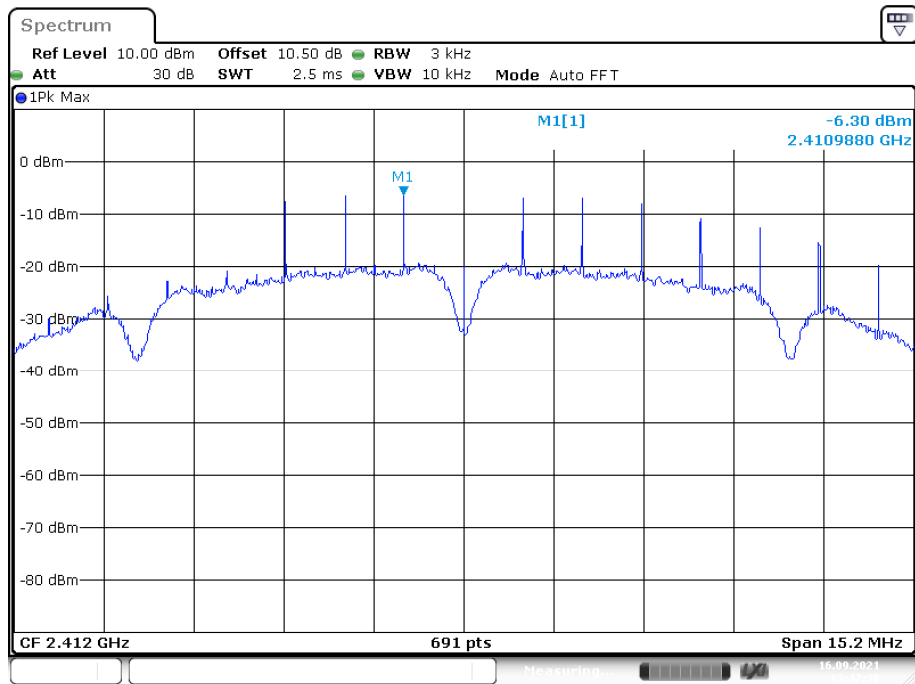
**Power Spectral Density, 802.11b Low Channel**

Date: 16.SEP.2021 13:47:38

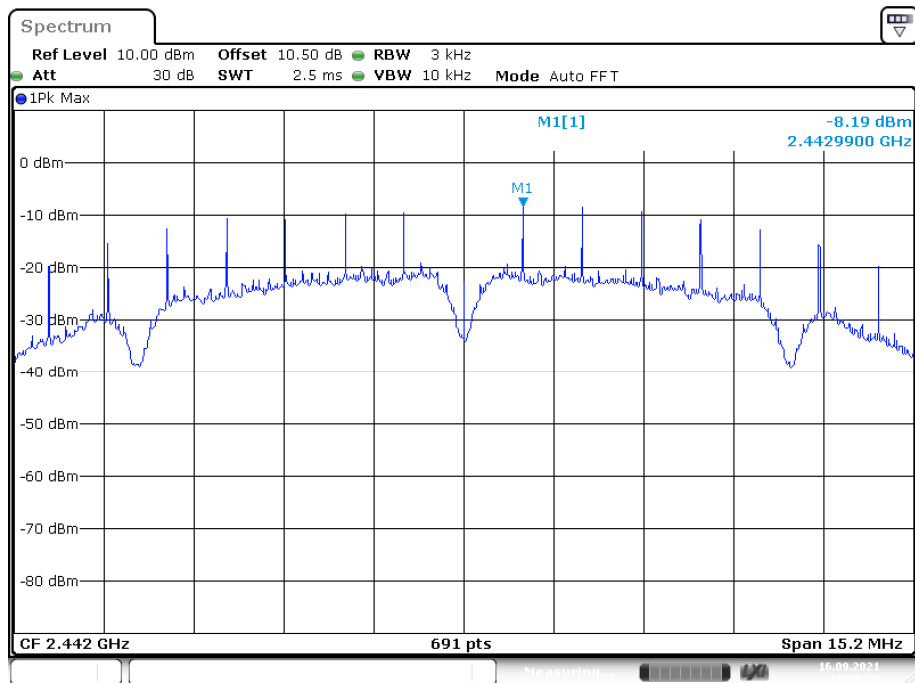**Power Spectral Density, 802.11b Middle Channel**


Date: 16.SEP.2021 13:50:22

## Power Spectral Density, 802.11b High Channel

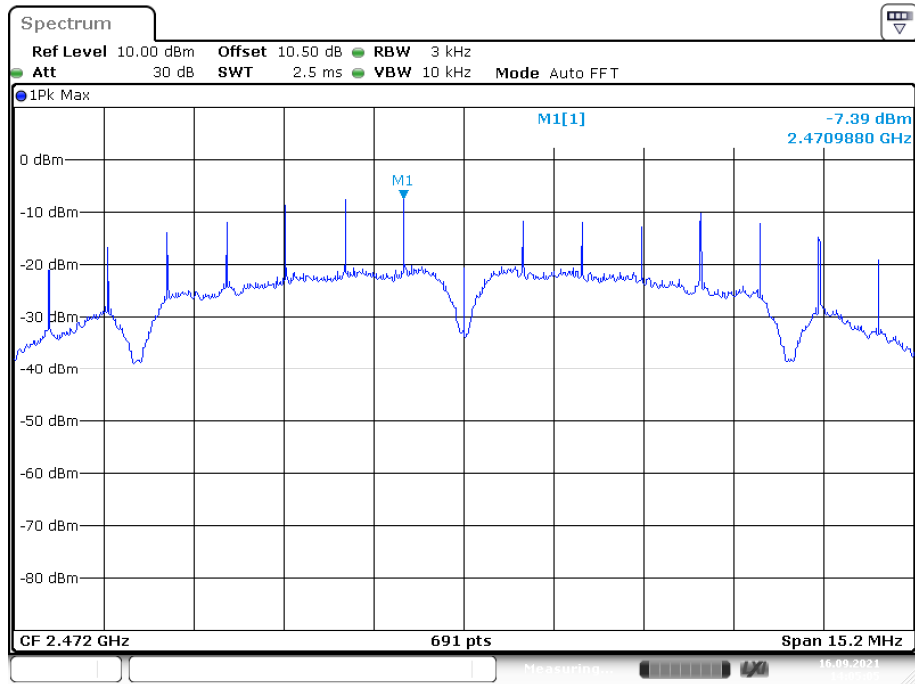


Date: 16.SEP.2021 14:05:05


## Power Spectral Density, 802.11g Low Channel

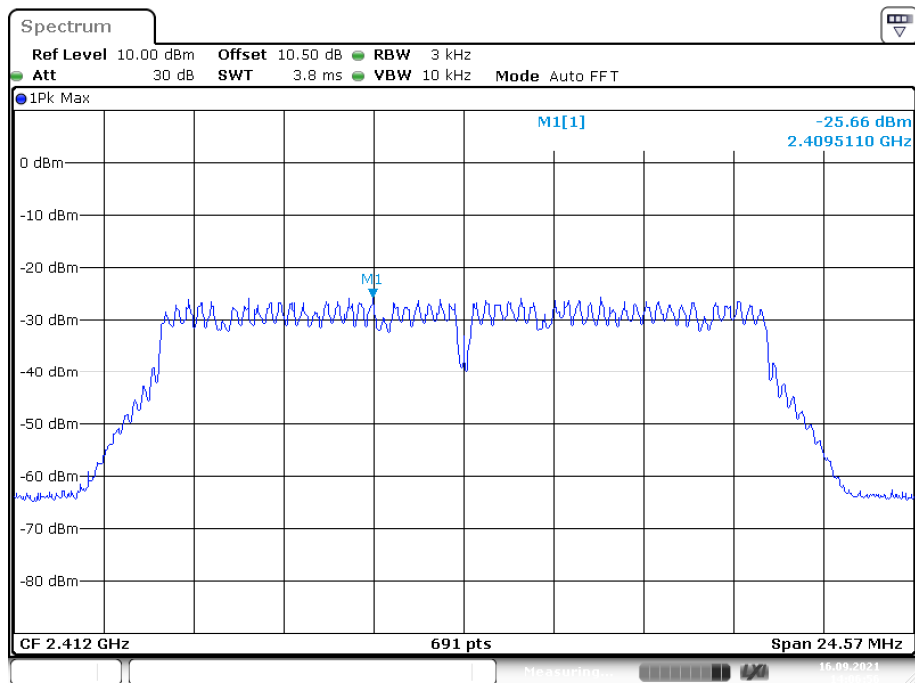

Date: 16.SEP.2021 14:06:56

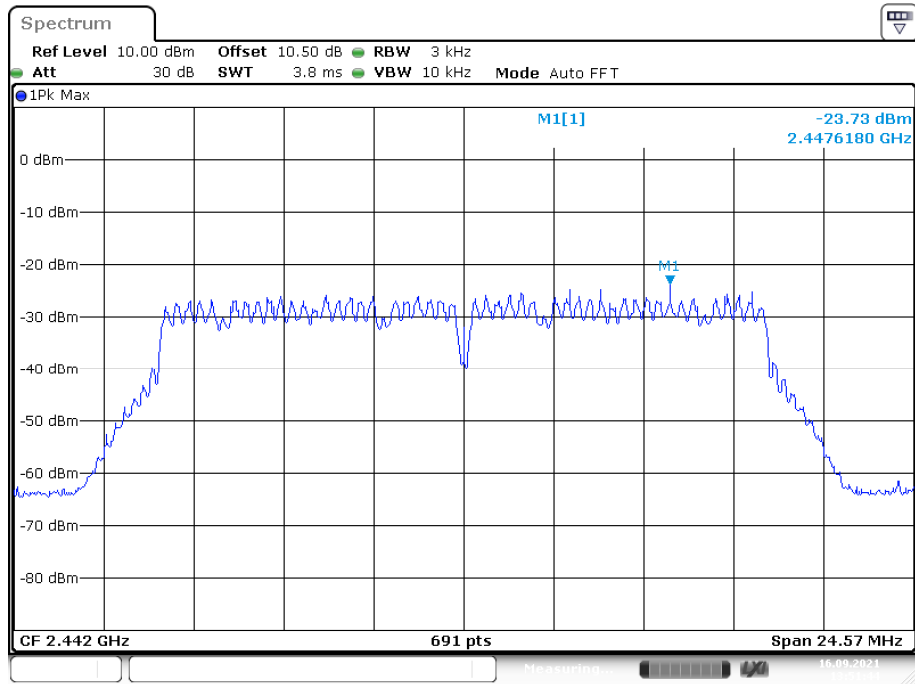
**Power Spectral Density, 802.11g Middle Channel**

Date: 16.SEP.2021 13:51:44

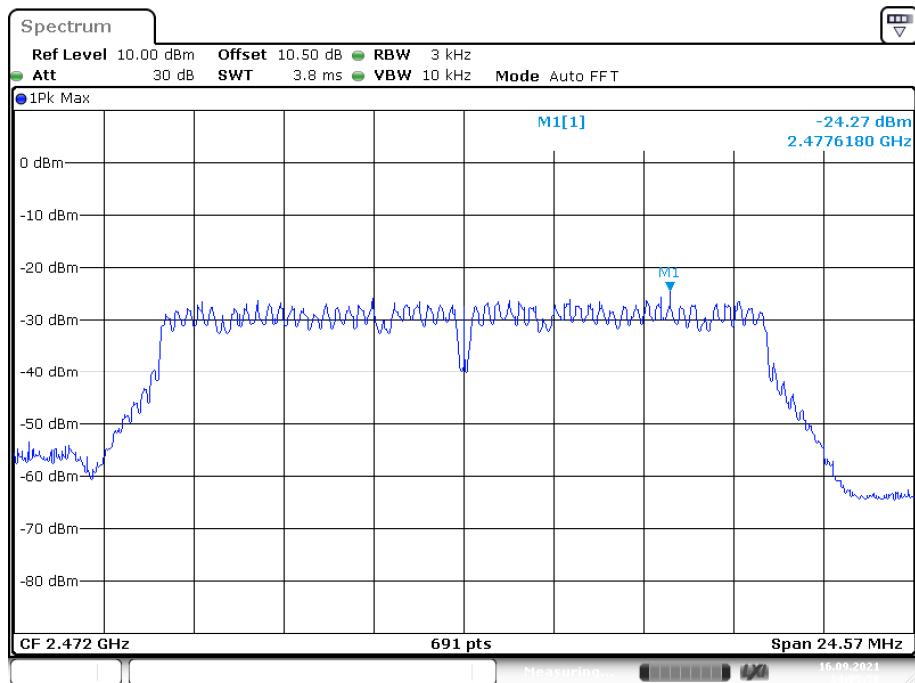**Power Spectral Density, 802.11g High Channel**


Date: 16.SEP.2021 14:05:58

## Power Spectral Density, 802.11n-HT20 Low Channel

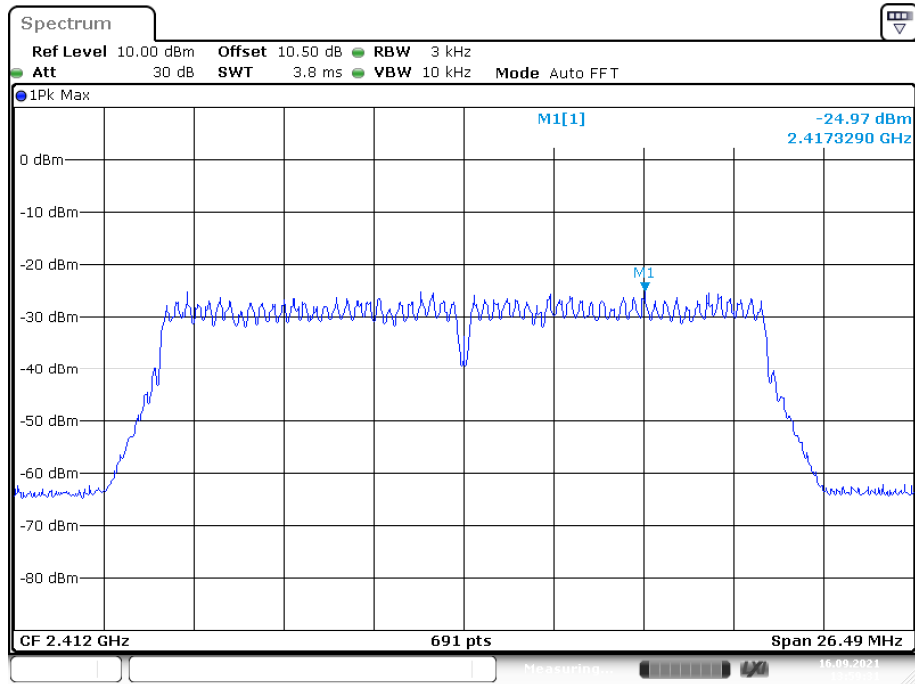


Date: 16.SEP.2021 13:59:31


## Power Spectral Density, 802.11n-HT20 Middle Channel

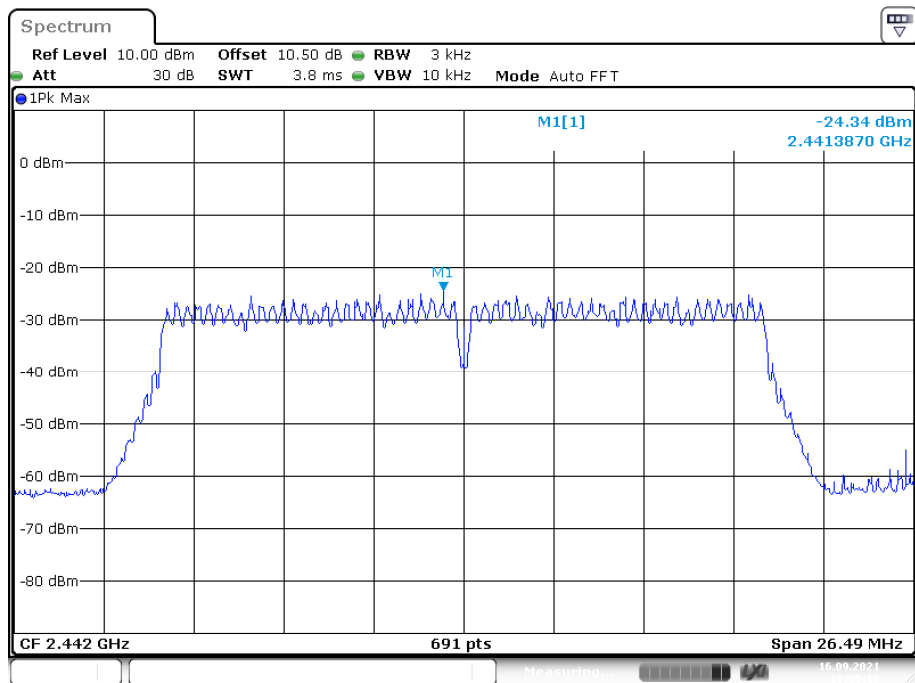

Date: 16.SEP.2021 13:55:17

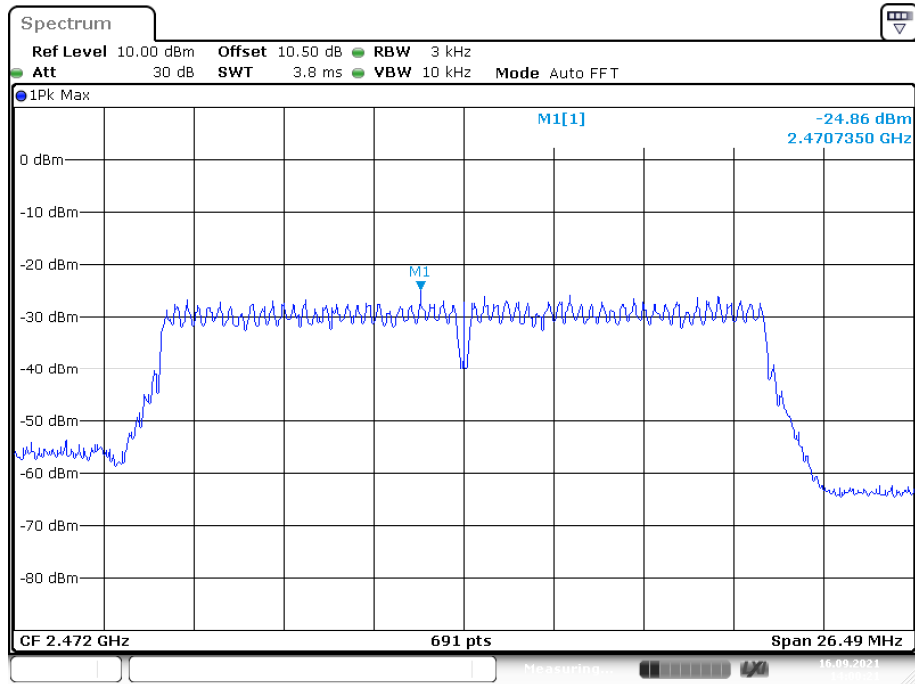
**Power Spectral Density, 802.11n-HT20 High Channel**

Date: 16.SEP.2021 14:00:22

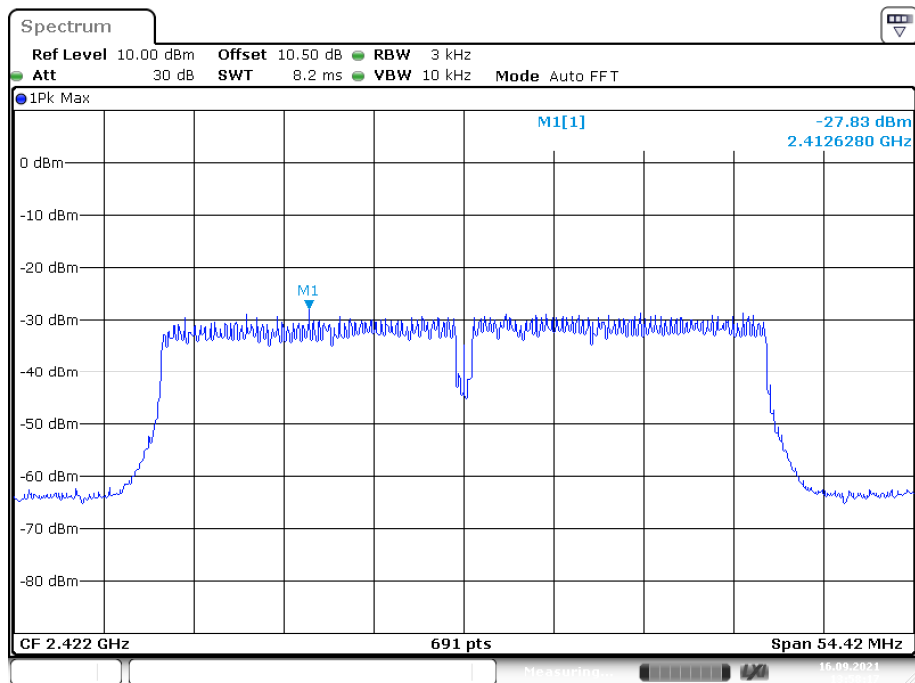
**Power Spectral Density, 802.11n-HT40 Low Channel**

Date: 16.SEP.2021 13:58:17

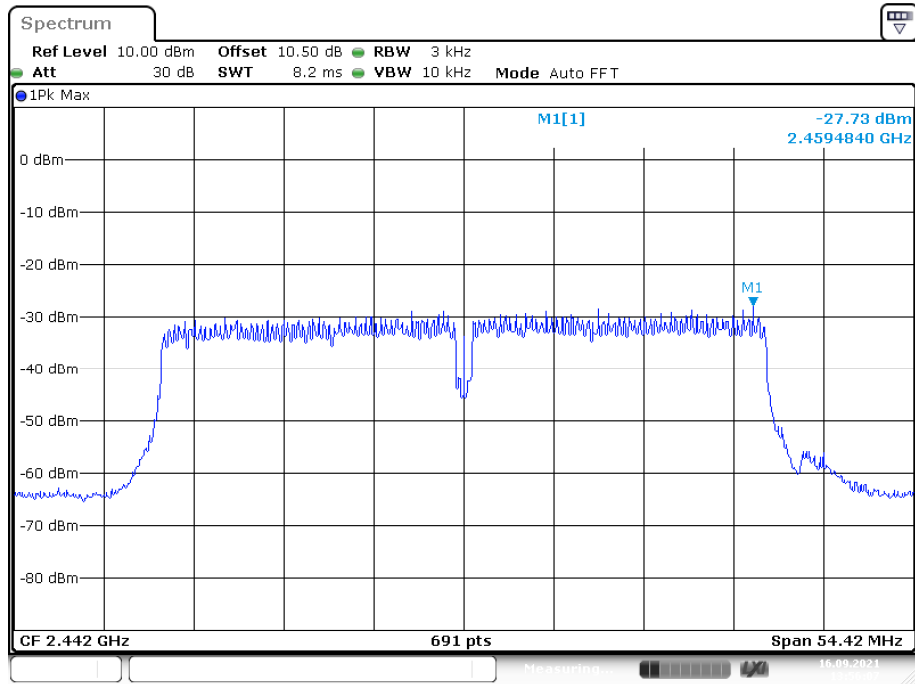


**Power Spectral Density, 802.11n-HT40 Middle Channel**

Date: 16.SEP.2021 13:56:07

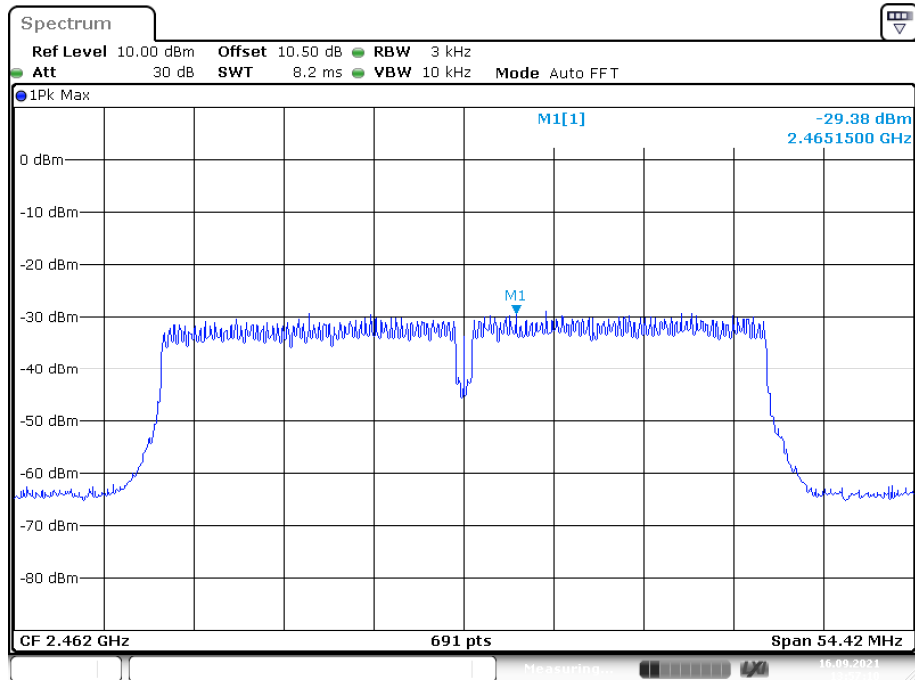**Power Spectral Density, 802.11n-HT40 High Channel**


Date: 16.SEP.2021 13:57:10

## Power Spectral Density, BLE Low Channel

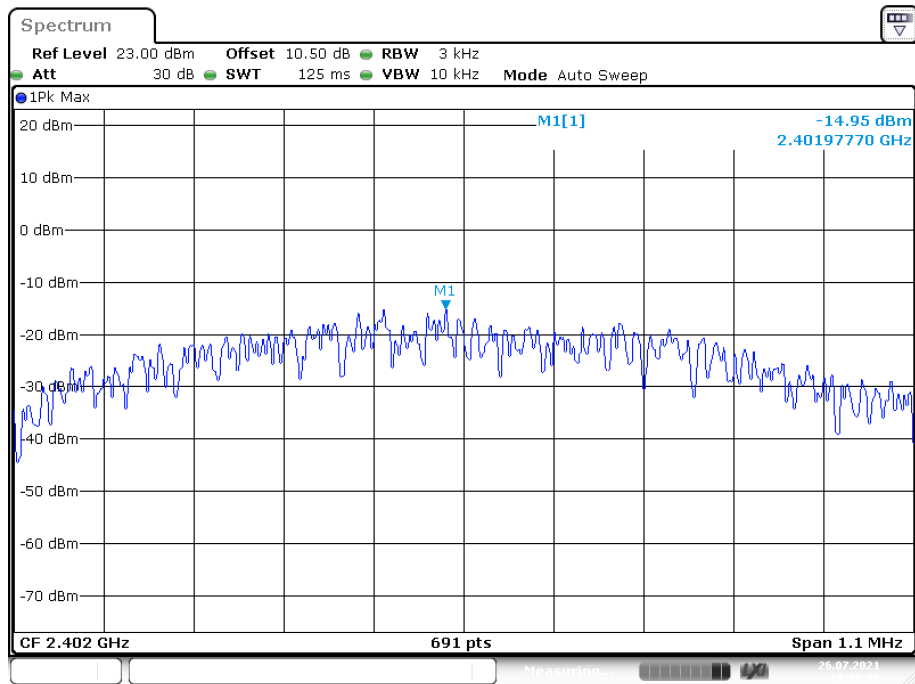


Date: 26.JUL.2021 19:18:22

## Power Spectral Density, BLE Middle Channel

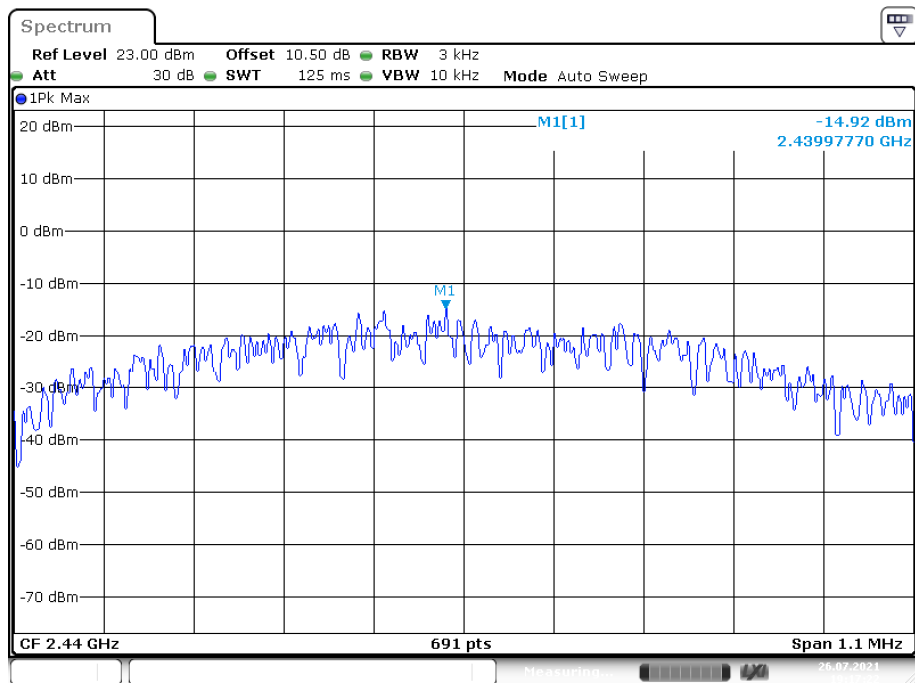

Date: 26.JUL.2021 19:17:22

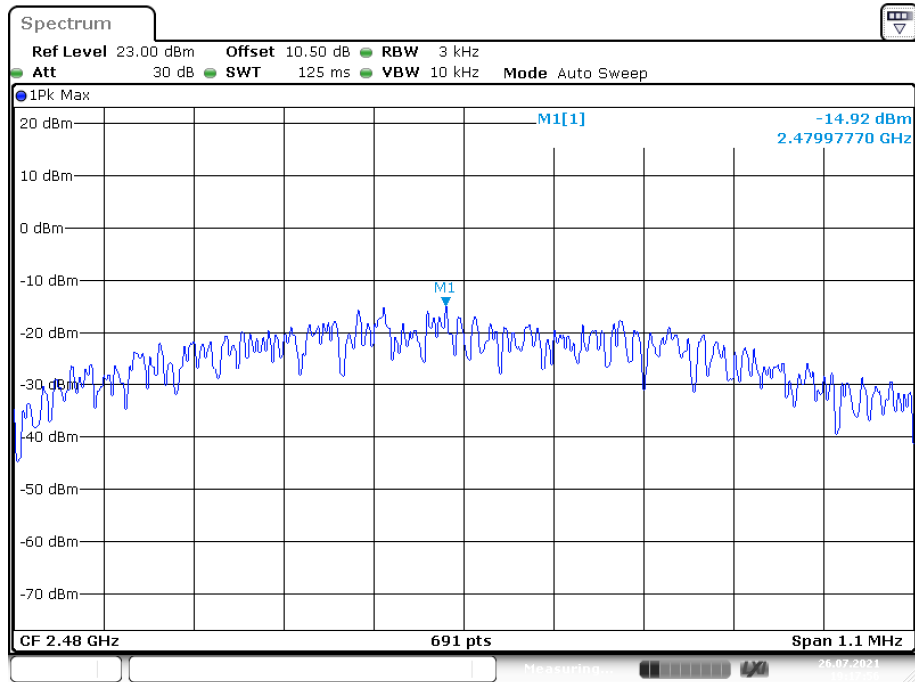**Power Spectral Density, BLE High Channel**

Date: 26.JUL.2021 19:17:57

**\*\*\*\*\* END OF REPORT \*\*\*\*\***