

Outdoor Radome Omni Dual-Band WiFi Antenna

Part# W5030



The W5030 Radome Omni, a Pulse/Larsen dual-band WiFi omni antenna is designed for harsh outdoor environments where WiFi connection is needed in either the 2.4 GHz or 5 GHz bands. This robust antenna provides excellent mechanical stability and UV/IP67 protection to ensure a long, reliable, maintenance-free life.

The antenna is part of a Radome Omni (RO) series of antennas offered in many different frequencies from 698 MHz to 6 GHz with varying gains and N Male and Female connector options. The W5030 and all additional RO antennas are designed for installation on a mast or wall using an FB2BRACKET or FB3BRACKET.

Features

- Frequency 2.4-2.5 / 5.15-5.875 GHz
- Omni-Direction with 3.5/6.5 dBi Gain
- UV Protected and IP67 rated
- Connector N-Male

Applications

- Access Points
- Base Stations
- Public Safety
- Repeaters
- Small Cell

Confidential and Proprietary – Pulse Electronics – All Rights reserved – 2015

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its content, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. Information subject to change without notice.

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
USA

Tel: 1- 858-674-8100
Fax: 1-858-674-8262

Larsen Brand Antennas

3611 NE 112th Ave
Vancouver, WA 98682
USA

Tel: 1-360-944-7551
Fax: 1-360-944-7556

Europe Headquarters

Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Pulse (Suzhou) Wireless Products Co, Inc.

99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Science & Tech Industrial Park
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998
Fax: 86 512 6809 8023



Performance warranty of products offered in this data sheet is limited to the parameters specified. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.
©Copyright, 2015. Pulse Electronics, Inc. All rights Reserved.

Outdoor Radome Omni Dual-Band Antenna

Part# W5030

ELECTRICAL SPECIFICATIONS	
Frequency 1 (GHz)	2.4 - 2.5
Frequency 2 (GHz)	5.15 – 5.875
Nominal Impedance (Ω)	50
VSWR (Max)	2:1
Average Peak Gain 2.4 GHz (dBi)	3.5
Average Peak Gain 5X GHz (dBi)	6.5
HPWB / Horizontal Plane	Omni
HPBW / Vertical Plane 2.4 GHz ($^{\circ}$ TYP)	45
HPBW / Vertical Plane 5X GHz ($^{\circ}$ TYP)	25
Polarization	Vertical
Power Withstanding (W)	20
E.S.D. Protection	External Recommended
Connector Type	N Male


ENVIRONMENTAL SPECIFICATIONS	
Operation Temperature ($^{\circ}$ C)	-40 - +85

MECHANICAL SPECIFICATIONS	
Radome Material	Pultruded Polyester/Fiberglass – UV Protected
Color	White
Ingress Protection	IP67
Weight (grams)	166
Wind Loading (MPH)	150
Overall Length (inches)	6.81
Side Loading @ 1 Ft (Lbs)	30
Pull Off (Lbs)	100

Outdoor Radome Omni Dual-Band Antenna

Part# W5030


HORIZONTAL PLANE 2.4 - 2.5 GHz

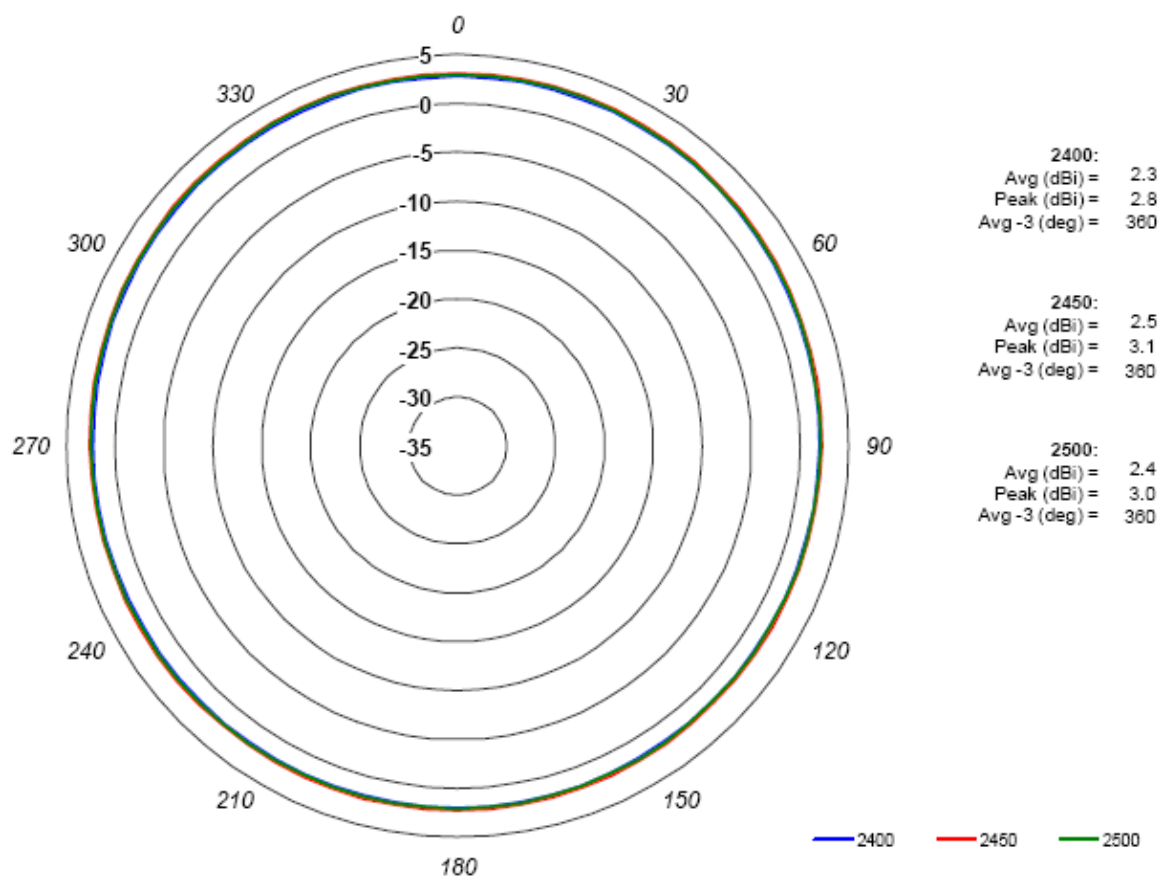

Outdoor Radome Omni Dual-Band Antenna

Part# W5030


HORIZONTAL PLANE 5.15 – 5.875 GHz

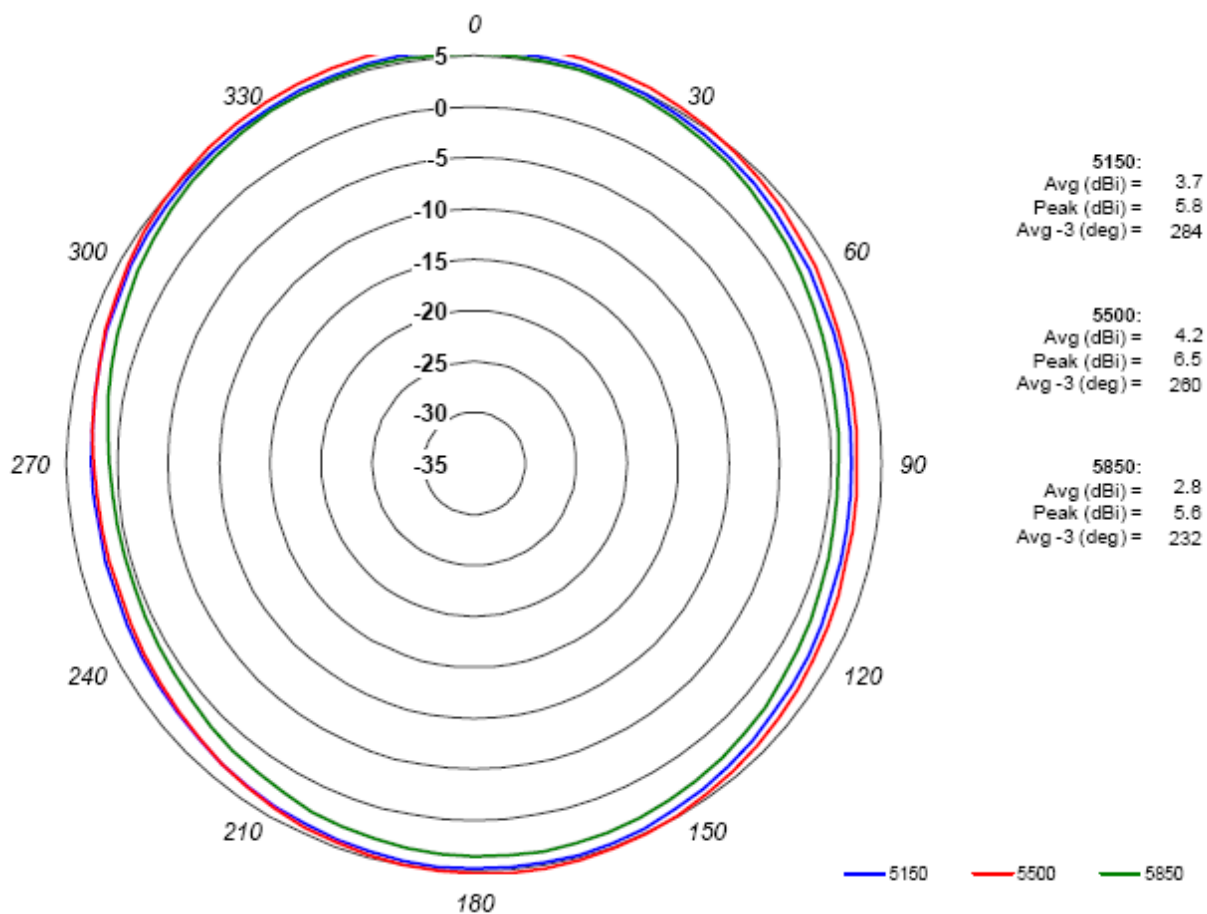

Outdoor Radome Omni Dual-Band Antenna

Part# W5030


VERTICAL PLANE 2.4 – 2.5 GHz

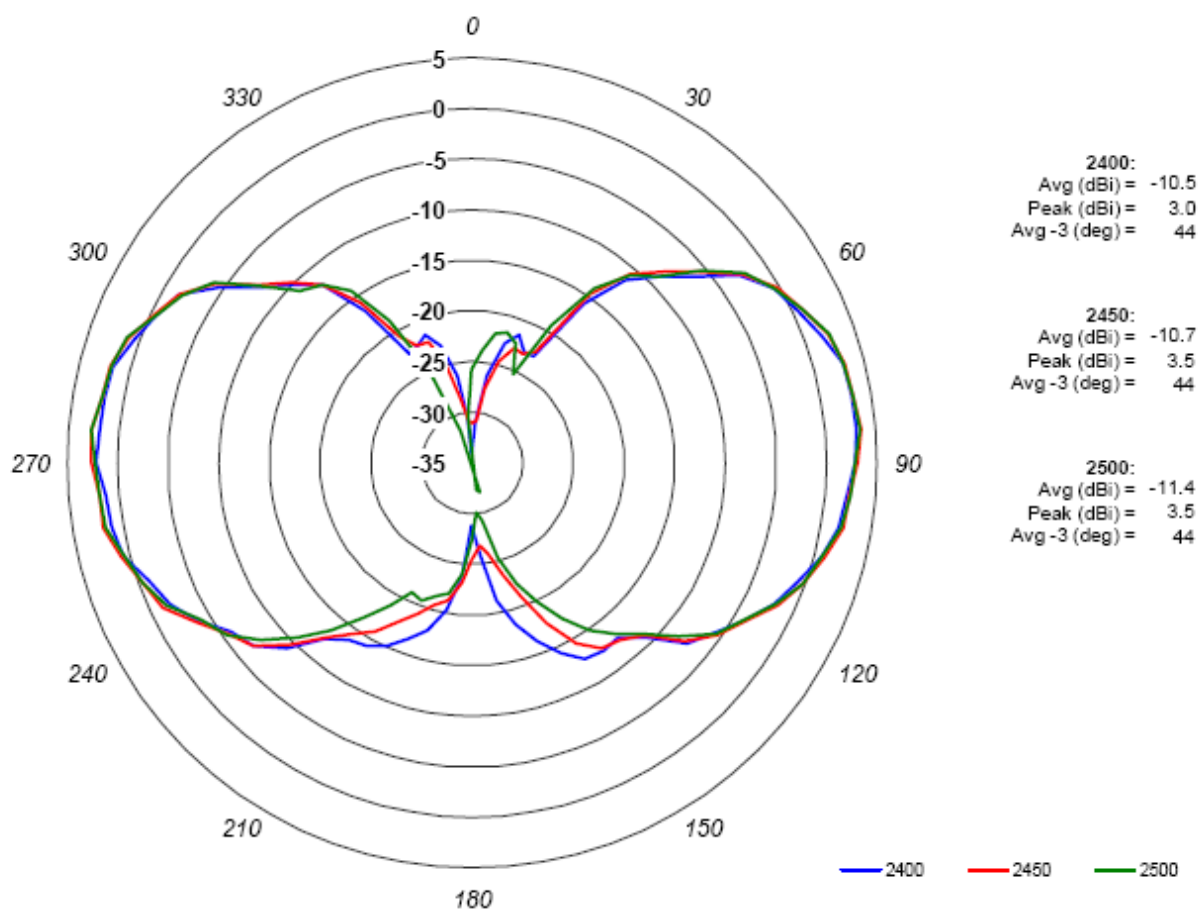

Outdoor Radome Omni Dual-Band Antenna

Part# W5030

VERTICAL PLANE 5.15 – 5.875 GHz

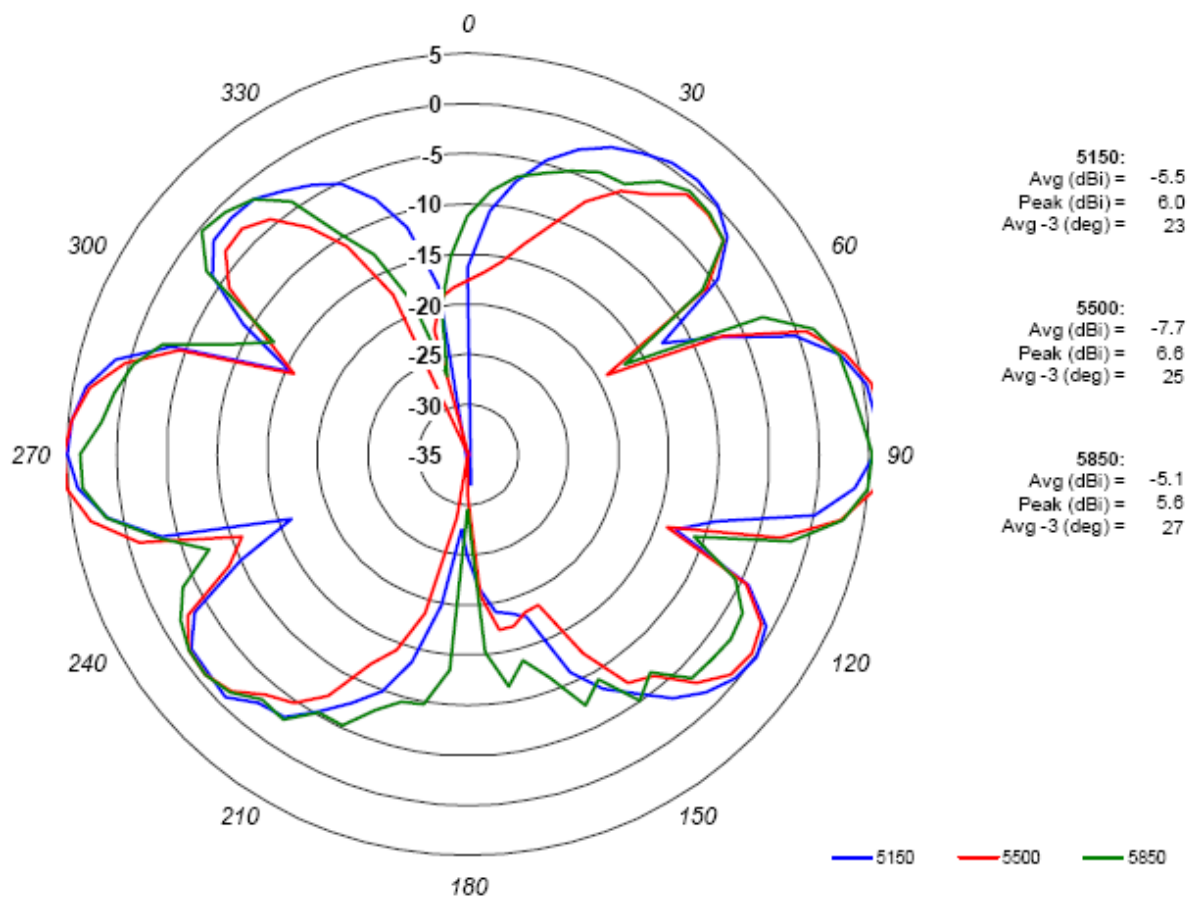

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

W5030