

TEST REPORT

Reference No...... : WTS16S0243054-1E
FCC ID : 2AC88-E1
Applicant..... : HONGKONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED
Address..... : Unit D.16F.chenknang plaza 250 Hennessy Road,Wanchai
Hongkong
Manufacturer : Shenzhen Ukelink New Technology Co.,Ltd
Address..... : 3 Floor, Building A, Unit 1, the Software industry base, Xuefuroad,
Nanshan district, Shenzhen, Guangdong, China
Product Name..... : 4G Free Roaming Hotspot
Model No...... : E1
Brand..... : GlocalMe
Standards..... : FCC CFR47 Part 15C Section 15.247:2015
Date of Receipt sample : Feb. 17, 2016
Date of Test : Feb. 18 – Apr. 07, 2016
Date of Issue..... : Apr. 08, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	8
4.4 TEST MODE	8
4.5 TEST FACILITY	8
5 EQUIPMENT USED DURING TEST	10
5.1 EQUIPMENTS LIST	10
5.2 DESCRIPTION OF SUPPORT UNITS	11
5.3 MEASUREMENT UNCERTAINTY	11
5.4 TEST EQUIPMENT CALIBRATION	11
6 CONDUCTED EMISSION	12
6.1 E.U.T. OPERATION	12
6.2 EUT SETUP	12
6.3 MEASUREMENT DESCRIPTION	12
6.4 CONDUCTED EMISSION TEST RESULT	13
7 RADIATED SPURIOUS EMISSIONS.....	15
7.1 EUT OPERATION.....	15
7.2 TEST SETUP	16
7.3 SPECTRUM ANALYZER SETUP	17
7.4 TEST PROCEDURE	18
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
7.6 SUMMARY OF TEST RESULTS	19
8 CONDUCTED SPURIOUS EMISSIONS.....	22
8.1 TEST PROCEDURE	22
8.2 TEST RESULT	23
9 BAND EDGE MEASUREMENT	28
9.1 TEST PROCEDURE	28
9.2 TEST RESULT	29
10 20 DB BANDWIDTH MEASUREMENT	35
10.1 TEST PROCEDURE.....	35
10.2 TEST RESULT	35
11 MAXIMUM PEAK OUTPUT POWER	41
11.1 TEST PROCEDURE.....	41
11.2 TEST RESULT	41
12 HOPPING CHANNEL SEPARATION	47
12.1 TEST PROCEDURE.....	47
12.2 TEST RESULT	47
13 NUMBER OF HOPPING FREQUENCY.....	53
13.1 TEST PROCEDURE.....	53

13.2 TEST RESULT53

14 DWELL TIME55

14.1 TEST PROCEDURE.....55

14.2 TEST RESULT55

15 ANTENNA REQUIREMENT61

16 RF EXPOSURE.....62

4 General Information

4.1 General Description of E.U.T.

Product Name	: 4G Free Roaming Hotspot
Model No.	: E1
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EDGE Class	: 12
CDMA	: 800/1900MHz
WCDMA Band(s)	: FDD Band I/II/IV/V/VIII
LTE Bnad(s)	: LTE Band 2/4/5/17/41
Wi-Fi Specification	: 2.4G: 802.11b/g/n HT20/n
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	LA0908 Ver.B
Software Version	E1_CTA_V01
storage location	: Internal Storage

Test Exercise : The EUT was operated in a normal mode.

Note: Main board(Modem1):
 The EUT Main board support GSM850/900/DCS1800/PCS1900, CDMA 800/1900MHz,WCDMA Band 1/2/4/5/8, LTE Band 2/4/5/17/41 function. It is intended for speech, Multimedia Message Service (MMS) transmission and 4G free roaming hotspot. It is equipped with GPRS/EDGE class 12 for GSM850/900/DCS1800/PCS1900, GPS,Bluetooth and Wi-Fi functions. For more information see the following datasheet.
 Vice board(Modem2):
 The EUT Vice board support GSM850/900/DCS1800/PCS1900, CDMA 800/1900MHz, WCDMA Band 1/2/4/5/8. It is intended for system localization. It is equipped with GPRS/EDGE class 12 for GSM850/900/DCS1800/PCS1900

4.2 Details of E.U.T.

Operation Frequency	: GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz CDMA800: 824.70~848.31MHz CDMA1900: 1851.25~1908.75MHz WCDMA Band II: 1850~1910MHz WCDMA Band IV: 1710~1755MHz WCDMA Band V: 824~849MHz
---------------------	--

	LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 5: 824~849MHz LTE Band 17: 706~714MHz LTE Band 41: 2498~2688MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz Bluetooth: 2402~2480MHz
Max. RF output power	: Main Board: GSM 850: 32.62dBm PCS1900:29.68dBm CDMA800:24.64dBm CDMA1900:24.47dBm WCDMA Band II: 22.30dBm WCDMA Band V: 22.25dBm WCDMA Band IV: 22.59dBm LTE Band 2: 23.49dBm LTE Band 4: 23.5dBm LTE Band 5: 23.63dBm LTE Band 17: 23.79dBm LTE Band 41: 23.85dBm Vice Board: GSM 850: 32.75dBm PCS1900:29.75dBm CDMA800:24.81dBm CDMA1900:24.44dBm WCDMA Band II: 22.46dBm WCDMA Band V: 22.55dBm WCDMA Band IV: 22.68dBm WiFi(2.4G): 9.28dBm Bluetooth: -0.37dBm
Type of Modulation	: GSM,GPRS: GMSK CDMA2000:QPSK CDMA2000 1xEV-DO:QPSK,8PSK WCDMA: BPSK LTE: QPSK, 16QAM WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK,8DPSK
Antenna installation	: GSM/CDMA/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain	Main Board:

GSM 850: -0.95dBi
PCS1900: -1.9dBi
CDMA800: -0.95dBi
CDMA1900: -1.9dBi
WCDMA Band II: -1.9dBi
WCDMA Band IV: -2.6dBi
WCDMA Band V: -0.95dBi
LTE Band 2: -1.8dBi
LTE Band 4: 0.05dBi
LTE Band 5: -0.95dBi
LTE Band 7: 0.9dBi
LTE Band 17: -4.5dBi
LTE Band 41: 1.5dBi
Vice Board:
GSM 850: -0.95dBi
PCS1900: -1.9dBi
CDMA800: -0.95dBi
CDMA1900: -1.9dBi
WCDMA Band II: -1.9dBi
WCDMA Band IV: -2.6dBi
WCDMA Band V: -0.95dBi
WiFi(2.4G): 0dBi
Bluetooth: 0dBi

Technical Data:

Battery DC 3.8V, 13.3Wh
DC 5V, 1.0A, charging from mini USB port

4.3 Channel List

Normal

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- IC – Registration No.: 7760A**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2015	Sep.14,2016
2.	LISN	R&S	ENV216	101215	Sep.15,2015	Sep.14,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2015	Sep.14,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2015	Sep.14,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2015	Sep.14,2016
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2015	Sep.14,2016
4.	Cable	LARGE	RF300	-	Sep.15,2015	Sep.14,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2015	Apr.17,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2015	Apr.17,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2015	Apr.17,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.09,2015	Apr.08,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2015	Sep.14,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2015	Sep.14,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2015	Sep.14,2016

4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2015	Sep.14,2016
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2015	Sep.14,2016

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2009
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	22.8 °C
Humidity:	52.6 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in BT link mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

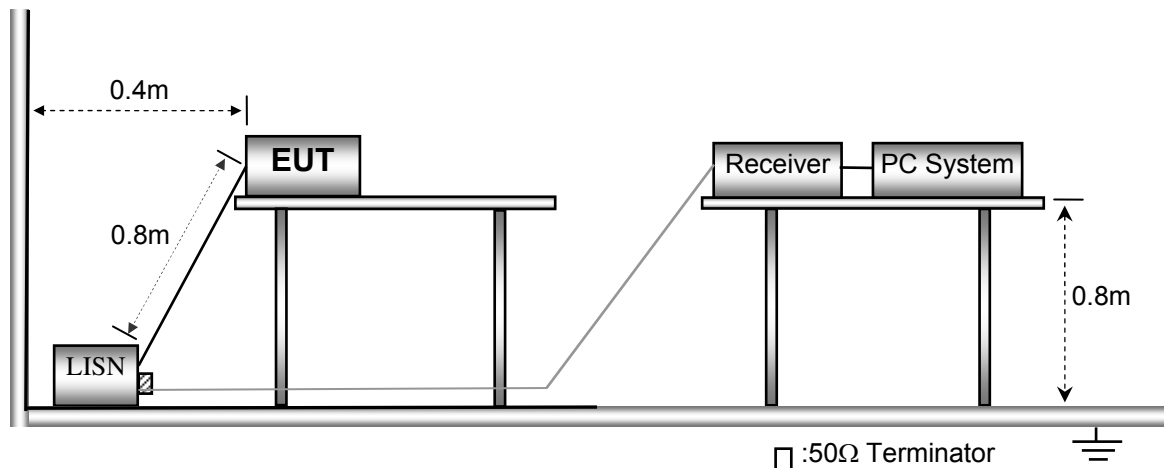


6.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result

Live line:

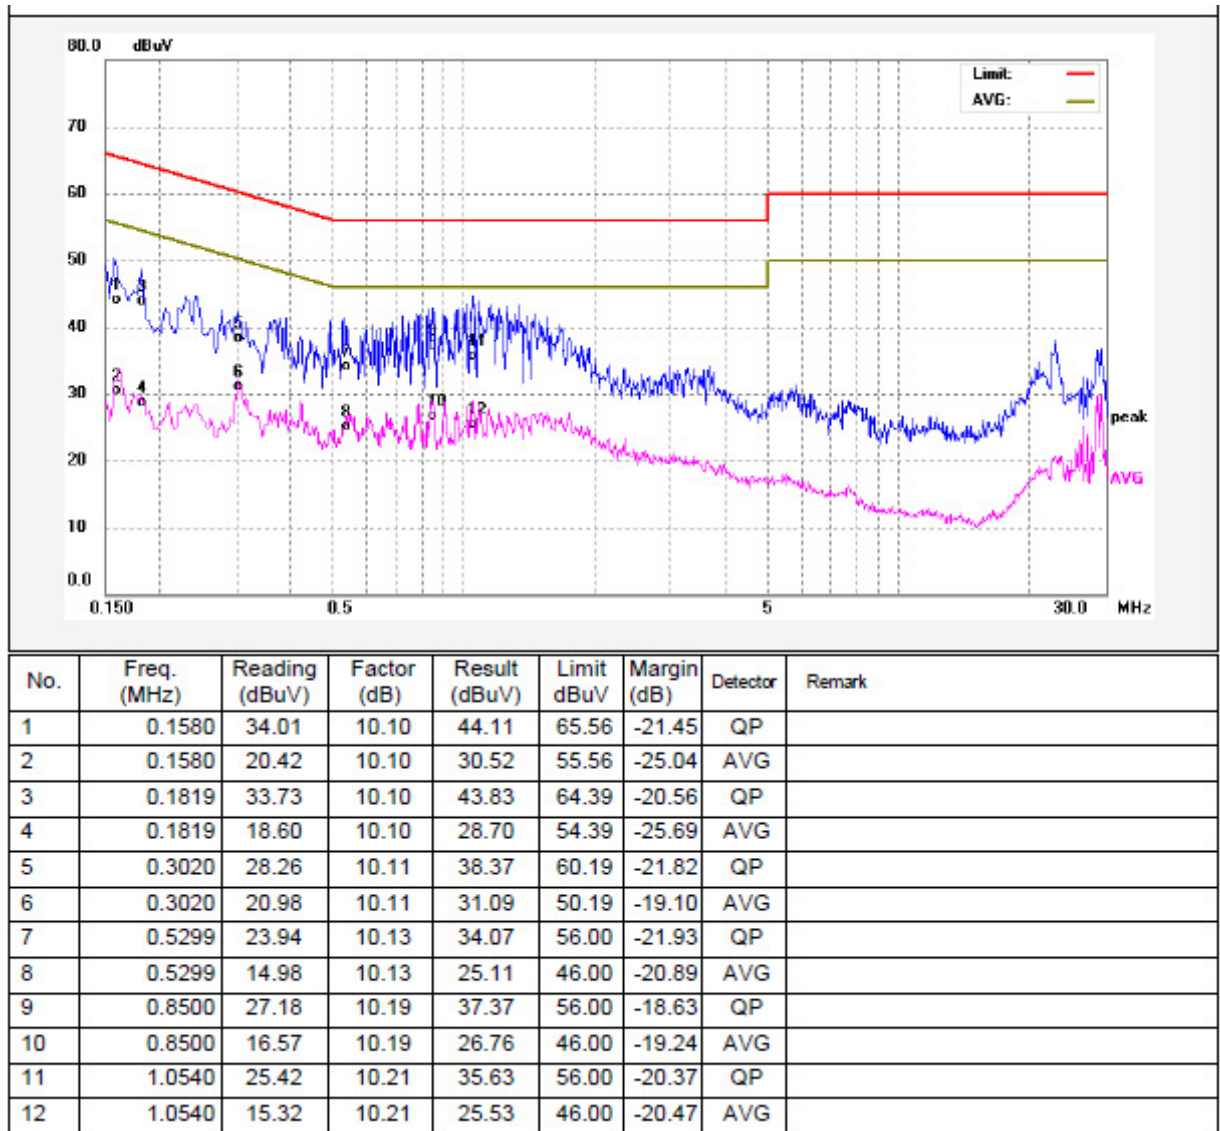

Neutral line:

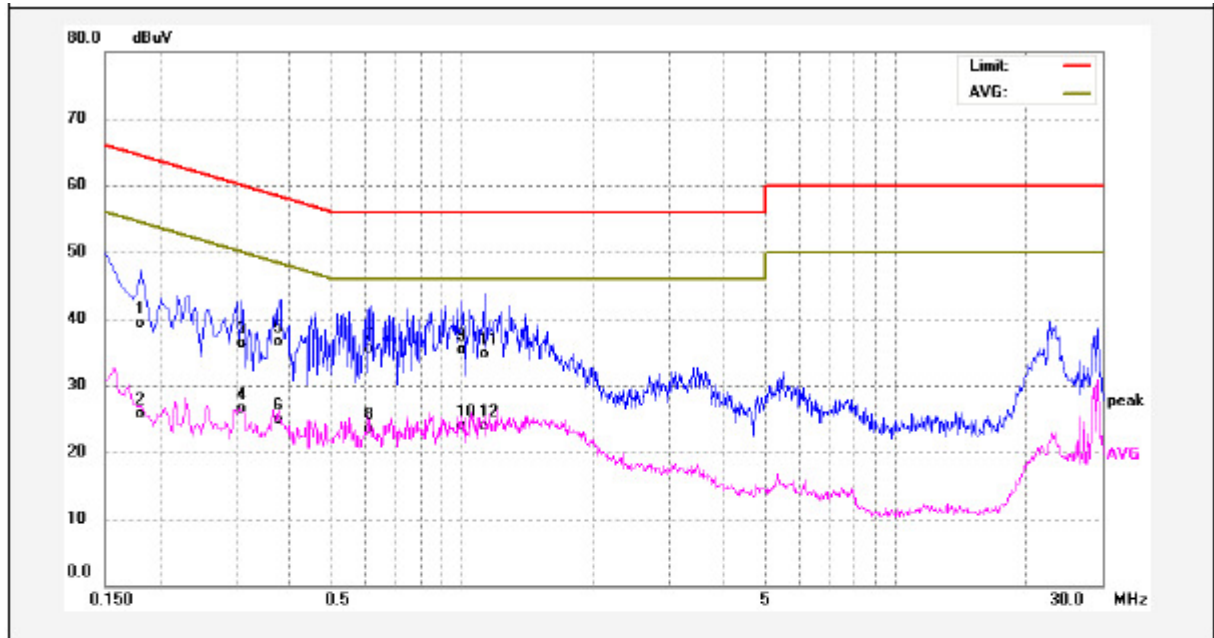

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1819	29.16	10.10	39.26	64.39	-25.13	QP	
2	0.1819	15.70	10.10	25.80	54.39	-28.59	AVG	
3	0.3100	26.28	10.11	36.39	59.97	-23.58	QP	
4	0.3100	16.33	10.11	26.44	49.97	-23.53	AVG	
5	0.3820	26.42	10.11	36.53	58.23	-21.70	QP	
6	0.3820	14.89	10.11	25.00	48.23	-23.23	AVG	
7	0.6180	25.36	10.15	35.51	56.00	-20.49	QP	
8	0.6180	13.41	10.15	23.56	46.00	-22.44	AVG	
9	1.0020	25.18	10.21	35.39	56.00	-20.61	QP	
10	1.0020	13.63	10.21	23.84	46.00	-22.16	AVG	
11	1.1260	24.50	10.21	34.71	56.00	-21.29	QP	
12	1.1260	13.65	10.21	23.86	46.00	-22.14	AVG	

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in BT link mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

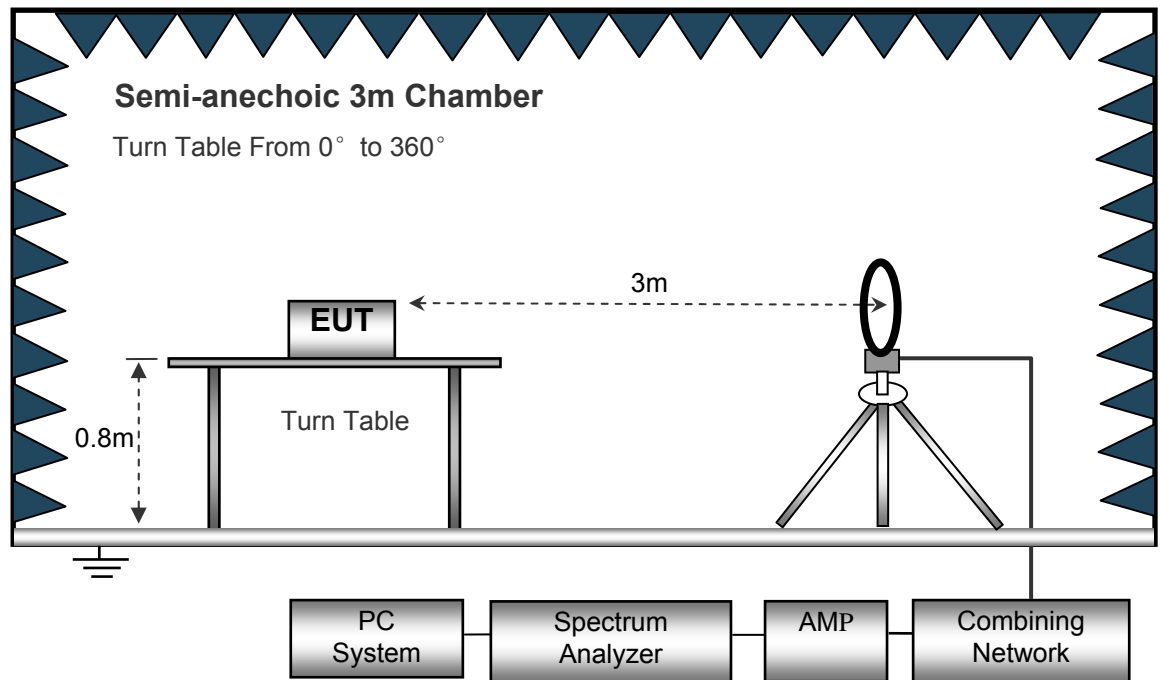

The test setup for emission measurement from 30 MHz to 1 GHz.

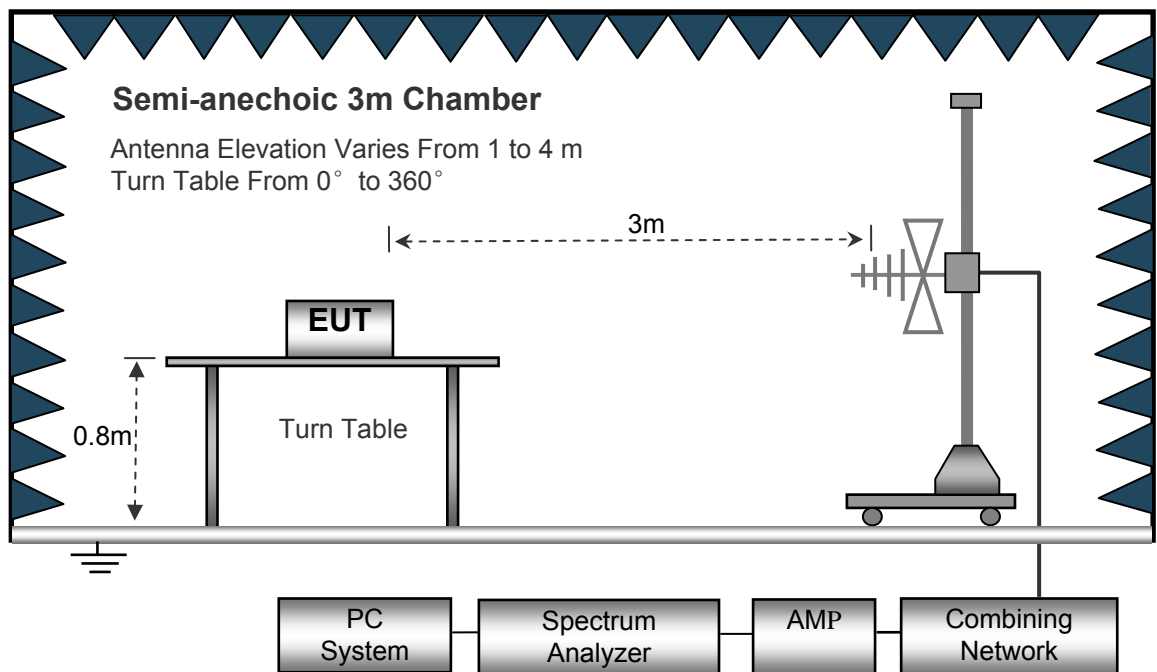

The test setup for emission measurement above 1 GHz.

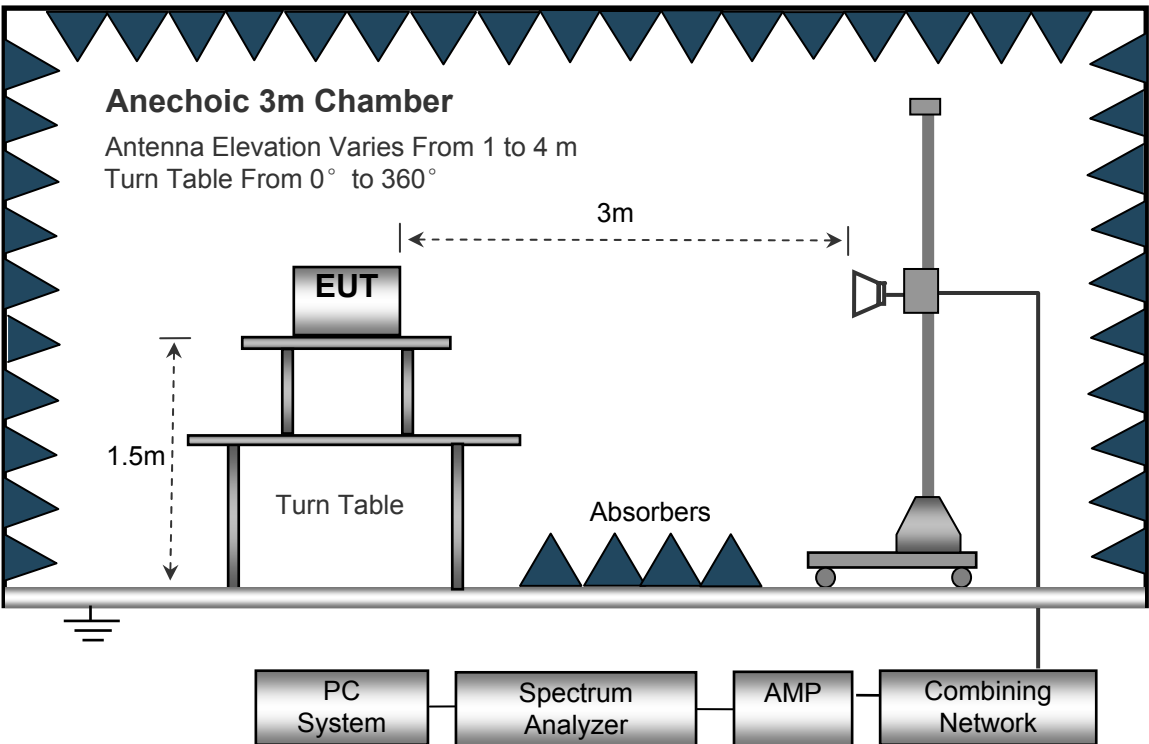

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 19.2 ~ 30MHz

Frequency (MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
	dB μ V @3m	PK/QP	dB/m	dB	dB μ V/m @30m	dB μ V/m @30m	dB
25.58	22.53	QP	19.90	40.00	2.43	29.54	-27.11

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	Height	Polar	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
268.32	36.89	QP	314	1.0	H	-13.35	23.54	46.00	-22.46
268.32	41.33	QP	171	1.5	V	-13.35	27.98	46.00	-18.02
4804.00	46.15	PK	237	1.3	V	-1.06	45.09	74.00	-28.91
4804.00	43.52	Ave	237	1.3	V	-1.06	42.46	54.00	-11.54
7206.00	40.62	PK	238	1.6	H	1.33	41.95	74.00	-32.05
7206.00	35.37	Ave	238	1.6	H	1.33	36.70	54.00	-17.30
2322.16	45.20	PK	262	1.4	V	-13.19	32.01	74.00	-41.99
2322.16	38.23	Ave	262	1.4	V	-13.19	25.04	54.00	-28.96
2384.10	43.67	PK	63	1.3	H	-13.14	30.53	74.00	-43.47
2384.10	36.38	Ave	63	1.3	H	-13.14	23.24	54.00	-30.76
2492.08	44.94	PK	245	1.3	V	-13.08	31.86	74.00	-42.14
2492.08	36.88	Ave	245	1.3	V	-13.08	23.80	54.00	-30.20

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel									
268.32	36.38	QP	245	1.5	H	-13.35	23.03	46.00	-22.97
268.32	41.08	QP	211	1.4	V	-13.35	27.73	46.00	-18.27
4882.00	46.99	PK	251	1.3	V	-0.62	46.37	74.00	-27.63
4882.00	43.48	Ave	251	1.3	V	-0.62	42.86	54.00	-11.14
7323.00	40.90	PK	85	1.3	H	2.21	43.11	74.00	-30.89
7323.00	35.47	Ave	85	1.3	H	2.21	37.68	54.00	-16.32
2347.84	46.65	PK	14	1.6	V	-13.19	33.46	74.00	-40.54
2347.84	39.50	Ave	14	1.6	V	-13.19	26.31	54.00	-27.69
2367.53	44.49	PK	77	1.1	H	-13.14	31.35	74.00	-42.65
2367.53	37.70	Ave	77	1.1	H	-13.14	24.56	54.00	-29.44
2490.12	43.22	PK	81	1.2	V	-13.08	30.14	74.00	-43.86
2490.12	36.73	Ave	81	1.2	V	-13.08	23.65	54.00	-30.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel									
268.32	37.33	QP	360	1.0	H	-13.35	23.98	46.00	-22.02
268.32	40.31	QP	304	1.2	V	-13.35	26.96	46.00	-19.04
4960.00	45.92	PK	255	1.4	V	-0.24	45.68	74.00	-28.32
4960.00	44.86	Ave	255	1.4	V	-0.24	44.62	54.00	-9.38
7440.00	40.14	PK	195	1.8	H	2.84	42.98	74.00	-31.02
7440.00	35.89	Ave	195	1.8	H	2.84	38.73	54.00	-15.27
2318.78	45.28	PK	359	1.8	V	-13.19	32.09	74.00	-41.91
2318.78	39.69	Ave	359	1.8	V	-13.19	26.50	54.00	-27.50
2360.67	42.64	PK	80	1.9	H	-13.14	29.50	74.00	-44.50
2360.67	38.62	Ave	80	1.9	H	-13.14	25.48	54.00	-28.52
2488.86	42.72	PK	297	1.9	V	-13.08	29.64	74.00	-44.36
2488.86	38.63	Ave	297	1.9	V	-13.08	25.55	54.00	-28.45

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

8 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Result

GFSK Low Channel

Fundamental



GFSK Middle Channel

Fundamental



GFSK High Channel

Fundamental



Pi/4 DQPSK Low Channel

Fundamental



Pi/4 DQPSK Middle Channel

Fundamental



Pi/4 DQPSK High Channel

Fundamental



8DPSK Low Channel

Fundamental



8DPSK Middle Channel

Fundamental



8DPSK High Channel

Fundamental



9 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



9.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold



9.2 Test Result



Test plots

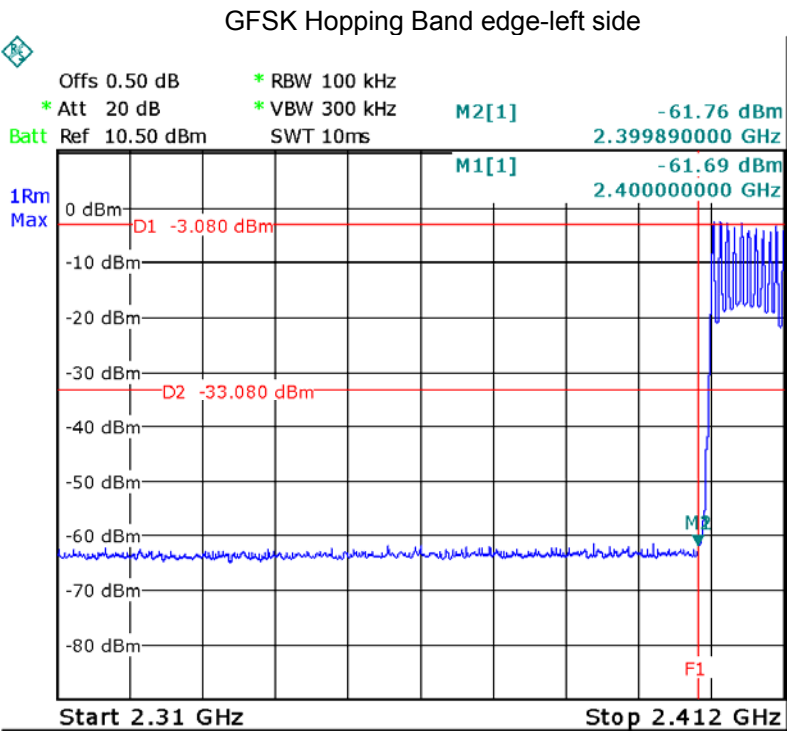
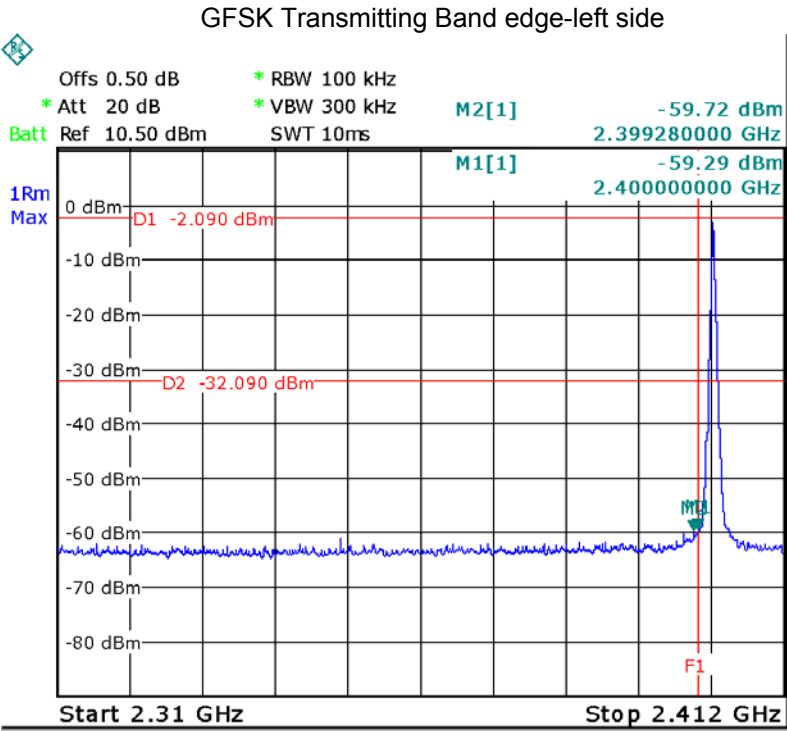


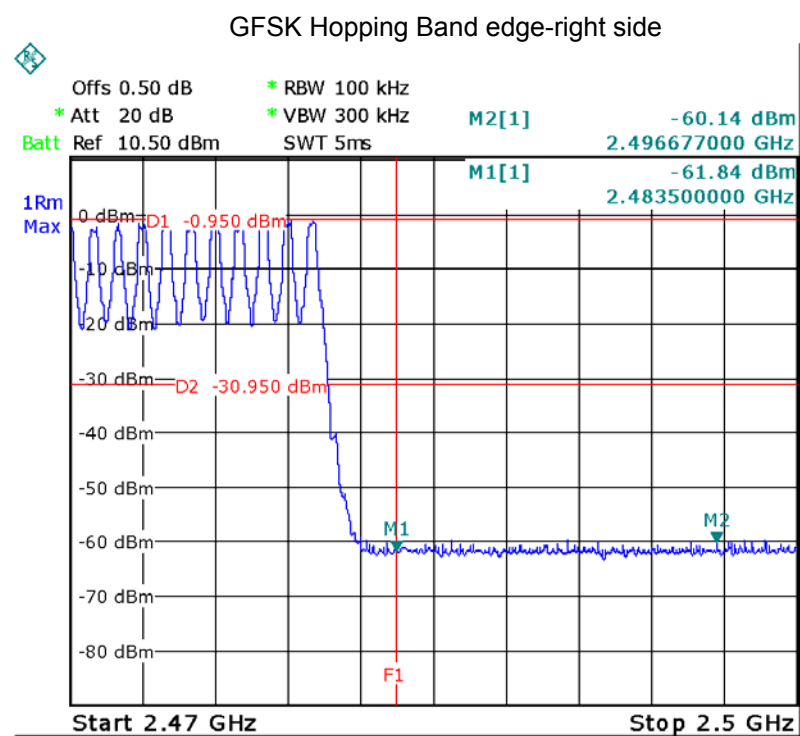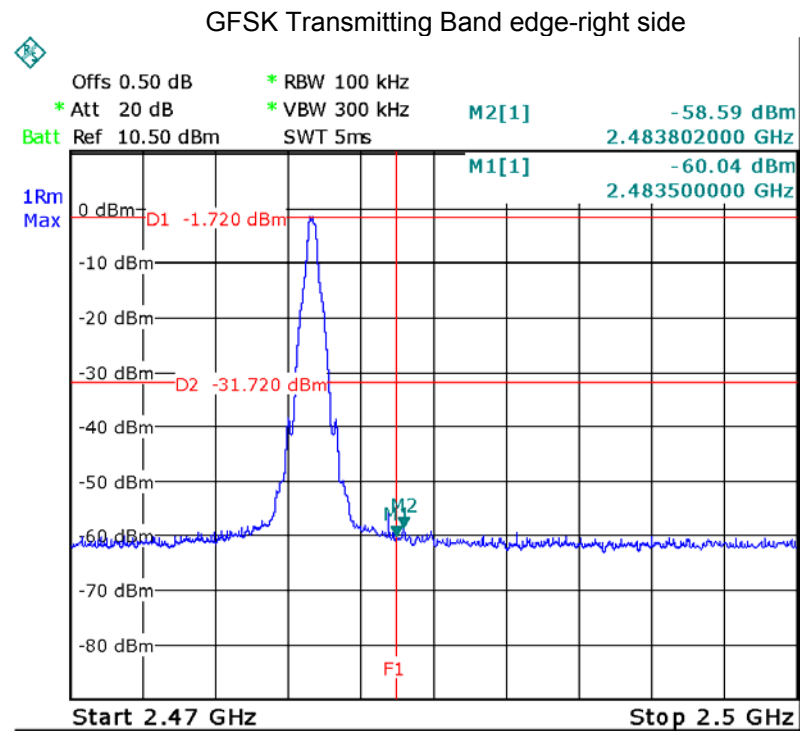

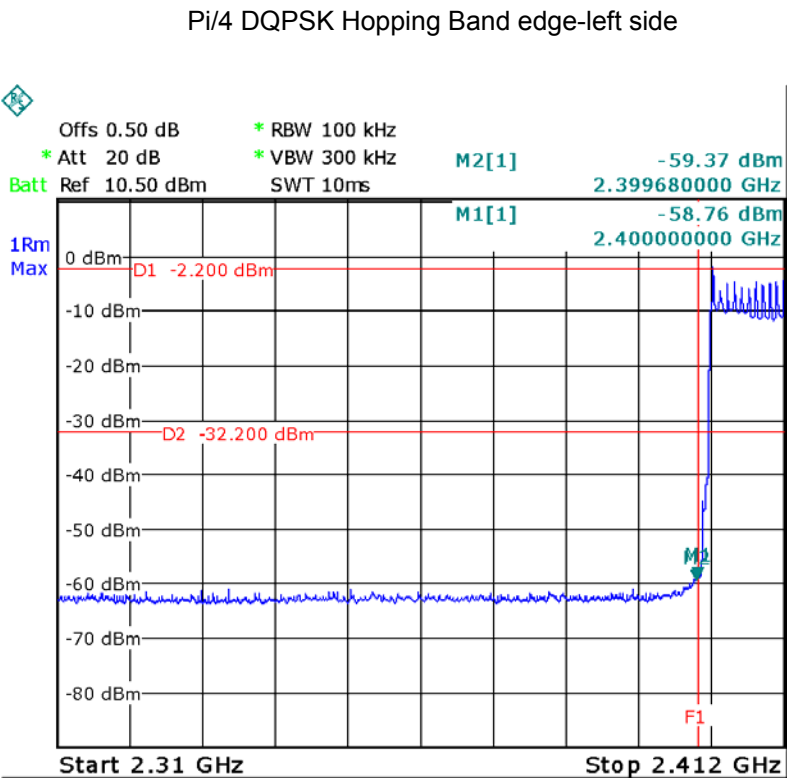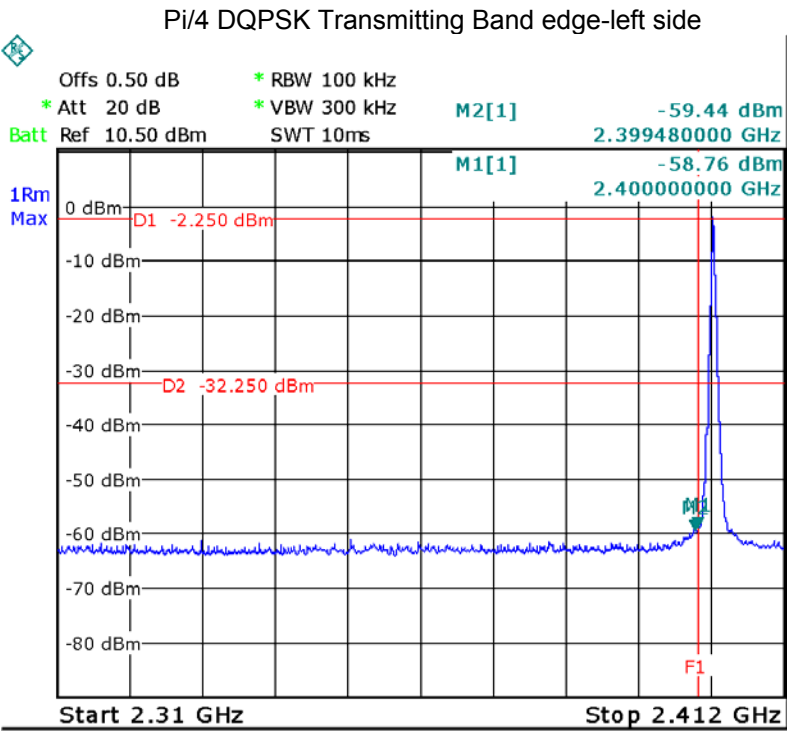

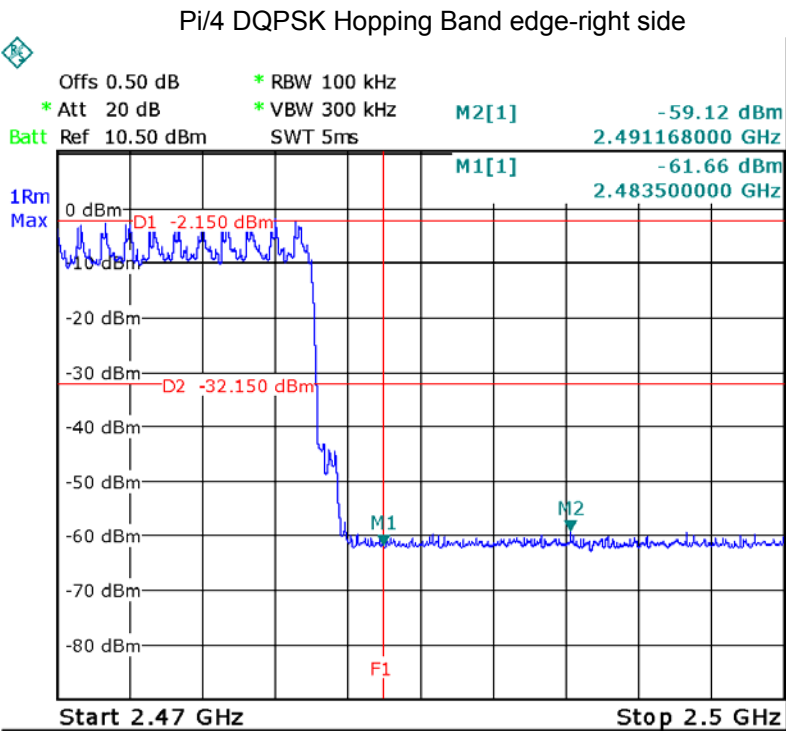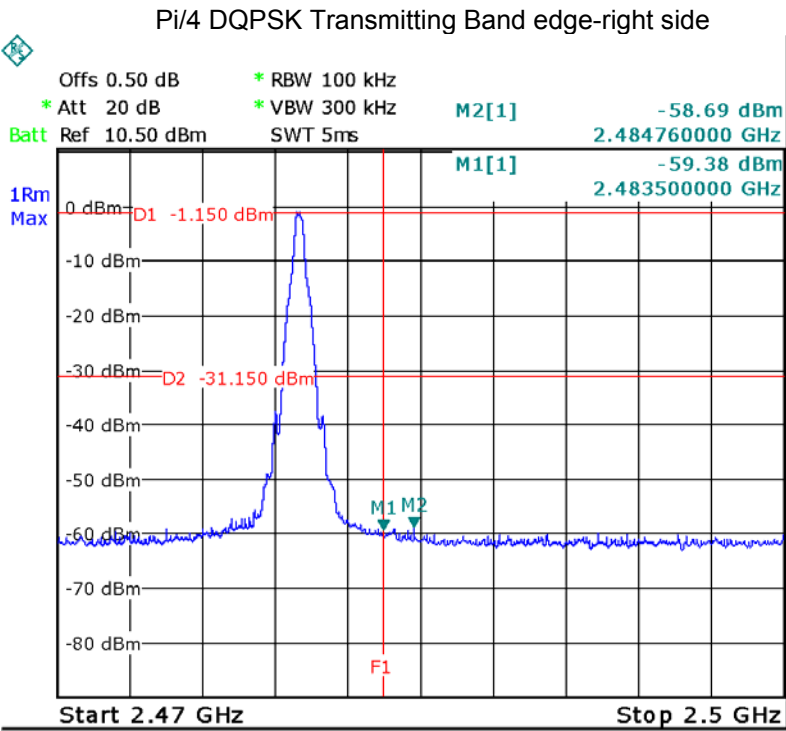

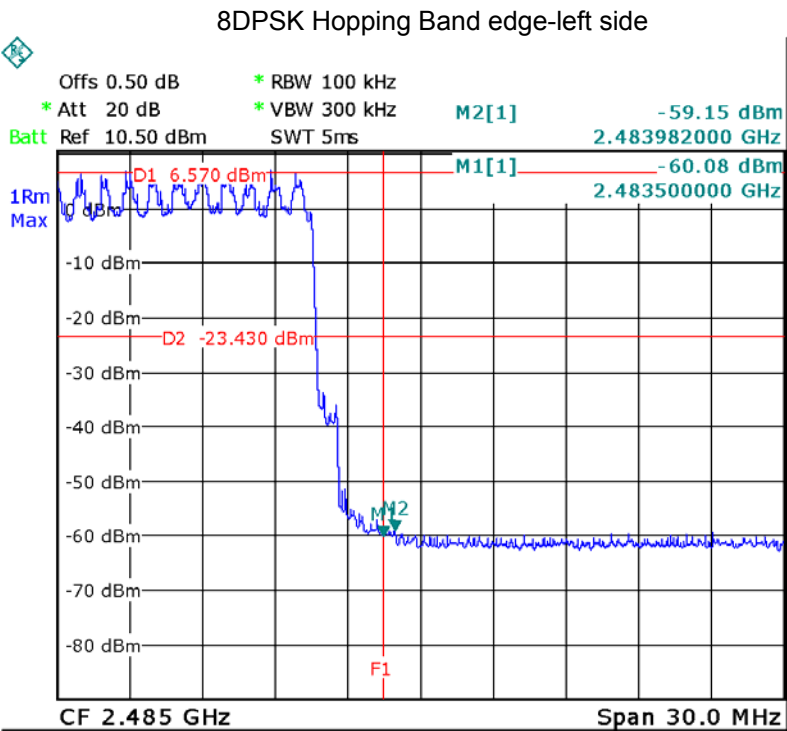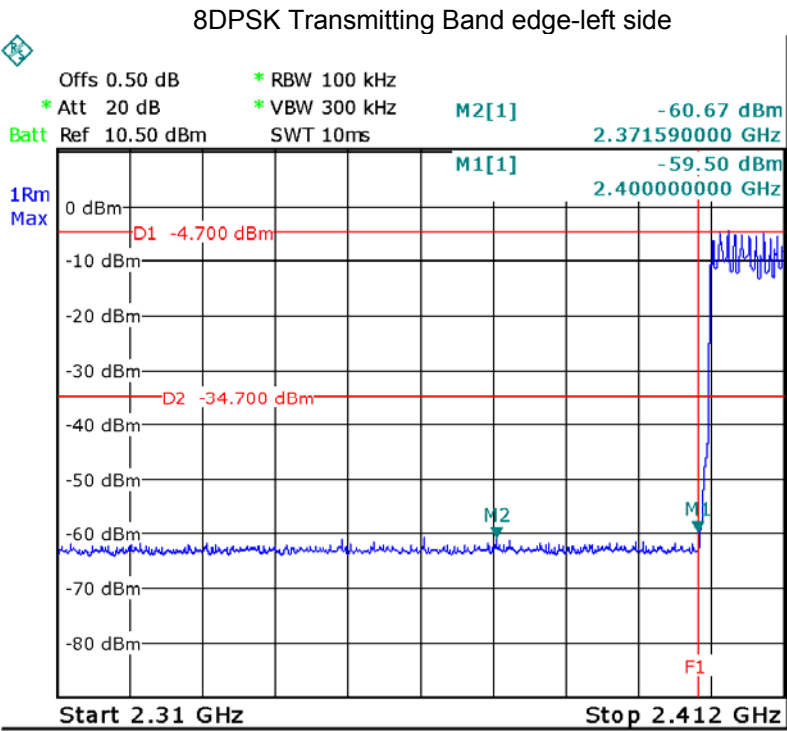

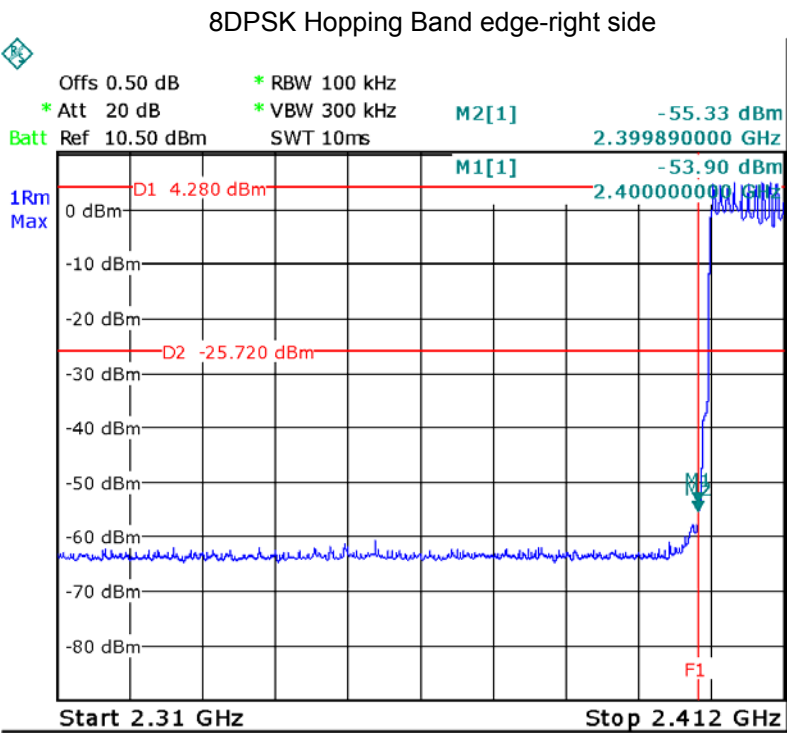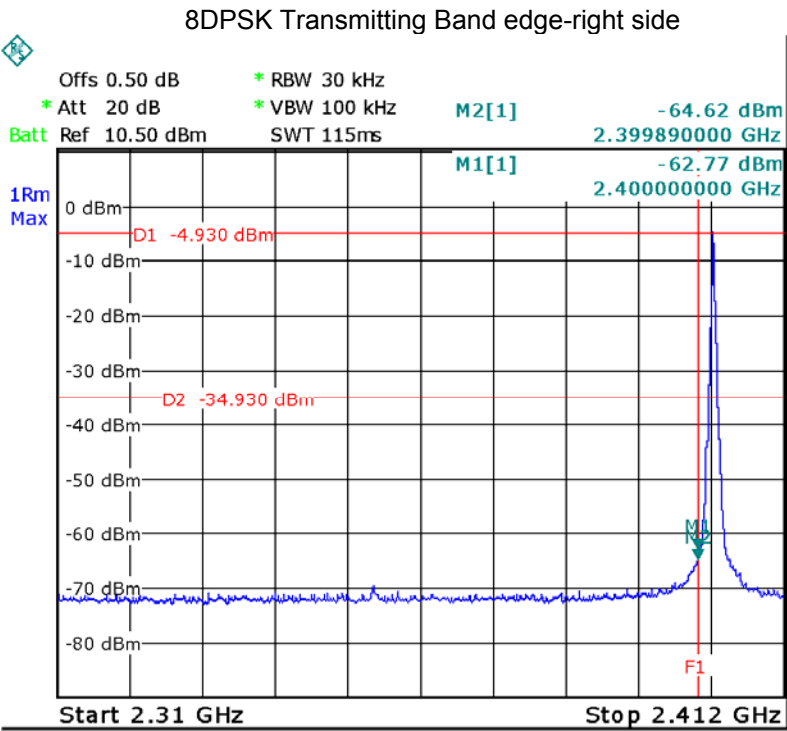

10 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

10.2 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.030
GFSK	Middle	1.030
GFSK	High	1.030
Pi/4 DQPSK	Low	1.030
Pi/4 DQPSK	Middle	1.030
Pi/4 DQPSK	High	1.030
8DPSK	Low	1.030
8DPSK	Middle	1.030
8DPSK	High	1.030



Test plots



GFSK Low Channel


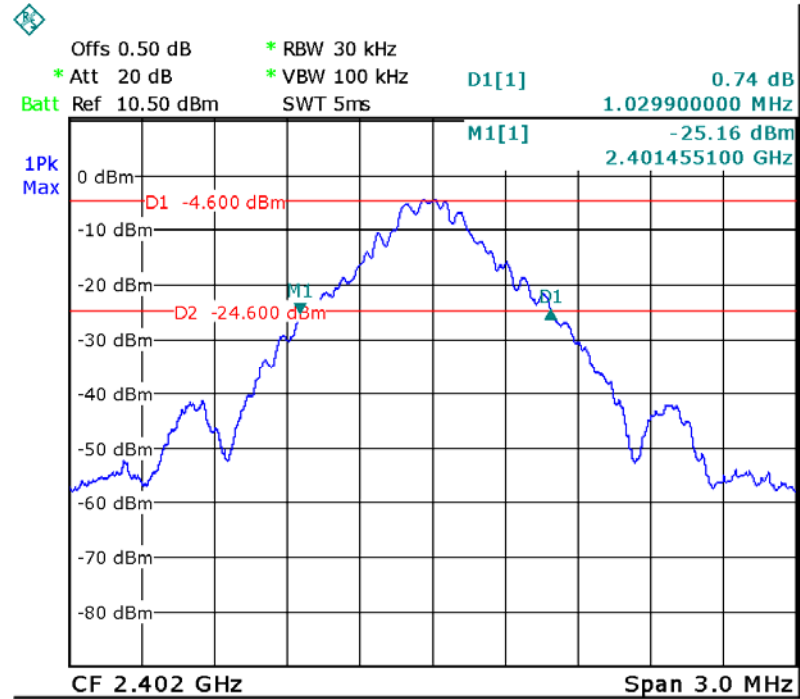



GFSK Middle Channel

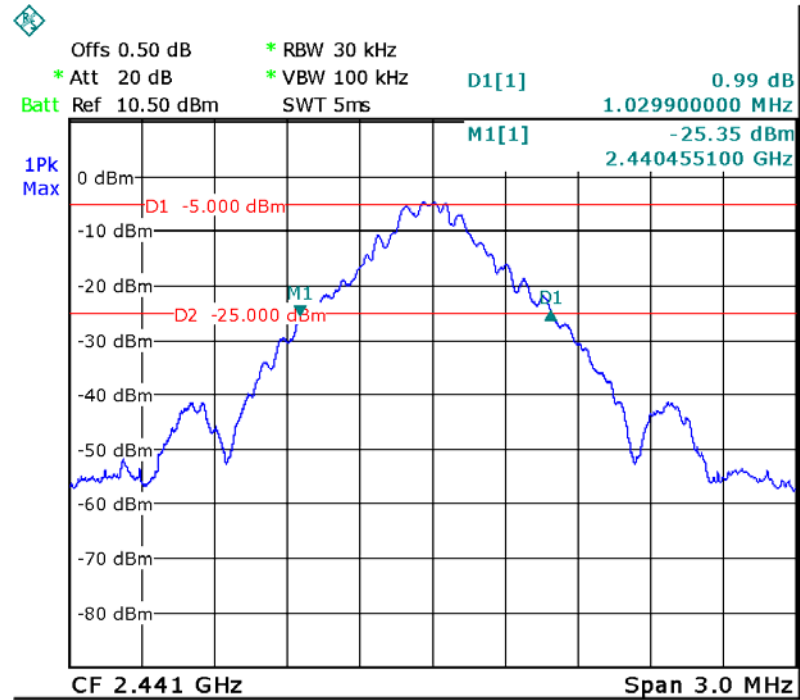

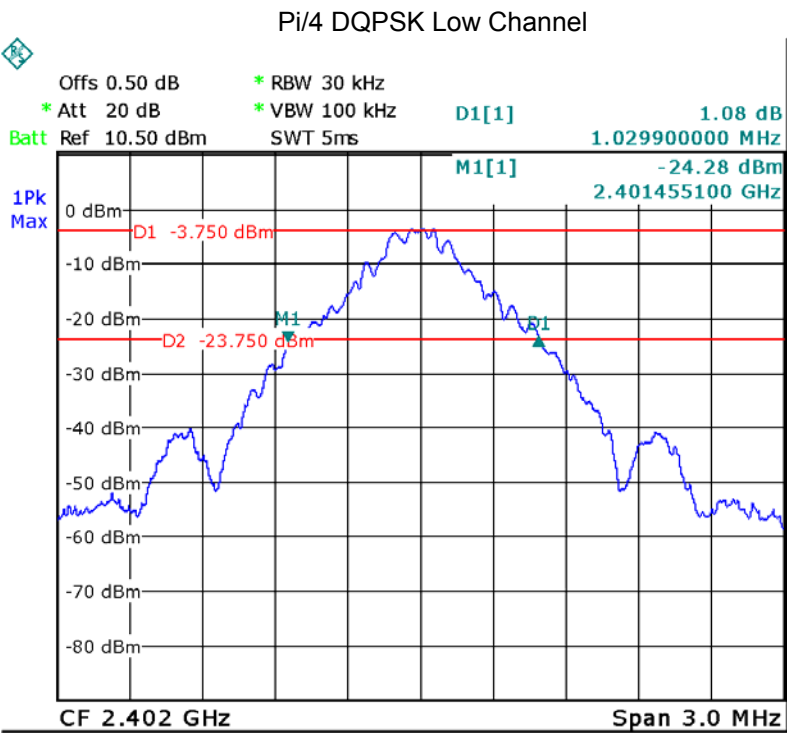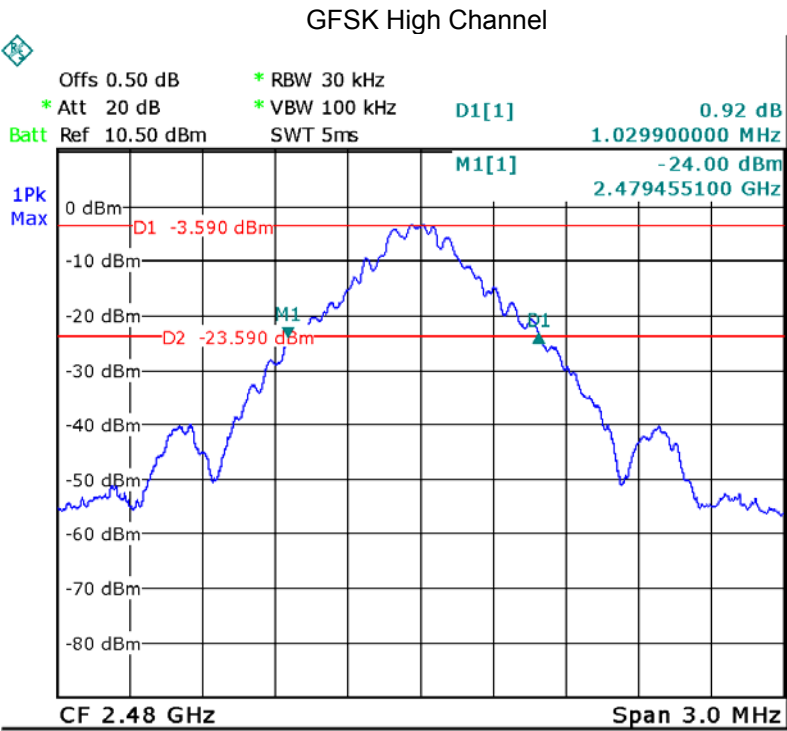

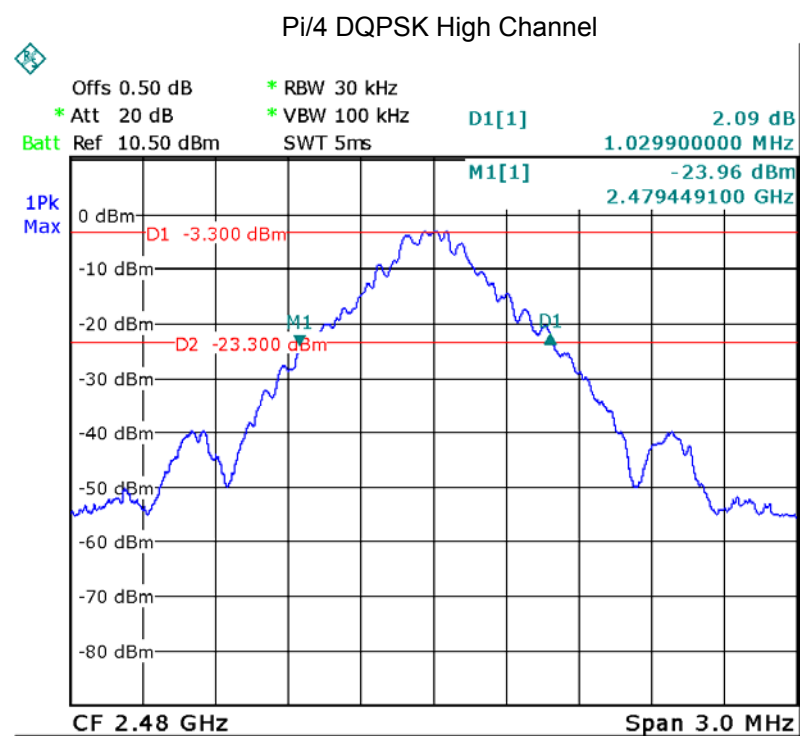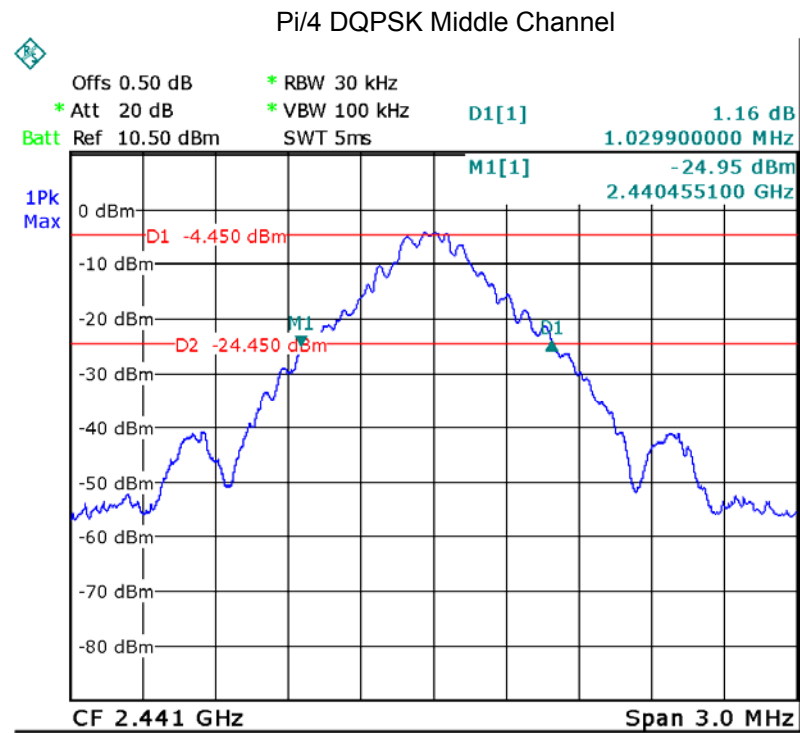

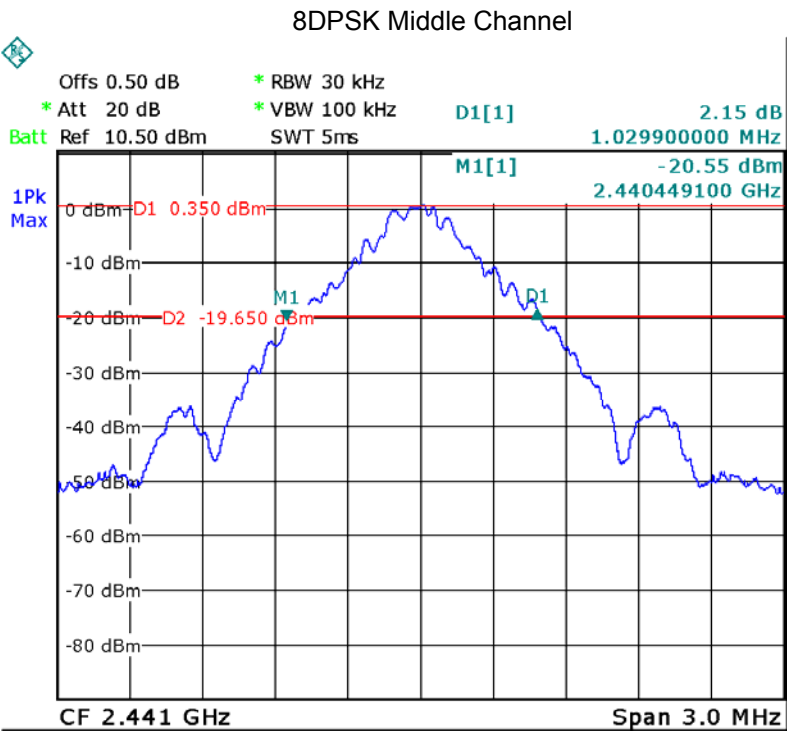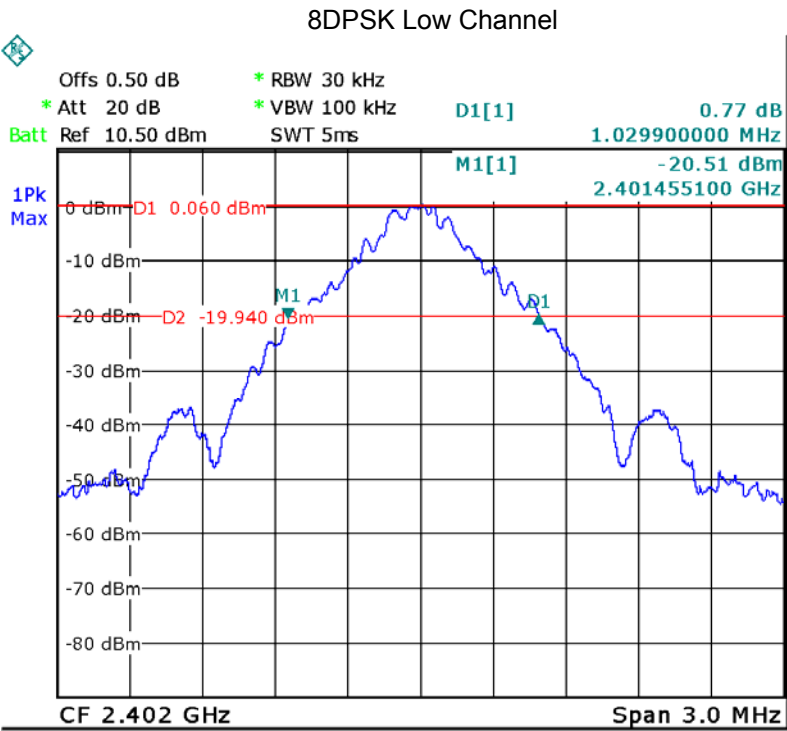

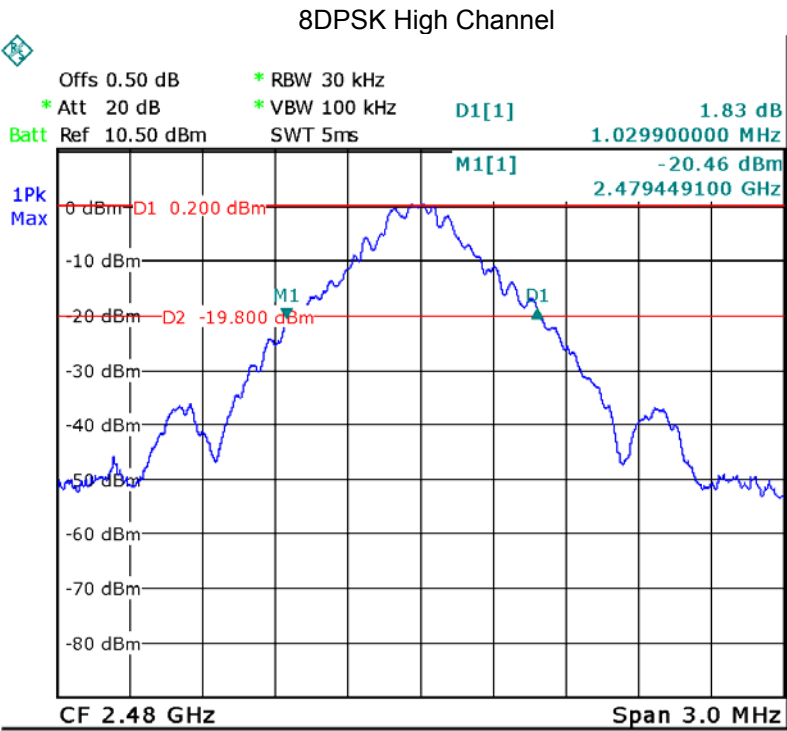

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode:	Test in fixing frequency transmitting mode.

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.///

11.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-2.07	30
GFSK	Middle	-2.77	30
GFSK	High	-0.78	30
Pi/4 DQPSK	Low	-1.15	30
Pi/4 DQPSK	Middle	-1.60	30
Pi/4 DQPSK	High	-0.37	30
8DPSK	Low	-1.75	30
8DPSK	Middle	-2.25	30
8DPSK	High	-1.46	30



Test plots



GFSK Low Channel


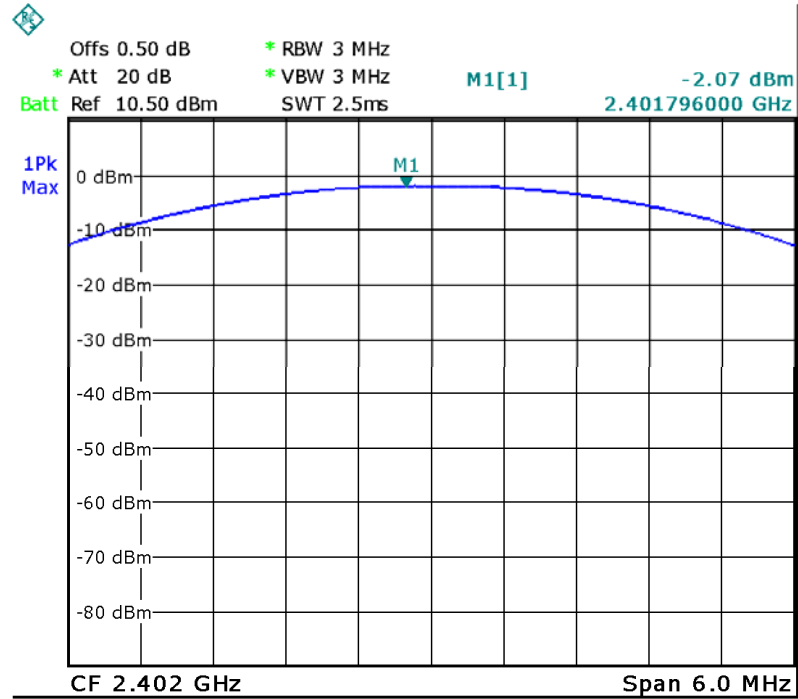



GFSK Middle Channel

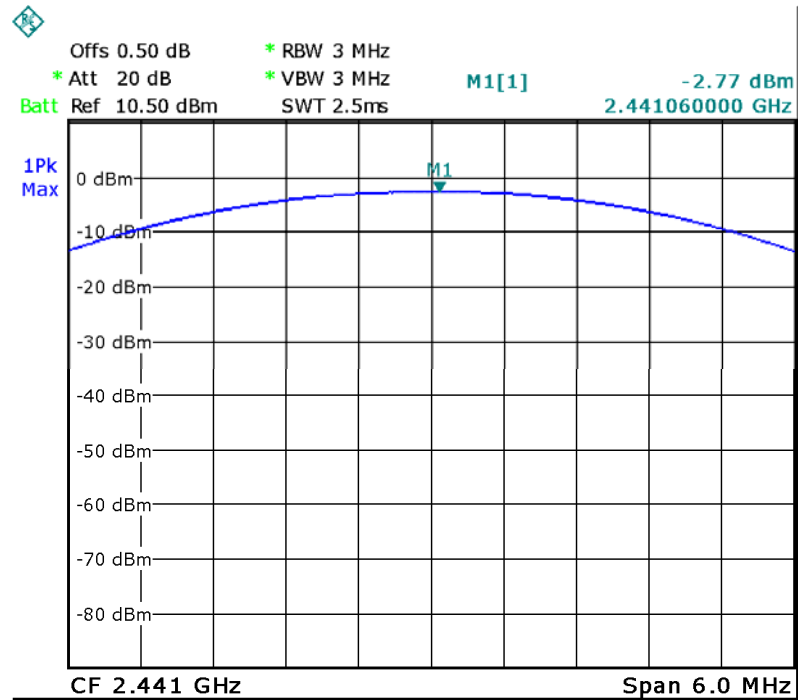

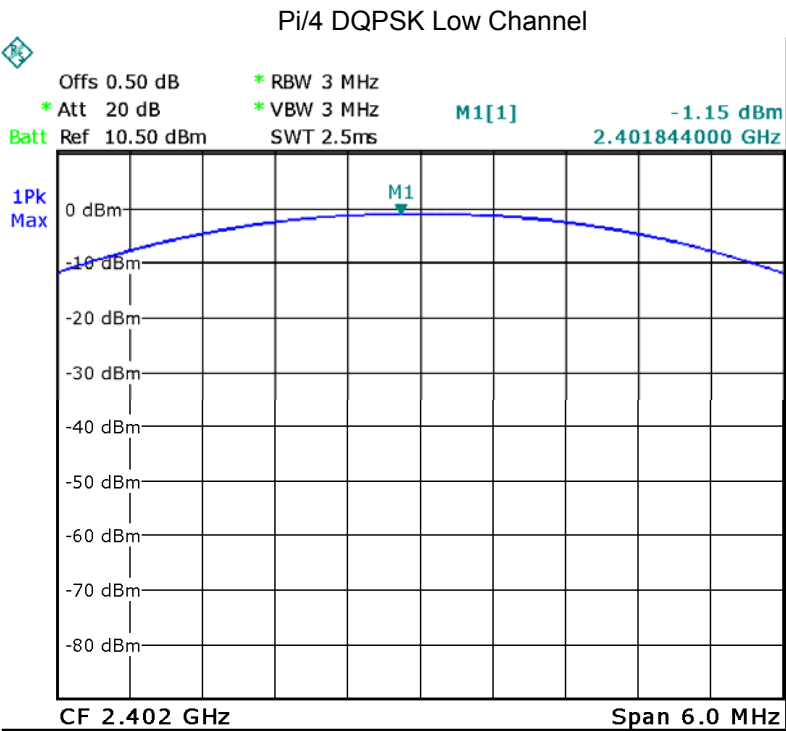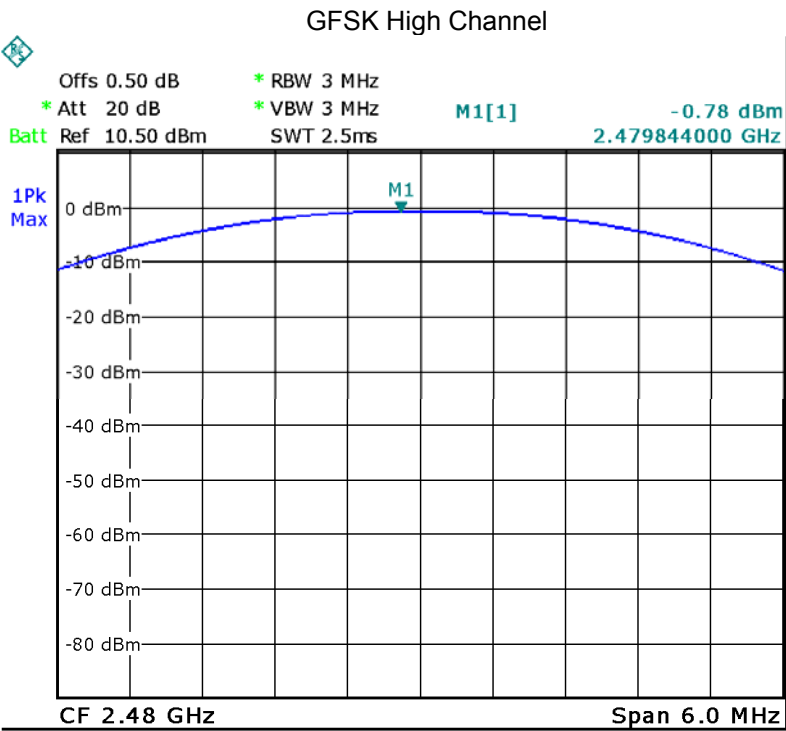

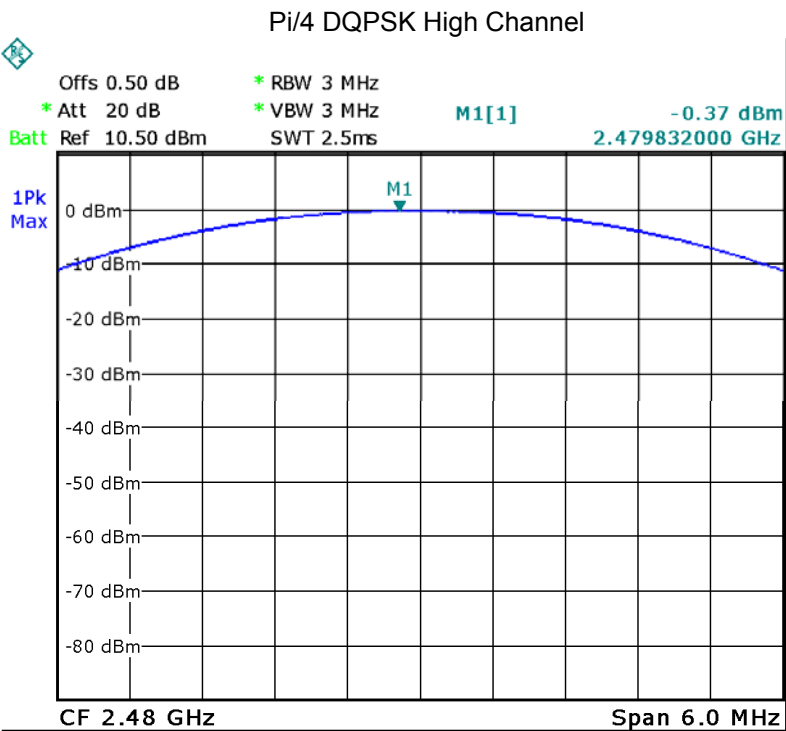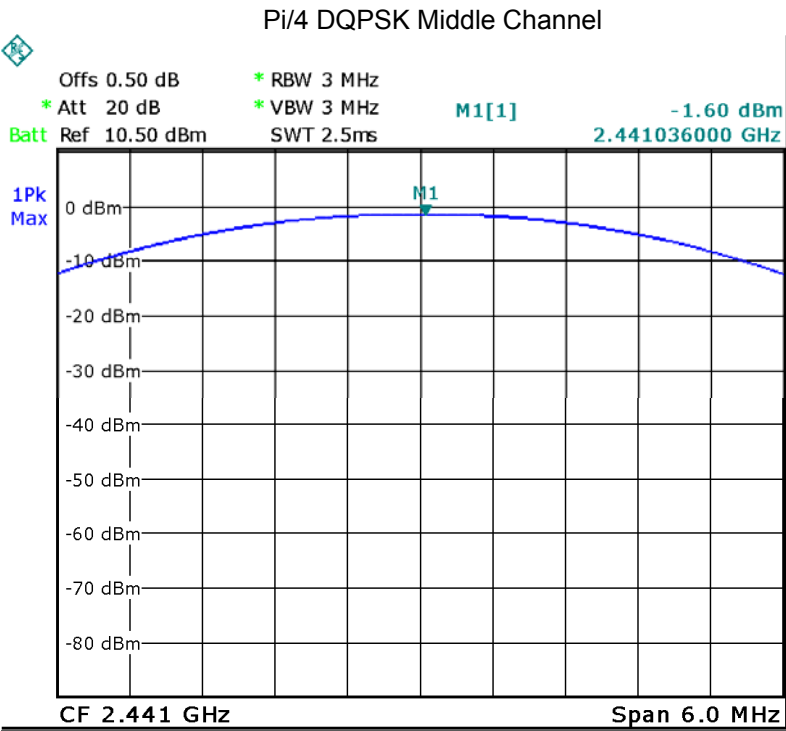

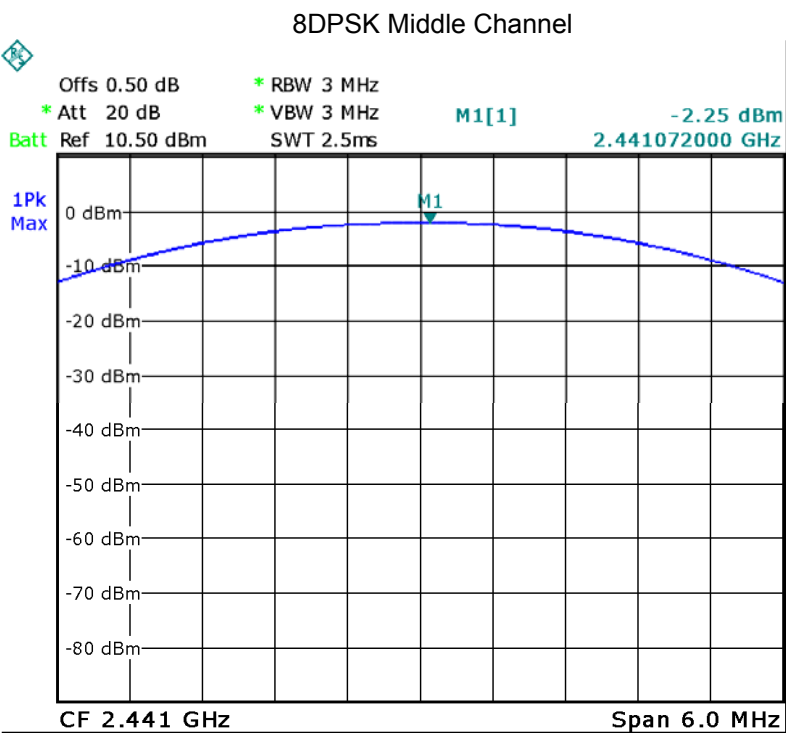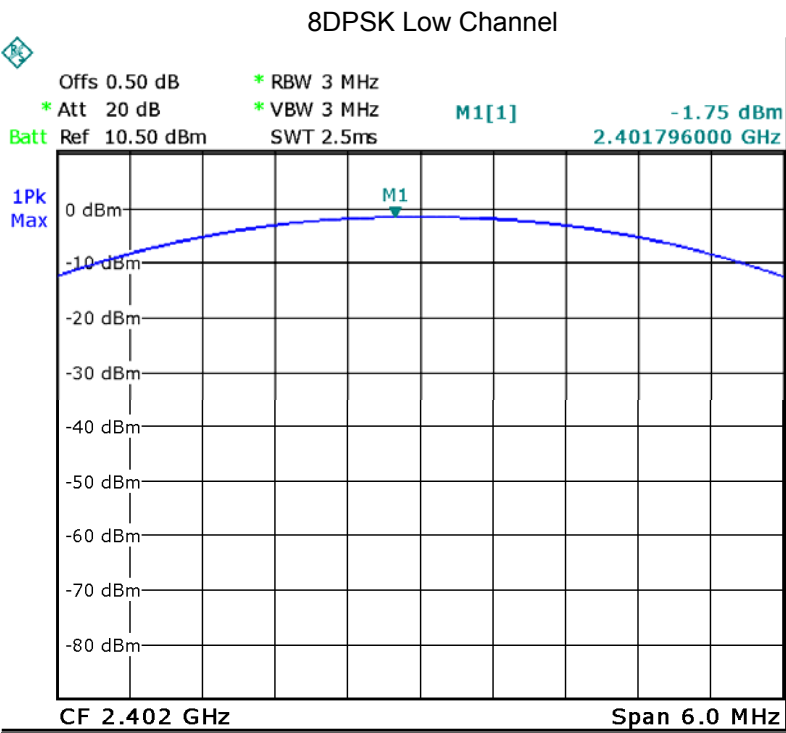

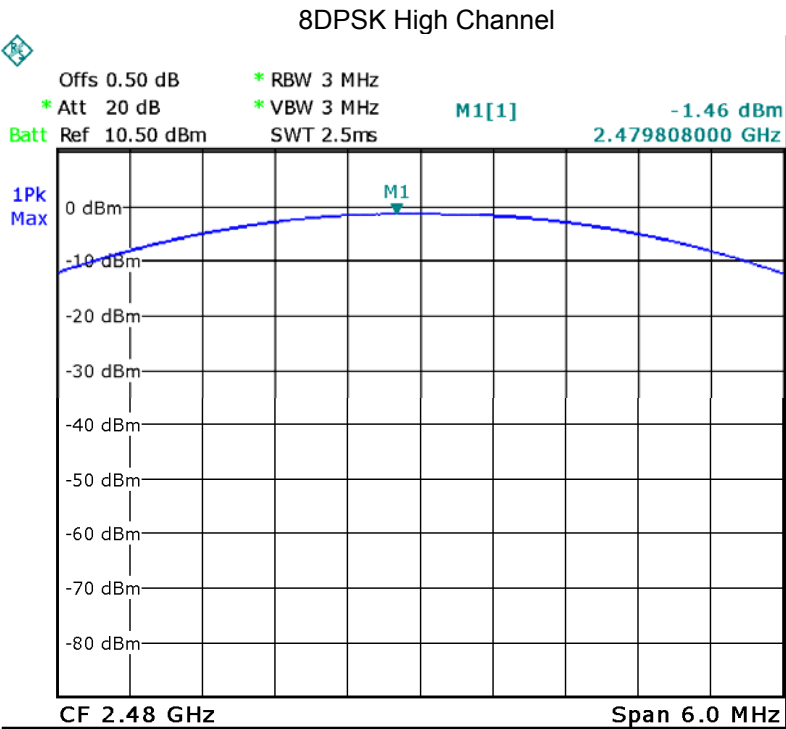

12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
Pi/4 DQPSK	Low	1.000	PASS
Pi/4 DQPSK	Middle	1.000	PASS
Pi/4 DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS



Test plots



GFSK Low Channel


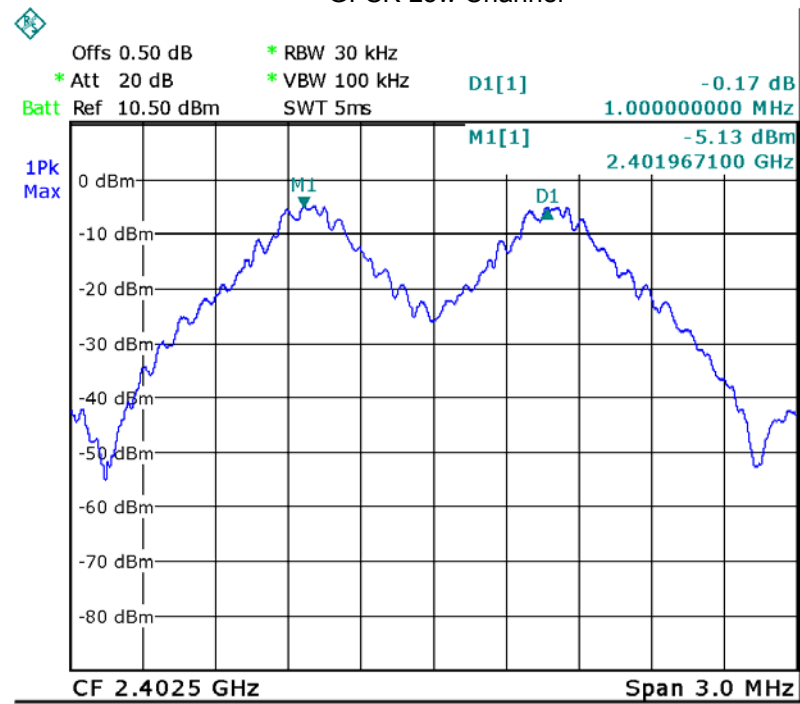



GFSK Middle Channel

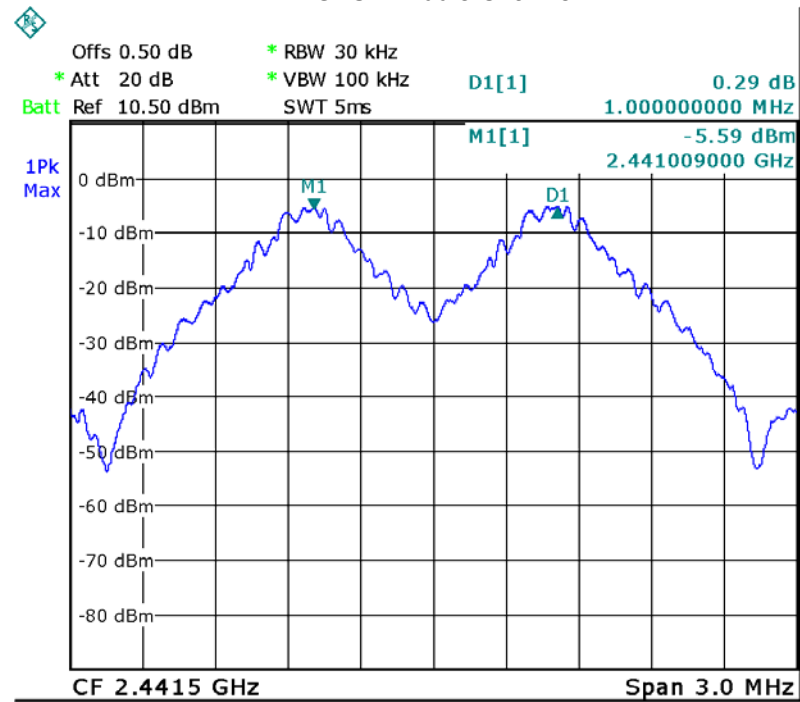

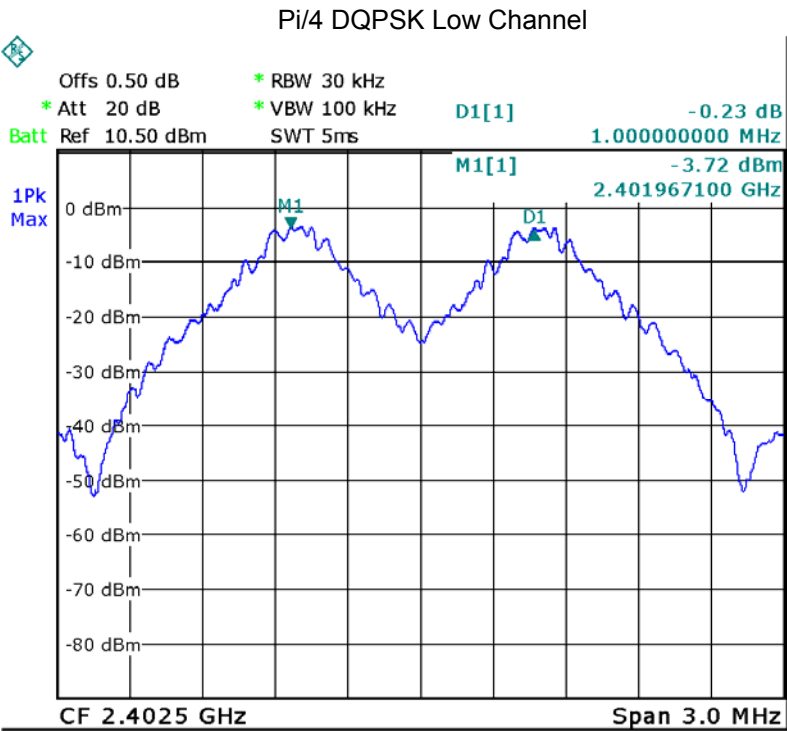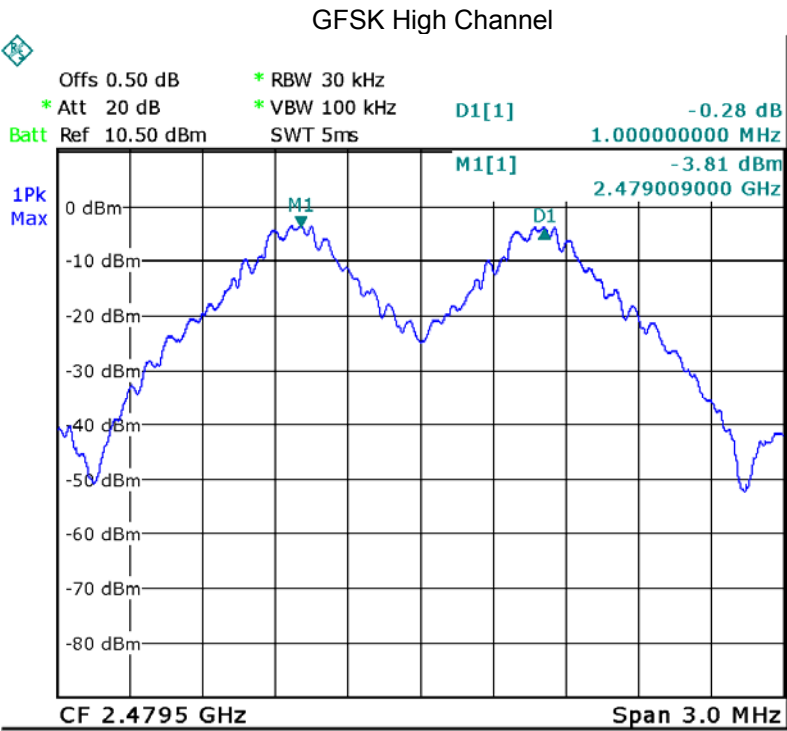

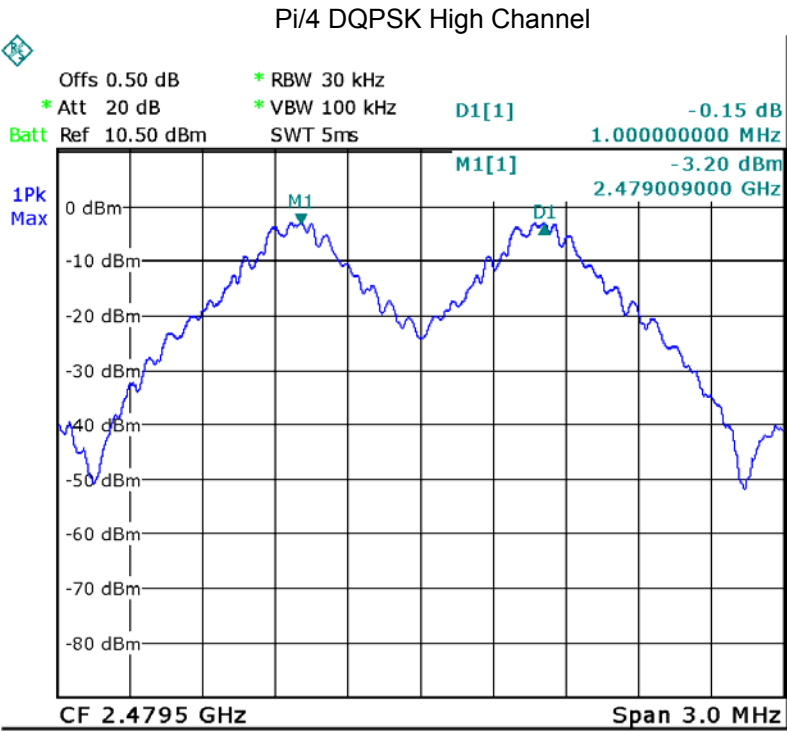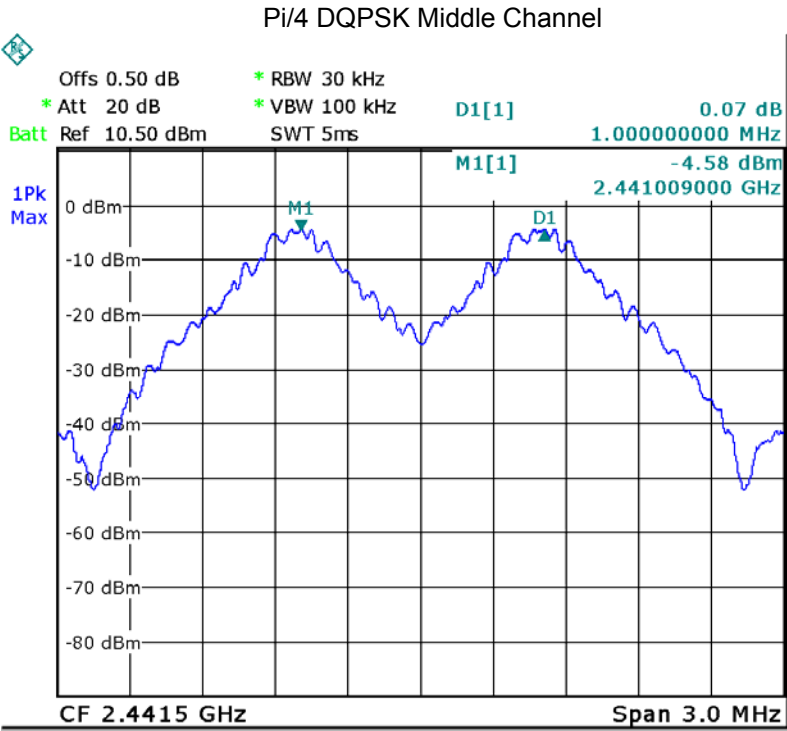

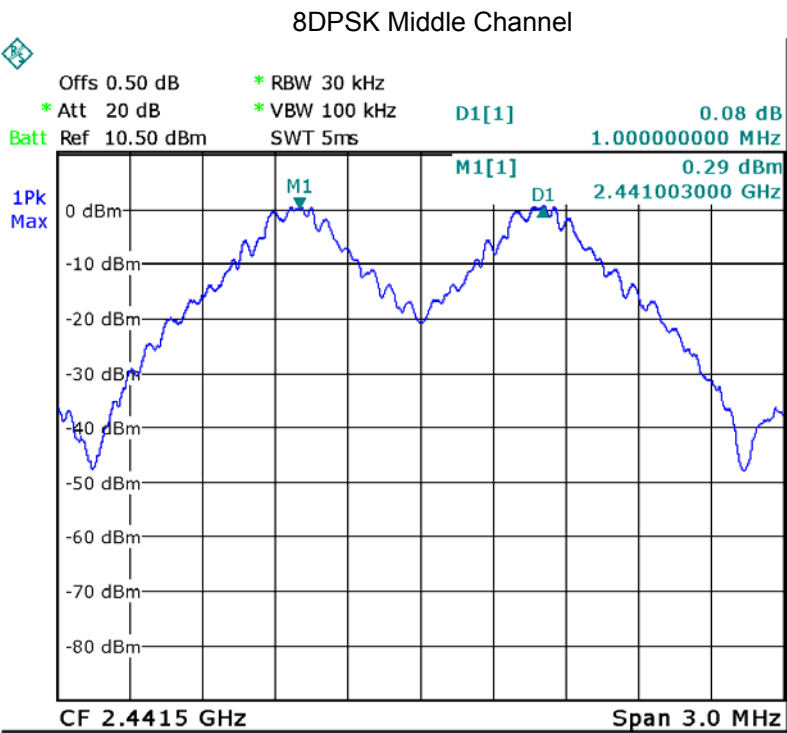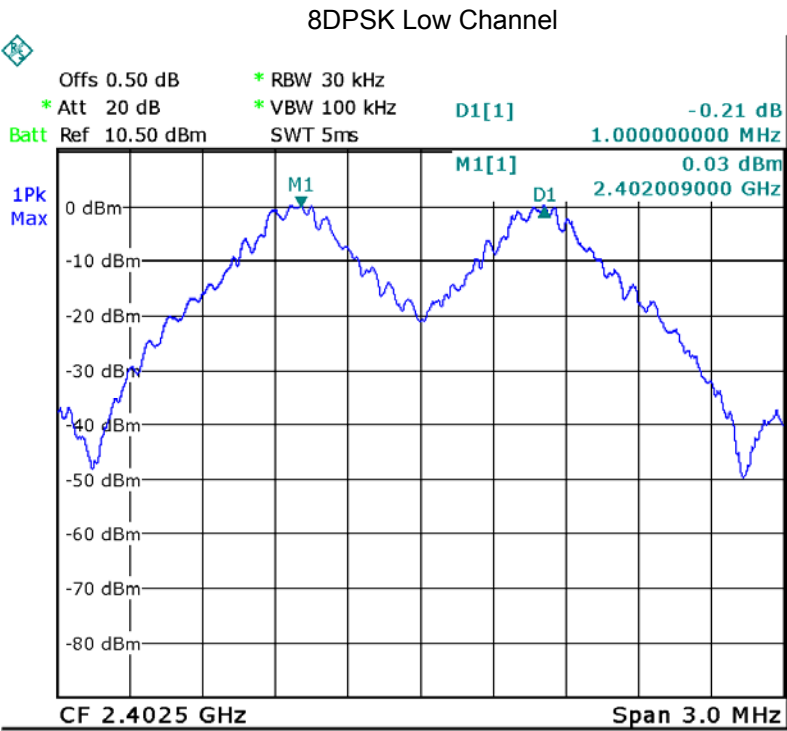

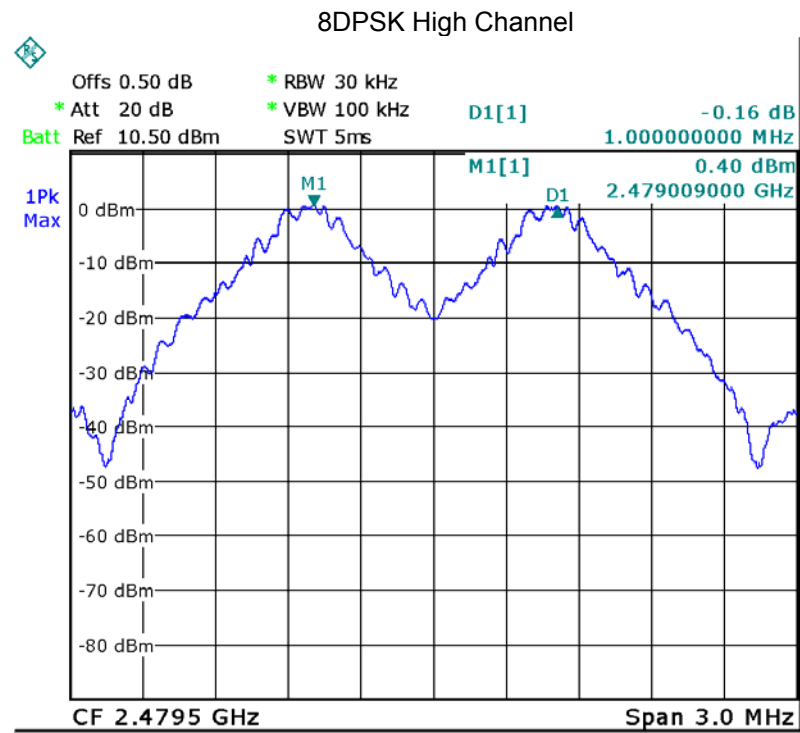

13 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.



13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

13.2 Test Result

Test Plots: 79 Channels in total

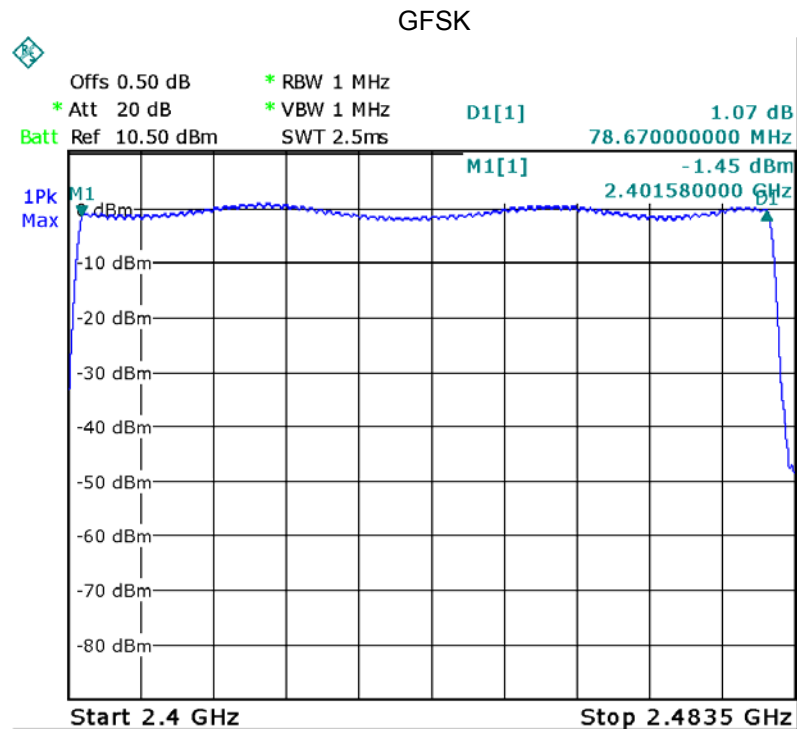

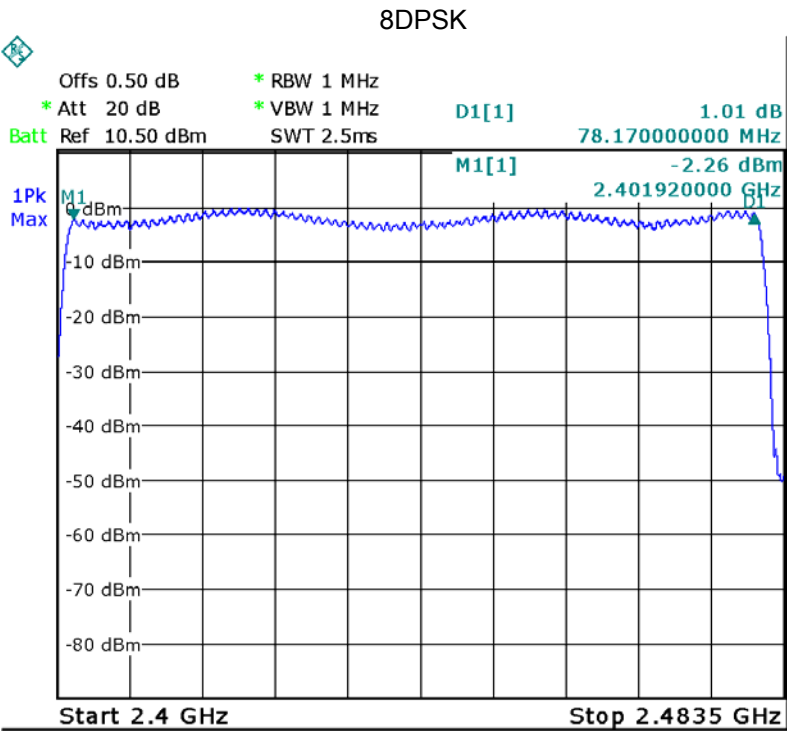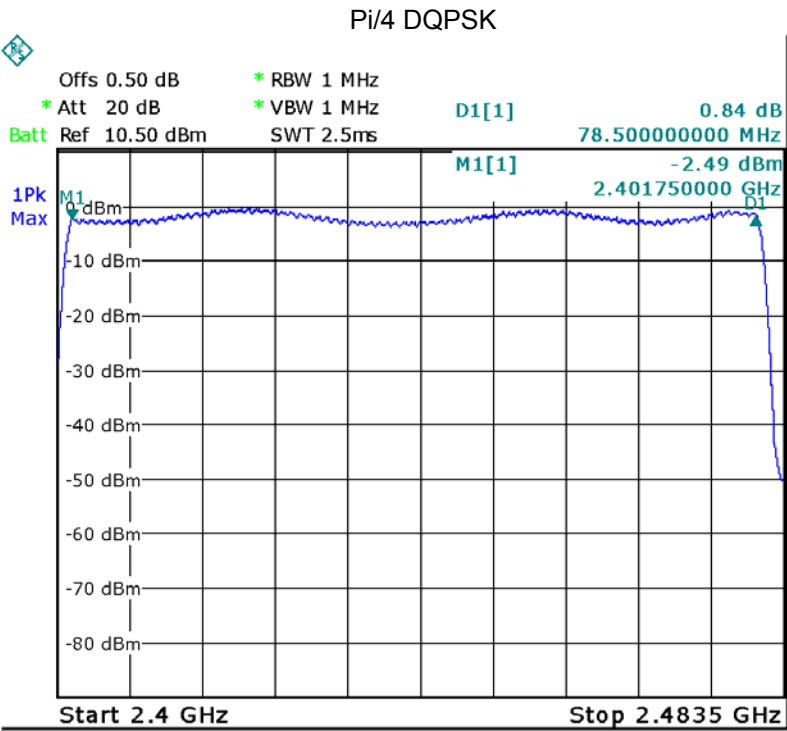

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).



DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:



Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	



Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.888	0.308	0.4
		middle	2.888	0.308	0.4
		High	2.888	0.308	0.4
Pi/4DQPSK	DH5	Low	2.888	0.308	0.4
		middle	2.888	0.308	0.4
		High	2.888	0.308	0.4
8DPSK	DH5	Low	2.888	0.308	0.4
		middle	2.888	0.308	0.4
		High	2.888	0.308	0.4



Remark: only the worst data were recorded.

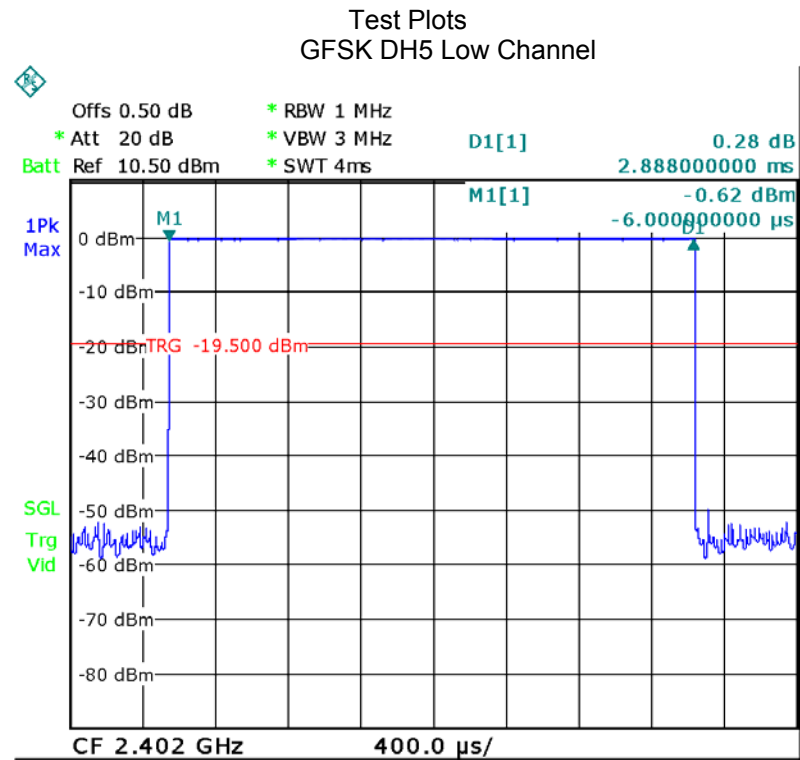

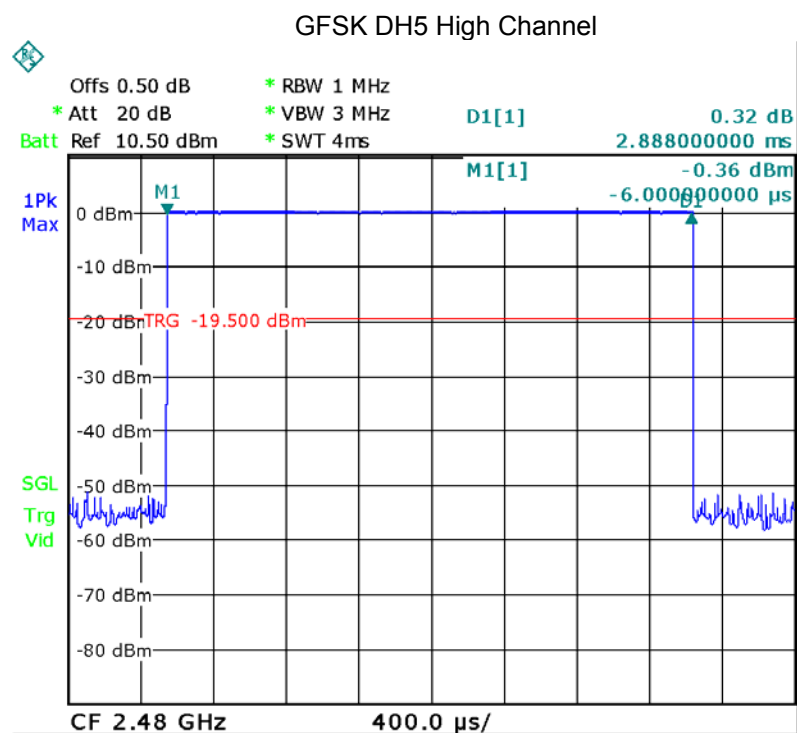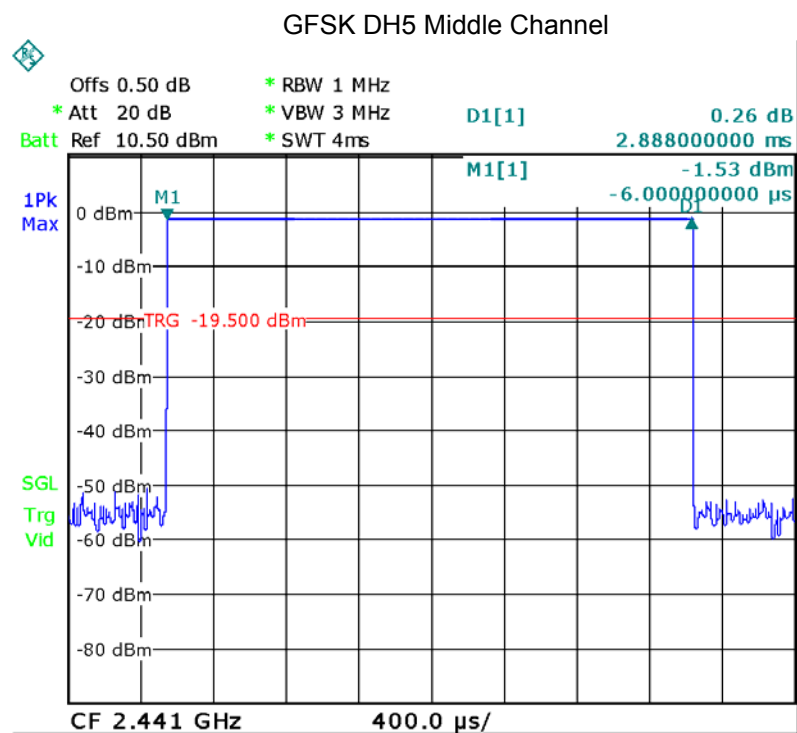

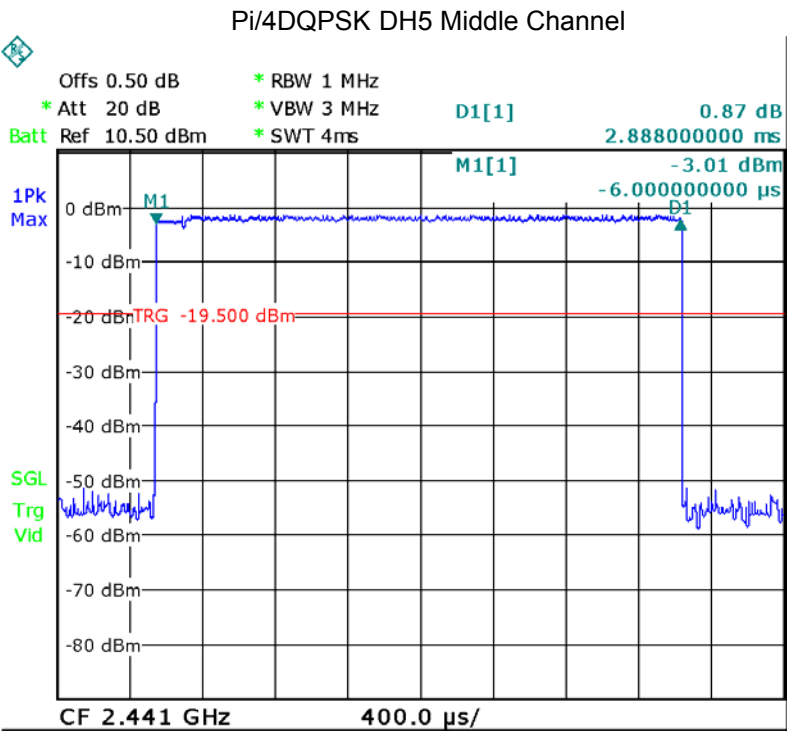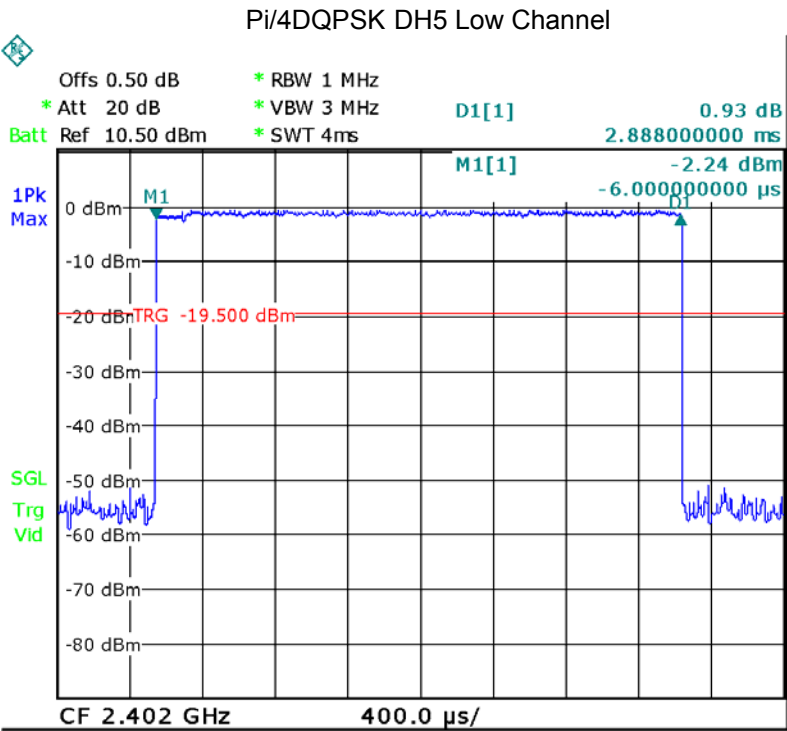

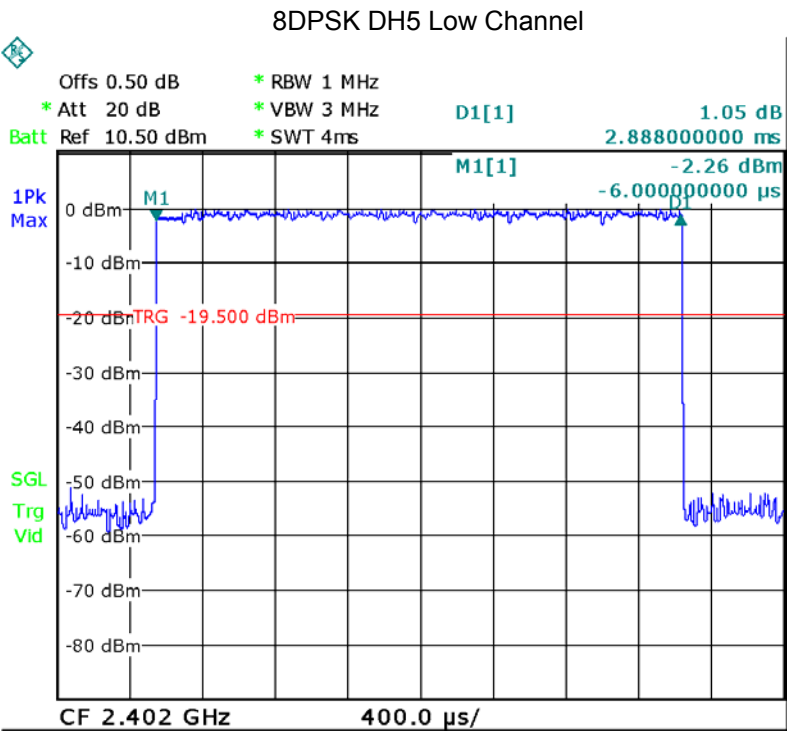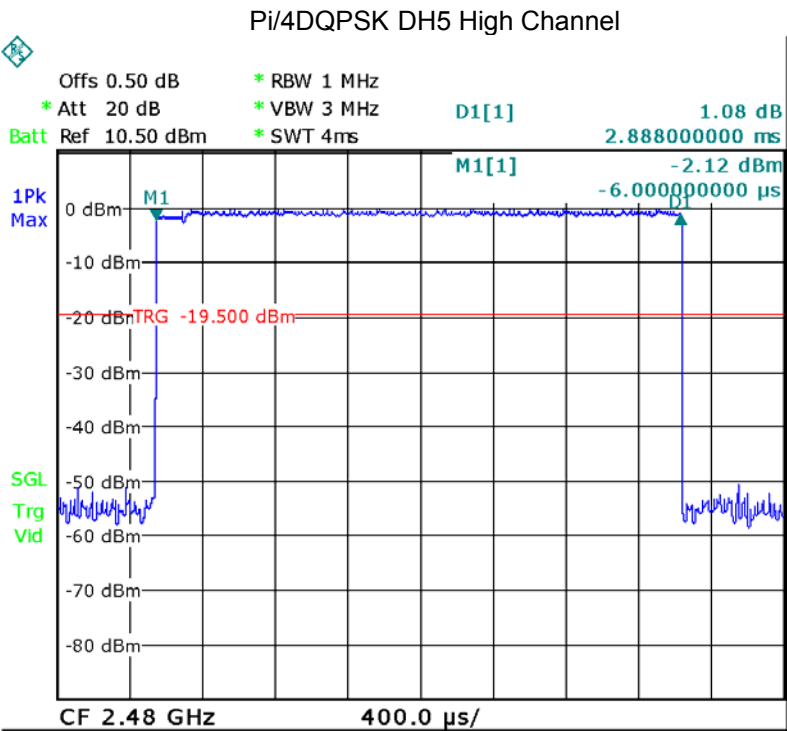

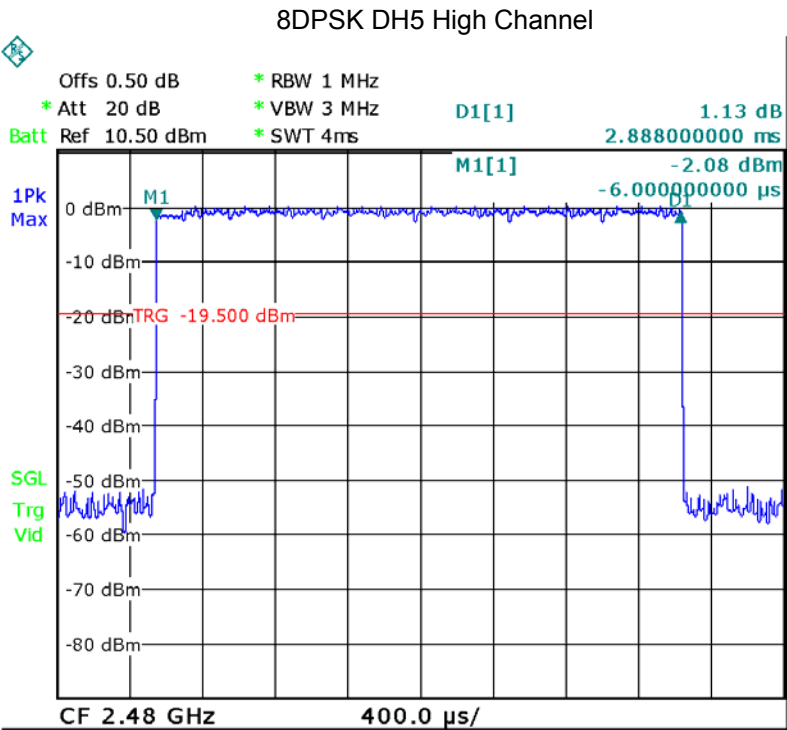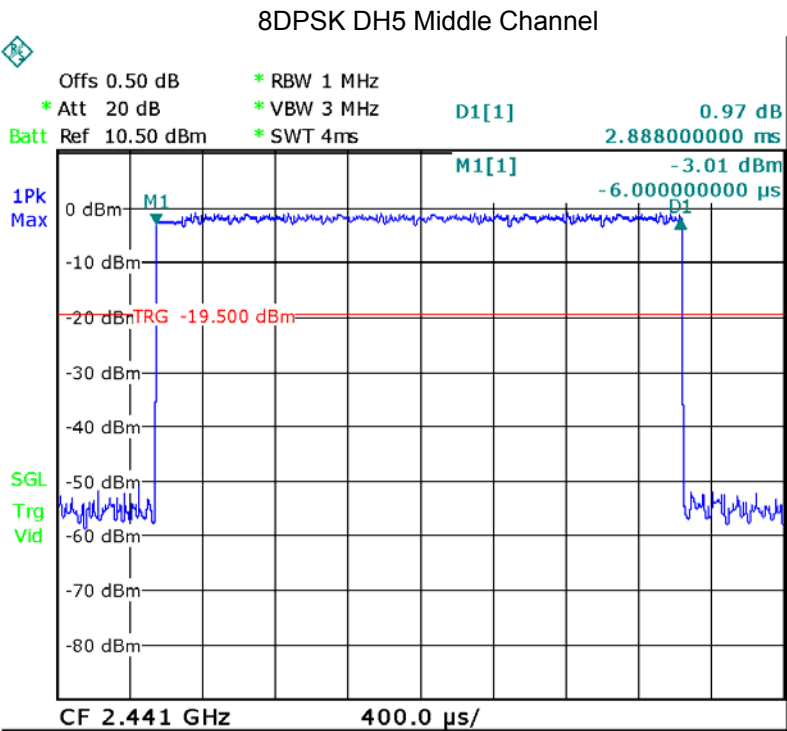

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

16 RF Exposure

Remark: refer to SAR test report: WTS16S0243054E.

=====End of Report=====