

FCC AND ISCED CERTIFICATION TEST REPORT

FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Portable Bluetooth Speaker
Model No.	:	FLIP6C
Trade Mark	:	JBL
FCC ID	:	APIJBLFLIP6C
IC	:	6132A-JBLFLIP6C
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty	10
3.	Equipment Used During Test.....	11
4.	Maximum Peak Output Power	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	13
4.5.	Original test data	14
5.	20 dB Bandwidth and 99% Bandwidth	17
5.1.	Block diagram of test setup	17
5.2.	Limits	17
5.3.	Test procedure	17
5.4.	Test result.....	17
5.5.	Original test data	18
6.	Carrier Frequency Separation	21
6.1.	Block diagram of test setup	21
6.2.	Limits	21
6.3.	Test procedure	21
6.4.	Test result.....	21
6.5.	Original test data	22
7.	Number of Hopping Channel	23
7.1.	Block diagram of test setup	23
7.2.	Limits	23
7.3.	Test procedure	23
7.4.	Test result.....	23
7.5.	Original test data	24

8.	Dwell Time	25
8.1.	Block diagram of test setup	25
8.2.	Limits	25
8.3.	Test procedure	25
8.4.	Test result.....	25
8.5.	Original test data	26
9.	Band Edge Compliance (Conducted Method).....	32
9.1.	Block diagram of test setup	32
9.2.	Limit.....	32
9.3.	Test result.....	32
9.4.	Original test data	32
10.	Radiated Emission	37
10.1.	Block diagram of test setup	37
10.2.	Limit.....	38
10.3.	Test Procedure.....	39
10.4.	Test result.....	41
11.	RF Conducted Spurious Emissions.....	46
11.1.	Block diagram of test setup	46
11.2.	Limits	46
11.3.	Test procedure	46
11.4.	Test result.....	47
11.5.	Original test data	47
12.	Band Edge Compliance (Radiated Method).....	57
12.1.	Block diagram of test setup	57
12.2.	Limit.....	57
12.3.	Test Procedure.....	57
12.4.	Test result.....	57
13.	Power Line Conducted Emission.....	70
13.1.	Block diagram of test setup	70
13.2.	Power line conducted emission limits.....	70
13.3.	Test procedure	70
13.4.	Test result.....	71
14.	Antenna Requirements	74
14.1.	Limit.....	74
14.2.	Result	74
15.	Test Setup Photograph	75
16.	Photos of the EUT	77

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Portable Bluetooth Speaker
Model No.	:	FLIP6C
Trade Mark	:	JBL
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R21061513-2E03		
Date of Receipt:	Jul. 09, 2021	Date of Test:	Jul. 09, 2021 ~ Jul. 26, 2021

Prepared By:

Ben Jin

Ben Jin/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jul. 26, 2021	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: Portable Bluetooth Speaker
Model Number	: FLIP6C
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V from external AC Adapter DC 3.6V 4800mAh Polymer Li-ion built-in battery
Radio Specification	: 2.4GHz SRD
Operation Frequency	: 2407 MHz - 2475 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate	: 1 Mbps, 2 Mbps, 3 Mbps
Antenna Type	: FPCB antenna, maximum PK gain: 2.36 dBi
Sample Type	: CS0538-EL0000008 for conductive CS0538-EL0000009 for radiation

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2407	23	2430	46	2453
1	2408	24	2431	47	2454
2	2409	25	2432	48	2455
3	2410	26	2433	49	2456
4	2411	27	2434	50	2457
5	2412	28	2435	51	2458
6	2413	29	2436	52	2459
7	2414	30	2437	53	2460
8	2415	31	2438	54	2461
9	2416	32	2439	55	2462
10	2417	33	2440	56	2463
11	2418	34	2441	57	2464
12	2419	35	2442	58	2465
13	2420	36	2443	59	2466
14	2421	37	2444	60	2467
15	2422	38	2445	61	2468
16	2423	39	2446	62	2469
17	2424	40	2447	63	2470
18	2425	41	2448	64	2471
19	2426	42	2449	65	2472
20	2427	43	2450	66	2473
21	2428	44	2451	67	2474
22	2429	45	2452	68	2475

2.2. Accessories of EUT


Choose one of the two batteries

Description of Accessories	Manufacturer	Model number	Description	Remark
USB cable	Harman	N/A	N/A	Length: 1.2m, unshielded
Rechargeable Li-ion Battery	Guangzhou Great Power Energy & Technology Co., Ltd.	GSP-1S2P-F 6A	DC 3.6V, 4800mAh, 17.28Wh	Cell Manufacturer: SAMSUNG
Rechargeable Li-ion Battery	Guangzhou Great Power Energy & Technology Co., Ltd.	GSP-1S2P-F 6D	DC 3.6V, 4800mAh, 17.28Wh	Cell Manufacturer: Great Power

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Adapter	HUAWEI	HW-050450C0 0	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 4.5V/5A or 5V/4.5A	N/A

2.4. Block diagram of EUT configuration for test



Test software: FCC Test Tool.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	/	CH0 to CH68	2407 to 2475
$\pi/4$ -DQPSK hopping on Tx mode	/	CH0 to CH68	2407 to 2475
8DPSK hopping on Tx mode	/	CH0 to CH68	2407 to 2475
GFSK hopping off Tx mode	/	CH0	2407
	/	CH34	2441
	/	CH68	2475
$\pi/4$ -DQPSK hopping off Tx mode	/	CH0	2407
	/	CH34	2441
	/	CH68	2475
8DPSK hopping off Tx mode	/	CH0	2407
	/	CH34	2441
	/	CH68	2475

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10\text{ MHz} \leq f < 3.6\text{ GHz}$);
	1.38 dB ($3.6\text{ GHz} \leq f < 8\text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10\text{ MHz} \leq f < 3.6\text{ GHz}$);
	1.38 dB ($3.6\text{ GHz} \leq f < 8\text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10\text{ MHz} \leq f < 3.6\text{ GHz}$);
	1.40 dB ($3.6\text{ GHz} \leq f < 8\text{ GHz}$)
	1.66 dB ($8\text{ GHz} \leq f < 22\text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz - 30 MHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒ RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC0290	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☐ RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	101472	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Jan. 19, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒ Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Sep. 30, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐ Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year

Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	1013 03	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	43101180156 8-12#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. Maximum Peak Output Power

4.1. Block diagram of test setup

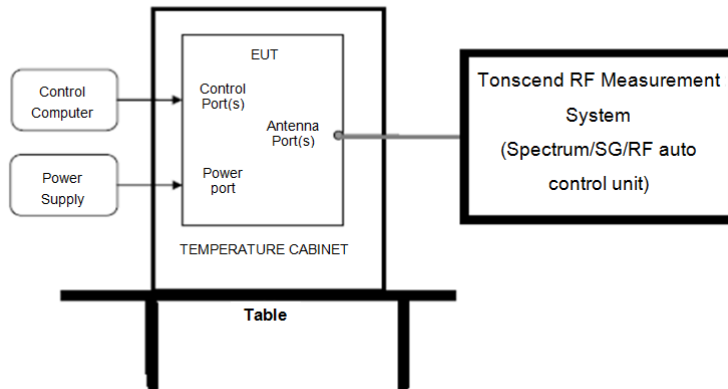

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=10 MHz


Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Mode	Antenna	Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2407	13.45	21	Pass
	ANT1	2441	13.72	21	Pass
	ANT1	2475	13.74	21	Pass
$\pi/4$ -DQPSK	ANT1	2407	13.52	21	Pass
	ANT1	2441	13.80	21	Pass
	ANT1	2475	13.79	21	Pass
8DPSK	ANT1	2407	13.53	21	Pass
	ANT1	2441	13.78	21	Pass
	ANT1	2475	13.82	21	Pass


4.5. Original test data

DH5_ANT1_2407

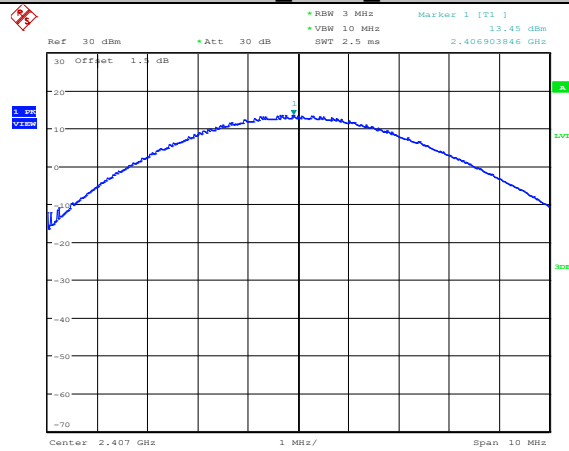


Date: 15.JUL.2021 18:12:38

DH5_ANT1_2441

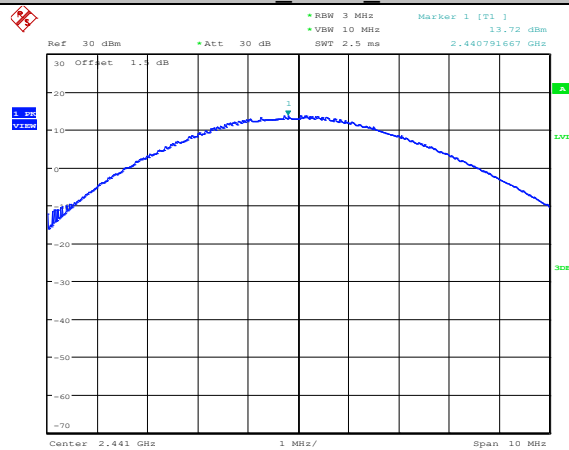


Date: 15.JUL.2021 18:14:10

DH5_ANT1_2475

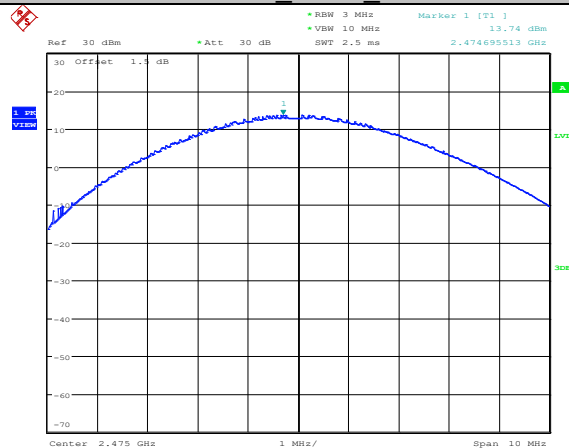


Date: 15.JUL.2021 18:15:26

2DH5_ANT1_2407

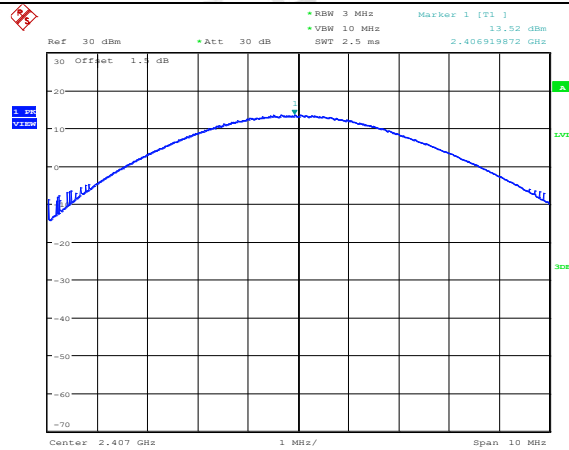


Date: 15.JUL.2021 18:17:42

2DH5 ANT1 2441

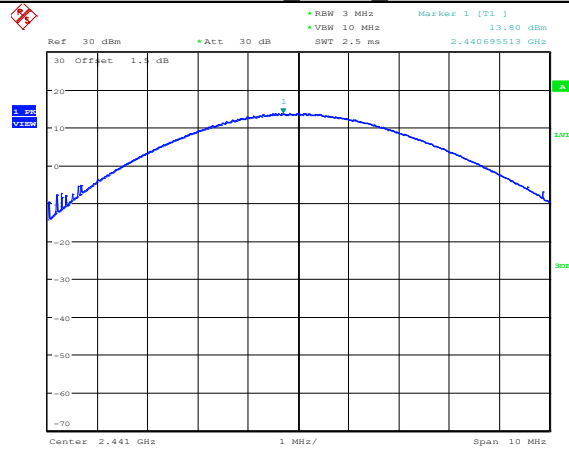


Date: 15.JUL.2021 18:19:13

2DH5 ANT1 2475

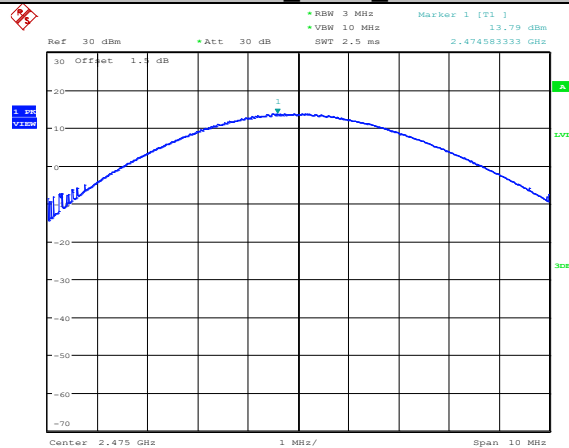


Date: 15.JUL.2021 18:21:22

3DH5 ANT1 2407

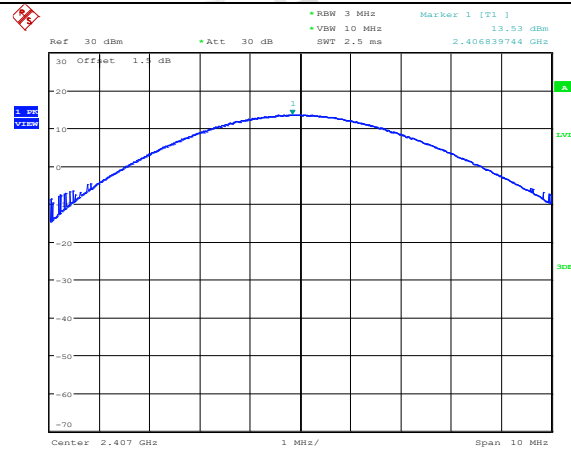


Date: 15.JUL.2021 18:23:19

3DH5 ANT1 2441

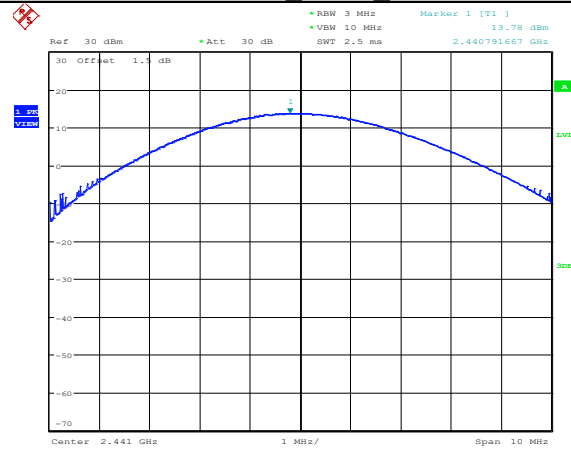

Date: 15.JUL.2021 18:24:55

3DH5 ANT1 2475

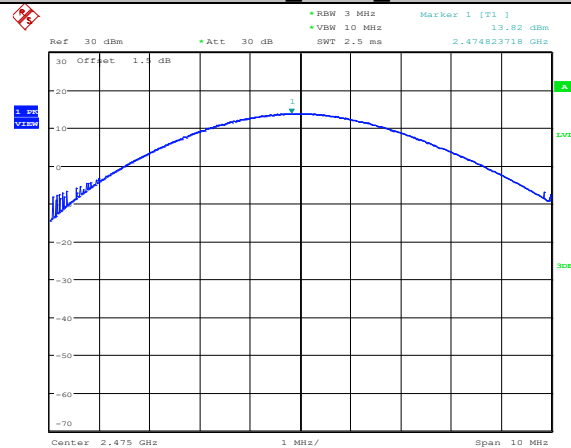

Date: 15.JUL.2021 18:26:07

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


5.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4. Test result

Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2407	1.060	0.926	Pass
	2441	1.054	0.938	Pass
	2475	1.048	0.928	Pass
$\pi/4$ -DQPSK	2407	1.320	1.178	Pass
	2441	1.314	1.178	Pass
	2475	1.306	1.186	Pass
8DPSK	2407	1.296	1.196	Pass
	2441	1.292	1.190	Pass
	2475	1.294	1.190	Pass


5.5. Original test data

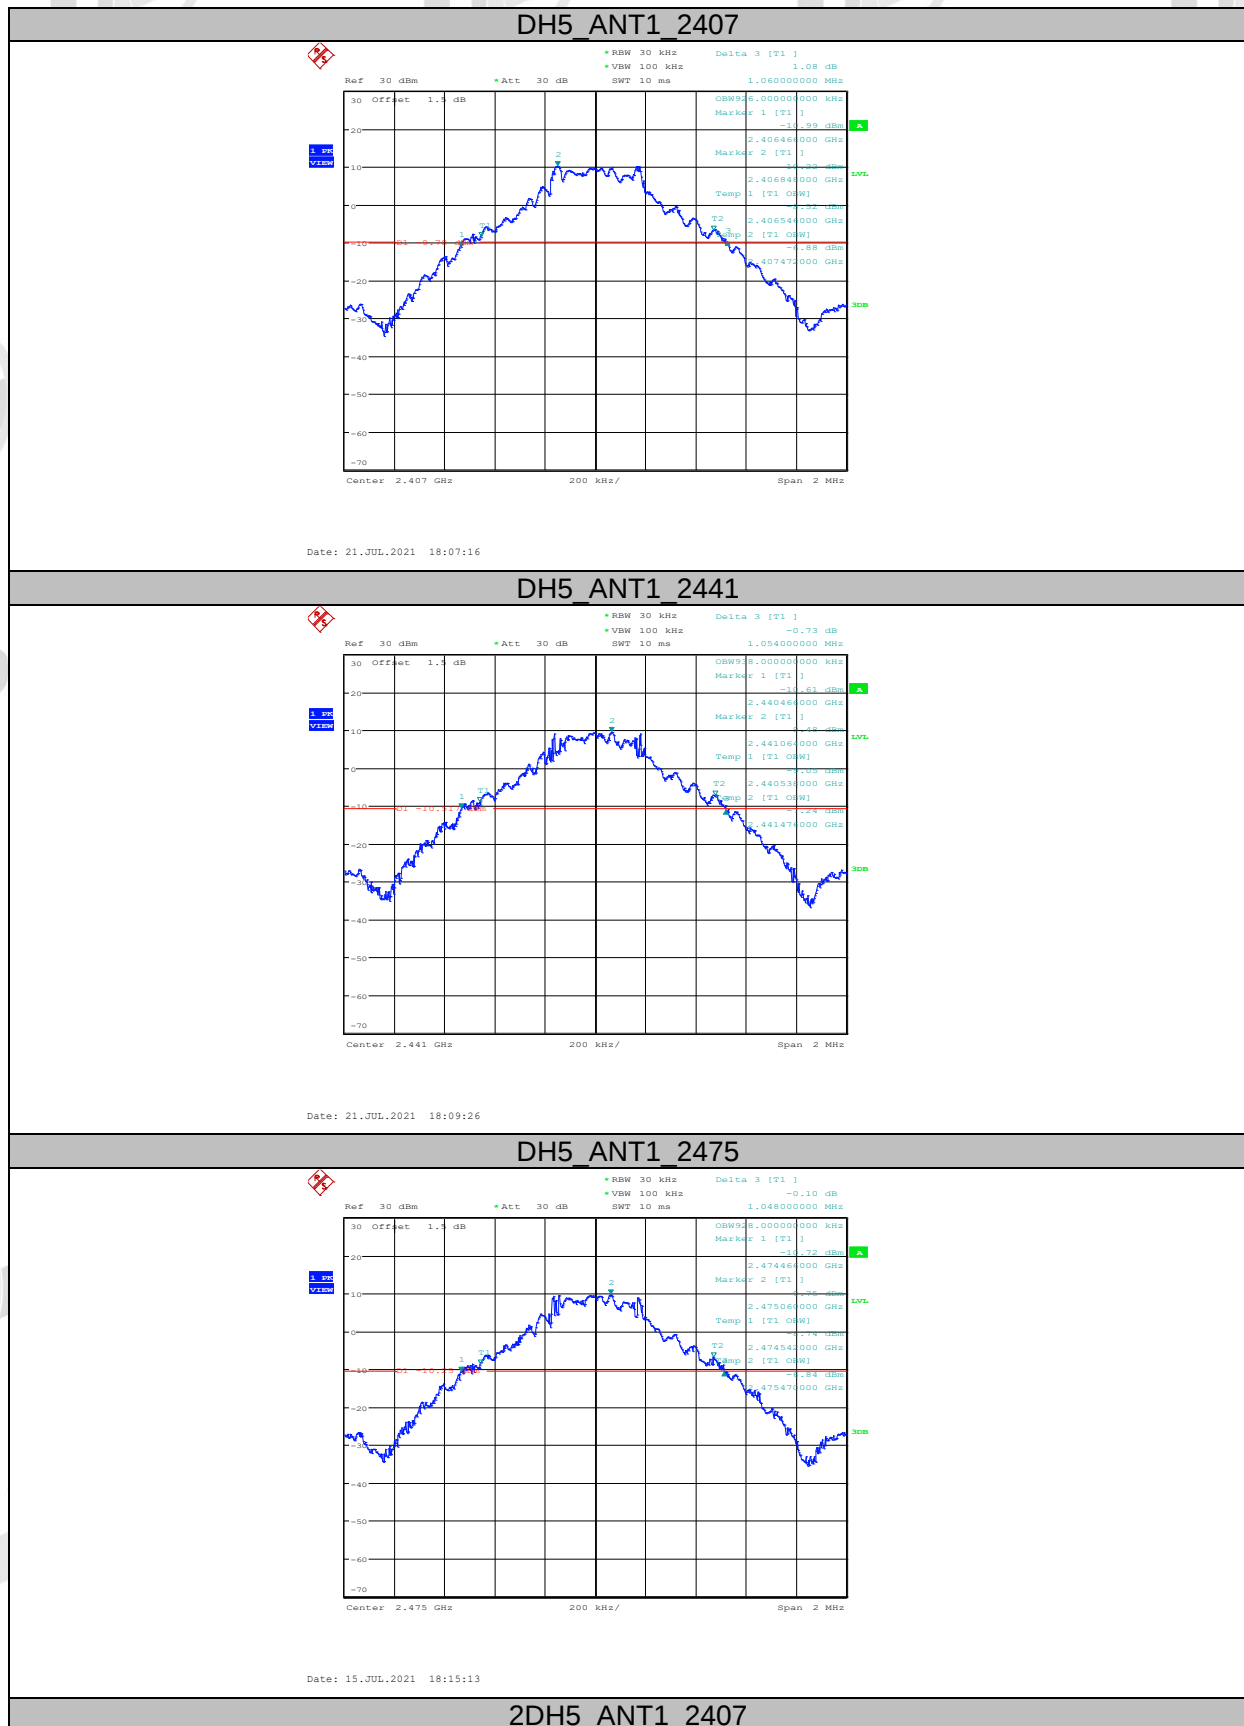

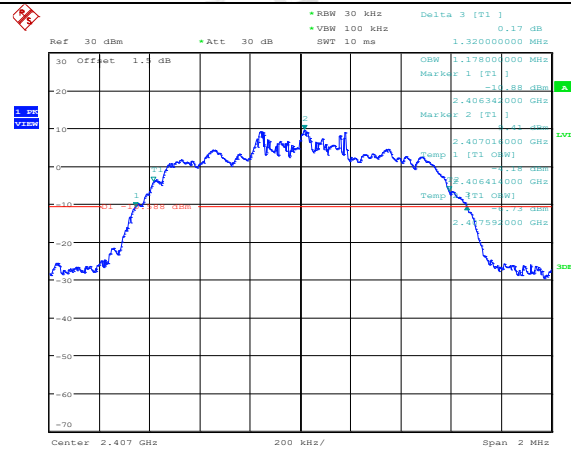


Date: 21.JUL.2021 18:12:16

2DH5 ANT1 2441

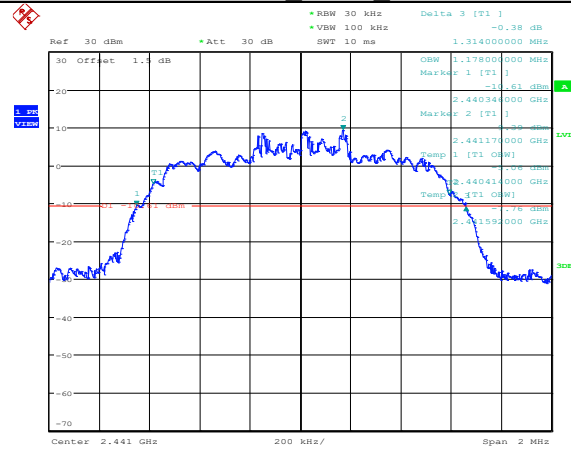


Date: 21.JUL.2021 18:36:27

2DH5 ANT1 2475

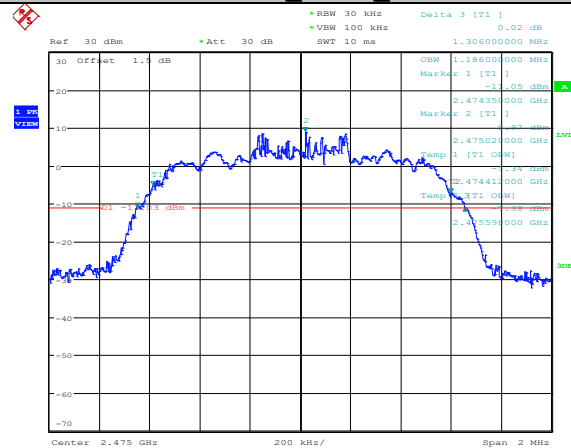


Date: 21.JUL.2021 18:37:49

3DH5 ANT1 2407

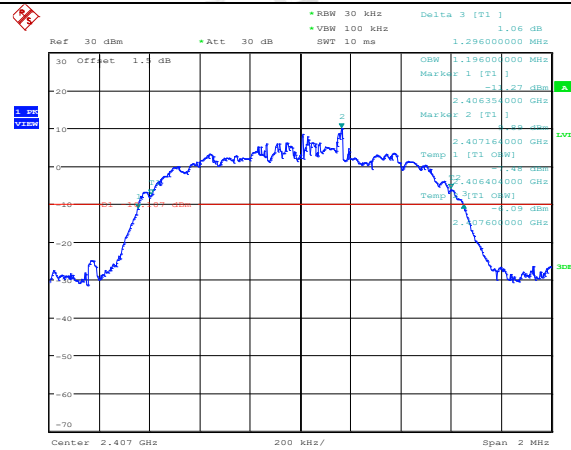


Date: 15.JUL.2021 18:23:05

3DH5 ANT1 2441

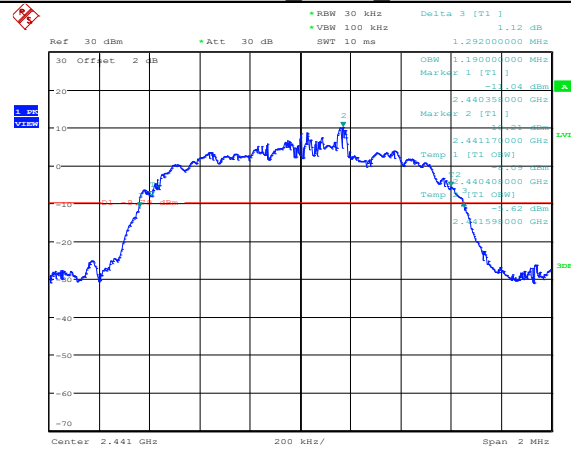

Date: 22.JUL.2021 14:39:11

3DH5 ANT1 2475

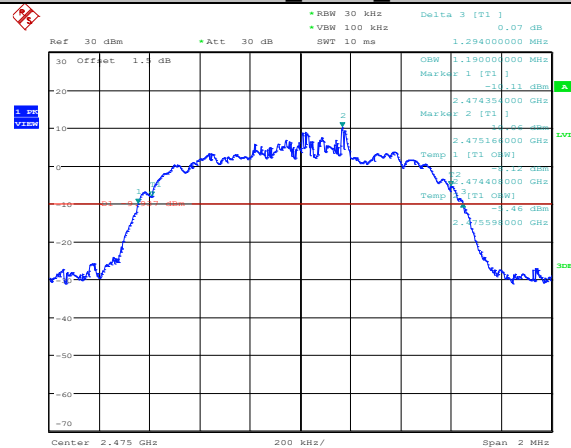

Date: 15.JUL.2021 18:25:54

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

6.4. Test result

Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worse case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	0.994	1.060	≥ 0.707	Pass
$\pi/4$ -DQPSK	1.013	1.320	≥ 0.880	Pass
8DPSK	1.010	1.296	≥ 0.864	Pass

6.5. Original test data

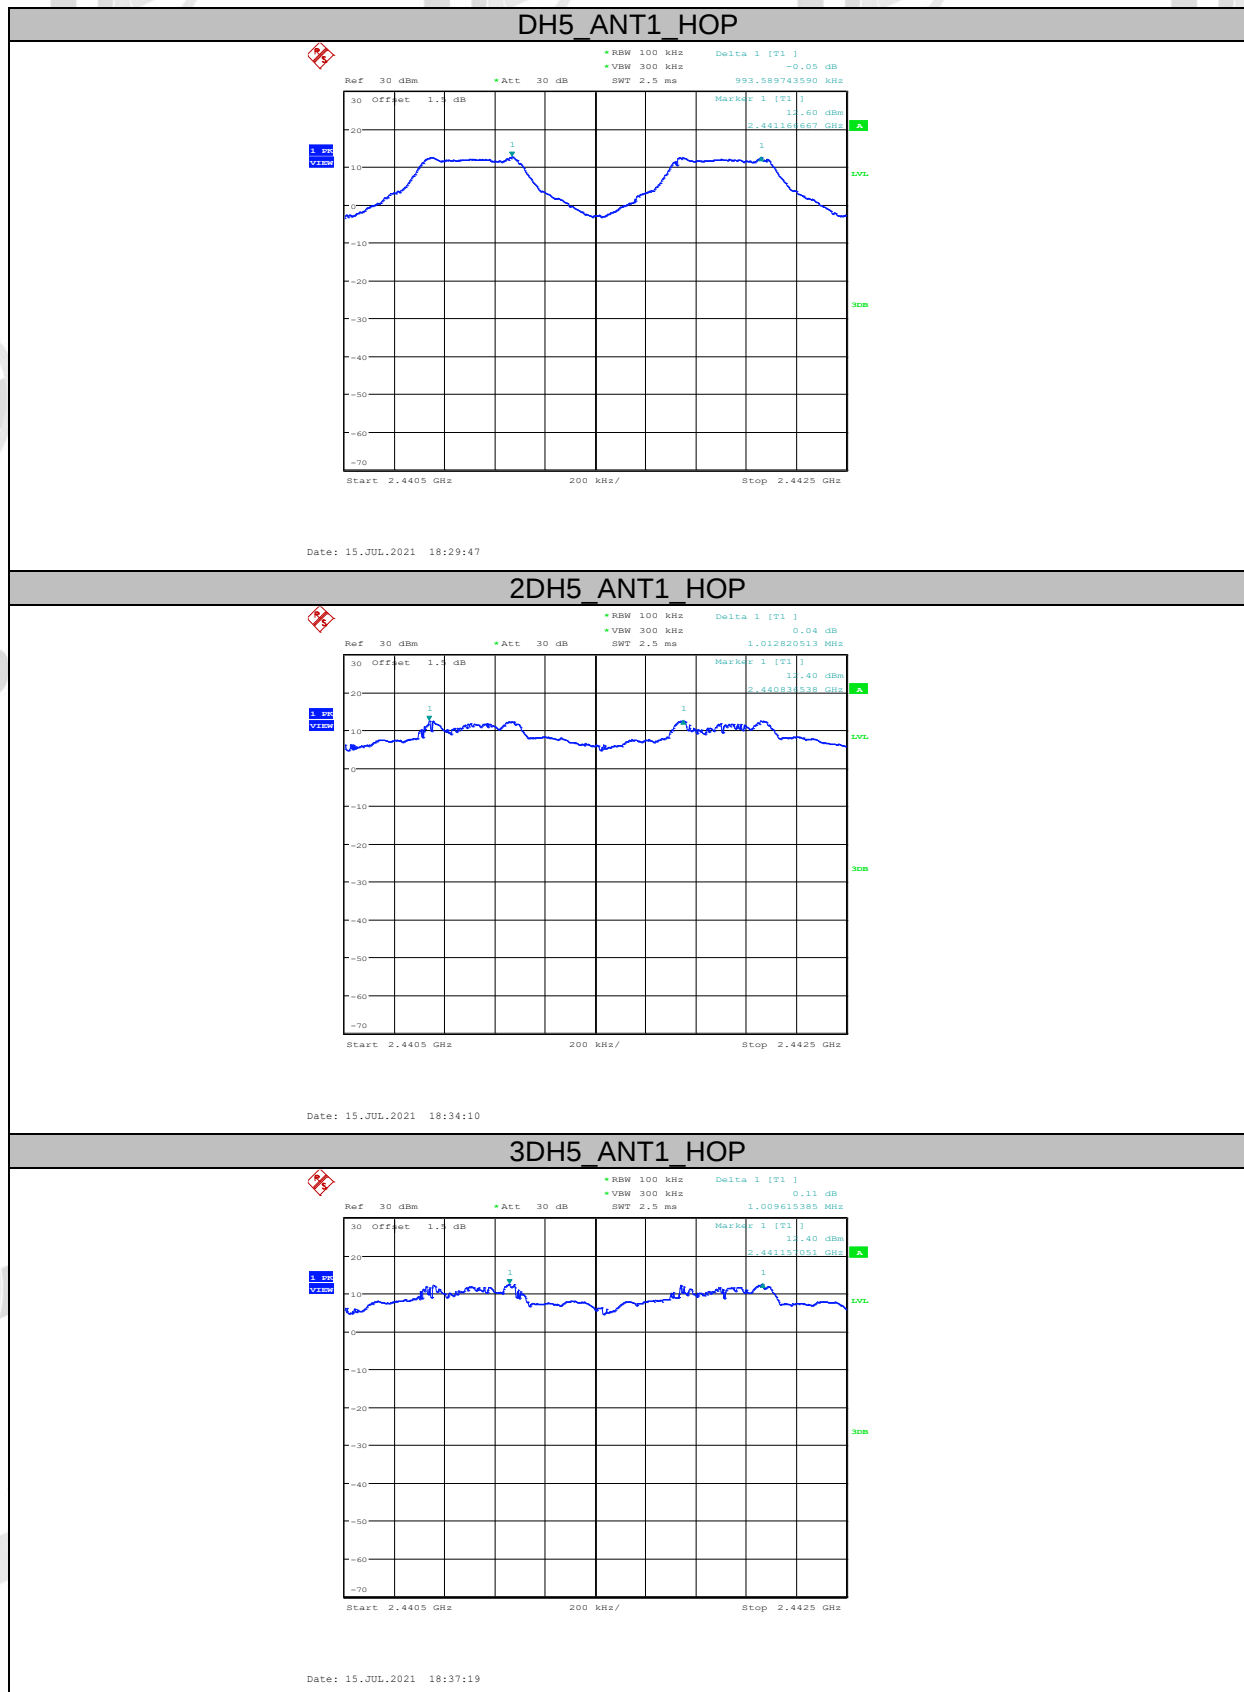

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Mode	Number of hopping channels	Limit	Verdict
GFSK	69	>15	Pass
$\pi/4$ -DQPSK	69	>15	Pass
8DPSK	69	>15	Pass

7.5. Original test data

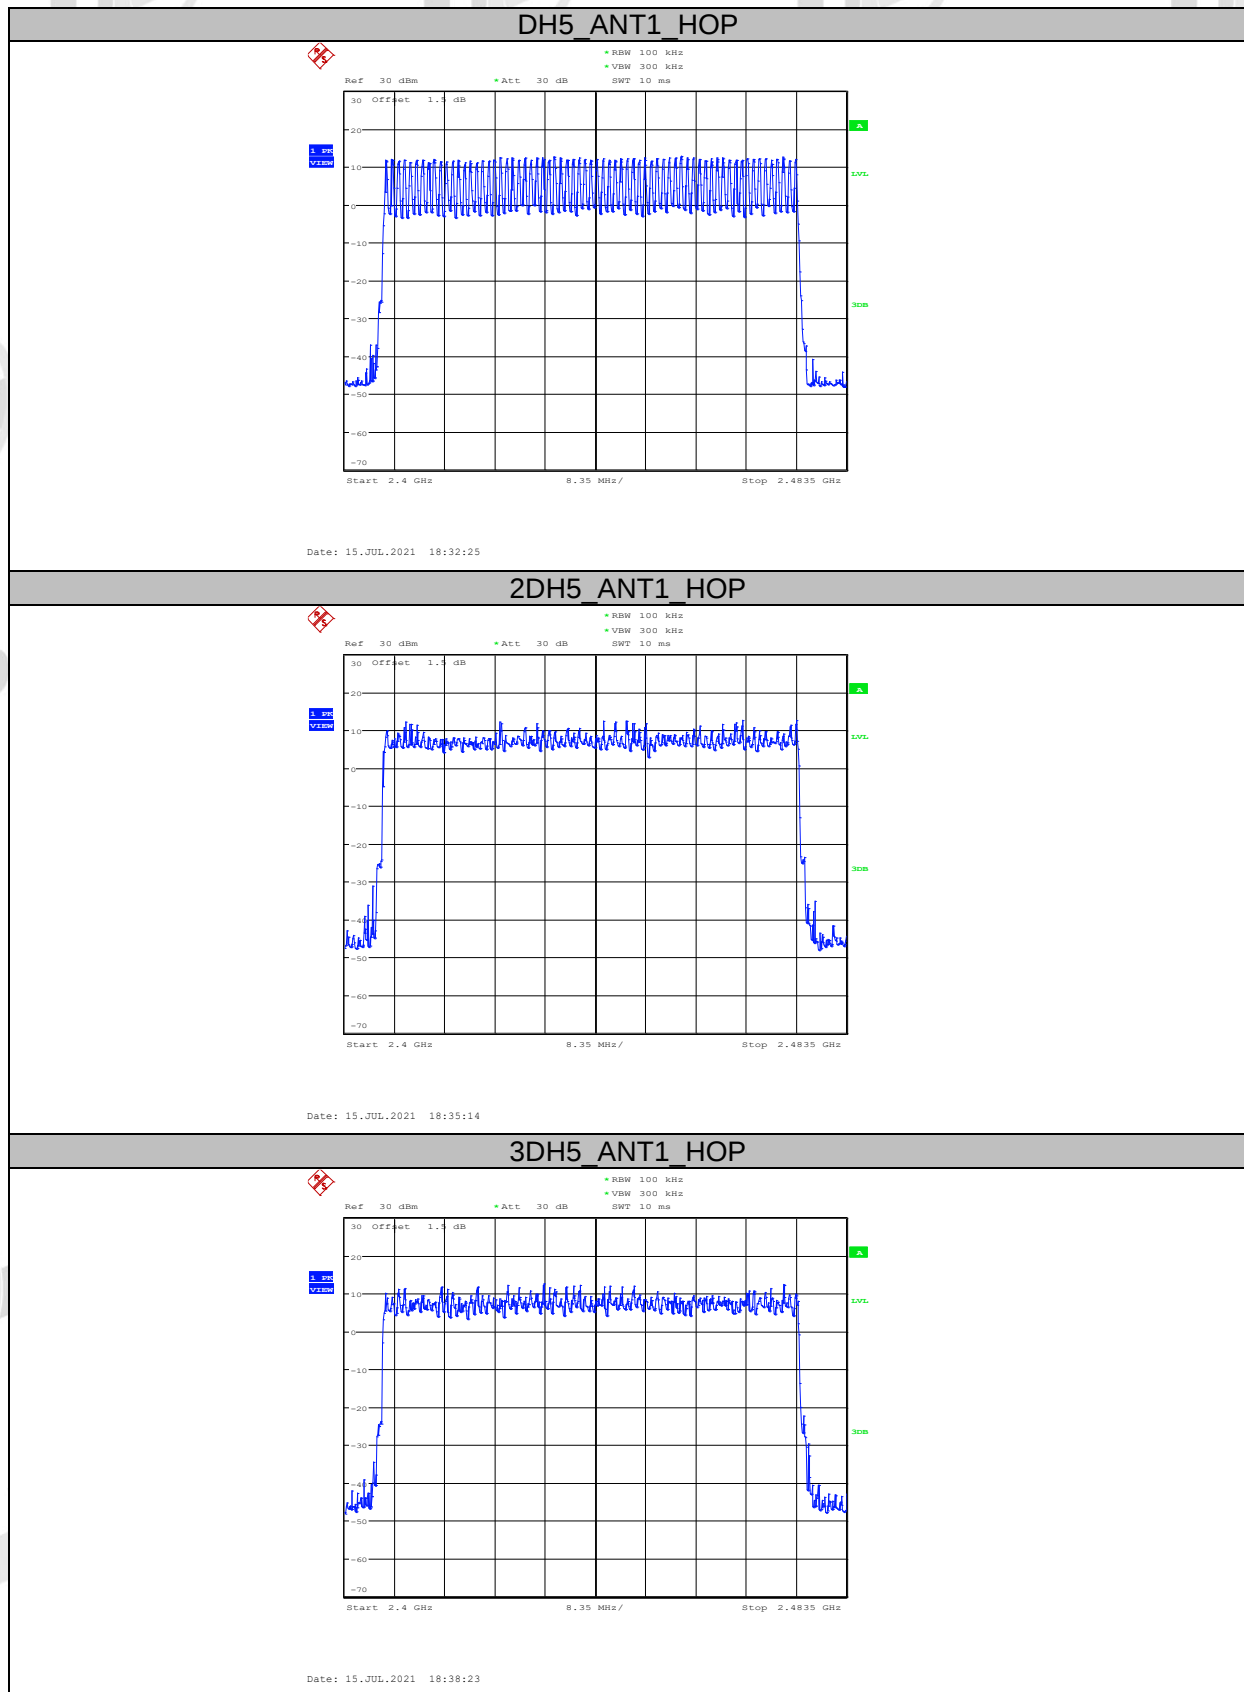

8. Dwell Time

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 69 \text{ Channel} = 27.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.


8.4. Test result

Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.0098	0.38	6	<400ms	Pass
DH3	0.0173	1.63	6	<400ms	Pass
DH5	0.0022	2.89	6	<400ms	Pass
2DH1	0.0097	0.37	6	<400ms	Pass
2DH3	0.0172	1.62	6	<400ms	Pass
2DH5	0.0021	2.87	6	<400ms	Pass
3DH1	0.0097	0.36	6	<400ms	Pass
3DH3	0.01728	1.62	6	<400ms	Pass
3DH5	0.01728	2.88	6	<400ms	Pass

Note: $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$.


8.5. Original test data

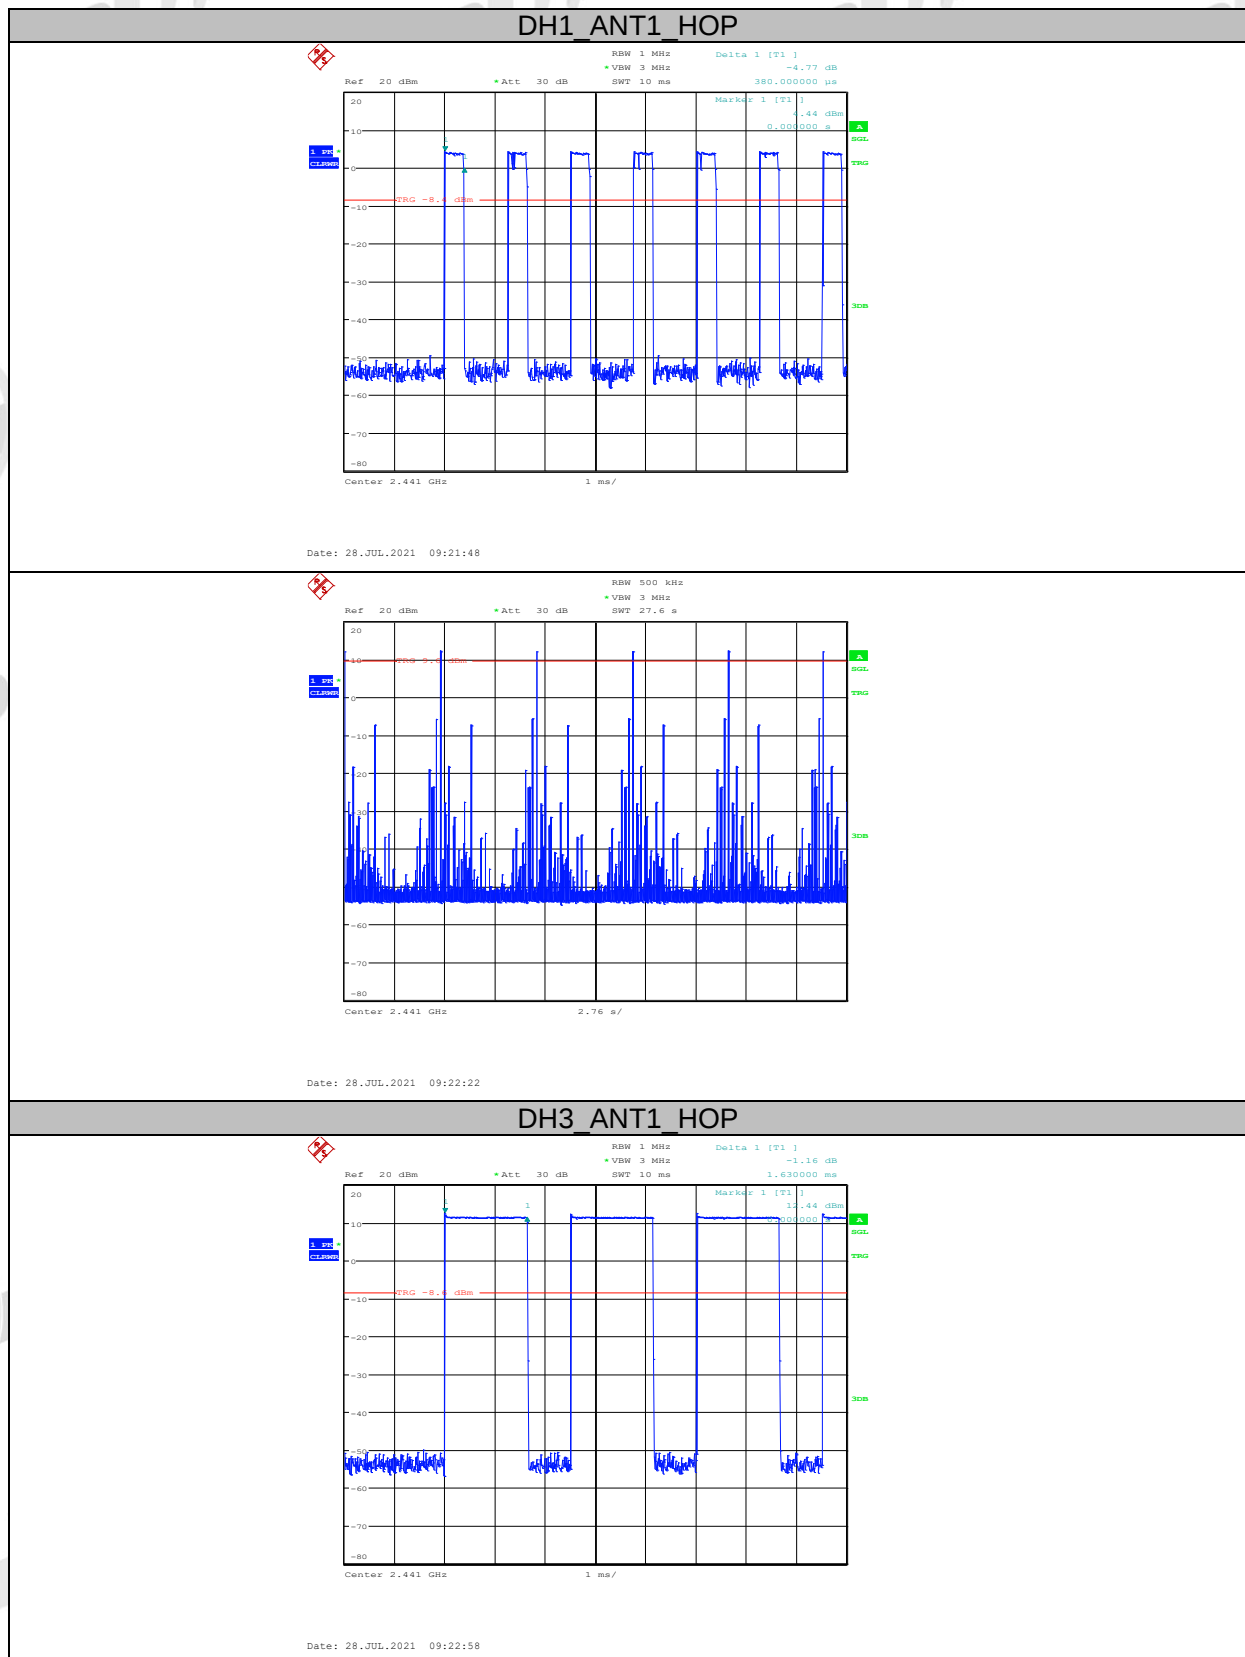

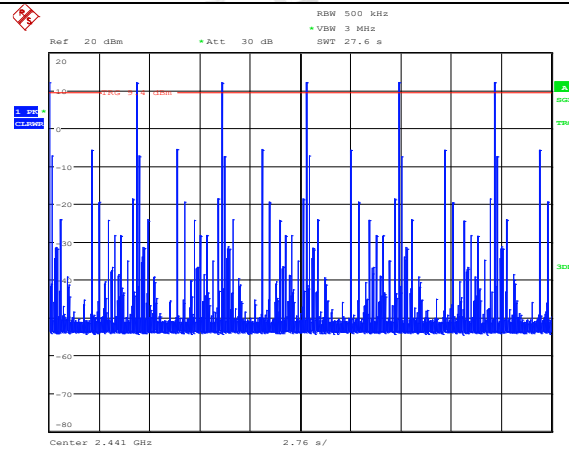


Date: 28.JUL.2021 09:23:58

DH5_ANT1_HOP

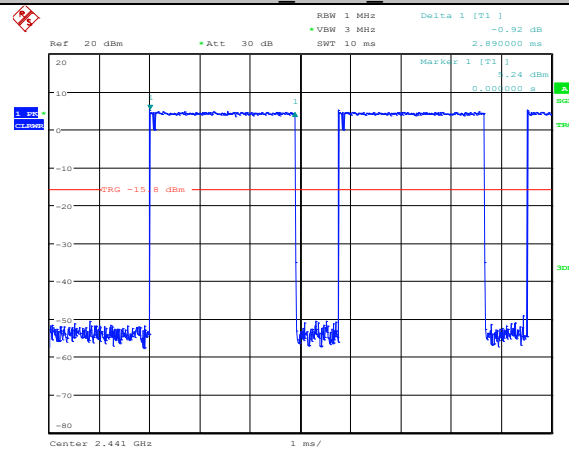


Date: 28.JUL.2021 09:24:37

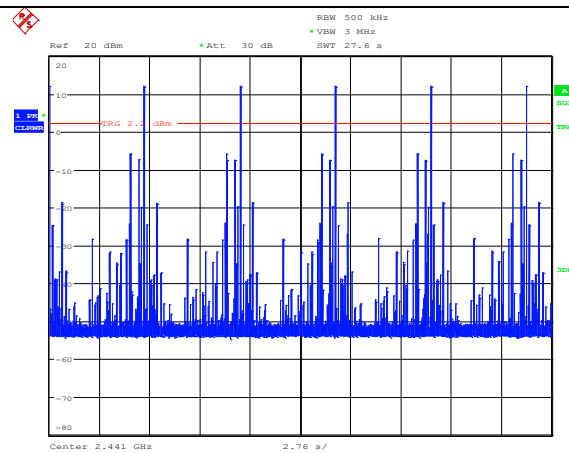


Date: 28.JUL.2021 09:25:10

2DH1_ANT1_HOP

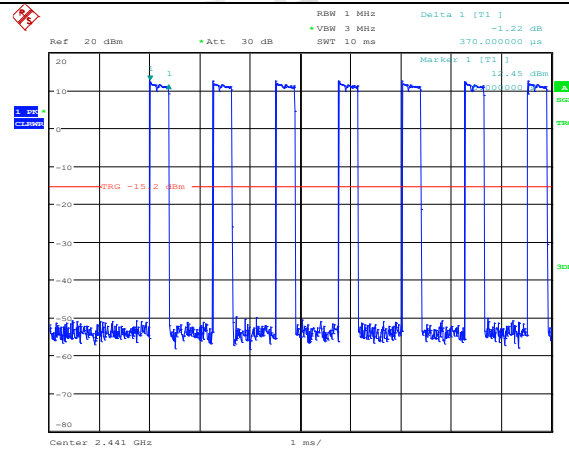


Date: 28.JUL.2021 09:26:05

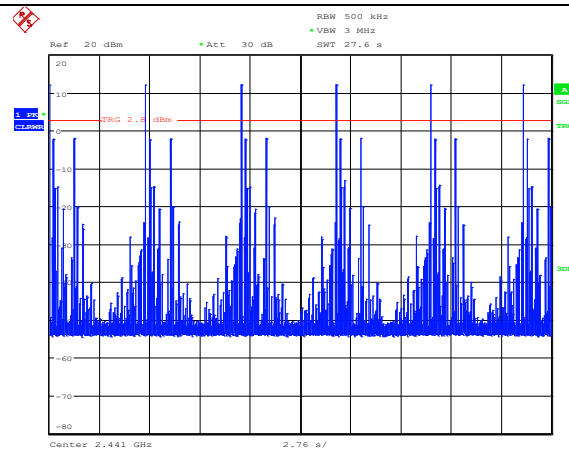


Date: 28.JUL.2021 09:26:43

2DH3 ANT1 HOP

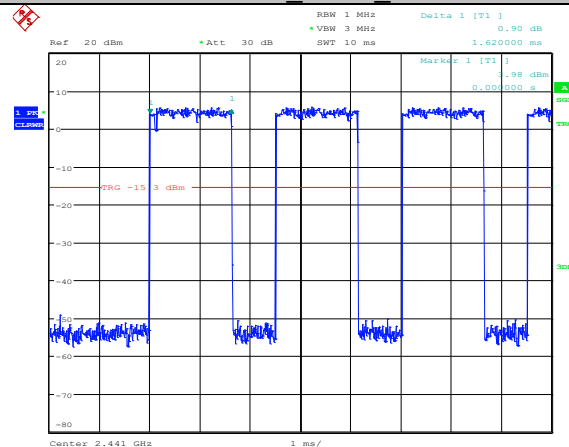


Date: 28.JUL.2021 09:28:39

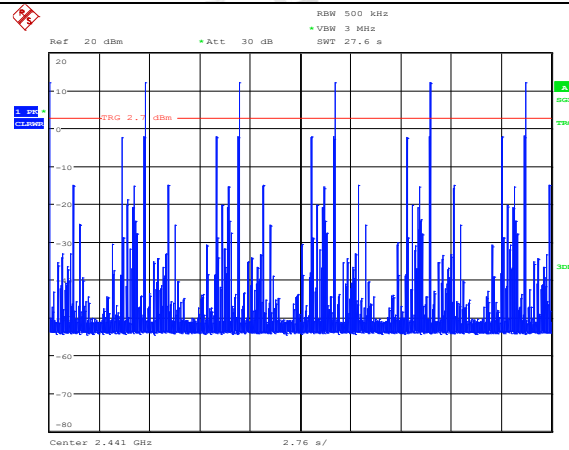


Date: 28.JUL.2021 09:29:28

2DH5 ANT1_HOP

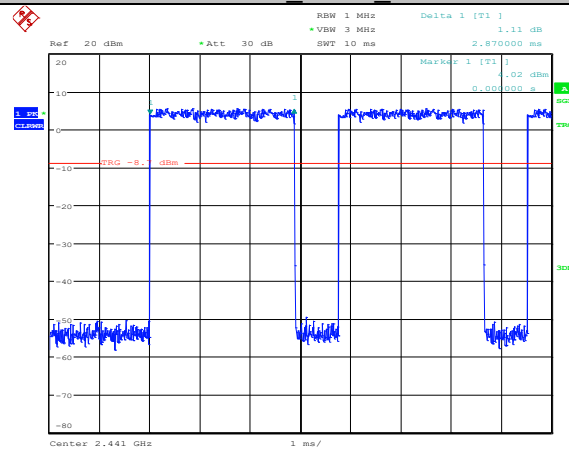


Date: 28.JUL.2021 09:33:06

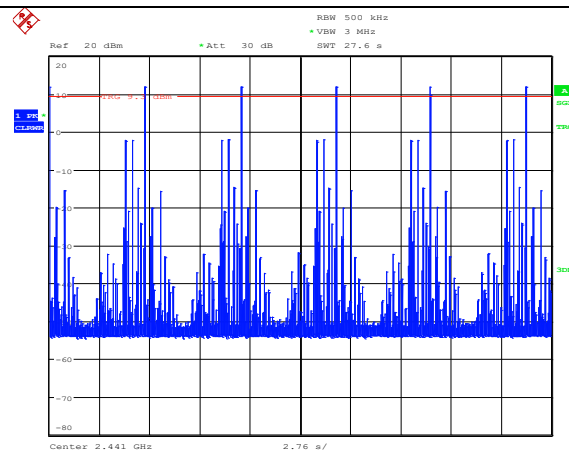


Date: 28.JUL.2021 09:33:41

3DH1 ANT1_HOP

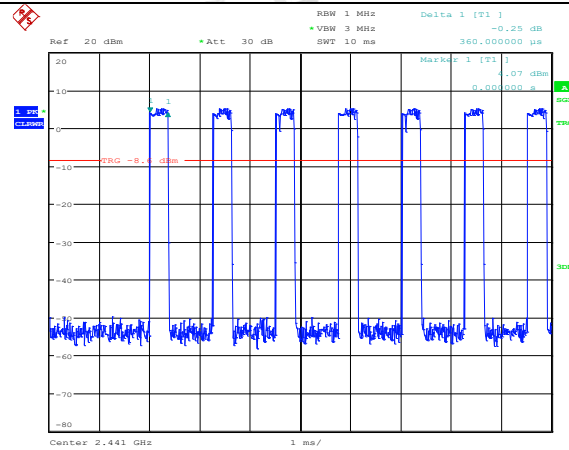


Date: 28.JUL.2021 09:34:08

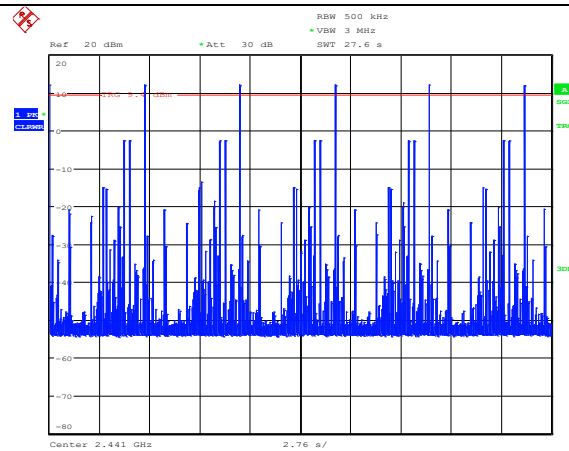


Date: 28.JUL.2021 09:34:40

3DH3 ANT1 HOP

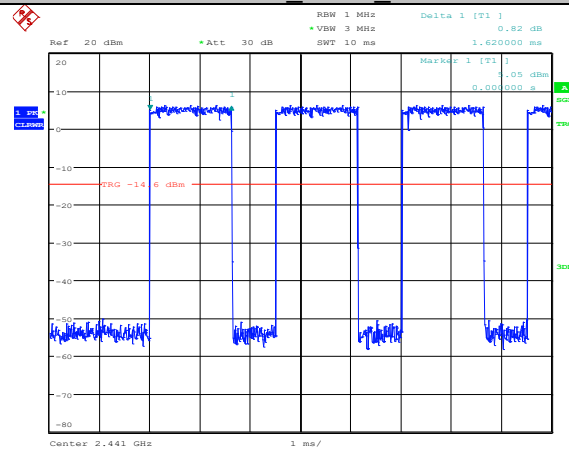


Date: 28.JUL.2021 09:35:17

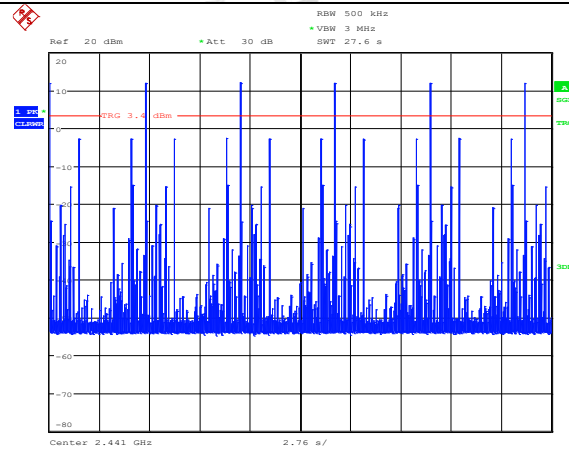


Date: 28.JUL.2021 09:35:56

3DH5_ANT1_HOP

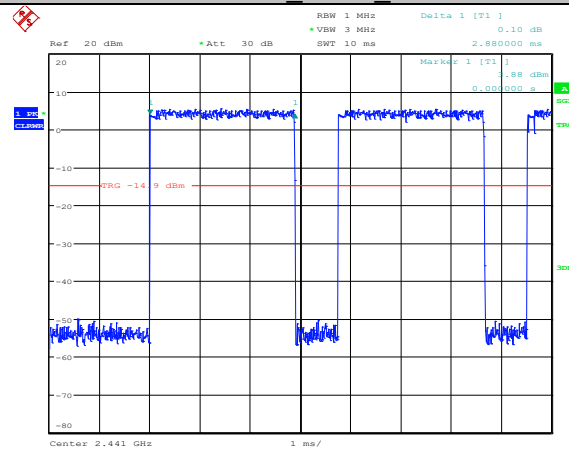

Date: 28.JUL.2021 09:37:06

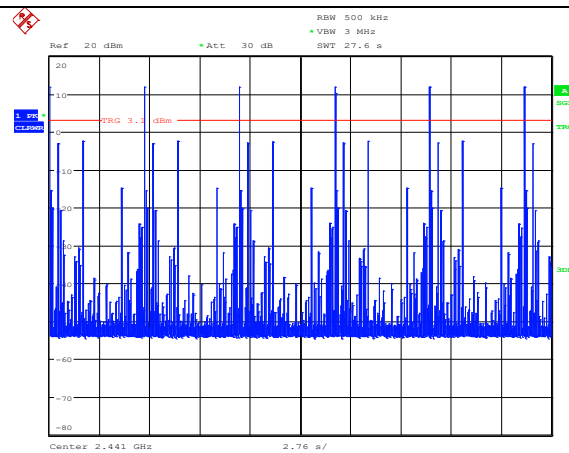

Date: 28.JUL.2021 09:38:02

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

Same as section 4.1


9.2. Limit


All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

9.3. Test result


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2407	Pass
	Hopping off 2475	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2407	Pass
	Hopping off 2475	Pass
	Hopping on	Pass
8DPSK	Hopping off 2407	Pass
	Hopping off 2475	Pass
	Hopping on	Pass

9.4. Original test data

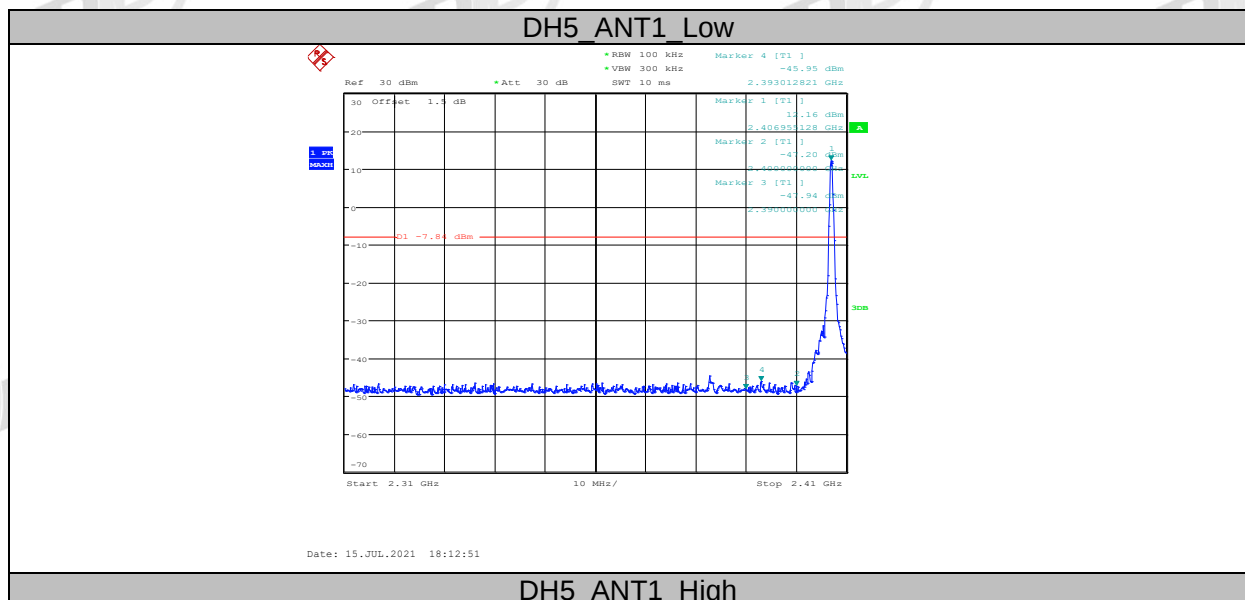


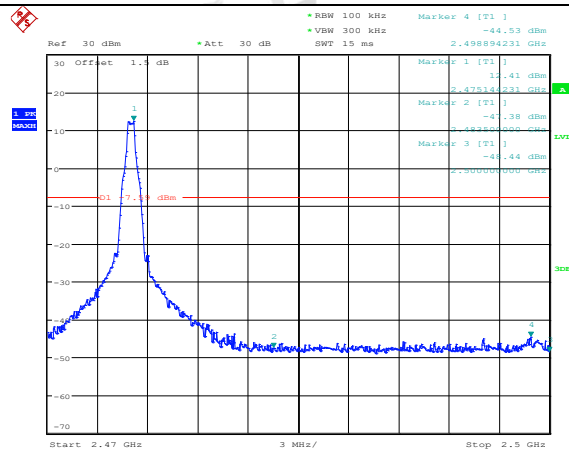


DH5_ANT1_Low

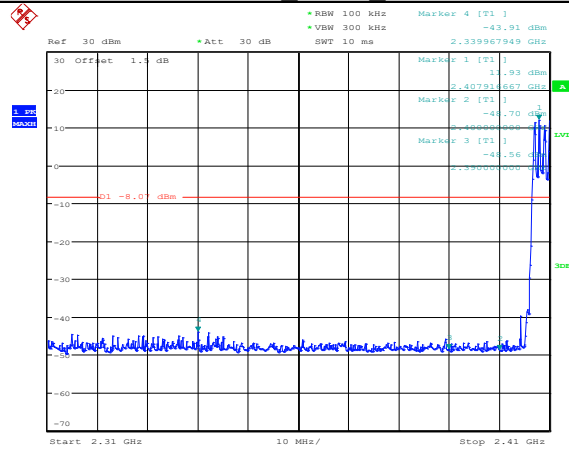


DH5_ANT1_High

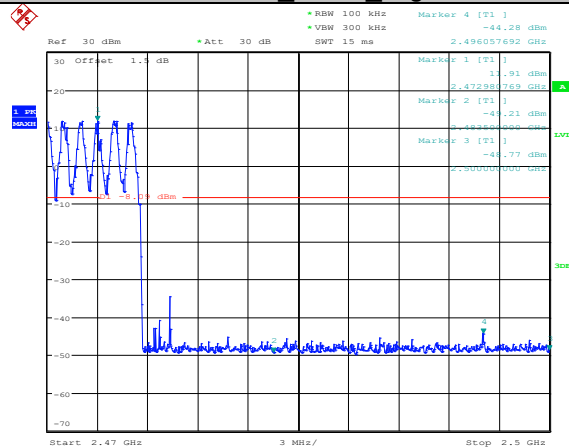


2DH5_ANT1_Low

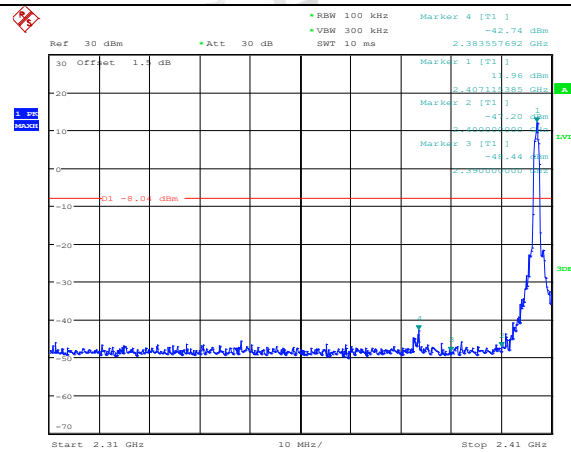


2DH5_ANT1_High

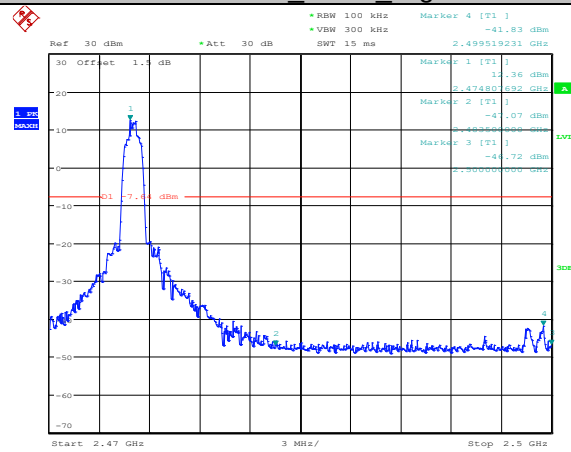


2DH5_ANT1_Low

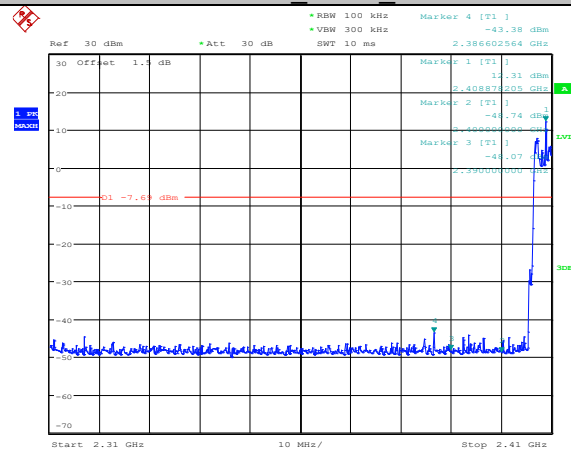


2DH5_ANT1_High

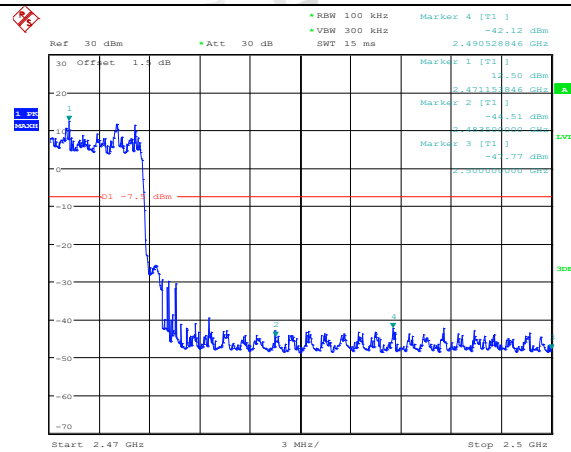


3DH5_ANT1_Low

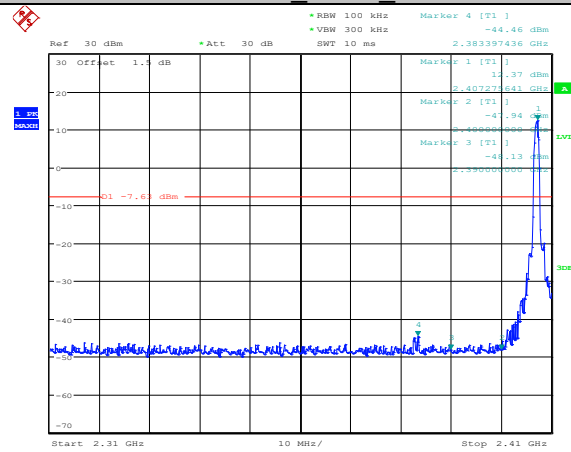

3DH5_ANT1_High

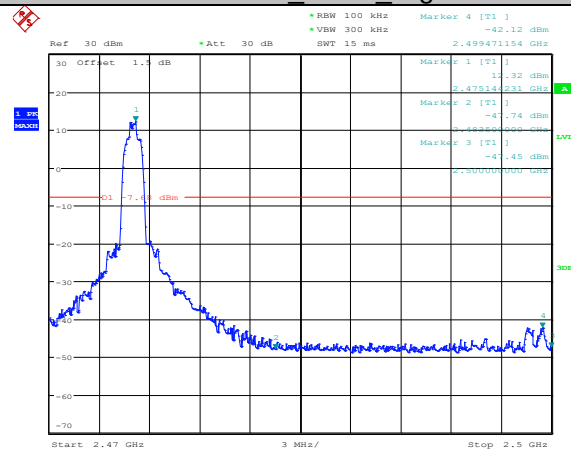


3DH5_ANT1_Low

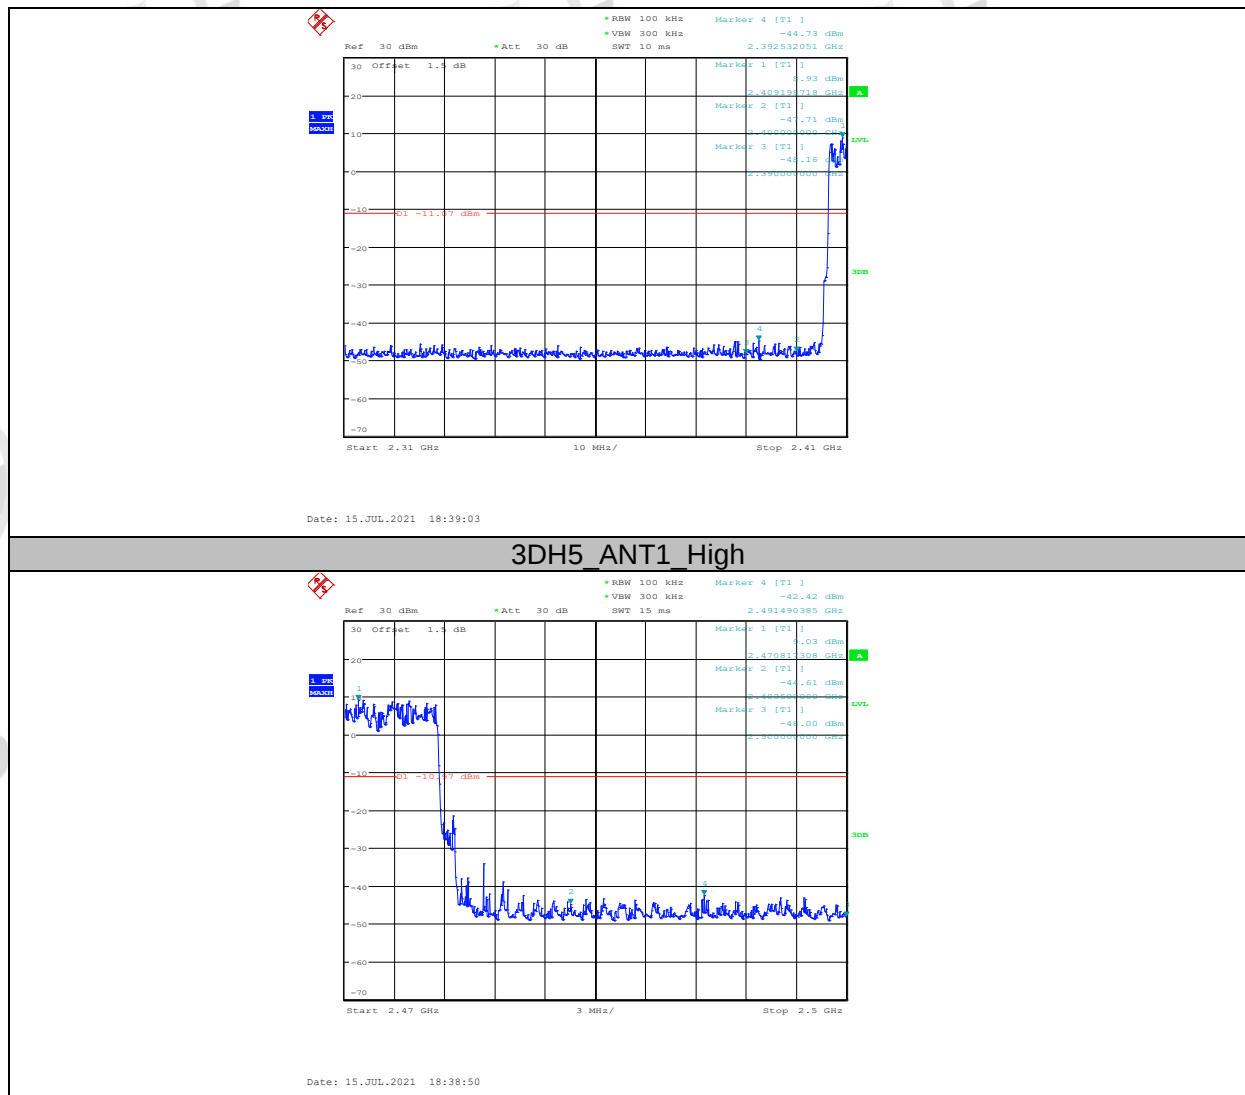


10. Radiated Emission

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

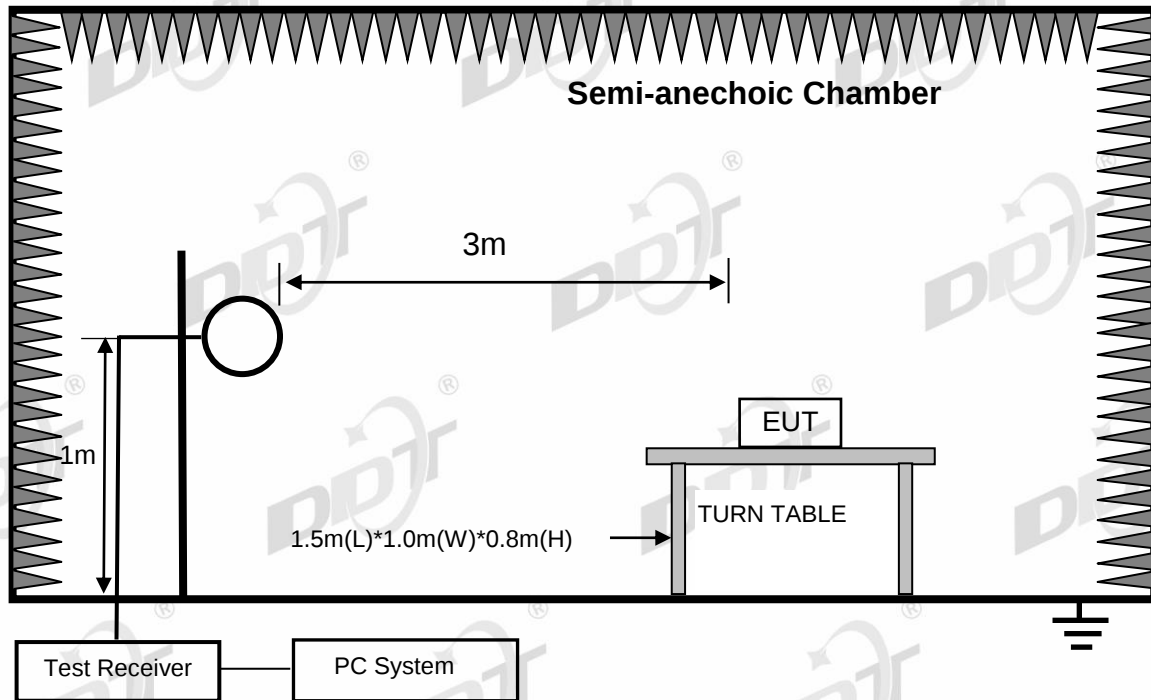

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

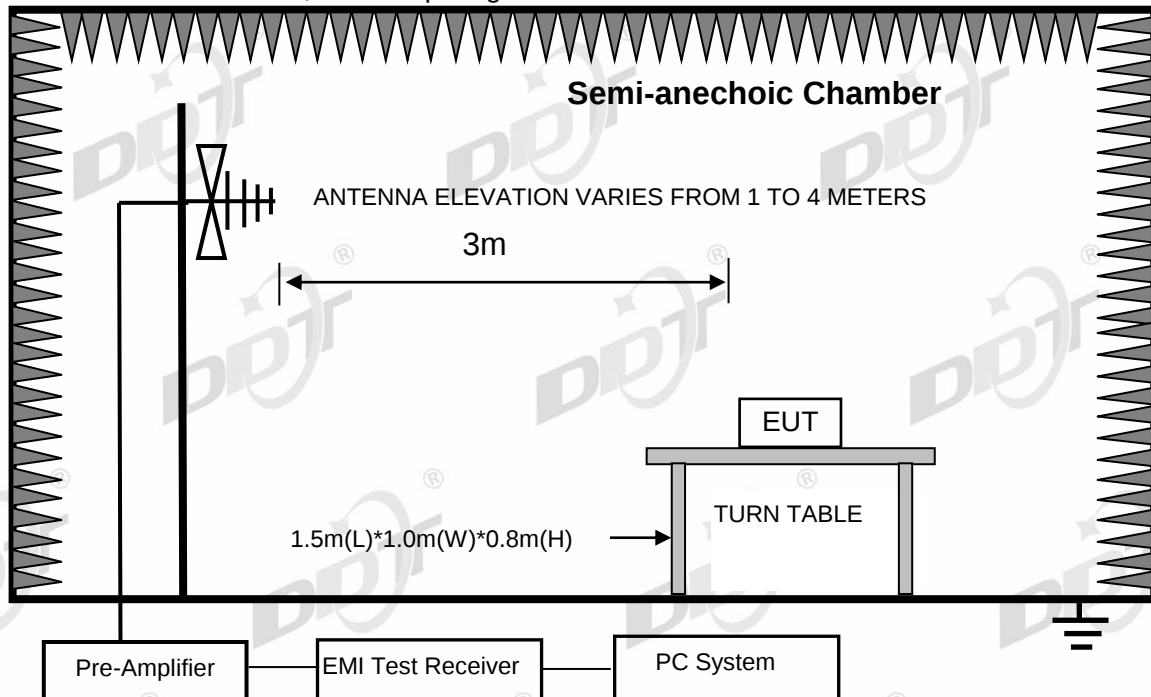

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

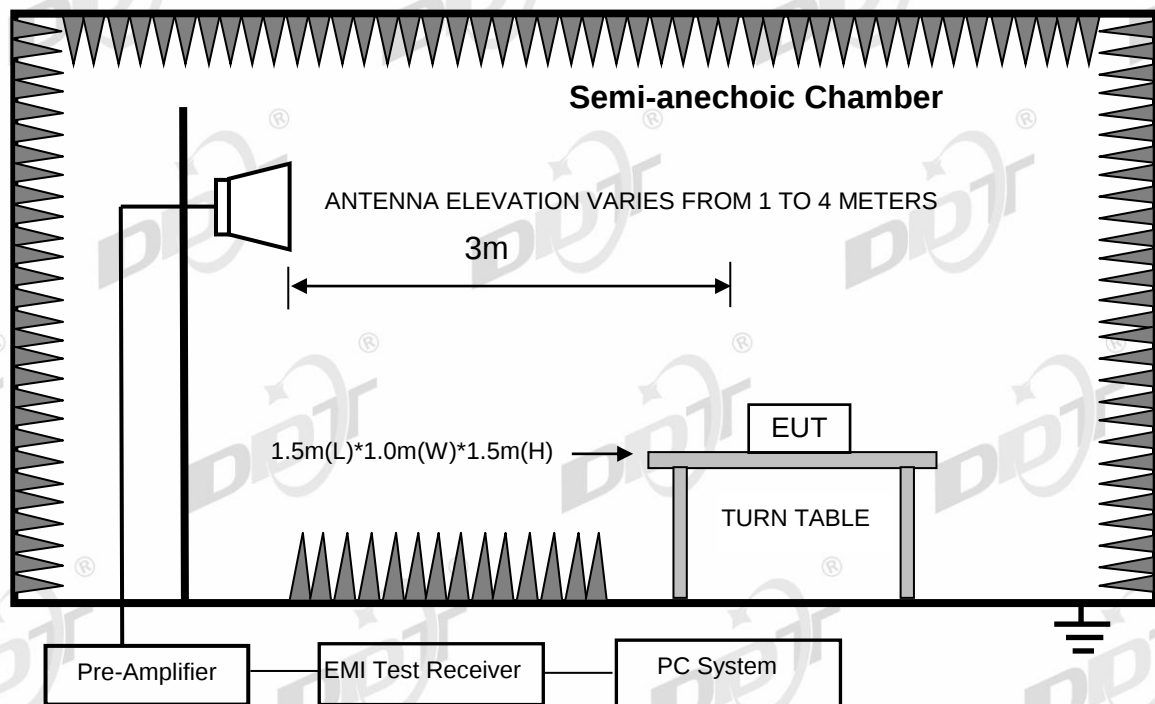

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

10.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilob Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 8DPSK Tx 2475 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC
BELOW1G.EM6

Test Date : 2021-07-20

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:45%,Press:101.3kPa

Antenna/Distance : 2020 VULB 9163 1#/3m/HORIZONTAL

Memo : SRD

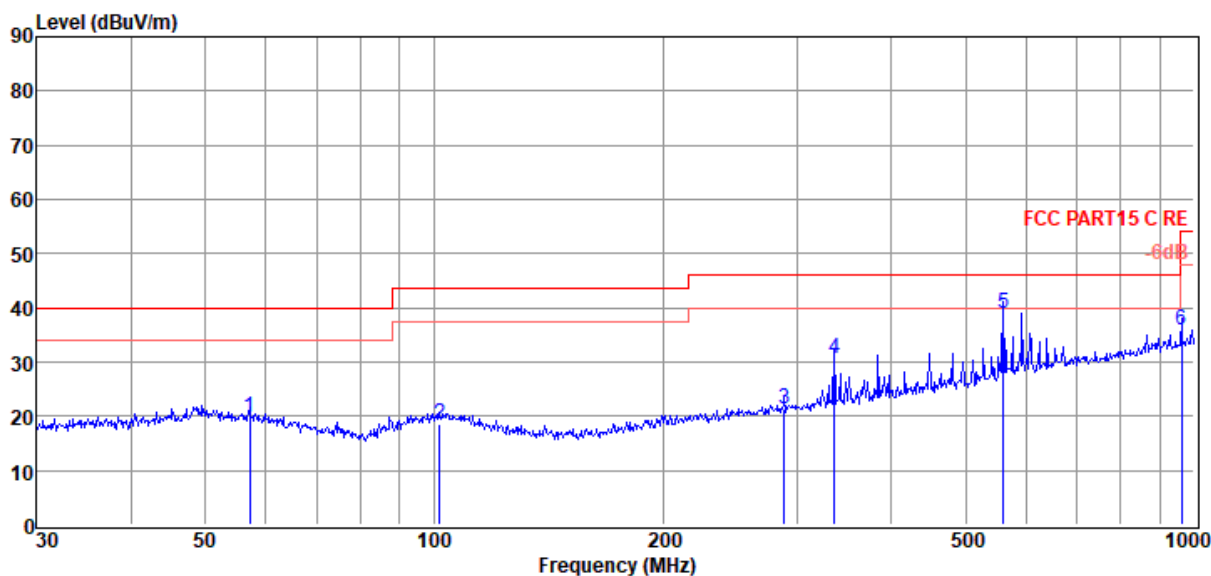

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	57.19	3.37	12.74	3.62	19.73	40.00	-20.27	QP	HORIZONTAL
2	101.64	1.83	12.98	3.89	18.70	43.50	-24.80	QP	HORIZONTAL
3	289.00	3.64	13.11	4.66	21.41	46.00	-24.59	QP	HORIZONTAL
4	336.04	11.42	14.29	4.82	30.53	46.00	-15.47	QP	HORIZONTAL
5	560.69	15.32	18.24	5.46	39.02	46.00	-6.98	QP	HORIZONTAL
6	962.16	7.28	22.32	6.37	35.97	54.00	-18.03	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC
BELOW1G.EM6

Test Date : 2021-07-20

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:45%,Press:101.3kPa

Antenna/Distance : 2020 VULB 9163 1#/3m/VERTICAL

Memo : SRD

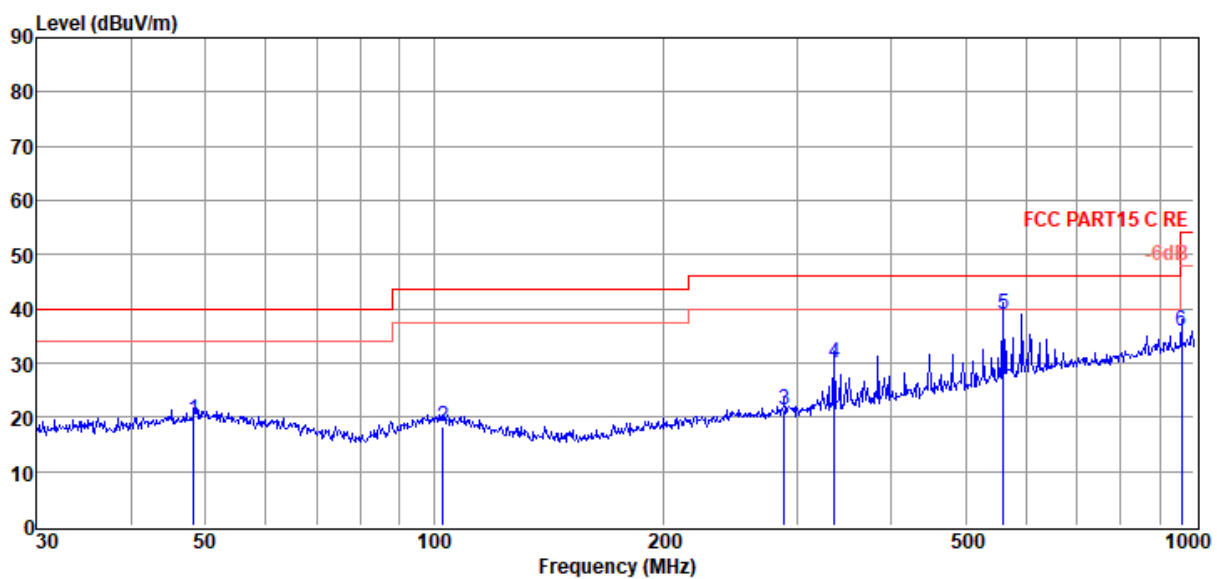

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	48.33	2.49	13.47	3.56	19.52	40.00	-20.48	QP	VERTICAL
2	102.72	1.59	12.90	3.90	18.39	43.50	-25.11	QP	VERTICAL
3	289.00	3.64	13.11	4.66	21.41	46.00	-24.59	QP	VERTICAL
4	336.04	10.93	14.29	4.82	30.04	46.00	-15.96	QP	VERTICAL
5	560.69	15.32	18.24	5.46	39.02	46.00	-6.98	QP	VERTICAL
6	962.16	7.28	22.32	6.37	35.97	54.00	-18.03	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

Freq. (MHz)	Read level (dBμV)	Antenn a Factor (dB/m)	PRM Facto r(dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμ V/m)	Margin (dB)	Detector type	Polarization
Tx mode 2407 MHz									
4814.00	49.37	34.14	42.78	5.55	46.28	74.00	-27.72	Peak	HORIZONTAL
7221.00	45.89	36.04	42.51	6.74	46.16	74.00	-27.84	Peak	HORIZONTAL
10214.00	44.32	38.47	41.88	8.04	48.95	74.00	-25.05	Peak	HORIZONTAL
13104.00	45.47	38.66	42.10	10.49	52.52	74.00	-21.48	Peak	HORIZONTAL
15586.00	45.24	41.00	41.38	10.36	55.22	74.00	-18.78	Peak	HORIZONTAL
15586.00	38.24	41.00	41.38	10.36	48.22	54.00	-5.78	Average	HORIZONTAL
17354.00	42.35	43.10	39.91	10.50	56.04	74.00	-17.96	Peak	HORIZONTAL
17354.00	34.35	43.10	39.91	10.50	48.04	54.00	-5.96	Average	HORIZONTAL
4825.00	46.45	34.16	42.78	5.55	43.38	74.00	-30.62	Peak	VERTICAL
7375.00	44.06	36.13	42.44	6.82	44.57	74.00	-29.43	Peak	VERTICAL
9806.00	44.42	38.59	41.57	7.82	49.26	74.00	-24.74	Peak	VERTICAL
12084.00	44.61	38.00	41.10	9.62	51.13	74.00	-22.87	Peak	VERTICAL
14685.00	43.74	40.25	41.44	10.82	53.37	74.00	-20.63	Peak	VERTICAL
16334.00	44.50	42.04	40.93	10.24	55.85	74.00	-18.15	Peak	VERTICAL
16334.00	37.50	42.04	40.93	10.24	48.85	54.00	-5.15	Average	VERTICAL
Tx mode 2441 MHz									
4882.00	48.79	34.27	42.75	5.59	45.90	74.00	-28.10	Peak	HORIZONTAL
7323.00	50.72	36.10	42.46	6.79	51.15	74.00	-22.85	Peak	HORIZONTAL
10146.00	45.34	38.60	41.82	7.98	50.10	74.00	-23.90	Peak	HORIZONTAL
12526.00	44.99	38.03	41.64	10.00	51.38	74.00	-22.62	Peak	HORIZONTAL
15671.00	44.68	41.11	41.36	10.31	54.74	74.00	-19.26	Peak	HORIZONTAL
15671.00	38.68	41.11	41.36	10.31	48.74	54.00	-5.26	Average	HORIZONTAL
17575.00	42.04	43.47	39.73	10.56	56.34	74.00	-17.66	Peak	HORIZONTAL
17575.00	34.04	43.47	39.73	10.56	48.34	54.00	-5.66	Average	HORIZONTAL
4876.00	45.10	34.26	42.76	5.58	42.18	74.00	-31.82	Peak	VERTICAL
7323.00	47.34	36.10	42.46	6.79	47.77	74.00	-26.23	Peak	VERTICAL
9330.00	44.81	37.73	41.24	7.77	49.07	74.00	-24.93	Peak	VERTICAL
12050.00	44.67	38.00	41.06	9.58	51.19	74.00	-22.81	Peak	VERTICAL
13920.00	44.80	39.57	41.37	11.14	54.14	74.00	-19.86	Peak	VERTICAL
13920.00	38.80	39.57	41.37	11.14	48.14	54.00	-5.86	Average	VERTICAL
15790.00	45.86	41.25	41.34	10.25	56.02	74.00	-17.98	Peak	VERTICAL
15790.00	37.86	41.25	41.34	10.25	48.02	54.00	-5.98	Average	VERTICAL
Tx mode 2475 MHz									
4950.00	50.74	32.60	43.24	6.98	47.08	74.00	-26.92	Peak	HORIZONTAL
7579.00	46.64	37.23	42.58	8.81	50.10	74.00	-23.90	Peak	HORIZONTAL
9551.00	45.63	38.80	42.03	9.72	52.12	74.00	-21.88	Peak	HORIZONTAL
12101.00	46.16	39.46	41.57	11.28	55.33	74.00	-18.67	Peak	HORIZONTAL
12101.00	36.37	39.46	41.57	11.28	45.54	54.00	-8.46	Average	HORIZONTAL
15280.00	42.11	39.95	41.87	12.69	52.88	74.00	-21.12	Peak	HORIZONTAL
17881.00	42.28	47.50	42.47	14.35	61.66	74.00	-12.34	Peak	HORIZONTAL
17881.00	31.17	47.50	42.47	14.35	50.55	54.00	-3.45	Average	HORIZONTAL
5505.00	45.37	34.70	42.91	6.19	43.35	74.00	-30.65	Peak	VERTICAL

7425.00	47.79	36.16	42.42	6.85	48.38	74.00	-25.62	Peak	VERTICAL
10010.00	44.93	38.88	41.71	7.85	49.95	74.00	-24.05	Peak	VERTICAL
13274.00	44.03	38.77	41.95	10.63	51.48	74.00	-22.52	Peak	VERTICAL
15875.00	45.80	41.35	41.32	10.21	56.04	74.00	-17.96	Peak	VERTICAL
15875.00	37.80	41.35	41.32	10.21	48.04	54.00	-5.96	Average	VERTICAL
17575.00	42.22	43.47	39.73	10.56	56.52	74.00	-17.48	Peak	VERTICAL
17575.00	34.22	43.47	39.73	10.56	48.52	54.00	-5.48	Average	VERTICAL
Verdict: Pass									

Note: 1. 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is 8DPSK Mode)

2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

Same as section 4.1

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2407	Pass
	Hopping off 2441	Pass
	Hopping off 2475	Pass
$\pi/4$ -DQPSK	Hopping off 2407	Pass
	Hopping off 2441	Pass
	Hopping off 2475	Pass
8DPSK	Hopping off 2407	Pass
	Hopping off 2441	Pass
	Hopping off 2475	Pass

11.5. Original test data

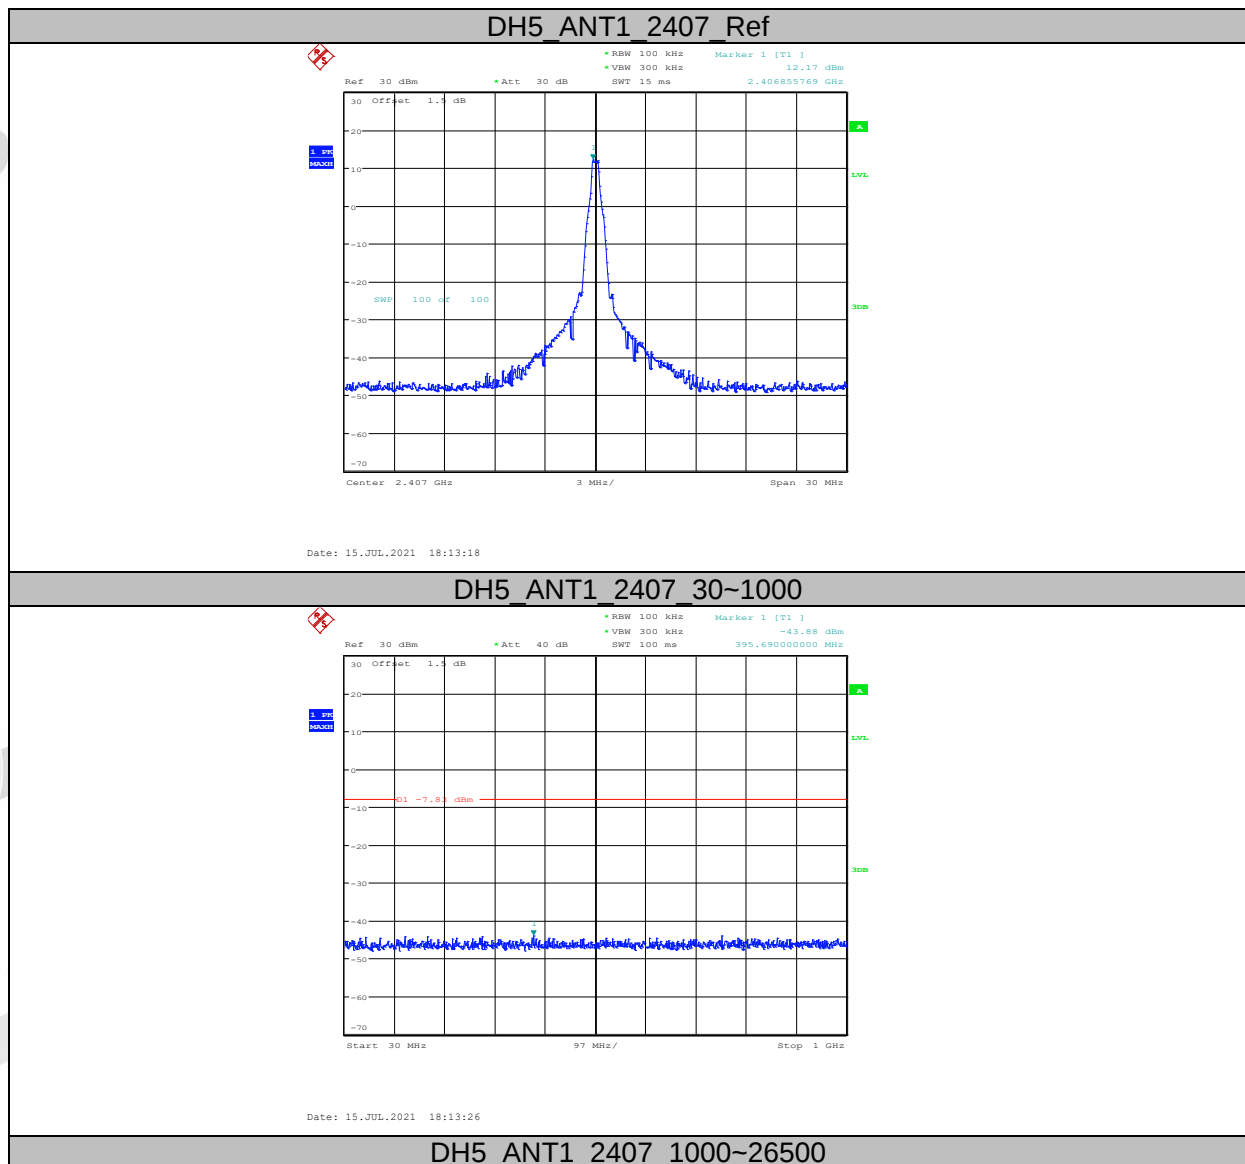





Date: 15.JUL.2021 18:14:33

Date: 15.JUL.2021 18:14:42


Page 48 of 113

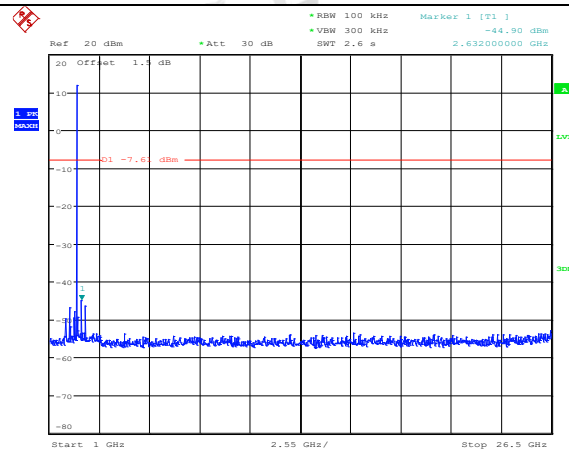


DH5_ANT1_2475_Ref

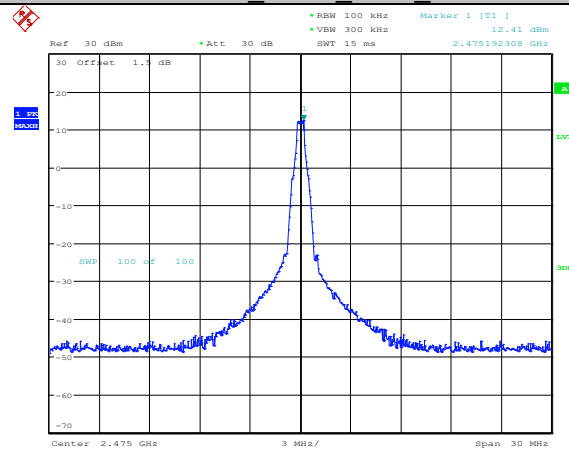

DH5_ANT1_2475_30~1000

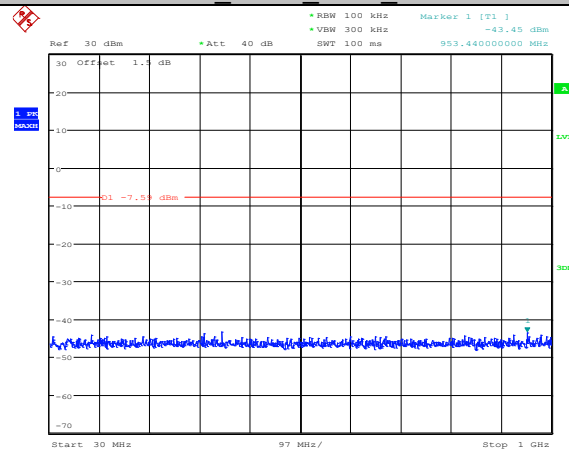


DH5_ANT1_2475_1000~26500

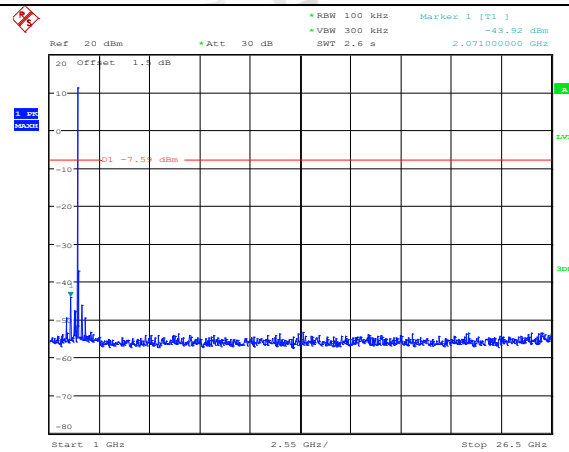


Date: 15.JUL.2021 18:17:05

2DH5 ANT1 2407 Ref

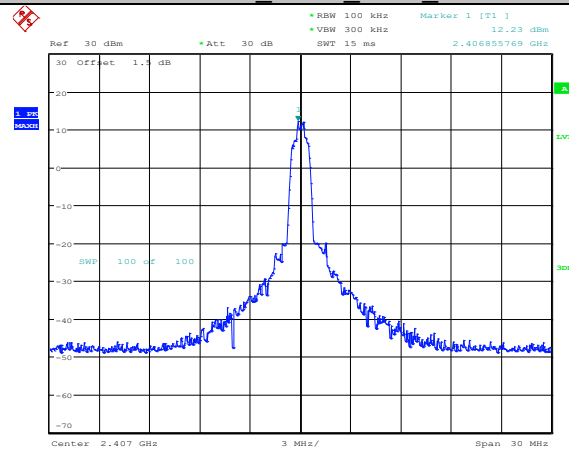


Date: 15.JUL.2021 18:18:20

2DH5 ANT1 2407 30~1000

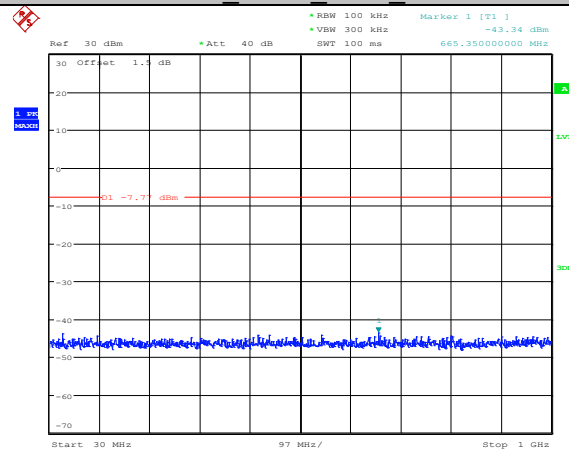


Date: 15.JUL.2021 18:18:29

2DH5 ANT1 2407 1000~26500

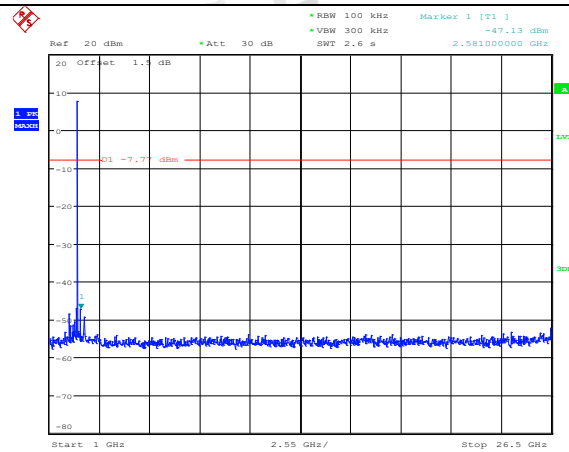


Date: 15.JUL.2021 18:18:40

2DH5 ANT1 2441 Ref

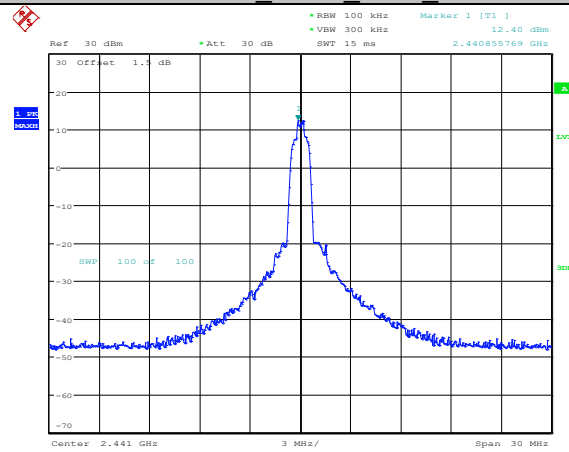


Date: 15.JUL.2021 18:20:32

2DH5 ANT1 2441 30~1000

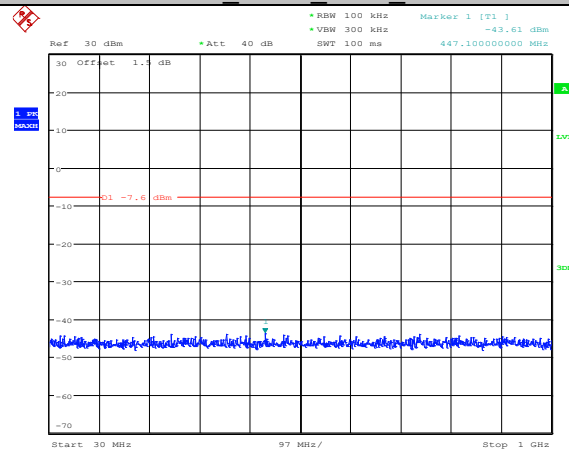


Date: 15.JUL.2021 18:20:40

2DH5 ANT1 2441 1000~26500

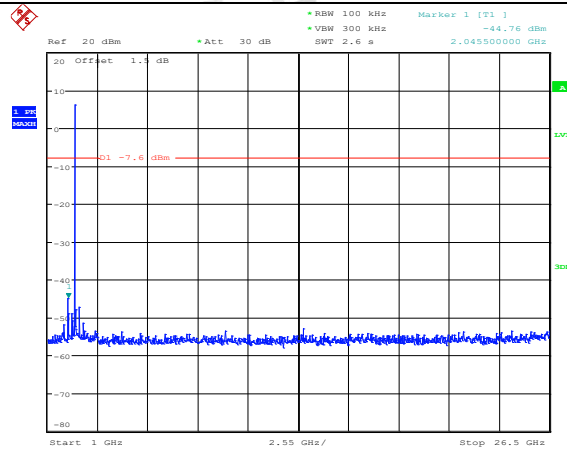


Date: 15.JUL.2021 18:20:51

2DH5_ANT1_2475_Ref

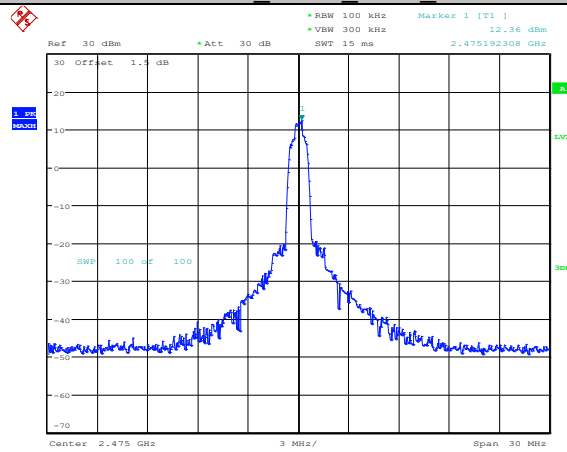


Date: 15.JUL.2021 18:22:24

2DH5_ANT1_2475_30~1000

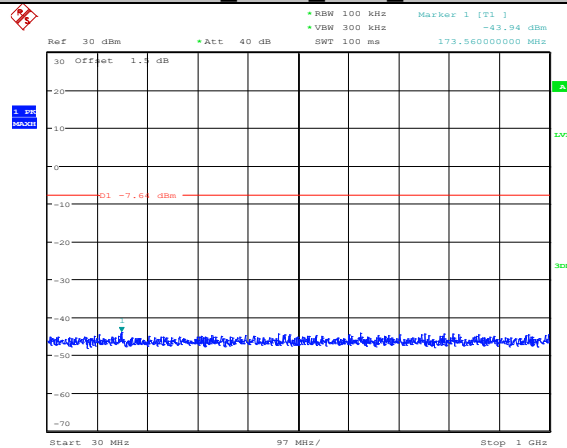


Date: 15.JUL.2021 18:22:32

2DH5_ANT1_2475_1000~26500

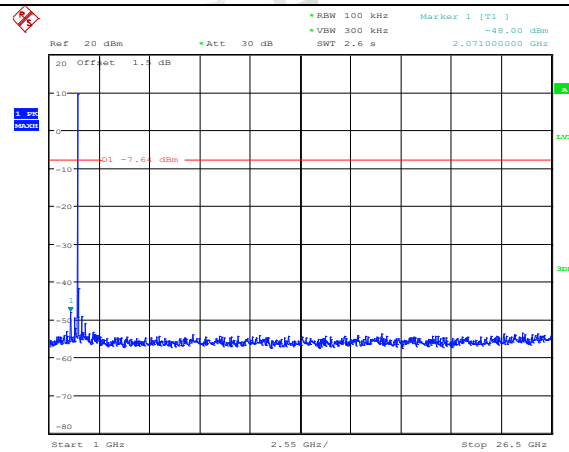


Date: 15.JUL.2021 18:22:44

3DH5 ANT1 2407 Ref

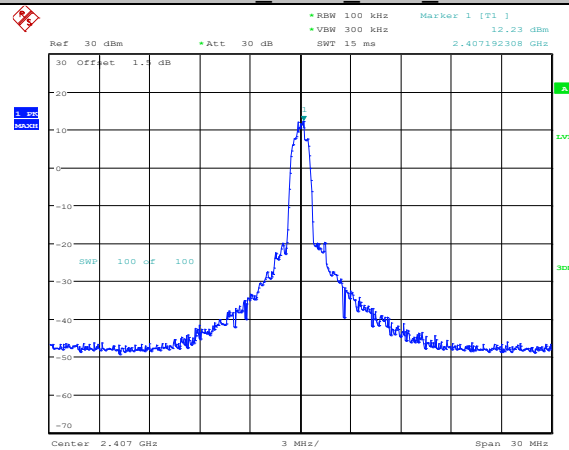


Date: 15.JUL.2021 18:24:00

3DH5 ANT1 2407 30~1000

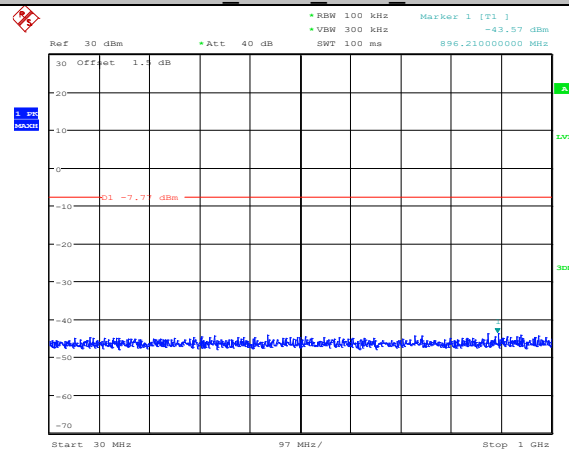


Date: 15.JUL.2021 18:24:08

3DH5 ANT1 2407 1000~26500

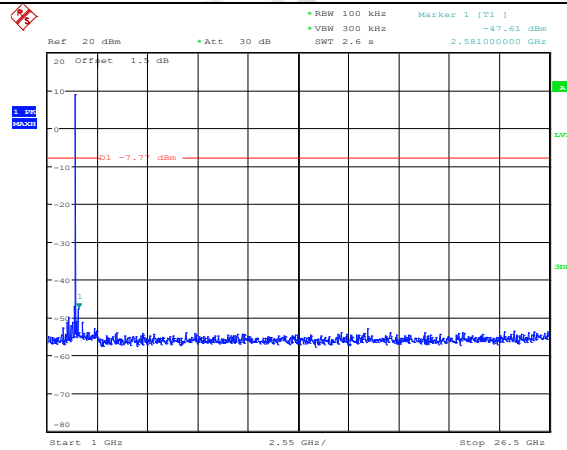


Date: 15.JUL.2021 18:24:19

3DH5_ANT1_2441_Ref

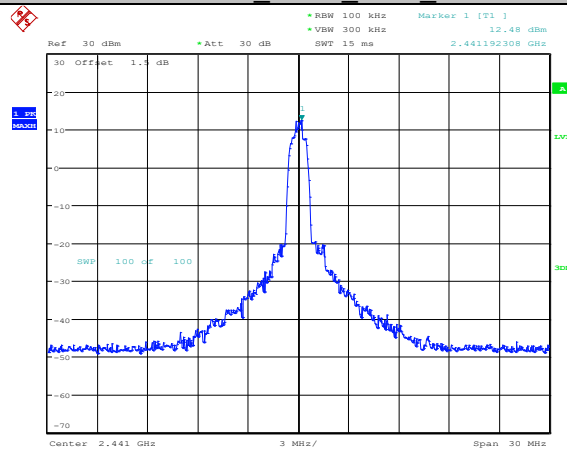


Date: 15.JUL.2021 18:25:16

3DH5_ANT1_2441_30~1000

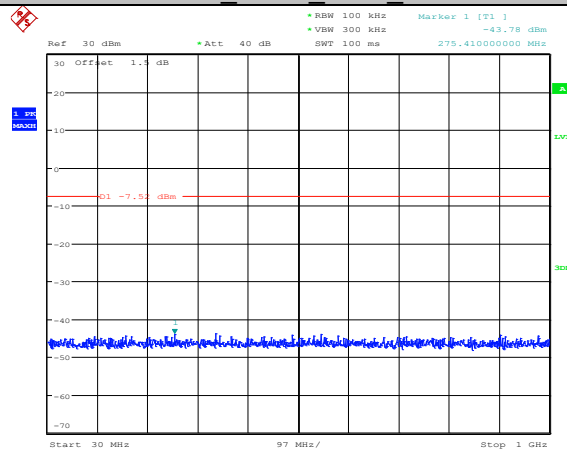


Date: 15.JUL.2021 18:25:25

3DH5_ANT1_2441_1000~26500

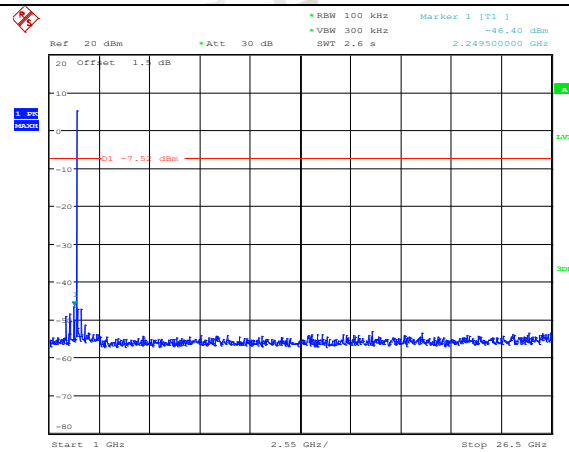


Date: 15.JUL.2021 18:25:36

3DH5 ANT1 2475 Ref

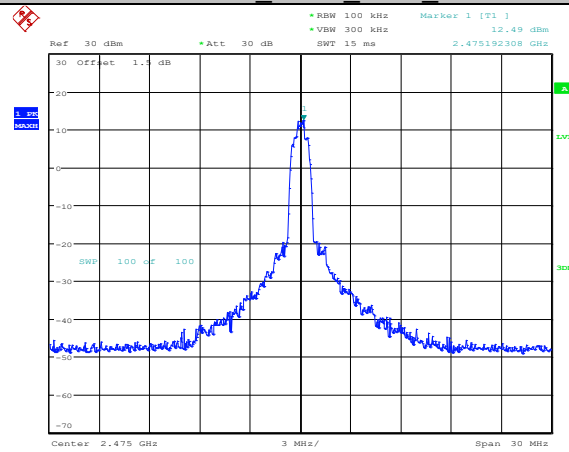


Date: 15.JUL.2021 18:27:23

3DH5 ANT1 2475 30~1000

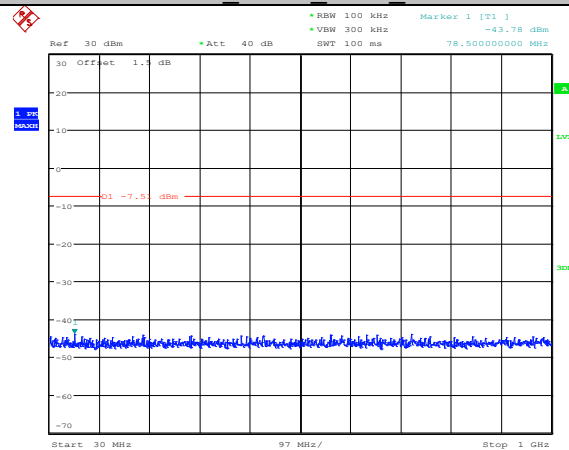


Date: 15.JUL.2021 18:27:32

3DH5 ANT1 2475 1000~26500

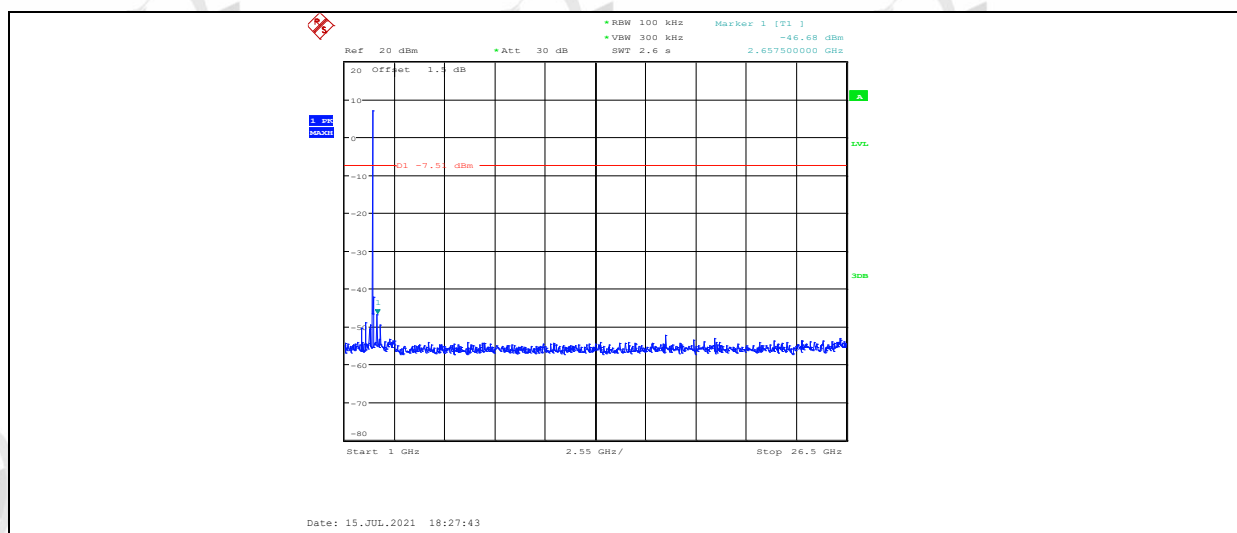

12. Band Edge Compliance (Radiated Method)

12.1. Block diagram of test setup

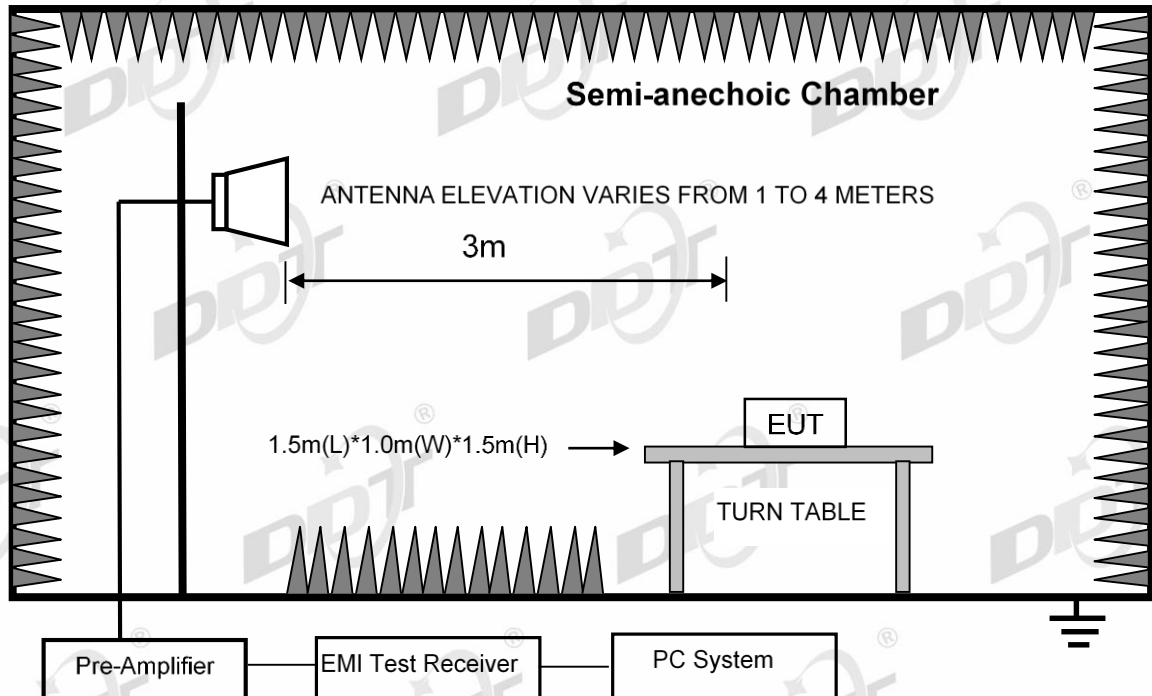

12.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

12.3. Test Procedure

Same with clause 10.3 except change investigated frequency range from 2310 MHz to 2412 MHz and 2470 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

12.4. Test result

Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only. Scan with all side, the worst case is right side recorded in this report.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/HORIZONTAL

Memo : SRD DH5 2407

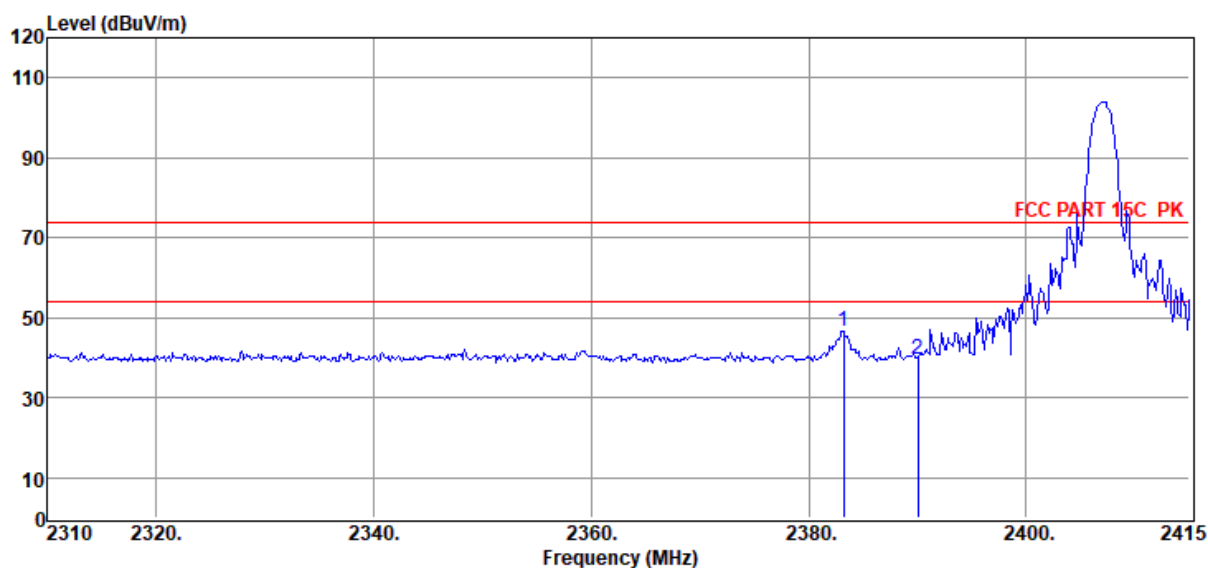

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.19	56.21	28.96	42.42	3.86	46.61	74.00	-27.39	Peak	HORIZONTAL
2	2390.01	49.30	28.98	42.43	3.86	39.71	74.00	-34.29	Peak	HORIZONTAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/VERTICAL

Memo : SRD DH5 2407

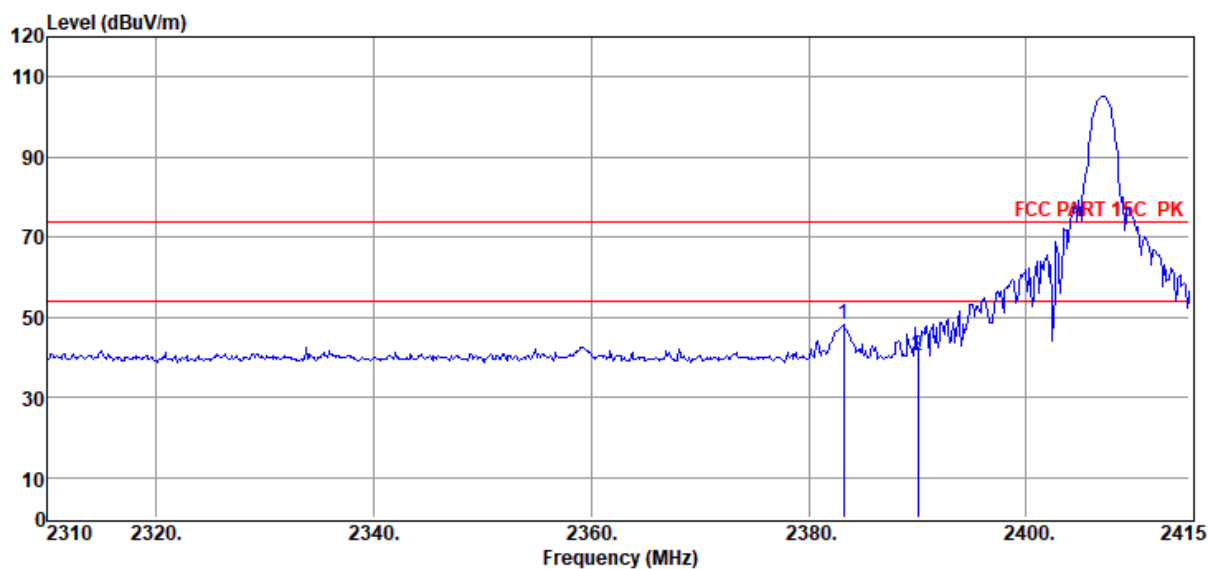

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.19	58.04	28.96	42.42	3.86	48.44	74.00	-25.56	Peak	VERTICAL
2	2390.01	50.11	28.98	42.43	3.86	40.52	74.00	-33.48	Peak	VERTICAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/HORIZONTAL

Memo : SRD DH5 2475

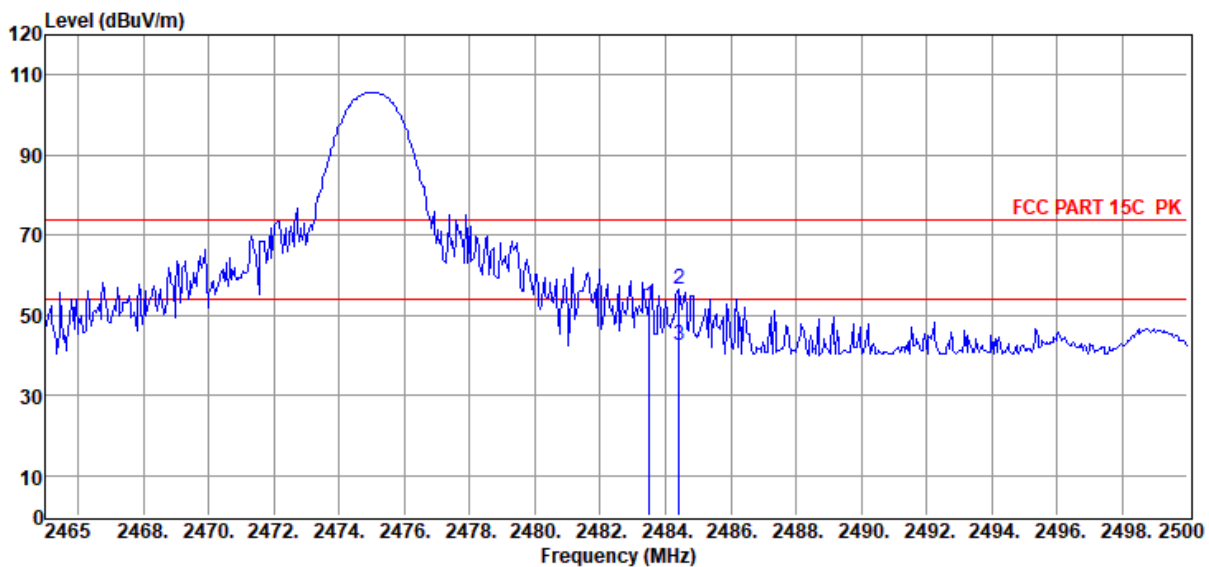

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.52	61.71	29.17	42.54	3.93	52.27	74.00	-21.73	Peak	HORIZONTAL
2	2484.43	65.96	29.17	42.54	3.93	56.52	74.00	-17.48	Peak	HORIZONTAL
3	2484.43	52.11	29.17	42.54	3.93	42.67	54.00	-11.33	Average	HORIZONTAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/VERTICAL

Memo : SRD DH5 2475

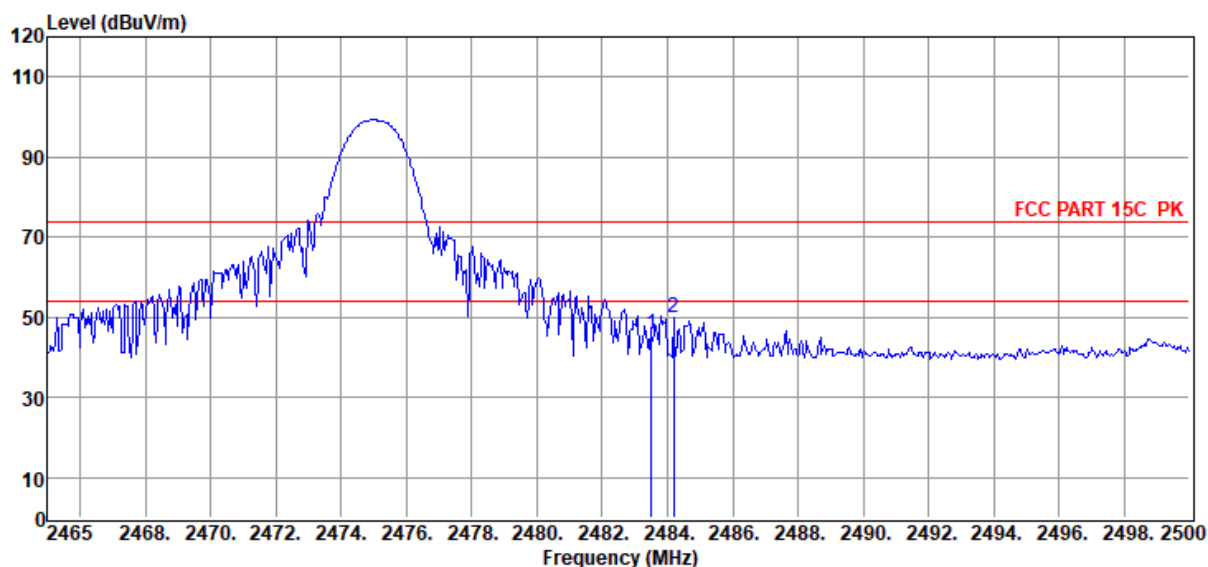

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.52	55.17	29.17	42.54	3.93	45.73	74.00	-28.27	Peak	VERTICAL
2	2484.18	59.23	29.17	42.54	3.93	49.79	74.00	-24.21	Peak	VERTICAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/HORIZONTAL

Memo : SRD 2DH5 2407

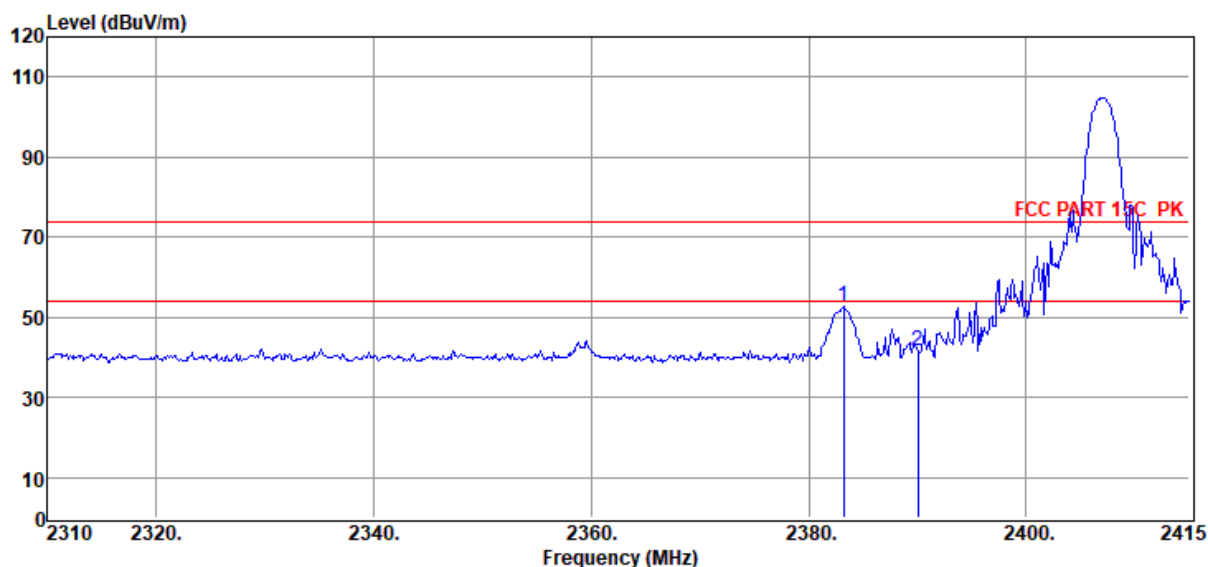

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.19	62.24	28.96	42.42	3.86	52.64	74.00	-21.36	Peak	HORIZONTAL
2	2390.01	51.28	28.98	42.43	3.86	41.69	74.00	-32.31	Peak	HORIZONTAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/VERTICAL

Memo : SRD 2DH5 2407

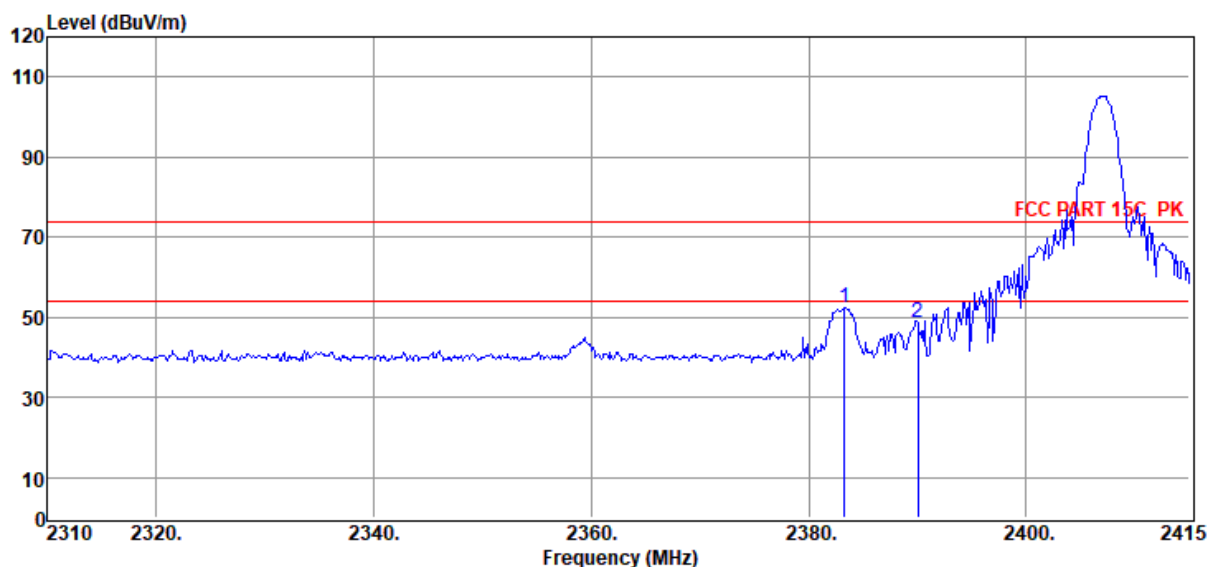

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.29	61.96	28.96	42.42	3.86	52.36	74.00	-21.64	Peak	VERTICAL
2	2390.01	58.38	28.98	42.43	3.86	48.79	74.00	-25.21	Peak	VERTICAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/HORIZONTAL

Memo : SRD 2DH5 2475

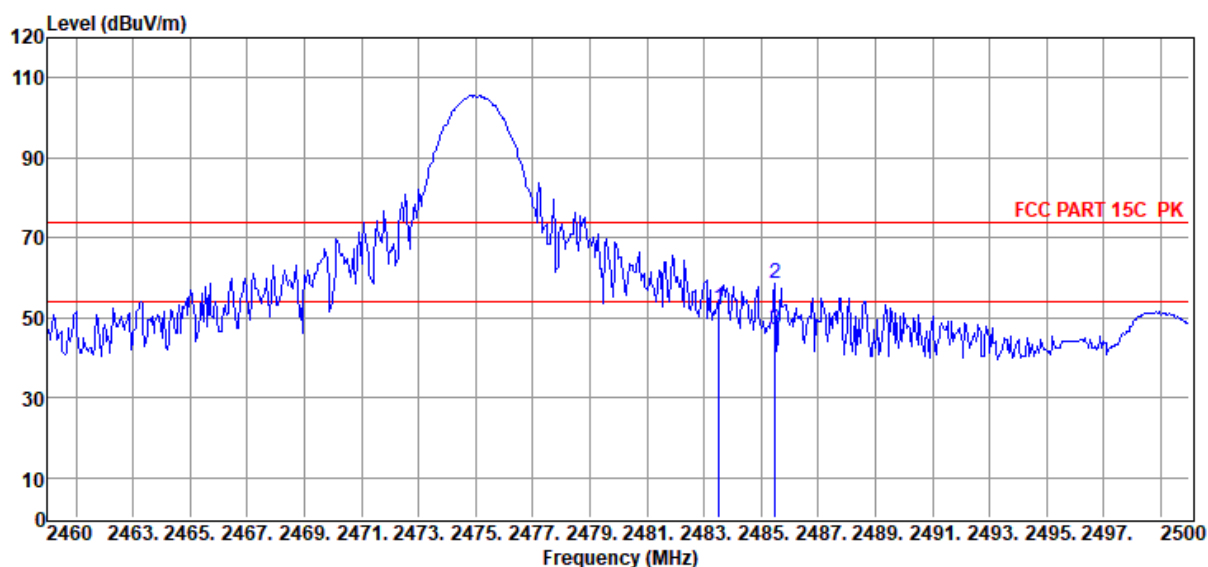

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.52	61.81	29.17	42.54	3.93	52.37	74.00	-21.63	Peak	HORIZONTAL
2	2485.48	67.99	29.17	42.54	3.93	58.55	74.00	-15.45	Peak	HORIZONTAL
3	2485.48	56.25	29.17	42.54	3.93	46.81	54.00	-7.19	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/VERTICAL

Memo : SRD 2DH5 2475

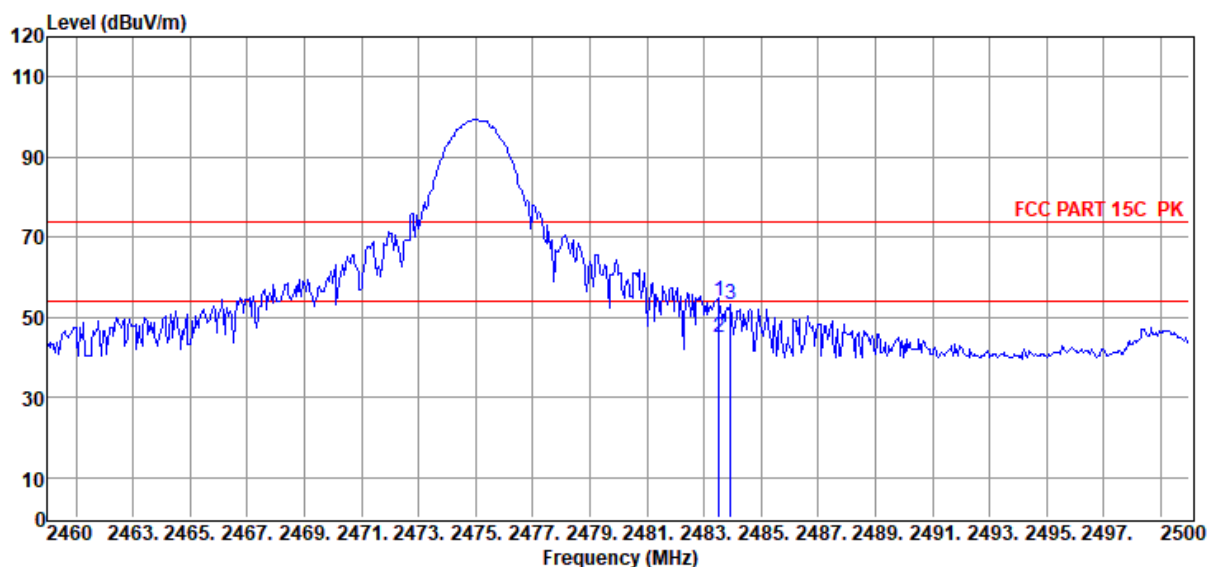

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.52	63.41	29.17	42.54	3.93	53.97	74.00	-20.03	Peak	VERTICAL
2	2483.52	54.41	29.17	42.54	3.93	44.97	54.00	-9.03	Average	VERTICAL
3	2483.92	62.49	29.17	42.54	3.93	53.05	74.00	-20.95	Peak	VERTICAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/HORIZONTAL

Memo : SRD 3DH5 2407

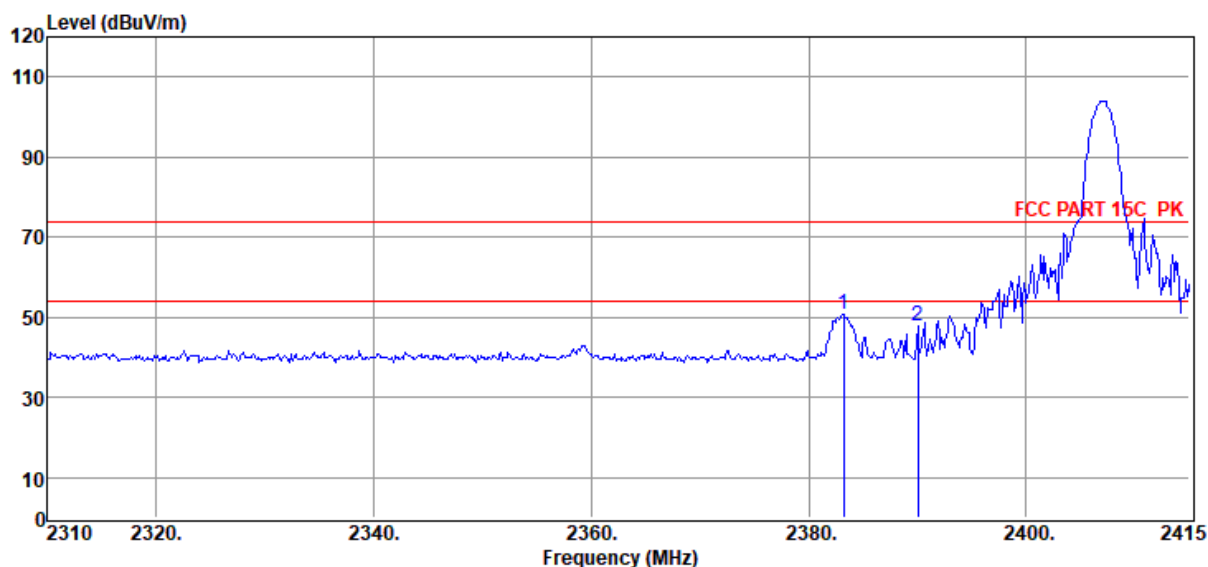

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.19	60.33	28.96	42.42	3.86	50.73	74.00	-23.27	Peak	HORIZONTAL
2	2390.01	57.55	28.98	42.43	3.86	47.96	74.00	-26.04	Peak	HORIZONTAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/VERTICAL

Memo : SRD 3DH5 2407

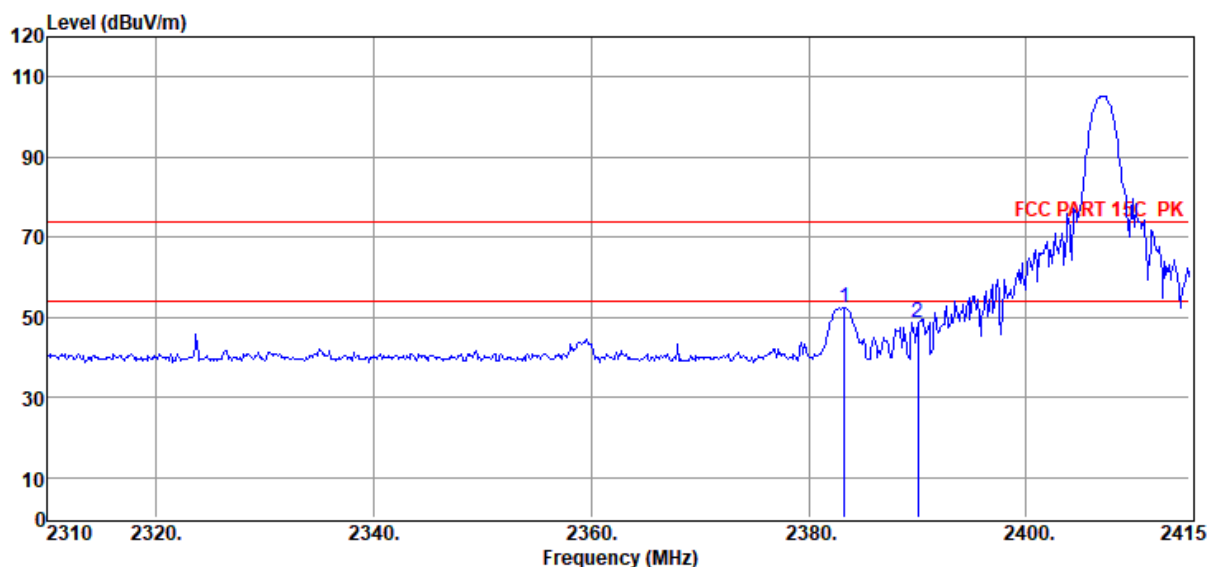

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2383.29	62.15	28.96	42.42	3.86	52.55	74.00	-21.45	Peak	VERTICAL
2	2390.01	58.22	28.98	42.43	3.86	48.63	74.00	-25.37	Peak	VERTICAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/HORIZONTAL

Memo : SRD 3DH5 2475

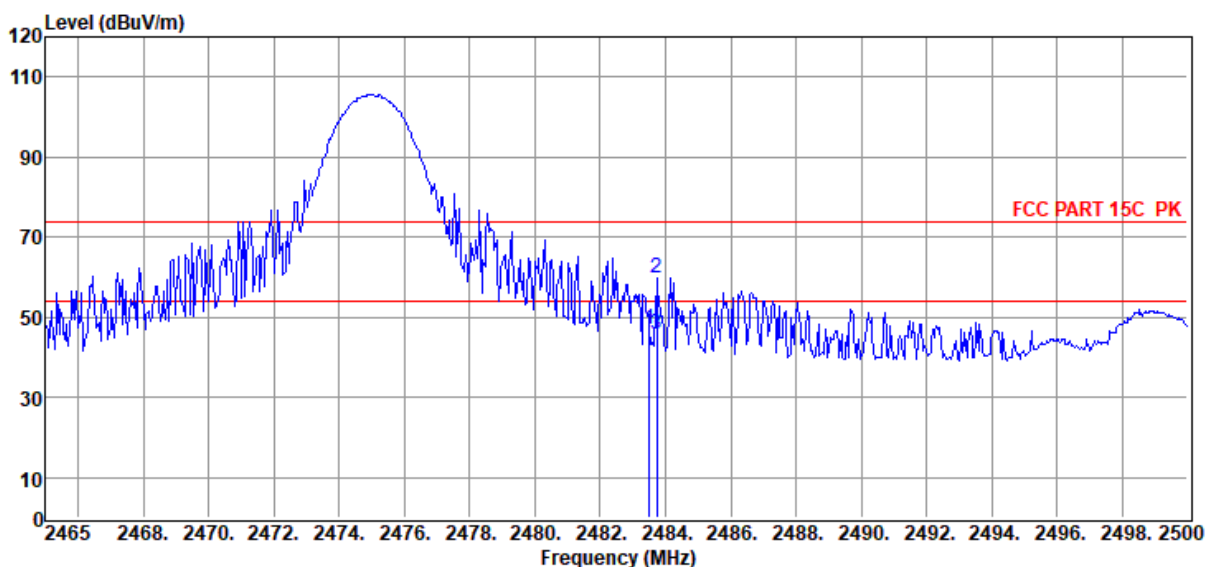

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.52	56.27	29.17	42.54	3.93	46.83	74.00	-27.17	Peak	HORIZONTAL
2	2483.73	69.28	29.17	42.54	3.93	59.84	74.00	-14.16	Peak	HORIZONTAL
3	2483.73	55.26	29.17	42.54	3.93	45.82	54.00	-8.18	Average	HORIZONTAL

Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2021 RE 1# Report data\Q21061513-2E FLIP6C\FCC ABOVE1G SRD.EM6

Test Date : 2021-07-18

Tested By : Kennys

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 HF907/3m/VERTICAL

Memo : SRD 3DH5 2475

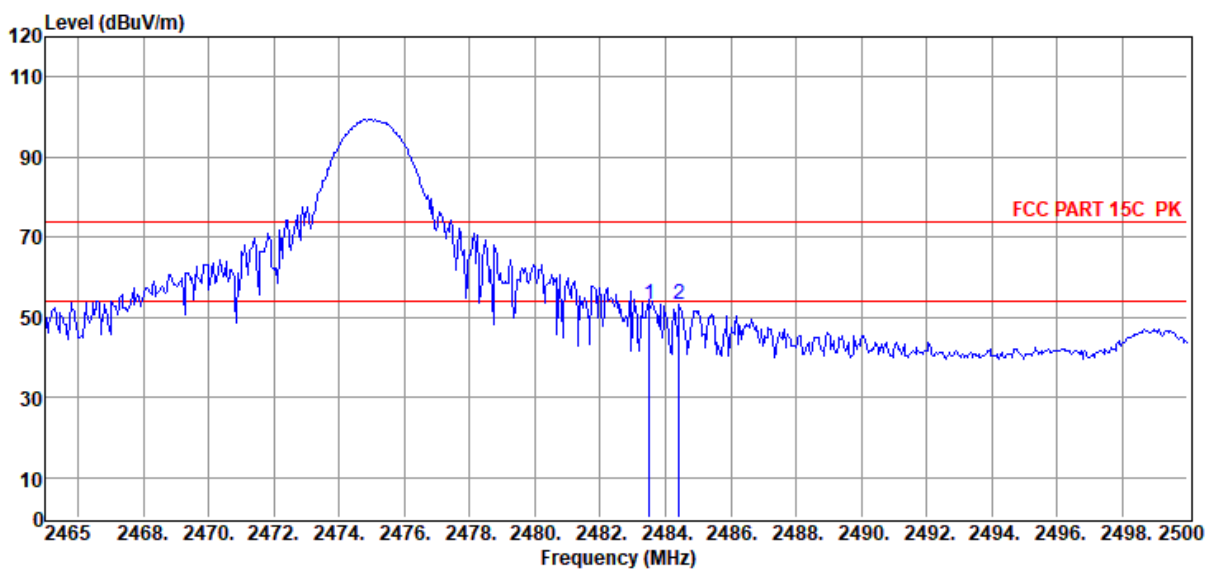

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.52	62.83	29.17	42.54	3.93	53.39	74.00	-20.61	Peak	VERTICAL
2	2484.43	62.51	29.17	42.54	3.93	53.07	74.00	-20.93	Peak	VERTICAL


Note:1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Power Line Conducted Emission

13.1. Block diagram of test setup

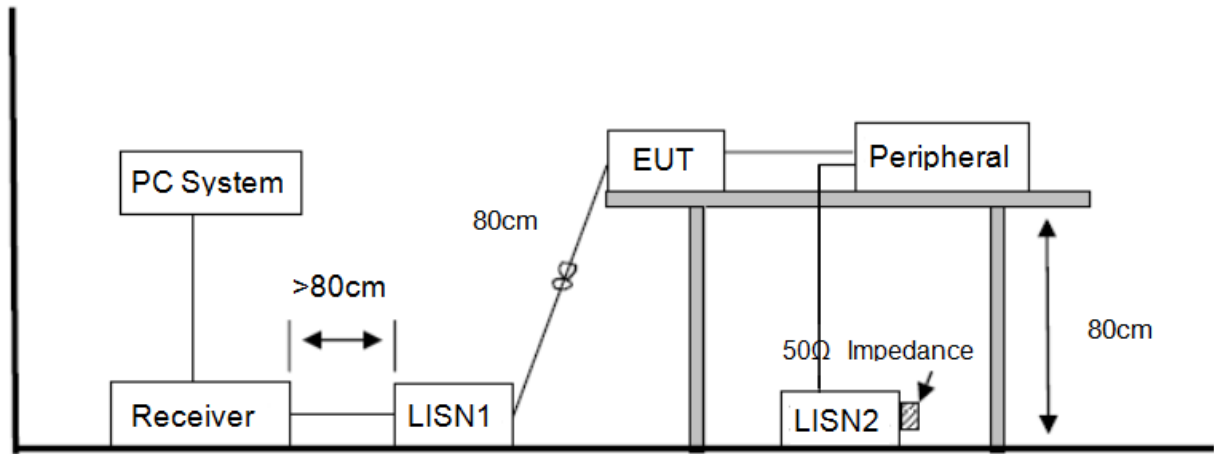

13.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

13.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

13.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21061513-2E
FLIP6C\FCC-CE.EM6

Test Date : 2021-07-20

Tested By : Kennys Zhang

EUT : Portable Bluetooth Speaker

Model Number : FLIP6C


Power Supply : AC 120V/60Hz

Test Mode : TX Mode

Condition : TEMP:24.8°C, RH:53.8%, BP:101.4kPa

LISN : 2020 ENV 216 1#/NEUTRAL

Memo :

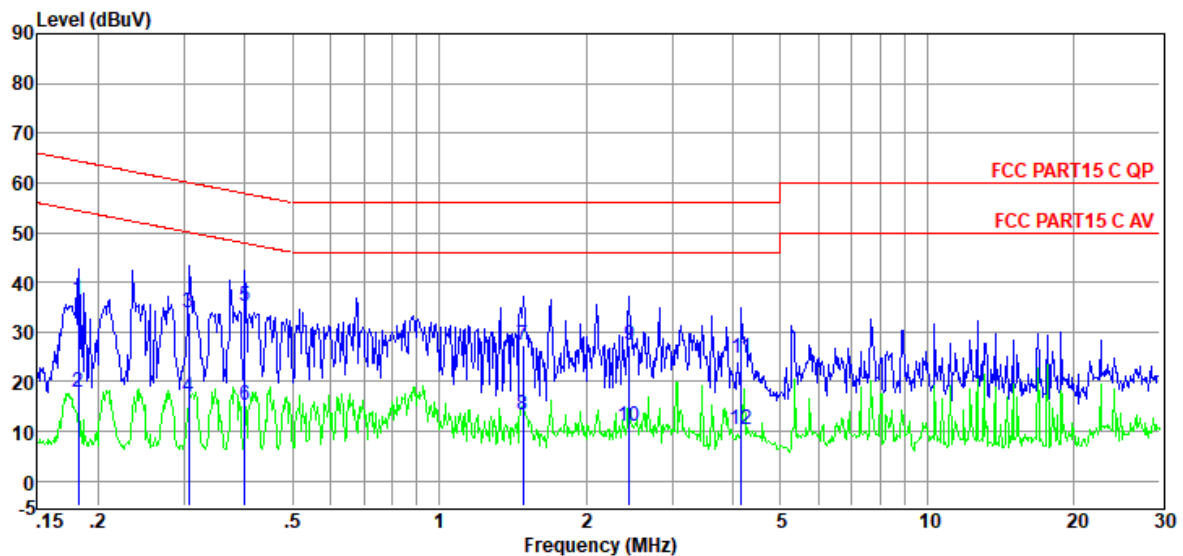

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Detector	Phase
1	0.18	17.12	9.37	0.02	9.86	36.37	64.37	-28.00	QP	NEUTRAL
2	0.18	-1.39	9.37	0.02	9.86	17.86	54.37	-36.51	Average	NEUTRAL
3	0.31	14.74	9.38	0.02	9.86	34.00	60.06	-26.06	QP	NEUTRAL
4	0.31	-2.46	9.38	0.02	9.86	16.80	50.06	-33.26	Average	NEUTRAL
5	0.40	15.90	9.39	0.02	9.86	35.17	57.86	-22.69	QP	NEUTRAL
6	0.40	-4.04	9.39	0.02	9.86	15.23	47.86	-32.63	Average	NEUTRAL
7	1.49	7.93	9.40	0.04	9.86	27.23	56.00	-28.77	QP	NEUTRAL
8	1.49	-6.00	9.40	0.04	9.86	13.30	46.00	-32.70	Average	NEUTRAL
9	2.45	8.03	9.40	0.06	9.87	27.36	56.00	-28.64	QP	NEUTRAL
10	2.45	-8.20	9.40	0.06	9.87	11.13	46.00	-34.87	Average	NEUTRAL
11	4.16	5.28	9.44	0.07	9.87	24.66	56.00	-31.34	QP	NEUTRAL
12	4.16	-9.07	9.44	0.07	9.87	10.31	46.00	-35.69	Average	NEUTRAL


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2021-07-20
EUT : Portable Bluetooth Speaker
Power Supply : AC 120V/60Hz
Condition : TEMP:24.8°C, RH:53.8%, BP:101.4kPa
Memo :

D:\2021 CE report date\Q21061513-2E
FLIP6C\FCC-CE.EM6
Tested By : Kennys Zhang
Model Number : FLIP6C
Test Mode : TX Mode
LISN : 2020 ENV 216 1#/LINE

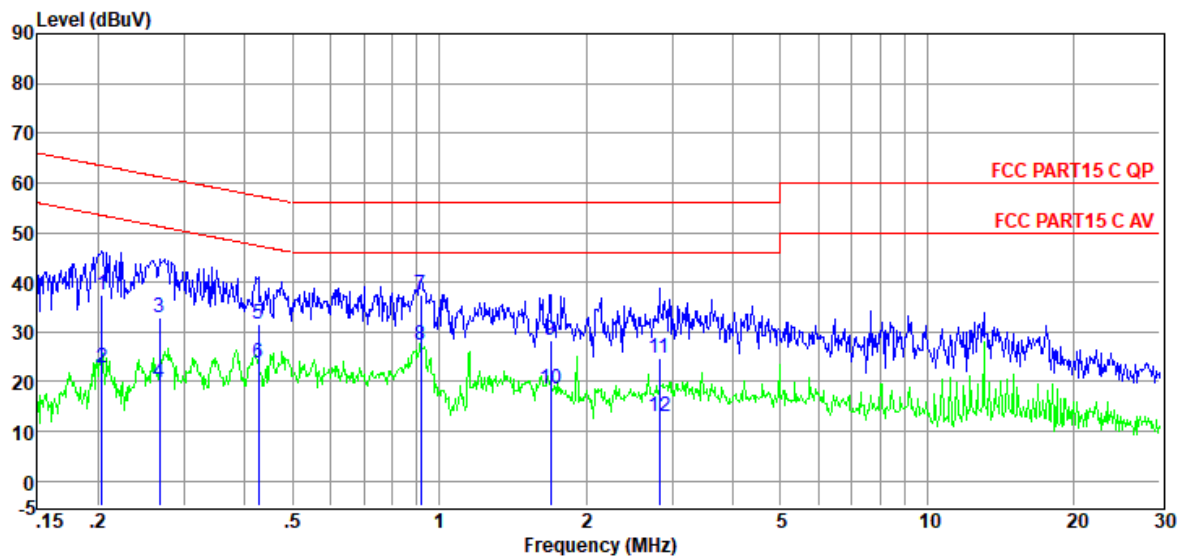

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.20	18.04	9.40	0.02	9.86	37.32	63.45	-26.13	QP	LINE
2	0.20	3.55	9.40	0.02	9.86	22.83	53.45	-30.62	Average	LINE
3	0.27	13.44	9.41	0.02	9.86	32.73	61.20	-28.47	QP	LINE
4	0.27	0.57	9.41	0.02	9.86	19.86	51.20	-31.34	Average	LINE
5	0.43	12.38	9.41	0.02	9.86	31.67	57.33	-25.66	QP	LINE
6	0.43	4.48	9.41	0.02	9.86	23.77	47.33	-23.56	Average	LINE
7	0.92	18.07	9.42	0.03	9.86	37.38	56.00	-18.62	QP	LINE
8	0.92	8.00	9.42	0.03	9.86	27.31	46.00	-18.69	Average	LINE
9	1.69	8.90	9.42	0.05	9.86	28.23	56.00	-27.77	QP	LINE
10	1.69	-0.78	9.42	0.05	9.86	18.55	46.00	-27.45	Average	LINE
11	2.82	5.46	9.44	0.06	9.87	24.83	56.00	-31.17	QP	LINE
12	2.82	-6.38	9.44	0.06	9.87	12.99	46.00	-33.01	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

14. Antenna Requirements

14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Result

The product is FPCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.36 dBi..