



## **FCC 47 CFR PART 15 SUBPART C**

### **TEST REPORT**

**For**

**Terminal**

**Model: 9500**

**Trade Name: CipherLAB**

*Issued to*

**Cipherlab Co., Ltd.**  
**12F, 333 Dunhua S. Rd., Sec. 2 Taipei,**  
**Taiwan 106, Taiwan R.O.C.**

*Issued by*



**Compliance Certification Services Inc.**  
**No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,**  
**Taoyuan Hsien, (338) Taiwan, R.O.C.**  
**<http://www.ccsemc.com.tw>**  
**[service@tw.ccsemc.com](mailto:service@tw.ccsemc.com)**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE .....	5
3.3 GENERAL TEST PROCEDURES .....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	6
3.5 DESCRIPTION OF TEST MODES .....	6
<b>INSTRUMENT CALIBRATION .....</b>	<b>7</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	7
4.2 MEASUREMENT EQUIPMENT USED .....	7
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
5.1 FACILITIES .....	8
5.2 EQUIPMENT .....	8
5.3 TABLE OF ACCREDITATIONS AND LISTINGS .....	9
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
6.1 SETUP CONFIGURATION OF EUT .....	10
6.2 SUPPORT EQUIPMENT .....	10
<b>7. FCC PART 15.247 REQUIREMENTS .....</b>	<b>11</b>
<b>CONDITION A: WLAN OPERATION .....</b>	<b>11</b>
7.1 6DB BANDWIDTH .....	11
7.2 PEAK POWER .....	14
7.3 AVERAGE POWER .....	17
7.4 BAND EDGES MEASUREMENT .....	20
7.5 PEAK POWER SPECTRAL DENSITY .....	25
7.6 SPURIOUS EMISSIONS .....	28
<b>CONDITION B: BLUETOOTH OPERATION .....</b>	<b>38</b>
7.7 PEAK POWER .....	38
7.8 AVERAGE POWER .....	39
7.9 BAND EDGES MEASUREMENT .....	40
7.10 PEAK POWER SPECTRAL DENSITY .....	45
7.11 FREQUENCY SEPARATION .....	48
7.12 NUMBER OF HOPPING FREQUENCY .....	50
7.13 TIME OF OCCUPANCY (DWELL TIME) .....	52
7.14 SPURIOUS EMISSIONS .....	59
<b>CONDITION C: WLAN+BLUETOOTH OPERATION .....</b>	<b>66</b>
7.15 POWER LINE CONDUCTED EMISSIONS .....	66
<b>APPENDIX I RADIO FREQUENCY EXPOSURE .....</b>	<b>69</b>
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>71</b>



## 1. TEST RESULT CERTIFICATION

**Applicant:** CIPHERLAB Co., Ltd.  
12F, 333 Dunhua S. Rd., Sec. 2 Taipei,  
Taiwan 106, Taiwan R.O.C.

**Equipment Under Test:** Terminal

**Trade Name:** CIPHERLAB

**Model Number:** 9500

**Date of Test:** May 24 ~ June 8, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

---

Gavin Lim  
Section Manager  
Compliance Certification Services Inc.

---

Amanda Wu  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Terminal
<b>Trade Name</b>	CipherLAB
<b>Model Number</b>	9500
<b>Model Name Discrepancy</b>	N/A
<b>Power Supply</b>	LEADER ELECTRONICS INC. / NU40-2060330-I3 I/P: 100-240V, 1.2A, 50-60Hz O/P: 6.0V, 3.3A
<b>Frequency Range</b>	WLAN (IEEE 802.11b): 2412 ~ 2462 MHz Bluetooth: 2402 ~ 2480 MHz
<b>Transmit Power</b>	WLAN (IEEE 802.11b): 20.37 dBm Bluetooth: 3.72 dBm
<b>Modulation Technique</b>	WLAN (IEEE 802.11b): DSSS (CCK, DQPSK, DBPSK) Bluetooth: GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps; 8DPSK for 3Mbps
<b>Number of Channels</b>	WLAN (IEEE 802.11b): 11 Channels Bluetooth: 79 Channels
<b>Antenna Specification</b>	Multilayer Chip Antenna / Gain: 3.0 dBi

**Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Q3N-9500** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(2)
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: 9500) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Condition A (WLAN operation): Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for the final testing.

Condition B (Bluetooth operation): Channel Low (2402MHz), Channel Mid (2441MHz) and Channel High (2480MHz) with 1Mbps data rate was chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z mode), lie-down position (X, Y mode) and docking mode. The worst emission was found in docking mode for powerline conducted emissions, Z mode for radiation emissions and the worst case was recorded.



## INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

**Remark:** Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/18/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	07/25/2006
Test Receiver	Rohde&Schwarz	ESCI	100064	11/05/2006
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Horn-Antenna	TRC	HA-0502	06	06/02/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/04/2006
Horn-Antenna	TRC	HA-1301A	01	07/04/2006
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/26/2008
Test S/W	LABVIEW (V 6.1)			

**Remark:** The measurement uncertainty is less than  $\pm 2.0065\text{dB}$  (30MHz ~ 1GHz),  $\pm 3.0958\text{dB}$  (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/27/2006
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/12/2006
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/20/2007
Test S/W	LABVIEW (V 6.1)			

**Remark:** The measurement uncertainty is less than  $\pm 2.81\text{dB}$ , which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.







Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	<b>VCCI</b> R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	2672(X31)	99PBTkB	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**Remark:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 7. FCC PART 15.247 REQUIREMENTS


### CONDITION A: WLAN OPERATION

#### 7.16dB BANDWIDTH

##### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

##### Test Configuration

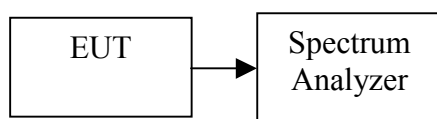

##### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

##### TEST RESULTS

*No non-compliance noted*

##### Test Data


###### IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	10750	>500	PASS
Mid	2437	9250		PASS
High	2462	9420		PASS




## Test Plot

### 6dB Bandwidth (IEEE 802.11b / CH Low)

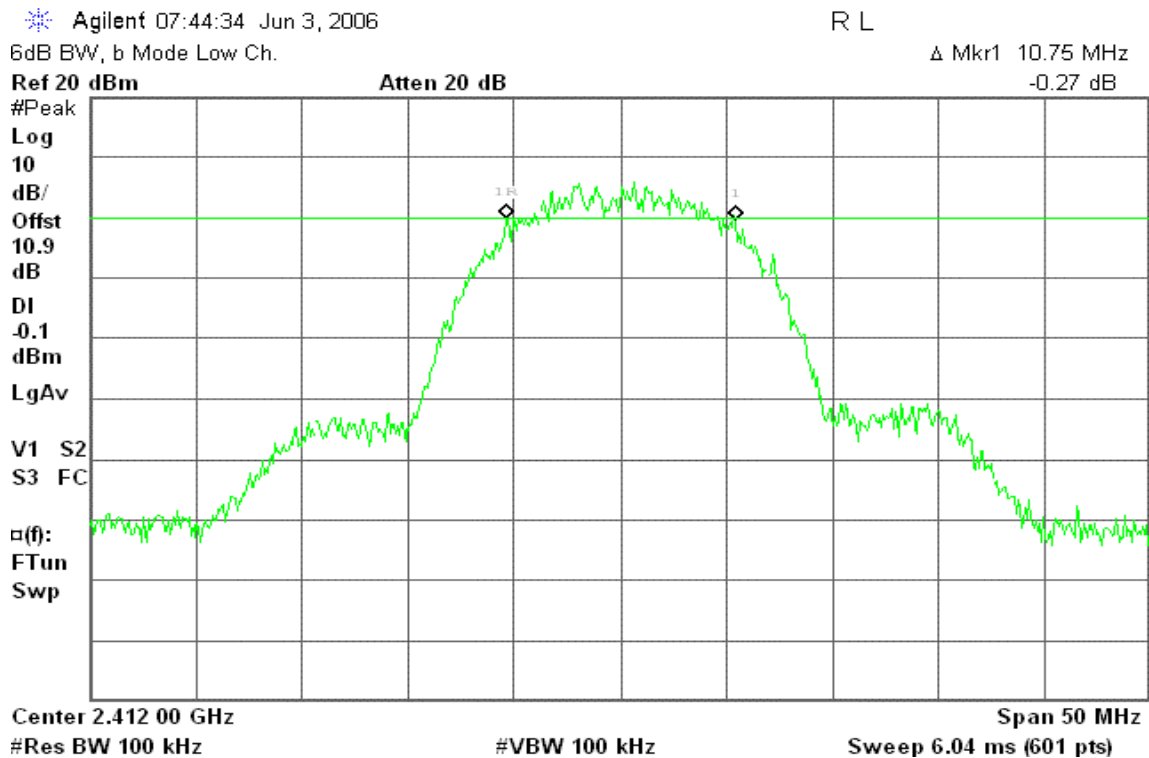

### 6dB Bandwidth (IEEE 802.11b / CH Mid)

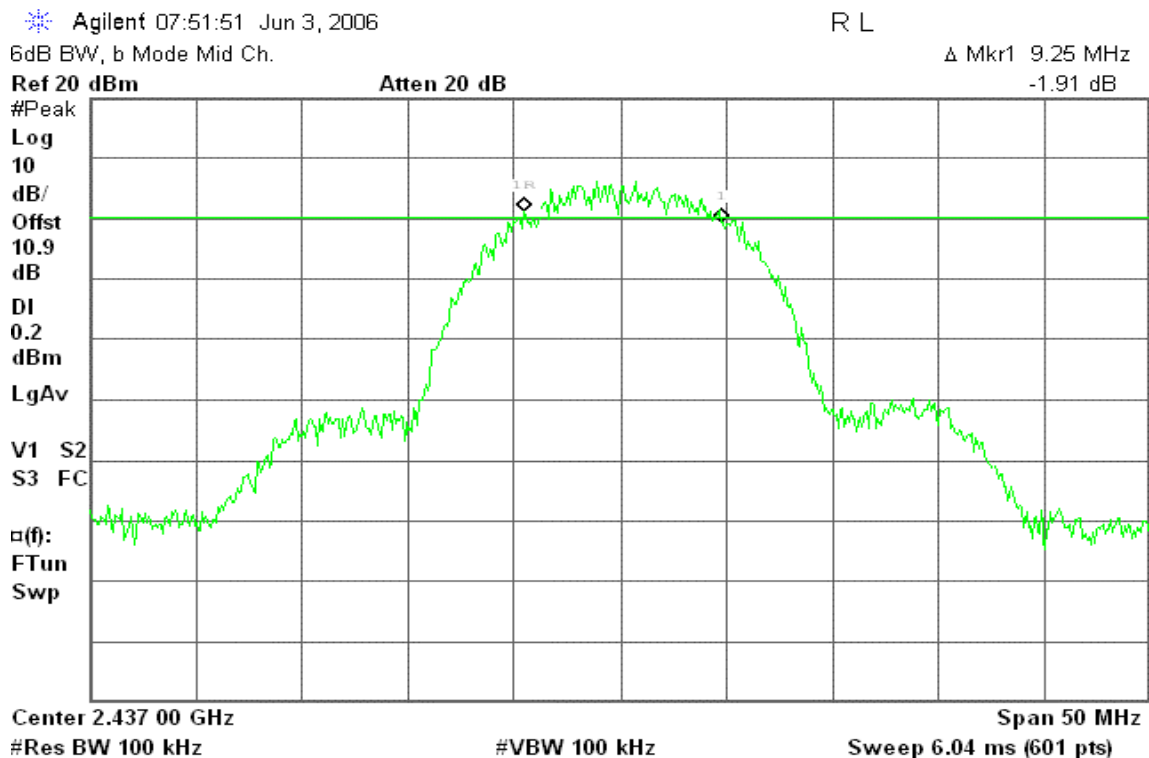



## 6dB Bandwidth (IEEE 802.11b / CH High)

Agilent 07:57:28 Jun 3, 2006

R L

6dB BW, b Mode High Ch.

$\Delta$  Mkr1 9.42 MHz

Ref 20 dBm

Atten 20 dB

0.26 dB

#Peak

Log

10

dB/

Offst

10.9

dB

DI

0.5

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$ :

FTun

Swp

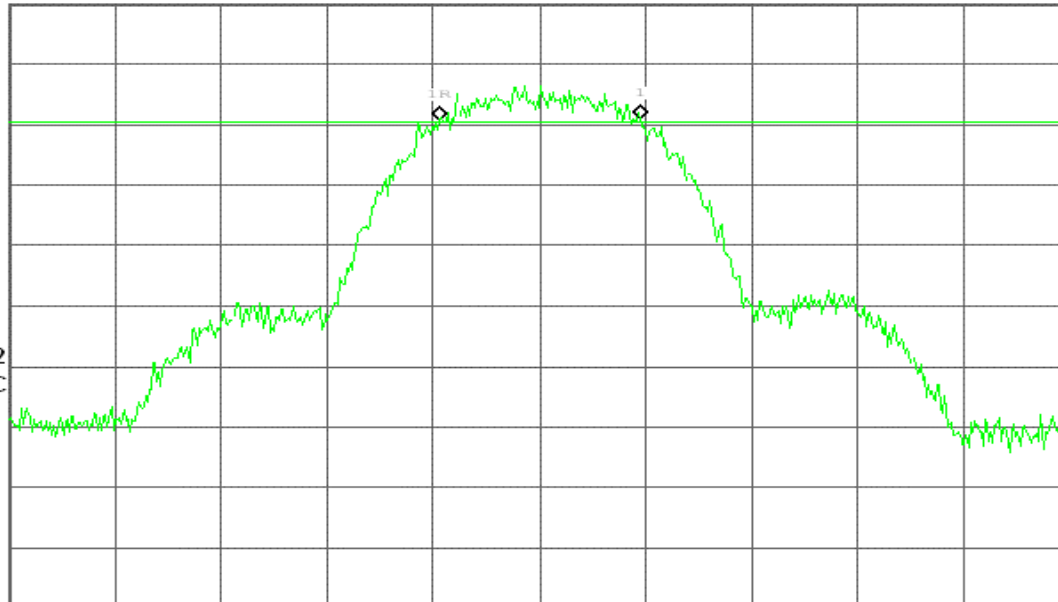

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration

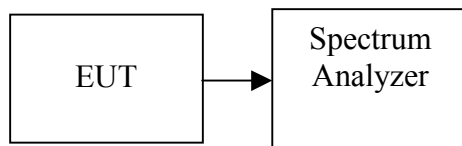

### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

##### IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	19.56	0.0904	1	PASS
Mid	2437	19.85	0.0966		PASS
High	2462	20.37	0.1089		PASS



## Test Plot

### Peak Power (IEEE 802.11b / CH Low)


Agilent 07:45:22 Jun 3, 2006

R L

Peak Output Power, b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

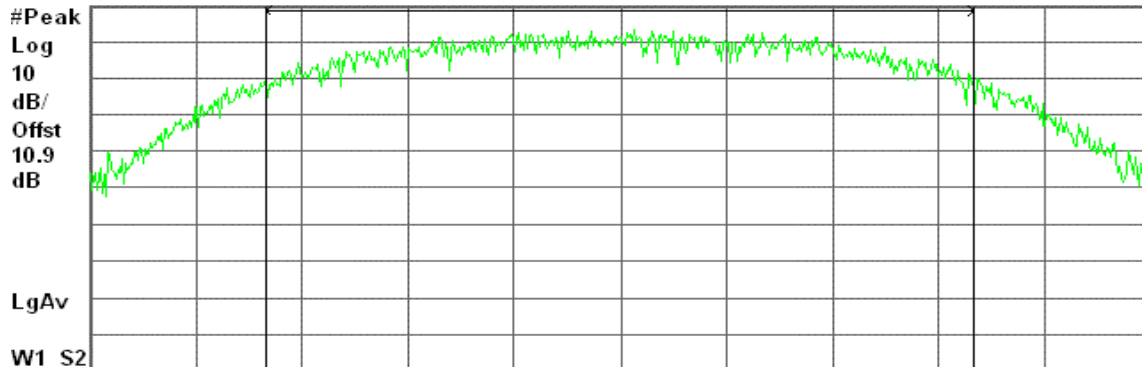

Channel Power

Power Spectral Density

19.56 dBm / 13.6760 MHz

-51.80 dBm/Hz

### Peak Power (IEEE 802.11b / CH Mid)


Agilent 07:52:30 Jun 3, 2006

R L

Peak Output Power, b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

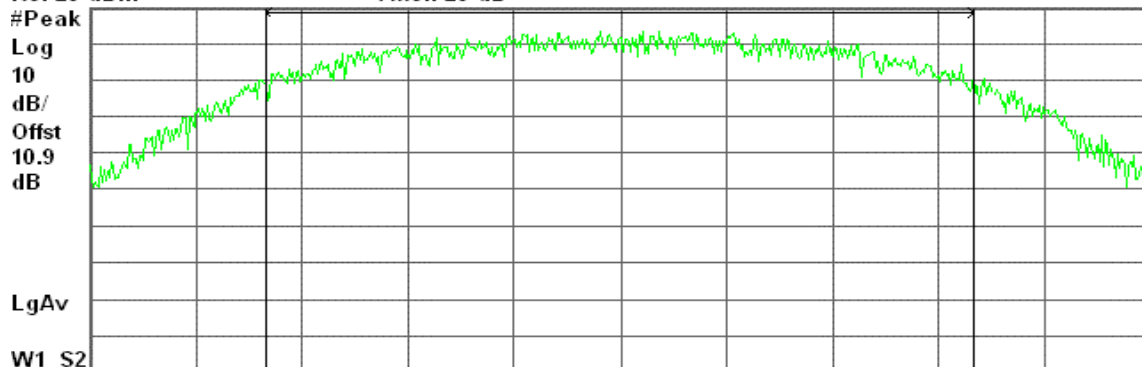

Channel Power

Power Spectral Density

19.85 dBm / 13.7570 MHz

-51.54 dBm/Hz



## Peak Power (IEEE 802.11b / CH High)


Agilent 07:58:22 Jun 3, 2006

R L

Peak Output Power, b Mode High Ch.

Ref 20 dBm

Atten 20 dB

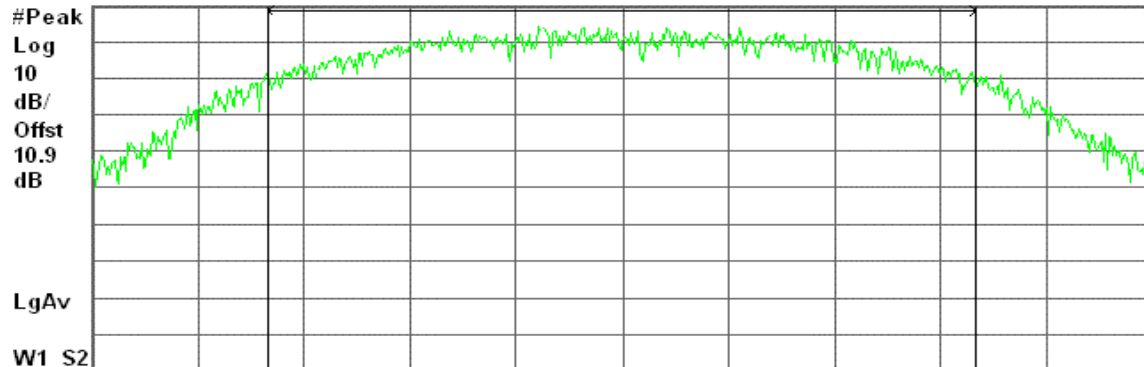

Center 2.462 00 GHz

Span 20.74 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

20.37 dBm / 13.8280 MHz

-51.04 dBm/Hz






## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration

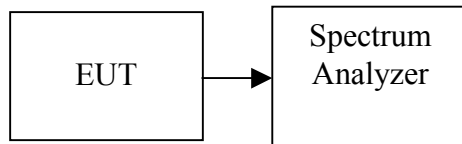

### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

### TEST RESULTS

*No non-compliance noted.*

#### Test Data


#### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.58	0.0455
Mid	2437	16.98	0.0499
High	2462	17.22	0.0527




## Test Plot

### Average Power (IEEE 802.11b / CH Low)

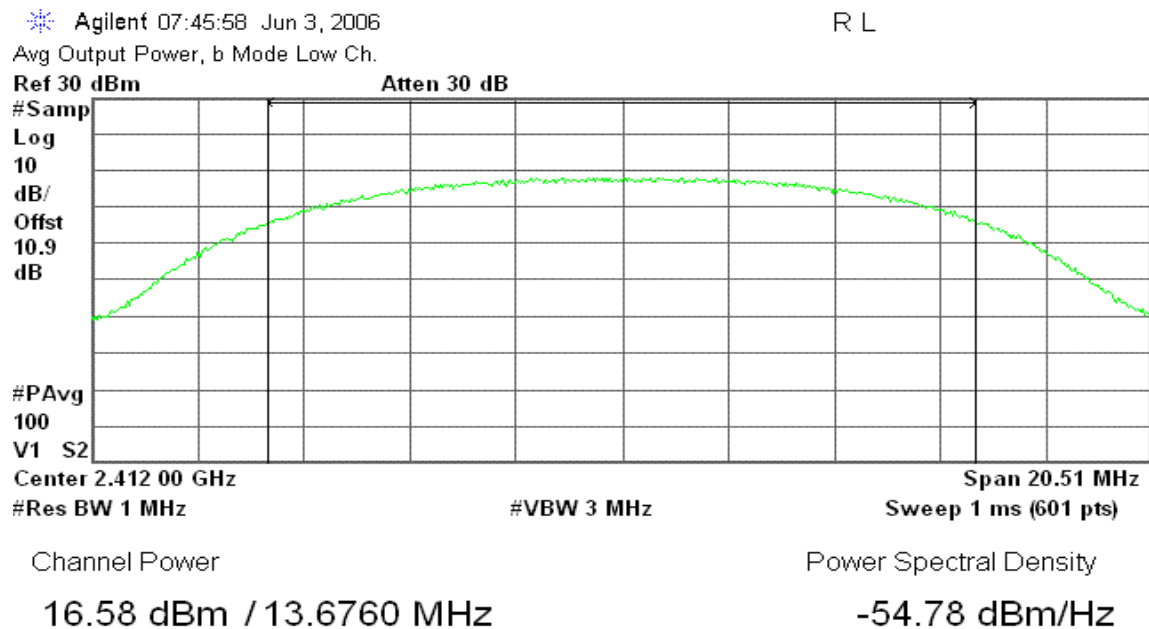

### Average Power (IEEE 802.11b / CH Mid)

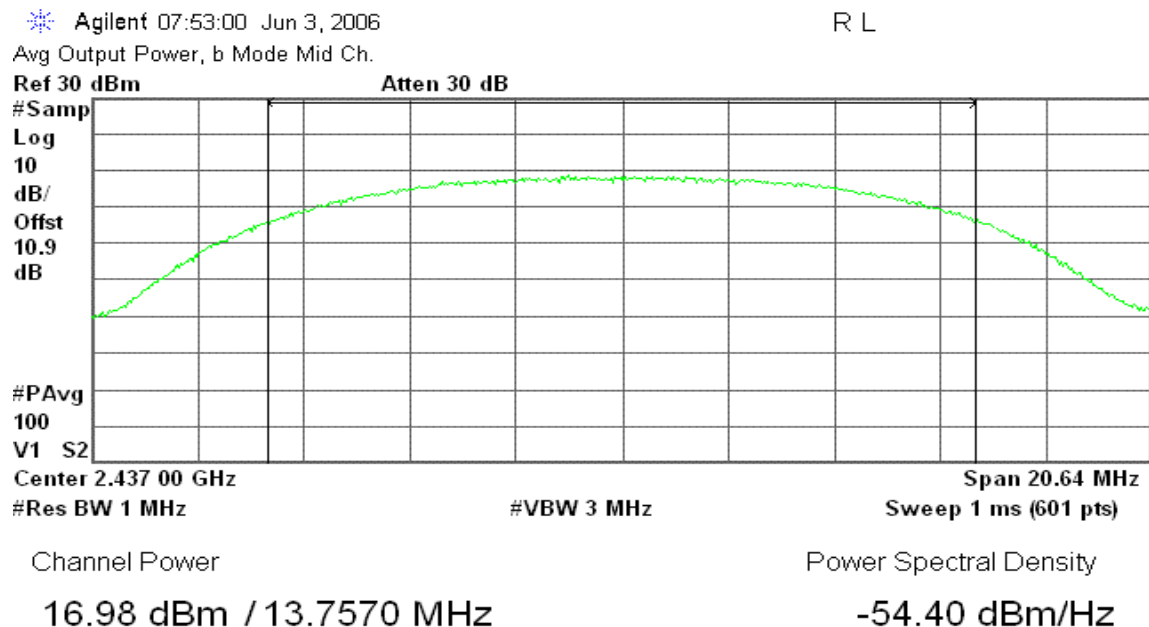



## Average Power (IEEE 802.11b / CH High)


Agilent 07:58:52 Jun 3, 2006

R L

Avg Output Power, b Mode High Ch.

Ref 30 dBm

Atten 30 dB

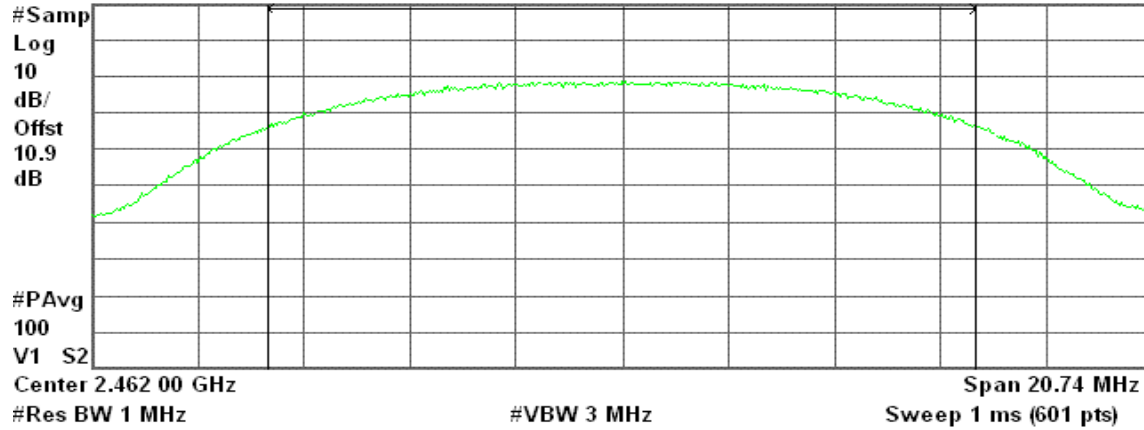

Channel Power

17.22 dBm / 13.8280 MHz

Power Spectral Density


-54.19 dBm/Hz

## 7.4BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

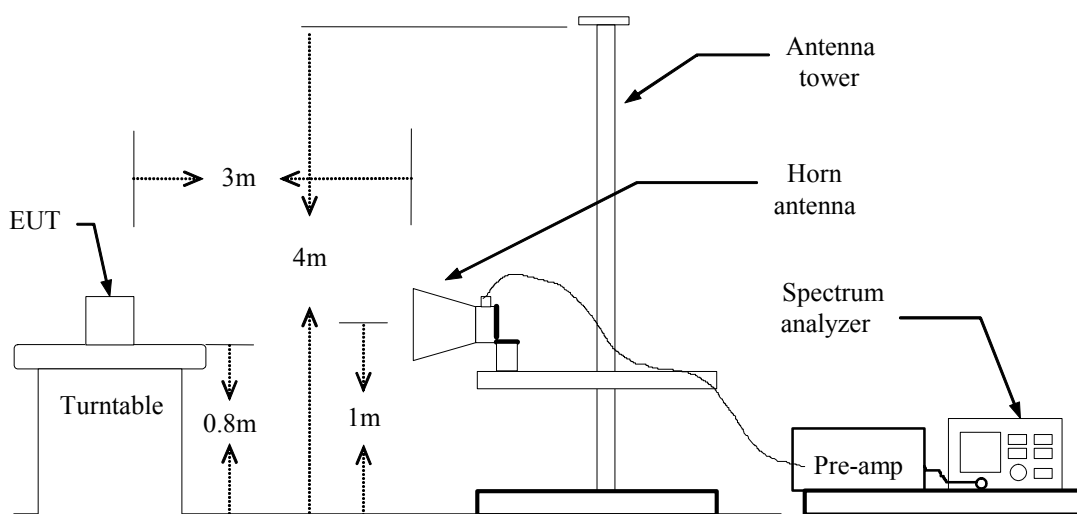

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.




## Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:49:33 May 27, 2006

T

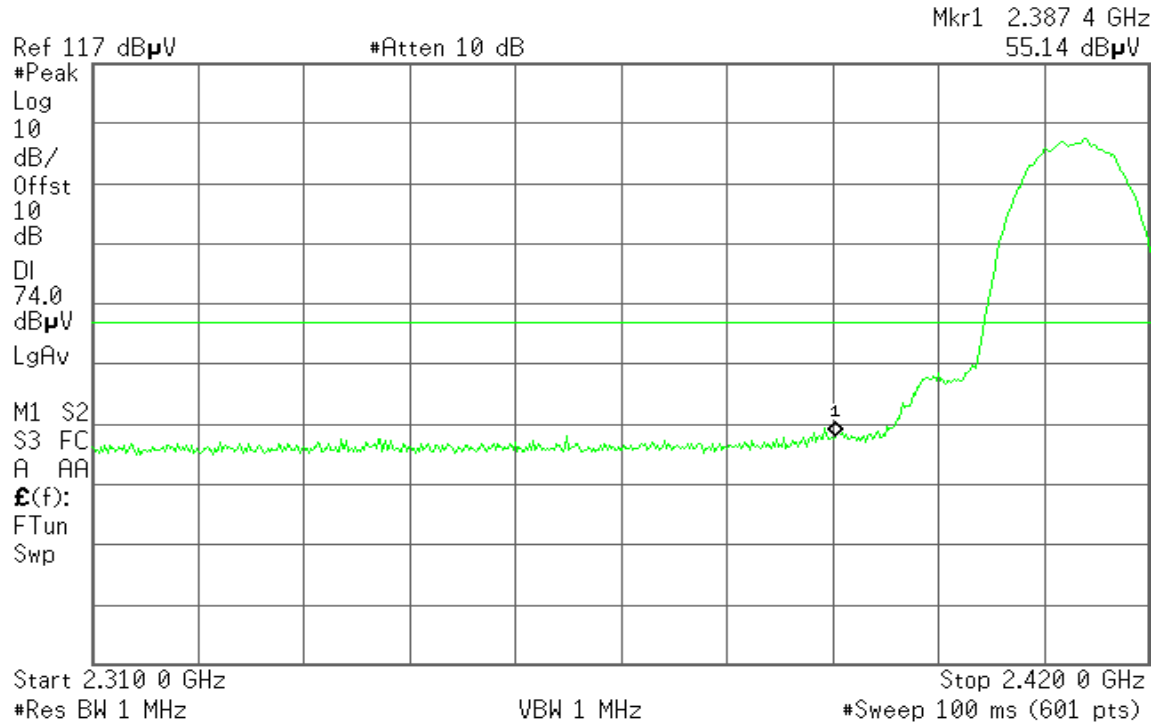


Detector mode: Average

Polarity: Vertical

Agilent 11:49:03 May 27, 2006

T

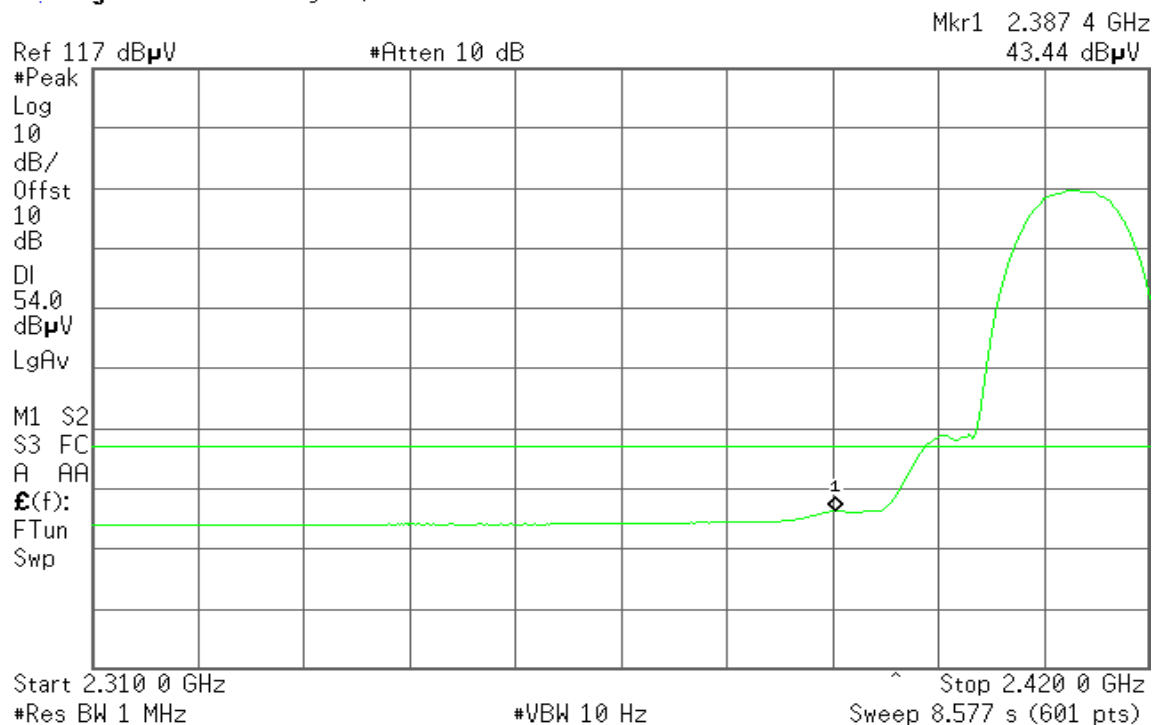




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 11:47:37 May 27, 2006

T

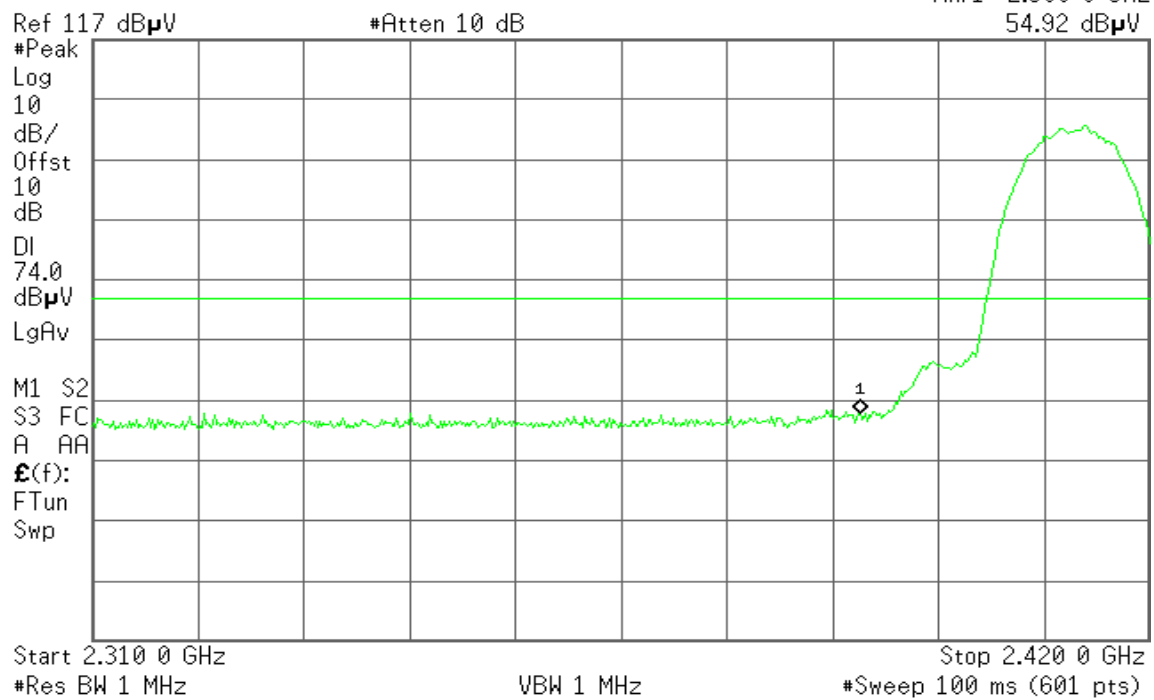


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 11:46:36 May 27, 2006

R L

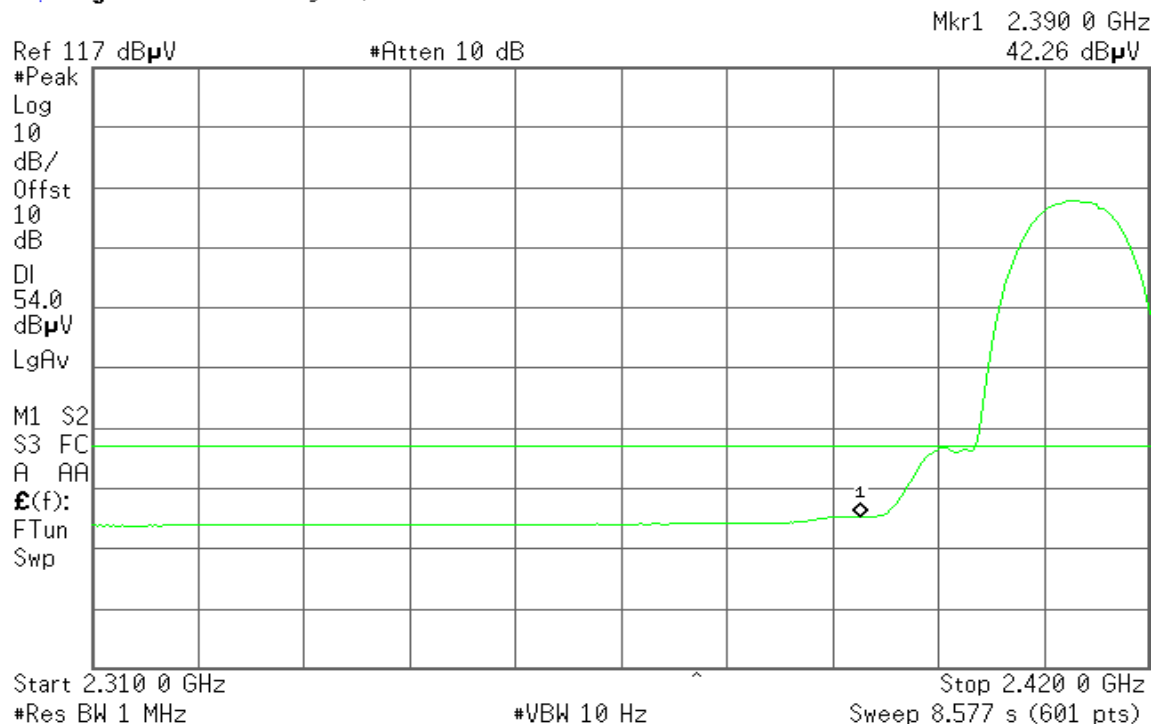



## Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:53:15 May 27, 2006

T

Mkr1 2.487 75 GHz  
59.09 dB $\mu$ V

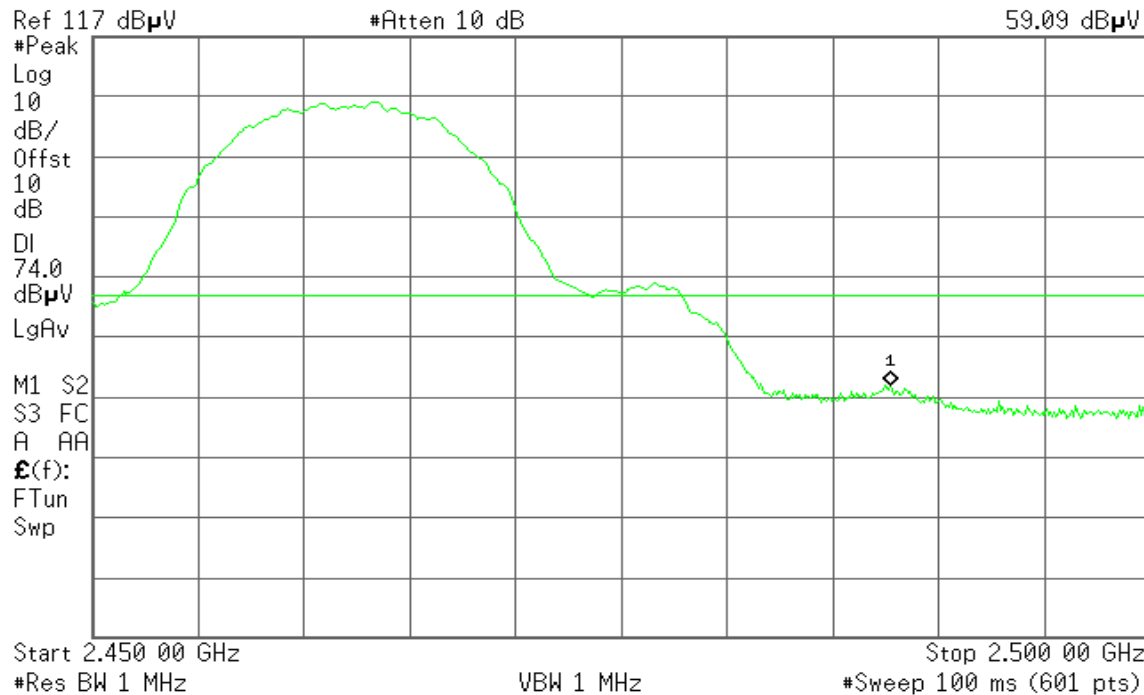


Detector mode: Average

Polarity: Vertical

Agilent 11:52:14 May 27, 2006

T

Mkr1 2.483 50 GHz  
45.35 dB $\mu$ V

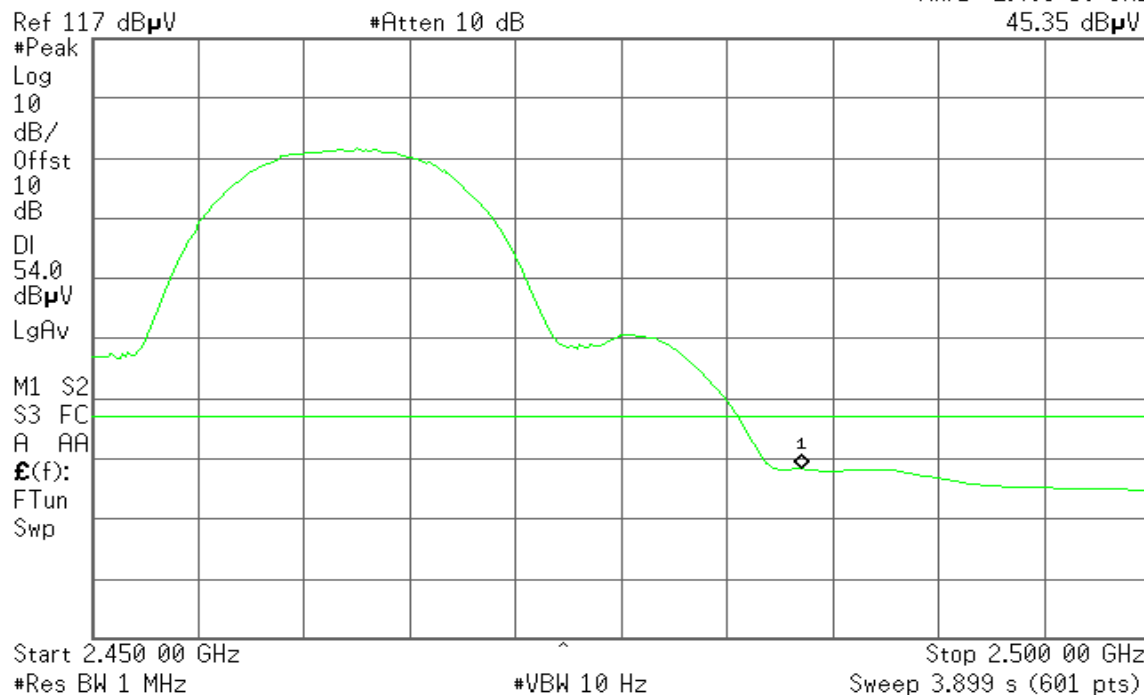



**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 11:54:42 May 27, 2006

T

Mkr1 2.488 00 GHz  
57.84 dB $\mu$ V

Ref 117 dB $\mu$ V

#Atten 10 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB $\mu$ V

LgAv

M1 S2

S3 FC

A AA

$\mathcal{E}(f)$ :

FTun

Swp

Start 2.450 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

**Detector mode: Average**

**Polarity: Horizontal**

Agilent 11:54:18 May 27, 2006

T

Mkr1 2.486 92 GHz  
46.35 dB $\mu$ V

Ref 117 dB $\mu$ V

#Atten 10 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB $\mu$ V

LgAv

M1 S2

S3 FC

A AA

$\mathcal{E}(f)$ :

FTun

Swp

Start 2.450 00 GHz

#Res BW 1 MHz

VBW 10 Hz

Stop 2.500 00 GHz

Sweep 3.899 s (601 pts)






## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration

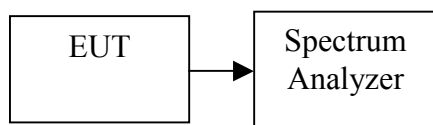

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted*

### Test Data


#### IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-5.09	8.00	PASS
Mid	2437	-4.66		PASS
High	2462	-0.03		PASS




## Test Plot

### PPSD (IEEE 802.11b / CH Low)

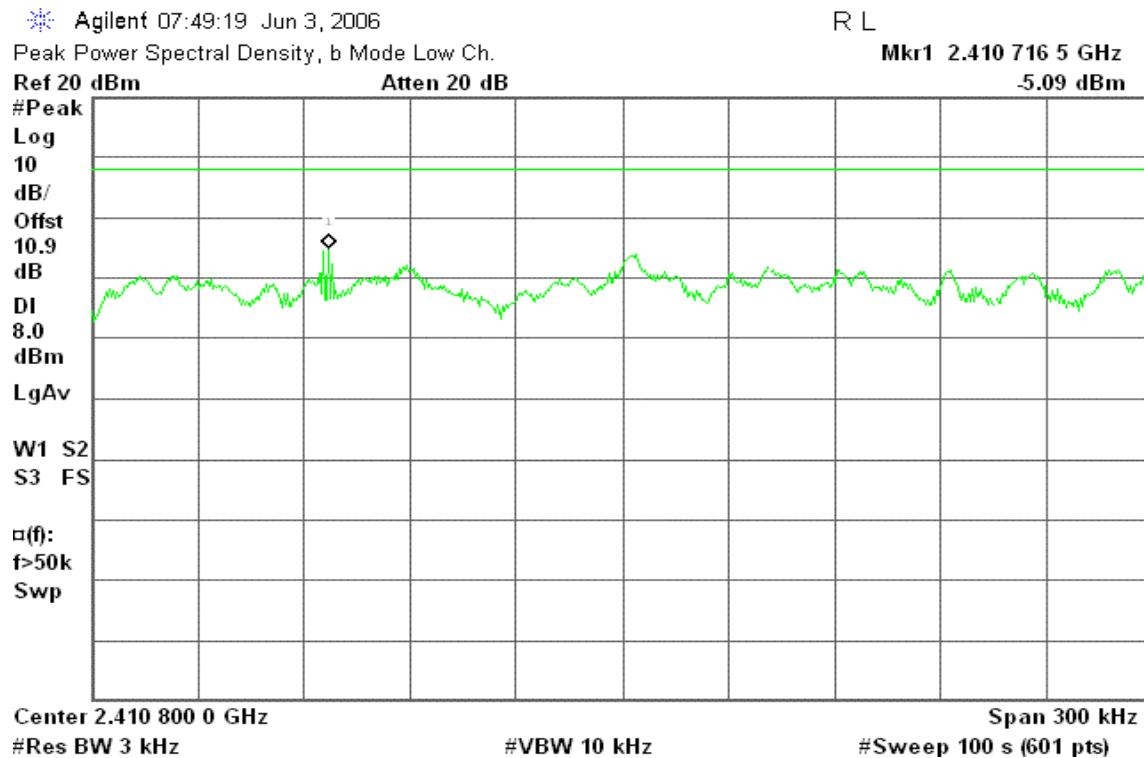

### PPSD (IEEE 802.11b / CH Mid)

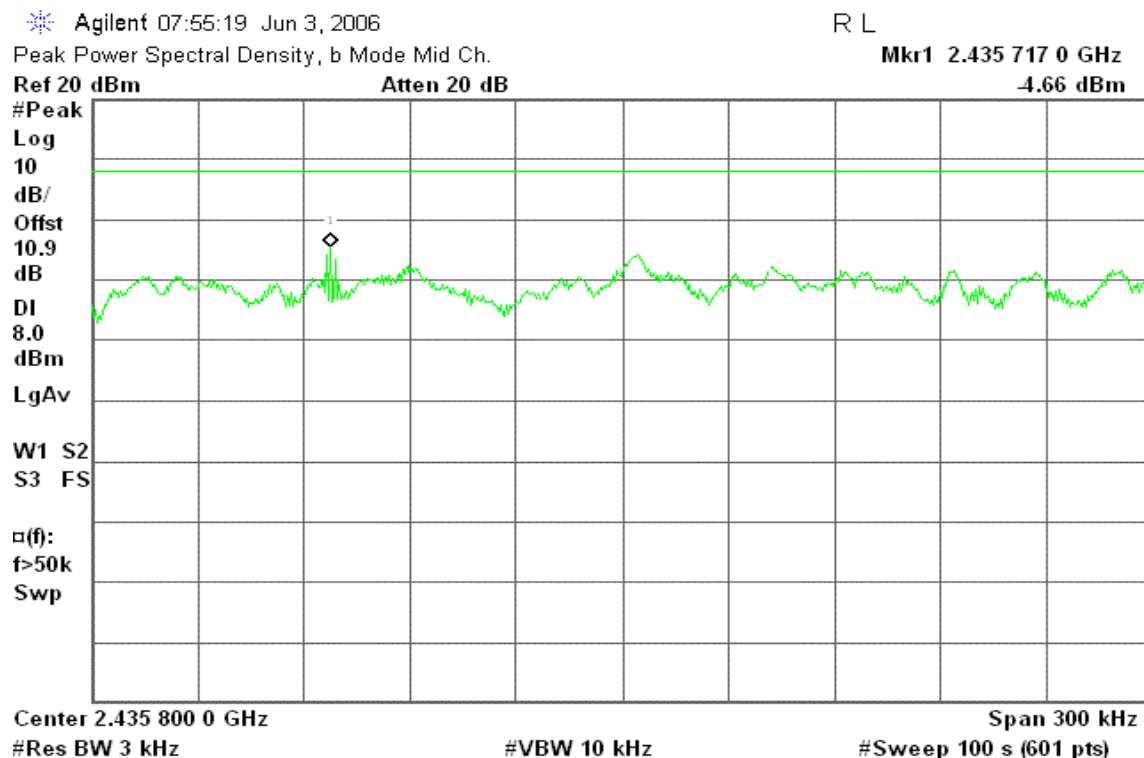



## PPSD (IEEE 802.11b / CH High)

Agilent 08:01:14 Jun 3, 2006

R L


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.456 505 9 GHz

Ref 20 dBm

Atten 20 dB

-0.03 dBm

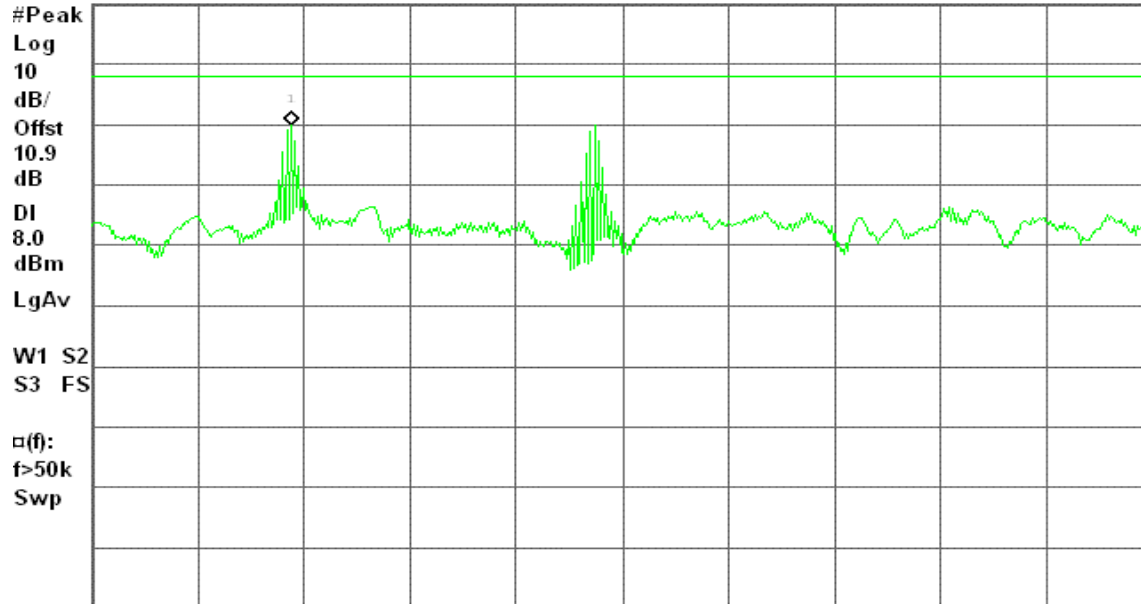

Center 2.456 600 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration

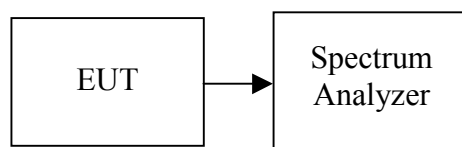

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted.*



## Test Plot

### IEEE 802.11b / CH Low

Agilent 07:50:19 Jun 3, 2006

L


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

5.10 dBm

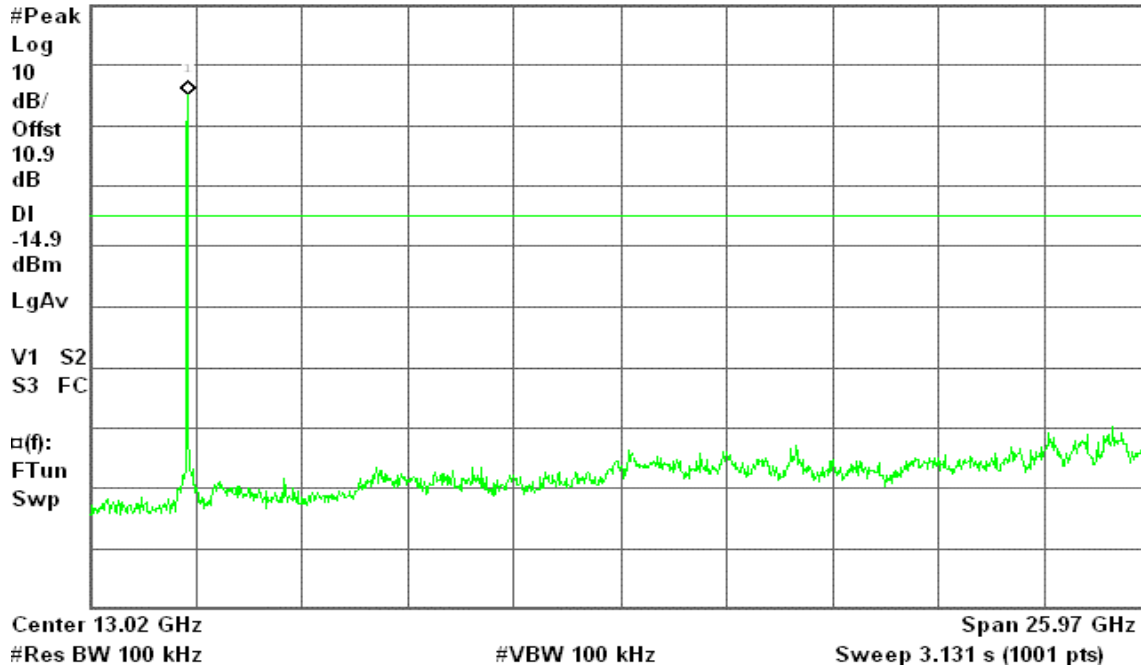

### IEEE 802.11b / CH Mid

Agilent 07:56:03 Jun 3, 2006

L


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

5.42 dBm

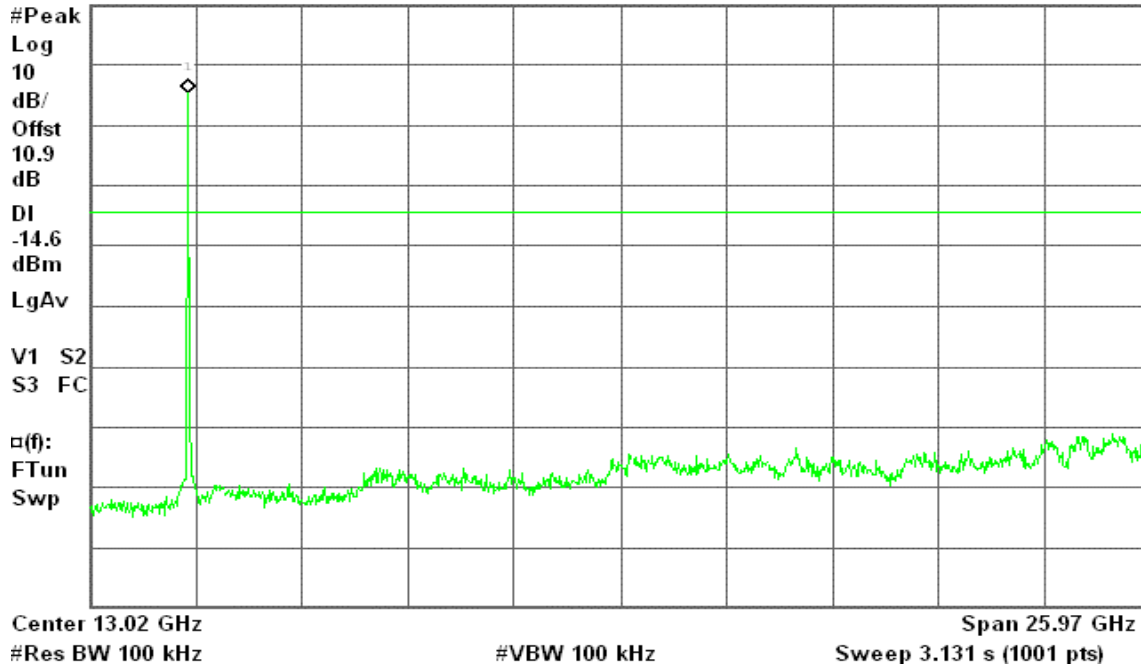



## IEEE 802.11b / CH High

Agilent 08:02:08 Jun 3, 2006

L

Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

6.10 dBm

#Peak

Log

10

dB/

Offst

10.9

dB

DI

-13.9

dBm

LgAv

V1 S2

S3 FC

α(f):

FTun

Swp

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



## 7.6.2 Radiated Emissions

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## Test Configuration

### **Below 1 GHz**

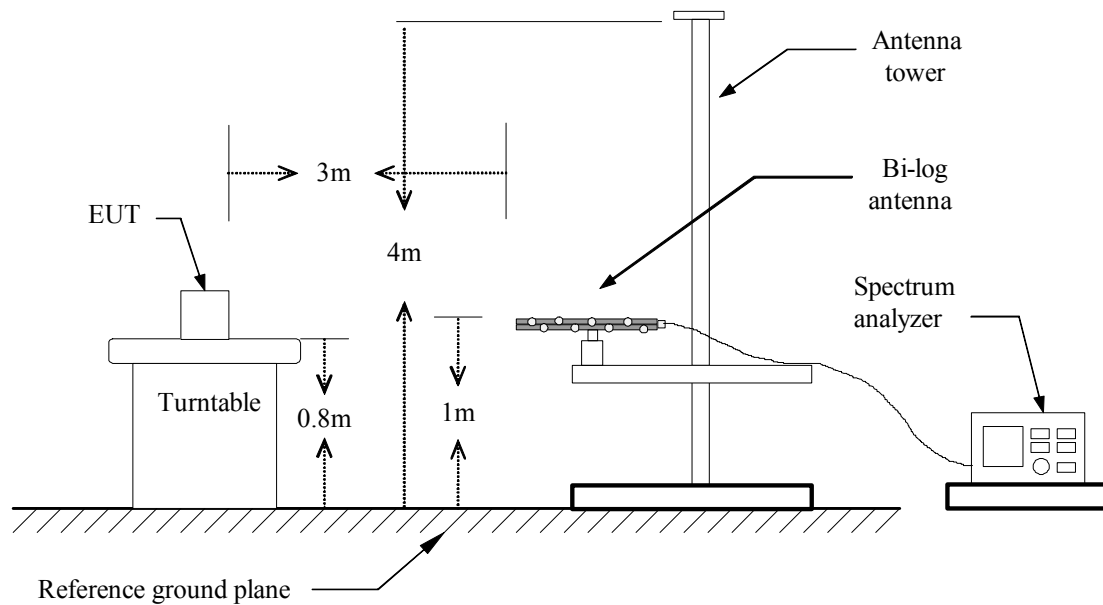

### **Above 1 GHz**

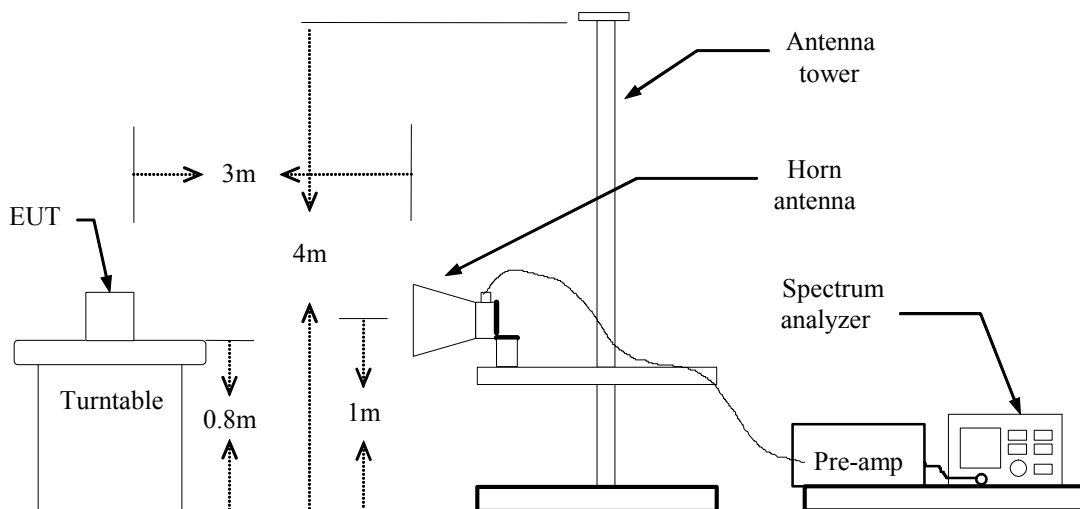





## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



## TEST RESULTS

### Below 1 GHz

**Operation Mode:** Normal Link**Test Date:** June 8, 2006**Temperature:** 22°C**Tested by:** Jason Chang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
41.32	V	QP	61.87	-27.35	34.52	40.00	-5.48
60.72	V	QP	69.14	-33.26	35.88	40.00	-4.12
175.50	V	QP	68.23	-28.37	39.86	43.50	-3.64
298.37	V	Peak	68.39	-26.39	41.99	46.00	-4.01
455.18	V	QP	64.99	-22.51	42.48	46.00	-3.52
665.35	V	Peak	58.56	-18.36	40.20	46.00	-5.80
60.72	H	Peak	68.37	-33.26	35.11	40.00	-4.89
135.08	H	QP	67.85	-27.06	40.79	43.50	-2.71
162.57	H	QP	66.76	-28.03	38.73	43.50	-4.77
298.37	H	QP	65.45	-26.39	39.06	46.00	-6.94
455.18	H	QP	58.56	-22.51	36.05	46.00	-9.95
665.35	H	QP	53.44	-18.36	35.08	46.00	-10.92

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**WLAN OPERATION****Above 1 GHz****Operation Mode:** IEEE 802.11b / TX / CH Low**Test Date:** May 27, 2006**Temperature:** 21°C**Tested by:** James Yu**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1276.67	V	53.17	---	-10.27	42.90	---	74.00	54.00	-11.10	Peak
4825.00	V	61.41	49.80	0.39	61.80	50.19	74.00	54.00	-3.81	AVG
N/A										
1276.67	H	52.70	---	-10.27	42.43	---	74.00	54.00	-11.57	Peak
4825.00	H	60.50	48.67	0.39	60.89	49.06	74.00	54.00	-4.94	AVG
9650.00	H	40.36	---	10.69	51.06	---	74.00	54.00	-2.94	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH Mid**Test Date:** May 27, 2006**Temperature:** 21°C**Tested by:** James Yu**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1246.67	V	53.35	---	-10.31	43.03	---	74.00	54.00	-10.97	Peak
4875.00	V	60.58	48.40	0.38	60.96	48.78	74.00	54.00	-5.22	AVG
N/A										
1300.00	H	53.40	---	-10.24	43.16	---	74.00	54.00	-10.84	Peak
4875.00	H	59.12	47.16	0.38	59.50	47.54	74.00	54.00	-6.46	AVG
9750.00	H	49.14	40.65	10.80	59.94	51.45	74.00	54.00	-2.55	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH High**Test Date:** May 27, 2006**Temperature:** 21°C**Tested by:** James Yu**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1280.00	V	53.26	---	-10.27	42.99	---	74.00	54.00	-11.01	Peak
4925.00	V	58.76	46.54	0.38	59.14	46.92	74.00	54.00	-7.08	AVG
9850.00	V	49.75	41.22	10.91	60.66	52.13	74.00	54.00	-1.87	AVG
N/A										
1280.00	H	52.89	---	-10.27	42.62	---	74.00	54.00	-11.38	Peak
4925.00	H	58.43	45.89	0.38	58.81	46.27	74.00	54.00	-7.73	AVG
9850.00	H	48.78	40.34	10.91	59.69	51.25	74.00	54.00	-2.75	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .



## CONDITION B: BLUETOOTH OPERATION


### 7.7 PEAK POWER

#### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Test Configuration

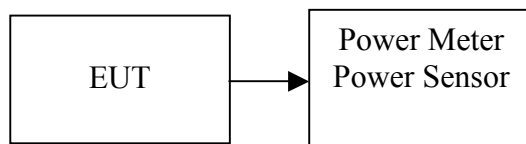

#### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-12.22	0.00006	1	PASS
Mid	2441	-11.53	0.00007		PASS
High	2480	3.72	0.0024		PASS




## 7.8 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration

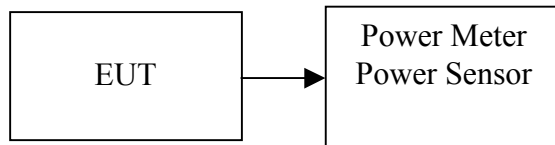

### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.

### TEST RESULTS

*No non-compliance noted.*

#### Test Data


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-12.40	0.00005
Mid	2441	-11.67	0.00007
High	2480	3.48	0.0022

## 7.9BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

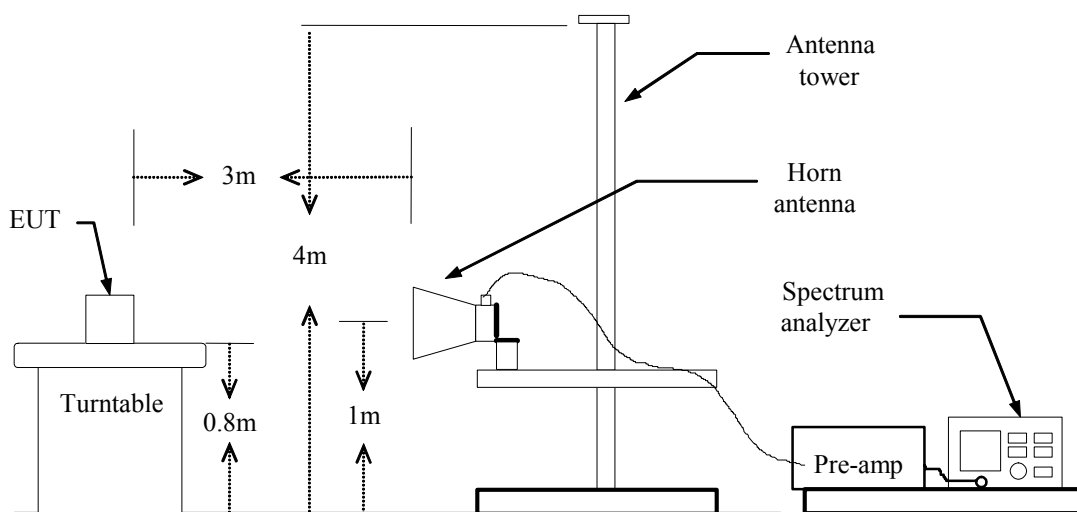

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (c) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (d) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS


Refer to attach spectrum analyzer data chart.



**Band Edges (Bluetooth mode / CH Low)****Detector mode: Peak****Polarity: Vertical**


\* Agilent 10:56:32 May 27, 2006

R T

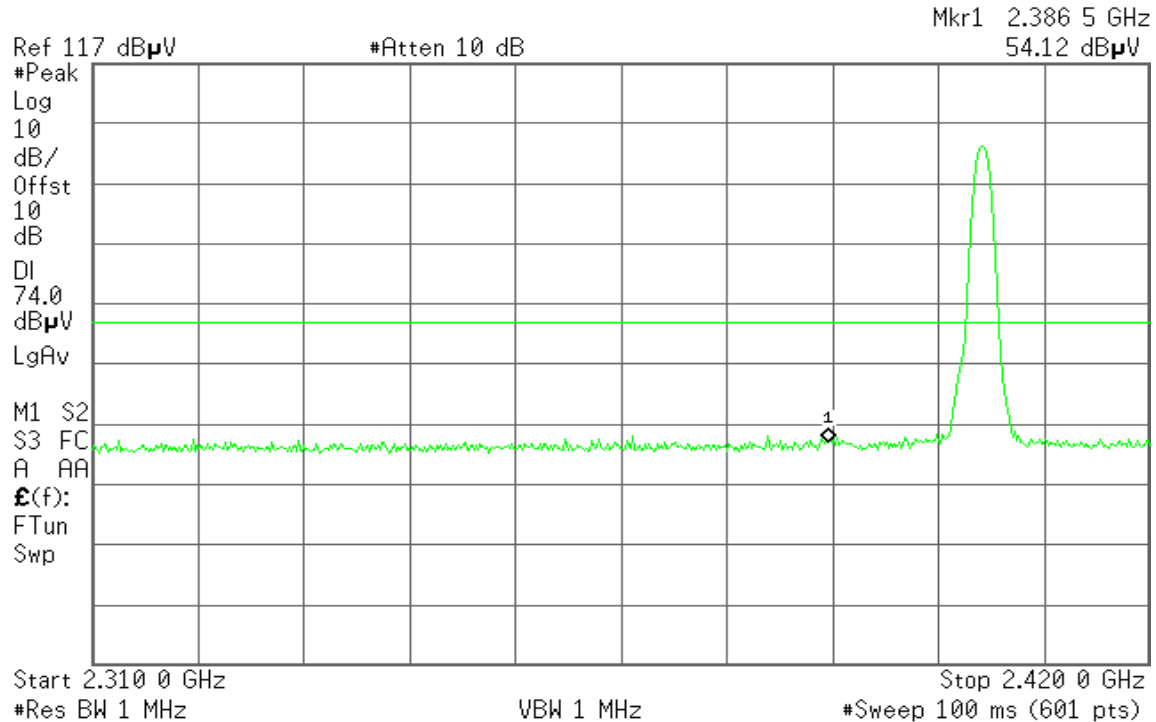**Detector mode: Average****Polarity: Vertical**

\* Agilent 10:54:39 May 27, 2006

T

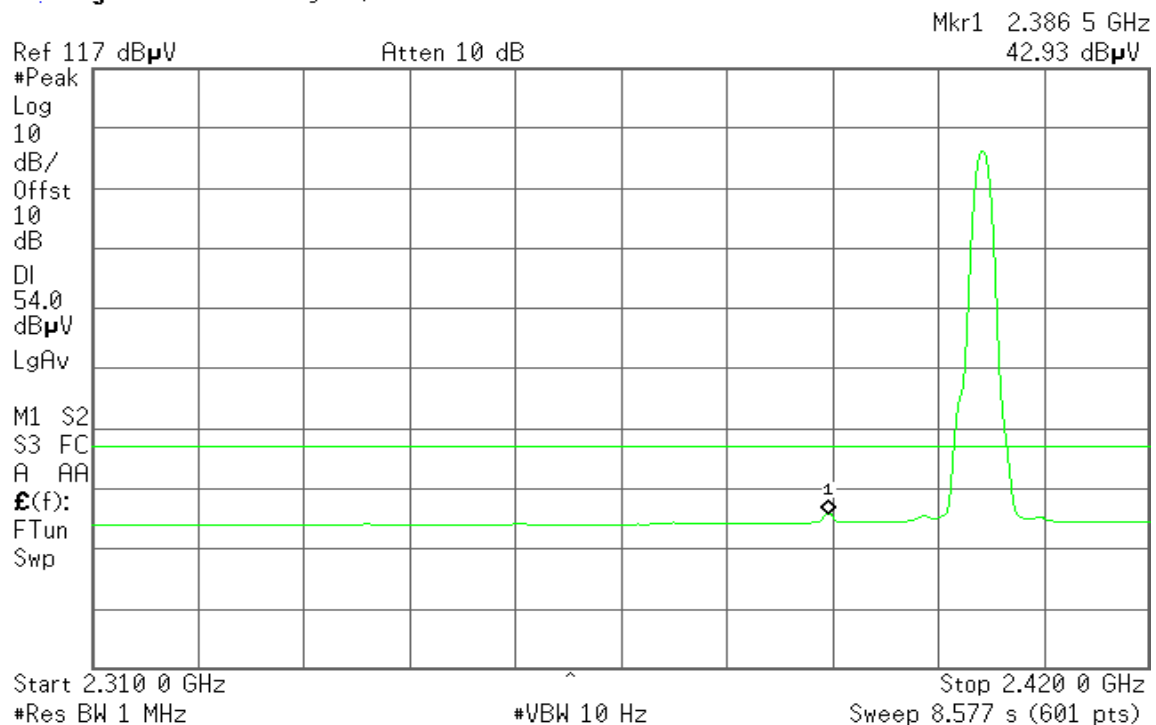




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 11:02:43 May 27, 2006

T

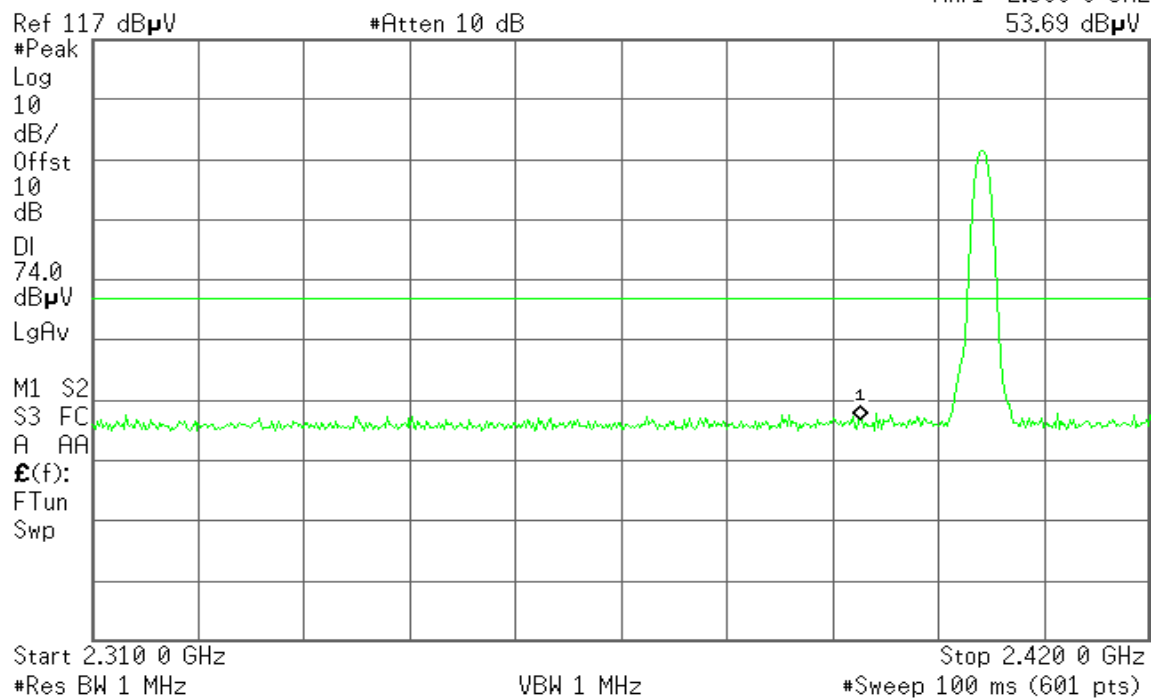


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 11:02:21 May 27, 2006


R T

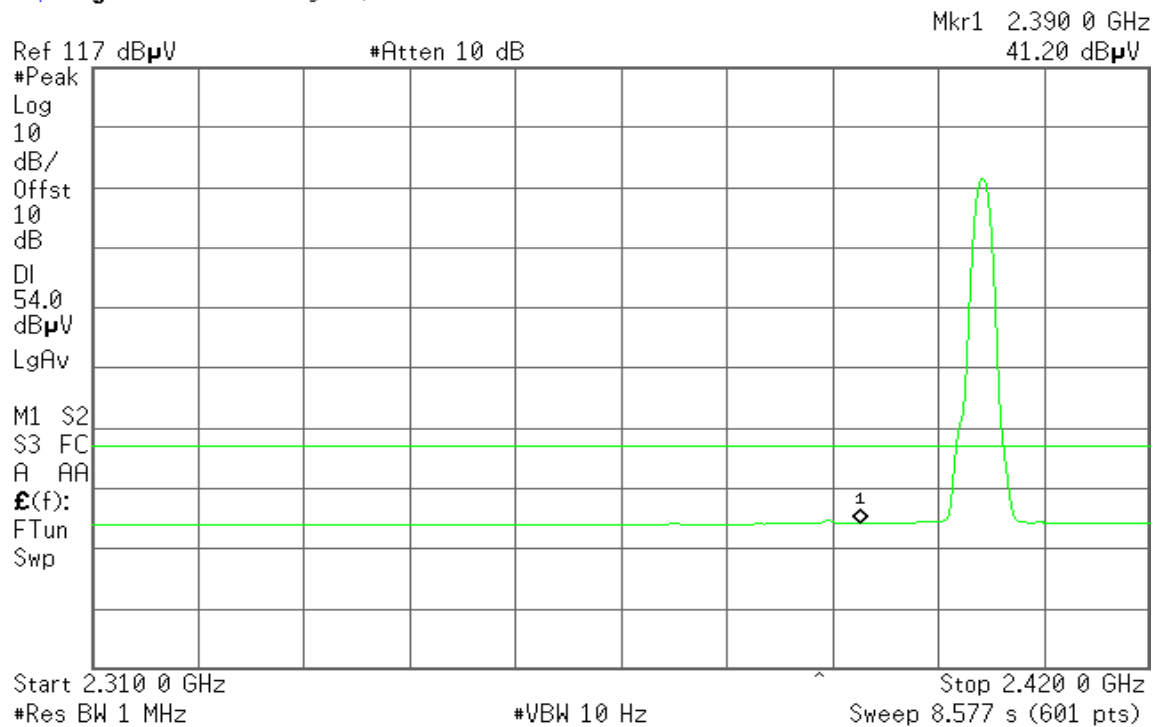

**Band Edges (Bluetooth mode / CH High)****Detector mode: Peak****Polarity: Vertical**


\* Agilent 11:29:15 May 27, 2006

T

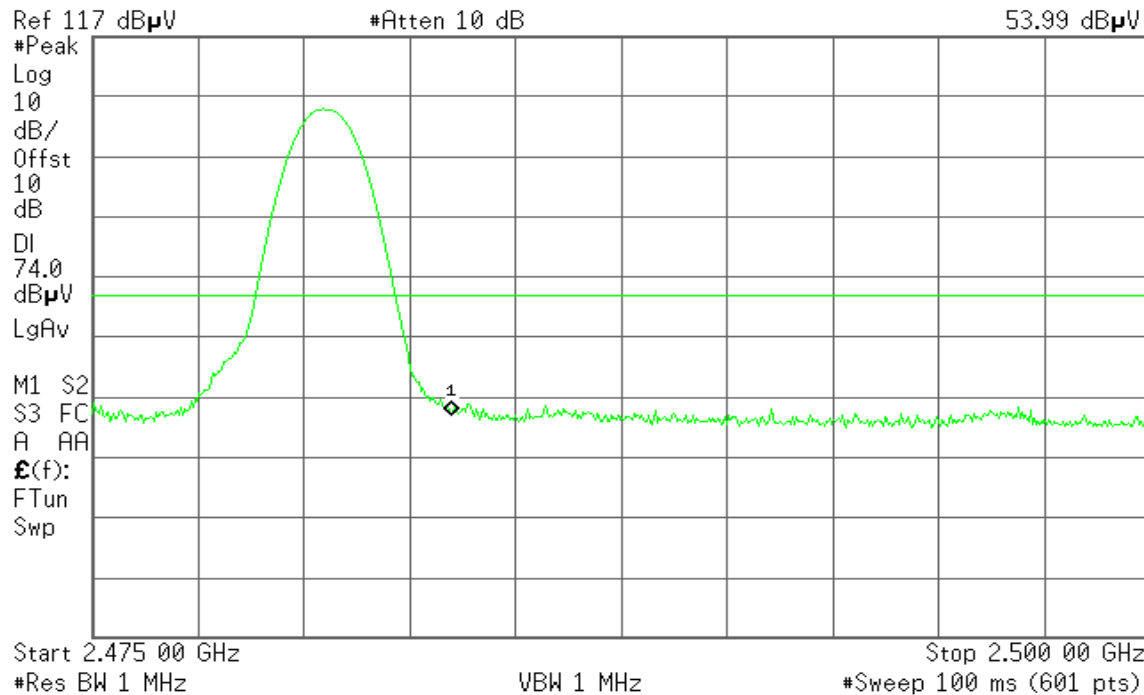Mkr1 2.483 50 GHz  
53.99 dB $\mu$ V**Detector mode: Average****Polarity: Vertical**

\* Agilent 11:27:37 May 27, 2006

T

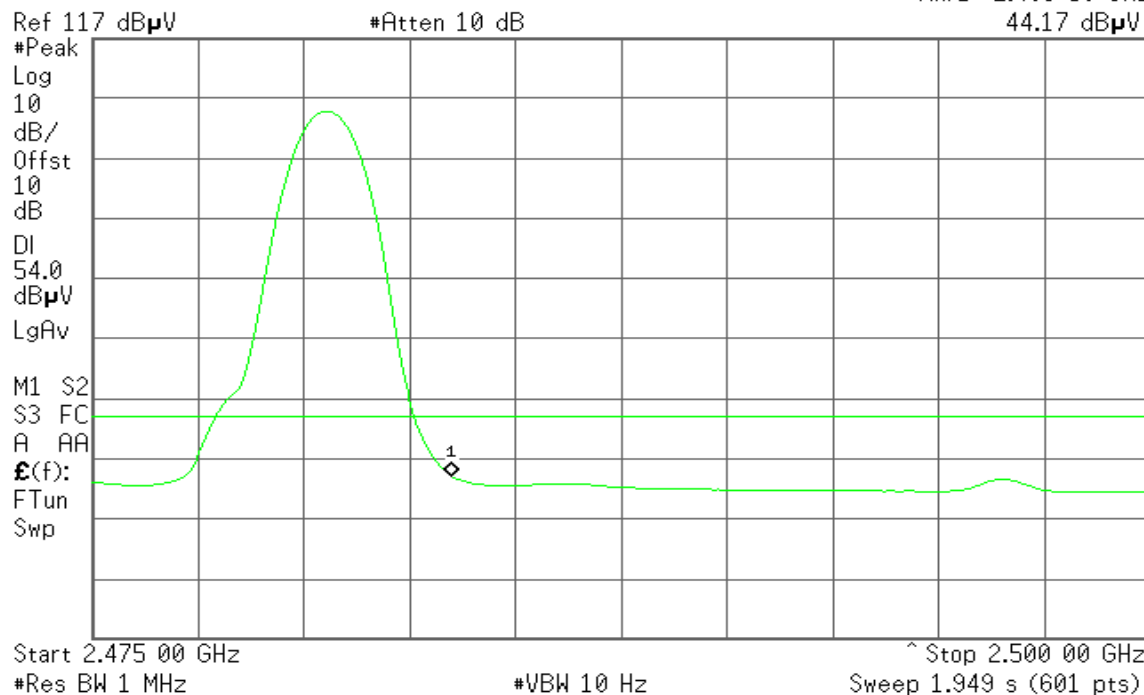Mkr1 2.483 50 GHz  
44.17 dB $\mu$ V



Detector mode: Peak

Polarity: Horizontal

\* Agilent 11:22:55 May 27, 2006

T

Mkr1 2.483 50 GHz  
53.59 dB $\mu$ VRef 117 dB $\mu$ V

#Atten 10 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

74.0

dB $\mu$ V

LgAv

M1 S2


S3 FC

A AA

£(f):

FTun

Swp

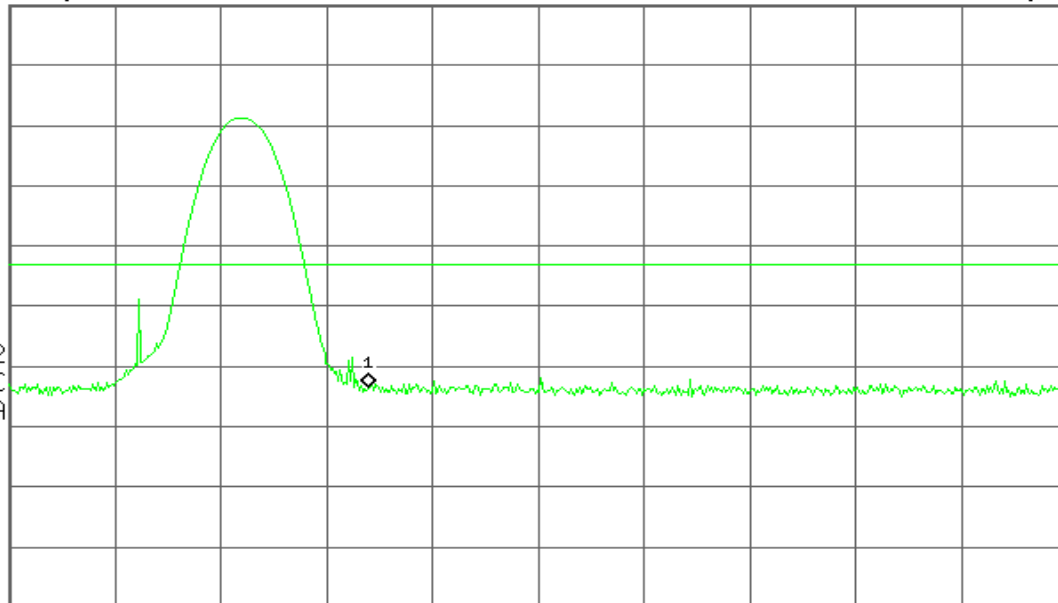

Start 2.475 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

\* Agilent 11:22:30 May 27, 2006

T

Mkr1 2.483 50 GHz  
42.05 dB $\mu$ VRef 117 dB $\mu$ V

#Atten 10 dB

#Peak

Log

10

dB/

Offst

10

dB

DI

54.0

dB $\mu$ V

LgAv

M1 S2


S3 FC

A AA

£(f):

FTun

Swp

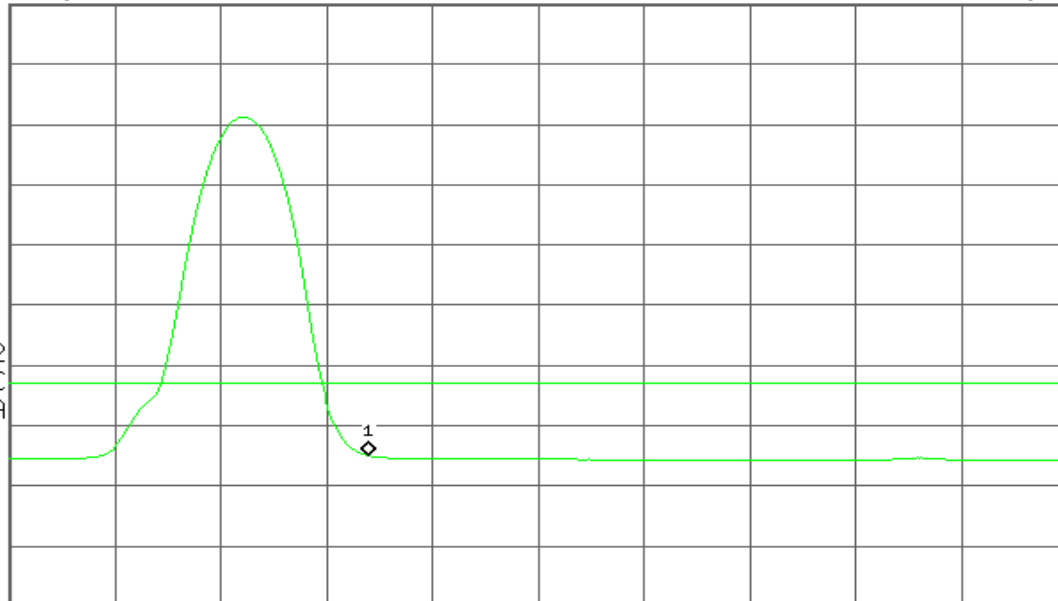

Start 2.475 00 GHz ^

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.949 s (601 pts)




## 7.10 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration

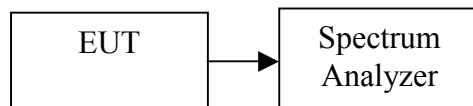

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted*

### Test Data


Channel	Frequency	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-12.12	8.00	PASS
Mid	2441	-11.54		PASS
High	2480	3.40		PASS



## Test Plot


### PPSD (Bluetooth mode / CH Low)

Agilent 09:30:35 Jun 3, 2006

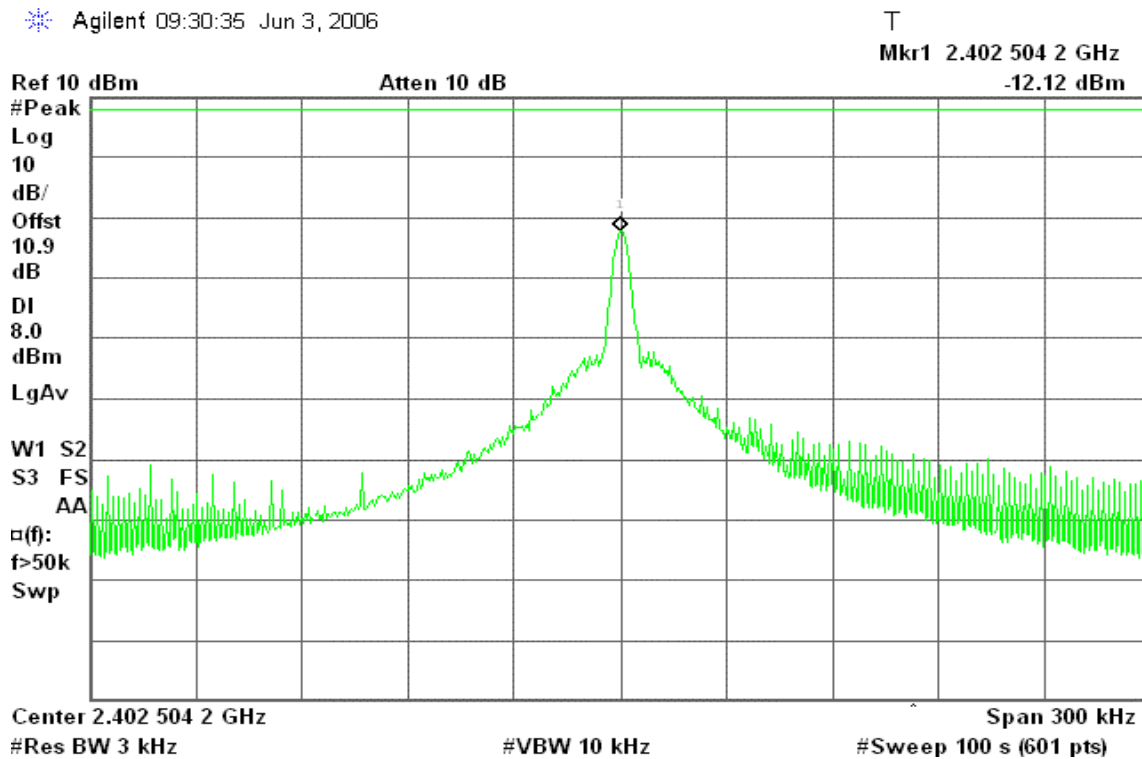

### PPSD (Bluetooth mode / CH Mid)

Agilent 09:33:59 Jun 3, 2006

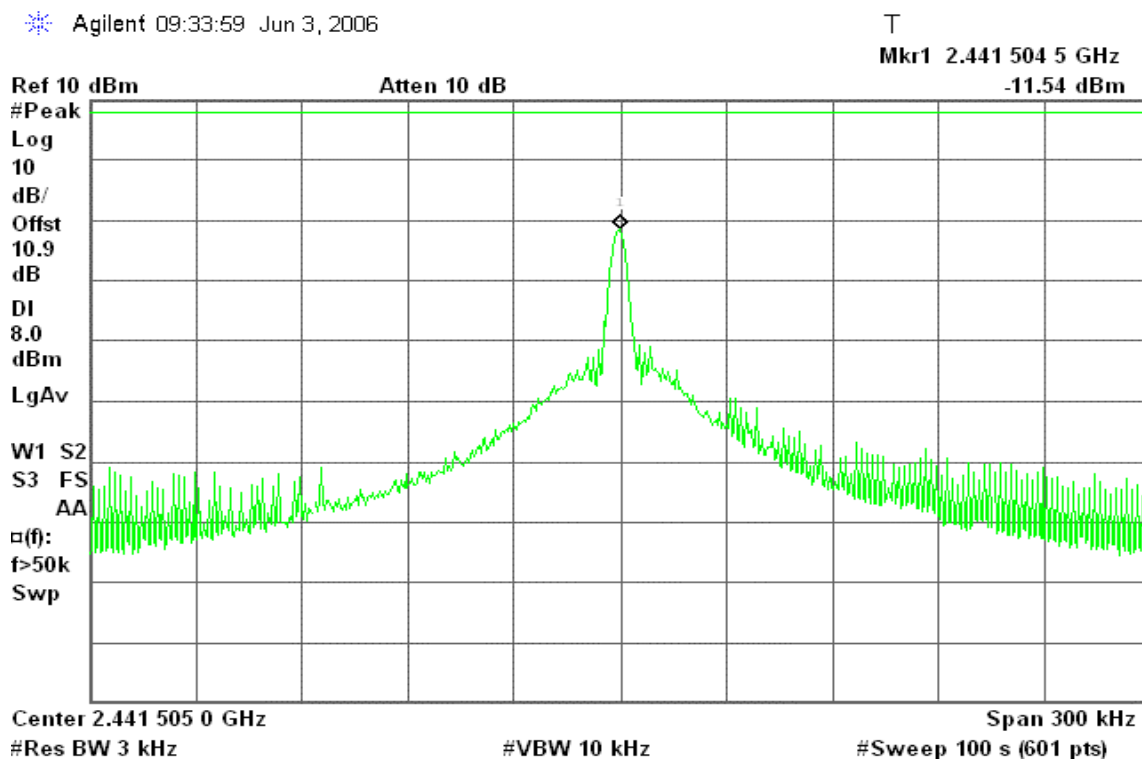




## PPSD (Bluetooth mode / CH High)

\* Agilent 09:37:15 Jun 3, 2006

T  
Mkr1 2.480 504 2 GHz

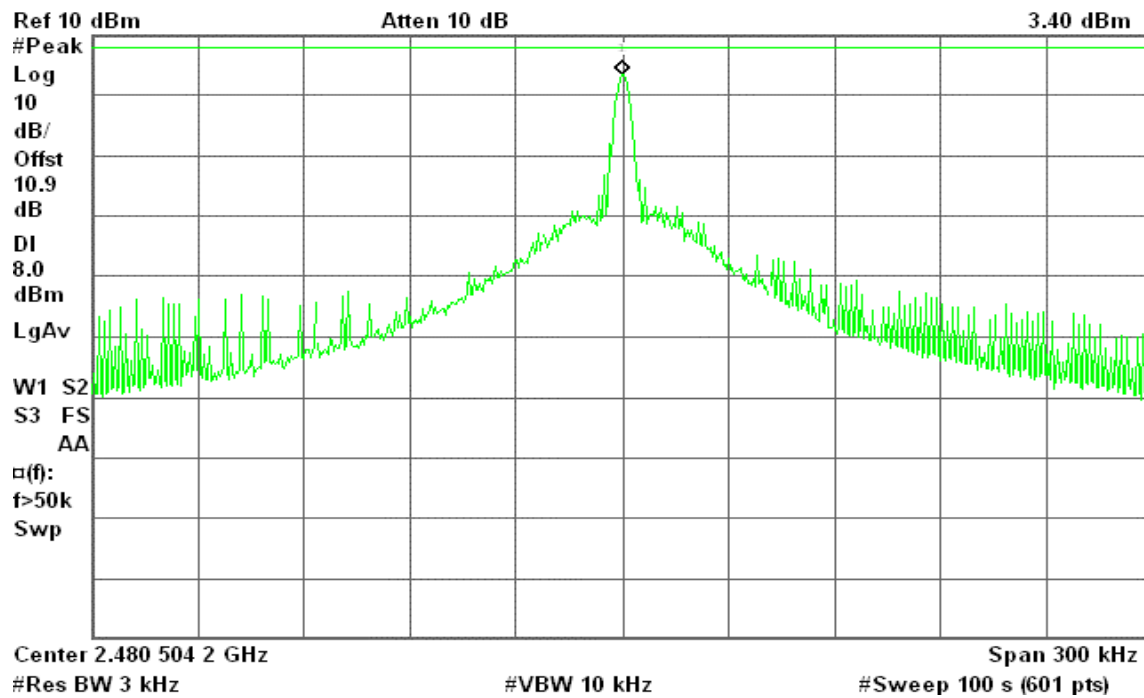




## 7.11 FREQUENCY SEPARATION

### LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Configuration

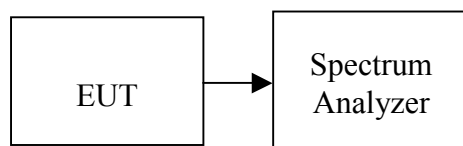

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

Channel Separation (MHz)	20dB Bandwidth (kHz)	Channel Separation Limit (kHz)	Result
1.00	41	> 20dB Bandwidth or two-thirds of the 20 dB bandwidth	Pass





## Test Plot

### Measurement of Channel Separation

\* Agilent 01:48:23 Jun 8, 2006

T

Mkr3 2.442 000 GHz

-14.98 dBm

Ref 0 dBm

Atten 10 dB

Peak  
Log  
10  
dB/

LgAv

M1 S2

Center 2.441 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.440 000 GHz	-14.97 dBm
2	(1)	Freq	2.441 000 GHz	-15.01 dBm
3	(1)	Freq	2.442 000 GHz	-14.98 dBm

### Measurement of 20dB Bandwidth

\* Agilent 09:10:49 Jun 3, 2006

T

 $\Delta$  Mkr2 41 kHz

0.24 dB

Ref 10 dBm

Atten 10 dB

#Peak  
Log  
10  
dB/  
Offst  
10.9  
dB  
DI  
-16.6  
dBm  
LgAv

V1 S2

Center 2.480 510 GHz

Span 1.5 MHz

#Res BW 10 kHz

#VBW 30 kHz

Sweep 14.36 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 505 GHz	3.44 dBm
2R	(1)	Freq	2.480 484 GHz	-21.38 dBm
2 $\Delta$	(1)	Freq	41 kHz	0.24 dB




## 7.12 NUMBER OF HOPPING FREQUENCY

### **LIMIT**

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

### **Test Configuration**

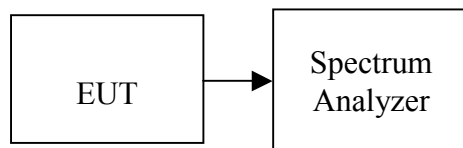

### **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

### **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

Result (No. of CH)	Limit (No. of CH)	Result
79	>75	PASS




## Test Plot

### Channel Number

2.4 GHz – 2.441 GHz

Agilent 00:50:33 Jun 8, 2006


T

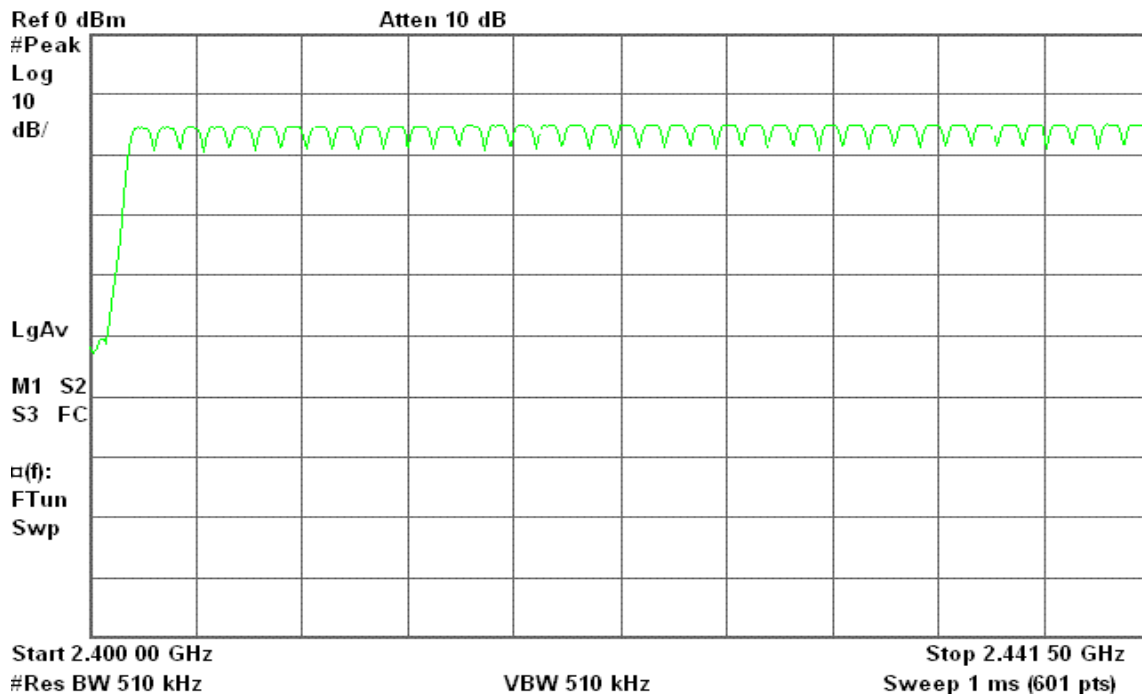

2.441 GHz – 2.4835 GHz

Agilent 00:51:24 Jun 8, 2006

T

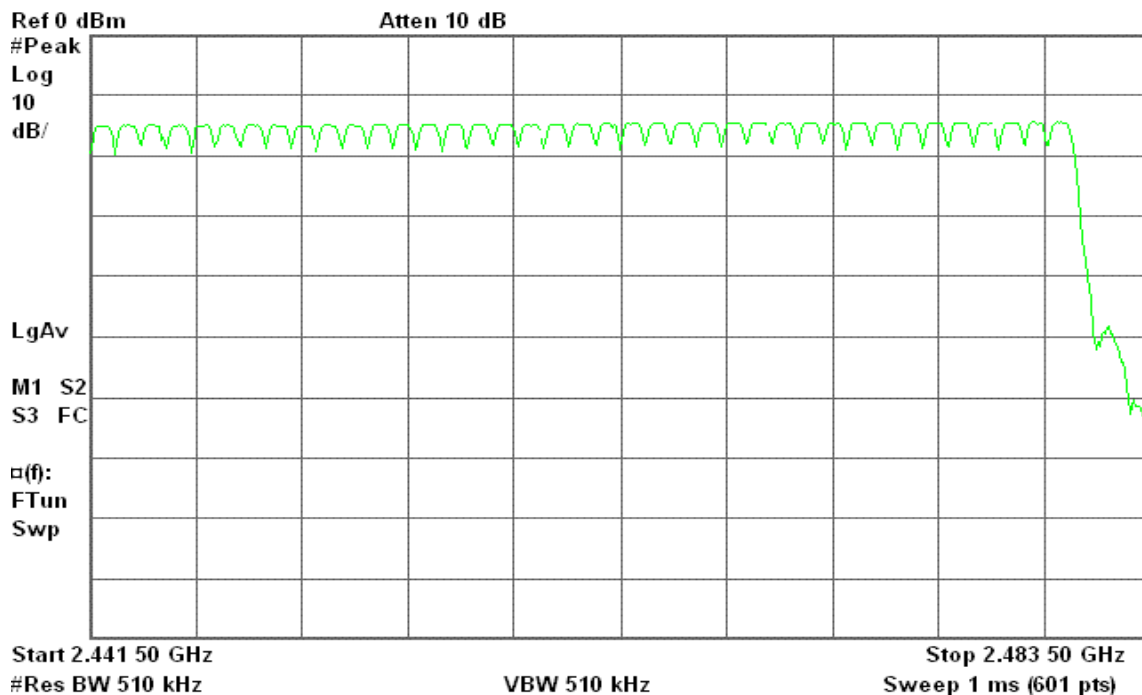




## 7.13 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### Test Configuration

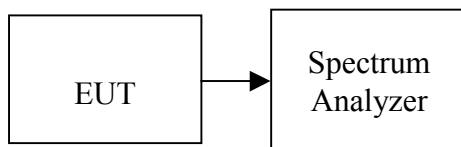

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **DH 1**

CH Low:  $0.42 * (1600/2)/79 * 31.60 = 134.40$  (ms)

CH Mid:  $0.42 * (1600/2)/79 * 31.60 = 134.40$  (ms)

CH High:  $0.42 * (1600/2)/79 * 31.60 = 134.40$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.42	134.40	31.60	400.00	PASS
Mid	0.42	134.40	31.60		PASS
High	0.42	134.40	31.60		PASS

#### **DH 3**

CH Low:  $1.67 * (1600/4)/79 * 31.60 = 267.20$  (ms)

CH Mid:  $1.67 * (1600/4)/79 * 31.60 = 267.20$  (ms)

CH High:  $1.69 * (1600/4)/79 * 31.60 = 270.40$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.67	267.20	31.60	400.00	PASS
Mid	1.67	267.20	31.60		PASS
High	1.69	270.40	31.60		PASS

#### **DH 5**

CH Low:  $2.92 * (1600/6)/79 * 31.60 = 311.47$  (ms)

CH Mid:  $2.93 * (1600/6)/79 * 31.60 = 312.53$  (ms)

CH High:  $2.93 * (1600/6)/79 * 31.60 = 312.53$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.92	311.47	31.60	400.00	PASS
Mid	2.93	312.53	31.60		PASS
High	2.93	312.53	31.60		PASS



## Test Plot


### DH 1

#### (Bluetooth / CH Low)

Agilent 01:55:33 Jun 8, 2006

T

Δ Mkr1 421.2 μs  
-0.06 dB

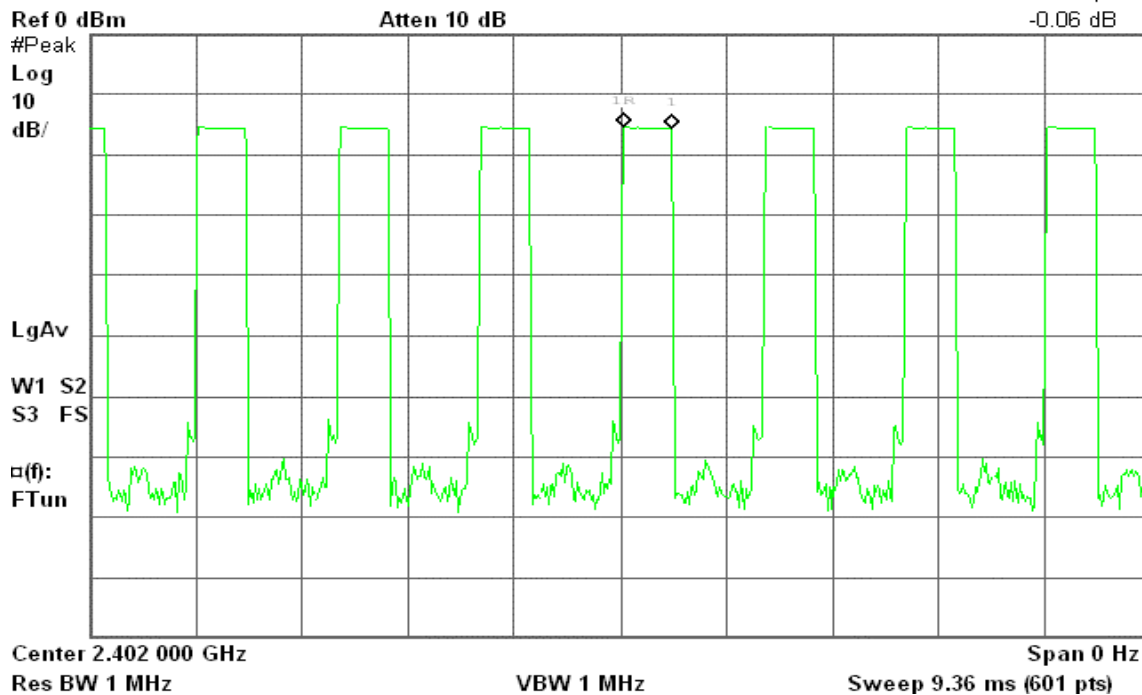


#### (Bluetooth / CH Mid)

Agilent 01:56:52 Jun 8, 2006

T

Δ Mkr1 421.2 μs  
-0.02 dB

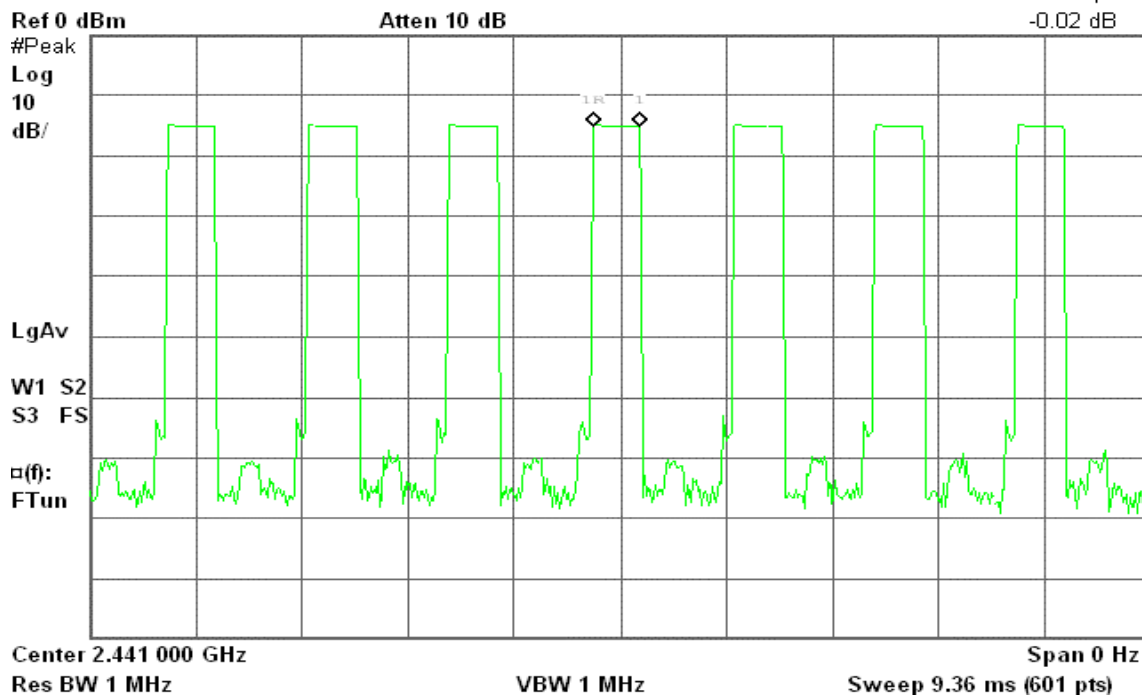




### (Bluetooth / CH High)

Agilent 01:57:43 Jun 8, 2006

T

Δ Mkr1 421.2 μs  
-0.04 dB

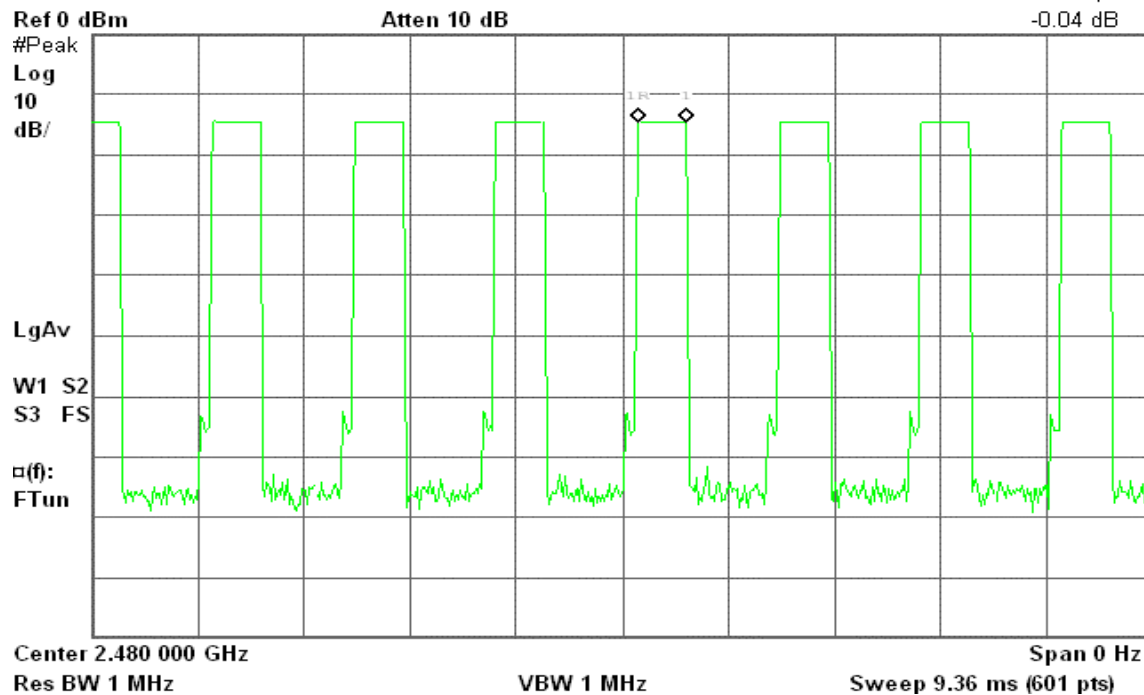


### DH 3

### (Bluetooth / CH Low)

Agilent 01:59:50 Jun 8, 2006

T

Δ Mkr1 1.669 ms  
-0.10 dB

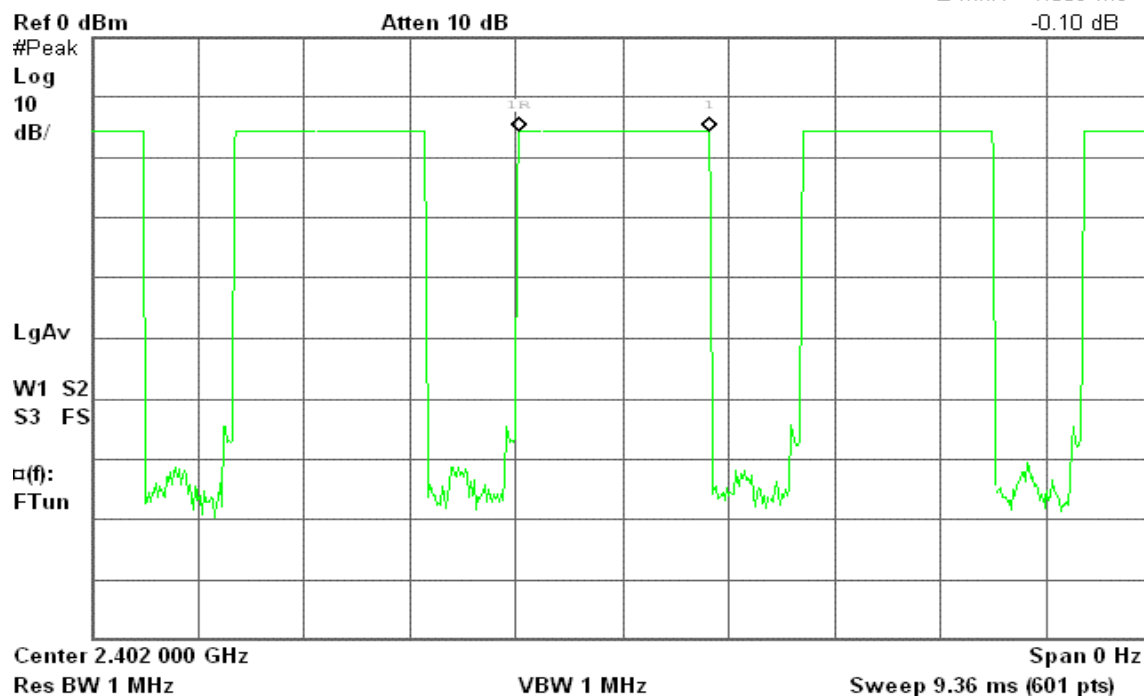




### (Bluetooth / CH Mid)

Agilent 01:59:02 Jun 8, 2006

T

Δ Mkr1 1.669 ms  
-0.13 dB

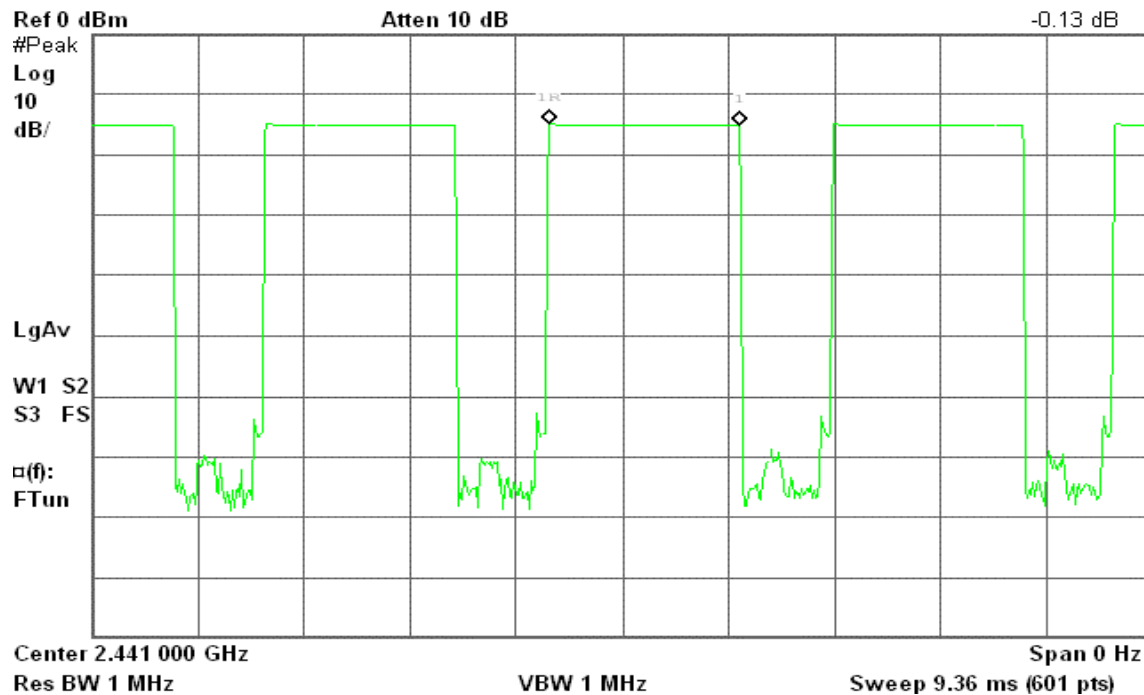


### (Bluetooth / CH High)

Agilent 01:58:21 Jun 8, 2006

T

Δ Mkr1 1.685 ms  
0.04 dB

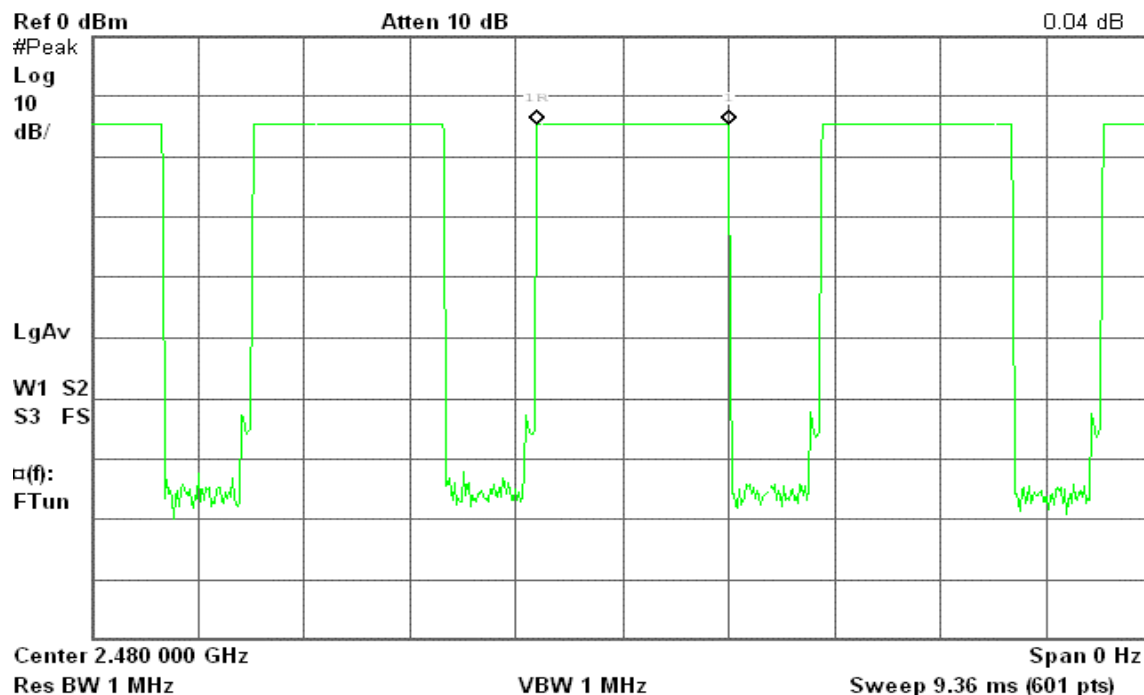






## DH 5

### (Bluetooth / CH Low)

Agilent 02:00:36 Jun 8, 2006

T

Δ Mkr1 2.917 ms  
-0.08 dB

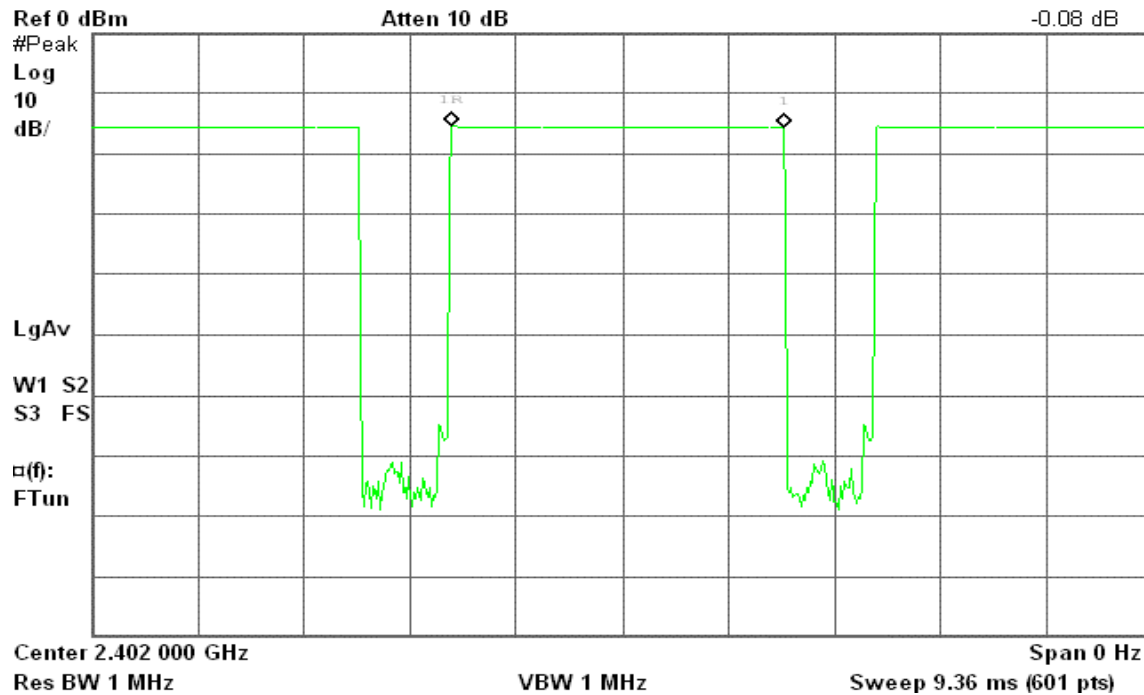


### (Bluetooth / CH Mid)

Agilent 02:01:12 Jun 8, 2006

T

Δ Mkr1 2.933 ms  
-0.34 dB

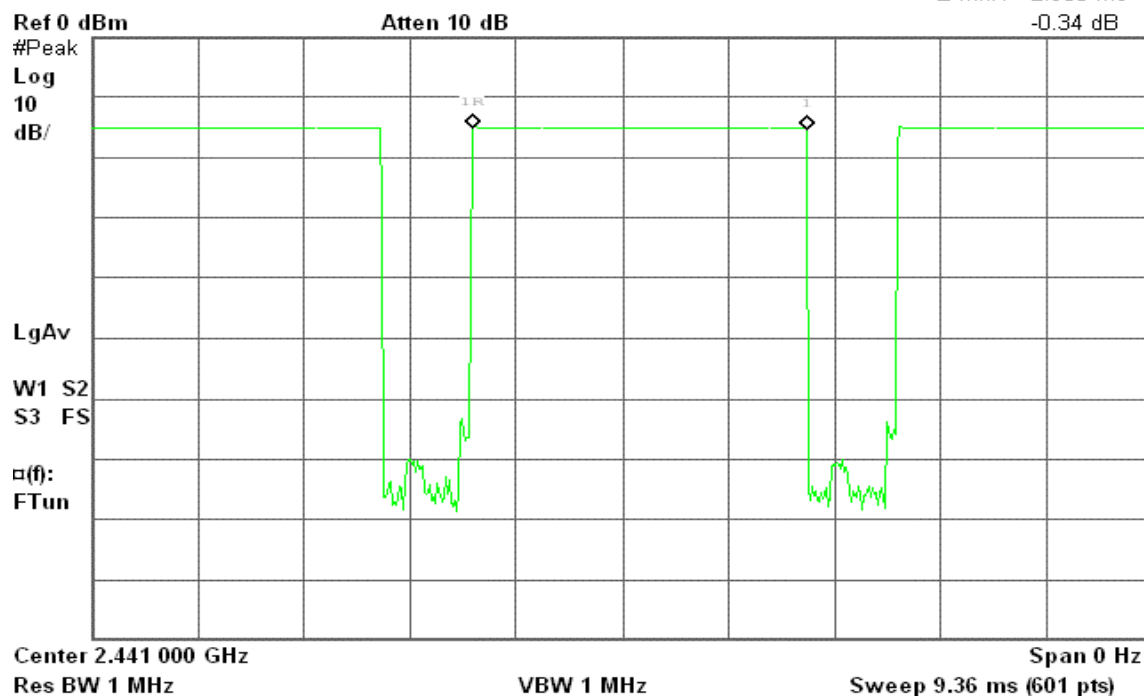




(Bluetooth / CH High)

Agilent 02:01:54 Jun 8, 2006

T

Δ Mkr1 2.933 ms  
-0.65 dB

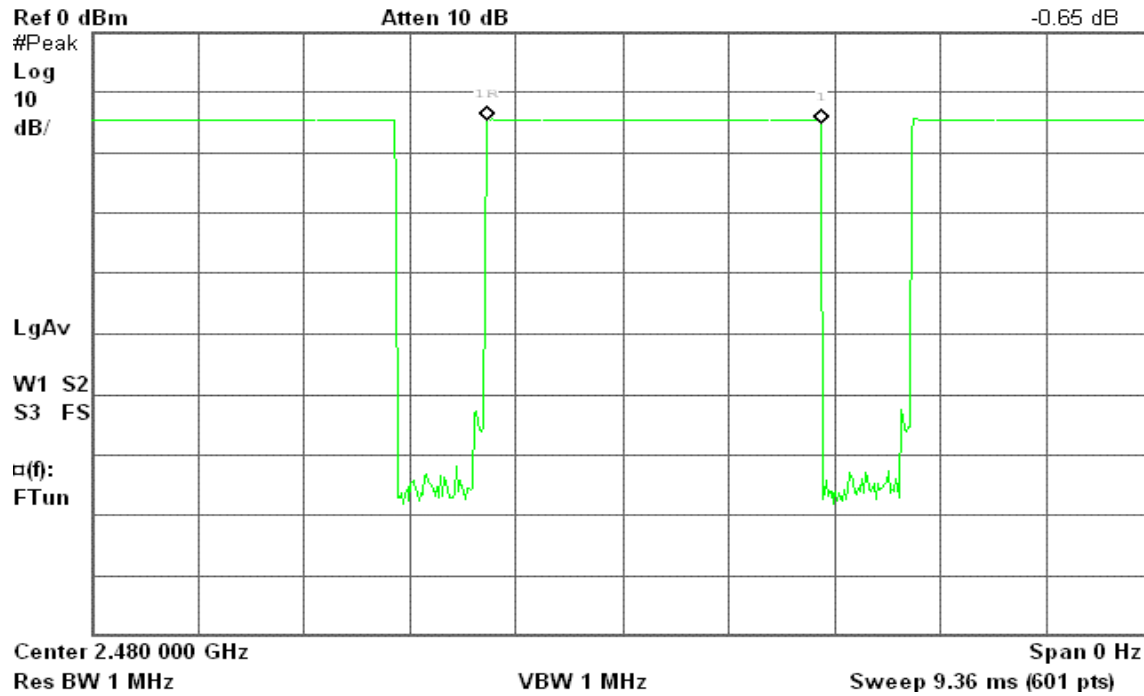



## **7.14 SPURIOUS EMISSIONS**

### **7.14.1 CONDUCTED MEASUREMENT**

#### **LIMIT**

*(Same as Section 7.6.1 in this test report)*

#### **TEST PROCEDURE**

*(Same as Section 7.6.1 in this test report)*


#### **TEST RESULTS**

*No non-compliance noted.*

**Test Plot****(Bluetooth / CH Low)**


\* Agilent 09:43:35 Jun 3, 2006

T

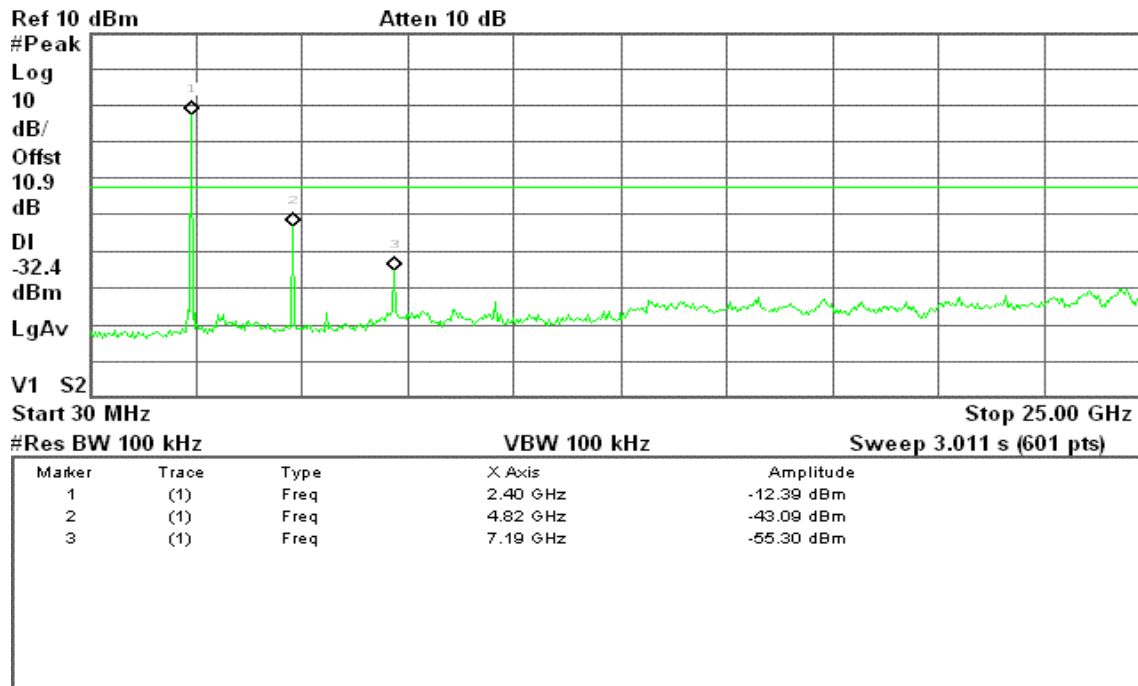**(Bluetooth / CH Mid)**

\* Agilent 09:42:29 Jun 3, 2006

T

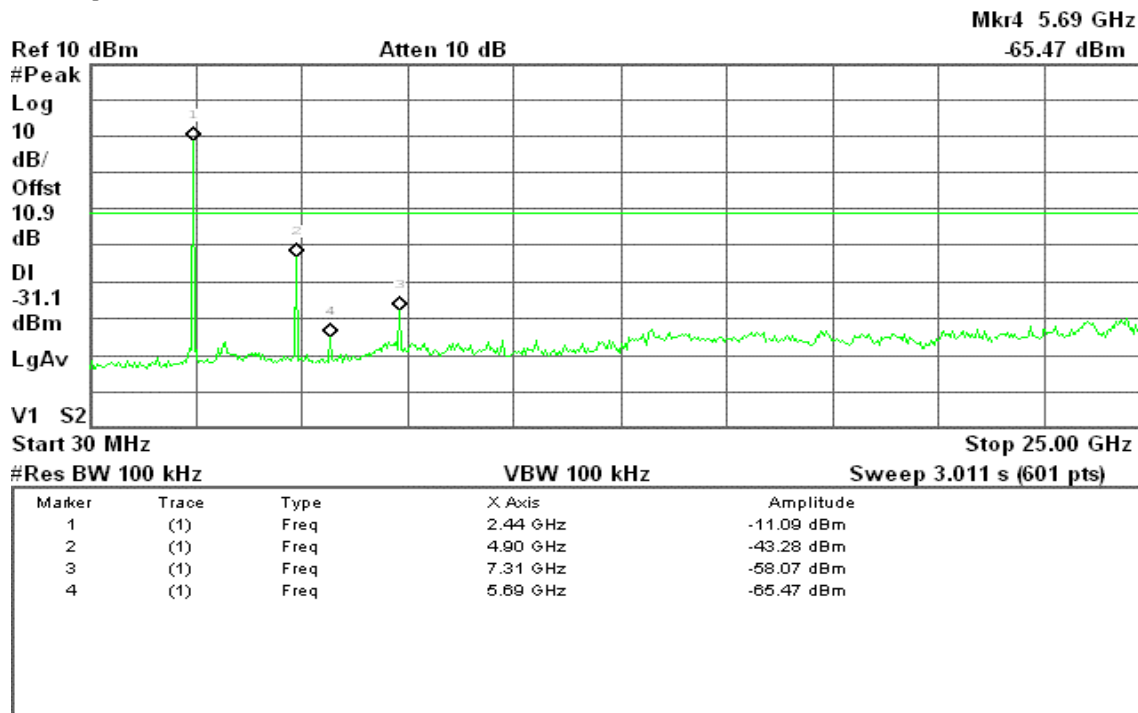




(Bluetooth / CH High)

Agilent 09:40:13 Jun 3, 2006

T

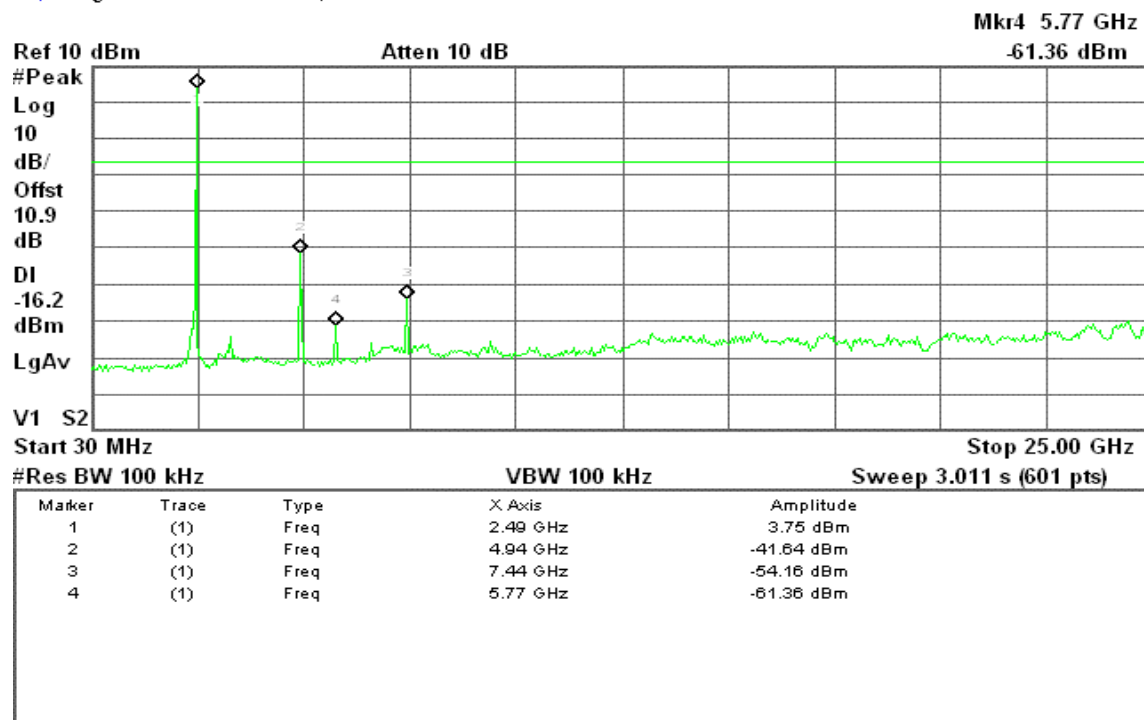



## **7.14.2 RADIATED EMISSIONS**

### **LIMIT**

*(Same as Section 7.6.2 in this test report)*

### **TEST PROCEDURE**

*(Same as Section 7.6.2 in this test report)*

**TEST RESULTS****BLUETOOTH OPERATION****Above 1 GHz****Operation Mode:** Bluetooth / TX / CH Low**Test Date:** May 27, 2006**Temperature:** 21°C**Tested by:** James Yu**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1260.00	V	53.26	---	-10.30	42.97	---	74.00	54.00	-11.03	Peak
4808.33	V	55.62	51.29	0.39	56.01	51.68	74.00	54.00	-2.32	AVG
N/A										
1256.67	H	53.12	---	-10.30	42.82	---	74.00	54.00	-11.18	Peak
4808.33	H	52.77	45.92	0.39	53.16	46.31	74.00	54.00	-7.69	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** Bluetooth / TX / CH Mid**Test Date:** May 27, 2006**Temperature:** 21°C**Tested by:** James Yu**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1156.67	V	54.91	---	-10.44	44.47	---	74.00	54.00	-9.53	Peak
4883.33	V	55.21	50.28	0.38	55.59	50.66	74.00	54.00	-3.34	AVG
N/A										
1283.33	H	53.27	---	-10.26	43.01	---	74.00	54.00	-10.99	Peak
4883.33	H	52.62	44.61	0.38	53.00	44.99	74.00	54.00	-9.01	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .



**Operation Mode:** Bluetooth / TX / CH High**Test Date:** May 27, 2006**Temperature:** 21°C**Tested by:** James Yu**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1273.33	V	52.49	---	-10.28	42.21	---	74.00	54.00	-11.79	Peak
4958.33	V	55.61	50.90	0.37	55.98	51.27	74.00	54.00	-2.73	AVG
N/A										
1273.33	H	53.19	---	-10.28	42.92	---	74.00	54.00	-11.08	Peak
4958.33	H	55.35	50.48	0.37	55.72	50.85	74.00	54.00	-3.15	AVG
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**CONDITION C: WLAN+BLUETOOTH OPERATION****7.15 POWER LINE CONDUCTED EMISSIONS****LIMIT**

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

**Test Configuration**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

**TEST PROCEDURE**

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Operation Mode:** Normal Link

**Test Date:** May 24, 2006

**Temperature:** 25°C

**Tested by:** Nan Tsai

**Humidity:** 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.176	45.780	37.040	0.148	45.928	37.188	64.672	54.672	-18.744	-17.484	L1
0.236	38.810	31.050	0.100	38.910	31.150	62.236	52.236	-23.326	-21.086	L1
0.473	31.080	27.550	0.100	31.180	27.650	56.461	46.461	-25.281	-18.811	L1
0.645	23.630	19.580	0.100	23.730	19.680	56.000	46.000	-32.270	-26.320	L1
2.182	26.250	24.320	0.100	26.350	24.420	56.000	46.000	-29.650	-21.580	L1
6.099	24.590	22.760	0.310	24.900	23.070	60.000	50.000	-35.100	-26.930	L1
0.180	47.190	37.630	0.140	47.330	37.770	64.486	54.486	-17.156	-16.716	L2
0.238	40.890	33.520	0.100	40.990	33.620	62.166	52.166	-21.176	-18.546	L2
0.298	34.760	28.560	0.100	34.860	28.660	60.298	50.298	-25.438	-21.638	L2
0.423	28.110	23.640	0.100	28.210	23.740	57.389	47.389	-29.179	-23.649	L2
1.091	25.270	24.920	0.100	25.370	25.020	56.000	46.000	-30.630	-20.980	L2
6.050	24.270	19.770	0.305	24.575	20.075	60.000	50.000	-35.425	-29.925	L2


**Remark:**

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




## Test Data Plots

### Conducted emissions (Line 1)

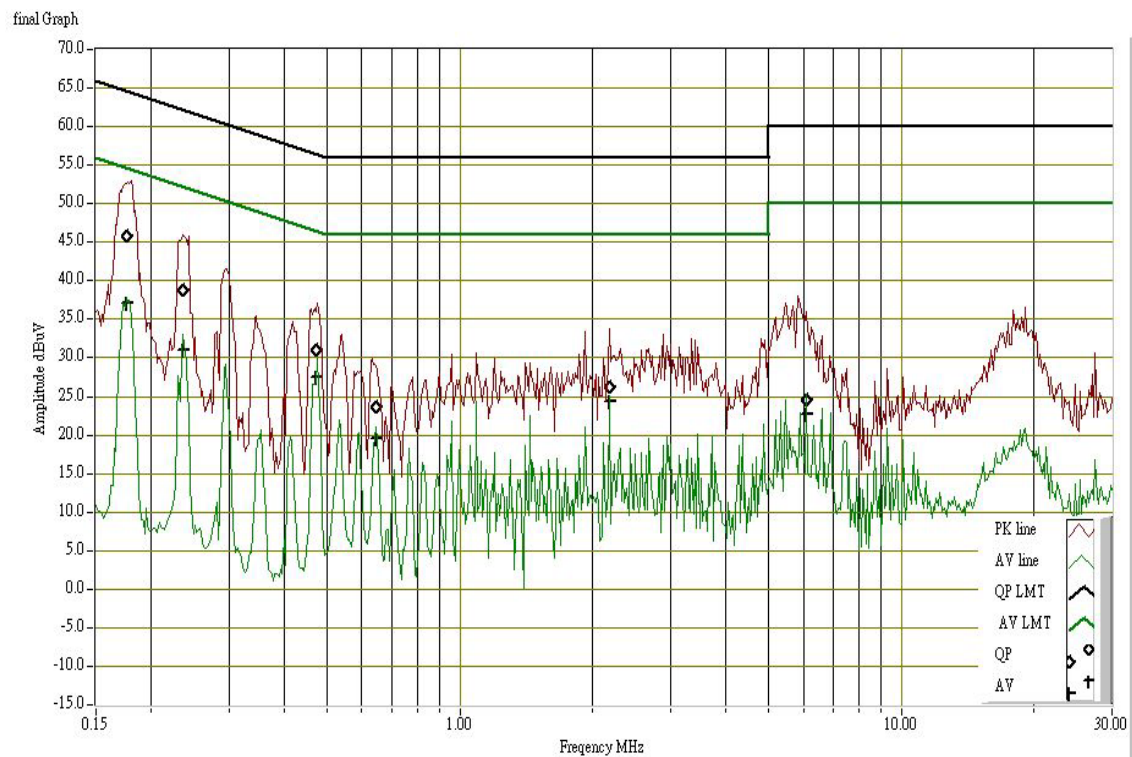

### Conducted emissions (Line 2)

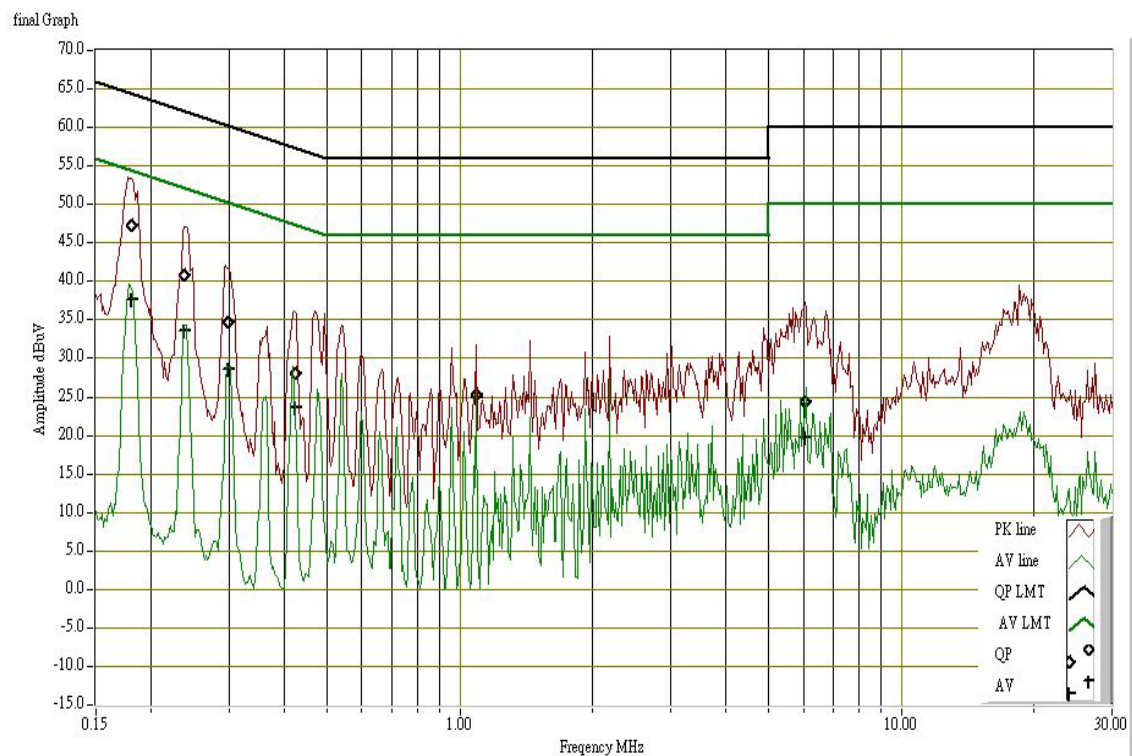



## APPENDIX I

### RADIO FREQUENCY EXPOSURE

#### LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

#### EUT Specification

<b>EUT</b>	Terminal
<b>Frequency band (Operating)</b>	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	IEEE 802.11b: 20.37 dBm (108.89mW)
<b>Antenna gain (Max)</b>	3.0 dBi (Numeric gain: 2.0)
<b>Evaluation applied</b>	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

**Remark:**

1. The maximum output power is 20.37dBm (108.89mW) at 2462MHz (with 2.0 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

#### TEST RESULTS

No non-compliance noted.

**Remark:** Please refer to the separated SAR report.

**EUT Specification**

EUT	Terminal
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others <u>Bluetooth: 2.402GHz ~ 2.480GHz</u>
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure ( $S = 5mW/cm^2$ ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ( $S=1mW/cm^2$ )
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	3.72 dBm (2.36mW)
Antenna gain (Max)	3.0 dBi (Numeric gain: 2.0)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A*
<b>Remark:</b> 1. The maximum output power is <u>3.72dBm 2.36(mW)</u> at <u>2480MHz</u> (with <u>2.0 numeric antenna gain.</u> ) 2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance. 3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is $1.0 mW/cm^2$ even if the calculation indicates that the power density would be larger.	

**TEST RESULTS**

No non-compliance noted.

(SAR evaluation is not required for the PORTABLE device while its maximum output power is lower than the general population low threshold:  $60/f_{(GHz)}=60/2.441=24.58mW$ )

**MPE evaluation**

Not applicable.