

CERTIFICATION TEST REPORT

Report Number. : S-4791706661-E7V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-L505U, SM-L505F

FCC ID : A3LSML505

EUT Description : WCDMA/LTE Smart Wearable + BT/BLE, DTS/UNII a/b/g/n

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
2025-04-24

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2025-04-24	Initial issue	Jaejin Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	7
4.1. METROLOGICAL TRACEABILITY	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULES	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	13
7. TEST RESULTS SUMMARY	14
8. MEASUREMENT METHODS.....	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 20 dB BANDWIDTH	17
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	17
9.2.1. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	17
9.3. HOPPING FREQUENCY SEPARATION	19
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	20
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	20
9.4. NUMBER OF HOPPING CHANNELS.....	21
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	22
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	23
9.5. AVERAGE TIME OF OCCUPANCY.....	24
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	25
9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	27
9.6. OUTPUT POWER	29
9.6.1. BASIC DATA RATE GFSK MODULATION.....	29

9.6.2.	ENHANCED DATA RATE $\pi/4$ -DPSK MODULATION	29
9.6.3.	ENHANCED DATA RATE 8PSK MODULATION	29
9.6.4.	OUTPUT POWER PLOTS	30
9.7.	AVERAGE POWER.....	32
9.7.1.	BASIC DATA RATE GFSK MODULATION.....	32
9.7.2.	ENHANCED DATA RATE $\pi/4$ -DQPSK MODULATION	32
9.7.3.	ENHANCED DATA RATE 8PSK MODULATION	32
9.8.	CONDUCTED SPURIOUS EMISSIONS.....	33
9.8.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	34
9.8.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	36
10.	RADIATED TEST RESULTS.....	38
10.1.	TRANSMITTER ABOVE 1 GHz.....	40
10.1.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	40
10.1.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	44
10.2.	WORST CASE BELOW 1 GHz.....	48
11.	AC POWER LINE CONDUCTED EMISSIONS	49
11.1.	AC Power Line	50

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: WCDMA/LTE Smart Wearable + BT/BLE, DTS/UNII a/b/g/n

MODEL NUMBER: SM-L505U, SM-L505F

SERIAL NUMBER: 354907200130332, 354907200130134 (CONDUCTED);
R3AY30059FL, R3AY3005E6Y (RADIATED)

DATE TESTED: 2025-03-18 - 2025-04-22

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Jaejin Lee
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2020.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☒	Chamber 3(3m semi-anechoic chamber)
☐	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{AC Corrected Reading (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Extension Cord} \\ &\text{Loss (dB)} + \text{Cable Loss (dB)} \\ 44.72 \text{ dBuV} &= 34.72 \text{ dBuV} + 9.9 \text{ dB} + 0.1 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
RF Output Power	0.69 dB
Time	0.60 %
Occupied Bandwidth	0.04 %
Hopping Frequency Separation	2.9×10^3 Hz
Frequency Range	2.5×10^3 Hz
Conducted Spurious Emissions	1.40 dB
Conducted Disturbance, 0.15 to 30 MHz	1.84 dB
Radiated Disturbance, 9 kHz to 30 MHz	2.41 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.69 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.18 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.07 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a WCDMA/LTE Smart Wearable + BT/BLE, DTS/UNII a/b/g/n.
This test report addresses the DSS (BT) operational mode.

Representative model	Difference	Derivative model
		SM-L505F
SM-L505U	Hardware	Same
	Software	The UI has changed according to Service Provider

The model SM-L505U was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak and average conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	18.609	72.59
		Average	18.290	67.45
	Enhanced Pi/4-DPSK	Peak	13.221	20.99
		Average	10.621	11.54
	Enhanced 8PSK	Peak	13.906	24.58
		Average	10.667	11.66

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of: -11.2 dBi

5.4. WORST-CASE CONFIGURATION AND MODE

The fundamentals of the EUT were investigated in three orthogonal orientations X, Y and Z on 1TX SISO mode. It was determined that Z orientation was the worst-case for 1TX SISO mode.

Worst case of antenna axis: Z

Radiated and power line conducted tests were performed with EUT connected to AC power adapter and strap as the worst-case configuration. Radiated harmonics spurious 1~18 GHz Low/Mid/High channels, 18-26GHz were performed with the EUT set at the 1Tx mode. Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For Radiated band-edge and spurious test, tests were performed on 1Tx mode.
All radiated and power line conducted tests were performed attached with travel adapter and strap for the worst-case condition mode.

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37XBMJF8FBDKA	N/A
Wireless Charger	SAMSUNG	EP-OL300	-	-


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	0.8 m	N/A


TEST SETUP


The EUT is continuously communicating to the Bluetooth tester during the tests.
Test software enable BT communications.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

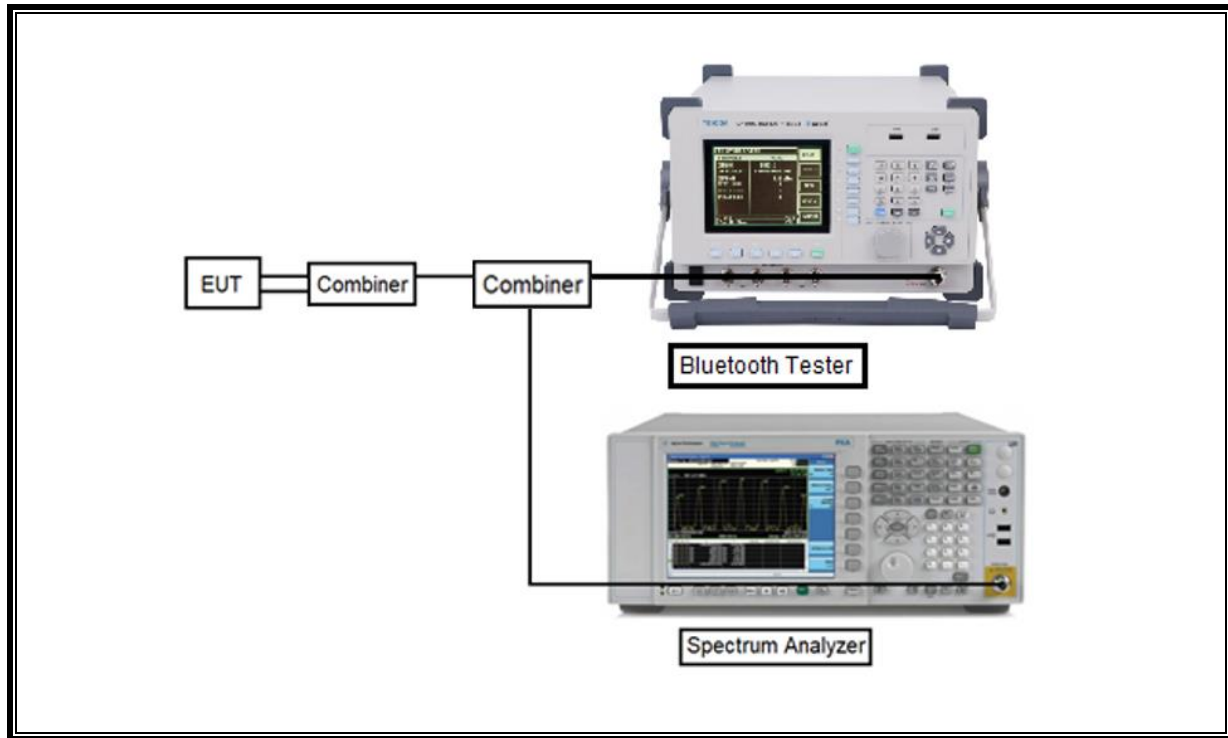

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

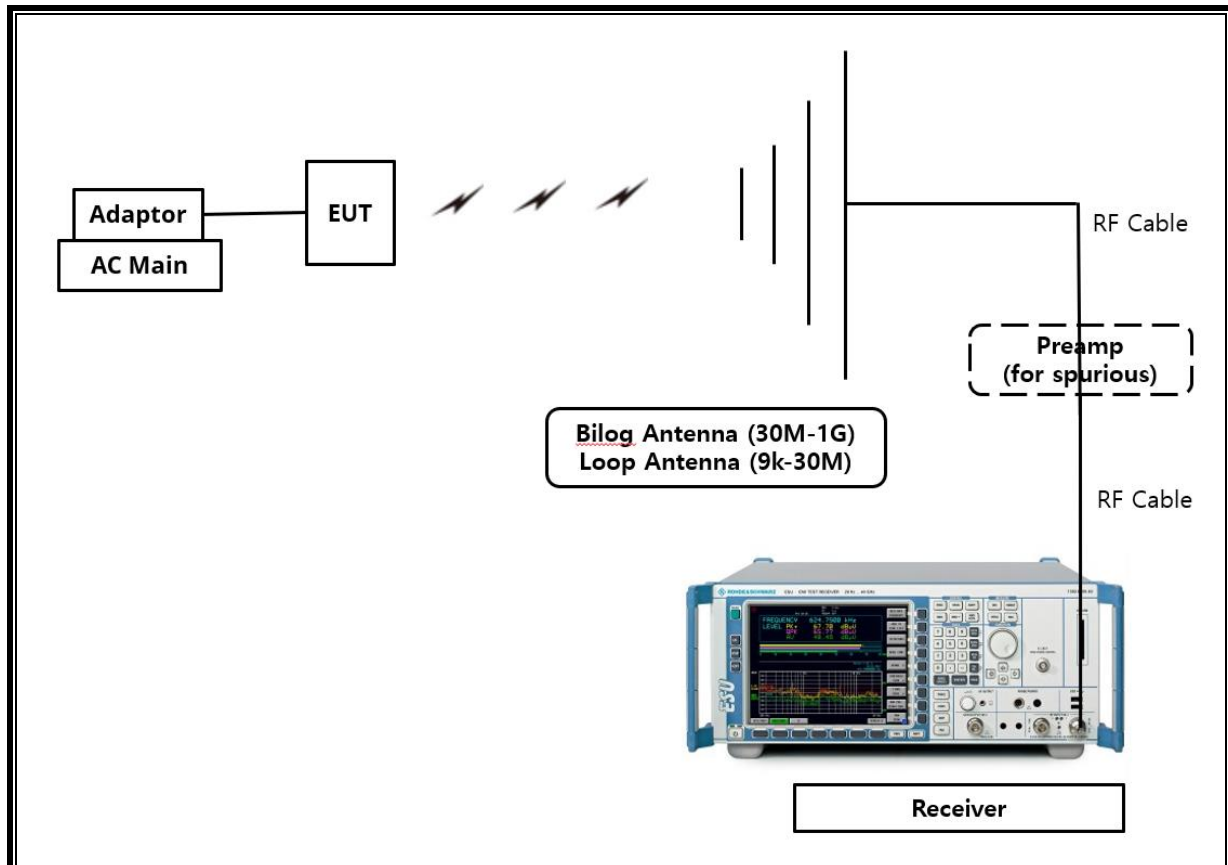

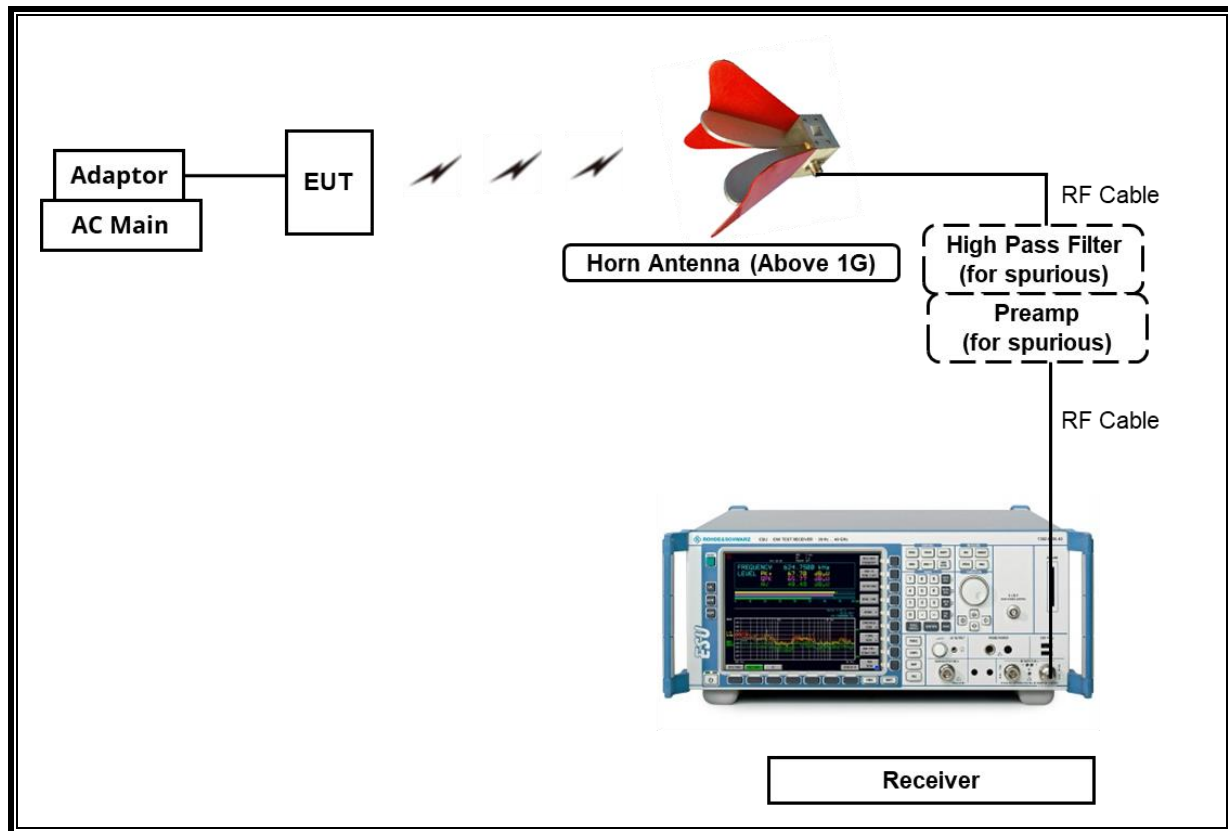

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	750	2026-07-30
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-07
Antenna, Horn, 18 GHz	ETS	3117	00168724	2026-07-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	2026-07-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2026-07-23
Preamplifier	ETS	3116C-PA	00168841	2025-07-25
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2025-07-22
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2025-07-23
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-182020	28451	2025-07-22
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-181515	23576	2025-07-25
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2025-07-24
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY60070693	2026-01-02
Power Supply	Agilent	E3640A	MY54286199	2025-07-24
Average Power Sensor	Agilent / HP	U2000A	MY54270007	2025-07-23
Average Power Sensor	Agilent / HP	U2000A	MY54260010	2025-07-23
Bluetooth Tester	TESCOM	MTP300A	MTP300A010266	2025-07-23
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2025-07-24
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2026-01-03
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2026-01-03
Attenuator	PASTERNAK	PE7087-10	A009	2025-07-23
Attenuator	PASTERNAK	PE7087-10	A001	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2025-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2025-07-22
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2025-07-22
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2025-07-22
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2025-07-22
LISN	R&S	ENV216	101836	2025-07-22
Termination	WEINSCHEL	M1406A	T09	2025-07-23
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	Complies
15.247 (b)(1)	TX conducted output power	< 21 dBm		Complies
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		Complies
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Complies
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		Complies
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Complies

8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.7

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 7.8.8

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 7.8.8

AC Power Line Conducted Emission : ANSI C63.10-2020, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

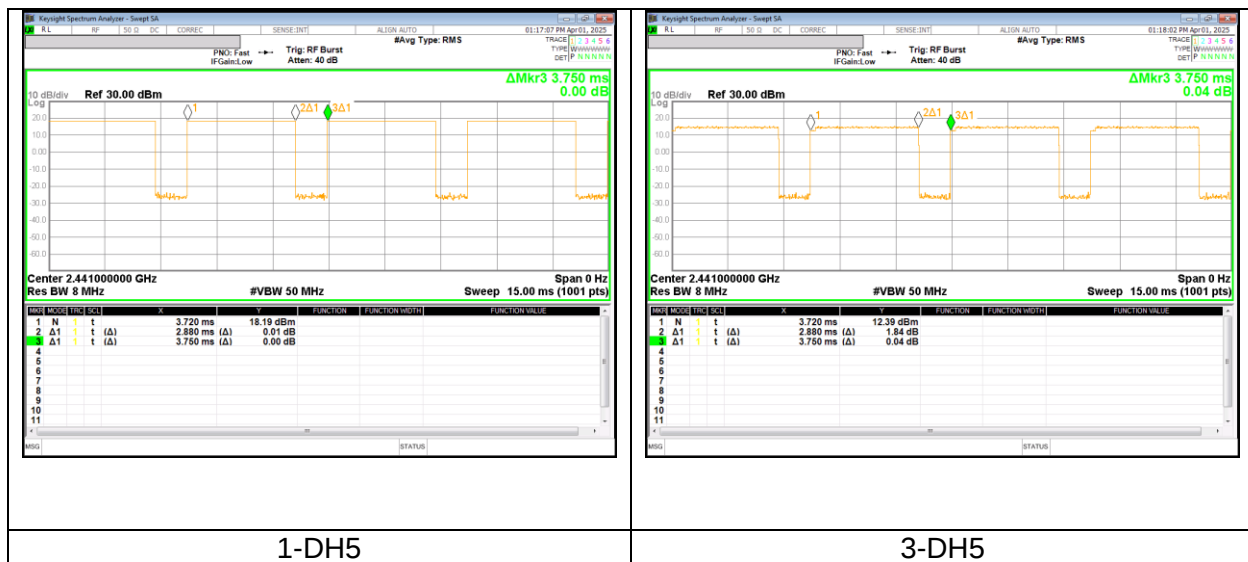

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	1/T Minimum VBW [kHz]
2 400 ~ 2 483.5 MHz Band				
BDR	2.880	3.750	76.80	0.35
EDR	2.880	3.750	76.80	0.35

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. The sweep time is coupled.


RESULTS

9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	960.2
	39	2 441	957.6
	78	2 480	959.2
Worst			960.2

9.2.1. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	1330.0
	39	2 441	1331.0
	78	2 480	1329.0
Worst			1331.0

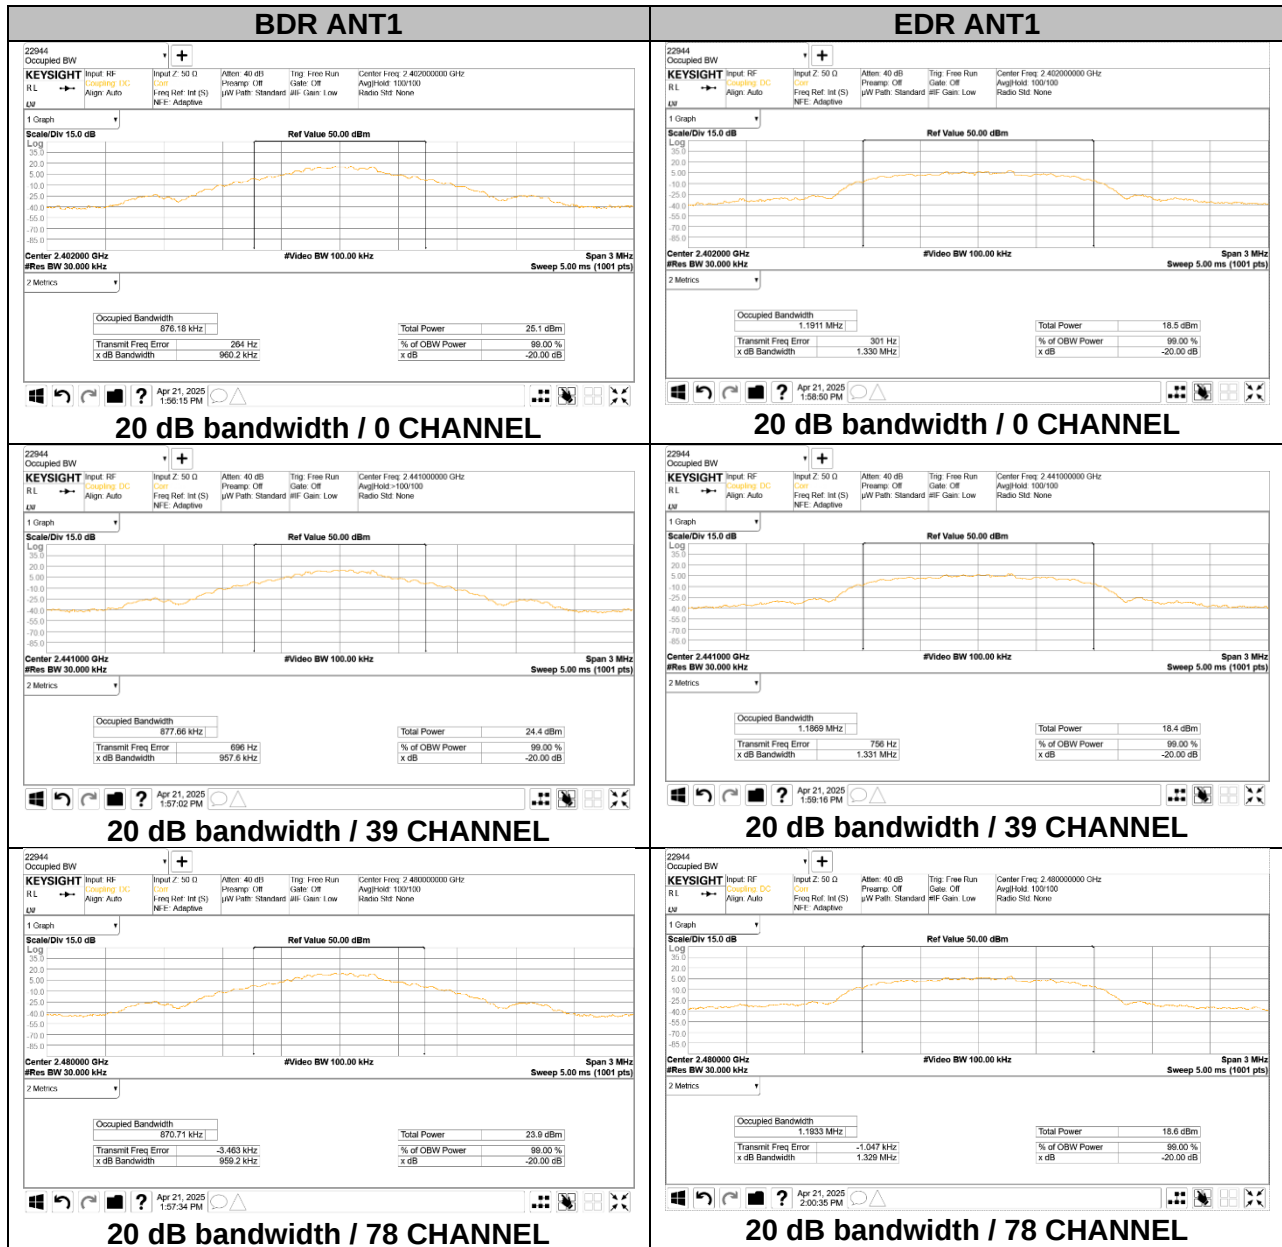

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. The VBW is set to $VBW \geq RBW$. The sweep time is coupled.

RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

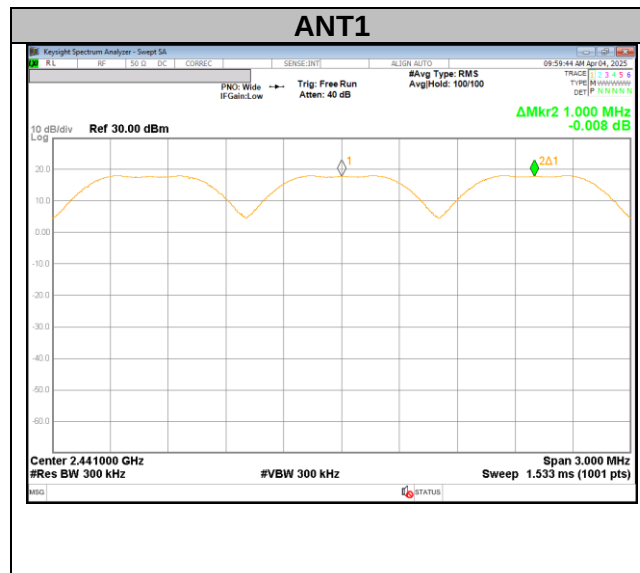

9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

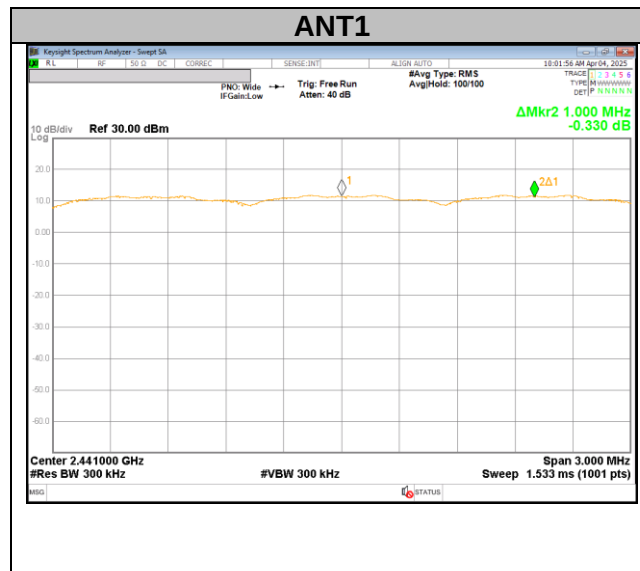

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. The analyzer is set to Max Hold.


RESULTS

Normal Mode: All Channels Observed

9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

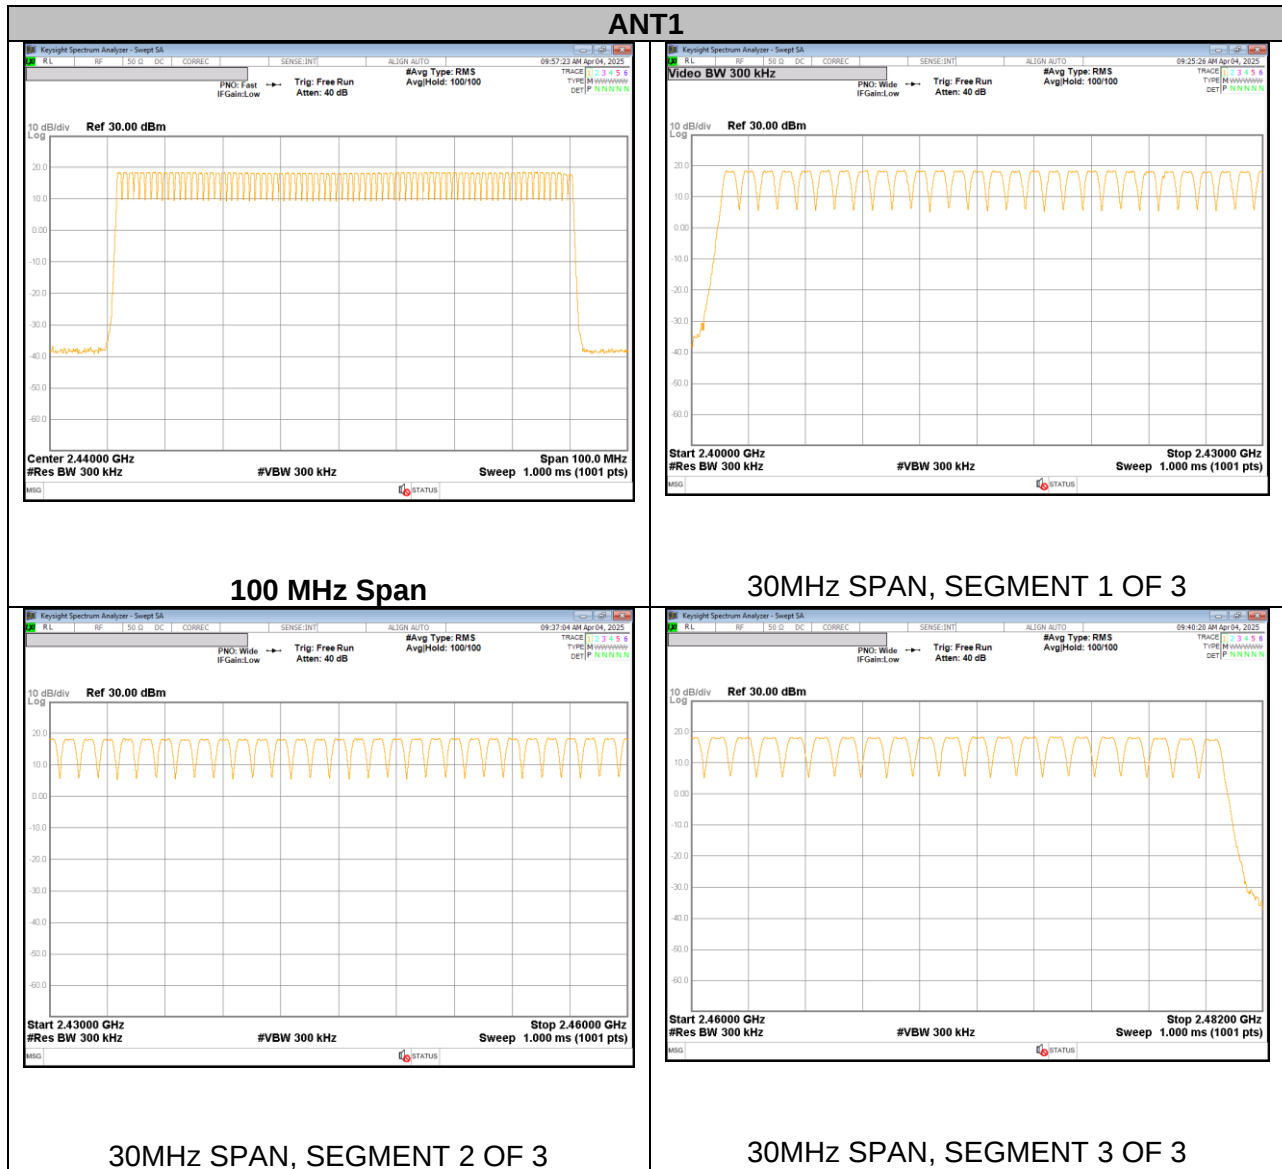

9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

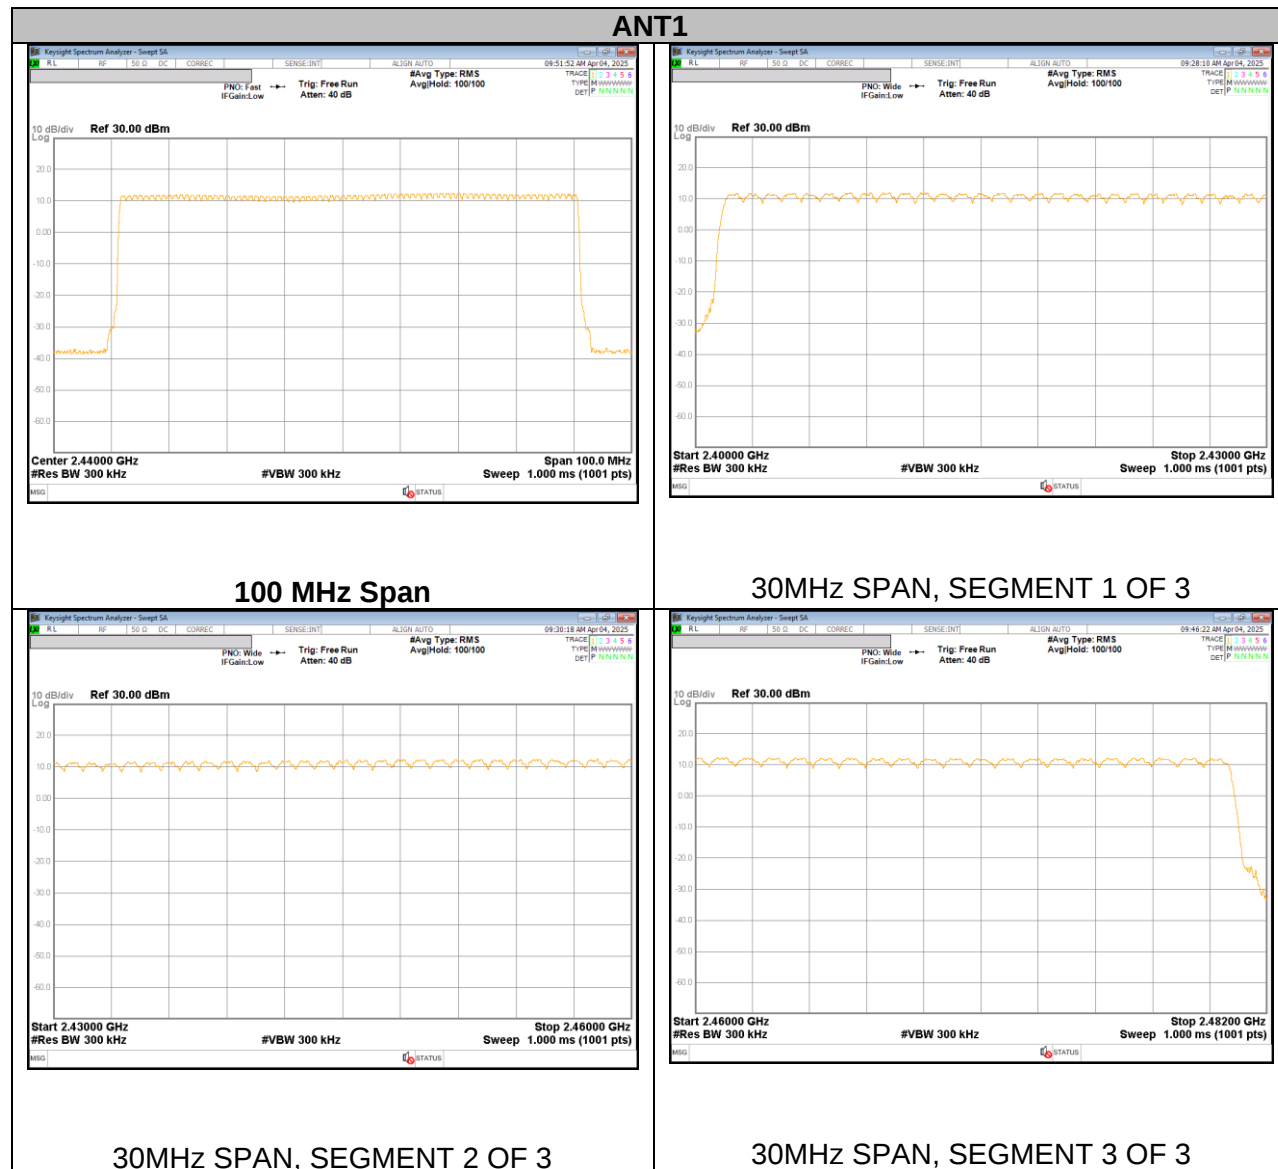

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS


9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal ANT1					
DH1	0.373	32	0.119	0.400	-0.281
DH3	1.626	16	0.260	0.400	-0.140
DH5	2.876	10	0.288	0.400	-0.112
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH ANT1					
DH1	0.373	8	0.030	0.400	-0.370
DH3	1.626	4	0.065	0.400	-0.335
DH5	2.876	3	0.086	0.400	-0.314

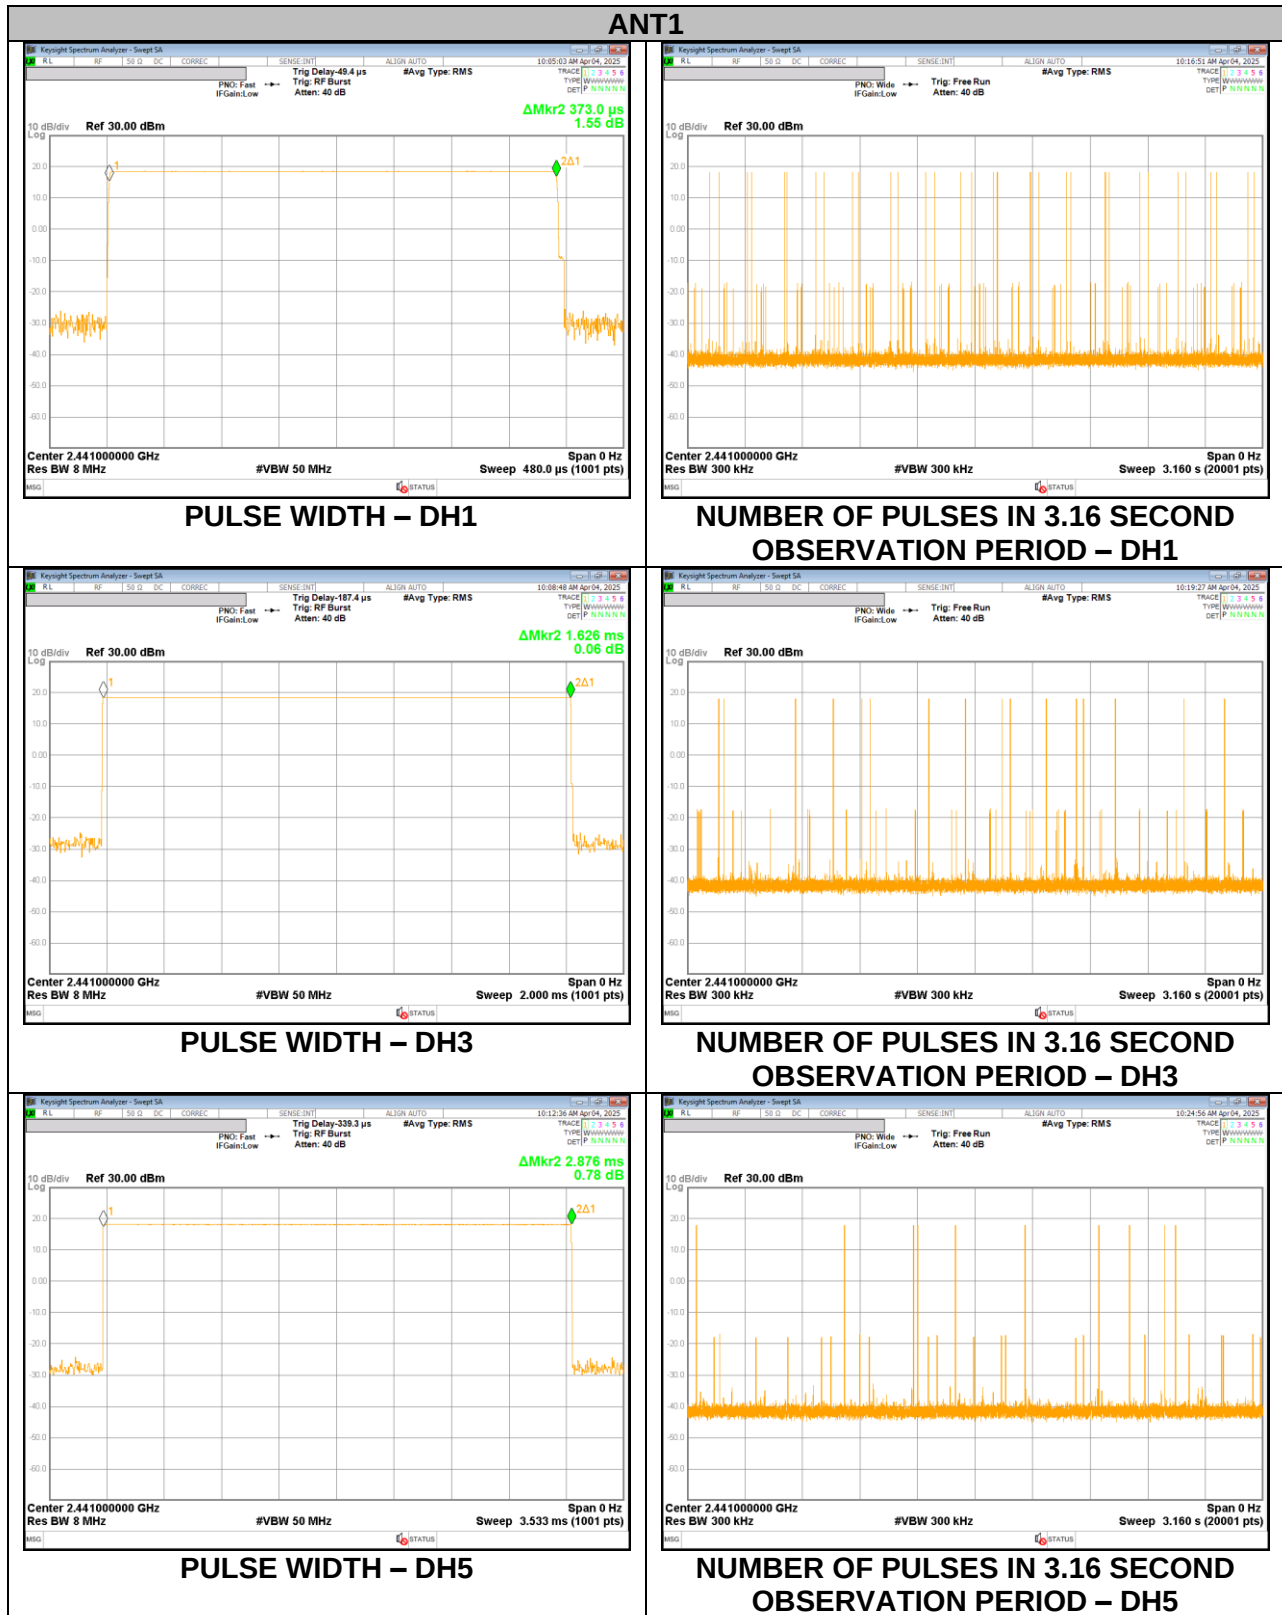

9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK Normal ANT1					
DH1	0.384	32	0.123	0.400	-0.277
DH3	1.628	16	0.260	0.400	-0.140
DH5	2.876	10	0.288	0.400	-0.112
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK AFH ANT1					
DH1	0.384	8	0.031	0.400	-0.369
DH3	1.628	4	0.065	0.400	-0.335
DH5	2.876	3	0.086	0.400	-0.314

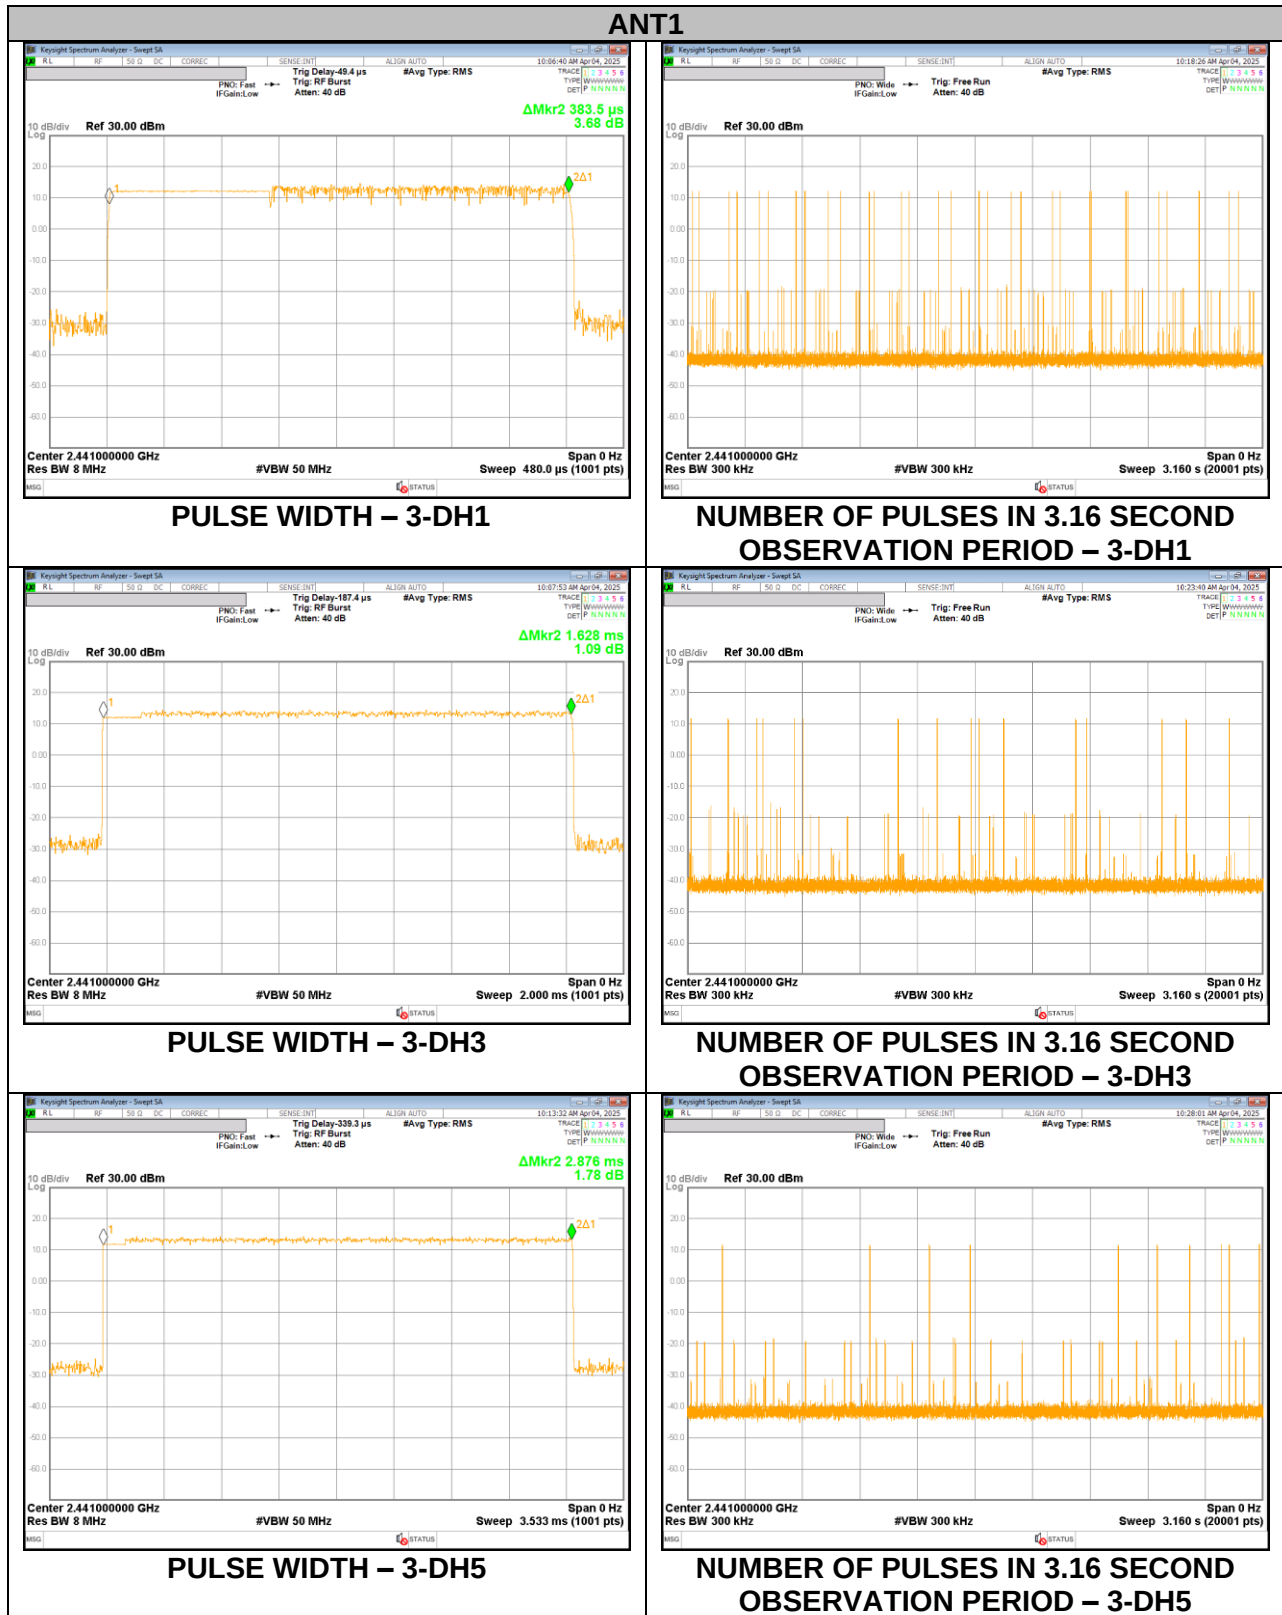

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

The correlated maximum antenna gain + Beamforming gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	18.609	21.00	-2.391
	39	2 441	18.194		-2.806
	78	2 480	17.671		-3.329
Worst			18.609		-2.391

9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	13.164	21.00	-7.836
	39	2 441	13.221		-7.779
	78	2 480	13.198		-7.802
Worst			13.221		-7.779


9.6.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	13.382	21.00	-7.618
	39	2 441	13.743		-7.257
	78	2 480	13.906		-7.094
Worst			13.906		-7.094

9.6.4. OUTPUT POWER PLOTS

PEAK OUTPUT POWER

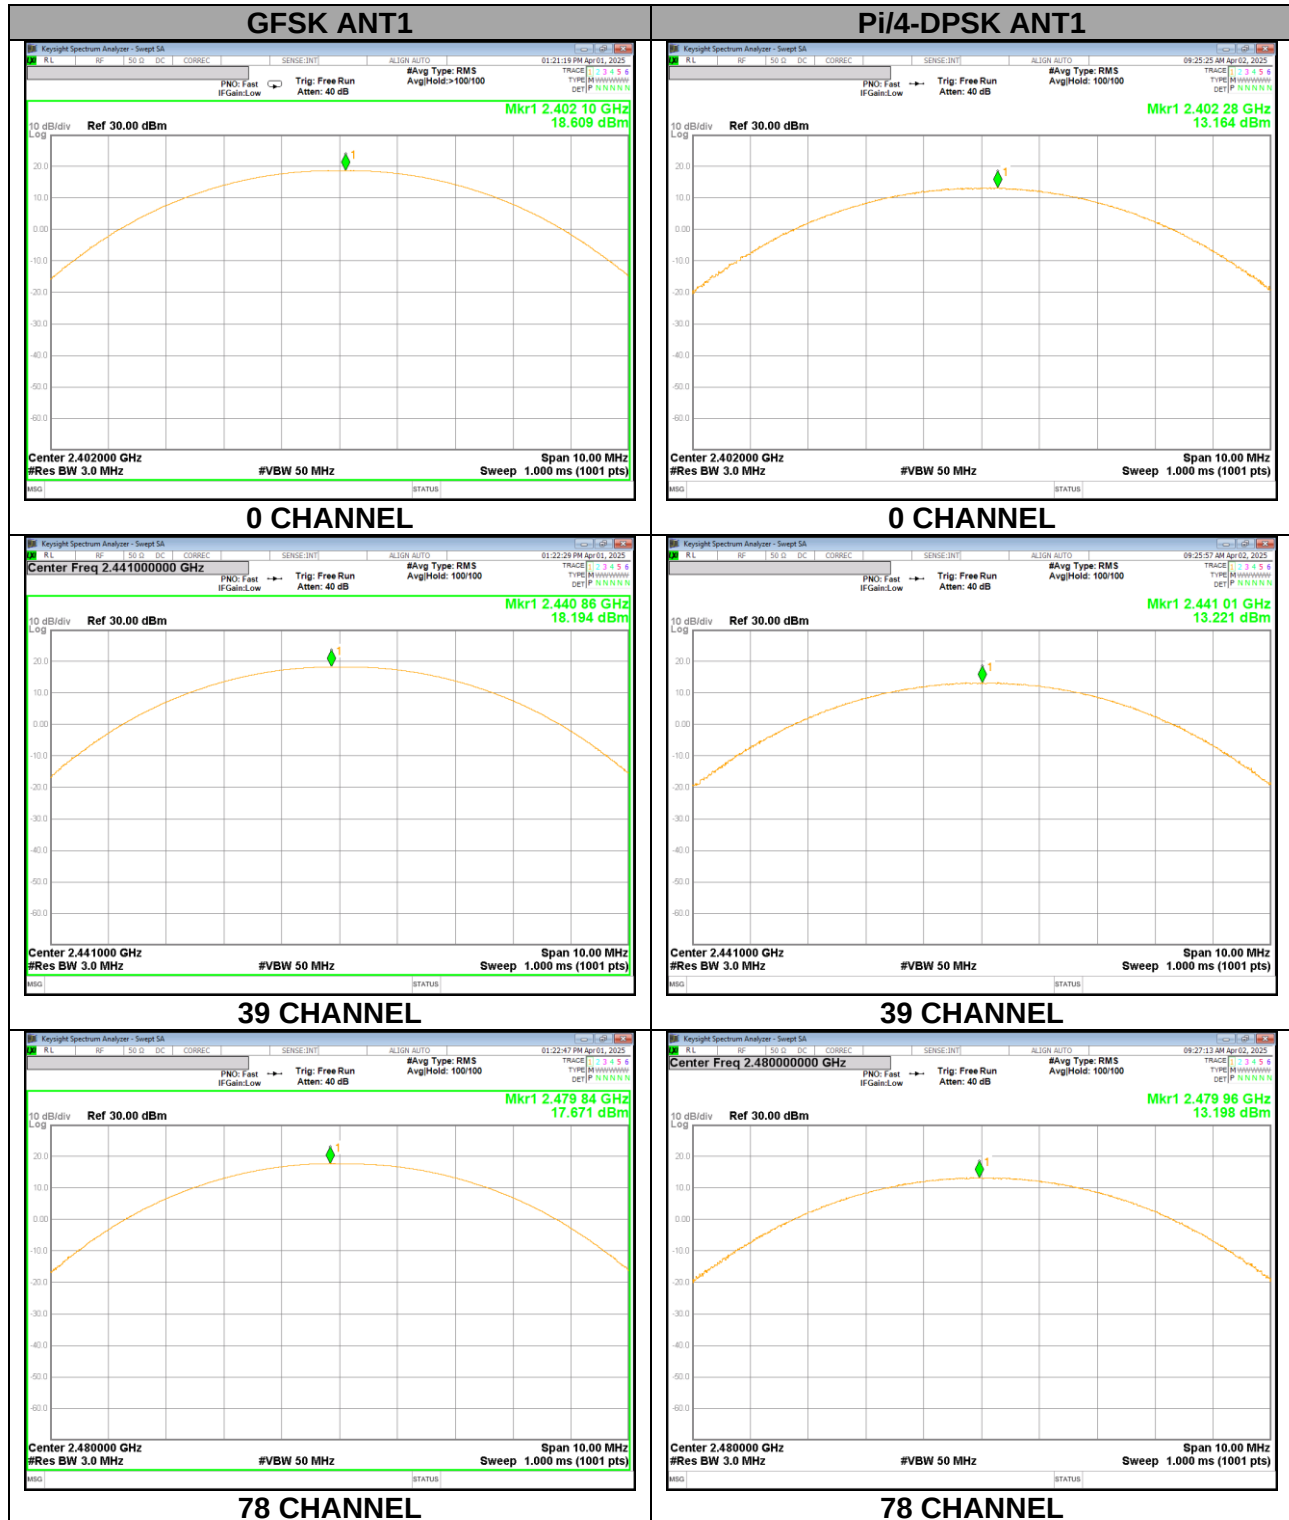

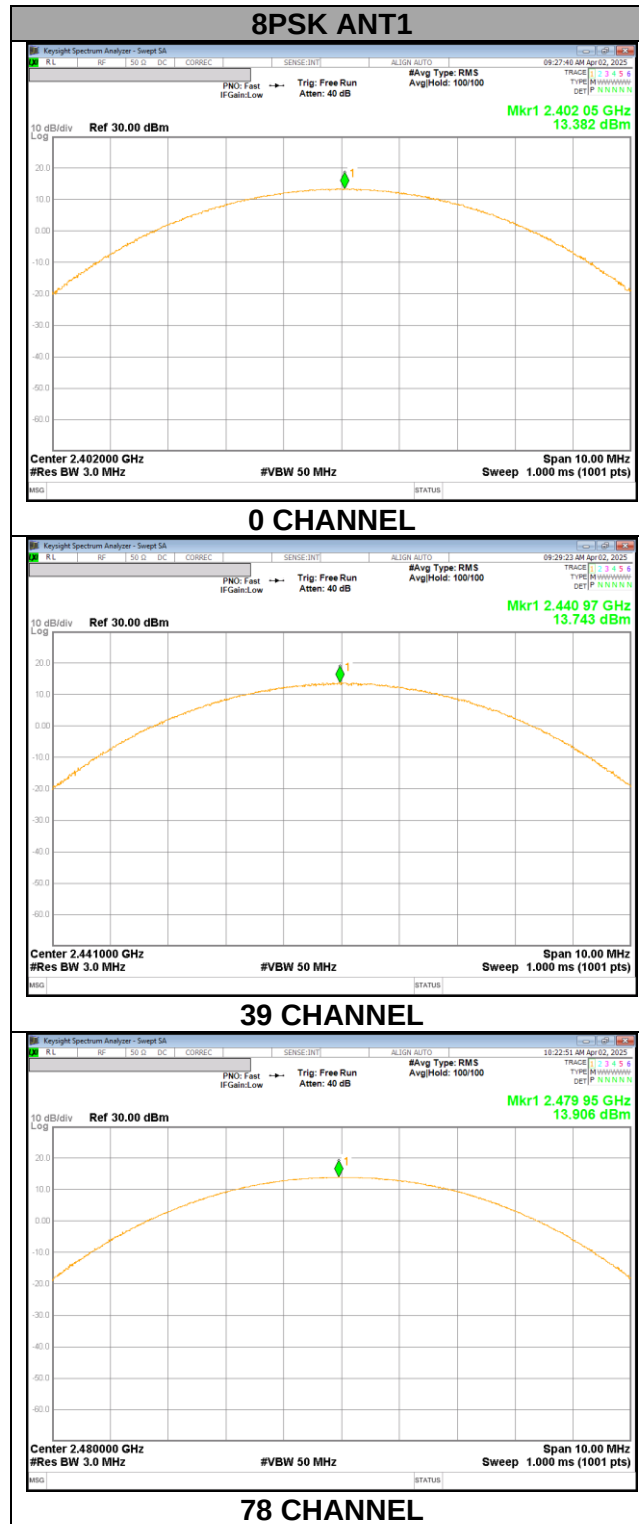

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.
The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.7.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	18.290	67.45
	39	2 441	18.093	64.46
	78	2 480	17.515	56.43

9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	10.455	11.10
	39	2 441	10.564	11.39
	78	2 480	10.621	11.54

9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	10.538	11.32
	39	2 441	10.578	11.42
	78	2 480	10.667	11.66

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, NON-HOPPING – ANT1




0 CHANNEL BANDEDGE

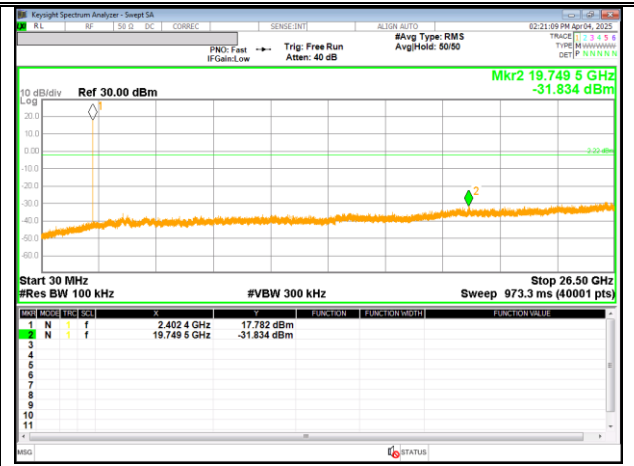


OUT-OF-BAND 0 CHANNEL




78 CHANNEL BANDEDGE

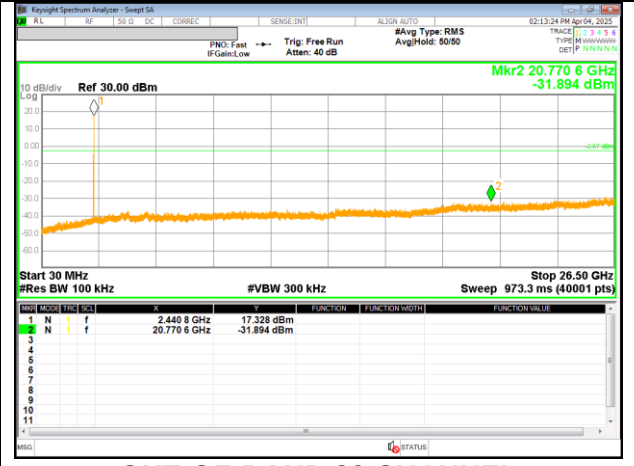

OUT-OF-BAND 39 CHANNEL


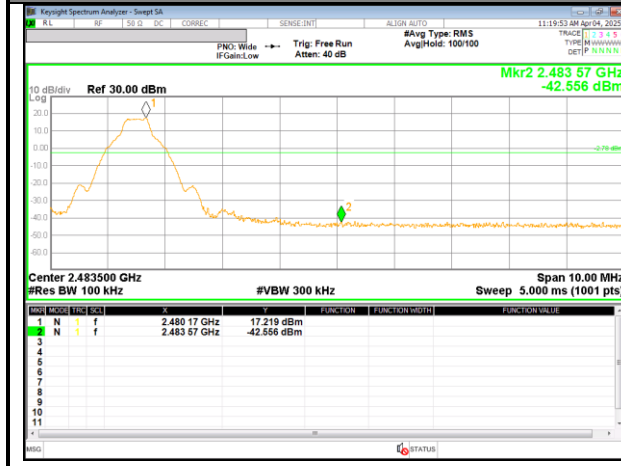


78 CHANNEL BANDEDGE

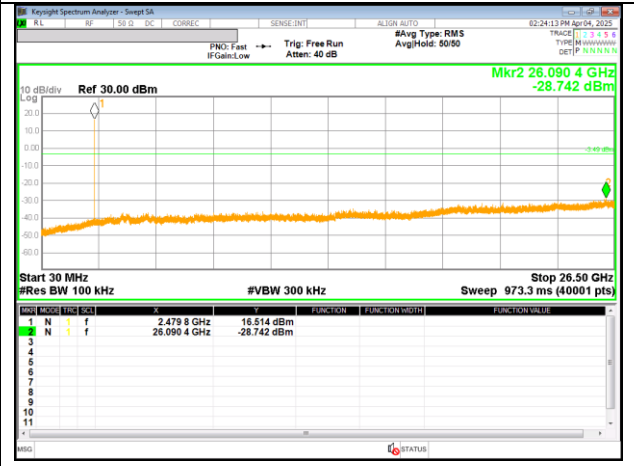


OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT1

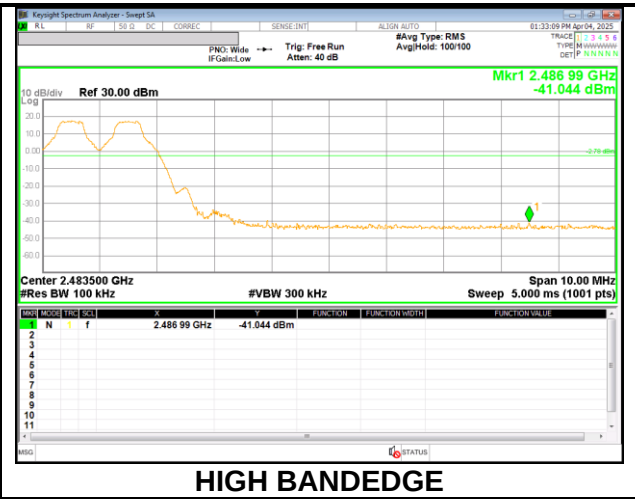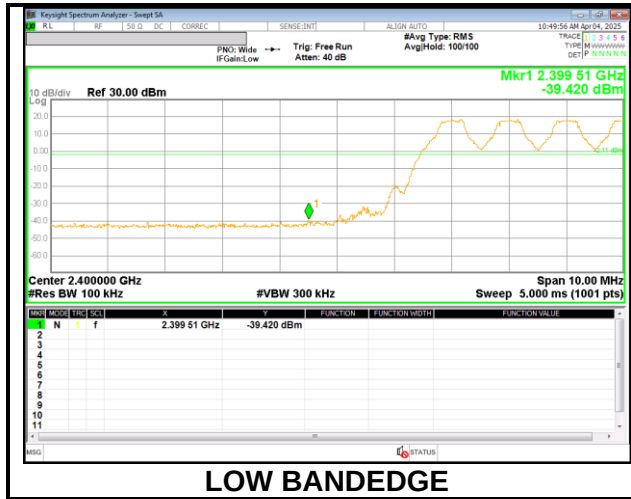


9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING – ANT1

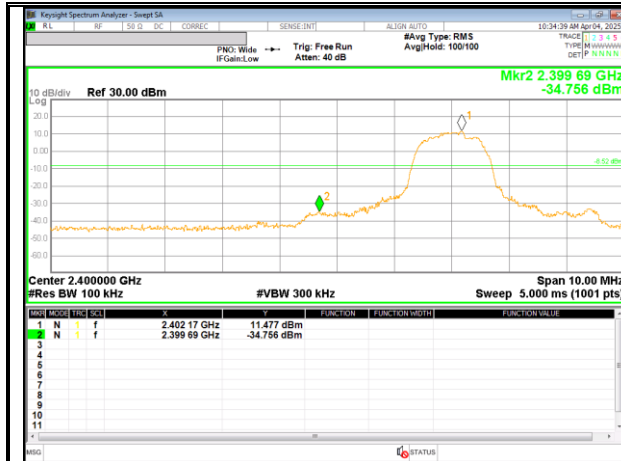


0 CHANNEL BANDEDGE

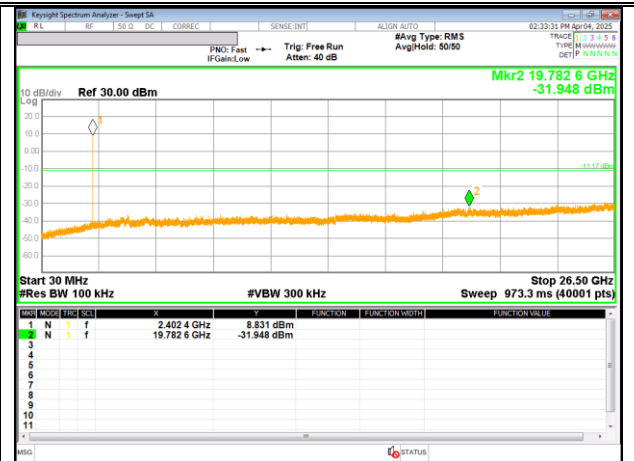


OUT-OF-BAND 0 CHANNEL



78 CHANNEL BANDEDGE

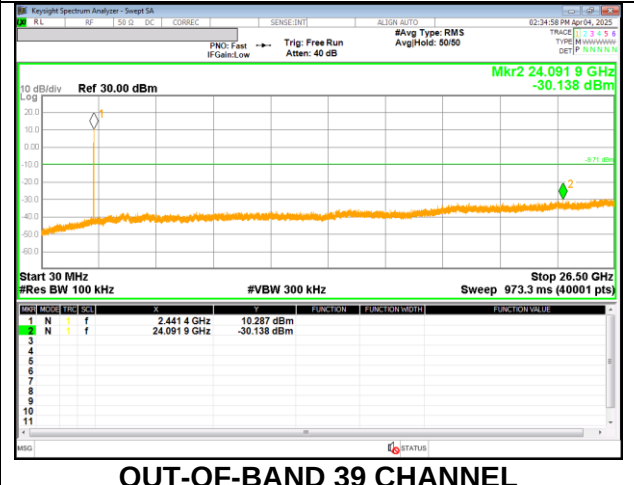


OUT-OF-BAND 39 CHANNEL

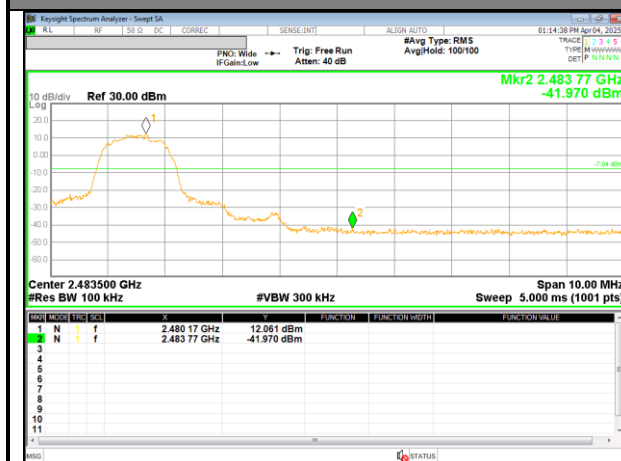

OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT1

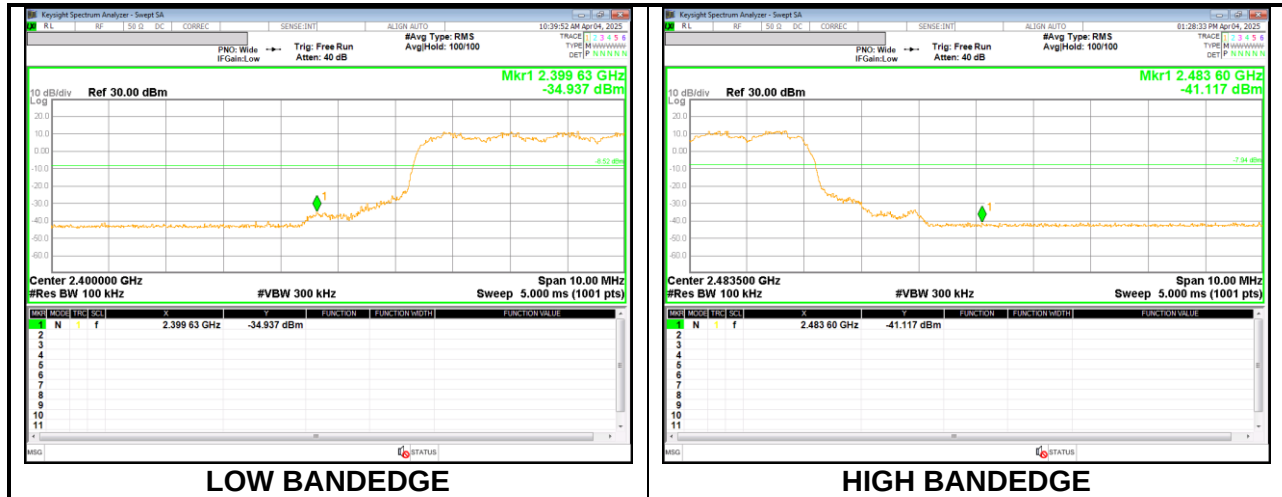

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements. (Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.00288\text{s} = 347\text{Hz}.$$

The minimum VBW was 347Hz, but test receiver(ESU40) couldn't set value 347Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open area test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

ANT1

BANDEDGE (WORST CASE: 78 CHANNEL, ANT1)

HORIZONTAL RESULT

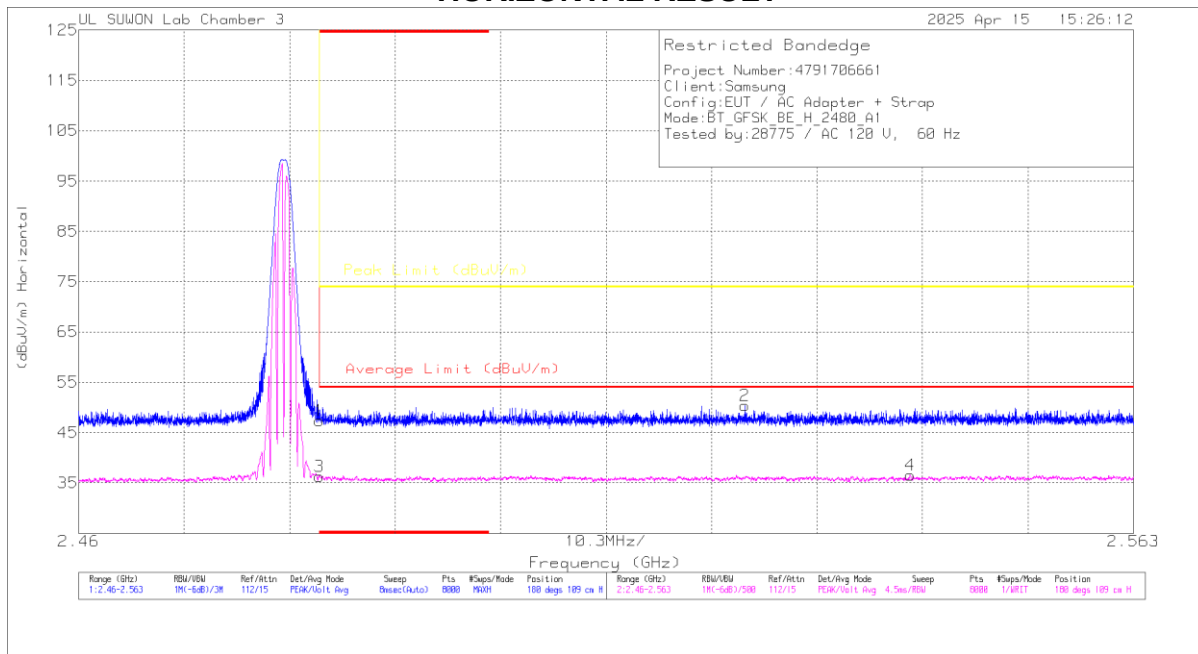

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_Factor (dB/m)	10dB_Path Loss(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	39.93	Pk	32.4	-24.9	47.43	-	-	74	-26.57	189	113	H
2	2.52508	42.65	Pk	32.4	-24.7	50.35	-	-	74	-23.65	189	113	H
3	* 2.4835	28.81	VA1T	32.4	-24.9	36.31	54	-17.69	-	-	189	113	H
4	2.5412	28.88	VA1T	32.4	-24.7	36.58	54	-17.42	-	-	189	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

BANDEDGE TEST DATA


Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB(1/m)]	Loss [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2402	ANT1	* 2.39	40.21	Pk	32.10	-24.90	47.41	-	-	74.00	-26.59	19	104	H
		* 2.3236	42.88	Pk	31.90	-25.10	49.68	-	-	74.00	-24.32	19	104	H
		* 2.39	27.91	VA1T	32.10	-24.90	35.11	54.00	-18.89	-	-	19	104	H
		* 2.37821	28.42	VA1T	32.10	-25.00	35.52	54.00	-18.48	-	-	19	104	H
		* 2.39	39.51	Pk	32.10	-24.90	46.71	-	-	74.00	-27.29	190	227	V
		* 2.38549	42.85	Pk	32.10	-25.00	49.95	-	-	74.00	-24.05	190	227	V
		* 2.39	27.71	VA1T	32.10	-24.90	34.91	54.00	-19.09	-	-	190	227	V
		* 2.38132	28.52	VA1T	32.10	-25.00	35.62	54.00	-18.38	-	-	190	227	V
		* 2.4835	39.93	Pk	32.40	-24.90	47.43	-	-	74.00	-26.57	189	113	H
2480	ANT1	2.525	42.65	Pk	32.40	-24.70	50.35	-	-	74.00	-23.65	189	113	H
		* 2.4835	28.81	VA1T	32.40	-24.90	36.31	54.00	-17.69	-	-	189	113	H
		2.541	28.88	VA1T	32.40	-24.70	36.58	54.00	-17.42	-	-	189	113	H
		* 2.4835	39.84	Pk	32.40	-24.90	47.34	-	-	74.00	-26.66	212	103	V
		2.546	42.70	Pk	32.40	-24.70	50.40	-	-	74.00	-23.60	212	103	V
		* 2.4835	27.99	VA1T	32.40	-24.90	35.49	54.00	-18.51	-	-	212	103	V
		2.526	28.86	VA1T	32.40	-24.70	36.56	54.00	-17.44	-	-	212	103	V

Note1. Pk - Peak detector, VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration


Note2. * - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

HARMONICS AND SPURIOUS EMISSIONS (WORST CASE: 39 CHANNEL, ANT1)

39 CHANNEL RESULTS

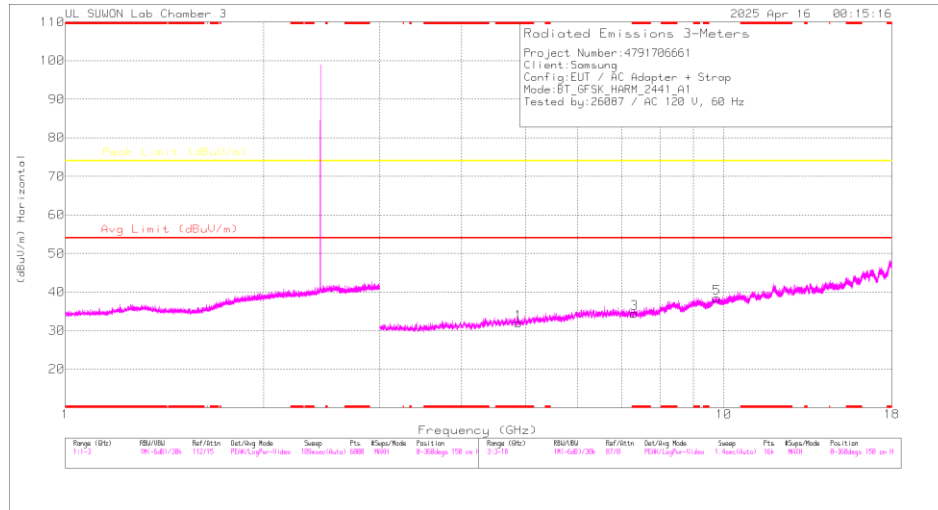

HORIZONTAL

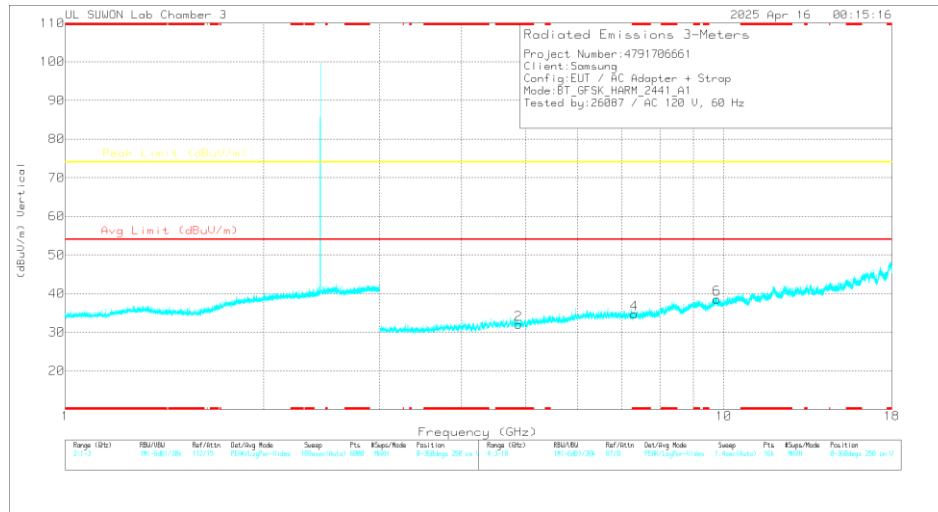

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_Factor (dB/m)	3GHz_HP_Pat h Loss(dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.8822	38.67	PKFH	34.2	-30.6	42.27	-	-	74	-31.73	193	285	H
* 4.88191	24.74	VA1T	34.2	-30.6	28.34	54	-25.66	-	-	193	285	H
* 4.88191	37.74	PKFH	34.2	-30.6	41.34	-	-	74	-32.66	163	130	V
* 4.88188	24.79	VA1T	34.2	-30.6	28.39	54	-25.61	-	-	163	130	V
* 7.32329	32.84	PKFH	35.8	-25	43.64	-	-	74	-30.36	0	100	H
* 7.32306	33.72	PKFH	35.8	-25	44.52	-	-	74	-29.48	0	100	V
9.7676	30.96	PKFH	36.9	-21.3	46.56	-	-	74	-27.44	0	100	H
9.76714	31.15	PKFH	36.9	-21.3	46.75	-	-	74	-27.25	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB(1/m)]	Loss [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2402	ANT1	* 4.80731	37.07	PKFH	34.30	-29.80	41.57	-	-	74.00	-32.43	0	100	H
		* 4.80292	37.06	PKFH	34.30	-29.80	41.56	-	-	74.00	-32.44	0	100	V
		7.211	33.42	PKFH	35.80	-25.80	43.42	-	-	74.00	-30.58	0	100	H
		7.202	32.94	PKFH	35.80	-25.70	43.04	-	-	74.00	-30.96	0	100	V
		9.613	30.91	PKFH	36.70	-21.70	45.91	-	-	74.00	-28.09	0	100	H
		9.607	31.41	PKFH	36.70	-21.60	46.51	-	-	74.00	-27.49	0	100	V
2441	ANT1	* 4.8822	38.67	PKFH	34.20	-30.60	42.27	-	-	74.00	-31.73	193	285	H
		* 4.88191	24.74	VA1T	34.20	-30.60	28.34	54.00	-25.66	-	-	193	285	H
		* 4.88191	37.74	PKFH	34.20	-30.60	41.34	-	-	74.00	-32.66	163	130	V
		* 4.88188	24.79	VA1T	34.20	-30.60	28.39	54.00	-25.61	-	-	163	130	V
		* 7.32329	32.84	PKFH	35.80	-25.00	43.64	-	-	74.00	-30.36	0	100	H
		* 7.32306	33.72	PKFH	35.80	-25.00	44.52	-	-	74.00	-29.48	0	100	V
		9.768	30.96	PKFH	36.90	-21.30	46.56	-	-	74.00	-27.44	0	100	H
		9.767	31.15	PKFH	36.90	-21.30	46.75	-	-	74.00	-27.25	0	100	V
2480	ANT1	* 4.95622	37.00	PKFH	34.30	-30.30	41.00	-	-	74.00	-33.00	0	100	H
		* 4.95934	37.12	PKFH	34.30	-30.40	41.02	-	-	74.00	-32.98	0	100	V
		* 7.43932	32.69	PKFH	35.70	-25.00	43.39	-	-	74.00	-30.61	0	100	H
		* 7.4448	33.63	PKFH	35.70	-25.10	44.23	-	-	74.00	-29.77	0	100	V
		9.918	30.61	PKFH	37.10	-21.30	46.41	-	-	74.00	-27.59	0	100	H
		9.919	31.09	PKFH	37.10	-21.30	46.89	-	-	74.00	-27.11	0	100	V


* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak
VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK
MODULATION

ANT1
BANDEDGE (WORST CASE: 78 CHANNEL, ANT1)

VERTICAL RESULT

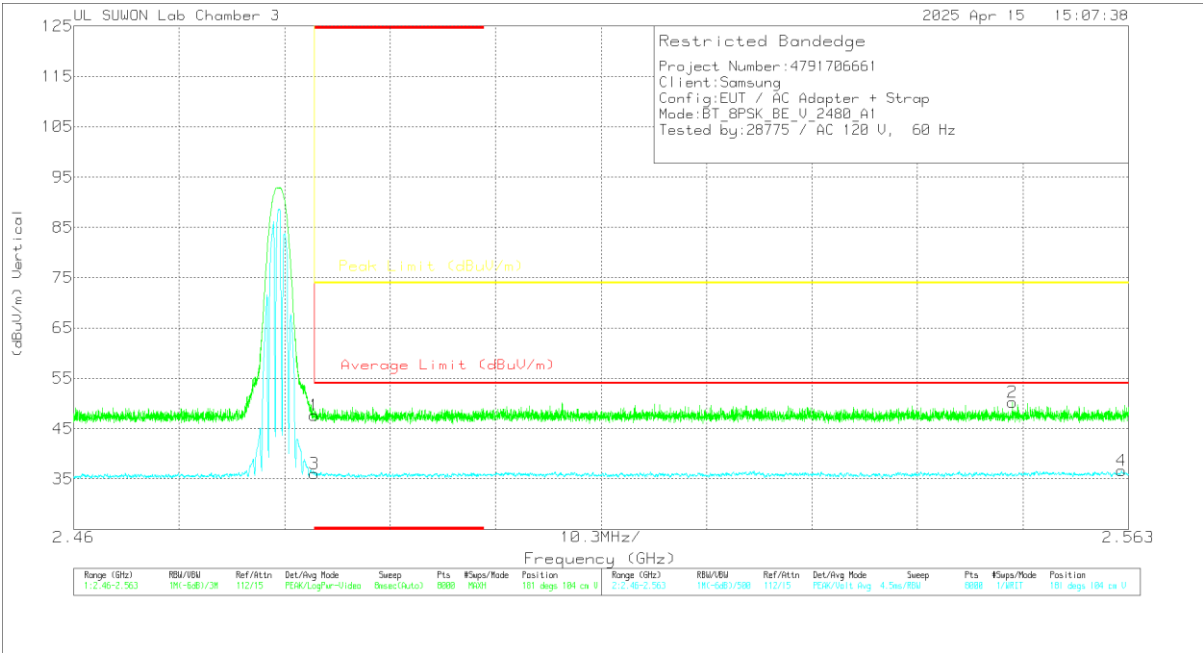

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna_Factor (dB/m)	10dB_Path Loss(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	40.15	Pk	32.4	-24.9	47.65	-	-	74	-26.35	181	104	V
2	2.55166	42.61	Pk	32.4	-24.8	50.21	-	-	74	-23.79	181	104	V
3	* 2.4835	28.57	VA1T	32.4	-24.9	36.07	54	-17.93	-	-	181	104	V
4	2.56231	29.02	VA1T	32.4	-24.8	36.62	54	-17.38	-	-	181	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

BANDEDGE TEST DATA


Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB(1/m)]	Loss [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2402	ANT1	* 2.39	39.24	Pk	32.10	-24.90	46.44	-	-	74.00	-27.56	19	104	H
		* 2.38765	42.47	Pk	32.10	-25.10	49.47	-	-	74.00	-24.53	19	104	H
		* 2.39	27.93	VA1T	32.10	-24.90	35.13	54.00	-18.87	-	-	19	104	H
		* 2.38434	28.53	VA1T	32.10	-25.00	35.63	54.00	-18.37	-	-	19	104	H
		* 2.39	39.98	Pk	32.10	-24.90	47.18	-	-	74.00	-26.82	2	109	V
		* 2.38209	42.68	Pk	32.10	-25.00	49.78	-	-	74.00	-24.22	2	109	V
		* 2.39	27.40	VA1T	32.10	-24.90	34.60	54.00	-19.40	-	-	2	109	V
		* 2.38377	28.46	VA1T	32.10	-25.00	35.56	54.00	-18.44	-	-	2	109	V
2480	ANT1	* 2.4835	41.31	Pk	32.40	-24.90	48.81	-	-	74.00	-25.19	180	109	H
		2.502	42.83	Pk	32.40	-24.70	50.53	-	-	74.00	-23.47	180	109	H
		* 2.4835	28.65	VA1T	32.40	-24.90	36.15	54.00	-17.85	-	-	180	109	H
		2.561	28.87	VA1T	32.40	-24.70	36.57	54.00	-17.43	-	-	180	109	H
		* 2.4835	40.15	Pk	32.40	-24.90	47.65	-	-	74.00	-26.35	181	104	V
		2.552	42.61	Pk	32.40	-24.80	50.21	-	-	74.00	-23.79	181	104	V
		* 2.4835	28.57	VA1T	32.40	-24.90	36.07	54.00	-17.93	-	-	181	104	V
		2.562	29.02	VA1T	32.40	-24.80	36.62	54.00	-17.38	-	-	181	104	V

Note1. Pk - Peak detector, VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration


Note2. * - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

HARMONICS AND SPURIOUS EMISSIONS (WORST CASE: 39 CHANNEL, ANT1)

39 CHANNEL RESULTS

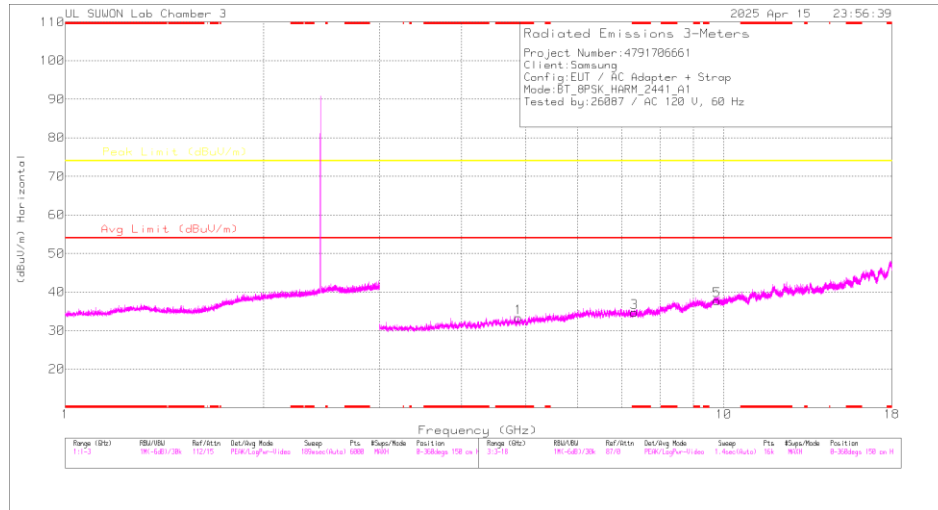

HORIZONTAL

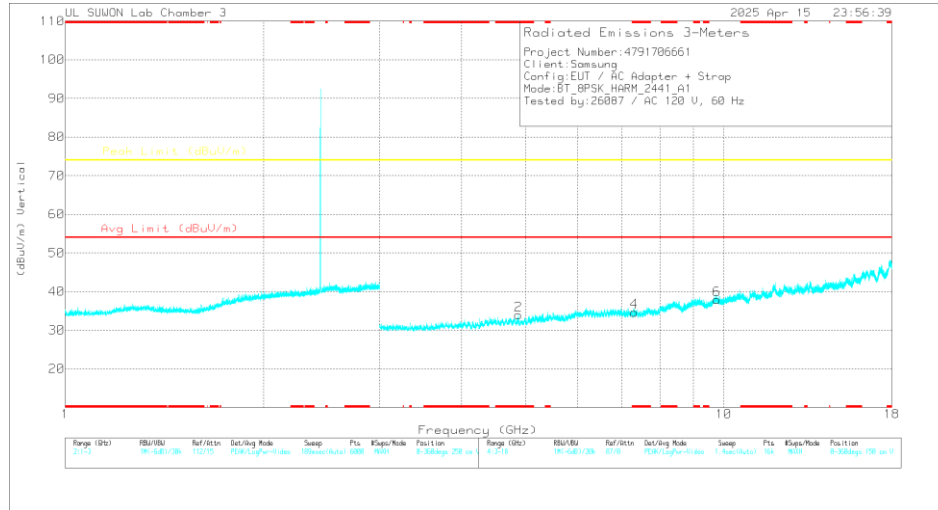

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Factor (dB/m)	3GHz_HP_Pat h Loss(dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88192	38.72	PKFH	34.2	-30.6	42.32	-	-	74	-31.68	176	382	H
* 4.88194	26.21	VA1T	34.2	-30.6	29.81	54	-24.19	-	-	176	382	H
* 4.8821	38.61	PKFH	34.2	-30.6	42.21	-	-	74	-31.79	159	100	V
* 4.88201	25.88	VA1T	34.2	-30.6	29.48	54	-24.52	-	-	159	100	V
* 7.32092	32.98	PKFH	35.8	-25.1	43.68	-	-	74	-30.32	0	100	H
* 7.31923	32.96	PKFH	35.8	-25.2	43.56	-	-	74	-30.44	0	100	V
9.75978	31.32	PKFH	36.9	-21.3	46.92	-	-	74	-27.08	0	100	H
9.76649	31.49	PKFH	36.9	-21.2	47.19	-	-	74	-26.81	0	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB(1/m)]	Loss [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2402	ANT1	* 4.80473	38.35	PKFH	34.30	-29.80	42.85	-	-	74.00	-31.15	171	327	H
		* 4.80401	24.98	VA1T	34.30	-29.80	29.48	54.00	-24.52	-	-	171	327	H
		* 4.80402	38.09	PKFH	34.30	-29.80	42.59	-	-	74.00	-31.41	160	117	V
		* 4.80407	25.02	VA1T	34.30	-29.80	29.52	54.00	-24.48	-	-	160	117	V
		7.203	33.66	PKFH	35.80	-25.70	43.76	-	-	74.00	-30.24	0	100	H
		7.209	33.11	PKFH	35.80	-25.80	43.11	-	-	74.00	-30.89	0	100	V
		9.603	31.23	PKFH	36.70	-21.70	46.23	-	-	74.00	-27.77	0	100	H
		9.608	31.91	PKFH	36.70	-21.70	46.91	-	-	74.00	-27.09	0	100	V
2441	ANT1	* 4.88192	38.72	PKFH	34.20	-30.60	42.32	-	-	74.00	-31.68	176	382	H
		* 4.88194	26.21	VA1T	34.20	-30.60	29.81	54.00	-24.19	-	-	176	382	H
		* 4.8821	38.61	PKFH	34.20	-30.60	42.21	-	-	74.00	-31.79	159	100	V
		* 4.88201	25.88	VA1T	34.20	-30.60	29.48	54.00	-24.52	-	-	159	100	V
		* 7.32092	32.98	PKFH	35.80	-25.10	43.68	-	-	74.00	-30.32	0	100	H
		* 7.31923	32.96	PKFH	35.80	-25.20	43.56	-	-	74.00	-30.44	0	100	V
		9.760	31.32	PKFH	36.90	-21.30	46.92	-	-	74.00	-27.08	0	100	H
		9.766	31.49	PKFH	36.90	-21.20	47.19	-	-	74.00	-26.81	0	100	V
2480	ANT1	* 4.96077	37.89	PKFH	34.30	-30.30	41.89	-	-	74.00	-32.11	187	389	H
		* 4.95987	25.45	VA1T	34.30	-30.40	29.35	54.00	-24.65	-	-	187	389	H
		* 4.96024	37.71	PKFH	34.30	-30.30	41.71	-	-	74.00	-32.29	153	110	V
		* 4.96006	24.72	VA1T	34.30	-30.40	28.62	54.00	-25.38	-	-	153	110	V
		* 7.43786	32.73	PKFH	35.70	-25.00	43.43	-	-	74.00	-30.57	0	100	H
		* 7.44358	32.60	PKFH	35.70	-25.00	43.30	-	-	74.00	-30.70	0	100	V
		9.922	30.54	PKFH	37.10	-21.30	46.34	-	-	74.00	-27.66	0	100	H
		9.919	31.06	PKFH	37.10	-21.30	46.86	-	-	74.00	-27.14	0	100	V


* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

10.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

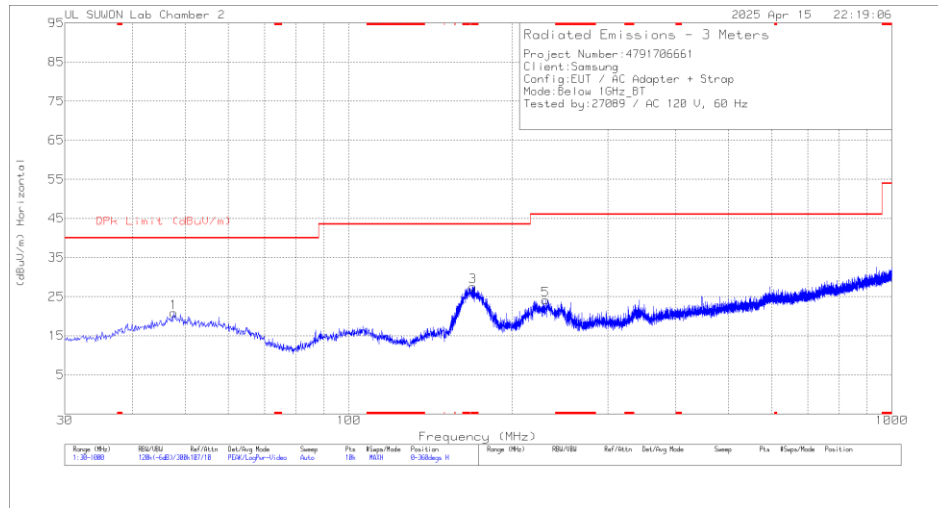

HORIZONTAL

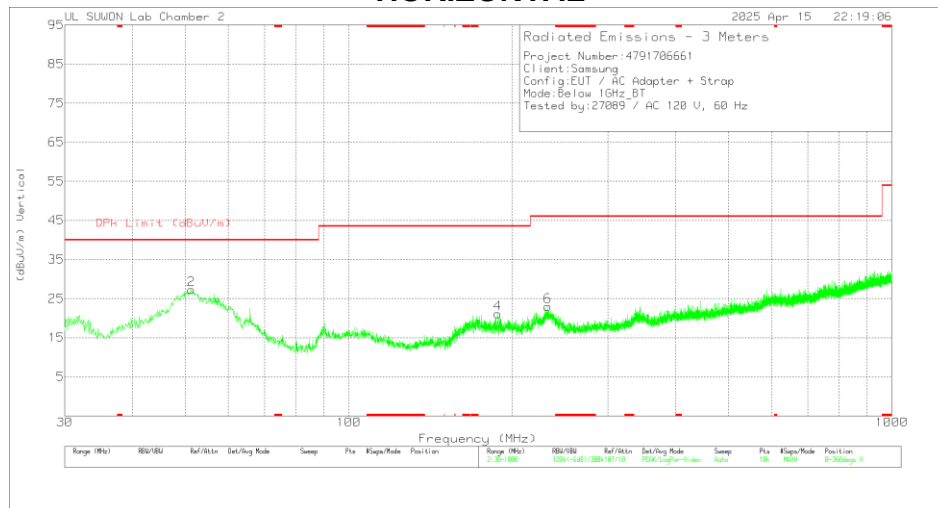

VERTICAL

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Factor (dB/m)	Below 1G_Path Loss(dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	47.654	32.72	Pk	19.7	-31.6	20.82	40	-19.18	0-360	100	H
3	* 169.389	44	Pk	14.4	-30.9	27.5	43.52	-16.02	0-360	100	H
5	230.305	37.2	Pk	17.6	-30.7	24.1	46.02	-21.92	0-360	100	H
2	51.34	39.33	Pk	19.7	-31.7	27.33	40	-12.67	0-360	100	V
4	188.11	35.88	Pk	16.1	-30.9	21.08	43.52	-22.44	0-360	100	V
6	232.827	36.02	Pk	17.7	-30.7	23.02	46.02	-23	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10:2020.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC Power Line

LINE 1 RESULTS

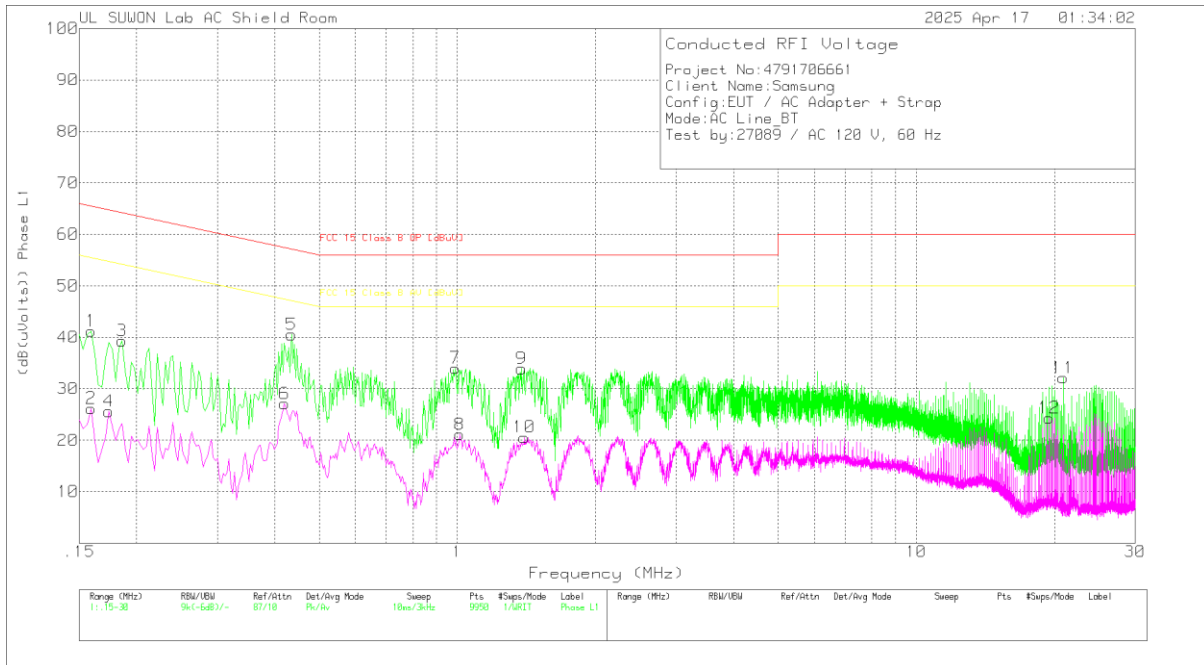

Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.159	31.32	Pk	9.8	.1	41.22	65.52	-24.3	-	-
2	.159	16.26	Av	9.8	.1	26.16	-	-	55.52	-29.36
3	.186	29.31	Pk	9.9	.1	39.31	64.21	-24.9	-	-
4	.174	15.51	Av	10	.1	25.61	-	-	54.77	-29.16
5	.435	30.63	Pk	9.8	.1	40.53	57.16	-16.63	-	-
6	.42	17.22	Av	9.8	.1	27.12	-	-	47.45	-20.33
7	.99	24.09	Pk	9.8	.1	33.99	56	-22.01	-	-
8	1.011	11.32	Av	9.7	.1	21.12	-	-	46	-24.88
9	1.38	24.12	Pk	9.7	.1	33.92	56	-22.08	-	-
10	1.398	10.77	Av	9.7	.1	20.57	-	-	46	-25.43
11	20.904	21.63	Pk	10.2	.3	32.13	60	-27.87	-	-
12	19.455	13.81	Av	10.2	.3	24.31	-	-	50	-25.69

Pk - Peak detector

Av - Average detection

LINE 2 RESULTS

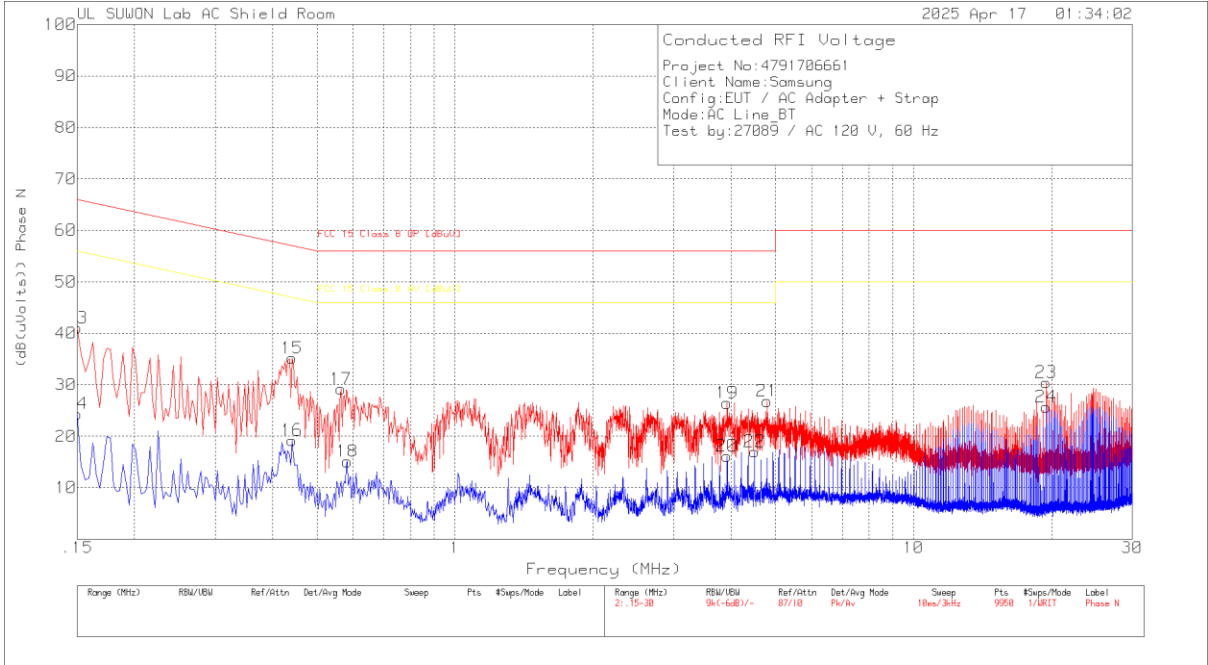

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.15	31.24	Pk	9.7	.1	41.04	66	-24.96	-	-
14	.15	14.57	Av	9.7	.1	24.37	-	-	56	-31.63
15	.441	25.27	Pk	9.8	.1	35.17	57.04	-21.87	-	-
16	.441	9.28	Av	9.8	.1	19.18	-	-	47.04	-27.86
17	.564	19.3	Pk	9.8	.1	29.2	56	-26.8	-	-
18	.582	5.19	Av	9.8	.1	15.09	-	-	46	-30.91
19	3.921	16.66	Pk	9.7	.1	26.46	56	-29.54	-	-
20	3.921	6.36	Av	9.7	.1	16.16	-	-	46	-29.84
21	4.794	16.82	Pk	9.8	.2	26.82	56	-29.18	-	-
22	4.503	7.09	Av	9.7	.2	16.99	-	-	46	-29.01
23	19.458	19.94	Pk	10.2	.3	30.44	60	-29.56	-	-
24	19.458	15.19	Av	10.2	.3	25.69	-	-	50	-24.31

Pk - Peak detector

Av - Average detection

END OF TEST REPORT