



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

The model FCC ID: PY7-PM0792 shares the same enclosure and circuit board as model FCC ID: PY7-PM0791. The WLAN/Bluetooth circuitry and layout, including antenna, are identical between the two units. The WLAN/Bluetooth antenna and surrounding circuitry are the same between these two units, and tune up power targets are identical for WLAN and Bluetooth operations. For this reason the SAR data for the WLAN and Bluetooth operations for FCC ID: PY7-PM0792 is considered representative for FCC ID: PY7-PM0791.

For

GSM/W-CDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ & NFC

FCC ID: PY7-PM0791

**Report Number: 15J20225-S1A
Issue Date: 5/8/2015**

Prepared for

**SONY MOBILE COMMUNICATIONS INC.
NYA VATTENTORNET MOBILVAGEN 10
LUND 22188
SWEDEN**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	5/8/2015	Initial Issue	--
A	5/8/2015	Section 4.3: Fixed Typo	Coltyce Sanders

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System.....</i>	7
4.2.	<i>SAR Scan Procedures.....</i>	8
4.3.	<i>Test Equipment.....</i>	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	<i>DUT Description</i>	12
6.2.	<i>Wireless Technologies.....</i>	12
6.3.	<i>Nominal and Maximum Output Power.....</i>	13
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	15
7.	RF Exposure Conditions (Test Configurations).....	17
8.	Dielectric Property Measurements & System Check	18
8.1.	<i>Dielectric Property Measurements</i>	18
8.2.	<i>System Check.....</i>	21
9.	Conducted Output Power Measurements.....	24
9.1.	<i>GSM</i>	24
9.2.	<i>W-CDMA</i>	27
9.4.	<i>LTE.....</i>	31
9.5.	<i>WLAN and BT.....</i>	41
10.	Measured and Reported (Scaled) SAR Results.....	42
10.1.	<i>GSM850.....</i>	43
10.2.	<i>GSM1900.....</i>	43
10.3.	<i>W-CDMA Band V</i>	44
10.4.	<i>W-CDMA Band II.....</i>	44
10.5.	<i>LTE Band 2 (20MHz Bandwidth)</i>	45
10.6.	<i>LTE Band 4 (20MHz Bandwidth)</i>	45
10.7.	<i>LTE Band 5 (10MHz Bandwidth)</i>	46
10.8.	<i>LTE Band 7 (20MHz Bandwidth)</i>	47
10.9.	<i>LTE Band 12 (10MHz Bandwidth)</i>	48
10.10.	<i>LTE Band 17 (10MHz Bandwidth)</i>	48

10.11. WLAN and Bluetooth.....	48
11. SAR Measurement Variability.....	49
12. Simultaneous Transmission SAR Analysis.....	50
12.1. Sum of the SAR for WWAN & Wi-Fi & BT.....	50
Appendixes	51
A_15J20225v0 SAR Photos & Ant. Locations	51
B_15J20225v0 SAR System Check Plots.....	51
C_15J20225v0 SAR Highest Test Plots	51
D_15J20225v0 SAR Tissue Ingredients	51
E_15J20225v0 SAR Probe Cal. Certificates.....	51
F_15J20225v0 SAR Dipole Cal. Certificates	51

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS, INC.				
FCC ID	PY7-PM0791				
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013				
SAR Limits (W/Kg)					
Exposure Category	Peak spatial-average(1g of tissue)				
General population / Uncontrolled exposure	1.6				
The Highest Reported SAR (W/kg)					
RF Exposure Conditions	Equipment Class				
	Licensed	DTS	U-NII	DSS (BT)	
Head	0.706	0.355	0.524	N/A	
Body-worn	0.620	0.156	0.087		
Hotspot/Wi-Fi Direct	1.384				
Simultaneous Tx	1.540	1.540	1.471		
Date Tested	4/13/2015 to 4/28/2015				
Test Results	Pass				
Note: The Wi-Fi (DTS/U-NII) and Bluetooth SAR measurement results from the original filling can be found in SAR test report 15J20224-S1A, FCC ID: PY7-PM0792. The Wi-Fi and Bluetooth results from the original filling were used for Simultaneous Transmission Analysis purposes. Both models contain identical Wi-Fi/BT modules and antennas. Spot checks for 802.11b/n/ac were performed to ensure that the SAR measurements for both devices are the same.					
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.					
Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.					
Approved & Released By:		Prepared By:			
					
David Weaver Program Manager UL Verification Services Inc.		Coltyce Sanders Laboratory Engineer UL Verification Services Inc.			

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 SAR meas for 802.11 v02
- 447498 D01 General RF Exposure Guidance v05r02
- 447498 D03 Supplement C Cross-Reference
- 648474 D04 Handset SAR v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r01
- 941225 D06 Hotspot Mode v02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

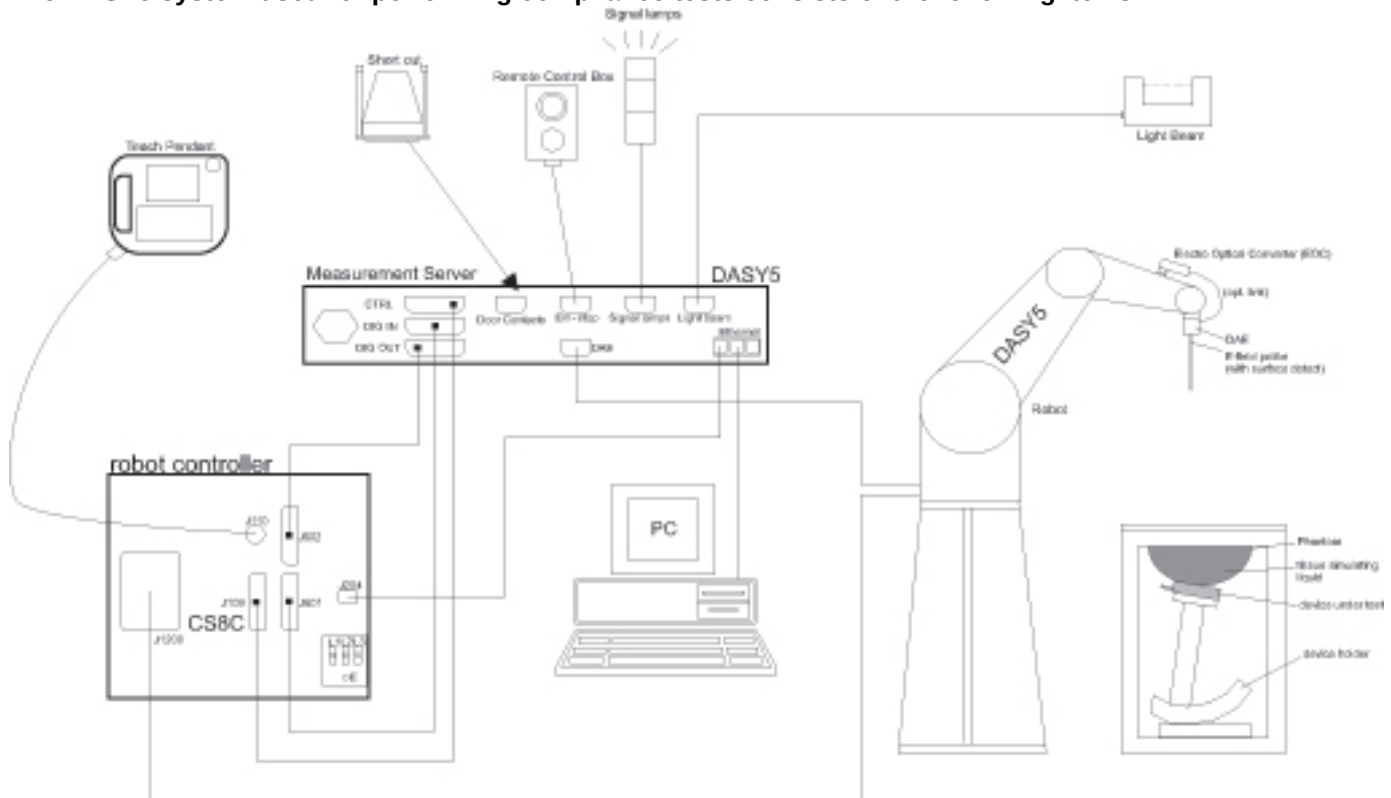

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/17/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Dielectric Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015
Network Analyzer	Agilent	8753ES	MY40001647	7/17/2015
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/11/2015
Dielectric Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Traceable Calibration Control Co.	4242	122529162	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U09516	10/6/2015
Power Meter	Agilent	N1911A	MY53060016	8/7/2015
Power Sensor	Agilent	E9323A	MY53070003	5/1/2015
Power Sensor	Agilent	8481A	3318A95392	10/6/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	HP	437B	3125U11347	8/27/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Sensor	HP	8481A	2702A60780	6/16/2015
Power Sensor	HP	8481A	1926A16917	10/10/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3902	5/19/2015
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3990	3/18/2016
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3749	1/26/2016
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3989	3/17/2016
E-Field Probe (SAR Lab 5)	SPEAG	EX3DV4	3991	5/16/2015
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1352	11/7/2015
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1259	1/14/2016
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1380	7/23/2015
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1377	8/27/2015
Data Acquisition Electronics (SAR Lab 5)	SPEAG	DAE4	1439	5/14/2015
System Validation Dipole	SPEAG	D750V3	1024	5/16/2015
System Validation Dipole	SPEAG	D835V2	4d142	9/9/2015
System Validation Dipole	SPEAG	D1750V2	1077	9/11/2015
System Validation Dipole	SPEAG	D1900V2	5d163	9/11/2015
System Validation Dipole	SPEAG	D2600V2	1006	9/10/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/19/2016
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-203	3/19/2016
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015
Thermometer (SAR Lab 5)	EXTECH	445703	CCS-239	6/3/2015

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53060009	5/5/2015
Power Sensor	Agilent	N1921A	MY53020038	3/6/2016
Base Station Simulator	R & S	CMW500	135387	7/8/2015
Base Station Simulator	Agilent	8960	MY53211024	9/19/2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Back Cover	☒ The rechargeable battery is not user accessible.
Battery Options	☒ The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5 GHz, Only U-NII 1 and U-NII 3)
Wi-Fi Direct	Wi-Fi Direct enabled devices to transfer data directly between each other ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5 GHz, Only U-NII 1 and U-NII 3)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	☒ Class A = both simultaneously. ☐ Class B = GPRS connection interrupted during a GSM call, automatically resumed at end of call. ☐ Class C = manual GSM / GPRS mode switching. Does this device support DTM (Dual Transfer Mode)? ☒ Yes ☐ No			
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 17	QPSK 16QAM ☐ Rel. 10 Does not support Carrier Aggregation (CA) ☒ Rel. 10 Carrier Aggregation (Downlinks Only) (Non-US Operations Supported) ☐ Rel. 11 Carrier Aggregation (2 Uplink and 2 Downlinks)		100% (FDD)
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 4.1 LE		77.5% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Mode		Full Power			Reduce Power		
			Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
GSM850	GSM	Voice	32.5	-1.3 ~ 0.7	33.2	NOT SUPPORTED		
	GPRS GMSK	Tx Slot 1	32.5	-1.3 ~ 0.7	33.2			
		Tx Slot 2	31.5	-1.3 ~ 0.7	32.2			
		Tx Slot 3	29.5	-1.3 ~ 0.7	30.2			
		Tx Slot 4	28.5	-1.3 ~ 0.7	29.2			
	EGPRS 8PSK	Tx Slot 1	27.0	-2.0 ~ 1.0	28.0			
		Tx Slot 2	25.5	-2.0 ~ 1.0	26.5			
		Tx Slot 3	23.5	-2.0 ~ 1.0	24.5			
		Tx Slot 4	22.5	-2.0 ~ 1.0	23.5			
GSM1900	GSM	Voice	29.5	-1.3 ~ 0.7	30.2	NOT SUPPORTED		
	GPRS GMSK	Tx Slot 1	29.5	-1.3 ~ 0.7	30.2			
		Tx Slot 2	28.5	-1.3 ~ 0.7	29.2			
		Tx Slot 3	27.5	-1.3 ~ 0.7	28.2			
		Tx Slot 4	26.5	-1.3 ~ 0.7	27.2			
	EGPRS 8PSK	Tx Slot 1	26.0	-2.0 ~ 1.0	27.0			
		Tx Slot 2	24.5	-2.0 ~ 1.0	25.5			
		Tx Slot 3	22.5	-2.0 ~ 1.0	23.5			
		Tx Slot 4	21.5	-2.0 ~ 1.0	22.5			

Dual Transfer Mode

RF Air interface	Mode			Full Power			Reduce Power		
				Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
GSM850	GSM (Voice) + GPRS(Data)	Tx Slot 1	CS	32.5	-1.3 ~ 0.7	33.2	NOT SUPPORTED		
		Tx Slot 2	CS	31.5	-1.3 ~ 0.7	32.2			
			PS	31.5	-1.3 ~ 0.7	32.2			
		Tx Slot 3	CS	29.5	-1.3 ~ 0.7	30.2			
			PS	29.5	-1.3 ~ 0.7	30.2			
	GSM (Voice) + EGPRS(Data) MCS5-9	Tx Slot 1	CS	32.5	-1.3 ~ 0.7	33.2			
		Tx Slot 2	CS	31.5	-1.3 ~ 0.7	32.2			
			PS	25.5	-2.0 ~ 1.0	26.5			
		Tx Slot 3	CS	29.5	-1.3 ~ 0.7	30.2			
			PS	23.5	-2.0 ~ 1.0	24.5			
GSM1900	GSM (Voice) + GPRS(Data)	Tx Slot 1	CS	29.5	-1.3 ~ 0.7	30.2	NOT SUPPORTED		
		Tx Slot 2	CS	28.5	-1.3 ~ 0.7	29.2			
			PS	28.5	-1.3 ~ 0.7	29.2			
		Tx Slot 3	CS	27.5	-1.3 ~ 0.7	28.2			
			PS	27.5	-1.3 ~ 0.7	28.2			
	GSM (Voice) + EGPRS(Data) MCS5-9	Tx Slot 1	CS	30.0	-1.3 ~ 0.7	30.7			
		Tx Slot 2	CS	28.5	-1.3 ~ 0.7	29.2			
			PS	24.5	-2.0 ~ 1.0	25.5			
		Tx Slot 3	CS	27.5	-1.3 ~ 0.7	28.2			
			PS	22.5	-2.0 ~ 1.0	23.5			

Note: CS : circuit switched PS : packet switched

RF Air interface	Mode	Full Power			Reduce Power		
		Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
WCDMA Band II (2)	R99	23.5	-1.3 ~ 0.7	24.2	NOT SUPPORTED		
	HSDPA	23.5	-4.8 ~ 0.7	24.2			
	HSUPA	23.5	-4.8 ~ 0.7	24.2			
WCDMA Band V (5)	R99	24.5	-1.5 ~ 0.5	25.0	NOT SUPPORTED		
	HSDPA	24.5	-4.9 ~ 0.5	25.0			
	HSUPA	24.5	-4.9 ~ 0.5	25.0			

RF Air interface	Mode	Full Power			Reduce Power		
		Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
LTE B2	QPSK	23.0	-1.5 ~ 1.1	24.1	NOT SUPPORTED		
	16QAM	22.0	-1.5 ~ 1.1	23.1			
LTE B4	QPSK	22.9	-1.5 ~ 1.1	24.0	NOT SUPPORTED		
	16QAM	21.9	-1.5 ~ 1.1	23.0			
LTE B5	QPSK	23.0	-1.5 ~ 1.1	24.1	NOT SUPPORTED		
	16QAM	22.0	-1.5 ~ 1.1	23.1			
LTE B7	QPSK	22.8	-1.5 ~ 1.2	24.0	NOT SUPPORTED		
	16QAM	21.8	-1.5 ~ 1.2	23.0			
LTE B12	QPSK	23.0	-1.5 ~ 1.1	24.1	NOT SUPPORTED		
	16QAM	22.0	-1.5 ~ 1.1	23.1			
LTE B17	QPSK	23.0	-1.5 ~ 1.1	24.1	NOT SUPPORTED		
	16QAM	22.0	-1.5 ~ 1.1	23.1			

WLAN and Bluetooth Maximum Output Power

The model FCC ID: PY7-PM0792 shares the same tune up power targets as model FCC ID: PY7-PM0791 for WLAN and Bluetooth operations. For this reason the SAR data for the WLAN and Bluetooth operations for FCC ID: PY7-PM0792 is considered representative for FCC ID: PY7-PM0791. The Wi-Fi (DTS/U-NII) and Bluetooth Maximum Output Power from the original filling can be found in SAR test report 15J20224-S1A, FCC ID: PY7-PM0792.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 17	Frequency range: 704 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High				23825/ 713.5		
LTE transmitter and antenna implementation	LTE has one (1) Tx/Rx antennas and one (1) Rx antennas Refer to Appendix A...						

Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3							
	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	MPR Built-in by design							
A-MPR (additional MPR) was disabled during SAR testing								
Power reduction	No							
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR Lab 1**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
4/15/2015	Head 750	e'	41.6900	Relative Permittivity (ϵ_r):	41.69	41.96	-0.65	5
		e"	21.9600	Conductivity (σ):	0.92	0.89	2.54	5
	Head 700	e'	42.4400	Relative Permittivity (ϵ_r):	42.44	42.22	0.53	5
		e"	22.3600	Conductivity (σ):	0.87	0.89	-2.13	5
	Head 710	e'	42.3000	Relative Permittivity (ϵ_r):	42.30	42.17	0.32	5
		e"	22.3200	Conductivity (σ):	0.88	0.89	-0.99	5
4/15/2015	Body 750	e'	55.9200	Relative Permittivity (ϵ_r):	55.92	55.55	0.67	5
		e"	23.3200	Conductivity (σ):	0.97	0.96	0.98	5
	Body 700	e'	56.4900	Relative Permittivity (ϵ_r):	56.49	55.74	1.35	5
		e"	23.7900	Conductivity (σ):	0.93	0.96	-3.47	5
	Body 710	e'	56.3800	Relative Permittivity (ϵ_r):	56.38	55.70	1.22	5
		e"	23.7000	Conductivity (σ):	0.94	0.96	-2.54	5

SAR Lab 2

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
4/16/2015	Head 2600	e'	37.4600	Relative Permittivity (ϵ_r):	37.46	39.01	-3.98	5
		e"	14.0200	Conductivity (σ):	2.03	1.96	3.30	5
	Head 2500	e'	37.7900	Relative Permittivity (ϵ_r):	37.79	39.14	-3.44	5
		e"	13.7600	Conductivity (σ):	1.91	1.85	3.17	5
	Head 2700	e'	37.1000	Relative Permittivity (ϵ_r):	37.10	38.88	-4.59	5
		e"	14.3400	Conductivity (σ):	2.15	2.07	3.99	5
4/16/2015	Body 2600	e'	50.5200	Relative Permittivity (ϵ_r):	50.52	52.51	-3.79	5
		e"	15.1800	Conductivity (σ):	2.19	2.16	1.56	5
	Body 2500	e'	50.7200	Relative Permittivity (ϵ_r):	50.72	52.64	-3.64	5
		e"	15.0000	Conductivity (σ):	2.09	2.02	3.21	5
	Body 2700	e'	50.3000	Relative Permittivity (ϵ_r):	50.30	52.38	-3.98	5
		e"	15.4700	Conductivity (σ):	2.32	2.30	0.92	5
4/20/2015	Head 2600	e'	37.4700	Relative Permittivity (ϵ_r):	37.47	39.01	-3.95	5
		e"	14.2300	Conductivity (σ):	2.06	1.96	4.84	5
	Head 2500	e'	38.0000	Relative Permittivity (ϵ_r):	38.00	39.14	-2.91	5
		e"	13.9600	Conductivity (σ):	1.94	1.85	4.67	5
	Head 2700	e'	37.0000	Relative Permittivity (ϵ_r):	37.00	38.88	-4.85	5
		e"	14.4200	Conductivity (σ):	2.16	2.07	4.57	5
4/20/2015	Body 2600	e'	50.5000	Relative Permittivity (ϵ_r):	50.50	52.51	-3.83	5
		e"	15.3200	Conductivity (σ):	2.21	2.16	2.50	5
	Body 2500	e'	50.9300	Relative Permittivity (ϵ_r):	50.93	52.64	-3.24	5
		e"	15.1100	Conductivity (σ):	2.10	2.02	3.97	5
	Body 2700	e'	50.1000	Relative Permittivity (ϵ_r):	50.10	52.38	-4.36	5
		e"	15.4300	Conductivity (σ):	2.32	2.30	0.66	5

SAR Lab 3

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
4/13/2015	Head 835	e'	41.0000	Relative Permittivity (ϵ_r):	41.00	41.50	-1.20	5
		e"	19.0700	Conductivity (σ):	0.89	0.90	-1.62	5
	Head 820	e'	41.2400	Relative Permittivity (ϵ_r):	41.24	41.60	-0.87	5
		e"	19.1000	Conductivity (σ):	0.87	0.90	-3.07	5
	Head 850	e'	40.8500	Relative Permittivity (ϵ_r):	40.85	41.50	-1.57	5
		e"	19.1400	Conductivity (σ):	0.90	0.92	-1.14	5
4/13/2015	Body 835	e'	53.7400	Relative Permittivity (ϵ_r):	53.74	55.20	-2.64	5
		e"	21.7000	Conductivity (σ):	1.01	0.97	3.87	5
	Body 820	e'	53.9300	Relative Permittivity (ϵ_r):	53.93	55.28	-2.44	5
		e"	21.7600	Conductivity (σ):	0.99	0.97	2.44	5
	Body 850	e'	53.6200	Relative Permittivity (ϵ_r):	53.62	55.16	-2.79	5
		e"	21.7200	Conductivity (σ):	1.03	0.99	3.99	5

SAR Lab 4

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
4/28/2015	Body 1900	e'	51.3800	Relative Permittivity (εr):	51.38	53.30	-3.60	5
		e"	14.5200	Conductivity (σ):	1.53	1.52	0.92	5
	Body 1850	e'	51.5900	Relative Permittivity (εr):	51.59	53.30	-3.21	5
		e"	14.3100	Conductivity (σ):	1.47	1.52	-3.16	5
	Body 1910	e'	51.3600	Relative Permittivity (εr):	51.36	53.30	-3.64	5
		e"	14.4600	Conductivity (σ):	1.54	1.52	1.03	5

SAR Lab 5

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
4/13/2015	Head 1900	e'	38.6700	Relative Permittivity (ϵ_r):	38.67	40.00	-3.33	5
		e"	13.5000	Conductivity (σ):	1.43	1.40	1.87	5
	Head 1850	e'	38.3500	Relative Permittivity (ϵ_r):	38.35	40.00	-4.13	5
		e"	13.1200	Conductivity (σ):	1.35	1.40	-3.60	5
	Head 1910	e'	38.7700	Relative Permittivity (ϵ_r):	38.77	40.00	-3.07	5
		e"	13.5600	Conductivity (σ):	1.44	1.40	2.86	5
4/13/2015	Body 1900	e'	51.3800	Relative Permittivity (ϵ_r):	51.38	53.30	-3.60	5
		e"	14.9400	Conductivity (σ):	1.58	1.52	3.84	5
	Body 1850	e'	51.4600	Relative Permittivity (ϵ_r):	51.46	53.30	-3.45	5
		e"	14.8400	Conductivity (σ):	1.53	1.52	0.43	5
	Body 1910	e'	51.4100	Relative Permittivity (ϵ_r):	51.41	53.30	-3.55	5
		e"	14.9500	Conductivity (σ):	1.59	1.52	4.46	5
4/15/2015	Head 1750	e'	39.4000	Relative Permittivity (ϵ_r):	39.40	40.08	-1.71	5
		e"	13.8100	Conductivity (σ):	1.34	1.37	-1.84	5
	Head 1710	e'	39.5400	Relative Permittivity (ϵ_r):	39.54	40.15	-1.51	5
		e"	13.7800	Conductivity (σ):	1.31	1.35	-2.69	5
	Head 1755	e'	39.3800	Relative Permittivity (ϵ_r):	39.38	40.08	-1.74	5
		e"	13.8300	Conductivity (σ):	1.35	1.37	-1.62	5
4/16/2015	Body 1750	e'	52.2700	Relative Permittivity (ϵ_r):	52.27	53.44	-2.19	5
		e"	14.8000	Conductivity (σ):	1.44	1.49	-3.10	5
	Body 1710	e'	52.3900	Relative Permittivity (ϵ_r):	52.39	53.54	-2.15	5
		e"	14.7700	Conductivity (σ):	1.40	1.46	-3.91	5
	Body 1755	e'	52.2800	Relative Permittivity (ϵ_r):	52.28	53.43	-2.15	5
		e"	14.8200	Conductivity (σ):	1.45	1.49	-2.89	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1024	5/16/2014	750	1g	8.12	8.77
				10g	5.26	5.79
D835V2	4d142	9/9/2014	835	1g	8.91	9.22
				10g	5.77	6.05
D1750V2	1077	9/11/2014	1750	1g	36.50	36.90
				10g	19.40	19.80
D1900V2	5d163	9/11/2014	1900	1g	40.80	40.60
				10g	21.20	21.40
D2600V2	1006	9/10/2014	2600	1g	58.60	56.30
				10g	26.10	25.10

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
4/15/2015	D750V3	1024	Head	1g	0.82	8.2	8.12	0.37
				10g	0.53	5.3	5.26	1.14
4/15/2015	D750V3	1024	Body	1g	0.90	9.0	8.77	2.74
				10g	0.60	6.0	5.79	3.63

SAR Lab 2

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
4/16/2015	D2600V2	1006	Head	1g	5.92	59.2	58.6	1.02
				10g	2.57	25.7	26.1	-1.53
4/16/2015	D2600V2	1006	Body	1g	5.53	55.3	56.30	-1.78
				10g	2.42	24.2	25.1	-3.59
4/20/2015	D2600V2	1006	Head	1g	5.64	56.4	58.6	-3.75
				10g	2.44	24.4	26.1	-6.51
4/20/2015	D2600V2	1006	Body	1g	5.71	57.1	56.30	1.42
				10g	2.51	25.1	25.1	0.00

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
4/13/2015	D835V2	4d142	Head	1g	0.91	9.1	8.91	2.47
				10g	0.60	6.0	5.77	4.16
4/13/2015	D835V2	4d142	Body	1g	0.98	9.8	9.22	6.29
				10g	0.65	6.5	6.05	6.61

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
4/28/2015	D1900V2	5d163	Body	1g	3.96	39.6	40.60	-2.46	7,8
				10g	2.06	20.6	21.40	-3.74	

SAR Lab 5

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
4/13/2015	D1900V2	5d163	Head	1g	3.83	38.3	40.80	-6.13	9,10
				10g	2.00	20.0	21.20	-5.66	
4/13/2015	D1900V2	5d163	Body	1g	4.15	41.5	40.60	2.22	
				10g	2.15	21.5	21.40	0.47	
4/15/2015	D1750V2	1077	Head	1g	3.32	33.2	36.50	-9.04	11,12
				10g	1.77	17.7	19.40	-8.76	
4/16/2015	D1750V2	1077	Body	1g	3.74	37.4	36.9	1.36	
				10g	2.00	20.0	19.8	1.01	

9. Conducted Output Power Measurements

9.1. GSM

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	Maximum Frame Pwr
850	GSM (Voice)	CS1	1	128	824.2	32.7	23.7	24.17
				190	836.6	32.7	23.7	
				251	848.8	32.7	23.7	
	GPRS (GMSK)	CS1	1	128	824.2	32.7	23.7	24.17
				190	836.6	32.7	23.7	
				251	848.8	32.7	23.7	
			2	128	824.2	32.0	26.0	26.18
				190	836.6	32.1	26.1	
				251	848.8	32.1	26.1	
			3	128	824.2	30.2	25.9	25.94
				190	836.6	30.2	25.9	
				251	848.8	30.2	25.9	
			4	128	824.2	29.2	26.2	26.19
				190	836.6	29.2	26.2	
				251	848.8	29.2	26.2	
	EGPRS (8PSK)	MCS5	1	128	824.2	27.7	18.7	18.67
				190	836.6	27.7	18.7	
				251	848.8	27.7	18.7	
			2	128	824.2	25.6	19.6	20.18
				190	836.6	25.5	19.5	
				251	848.8	25.4	19.4	
			3	128	824.2	24.0	19.7	19.94
				190	836.6	24.1	19.8	
				251	848.8	24.0	19.7	
			4	128	824.2	22.4	19.4	20.19
				190	836.6	22.1	19.1	
				251	848.8	21.9	18.9	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 4 time slots based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	Maximum Frame PWR
1900	GSM (Voice)	CS1	1	512	1850.2	29.7	20.7	21.17
				661	1880.0	29.9	20.9	
				810	1909.8	29.9	20.9	
	GPRS (GMSK)	CS1	1	512	1850.2	29.7	20.7	21.17
				661	1880.0	29.9	20.9	
				810	1909.8	29.9	20.9	
			2	512	1850.2	28.8	22.8	23.18
				661	1880.0	29.0	23.0	
				810	1909.8	29.0	23.0	
			3	512	1850.2	27.8	23.5	22.94
				661	1880.0	28.0	23.7	
				810	1909.8	27.3	23.0	
			4	512	1850.2	26.7	23.7	24.19
				661	1880.0	26.9	23.9	
				810	1909.8	27.1	24.1	
	EGPRS (8PSK)	MCS5	1	512	1850.2	26.5	17.5	17.67
				661	1880.0	26.6	17.6	
				810	1909.8	26.7	17.7	
			2	512	1850.2	24.6	18.6	19.18
				661	1880.0	24.5	18.5	
				810	1909.8	24.6	18.6	
			3	512	1850.2	22.4	18.1	18.94
				661	1880.0	22.6	18.3	
				810	1909.8	22.7	18.4	
			4	512	1850.2	21.6	18.6	19.19
				661	1880.0	21.8	18.8	
				810	1909.8	21.9	18.9	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 4 time slots, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM850 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Pwr				Max Pwr	
						CS		PS		Maximum Frame Pwr	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	CS	PS
850	GSM(Voice) + GPRS(GMSK)	CS1	1	128	824.2	32.7	23.7			24.17	
				190	836.6	32.7	23.7				
				251	848.8	32.7	23.7				
			2	128	824.2	31.4	25.4	31.4	25.4	26.18	26.18
				190	836.6	31.3	25.3	31.3	25.3		
				251	848.8	31.4	25.4	31.3	25.3		
			3	128	824.2	29.7	25.4	29.8	25.5	25.94	25.94
				190	836.6	29.7	25.4	29.7	25.4		
				251	848.8	29.6	25.3	29.7	25.4		
	GSM(Voice) + EGPRS(8PSK)	MCS5	1	128	824.2	32.7	23.7			24.17	
				190	836.6	32.7	23.7				
				251	848.8	32.7	23.7				
			2	128	824.2	31.4	25.4	24.7	18.7	26.18	19.98
				190	836.6	31.4	25.4	24.6	18.6		
				251	848.8	31.4	25.4	24.7	18.7		
			3	128	824.2	29.8	25.5	22.5	18.2	25.94	20.24
				190	836.6	29.8	25.5	22.5	18.2		
				251	848.8	29.8	25.5	22.5	18.2		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM (Voice) + GMSK (GPRS) mode with 2 time slots, based on the output power measurements above.
- SAR is not required for GSM (Voice) + EGPRS (8PSK) mode because its output power is less than that of GSM (Voice) + GMSK (GPRS) mode.

GSM1900 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Pwr				Max Pwr	
						CS		PS		Maximum Frame Pwr	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	CS	PS
1900	GSM(Voice) + GPRS(GMSK)	CS1	1	512	1850.2	29.7	20.7			21.17	
				661	1880.0	29.9	20.9				
				810	1909.8	29.9	20.9				
			2	512	1850.2	27.9	21.9	27.9	21.9	23.18	23.18
				661	1880.0	28.0	22.0	28.0	22.0		
				810	1909.8	28.2	22.2	28.1	22.1		
			3	512	1850.2	27.5	23.2	27.5	23.2	23.94	23.94
				661	1880.0	27.5	23.2	27.5	23.2		
				810	1909.8	27.5	23.2	27.5	23.2		
	GSM(Voice) + EGPRS(8PSK)	MCS5	1	512	1850.2	29.7	20.7			21.17	
				661	1880.0	29.9	20.9				
				810	1909.8	29.9	20.9				
			2	512	1850.2	28.5	22.5	23.7	17.7	23.18	19.48
				661	1880.0	28.5	22.5	23.7	17.7		
				810	1909.8	28.5	22.5	24.1	18.1		
			3	512	1850.2	26.8	22.5	21.8	17.5	23.94	19.24
				661	1880.0	27.1	22.8	21.8	17.5		
				810	1909.8	27.2	22.9	21.8	17.5		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM (Voice) + GMSK (GPRS) mode with 3 time slots, based on the output power measurements above.
- SAR is not required for GSM (Voice) + EGPRS (8PSK) mode because its output power is less than that of GSM (Voice) + GMSK (GPRS) mode.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.5
			4183	836.6	N/A	24.5
			4233	846.6	N/A	24.5
	HSDPA	Subtest 1	4132	826.4	0	22.8
			4183	836.6	0	22.8
			4233	846.6	0	22.8
		Subtest 2	4132	826.4	0	22.8
			4183	836.6	0	22.8
			4233	846.6	0	22.8
		Subtest 3	4132	826.4	0.5	22.3
			4183	836.6	0.5	22.3
			4233	846.6	0.5	22.4
		Subtest 4	4132	826.4	0.5	22.3
			4183	836.6	0.5	22.3
			4233	846.6	0.5	22.4
	HSUPA	Subtest 1	4132	826.4	0	23.2
			4183	836.6	0	23.2
			4233	846.6	0	23.2
		Subtest 2	4132	826.4	2	22.0
			4183	836.6	2	22.0
			4233	846.6	2	22.0
		Subtest 3	4132	826.4	1	22.2
			4183	836.6	1	22.1
			4233	846.6	1	22.2
		Subtest 4	4132	826.4	2	22.0
			4183	836.6	2	22.0
			4233	846.6	2	22.0
		Subtest 5	4132	826.4	0	23.3
			4183	836.6	0	23.2
			4233	846.6	0	23.3

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	23.7
			9400	1880.0	N/A	23.9
			9538	1907.6	N/A	23.7
	HSDPA	Subtest 1	9262	1852.4	0	22.7
			9400	1880.0	0	22.8
			9538	1907.6	0	22.8
		Subtest 2	9262	1852.4	0	22.5
			9400	1880.0	0	22.6
			9538	1907.6	0	22.6
		Subtest 3	9262	1852.4	0.5	21.9
			9400	1880.0	0.5	22.1
			9538	1907.6	0.5	22.1
		Subtest 4	9262	1852.4	0.5	22.0
			9400	1880.0	0.5	22.0
			9538	1907.6	0.5	22.1
	HSUPA	Subtest 1	9262	1852.4	0	22.8
			9400	1880.0	0	22.9
			9538	1907.6	0	22.9
		Subtest 2	9262	1852.4	2	21.3
			9400	1880.0	2	21.3
			9538	1907.6	2	21.3
		Subtest 3	9262	1852.4	1	21.6
			9400	1880.0	1	21.8
			9538	1907.6	1	21.8
		Subtest 4	9262	1852.4	2	21.6
			9400	1880.0	2	21.7
			9538	1907.6	2	21.7
		Subtest 5	9262	1852.4	0	22.8
			9400	1880.0	0	22.9
			9538	1907.6	0	22.9

9.4. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1860 MHz	1880 MHz	1900 MHz		1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	23.0	23.3	23.2	0	NOT SUPOORTED		
			1	49	0	23.1	22.4	23.0	0			
			1	99	0	22.5	22.8	22.4	0			
			50	0	1	21.6	22.1	21.8	0			
			50	24	1	21.4	21.7	21.4	0			
			50	50	1	21.4	21.7	21.4	0			
			100	0	1	21.5	21.9	21.6	0			
		16QAM	1	0	1	22.6	22.8	22.3	0			
			1	49	1	21.8	22.1	21.5	0			
			1	99	1	22.1	22.2	21.9	0			
			50	0	2	20.7	21.1	20.7	0			
			50	24	2	20.5	20.8	20.4	0			
			50	50	2	20.4	20.7	20.4	0			
			100	0	2	20.5	20.9	20.6	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1857.5 MHz	1880 MHz	1902.5 MHz		1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	22.5	23.0	22.8	0	NOT SUPOORTED		
			1	37	0	22.2	22.4	22.1	0			
			1	74	0	22.2	22.6	22.4	0			
			36	0	1	21.5	21.8	21.6	0			
			36	20	1	21.3	21.6	21.4	0			
			36	39	1	21.3	21.5	21.4	0			
			75	0	1	21.4	21.6	21.5	0			
		16QAM	1	0	1	21.7	22.4	22.1	0			
			1	37	1	21.1	21.7	22.0	0			
			1	74	1	21.4	21.9	21.6	0			
			36	0	2	20.5	20.9	20.6	0			
			36	20	2	20.4	20.7	20.4	0			
			36	39	2	20.3	20.6	20.4	0			
			75	0	2	20.4	20.7	20.5	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1855 MHz	1880 MHz	1905 MHz		1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	22.9	22.9	22.7	0	NOT SUPOORTED		
			1	25	0	22.6	22.9	22.4	0			
			1	49	0	22.6	22.6	22.2	0			
			25	0	1	21.8	21.7	21.8	0			
			25	12	1	21.6	21.6	21.7	0			
			25	25	1	21.6	21.6	21.6	0			
			50	0	1	21.7	21.7	21.7	0			
		16QAM	1	0	1	21.9	22.2	21.8	0			
			1	25	1	21.8	22.0	21.5	0			
			1	49	1	21.6	21.9	21.3	0			
			25	0	2	20.8	20.8	21.0	0			
			25	12	2	20.7	20.7	20.9	0			
			25	25	2	20.7	20.6	20.8	0			
			50	0	2	20.6	20.7	20.8	0			

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1852.5 MHz	1880 MHz	1907.5 MHz		1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	22.6	22.7	22.4	0	NOT SUPPORTED		
			1	12	0	22.9	22.6	22.4	0			
			1	24	0	22.4	22.6	22.2	0			
			12	0	1	21.6	21.6	21.6	0			
			12	7	1	21.6	21.7	21.6	0			
			12	13	1	21.6	21.6	21.5	0			
			25	0	1	21.6	21.6	21.5	0			
		16QAM	1	0	1	21.5	22.0	22.2	0			
			1	12	1	21.3	21.9	22.1	0			
			1	24	1	21.4	21.8	21.9	0			
			12	0	2	20.7	20.8	20.7	0			
			12	7	2	20.7	20.8	20.7	0			
			12	13	2	20.7	20.7	20.7	0			
			25	0	2	20.8	20.6	20.6	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1851.5 MHz	1880 MHz	1908.5 MHz		1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	22.5	22.6	22.6	0	NOT SUPPORTED		
			1	8	0	22.9	22.7	22.5	0			
			1	14	0	22.5	22.5	22.3	0			
			8	0	1	21.6	21.7	21.7	0			
			8	4	1	21.6	21.6	21.7	0			
			8	7	1	21.6	21.7	21.7	0			
			15	0	1	21.6	21.6	21.7	0			
		16QAM	1	0	1	21.5	22.2	21.7	0			
			1	8	1	21.4	22.0	21.6	0			
			1	14	1	21.5	22.1	21.4	0			
			8	0	2	20.8	20.6	21.0	0			
			8	4	2	20.8	20.6	21.0	0			
			8	7	2	20.8	20.6	20.9	0			
			15	0	2	20.7	20.7	20.7	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1850.7 MHz	1880 MHz	1909.3 MHz		1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	22.6	22.6	22.2	0	NOT SUPPORTED		
			1	3	0	22.5	22.5	22.3	0			
			1	5	0	22.6	22.2	22.1	0			
			3	0	0	22.4	22.2	22.2	0			
			3	1	0	22.4	22.2	22.2	0			
			3	3	0	22.4	22.2	22.2	0			
			6	0	1	21.5	21.4	21.4	0			
		16QAM	1	0	1	21.6	22.2	21.3	0			
			1	3	1	21.6	22.0	21.3	0			
			1	5	1	21.7	22.1	21.2	0			
			3	0	1	21.5	22.0	21.5	0			
			3	1	1	21.5	22.0	21.5	0			
			3	3	1	21.5	22.0	21.5	0			
			6	0	2	20.7	21.0	20.6	0			

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1720 MHz	1732.5 MHz	1745 MHz		1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	22.8	22.8	22.7	0	NOT SUPPORTED		
			1	49	0	22.2	22.4	22.1	0			
			1	99	0	22.4	22.8	22.7	0			
			50	0	1	21.4	21.7	21.6	0			
			50	24	1	21.2	21.4	21.2	0			
			50	50	1	21.1	21.4	21.3	0			
			100	0	1	21.3	21.6	21.4	0			
		16QAM	1	0	1	22.4	22.2	22.1	0			
			1	49	1	21.9	21.9	21.5	0			
			1	99	1	22.0	22.2	22.0	0			
			50	0	2	20.5	20.8	20.5	0			
			50	24	2	20.3	20.5	20.3	0			
			50	50	2	20.2	20.4	20.3	0			
			100	0	2	20.4	20.6	20.5	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	22.7	22.8	22.8	0	NOT SUPPORTED		
			1	37	0	22.1	22.5	22.3	0			
			1	74	0	22.3	22.6	22.6	0			
			36	0	1	21.3	21.5	21.3	0			
			36	20	1	21.2	21.4	21.2	0			
			36	39	1	21.1	21.2	21.2	0			
			75	0	1	21.2	21.4	21.2	0			
		16QAM	1	0	1	21.8	22.2	22.1	0			
			1	37	1	21.1	21.8	21.1	0			
			1	74	1	21.4	21.9	21.8	0			
			36	0	2	20.4	20.6	20.3	0			
			36	20	2	20.2	20.4	20.2	0			
			36	39	2	20.2	20.4	20.2	0			
			75	0	2	20.2	20.5	20.2	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz		1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	22.7	22.5	22.8	0	NOT SUPPORTED		
			1	25	0	22.8	22.4	22.7	0			
			1	49	0	22.8	22.6	22.6	0			
			25	0	1	21.8	21.7	21.6	0			
			25	12	1	21.7	21.5	21.6	0			
			25	25	1	21.7	21.5	21.5	0			
			50	0	1	21.8	21.5	21.6	0			
		16QAM	1	0	1	21.7	21.9	21.8	0			
			1	25	1	22.0	21.9	21.9	0			
			1	49	1	21.9	22.0	21.6	0			
			25	0	2	20.9	20.7	20.8	0			
			25	12	2	20.8	20.6	20.7	0			
			25	25	2	20.8	20.6	20.6	0			
			50	0	2	20.9	20.6	20.6	0			

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	22.6	22.6	22.7	0	NOT SUPPORTED		
			1	12	0	22.9	22.5	22.6	0			
			1	24	0	22.5	22.5	22.6	0			
			12	0	1	21.6	21.5	21.6	0			
			12	7	1	21.5	21.5	21.6	0			
			12	13	1	21.5	21.5	21.5	0			
			25	0	1	21.6	21.5	21.5	0			
		16QAM	1	0	1	21.7	21.8	22.4	0			
			1	12	1	21.6	21.7	22.4	0			
			1	24	1	21.6	21.7	22.4	0			
			12	0	2	20.7	20.7	20.6	0			
			12	7	2	20.6	20.6	20.6	0			
			12	13	2	20.6	20.7	20.6	0			
			25	0	2	20.6	20.6	20.5	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	22.7	22.6	22.7	0	NOT SUPPORTED		
			1	8	0	22.9	22.6	23.0	0			
			1	14	0	22.5	22.4	22.8	0			
			8	0	1	21.6	21.5	21.5	0			
			8	4	1	21.5	21.4	21.4	0			
			8	7	1	21.6	21.5	21.5	0			
			15	0	1	21.6	21.5	21.5	0			
		16QAM	1	0	1	21.7	22.0	21.7	0			
			1	8	1	21.5	22.0	21.5	0			
			1	14	1	21.6	21.9	21.7	0			
			8	0	2	20.8	20.5	20.7	0			
			8	4	2	20.7	20.4	20.7	0			
			8	7	2	20.8	20.6	20.8	0			
			15	0	2	20.6	20.6	20.5	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	22.6	22.5	22.9	0	NOT SUPPORTED		
			1	3	0	22.6	22.2	22.6	0			
			1	5	0	22.5	22.1	22.9	0			
			3	0	0	22.4	22.2	23.1	0			
			3	1	0	22.5	22.2	23.1	0			
			3	3	0	22.4	22.5	23.1	0			
			6	0	1	21.4	21.3	22.1	0			
		16QAM	1	0	1	21.7	21.9	22.1	0			
			1	3	1	21.6	21.9	22.1	0			
			1	5	1	21.5	21.9	21.8	0			
			3	0	1	21.5	21.6	22.1	0			
			3	1	1	21.5	21.6	22.1	0			
			3	3	1	21.5	21.7	22.1	0			
			6	0	2	20.6	20.4	21.2	0			

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz		829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.8	22.8	23.1	0	NOT SUPPORTED		
			1	25	0	22.6	23.0	23.1	0			
			1	49	0	22.7	22.8	23.0	0			
			25	0	1	21.6	21.6	22.0	1			
			25	12	1	21.5	21.8	21.9	1			
			25	25	1	21.6	21.7	21.9	1			
			50	0	1	21.6	21.6	21.9	1			
		16QAM	1	0	1	21.9	22.1	22.1	1			
			1	25	1	22.0	22.1	22.3	1			
			1	49	1	21.8	22.1	22.1	1			
			25	0	2	20.7	20.7	21.0	2			
			25	12	2	20.7	20.8	21.1	2			
			25	25	2	20.7	20.9	21.0	2			
			50	0	2	20.6	20.8	21.0	2			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.7	22.9	23.1	0	NOT SUPPORTED		
			1	12	0	22.9	22.8	23.0	0			
			1	24	0	22.6	22.8	23.0	0			
			12	0	1	21.6	21.6	22.0	1			
			12	7	1	21.5	21.8	22.0	1			
			12	13	1	21.5	21.8	21.9	1			
			25	0	1	21.6	21.7	21.9	1			
		16QAM	1	0	1	21.7	22.0	22.8	1			
			1	12	1	21.9	22.0	22.8	1			
			1	24	1	21.7	22.1	22.7	1			
			12	0	2	20.7	20.8	21.0	2			
			12	7	2	20.7	20.9	21.0	2			
			12	13	2	20.7	20.9	20.9	2			
			25	0	2	20.7	20.8	20.9	2			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.7	22.7	23.1	0	NOT SUPPORTED		
			1	8	0	23.0	22.8	23.4	0			
			1	14	0	22.6	22.7	23.0	0			
			8	0	1	21.6	21.6	21.9	1			
			8	4	1	21.6	21.7	21.9	1			
			8	7	1	21.7	21.7	21.9	1			
			15	0	1	21.6	21.7	21.9	1			
		16QAM	1	0	1	21.7	22.2	22.2	1			
			1	8	1	21.6	22.2	22.1	1			
			1	14	1	21.7	22.3	22.1	1			
			8	0	2	20.8	20.6	21.1	2			
			8	4	2	20.8	20.7	21.1	2			
			8	7	2	20.8	20.8	21.1	2			
			15	0	2	20.7	20.8	20.9	2			

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.8	22.7	23.2	0	NOT SUPPORTED		
			1	3	0	22.8	22.7	22.9	0			
			1	5	0	22.7	22.6	22.9	0			
			3	0	0	22.6	22.6	23.1	0			
			3	1	0	22.6	22.7	23.1	0			
			3	3	0	22.6	22.7	23.1	0			
		16QAM	6	0	1	21.5	21.6	22.1	1			
			1	0	1	21.9	22.1	22.2	1			
			1	3	1	21.8	22.2	22.2	1			
			1	5	1	22.0	22.0	22.0	1			
			3	0	1	21.6	21.8	22.4	1			
			3	1	1	21.6	21.9	22.4	1			
			3	3	1	21.7	21.9	22.3	1			
			6	0	2	20.7	20.6	21.4	2			

LTE Band 7 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz
LTE Band 7	20	QPSK	1	0	0	22.2	22.3	22.1	0	NOT SUPPORTED		
			1	49	0	22.2	22.1	22.1	0			
			1	99	0	22.2	22.3	22.2	0			
			50	0	1	21.1	21.3	21.2	0			
			50	24	1	21.1	21.3	21.1	0			
			50	50	1	21.1	21.2	21.9	0			
			100	0	1	21.1	21.2	21.1	0			
		16QAM	1	0	1	21.9	21.8	21.4	0			
			1	49	1	21.5	21.8	21.4	0			
			1	99	1	21.2	21.4	21.5	0			
			50	0	2	20.2	20.4	20.2	0			
			50	24	2	20.3	20.4	20.1	0			
			50	50	2	20.1	20.3	20.2	0			
			100	0	2	20.2	20.3	20.1	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz	2535 MHz	2562.5 MHz
LTE Band 7	15	QPSK	1	0	0	22.3	22.3	22.3	0	NOT SUPPORTED		
			1	37	0	22.2	22.2	22.1	0			
			1	74	0	22.2	22.0	22.3	0			
			36	0	1	21.2	21.3	21.1	0			
			36	20	1	21.2	21.3	21.1	0			
			36	39	1	21.2	21.3	21.2	0			
			75	0	1	21.0	21.3	21.0	0			
		16QAM	1	0	1	21.4	21.6	22.0	0			
			1	37	1	21.2	21.5	21.2	0			
			1	74	1	21.1	21.3	21.4	0			
			36	0	2	20.3	20.5	20.2	0			
			36	20	2	20.3	20.4	20.2	0			
			36	39	2	20.1	20.4	20.1	0			
			75	0	2	20.1	20.4	20.1	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0	22.6	22.7	22.5	0	NOT SUPPORTED		
			1	25	0	22.5	22.8	22.5	0			
			1	49	0	22.1	22.4	22.3	0			
			25	0	1	21.5	21.5	21.4	0			
			25	12	1	21.6	21.6	21.5	0			
			25	25	1	21.3	21.5	21.4	0			
			50	0	1	21.4	21.5	21.4	0			
		16QAM	1	0	1	21.5	22.0	21.6	0			
			1	25	1	21.4	22.0	21.8	0			
			1	49	1	21.1	21.8	21.4	0			
			25	0	2	20.6	20.7	20.5	0			
			25	12	2	20.7	20.7	20.6	0			
			25	25	2	20.4	20.6	20.5	0			
			50	0	2	20.6	20.7	20.5	0			

LTE Band 7 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz	2535 MHz	2567.5 MHz
LTE Band 7	5	QPSK	1	0	0	22.6	22.8	22.7	0	NOT SUPPORTED		
			1	12	0	22.6	22.8	22.5	0			
			1	24	0	22.5	22.7	22.4	0			
			12	0	1	21.6	21.7	21.5	0			
			12	7	1	21.7	21.7	21.5	0			
			12	13	1	21.5	21.7	21.5	0			
			25	0	1	21.5	21.7	21.5	0			
		16QAM	1	0	1	21.7	22.1	22.4	0			
			1	12	1	21.6	22.2	22.4	0			
			1	24	1	21.5	22.0	22.2	0			
			12	0	2	20.7	20.9	20.6	0			
			12	7	2	20.7	20.9	20.5	0			
			12	13	2	20.6	20.8	20.5	0			
			25	0	2	20.6	20.7	20.4	0			

LTE Band 12 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						704 MHz	707.5 MHz	711 MHz		704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0	23.4	23.1	23.3	0	NOT SUPPORTED		
			1	25	0	23.2	23.2	23.2	0			
			1	49	0	23.2	22.8	23.1	0			
			25	0	1	22.2	21.9	22.0	0			
			25	12	1	22.3	21.9	22.1	0			
			25	25	1	22.2	21.8	22.0	0			
			50	0	1	22.3	21.8	22.1	0			
		16QAM	1	0	1	22.4	22.4	22.5	0			
			1	25	1	22.5	22.3	22.6	0			
			1	49	1	22.3	22.2	22.3	0			
			25	0	2	21.3	20.9	21.1	0			
			25	12	2	21.3	20.9	21.2	0			
			25	25	2	21.2	20.8	21.0	0			
			50	0	2	21.2	20.9	21.1	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	23.2	23.1	23.2	0	NOT SUPPORTED		
			1	12	0	23.3	23.0	23.2	0			
			1	24	0	23.3	23.1	23.1	0			
			12	0	1	22.1	21.9	22.0	0			
			12	7	1	22.1	21.8	22.0	0			
			12	13	1	22.1	21.9	22.0	0			
			25	0	1	22.1	21.8	21.9	0			
		16QAM	1	0	1	22.2	22.3	22.9	0			
			1	12	1	22.2	22.2	22.8	0			
			1	24	1	22.3	22.2	22.8	0			
			12	0	2	21.1	20.9	21.0	0			
			12	7	2	21.1	20.9	21.0	0			
			12	13	2	21.1	21.0	21.0	0			
			25	0	2	21.2	20.8	20.9	0			
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	23.2	23.0	23.2	0	NOT SUPPORTED		
			1	8	0	23.6	23.1	23.4	0			
			1	14	0	23.1	22.9	23.1	0			
			8	0	1	22.1	21.9	21.9	0			
			8	4	1	22.2	21.9	21.9	0			
			8	7	1	22.0	22.0	21.9	0			
			15	0	1	22.2	21.9	22.0	0			
		16QAM	1	0	1	22.2	22.5	22.4	0			
			1	8	1	22.1	22.4	22.3	0			
			1	14	1	22.1	22.5	22.2	0			
			8	0	2	21.3	20.8	21.1	0			
			8	4	2	21.2	20.8	21.1	0			
			8	7	2	21.1	20.8	21.1	0			
			15	0	2	21.2	20.9	20.9	0			

LTE Band 12 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	23.1	23.0	23.3	0	NOT SUPPORTED		
			1	3	0	23.1	22.9	23.0	0			
			1	5	0	23.1	23.1	23.0	0			
			3	0	0	22.8	22.8	23.2	0			
			3	1	0	23.0	22.8	23.1	0			
			3	3	0	23.0	22.8	23.0	0			
		16QAM	6	0	1	21.9	21.8	21.8	0			
			1	0	1	22.5	22.8	22.1	0			
			1	3	1	22.7	22.6	22.2	0			
			1	5	1	22.2	22.8	22.1	0			
			3	0	1	22.0	22.4	22.0	0			
			3	1	1	22.1	22.4	22.0	0			
			3	3	1	22.2	22.4	22.1	0			
			6	0	2	21.2	21.1	21.0	0			

LTE Band 17 Measured Results

SAR for LTE Band 17 is covered by LTE Band 12 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

9.5. WLAN and BT**WLAN and Bluetooth Conducted Output Power Measurements**

The model FCC ID: PY7-PM0792 shares the same tune up power targets as model FCC ID: PY7-PM0791 for WLAN and Bluetooth operations. For this reason the SAR conducted output power measurements for the WLAN and Bluetooth operations for FCC ID: PY7-PM0792 is considered representative for FCC ID: PY7-PM0791. The Wi-Fi (DTS/U-NII) and Bluetooth conducted output power measurements from the original filing can be found in SAR test report 15J20224-S1A, FCC ID: PY7-PM0792.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.2	32.7	0.253	0.284	1
			Left Tilt	190	836.6	33.2	32.7	0.133	0.149	
			Right Touch	190	836.6	33.2	32.7	0.311	0.349	
			Right Tilt	190	836.6	33.2	32.7	0.153	0.172	
Head VoIP	GPRS 4 Slots	0	Left Touch	190	836.6	29.2	29.2	0.341	0.341	2
			Left Tilt	190	836.6	29.2	29.2	0.186	0.186	
			Right Touch	190	836.6	29.2	29.2	0.434	0.434	
			Right Tilt	190	836.6	29.2	29.2	0.233	0.233	
Body-worn	Voice	15	Rear	190	836.6	33.2	32.7	0.334	0.375	3
			Front	190	836.6	33.2	32.7	0.336	0.377	
Body-worn(VoIP) & Hotspot	GPRS 4 Slots	10	Rear	190	836.6	29.2	29.2	0.516	0.516	
Front			190	836.6	29.2	29.2	0.511	0.511		
Hotspot			Edge 2	190	836.6	29.2	29.2	0.504	0.504	
			Edge 3	190	836.6	29.2	29.2	0.081	0.081	
			Edge 4	190	836.6	29.2	29.2	0.243	0.243	

DTM (Dual Transfer Mode)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Body-worn(VoIP) & Hotspot	DTM 2 Slots	10	Rear	190	836.6	32.2	31.3	0.473	0.582	4

10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.2	29.9	0.156	0.167	5
			Left Tilt	661	1880.0	30.2	29.9	0.044	0.047	
			Right Touch	661	1880.0	30.2	29.9	0.082	0.088	
			Right Tilt	661	1880.0	30.2	29.9	0.054	0.058	
Head VoIP	GPRS 4 Slots	0	Left Touch	661	1880.0	27.2	26.9	0.215	0.230	6
			Left Tilt	661	1880.0	27.2	26.9	0.061	0.065	
			Right Touch	661	1880.0	27.2	26.9	0.115	0.123	
			Right Tilt	661	1880.0	27.2	26.9	0.077	0.083	
Body-worn	Voice	15	Rear	661	1880.0	30.2	29.9	0.098	0.105	
			Front	661	1880.0	30.2	29.9	0.102	0.109	7
Body-worn(VoIP) & Hotspot	GPRS 4 Slots	10	Rear	661	1880.0	27.2	26.9	0.320	0.343	
Front			661	1880.0	27.2	26.9	0.346	0.371	8	
Hotspot			Edge 2	661	1880.0	27.2	26.9	0.047	0.050	
			Edge 3	661	1880.0	27.2	26.9	0.583	0.625	
			Edge 4	661	1880.0	27.2	26.9	0.211	0.226	

DTM (Dual Transfer Mode)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Body-worn(VoIP) & Hotspot	DTM 3 Slots	10	Edge 3	661	1880.0	28.2	27.5	0.238	0.280	

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	25.0	24.5	0.337	0.378	9
			Left Tilt	4183	836.6	25.0	24.5	0.176	0.197	
			Right Touch	4183	836.6	25.0	24.5	0.432	0.485	
			Right Tilt	4183	836.6	25.0	24.5	0.212	0.238	
Body-worn	Rel 99 RMC	15	Rear	4183	836.6	25.0	24.5	0.388	0.435	10
			Front	4183	836.6	25.0	24.5	0.403	0.452	
Hotspot	Rel 99 RMC	10	Rear	4183	836.6	25.0	24.5	0.465	0.522	11
			Front	4183	836.6	25.0	24.5	0.466	0.523	
			Edge 2	4183	836.6	25.0	24.5	0.435	0.488	
			Edge 3	4183	836.6	25.0	24.5	0.091	0.102	
			Edge 4	4183	836.6	25.0	24.5	0.179	0.201	

10.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	24.2	23.9	0.329	0.353	12
			Left Tilt	9400	1880.0	24.2	23.9	0.094	0.101	
			Right Touch	9400	1880.0	24.2	23.9	0.183	0.196	
			Right Tilt	9400	1880.0	24.2	23.9	0.127	0.136	
Body-worn	Rel 99 RMC	15	Rear	9400	1880.0	24.2	23.9	0.263	0.282	13
			Front	9400	1880.0	24.2	23.9	0.238	0.255	
Hotspot	Rel 99 RMC	10	Rear	9400	1880.0	24.2	23.9	0.755	0.809	14
			Front	9400	1880.0	24.2	23.9	0.570	0.611	
			Edge 2	9400	1880.0	24.2	23.9	0.066	0.071	
			Edge 3	9262	1852.4	24.2	23.7	0.762	0.855	
				9400	1880.0	24.2	23.9	0.800	0.857	
				9538	1907.6	24.2	23.7	0.911	1.022	
			Edge 4	9400	1880.0	24.2	23.9	0.360	0.386	

10.5. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	0	24.1	23.3	0.233	0.280	15
						50	0	23.1	22.1	0.172	0.217	
			Left Tilt	18900	1880.0	1	0	24.1	23.3	0.060	0.072	
						50	0	23.1	22.1	0.044	0.055	
			Right Touch	18900	1880.0	1	0	24.1	23.3	0.112	0.135	
						50	0	23.1	22.1	0.086	0.108	
			Right Tilt	18900	1880.0	1	0	24.1	23.3	0.070	0.084	
						50	0	23.1	22.1	0.053	0.066	
Body-worn	QPSK	15	Rear	18900	1880.0	1	0	24.1	23.3	0.178	0.214	16
						50	0	23.1	22.1	0.139	0.175	
			Front	18900	1880.0	1	0	24.1	23.3	0.175	0.210	
						50	0	23.1	22.1	0.137	0.172	
Hotspot	QPSK	10	Rear	18900	1880.0	1	0	24.1	23.3	0.479	0.576	
						50	0	23.1	22.1	0.347	0.437	
			Front	18900	1880.0	1	0	24.1	23.3	0.471	0.566	
						50	0	23.1	22.1	0.341	0.429	
			Edge 2	18900	1880.0	1	0	24.1	23.3	0.059	0.070	
						50	0	23.1	22.1	0.043	0.054	
			Edge 3	18700	1860.0	1	0	24.1	23.0	0.620	0.799	
				18900	1880.0	1	0	24.1	23.3	0.711	0.855	
						50	0	23.1	22.1	0.518	0.652	
			Edge 4	19100	1900.0	1	0	24.1	22.9	0.774	1.020	17
						1	0	24.1	23.3	0.255	0.307	
						50	0	23.1	22.1	0.191	0.240	

10.6. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	0	24.0	22.8	0.083	0.109	18
						50	0	23.0	21.7	0.051	0.069	
			Left Tilt	20175	1732.5	1	0	24.0	22.8	0.031	0.041	
						50	0	23.0	21.7	0.019	0.026	
			Right Touch	20175	1732.5	1	0	24.0	22.8	0.046	0.061	
						50	0	23.0	21.7	0.029	0.039	
			Right Tilt	20175	1732.5	1	0	24.0	22.8	0.033	0.044	
						50	0	23.0	21.7	0.020	0.027	
Body-worn	QPSK	15	Rear	20175	1732.5	1	0	24.0	22.8	0.079	0.104	19
						50	0	23.0	21.7	0.049	0.066	
			Front	20175	1732.5	1	0	24.0	22.8	0.072	0.095	
						50	0	23.0	21.7	0.044	0.059	
Hotspot	QPSK	10	Rear	20175	1732.5	1	0	24.0	22.8	0.157	0.207	20
						50	0	23.0	21.7	0.100	0.135	
			Front	20175	1732.5	1	0	24.0	22.8	0.151	0.199	
						50	0	23.0	21.7	0.097	0.131	
			Edge 2	20175	1732.5	1	0	24.0	22.8	0.045	0.059	
						50	0	23.0	21.7	0.027	0.036	
			Edge 3	20175	1732.5	1	0	24.0	22.8	0.107	0.141	
						50	0	23.0	21.7	0.069	0.093	
			Edge 4	20175	1732.5	1	0	24.0	22.8	0.070	0.092	
						50	0	23.0	21.7	0.044	0.059	

10.7. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20525	836.5	1	25	24.1	23.0	0.209	0.269	
						25	12	23.1	21.8	0.160	0.216	
			Left Tilt	20525	836.5	1	25	24.1	23.0	0.090	0.116	
						25	12	23.1	21.8	0.070	0.095	
			Right Touch	20525	836.5	1	25	24.1	23.0	0.267	0.344	21
						25	12	23.1	21.8	0.205	0.277	
			Right Tilt	20525	836.5	1	25	24.1	23.0	0.118	0.152	
						25	12	23.1	21.8	0.090	0.121	
			Rear	20525	836.5	1	25	24.1	23.0	0.228	0.294	
						25	12	23.1	21.8	0.180	0.243	
Body-worn	QPSK	15	Front	20525	836.5	1	25	24.1	23.0	0.232	0.299	22
						25	12	23.1	21.8	0.183	0.247	
			Rear	20525	836.5	1	25	24.1	23.0	0.282	0.363	23
						25	12	23.1	21.8	0.219	0.295	
Hotspot	QPSK	10	Front	20525	836.5	1	25	24.1	23.0	0.277	0.357	
						25	12	23.1	21.8	0.217	0.293	
			Edge 2	20525	836.5	1	25	24.1	23.0	0.204	0.263	
						25	12	23.1	21.8	0.161	0.217	
			Edge 3	20525	836.5	1	25	24.1	23.0	0.063	0.081	
						25	12	23.1	21.8	0.048	0.064	
			Edge 4	20525	836.5	1	25	24.1	23.0	0.084	0.108	
						25	12	23.1	21.8	0.067	0.091	

10.8. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.		
								Tune-up limit	Meas.	Meas.	Scaled			
Head	QPSK	0	Left Touch	21100	2535.0	1	0	24.0	22.3	0.477	0.706	24		
						50	0	23.0	21.3	0.370	0.549			
			Left Tilt	21100	2535.0	1	0	24.0	22.3	0.118	0.175			
						50	0	23.0	21.3	0.094	0.139			
			Right Touch	21100	2535.0	1	0	24.0	22.3	0.260	0.385			
						50	0	23.0	21.3	0.219	0.325			
			Right Tilt	21100	2535.0	1	0	24.0	22.3	0.133	0.197			
						50	0	23.0	21.3	0.111	0.165			
Body-worn	QPSK	15	Rear	21100	2535.0	1	0	24.0	22.3	0.419	0.620	25		
						50	0	23.0	21.3	0.341	0.506			
			Front	21100	2535.0	1	0	24.0	22.3	0.306	0.453			
						50	0	23.0	21.3	0.266	0.394			
Hotspot	QPSK	10	Rear	20850	2510.0	1	0	24.0	22.2	0.854	1.287			
						50	0	23.0	21.1	0.675	1.041			
				21100	2535.0	1	0	24.0	22.3	0.936	1.384	26		
						50	0	23.0	21.3	0.745	1.104			
						100	0	23.0	21.2	0.562	0.851			
						1	99	24.0	22.2	0.855	1.309			
			21350	2560.0	50	50	23.0	21.9	0.726	0.927				
					Front	20850	2510.0	1	0	24.0	22.2	0.817	1.231	
								50	0	23.0	21.1	0.566	0.873	
					21100	2535.0	1	0	24.0	22.3	0.892	1.319		
							50	0	23.0	21.3	0.747	1.107		
							100	0	23.0	21.2	0.756	1.144		
			1	99			24.0	22.2	0.714	1.093				
			21350	2560.0	50	50	23.0	21.9	0.606	0.774				
					Edge 2	21100	2535.0	1	0	24.0	22.3	0.094	0.138	
			50	0				23.0	21.3	0.069	0.103			
			Edge 3	20850	2510.0	1	0	24.0	22.2	0.517	0.779			
						50	0	23.0	21.3	0.588	0.870			
				21100	2535.0	1	0	24.0	22.3	0.475	0.704			
						50	0	23.0	21.3	0.475	0.704			
				21350	2560.0	1	99	24.0	22.2	0.855	1.309			
						50	50	23.0	21.3	0.391	0.580			
			Edge 4	21100	2535.0	1	0	24.0	22.3	0.482	0.713			
						50	0	23.0	21.3	0.391	0.580			

10.9. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	25	24.1	23.2	0.063	0.078	27
						25	0	23.1	21.9	0.047	0.062	
			Left Tilt	23095	707.5	1	25	24.1	23.2	0.024	0.030	
						25	0	23.1	21.9	0.018	0.024	
			Right Touch	23095	707.5	1	25	24.1	23.2	0.071	0.087	
						25	0	23.1	21.9	0.052	0.069	
			Right Tilt	23095	707.5	1	25	24.1	23.2	0.027	0.033	
						25	0	23.1	21.9	0.018	0.024	
Body-worn	QPSK	15	Rear	23095	707.5	1	25	24.1	23.2	0.103	0.127	28
						25	0	23.1	21.9	0.080	0.105	
			Front	23095	707.5	1	25	24.1	23.2	0.100	0.123	
						25	0	23.1	21.9	0.076	0.100	
Hotspot	QPSK	10	Rear	23095	707.5	1	25	24.1	23.2	0.127	0.156	29
						25	0	23.1	21.9	0.100	0.132	
			Front	23095	707.5	1	25	24.1	23.2	0.119	0.146	
						25	0	23.1	21.9	0.091	0.120	
			Edge 2	23095	707.5	1	25	24.1	23.2	0.096	0.118	
						25	0	23.1	21.9	0.077	0.101	
			Edge 3	23095	707.5	1	25	24.1	23.2	0.009	0.011	
						25	0	23.1	21.9	0.008	0.010	
			Edge 4	23095	707.5	1	25	24.1	23.2	0.086	0.106	
						25	0	23.1	21.9	0.071	0.094	

10.10. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 is covered by LTE Band 12 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

10.11. WLAN and Bluetooth

The model FCC ID: PY7-PM0792 shares the same enclosure and circuit board as model FCC ID: PY7-PM0791. The WLAN/Bluetooth circuitry and layout, including antenna, are identical between the two units. The WLAN/Bluetooth antenna and surrounding circuitry are the same between these two units, and tune up power targets are identical for WLAN and Bluetooth operations. For this reason the SAR data for the WLAN and Bluetooth operations for FCC ID: PY7-PM0792 is considered representative for FCC ID: PY7-PM0791. The Wi-Fi (DTS/U-NII) and Bluetooth SAR measurement results from the original filling can be found in SAR test report 15J20224-S1A, FCC ID: PY7-PM0792. The Wi-Fi and Bluetooth results (measured or estimated) from the original filling are used for Simultaneous Transmission Analysis purposes.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Rear	No	0.127	N/A	N/A
850	GSM 850	Body & Hotspot	Rear	No	0.516	N/A	N/A
	WCDMA Band V	Hotspot	Front	No	0.466	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.282	N/A	N/A
1750	LTE Band 4	Hotspot	Rear	No	0.157	N/A	N/A
1900	GSM 1900	Hotspot	Edge 3	No	0.583	N/A	N/A
	WCDMA Band II	Hotspot	Edge 3	Yes	0.911	0.910	1.00
	LTE Band 2	Hotspot	Edge 3	No	0.774	N/A	N/A
2600	LTE Band 7	Hotspot	Rear	Yes	0.936	0.916	1.02

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations				
Head	1	GSM(Voice)	+	DTS		
	2	GSM(Voice)	+	U-NII		
	3	GSM(GPRS/EDGE)	+	DTS		
	4	GSM(GPRS/EDGE)	+	U-NII		
	5	W-CDMA	+	DTS		
	6	W-CDMA	+	U-NII		
	7	LTE	+	DTS		
	8	LTE	+	U-NII		
Body-w orn	9	GSM(Voice)	+	DTS		
	10	GSM(Voice)	+	U-NII		
	11	GSM(Voice)	+	BT		
	12	GSM(Voice)	+	U-NII	+	BT
	13	GSM(GPRS/EDGE)	+	DTS		
	14	GSM(GPRS/EDGE)	+	U-NII		
	15	GSM(GPRS/EDGE)	+	BT		
	16	GSM(GPRS/EDGE)	+	U-NII	+	BT
	17	W-CDMA	+	DTS		
	18	W-CDMA	+	U-NII		
	19	W-CDMA	+	BT		
	20	W-CDMA	+	U-NII	+	BT
	21	LTE	+	DTS		
	22	LTE	+	U-NII		
	23	LTE	+	BT		
	24	LTE	+	U-NII	+	BT
	25		+	U-NII	+	BT
Hotspot & Wi-Fi Direct	26	GSM(GPRS/EDGE)	+	DTS		
	27	GSM(GPRS/EDGE)	+	U-NII		
	28	W-CDMA	+	DTS		
	29	W-CDMA	+	U-NII		
	30	LTE	+	DTS		
	31	LTE	+	U-NII		
Notes:						
1. DTS and U-NII 1 and U-NII 3 supports Hotspot and Wi-Fi Direct.						
2. GPRS/EDGE and W-CDMA support Hotspot.						
3. VoIP is supported in GPRS/EDGE and W-CDMA.						
4. DTS Radio cannot transmit simultaneously w ith Bluetooth Radio.						
5. U-NII Radio can transmit simultaneously w ith Bluetooth Radio.						

12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	① WWAN	② DTS	③ U-NII	④ BT	①+② WWAN + DTS		①+③ WWAN + U-NII		①+③+④ WWAN + U-NII + BT	
					Σ 1g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1g SAR (mW/g)	SPLSR (Yes/ No)
Head	0.706	0.355	0.524		1061	No	1230	No		
Body-worn	0.620	0.156	0.087	0.154	0.776	No	0.707	No	0.861	No
Hotspot	1384	0.156	0.087		1540	No	1471	No		

Note(s):

All Wi-Fi and Bluetooth SAR values (measured or estimated) used in this report were taken from SAR test report 15J20224-S1A, submitted under FCC ID: PY7-PM0792

Appendixes

Refer to separated files for the following appendixes.

A_15J20225v0 SAR Photos & Ant. Locations

B_15J20225v0 SAR System Check Plots

C_15J20225v0 SAR Highest Test Plots

D_15J20225v0 SAR Tissue Ingredients

E_15J20225v0 SAR Probe Cal. Certificates

F_15J20225v0 SAR Dipole Cal. Certificates

END OF REPORT