

TEST REPORT

of

FCC Part 15 Subpart C §15.209, §15.231
IC RSS-210 Issue 9, RSS-Gen Issue 5

FCC ID: TQ8-FOB-4F24
IC Certification: 5074A-FOB4F24

Equipment Under Test : Fob Smart Key
Model Name : FOB-4F24
Applicant : Hyundai Mobis Co., Ltd.
Manufacturer : Hyundai Mobis Co., Ltd.
Date of Receipt : 2018.05.24
Date of Test(s) : 2018.06.04 ~ 2018.06.21
Date of Issue : 2018.06.27

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date:

2018.06.27

Nancy Park

Technical
Manager:



Date:

2018.06.27

Hyunchae You

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

TABLE OF CONTENTS

1. General Information -----	3
2. Field Strength of Fundamental and Spurious Emission-----	6
3. Bandwidth of Operation Frequency-----	17
4. Occupied Bandwidth-----	19
5. Transmission Time-----	21
6. Duty Cycle Correction Factor-----	23
7. Antenna Requirement-----	25

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901

FAX : +82 31 688 0921

1.2. Details of applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, South Korea, 06141

Contact Person : Choe, Seung-Hoon

Phone No. : +82 31 260 0098

1.3. Details of manufacturer

Company : Same as above

Address : Same as above

1.4 Details of factory

Company : ALPS Electric Korea Co., Ltd.

Address : 33, Hanamsandan 5beon-ro, Gwangsan-gu, Gwangju, Korea

1.5. Description of EUT

Kind of Product	Fob Smart Key
Model Name	FOB-4F24
Power Supply	DC 3.0 V
Frequency Range	Tx: 433.92 MHz, Rx: 125.00 kHz
Modulation Type	FSK
Number of Channel	1
Antenna Type	PCB Pattern Antenna

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

1.6. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	Agilent	8648D	3847M00534	Mar. 16, 2018	Annual	Mar. 16, 2019
Signal Generator	Agilent	E4438C	MY42082477	Mar. 15, 2018	Annual	Mar. 15, 2019
Spectrum Analyzer	R&S	FSV30	100768	Mar. 12, 2018	Annual	Mar. 12, 2019
Spectrum Analyzer	R&S	FSW43	100637	Jul. 11, 2017	Annual	Jul. 11, 2018
Spectrum Analyzer	Agilent	N9020A	MY53421758	Sep. 25, 2017	Annual	Sep. 25, 2018
Preamplifier	H.P.	8447F	2944A03909	Aug. 11, 2017	Annual	Aug. 11, 2018
Signal Conditioning Unit	R&S	SCU-18	102244	Sep. 22, 2017	Annual	Sep. 22, 2018
High Pass Filter	Mini-Circuits	NHP-800+	V8207600724	Mar. 12, 2018	Annual	Mar. 12, 2019
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-1800-40SS	7	Mar. 21, 2018	Annual	Mar. 21, 2019
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 23, 2017	Biennial	Aug. 23, 2019
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB9163	01126	Mar. 26, 2018	Biennial	Mar. 26, 2020
Horn Antenna	R&S	HF906	100326	Feb. 14, 2018	Biennial	Feb. 14, 2020
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/38330516/L	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/38330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SUCOFLEX	104 (3 m)	MY3258414	Jan. 12, 2018	Semi-annual	Jul. 12, 2018
Coaxial Cable	SUCOFLEX	104 (10 m)	MY3145814	Jan. 12, 2018	Semi-annual	Jul. 12, 2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

Applied standard : FCC Part15 subpart C, IC RSS-210 Issue 9, RSS-Gen Issue 5			
Standard section		Test Item	Result
15.209(a) 15.231(b)	RSS-210 Issue 9, A.1, Table A1 RSS-Gen Issue 5, 8.9	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
15.231(c)	-	Bandwidth of Operation Frequency	Complied
15.231(a)	RSS-210 Issue 9, A.1.1	Transmission Time	Complied
-	RSS-210 Issue 9, A.1.3 RSS-Gen Issue 5, 6.7	Occupied Bandwidth	Complied

1.8. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty (dB)
Radiated Disturbance, 9 kHz to 30 MHz	± 3.59
Radiated Disturbance, below 1 GHz	± 5.88
Radiated Disturbance, above 1 GHz	± 5.94

Uncertainty figures are valid to a confidence level of 95 %.

1.9. Test Report Revision

Revision	Report number	Date of issue	Description
0	F690501/RF-RTL012794	2018.06.27	Initial

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


2. Field Strength of Fundamental and Spurious Emission

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 30 MHz.

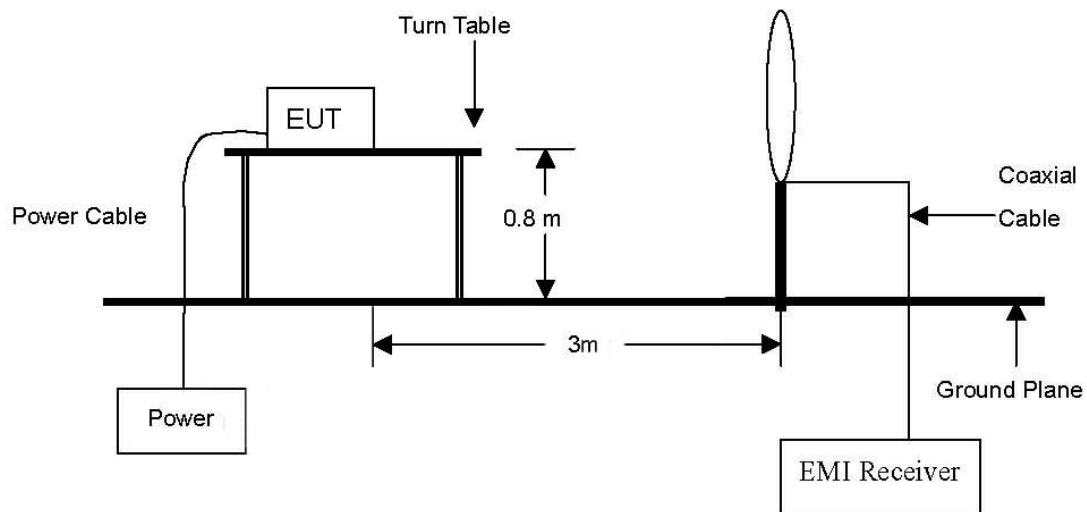

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

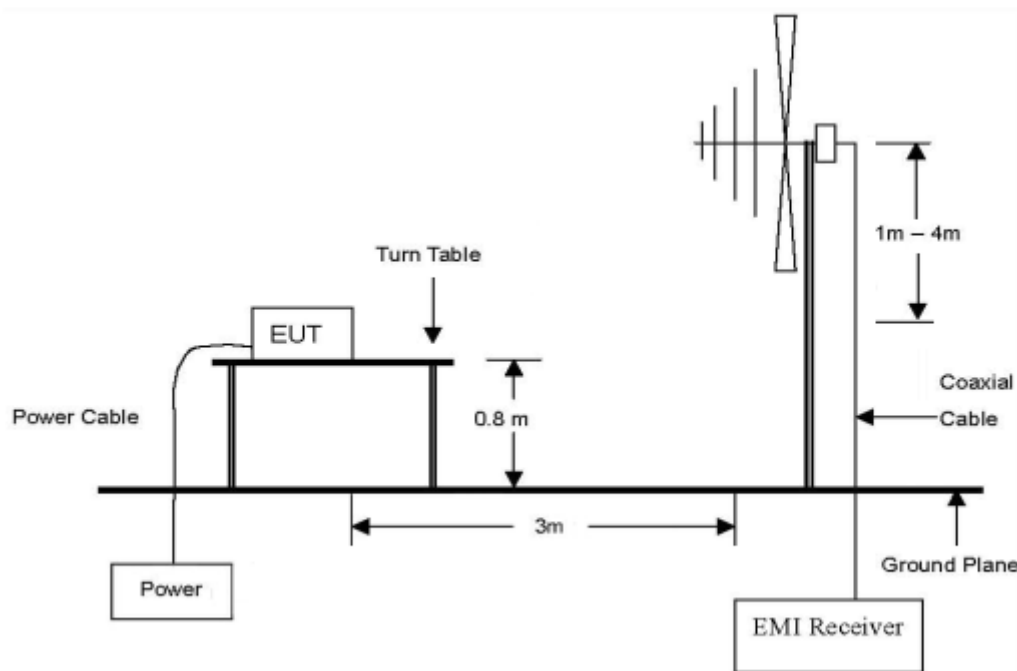

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

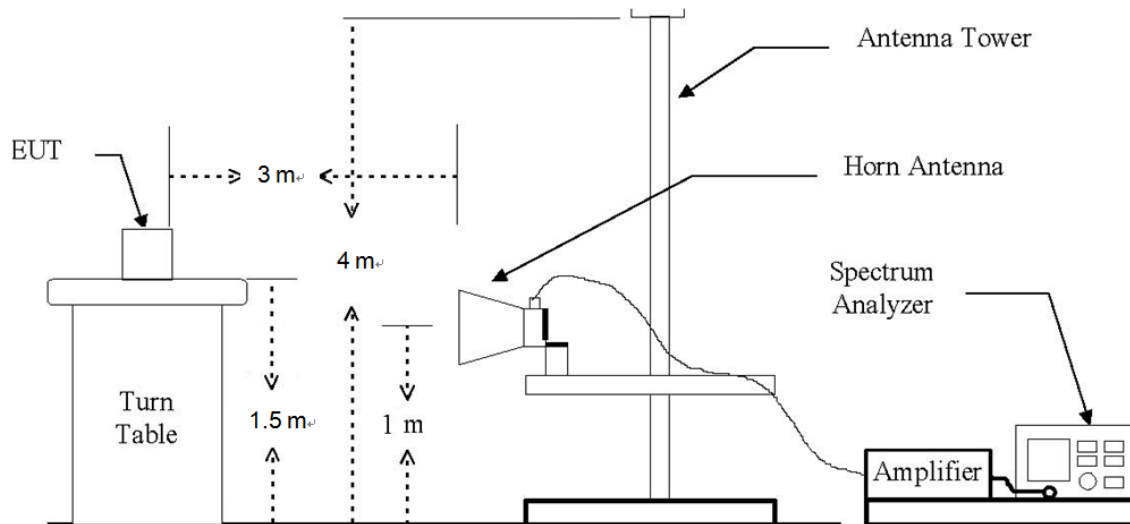

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2. Limit

2.2.1. FCC

2.2.1.1. Radiated emission limits; general requirements.

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

2.2.1.2. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

According to §15.231(b), in addition to the provisions of Section §15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750**	¹ 125 to 375**
174-260	3,750	375
260-470	¹ 3,750 to 12,500**	¹ 375 to 1,250**
Above 470	12,500	1,250

¹linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.2.2. IC

2.2.2.1. Transmitter emission limits

According to RSS-Gen Issue 5, 8.9.

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 - General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field Strength ($\mu V/m$ at 3 m)
30-88	100
88-216	150
216-960	200
Above 960	500

Table 6 - General field strength limits at frequencies below 30 MHz

Frequency	Magnetic Field Strength (H-Field) ($\mu A/m$)	Measurement Distance (m)
9-490 kHz ¹	6.37/F (F in kHz)	300
490-1 705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2.2.2. Momentarily Operated Devices

According to A.1 of RSS-210 Issue 9.

The frequency bands and field strength limits in tables A1 and A2 of this annex are reserved exclusively for the transmission of a control signal, such as that used with alarm systems, door openers, remote switches, etc. Data may be sent with a control signal. Radio control of toys or model aircraft, as well as continuous transmissions, such as voice or video, are not permitted, except as provided in Section A.1.4 below.

Table A1 - Permissible Field Strength Limits for Momentarily Operated Devices

Fundamental Frequency (MHz), Excluding Restricted Frequency Bands Specified in RSS-Gen	Field Strength of the Fundamental Emissions ($\mu\text{V/m}$ at 3 m)
70-130	1,250
130-174	1,250 to 3,750
174-260 ^(Note 1)	3,750
260-470 ^(Note 1)	3,750 to 12,500
Above 470	12,500

* Linear interpolation with frequency, f, in MHz:

For 130-174 MHz: Frequency Strength ($\mu\text{V/m}$) = (56.82 x f) - 6136

For 260-470 MHz: Frequency Strength ($\mu\text{V/m}$) = (41.67 x f) - 7083

Note 1: Frequency bands 225-328.6 MHz and 335.4-399.9 MHz are designated for the exclusive use of the Government of Canada. Manufacturers should be aware of possible harmful interference and degradation of their licence-exempt radio equipment in these frequency bands.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013

2.3.1. Test Procedures for emission below 30 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note;

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 meter open field test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

2.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

2.3.3. Test Procedures for emission above 1 GHz

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1 GHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

2.4.1. Field Strength of Fundamental

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Frequency (MHz)	Detect Mode	Ant. Pol.	Reading (dBμV)	AF (dB/m)	CL (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
433.88	Peak	V	61.42	16.40	3.49	81.31	100.83	19.52
433.88	Average	V	53.78	16.40	3.49	73.67	80.83	7.16


Remark:

To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is Y – axis.

Definition of DUT for three orthogonal planes is described in the test setup photos.

Note:

- 3 m Limit (dBμV/m) = $20\log[41.67(F_{MHz}) - 7083] = 80.83$
- Result = Reading + AF + CL
- Average Reading = Peak Reading + Duty Cycle Correction Factor
- Duty Cycle Correction Factor: $20\log(T_{on} / 100 \text{ ms}) = 20\log(41.50 / 100) = -7.64$
 - T_{on} time = 41.50 ms
 - T_{on+off} time = 100.00 ms (pulse train is 100 ms instead of 162.50 ms)

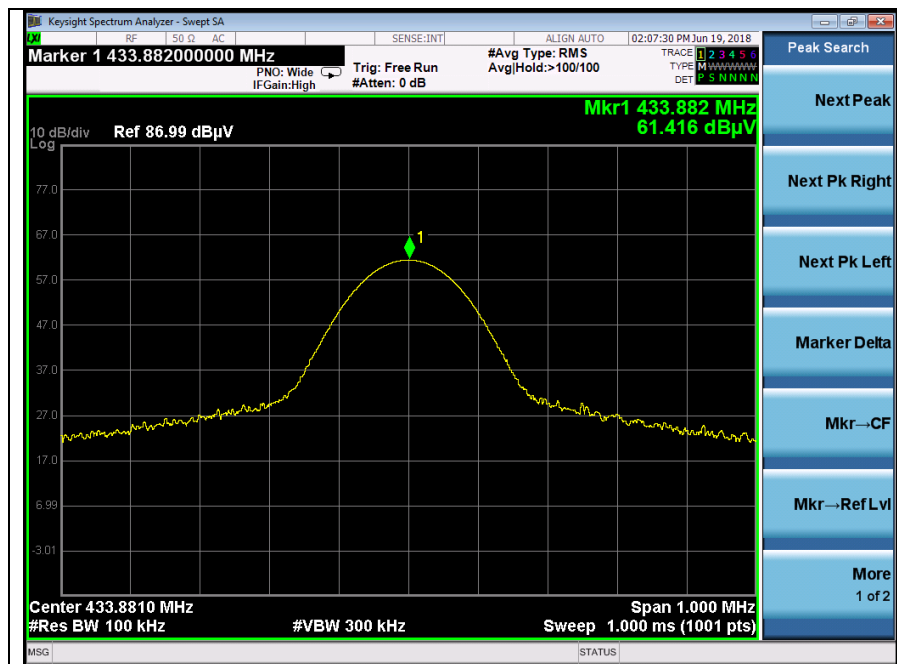

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.4.2. Spurious Emission

The following table shows the highest levels of radiated emissions.

The frequency spectrum from 9 kHz to 4 400 MHz was investigated.

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
*1 301.69	58.92	Peak	H	25.00	-39.49	44.43	74.00	29.57
*1 301.69	51.28	Average	H	25.00	-39.49	36.79	54.00	17.21
3 037.21	57.62	Peak	H	29.95	-37.03	50.54	80.83	30.29
3 037.21	49.98	Average	H	29.95	-37.03	42.90	60.83	17.93
3 470.97	54.15	Peak	H	30.92	-36.12	48.95	80.83	31.88
3 470.97	46.51	Average	H	30.92	-36.12	41.31	60.83	19.52
*3 904.81	52.89	Peak	H	32.17	-35.44	49.62	74.00	24.38
*3 904.81	45.25	Average	H	32.17	-35.44	41.98	54.00	12.02
*4 338.72	62.94	Peak	H	31.75	-35.36	59.33	74.00	14.67
*4 338.72	55.30	Average	H	31.75	-35.36	51.69	54.00	2.31


Remark:

- To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is **X – axis**.
Definition of DUT for three orthogonal planes is described in the test setup photos.
- 3 m Limit (dBμV/m) = $20\log[41.67(F_{MHz}) - 7083] - 20$ dBμV/m = 60.83 dBμV/m
- Correction Factors = AF + AMP + CL
- Actual = Reading + AF + AMP + CL
- Average Reading = Peak Reading + Duty Cycle Correction Factor
- Duty Cycle Correction Factor: $20\log(T_{on} / 100 \text{ ms}) = 20\log(41.50 / 100) = -7.64$
- T_{on} time = 41.50 ms
- T_{on+off} time = 100.00 ms (pulse train is 100 ms instead of 162.50 ms)
- "*" means the restricted band.
- Spurious Emission test results meet both peak and average limit.
- According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

The Plots of Spurious Emission

3rd Harmonic (Peak)

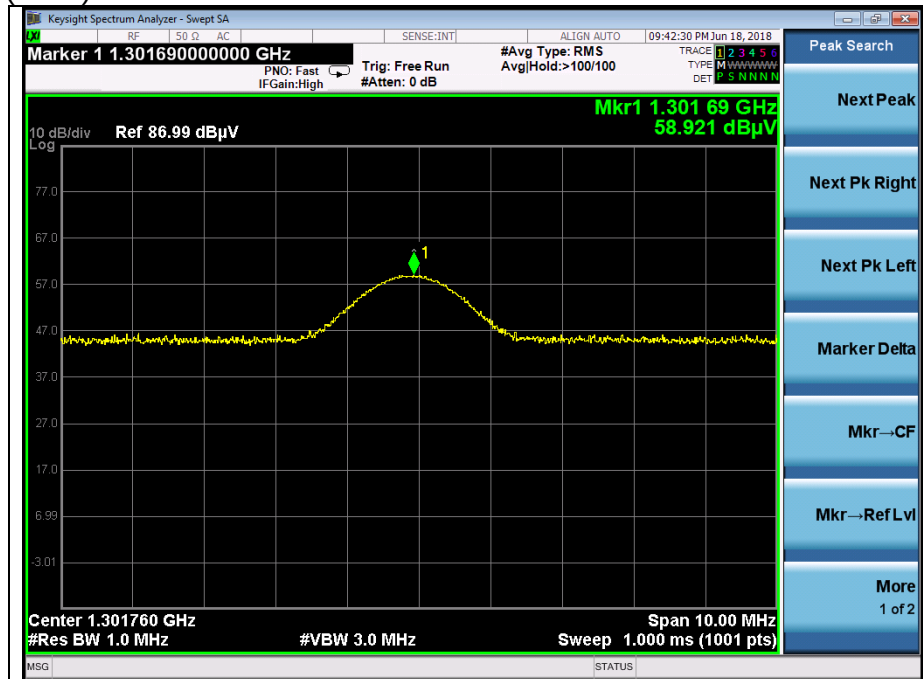


7th Harmonic (Peak)

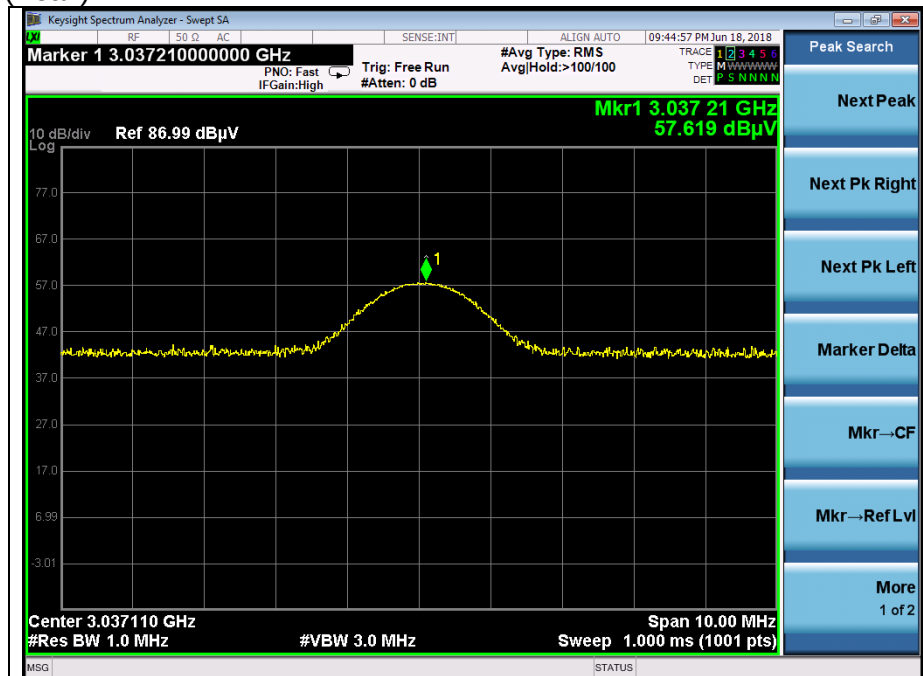


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

8th Harmonic (Peak)

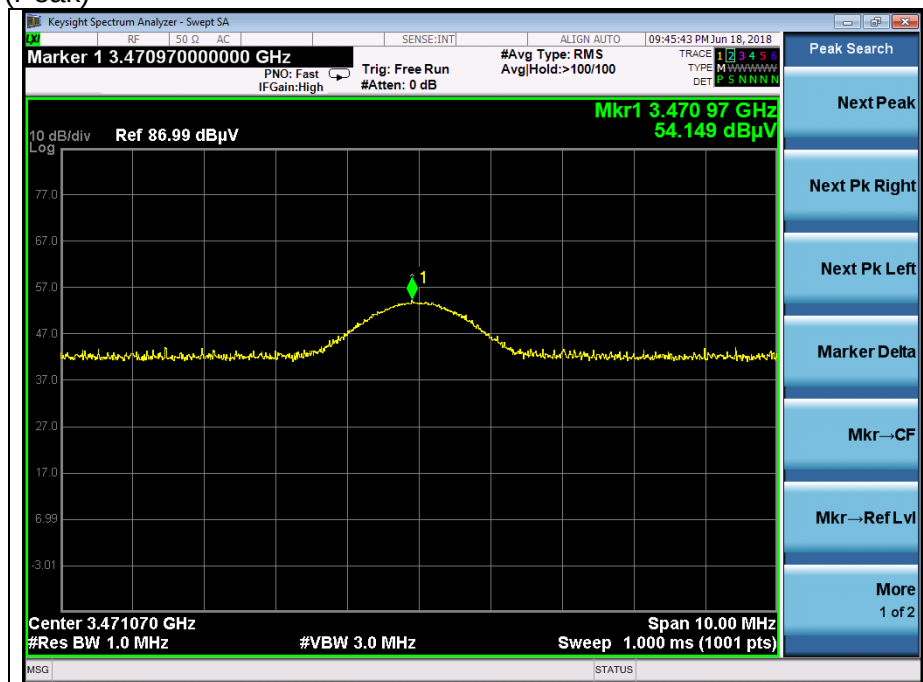

9th Harmonic (Peak)

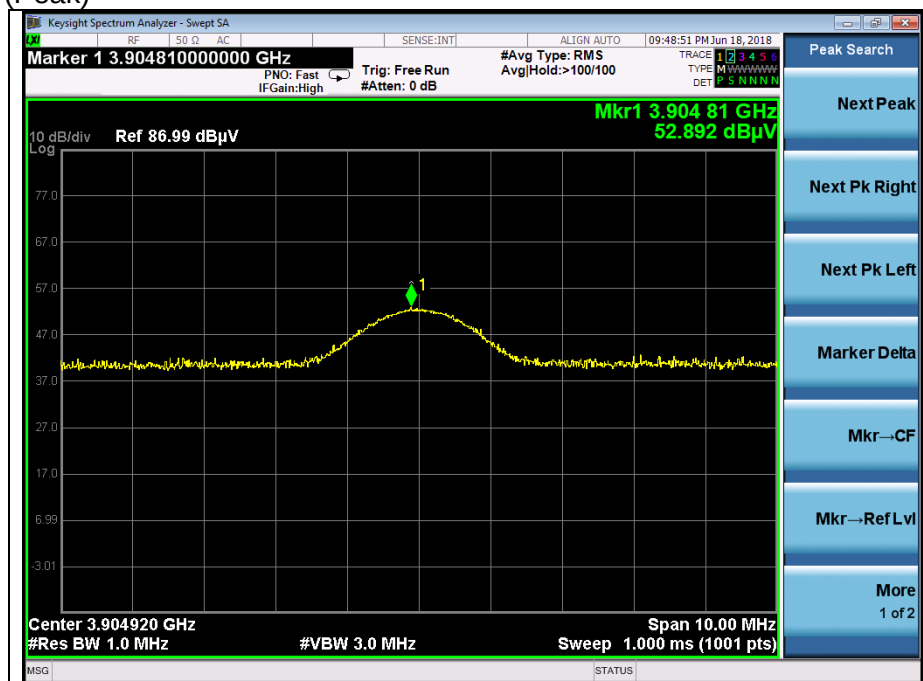

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

10th Harmonic (Peak)

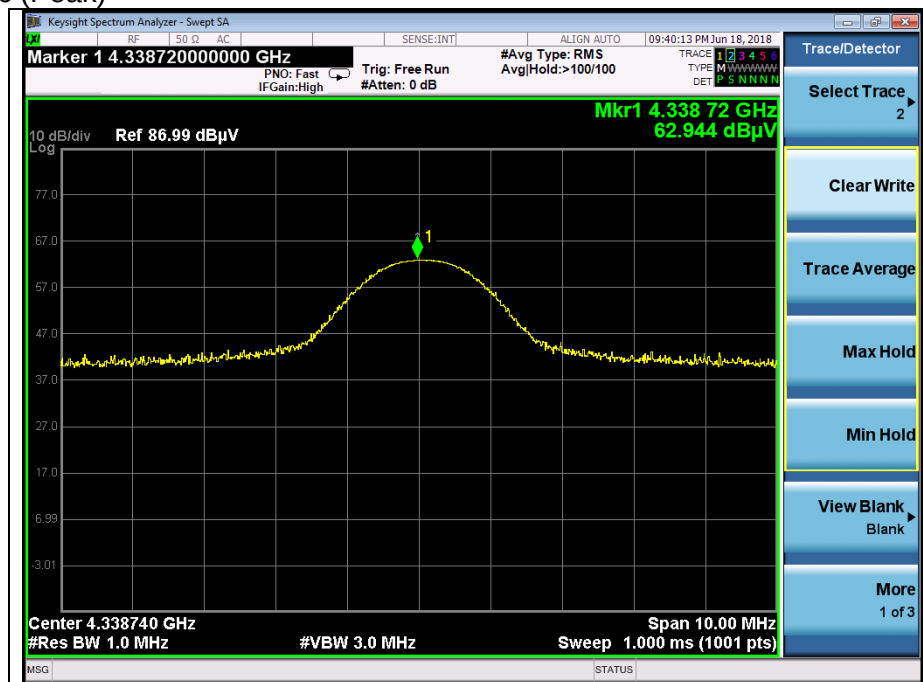

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

3. Bandwidth of Operation Frequency

3.1. Test Setup

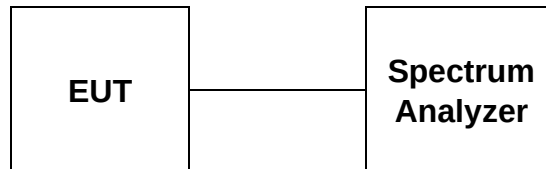

3.2. Limit

According to §15.231(c), the bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

3.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 x RBW.
3. The bandwidth of fundamental frequency was measured and recorded.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

3.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.


Carrier Frequency (MHz)	Bandwidth of Operation Frequency (kHz)	Limit (kHz)	Remark
433.92	97.90	1 084.80	The point 20 dB down from the modulated carrier

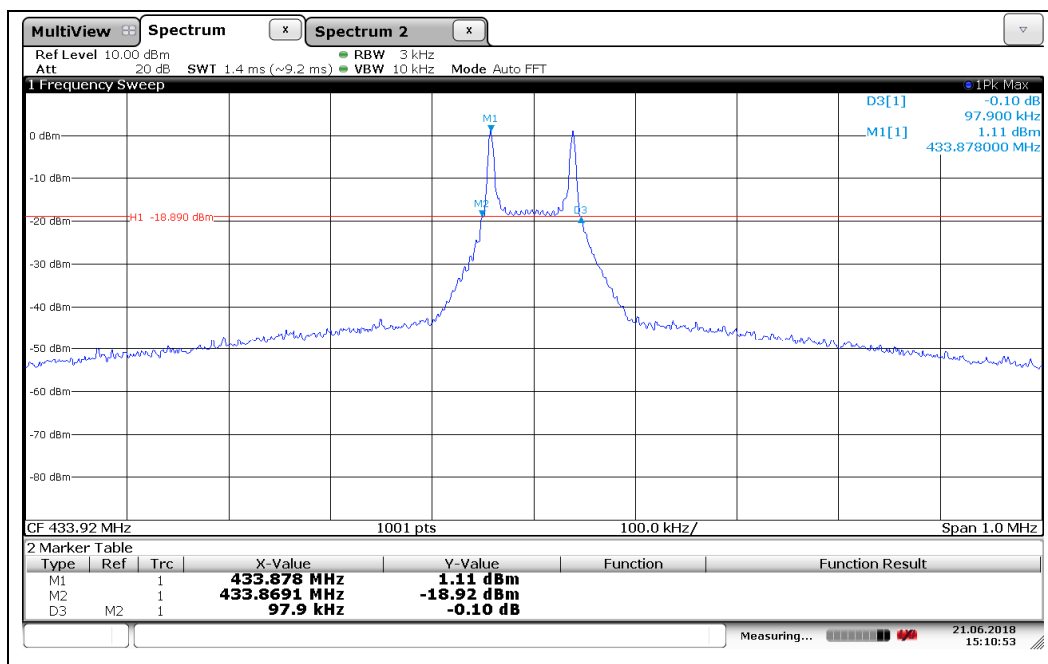

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4. Occupied Bandwidth

4.1. Test Setup

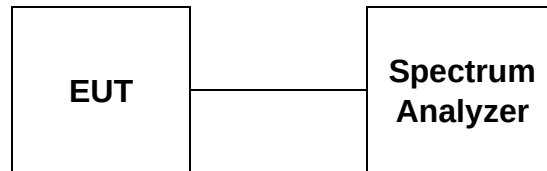

4.2. Limit

According to A.1.3 of RSS-210 Issue 9, the 99 % bandwidth of momentarily operated devices shall be less or equal to 0.25 % of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99 % bandwidth shall be less or equal to 0.5 % of the centre frequency.

4.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 x RBW.
3. The bandwidth of fundamental frequency was measured and recorded.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

4.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.


Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
433.92	98.90	1 084.80	99 % Occupied bandwidth

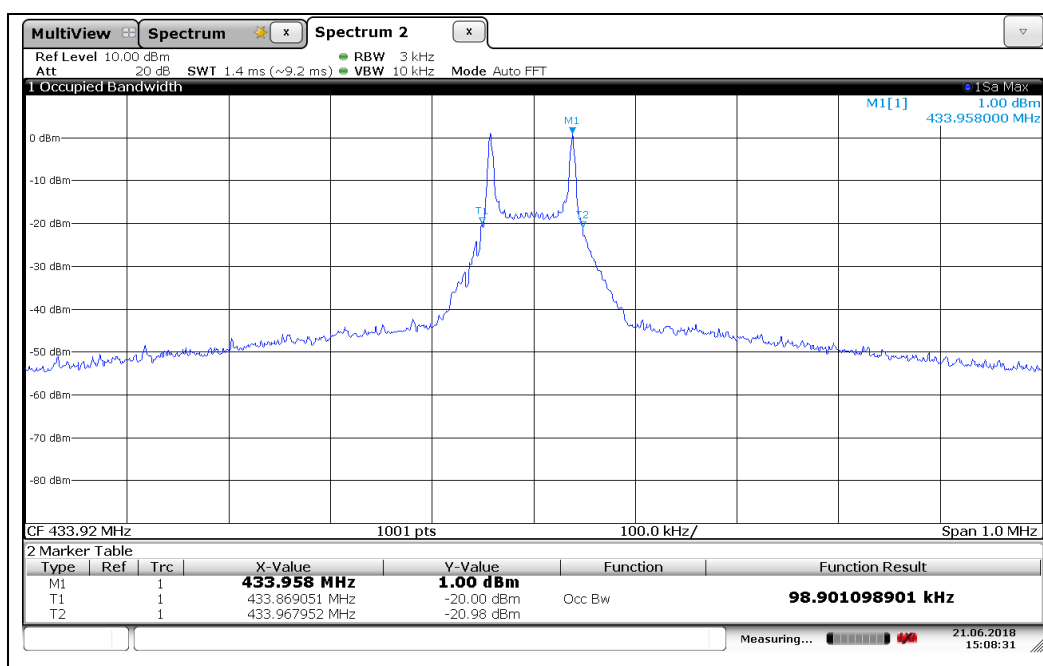

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5. Transmission Time

5.1. Test Setup

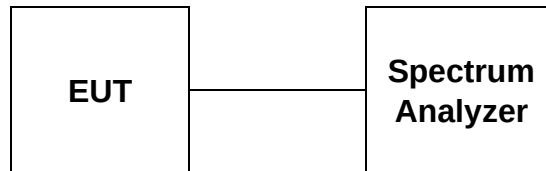

5.2. Limit

5.2.1. FCC

According to §15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.2.2. IC

According to A1.1 (a) of RSS-210 Issue 9, a manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.

5.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 1 MHz, VBW = 1 MHz, Span = 0 Hz, Sweep Time = 10 sec.
3. The bandwidth of fundamental frequency was measured and recorded.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Carrier Frequency (MHz)	Transmission Time (sec)	Limit (sec)	Remark
433.92	0.38	Same or less than 5	Pass

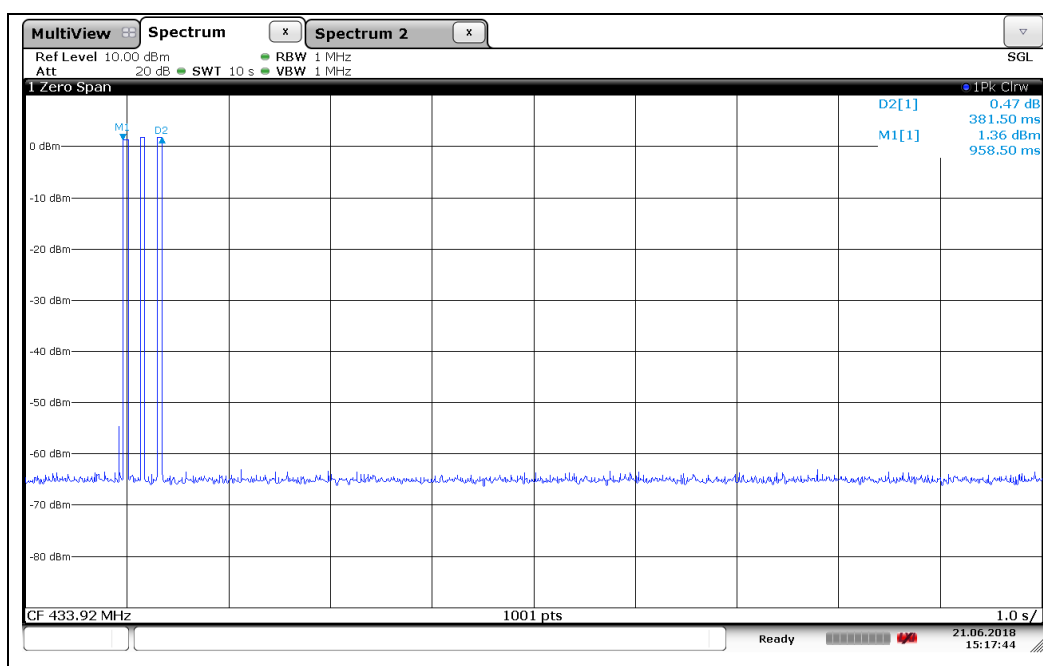

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

6. Duty Cycle Correction Factor

6.1. Test Setup

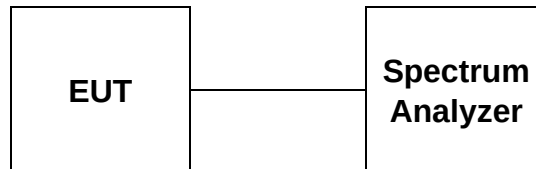

6.2. Limit

None (No dedicated Limit specified in the Rules)

6.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW = 1 MHz, VBW = Auto, Span = 0 Hz, Sweep Time = 500 ms.

6.4. Test Result

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

CALCULATION:

Average Reading = Peak Reading (dBμV/m) + 20log(Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT.
 We measured;

T_{on+off}	T_{on}	$M \% = (T_{on} / T_{on+off}) * 100 \%$	Duty Correction Factor
100 ms	41.50 ms	41.50	-7.64

$T_{on+off} = 100$ ms

$T_{on} = 41.50$ ms

Duty Cycle = $20\log(T_{on} / T_{on+off}) = 20\log(0.4150) = -7.64$

Remark:

- $T_{on+off} > 100$ ms. Use 100 ms for calculation

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

6.5. Test Plot

-Duty Cycle of Continuous EUT

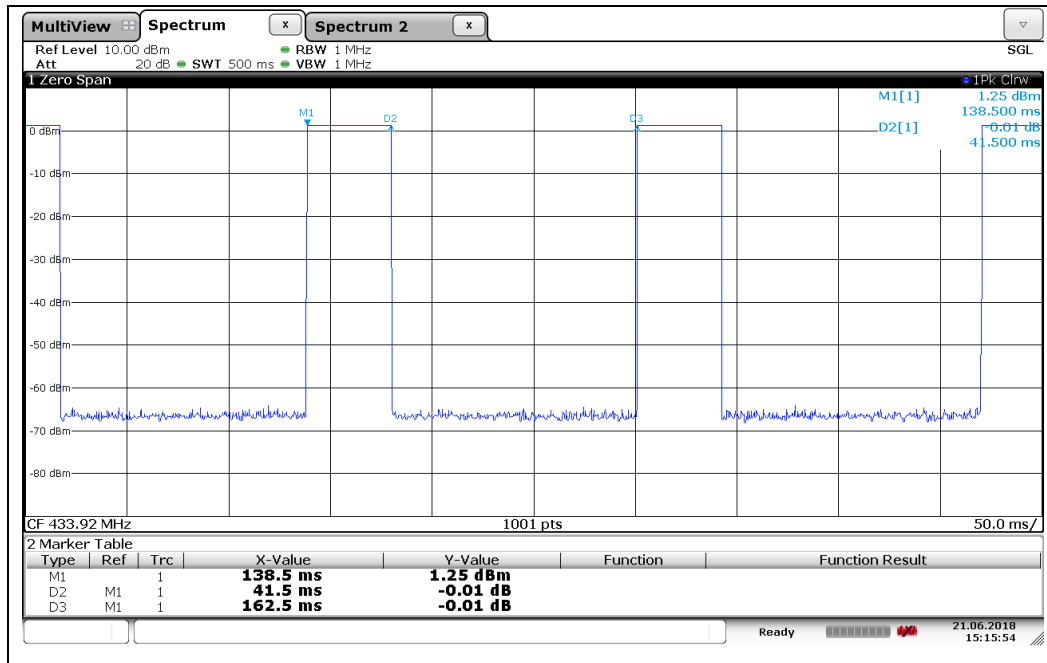

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2. Antenna Connected Construction

Antenna used in this product is PCB Pattern Antenna with gain of -18.1 dB i.

- End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)