



Project No.: TM-2211000089P
Report No.: TMTN2211001505NR

FCC ID: Y4O-ACVA2

Page: 1 / 152
Rev.: 01

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2013

TEST REPORT

For

Audio Device

Model: ACVA2

Brand: AKAI PROFESSIONAL



Issued for

inMusic Brands, Inc.

200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8, Jiucengling, Xinhua Dist.,

Tainan City, Taiwan

Issued Date: January 16, 2023

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 06, 2023	Initial Issue	ALL	Polly Wang
01	January 16, 2023	See the following note rev.01	P5.146	Polly Wang

Note:

- ※ Rev.00 Issue Date : January 06, 2023
Original report.
- ※ Rev.01 Issue Date : January 16, 2023
Update antenna spec.

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	7
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES.....	8
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS LISTINGS	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	9
6. CALIBRATION AND UNCERTAINTY.....	10
6.1 MEASURING INSTRUMENT CALIBRATION.....	10
6.2 MEASUREMENT UNCERTAINTY	10
7. SETUP OF EQUIPMENT UNDER TEST.....	11
7.1 SETUP CONFIGURATION OF EUT.....	11
7.2 SUPPORT EQUIPMENT	12
7.3 EUT OPERATING CONDITION	14
8. APPLICABLE LIMITS AND TEST RESULTS.....	17
8.1 6dB BANDWIDTH.....	17
8.2 MAXIMUM PEAK OUTPUT POWER.....	31
8.3 DUTY CYCLE	46
8.4 POWER SPECTRAL DENSITY	59
8.5 CONDUCTED SPURIOUS EMISSION.....	73
8.6 RADIATED EMISSIONS.....	95
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS.....	95
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ	100
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ	102
8.6.4 RESTRICTED BAND EDGES.....	132
8.7 POWERLINE CONDUCTED EMISSIONS	142
9. ANTENNA REQUIREMENT	146
9.1 STANDARD APPLICABLE	146
9.2 ANTENNA CONNECTED CONSTRUCTION	146
APPENDIX I SETUP PHOTOS	147


1. TEST REPORT CERTIFICATION

Applicant : inMusic Brands, Inc.
200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Manufacturer : inMusic Brands, Inc.
200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Equipment Under Test : Audio Device

Model : ACVA2

Brand : AKAI PROFESSIONAL


Date of Test : November 10, 2022 ~ November 21, 2022

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.10: 2013	No non-compliance noted


Statements of Conformity
Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Approved by:

John Chen

John Chen
Supervisor

2. EUT DESCRIPTION

Product Name	Audio Device
Model	ACVA2
Brand	AKAI PROFESSIONAL 
Received Date	November 08, 2022
Frequency Range	IEEE 802.11b/g, 802.11n HT20: 2412MHz~2462MHz Bluetooth 5.0: 2402MHz~2480MHz
Transmit Power	IEEE 802.11b Mode: 19.98dBm (99.541mW) IEEE 802.11g Mode: 21.34dBm (136.144mW) IEEE 802.11n HT20 Mode: 21.03dBm (126.765mW) Bluetooth 4.0 Mode: 5.82dBm (3.819mW) Bluetooth 5.0 Mode: 5.86dBm (3.853mW)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20: 5MHz Bluetooth 5.0: 2MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20: 11 Channels Bluetooth 5.0 : 40 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 130, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps Bluetooth 5.0: 2 Mbps
Type of Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) Bluetooth 5.0: GFSK
Antenna Type	Type: WLAN ANTENNA Model: DB1EM60-I0195 Manufacturer: BRITO Gain: 6.46 dBi
Power Rating	AC 100-240V
Hardware Version	INM-AZ05-Carrier Board
Software Version	N/A
Firmware Version	ACVA2-acvs_mpc2-0.0.0.933-2022-09-26-11-12-os_6104ca5-acvs_31fc47db e6-full
Temperature Range	0°C ~ +40°C
Reported Date	December 06, 2022

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	FSP	FSP036-RHBN3	AC 100-240V~, 1.8A, 50-60Hz	DC 12.0V, 3.0A, 36.0W

Report No.: TMTN2211001505NR**REMARK:**

1. The sample (**ACVA2**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Y40-ACVA2** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.

3. DESCRIPTION OF TEST MODES

The EUT is a Audio Device. It has one transmitter chains and one receive chains (1x1 configurations) and BT5.0. The 1x1 configuration is implemented with one outside chains (Chain 0).

The RF chipset is manufactured by Broadcom.

The antenna peak gain 6.46dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 6.5Mbps data rate (worst case) were chosen for full testing.

GFSK mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2402
Middle	2442
High	2480

Bluetooth 5.0 (GFSK) mode: 1Mbps data rate (worst case) were chosen for full testing.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

☒ No. 168, Ln. 523, Sec. 3, Zhongzheng Rd., Rende Dist., Tainan City 717017, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan

TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada

Industry Canada (TW1109)

Germany

TUV NORD

Taiwan

BSMI

USA

FCC

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:


PARAMETER	UNCERTAINTY
Radiated Emission, 9kHz~30MHz Test Site : CB1166	$\pm 2.7\text{dB}$
Radiated Emission, 30 MHz ~1GHz Test Site : CB1166	$\pm 3.76\text{dB}$
Radiated Emission, 1GHz ~18GHz Test Site : CB1166	$\pm 4.43\text{dB}$
Radiated Emission, 18GHz~26.5GHz Test Site : CB1166	$\pm 4.79\text{dB}$
Radiated Emission, 26.5GHz~40GHz Test Site : CB1166	$\pm 4.72\text{dB}$
Power Line Conducted Emission, 9kHz~30MHz	$\pm 1.83\text{dB}$
Band Width	0.025%
Peak Output Power MU	$\pm 1.9\text{dB}$
Band Edge MU	$\pm 0.264\text{dBuV}$
Channel Separation MU	$\pm 361.69\text{Hz}$
Duty Cycle MU	$\pm 0.2\%$
Frequency Stability MU	$\pm 0.493\text{Hz}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Uncertainty figures are valid to a confidence level of 95%, K=2


7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

FOR RF TEST

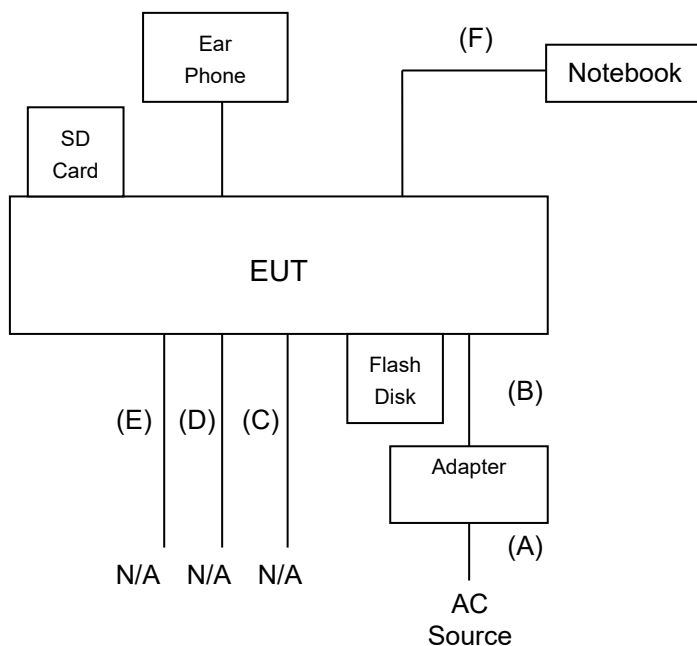

FOR EMI TEST

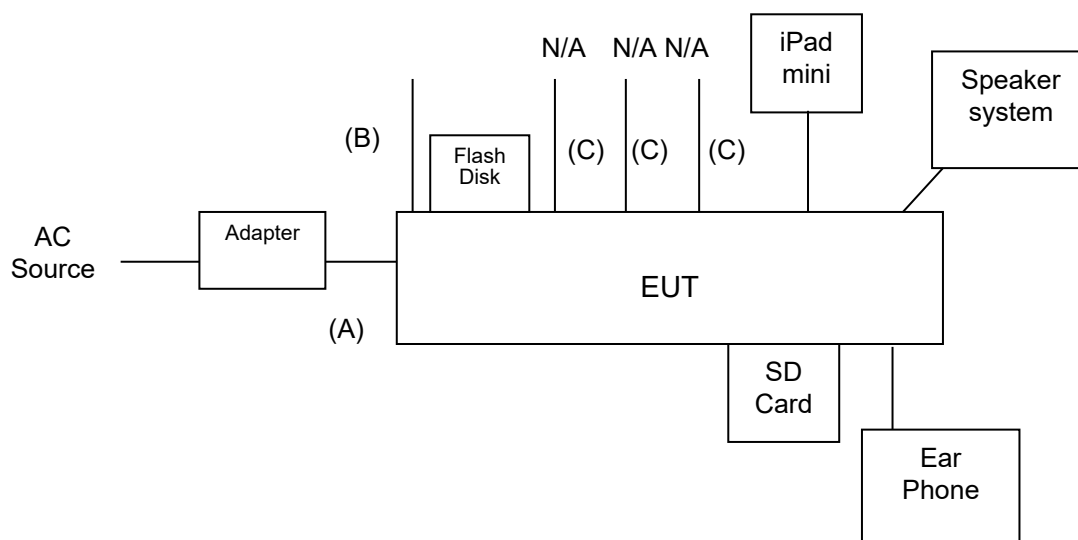

7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Earphone	N/A	N/A	DOC	N/A
2	SD Card	TOSHIBA	2GB	DOC	N/A
3	Flash Disk	Transcend	Jet Flash700	DOC	N/A

No.	Signal cable description	
A	AC Power	Unshielded, 1.0m, 1pcs.
B	DC Power	Unshielded, 1.5m, 1pcs with one core.
C	USB	Shielded, 1.8m, 1pcs with one core.
D	Audio	Shielded, 0.15m, 4pcs.
E	Audio	Shielded, 1.0m, 5pcs.
F	Command cable	Unshielded, 1.8m, 1pcs.

EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	iPad mini	Apple	A1432	DOC	N/A
2	Speaker System	infotec	SP-102	DOC	N/A
3	Flash Disk	Transcend	Jet Flash790	DOC	N/A
4	Earphone	N/A	N/A	DOC	N/A
5	SD Card	TOSHIBA	2GB	DOC	N/A

No.	Signal cable description	
A	Power cable	Shielded, 1.5m, 1pcs with one core
B	USB cable	Shielded, 1.5m, 1pcs with one core
C	Audio cable	Unshielded, 1.5m, 8pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7.3 EUT OPERATING CONDITION

RF Setup

1. Set up a whole system as the setup diagram.
2. The “Tera Term” software was used for testing
3. Key in “root” , ”connmanctl enable wifi”.

TX Mode Key in:

B Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 01 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -1
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```

G Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 06 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 12
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```

HT20 Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -h 0 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 12
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```

RX Mode Key in:

```
wl down
wl band auto
wl mpc 0
wl country ALL
wl channel 01 (01,06,11)
wl bi 65535
wl up
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
```

4. All of the function are under run.

5. Start test.

Report No.: TMTN2211001505NR

Bluetooth:

1. Set up a whole system as the setup diagram.
2. The "Tera Term" software was used for testing.
3. Key in :

```
root
cd /sys/class/bluetooth/hci0
ls -al
cd rfkill2/
echo 1 >state
echo 0 > /sys/class/rfkill/rfkill1/soft
bluetoothctl
power on
```

4. Press "Ctrl + z"

TX Mode

BLE 1M Key in:

```
hciconfig hci0 up
hcidtool cmd 0x03 0x0003
hcidtool cmd 0x08 0X0001e 00(00,14,27) 25 00
```

BLE 2M

BLE 2M Key in:

```
hciconfig hci0 up
hcidtool cmd 0x03 0x0003
hcidtool cmd 0x08 0x0034 00(00,14,27) 25 00 02
```

RX Mode

BLE1M Key in:

```
hciconfig hci0 up
hcidtool cmd 0x03 0x0003
hcidtool cmd 0x3f 0x0052 EE FF C0 88 00 00 E8 03 00(00,27,4E) 04 00 01 FF FF
```

BLE2M Key in:

```
hciconfig hci0 up
hcidtool cmd 0x03 0x0003
hcidtool cmd 0x08 0x0033 00(00,14,27) 02 00
```

5. All of the function are under run.
6. Start test.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6dB BANDWIDTH

LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Chamber Room #1166					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	08/11/2022	08/10/2023
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

TEST RESULTS

No non-compliance noted.

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.5°C, 54%	Test Date	2022/11/21

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	8.07	500	PASS
Middle	2437	8.06	500	PASS
High	2462	8.07	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	15.36	500	PASS
Middle	2437	15.60	500	PASS
High	2462	15.21	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	15.50	500	PASS
Middle	2437	15.22	500	PASS
High	2462	15.21	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.0°C, 51%	Test Date	2022/11/21

Bluetooth 4.0 (GFSK) mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	714	500	PASS
Middle	2442	716	500	PASS
High	2480	718	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.0°C, 51%	Test Date	2022/11/21


Bluetooth 5.0 (GFSK) mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	1160	500	PASS
Middle	2442	1150	500	PASS
High	2480	1160	500	PASS

NOTE :


1. At final test to get the worst-case emission at 2Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power.


6dB BANDWIDTH (802.11b MODE)

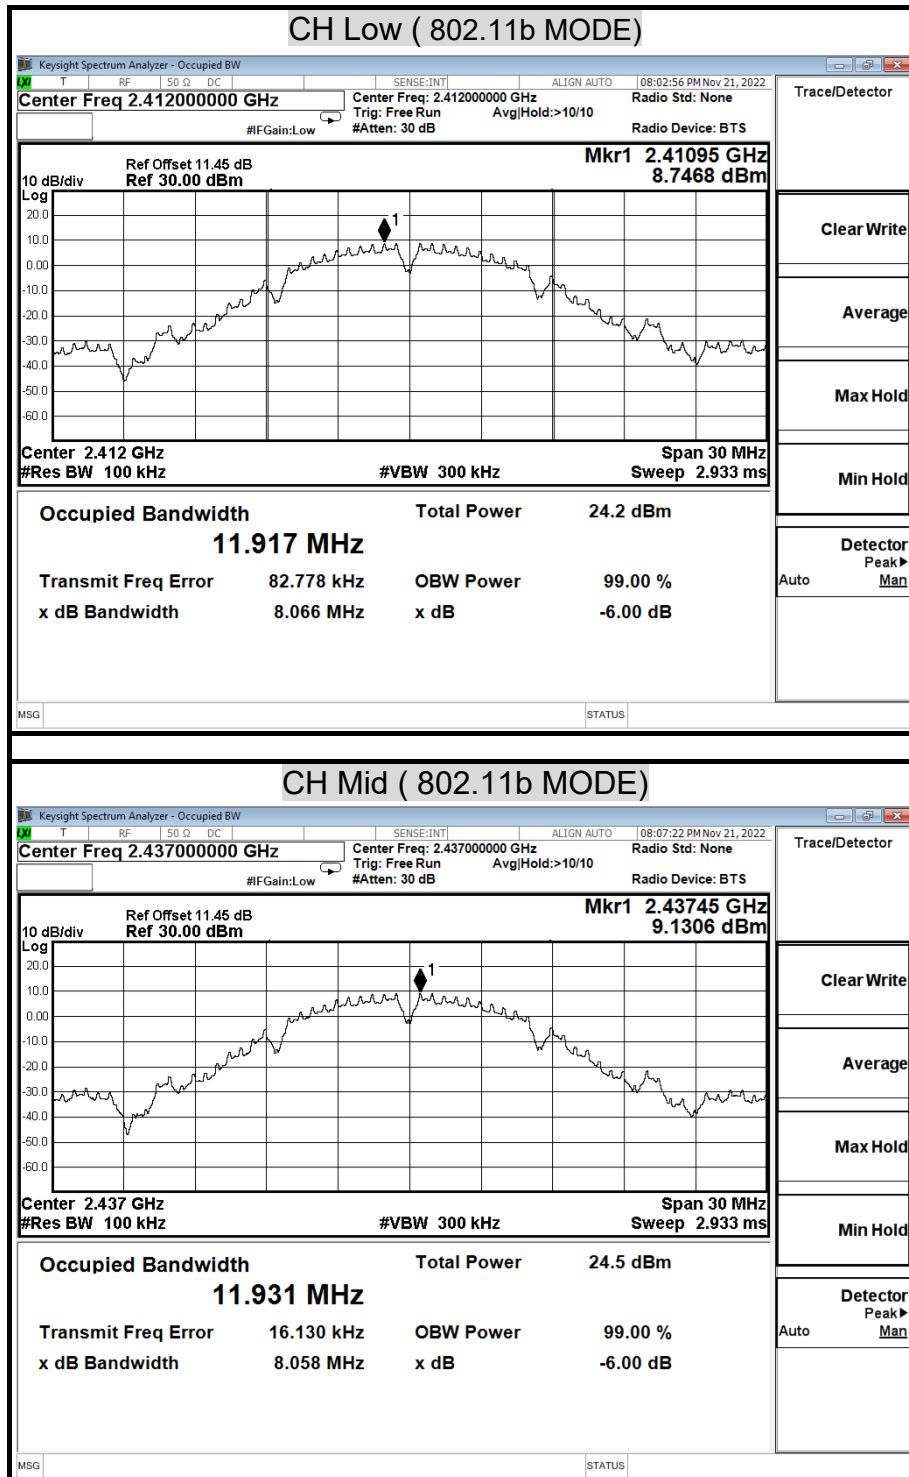

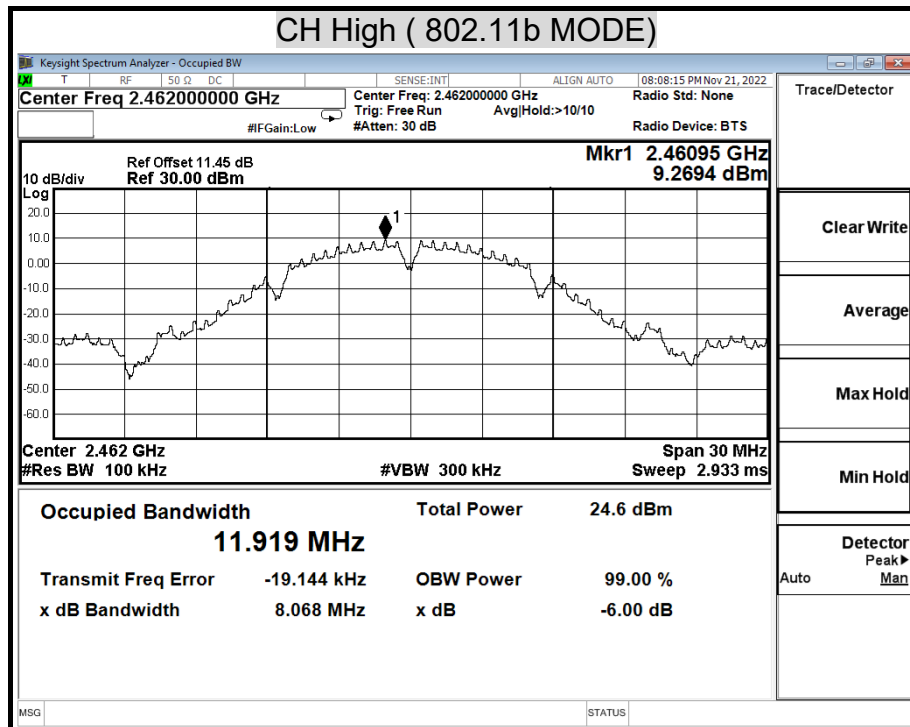



6dB BANDWIDTH (802.11g MODE)

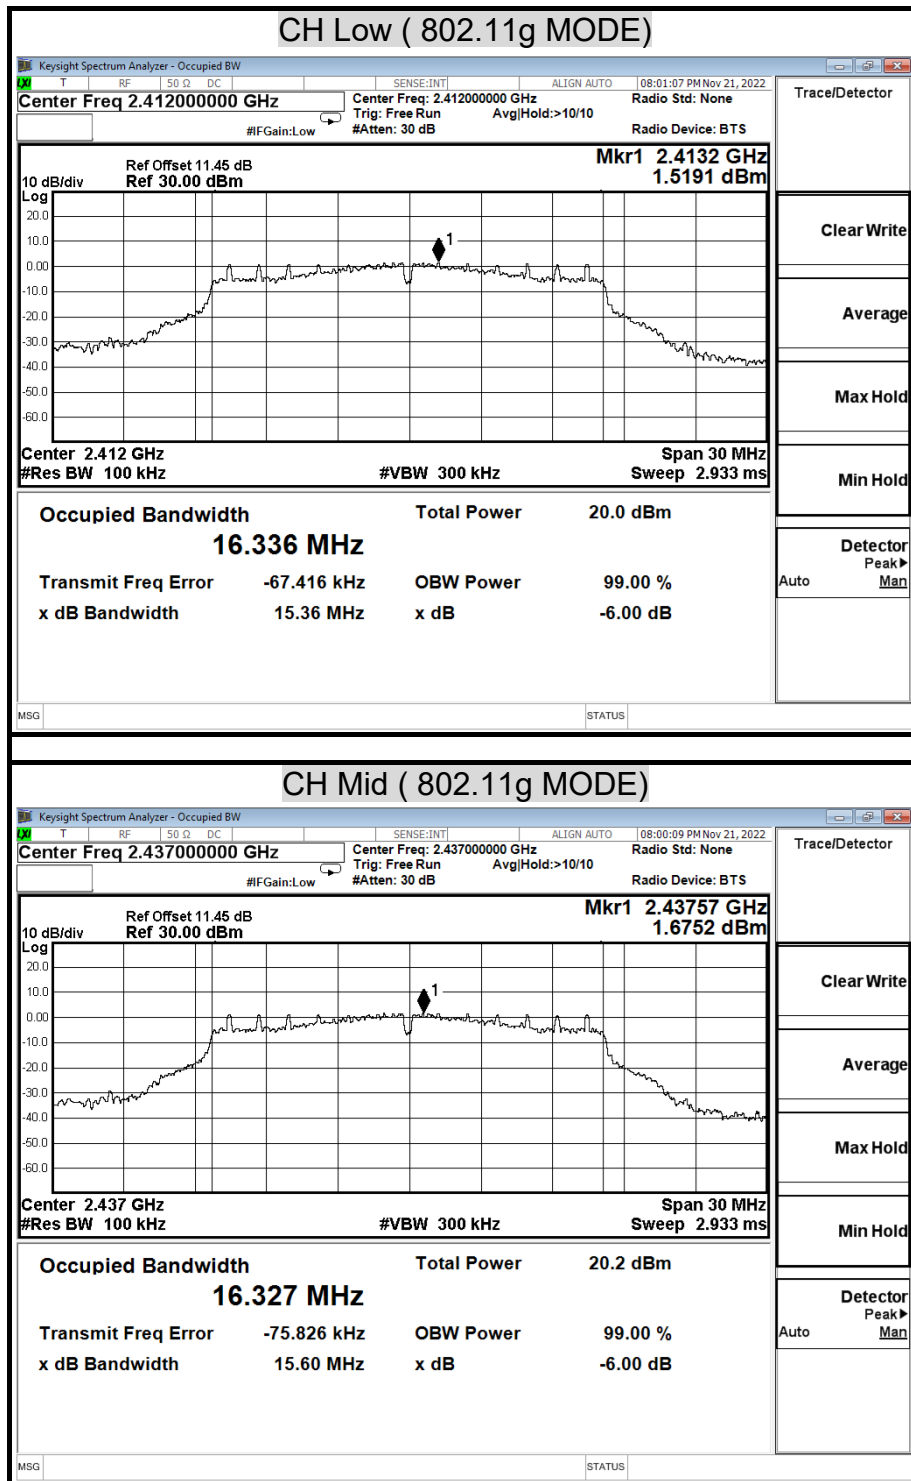

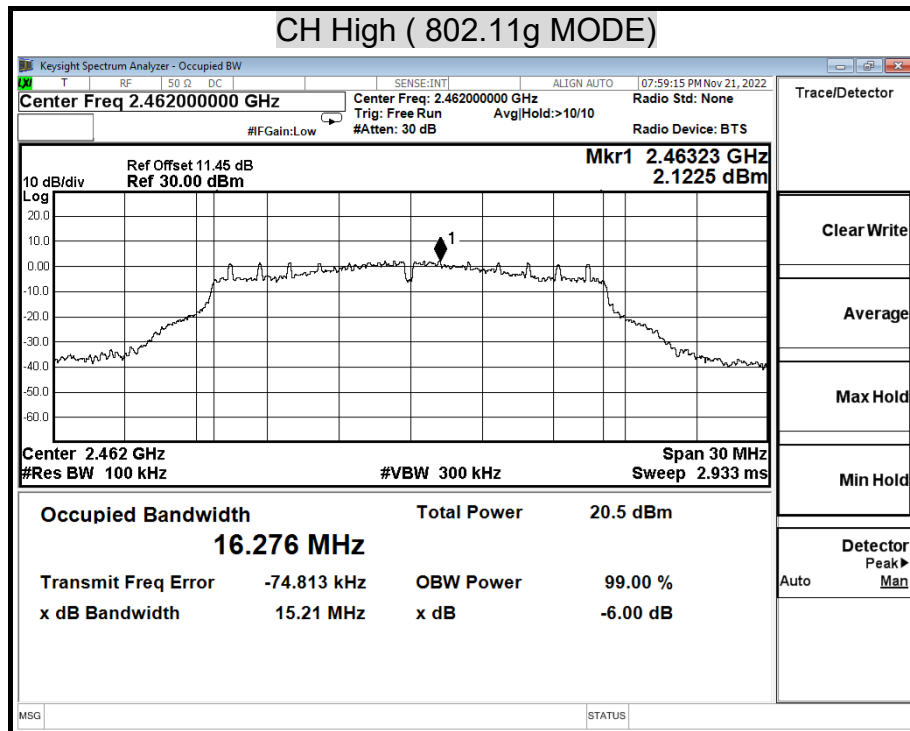



6dB BANDWIDTH (802.11n HT20 MODE)

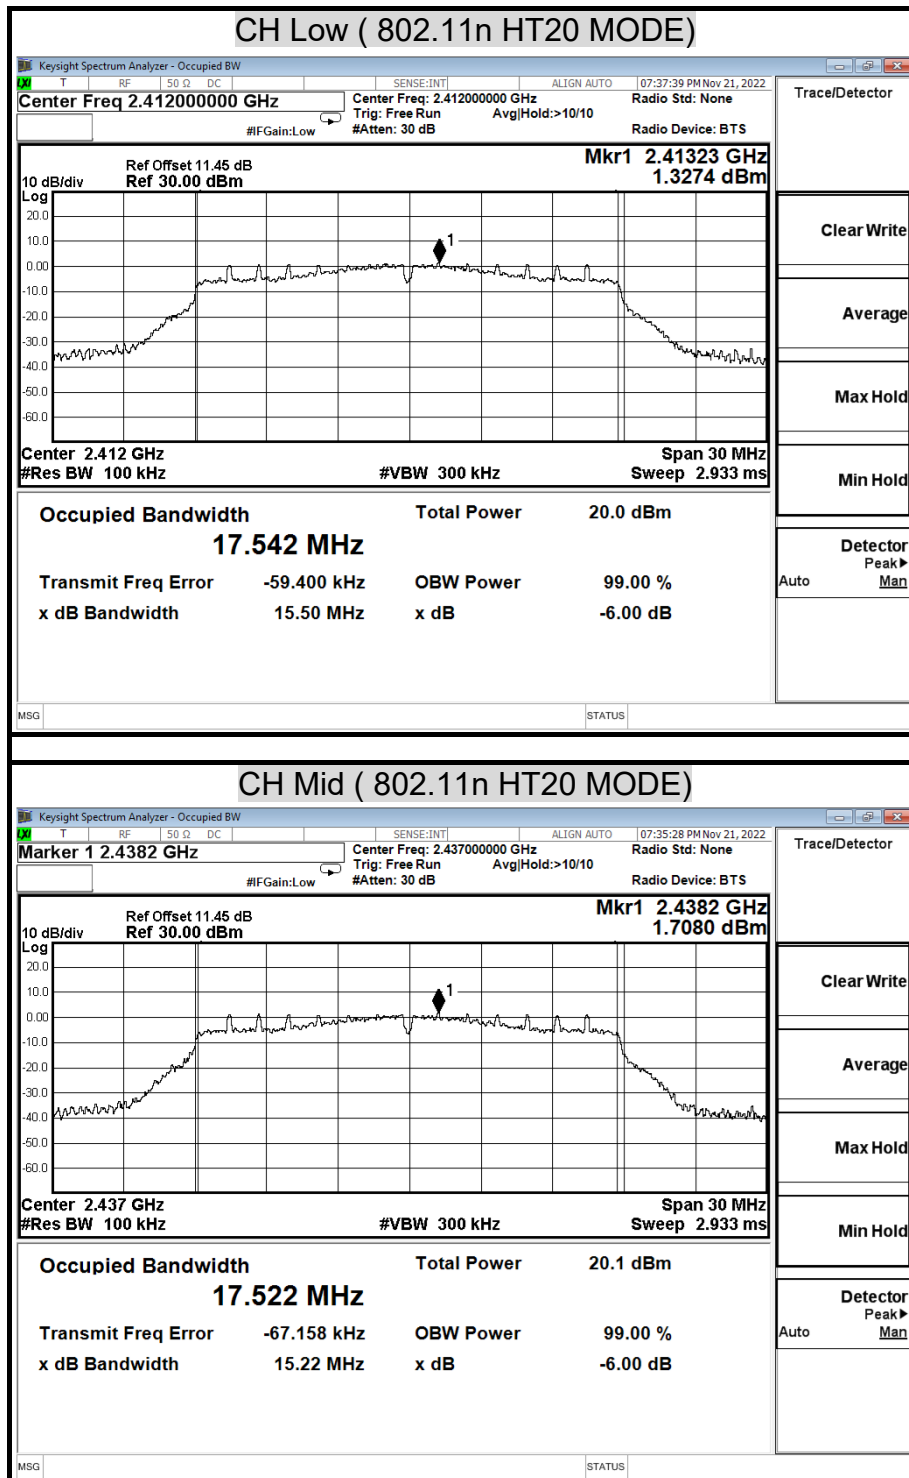

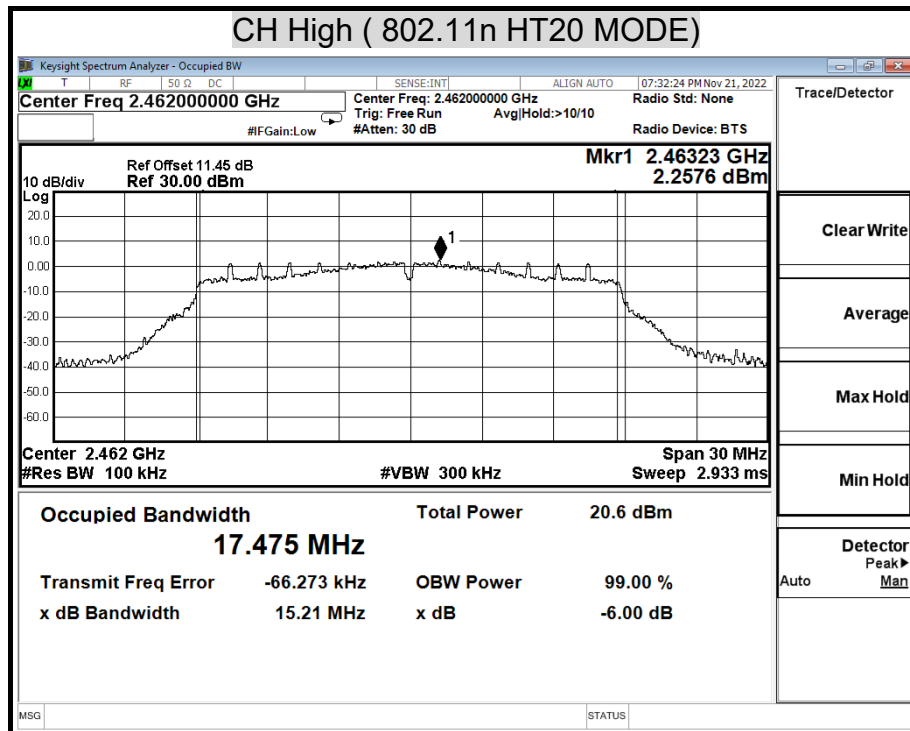



6dB BANDWIDTH (GFSK(4.0) MODE)

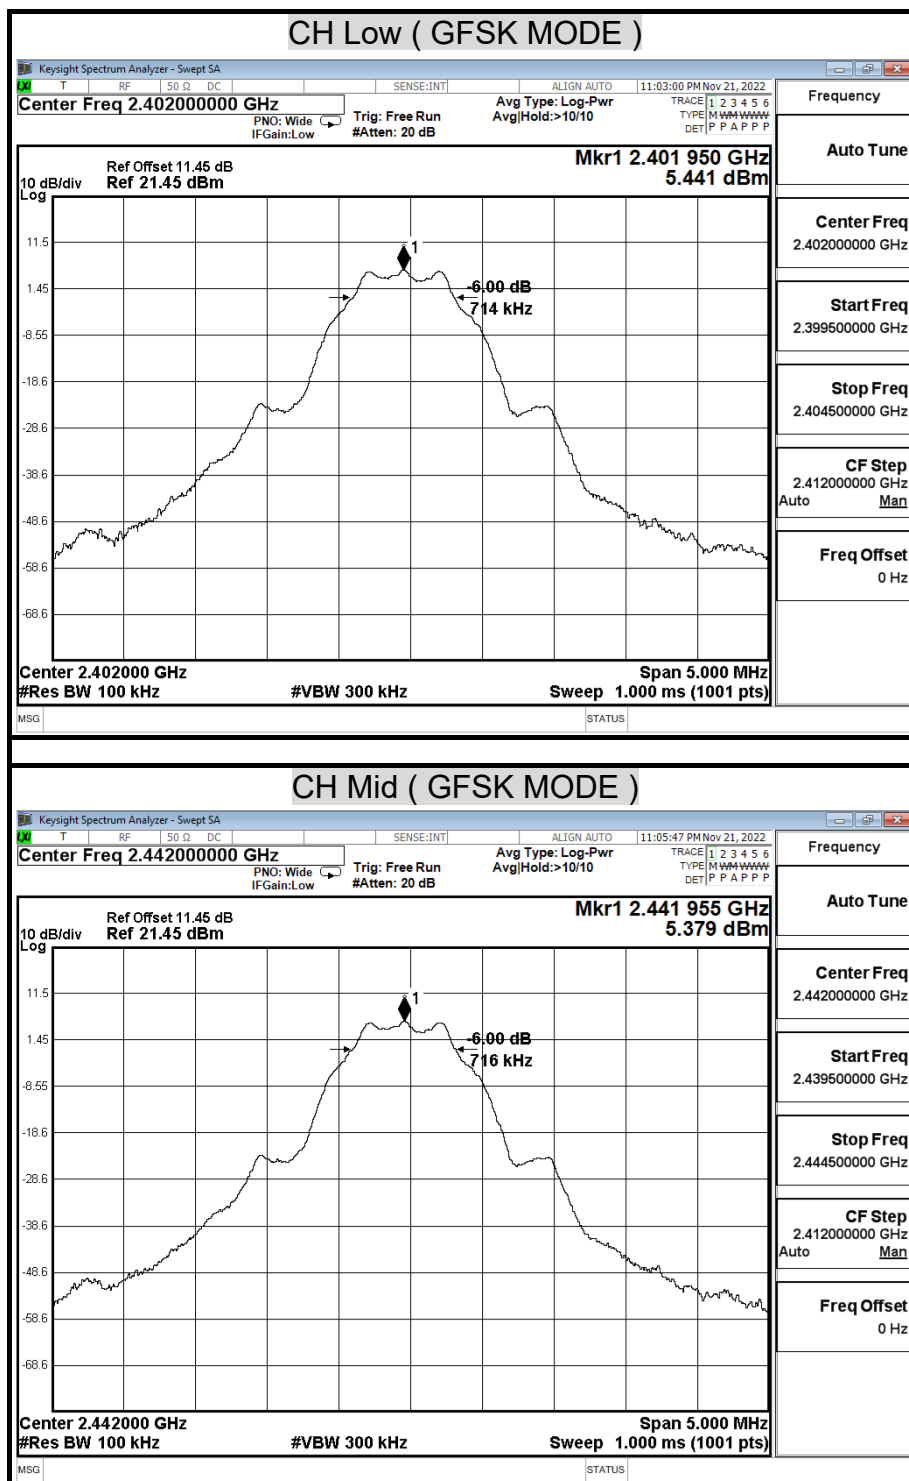

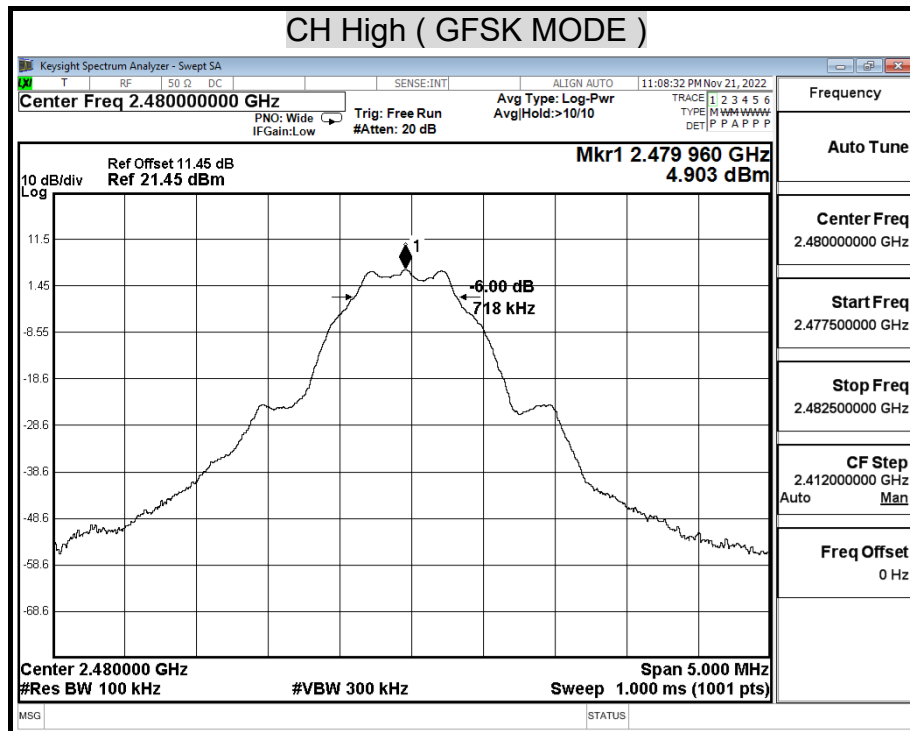

6dB BANDWIDTH (GFSK(5.0) MODE)

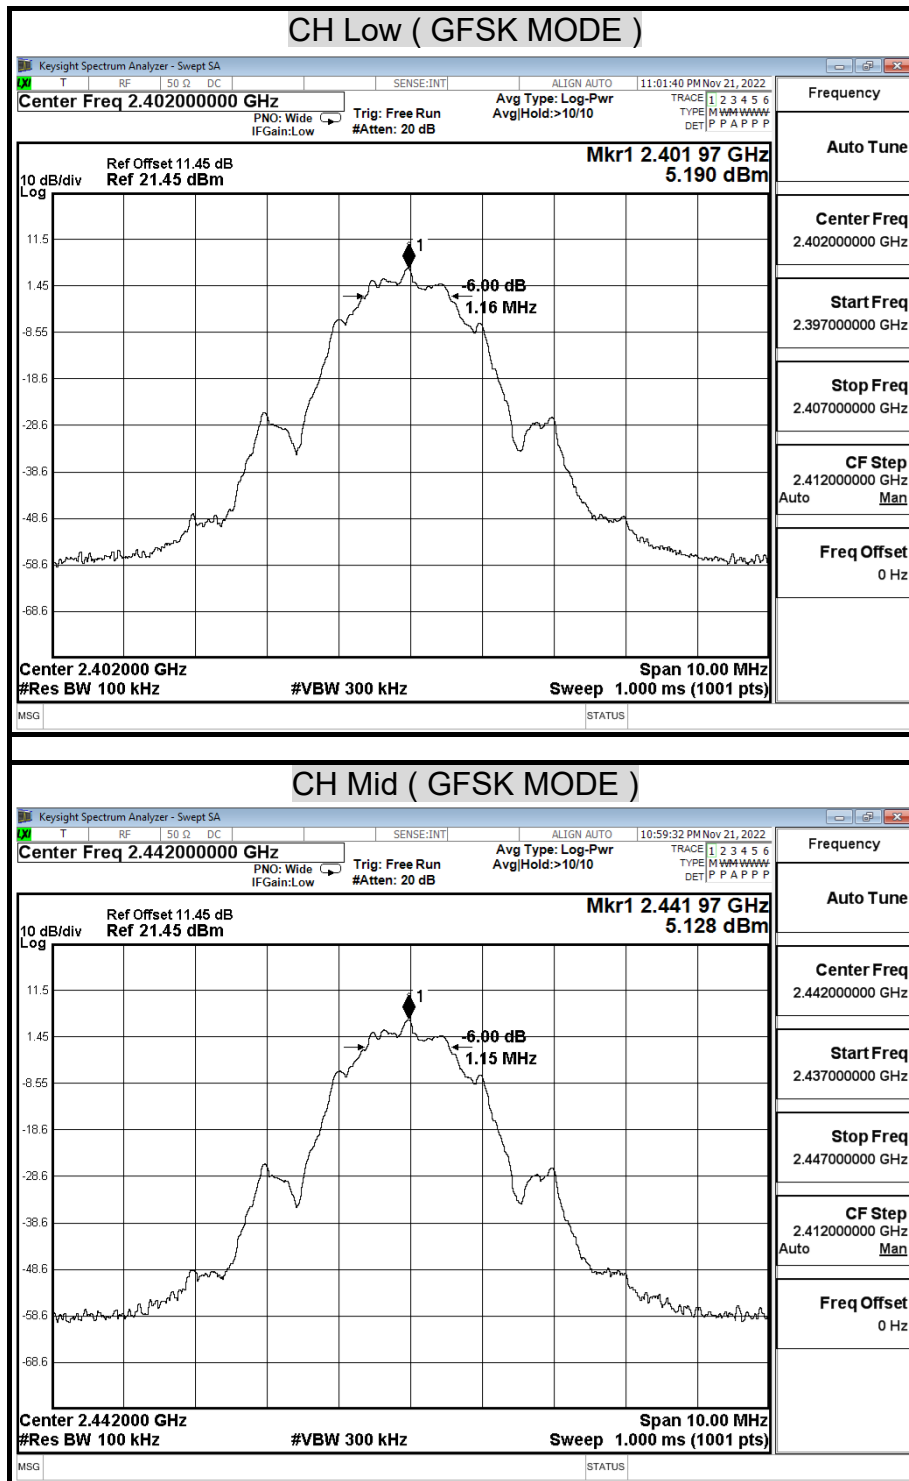

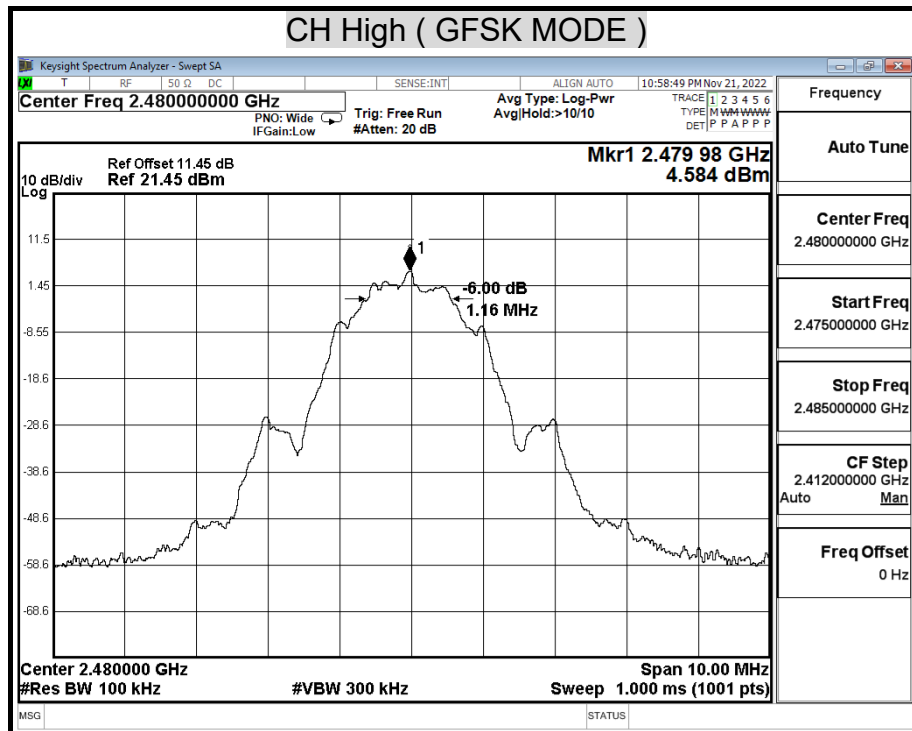

8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :


§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Chamber Room #1166					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	08/11/2022	08/10/2023
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 8.3.1.1.

11.9.1.1 RBW \geq DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than

the DTS bandwidth is available to perform the measurement:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

TEST RESULTS

No non-compliance noted

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.5°C, 54%	Test Date	2022/11/21

IEEE 802.11b mode

Channel	Frequency (MHz)	Data Rate	Power Set	Output Power (dBm)	Output Power Total		Limit (dBm)	Result
				ChainA	(dBm)	(W)		
Low	2412	1	1	19.57	19.57	0.0906	30.00	PASS
Middle	2437	1	1	19.85	19.85	0.0966		PASS
High	2462	1	1	19.98	19.98	0.0995		PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

IEEE 802.11g mode

Channel	Frequency (MHz)	Data Rate	Power Set	Output Power (dBm)	Output Power Total		Limit (dBm)	Result
				ChainA	(dBm)	(W)		
Low	2412	6	12	20.60	20.60	0.1148	30.00	PASS
Middle	2437	6	12	20.98	20.98	0.1253		PASS
High	2462	6	12	21.34	21.34	0.1361		PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Data Rate	Power Set	Output Power (dBm)	Output Power Total		Limit (dBm)	Result
				ChainA	(dBm)	(W)		
Low	2412	MCS1	12	20.24	20.24	0.1057	30.00	PASS
Middle	2437	MCS1	12	20.66	20.66	0.1164		PASS
High	2462	MCS1	12	21.03	21.03	0.1268		PASS

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.0°C , 51%	Test Date	2022/11/21

Bluetooth 4.0 (GFSK) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	5.82	30.00	PASS
Middle	2442	5.72	30.00	PASS
High	2480	5.33	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

Bluetooth 5.0 (GFSK) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	5.76	30.00	PASS
Middle	2442	5.86	30.00	PASS
High	2480	5.42	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 2Mbps.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

Average Power Data

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	16.70
Middle	2437	16.97
High	2462	17.06

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	12.32
Middle	2437	12.92
High	2462	13.13

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
		Chain 0
Low	2412	11.82
Middle	2437	12.28
High	2462	12.46


Bluetooth 4.0 (GFSK) mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	5.43
Middle	2442	5.26
High	2480	4.89

Bluetooth 5.0 (GFSK) mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	5.39
Middle	2442	5.29
High	2480	4.86


MAXIMUM PEAK OUTPUT POWER (802.11b MODE)

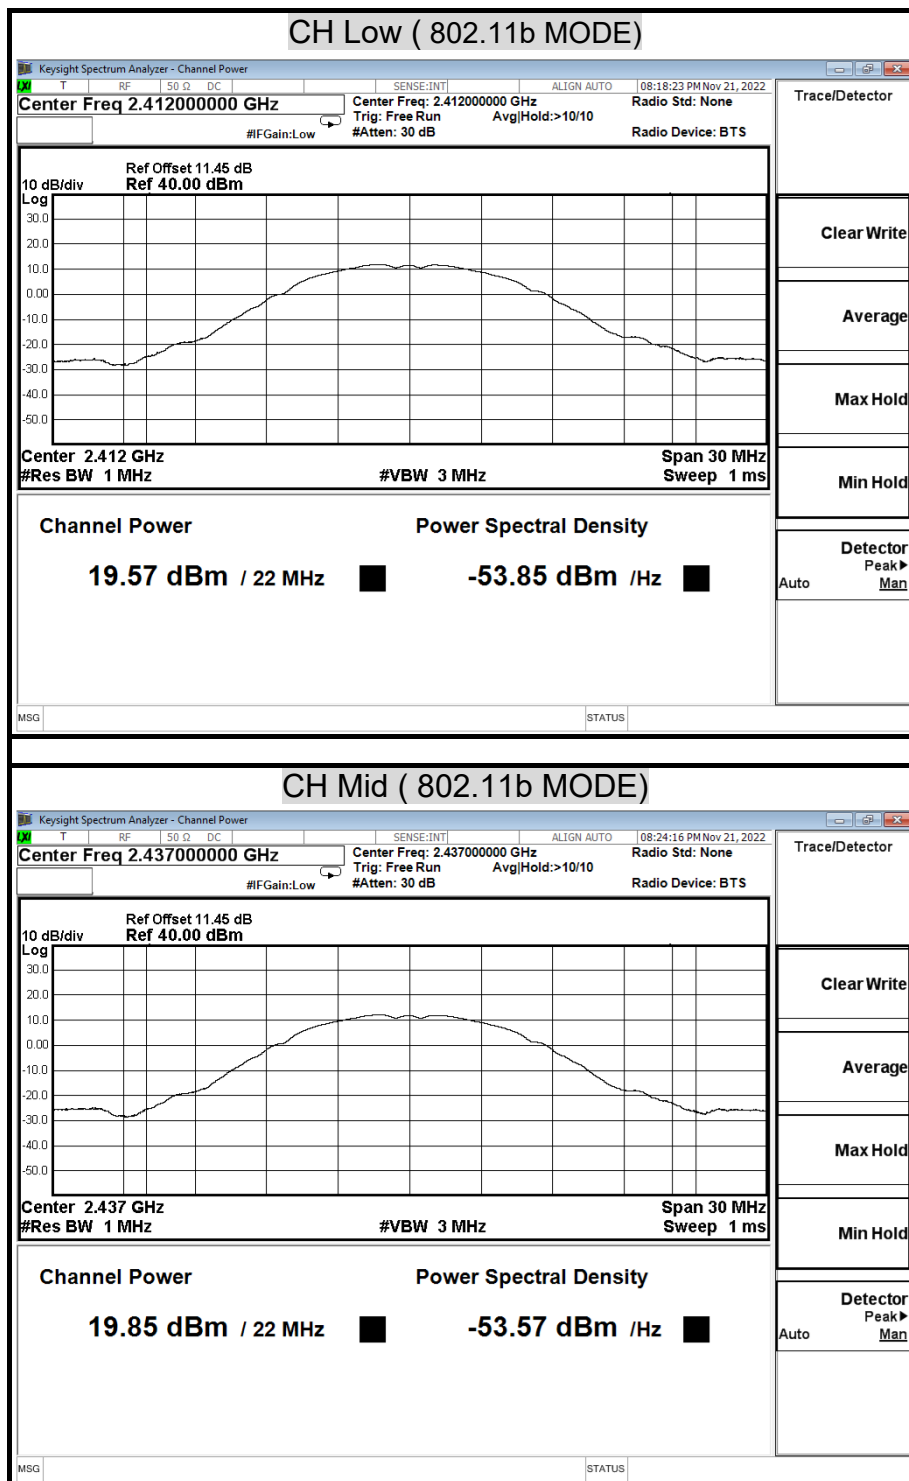

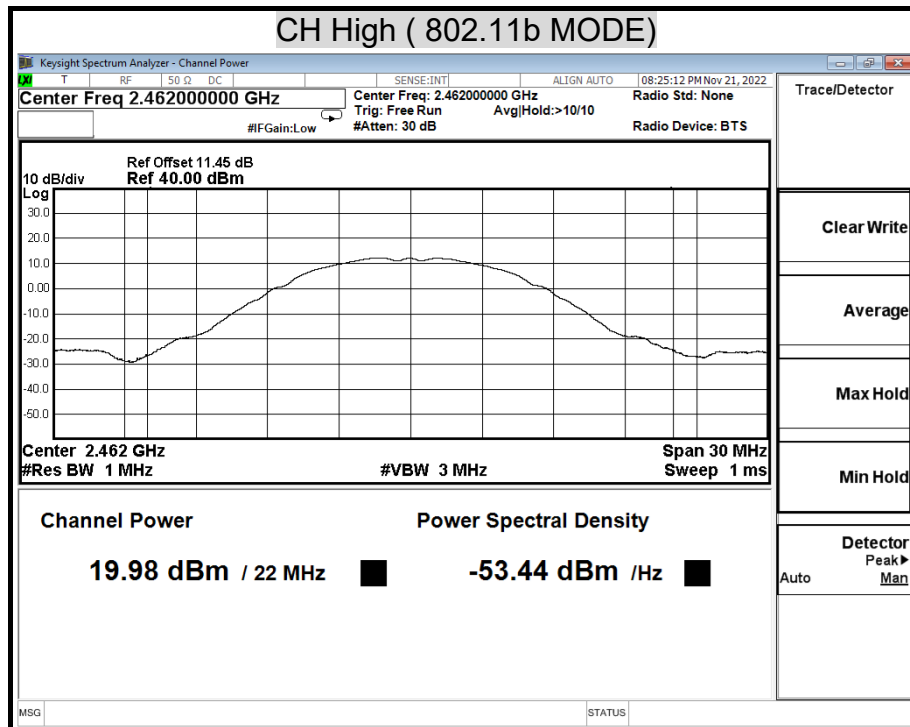



MAXIMUM PEAK OUTPUT POWER (802.11g MODE)

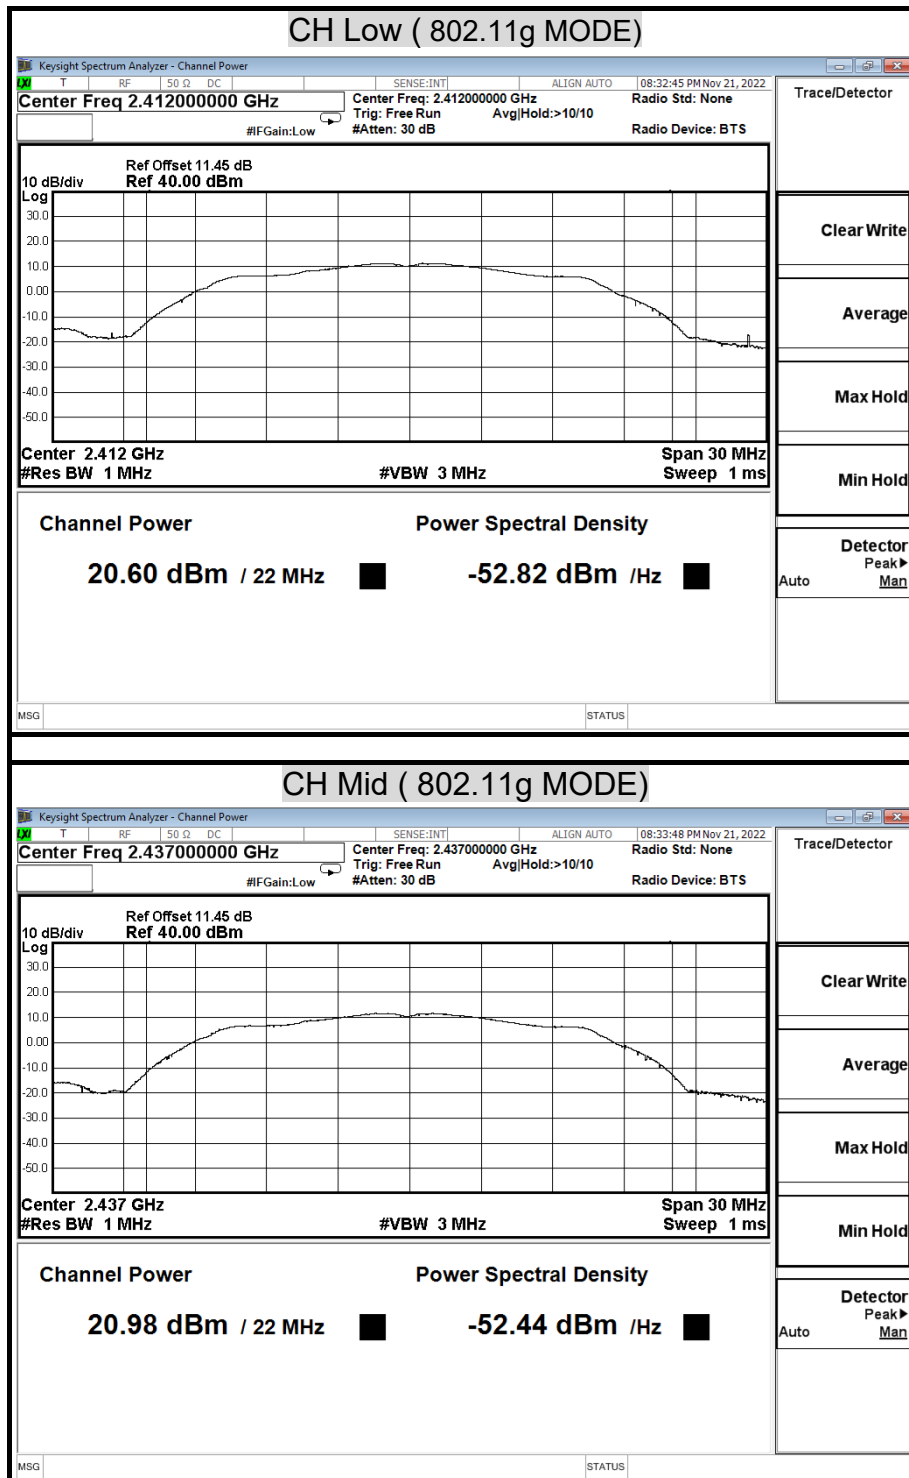

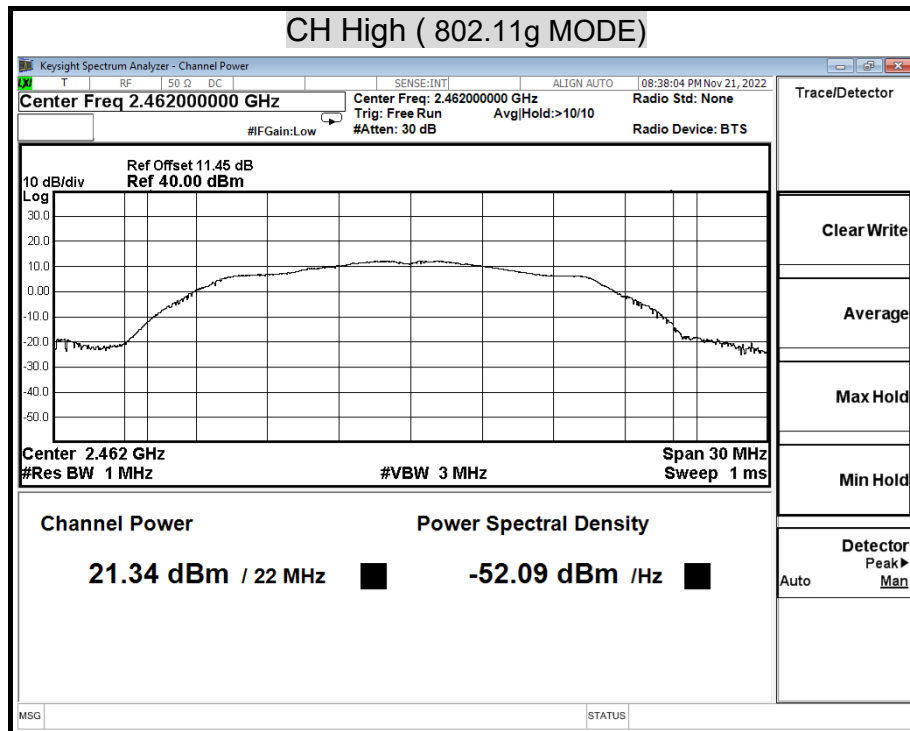



MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE)

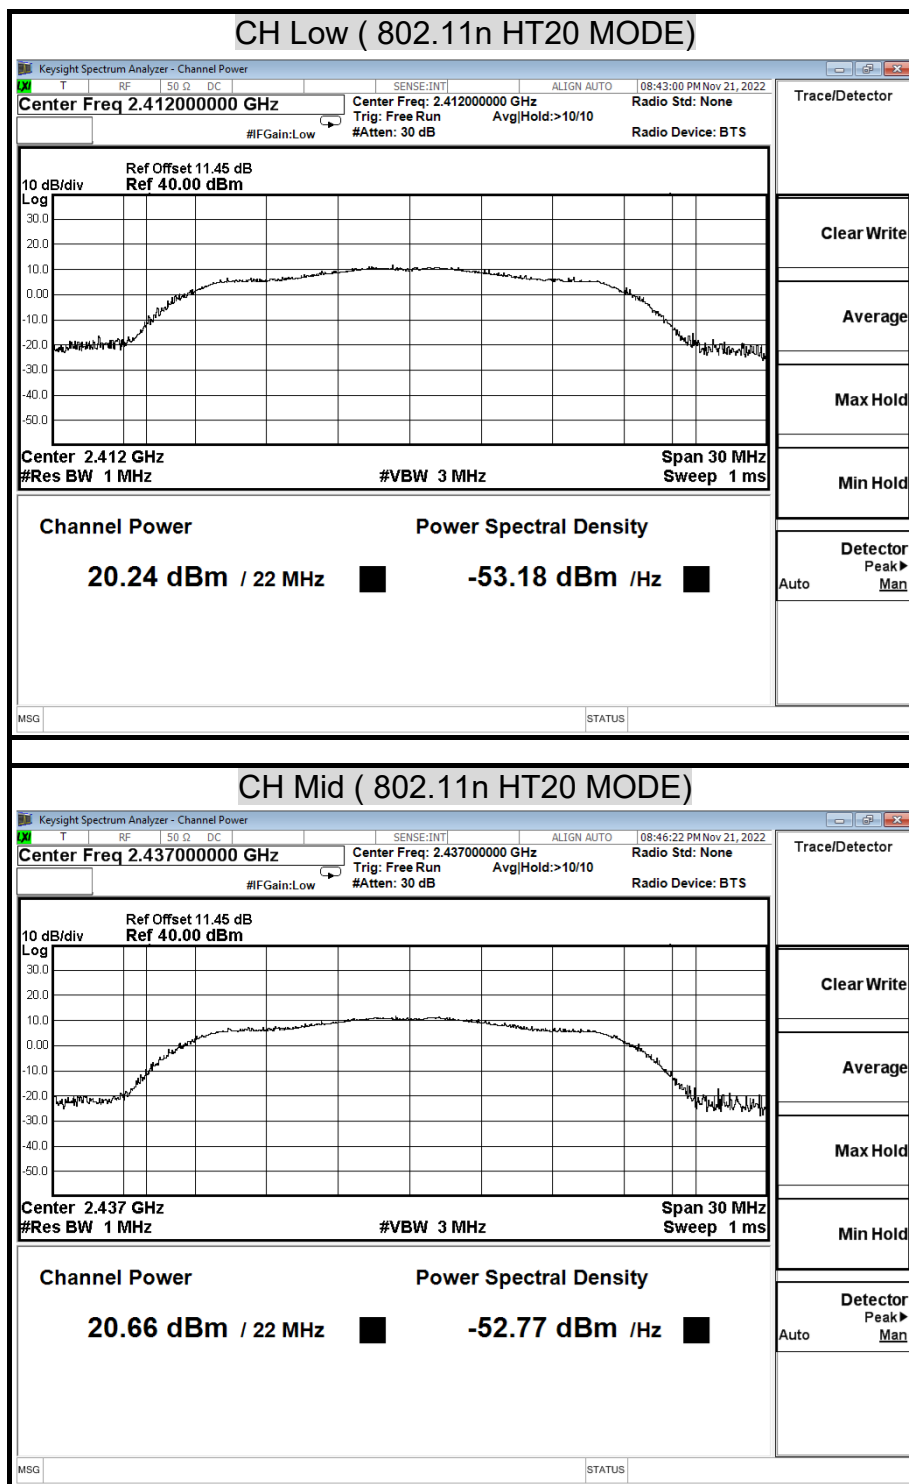

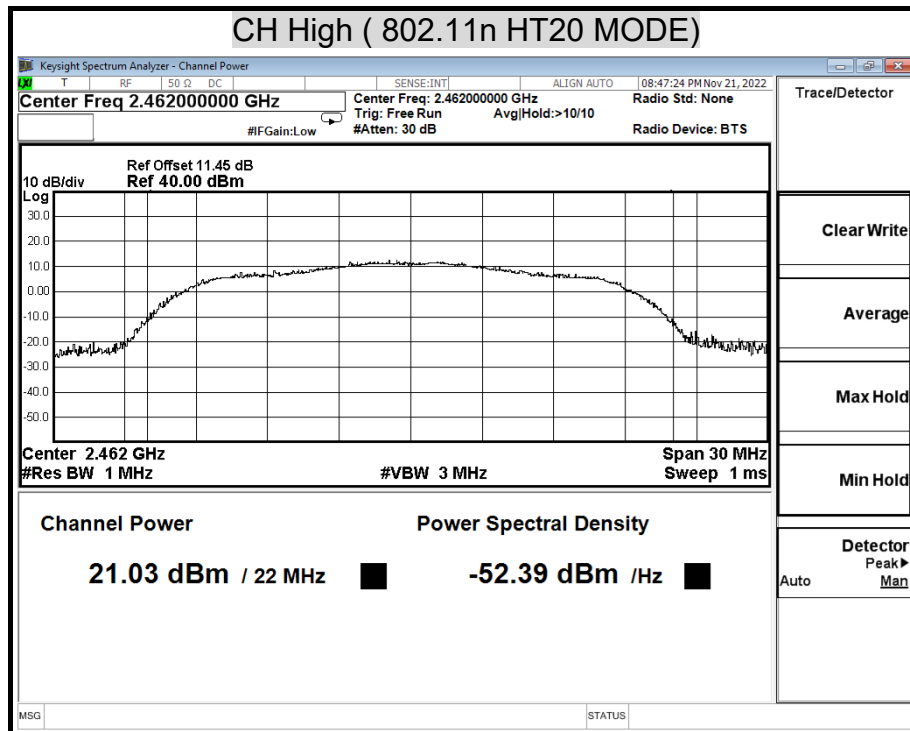



MAXIMUM PEAK OUTPUT POWER (GFSK(4.0) MODE)

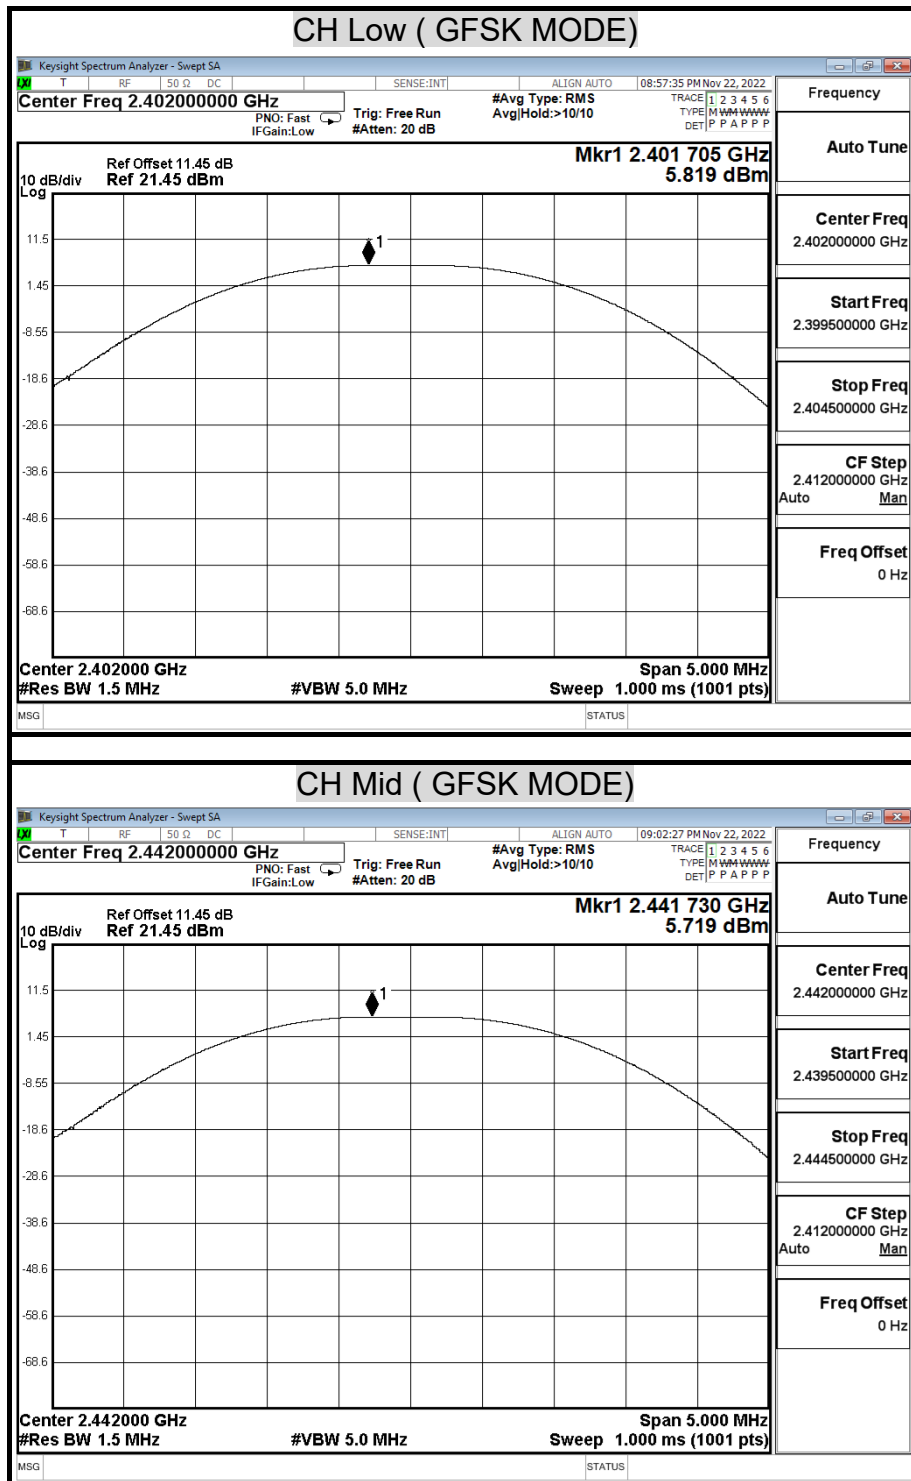

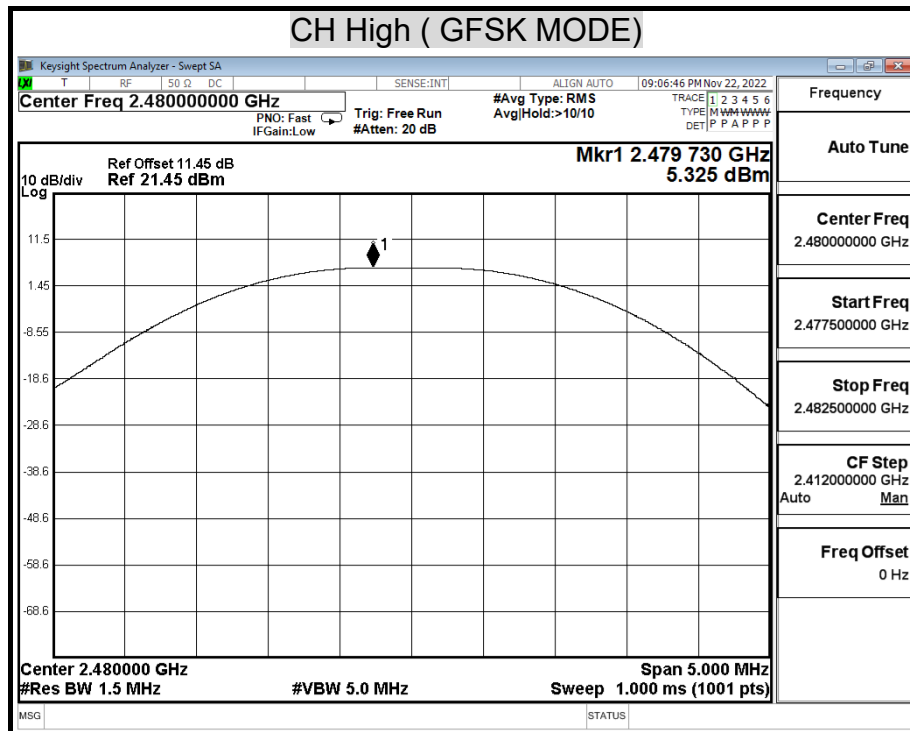

MAXIMUM PEAK OUTPUT POWER (GFSK(5.0) MODE)

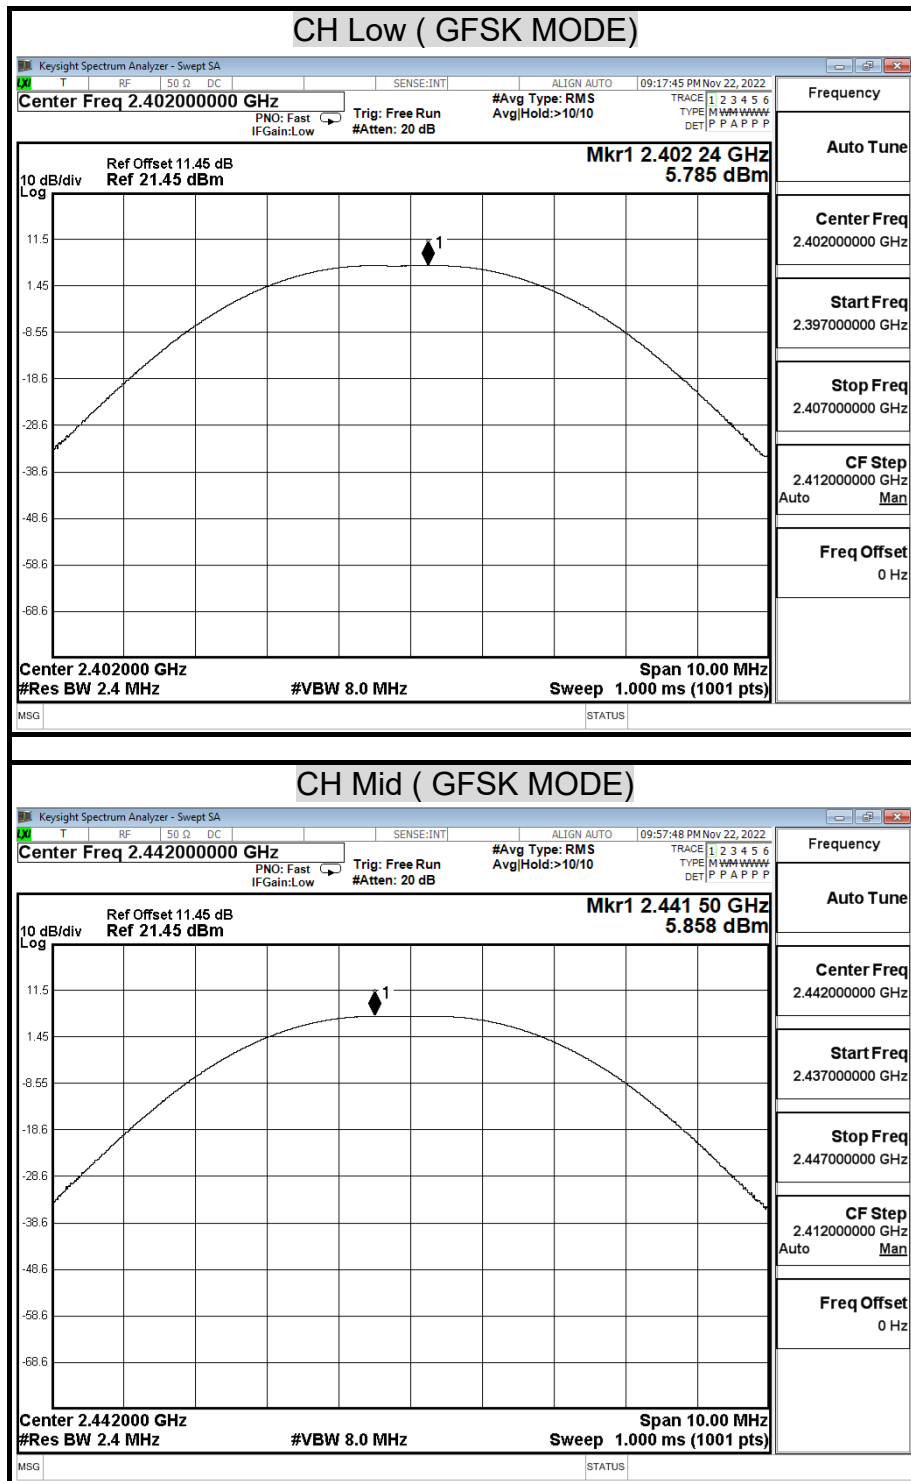

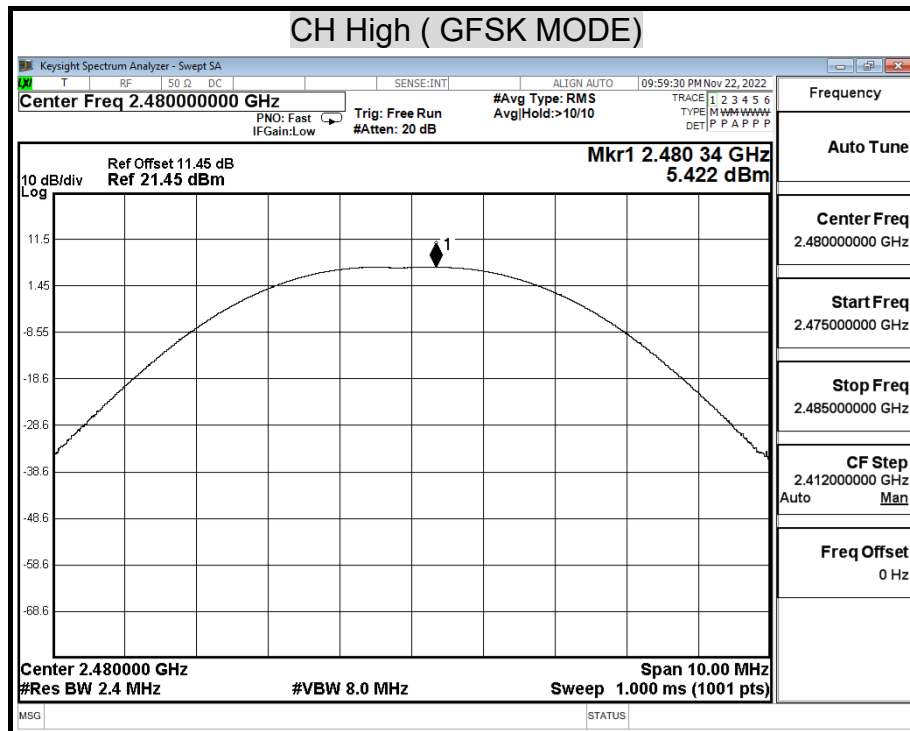

8.3 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENTS

Chamber Room #1166					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	08/11/2022	08/10/2023
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

No non-compliance noted.

TEST DATA

WIFI



Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.5°C, 54%	Test Date	2022/11/21


	us	Times	Ton	Total Ton time(ms)
Ton1	100000.000	1	100000	
Ton2		0	0	
Ton3			0	100
TP				100



Ton	100
TP(Ton+Toff)	100
Duty Cycle	1
10 * log (1/x) =	0


TEST PLOT



Plot

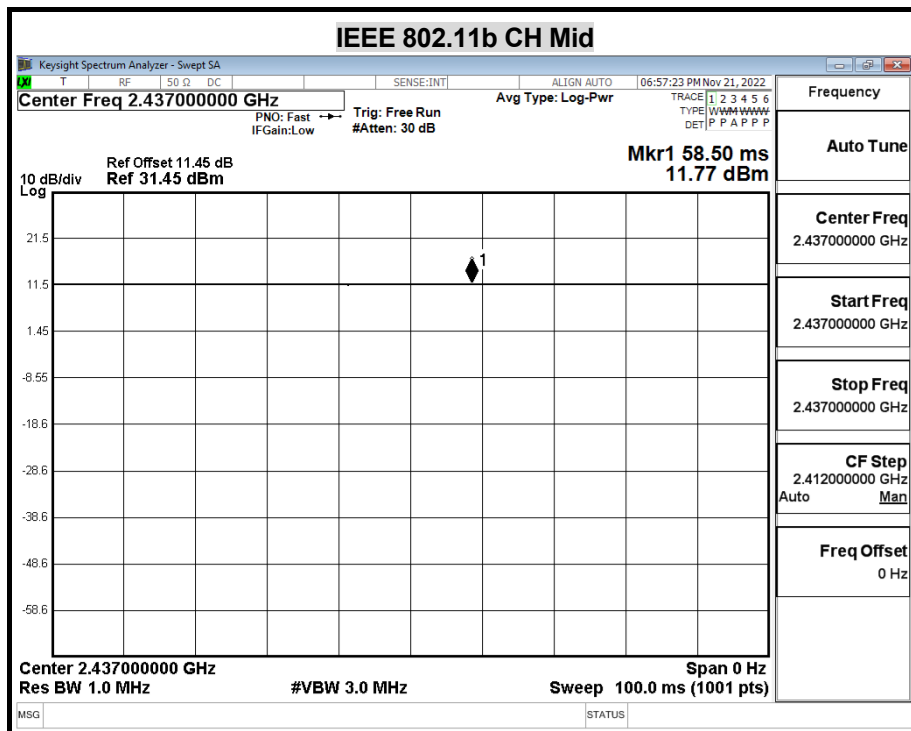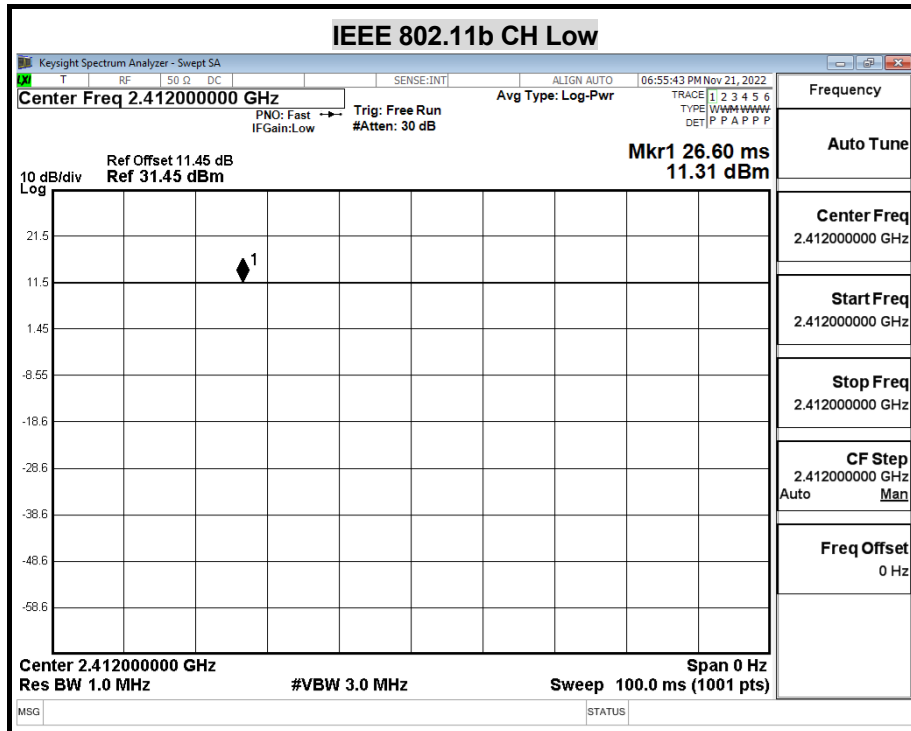


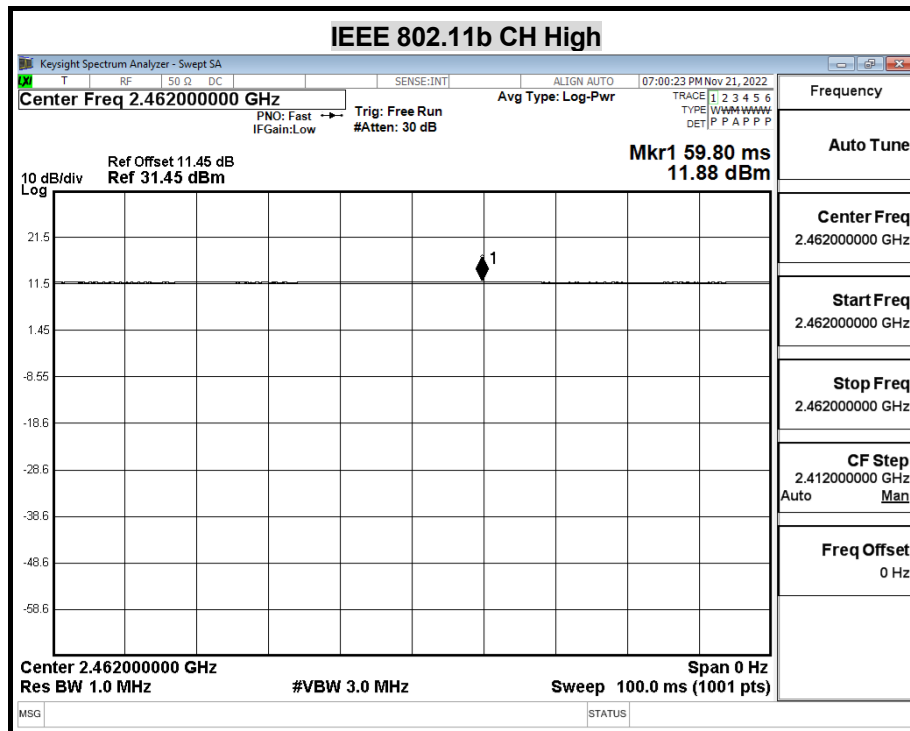

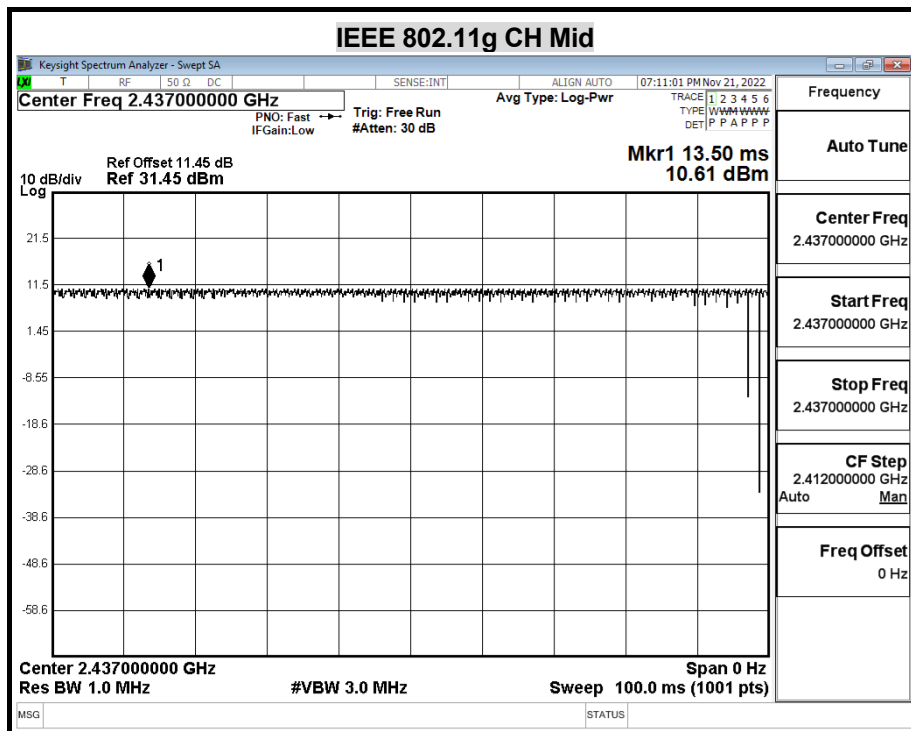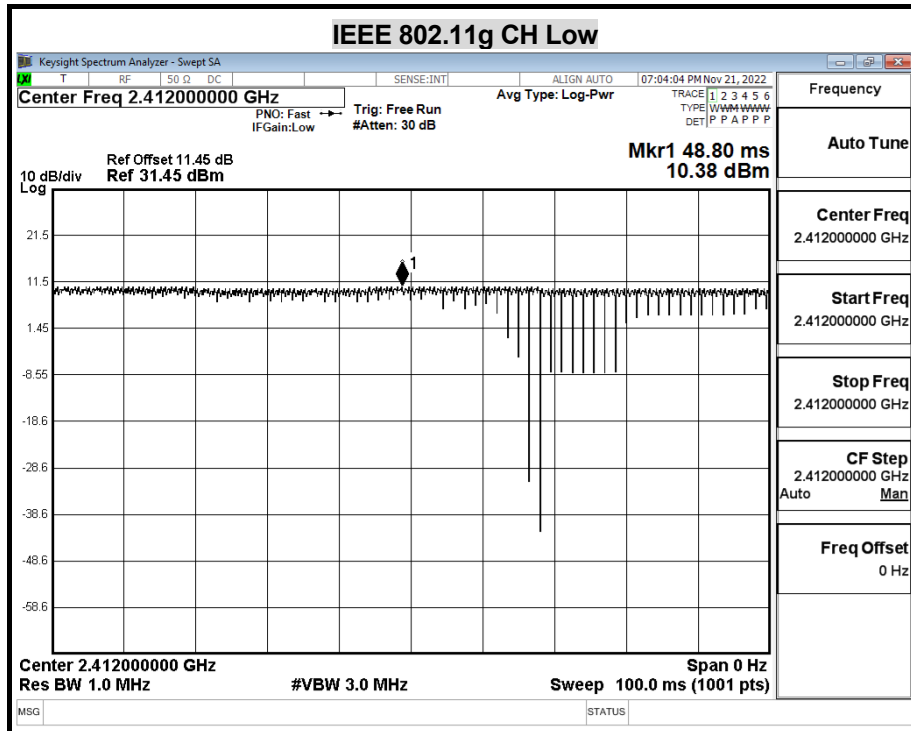

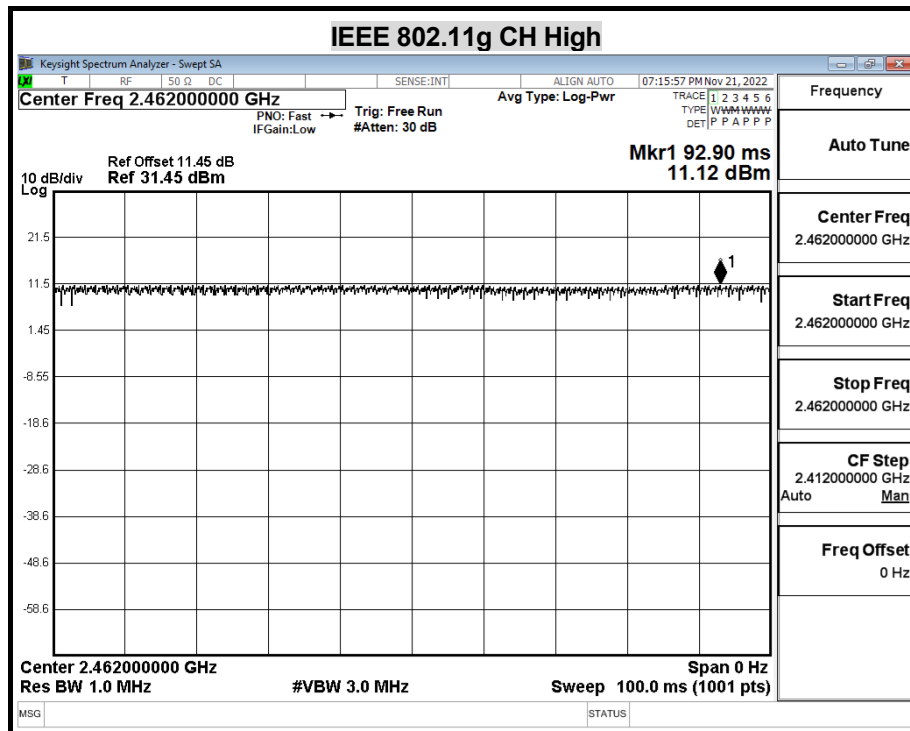

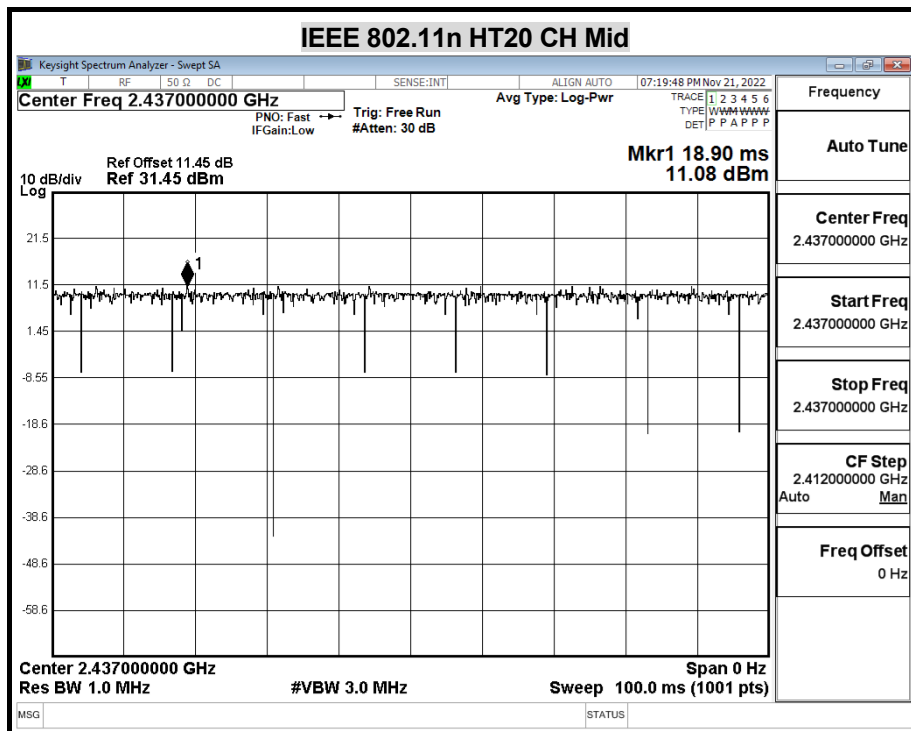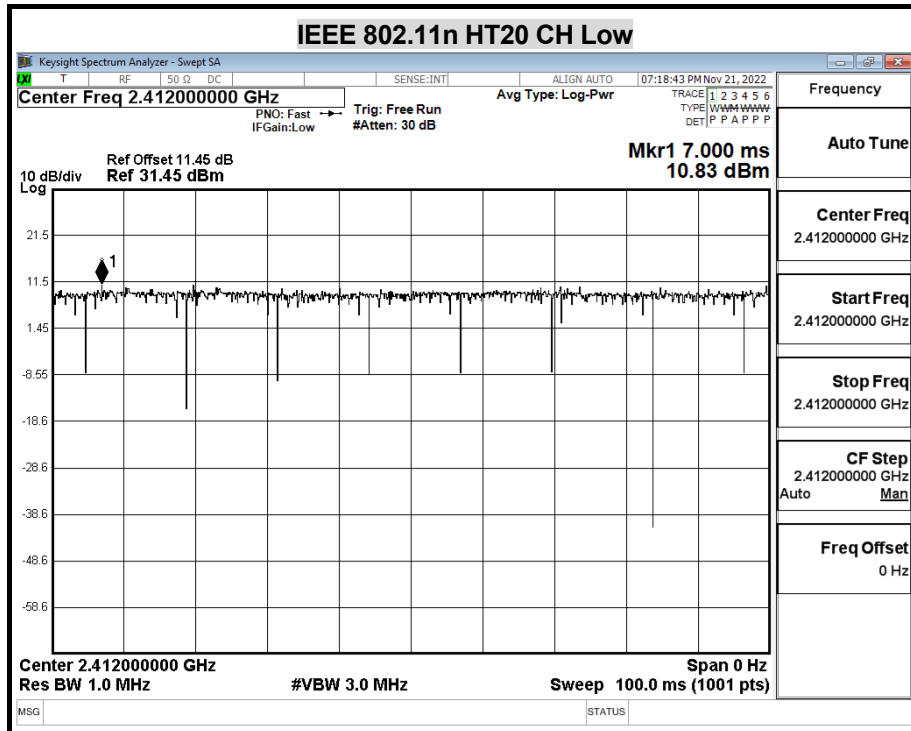

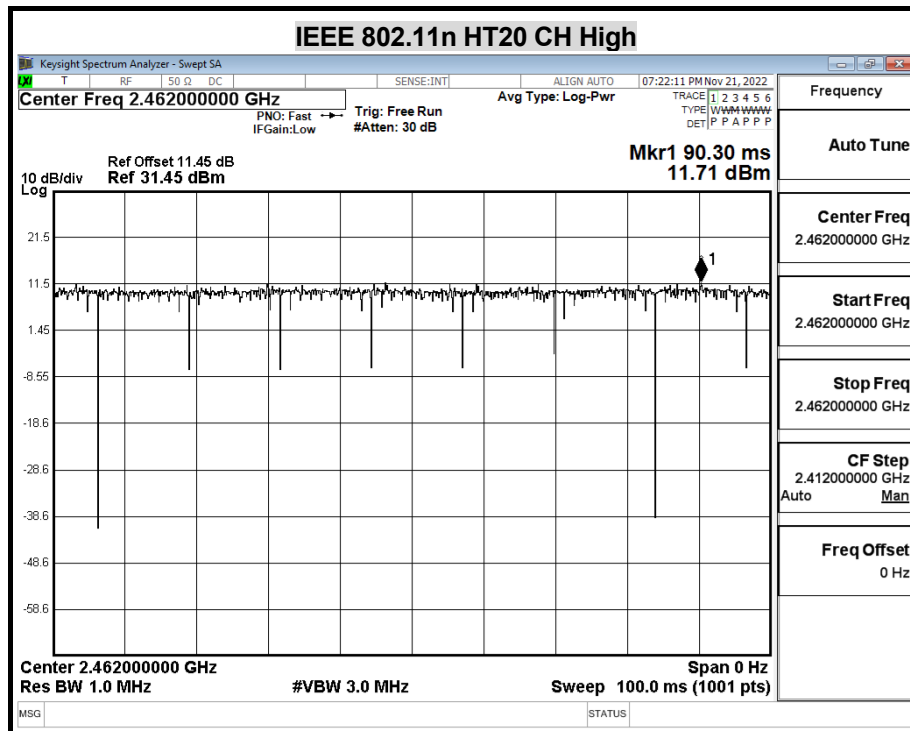

Bluetooth 4.0:

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.0°C, 51%	Test Date	2022/11/21

	us	Times	Ton	Total Ton time(ms)
Ton1	400	1	400	
Ton2		0	0	
Ton3			0	0.4
Tp				0.625

Ton	0.4
Tp(Ton+Toff)	0.625
Duty Cycle	0.64
10 * log (1/x) =	1.94



Bluetooth 5.0:


Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.0°C, 51%	Test Date	2022/11/21

	us	Times	Ton	Total Ton time(ms)
Ton1	210	1	210	
Ton2		0	0	
Ton3			0	0.21
Tp				0.625

Ton	0.21
Tp(Ton+Toff)	0.625
Duty Cycle	0.336
10 * log (1/x) =	4.74

Plot

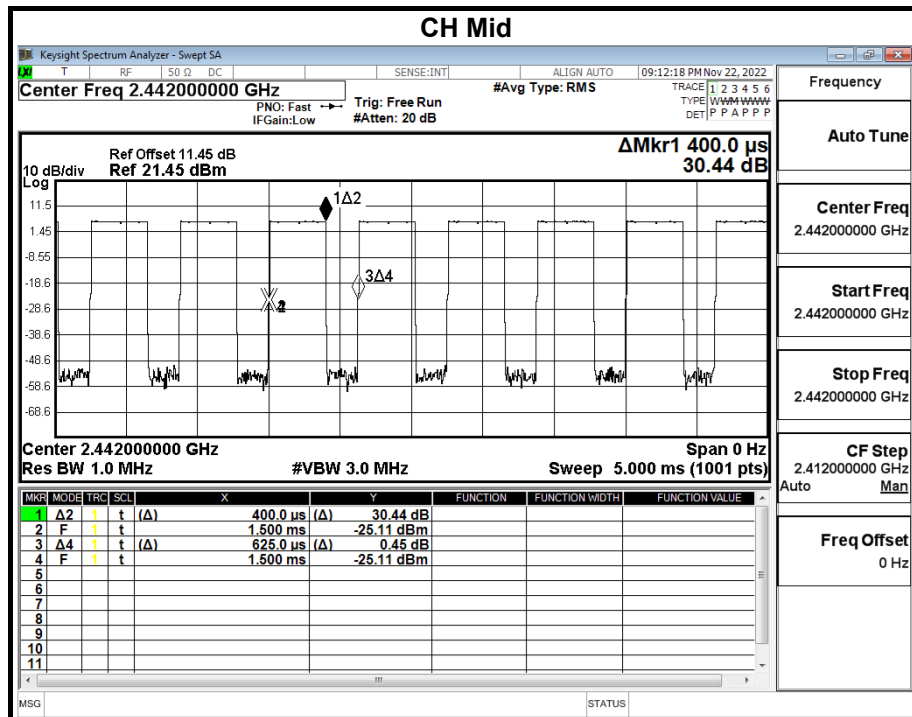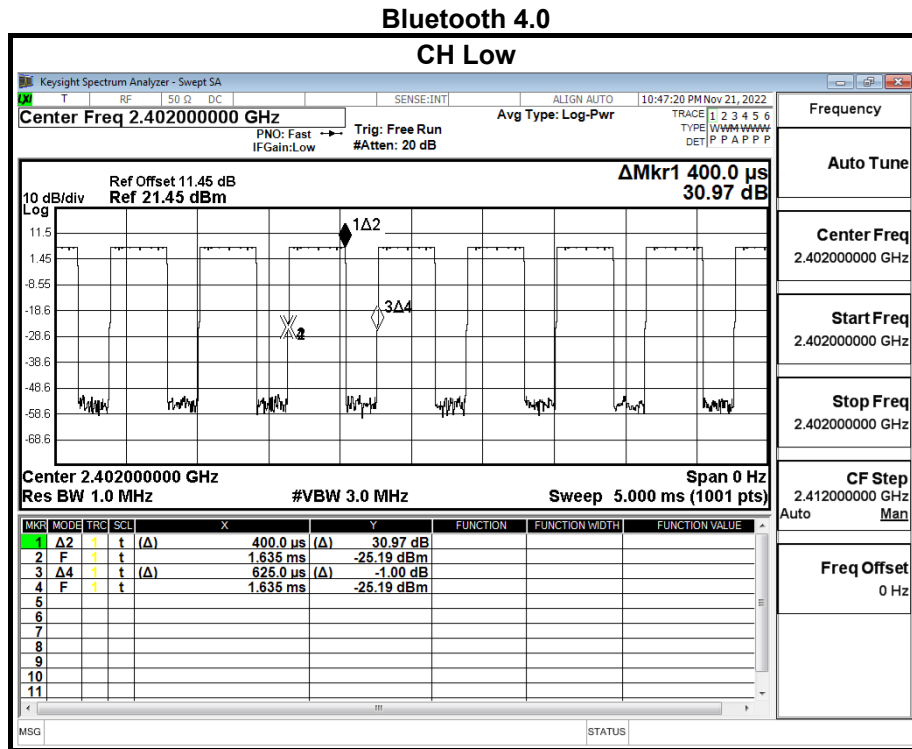


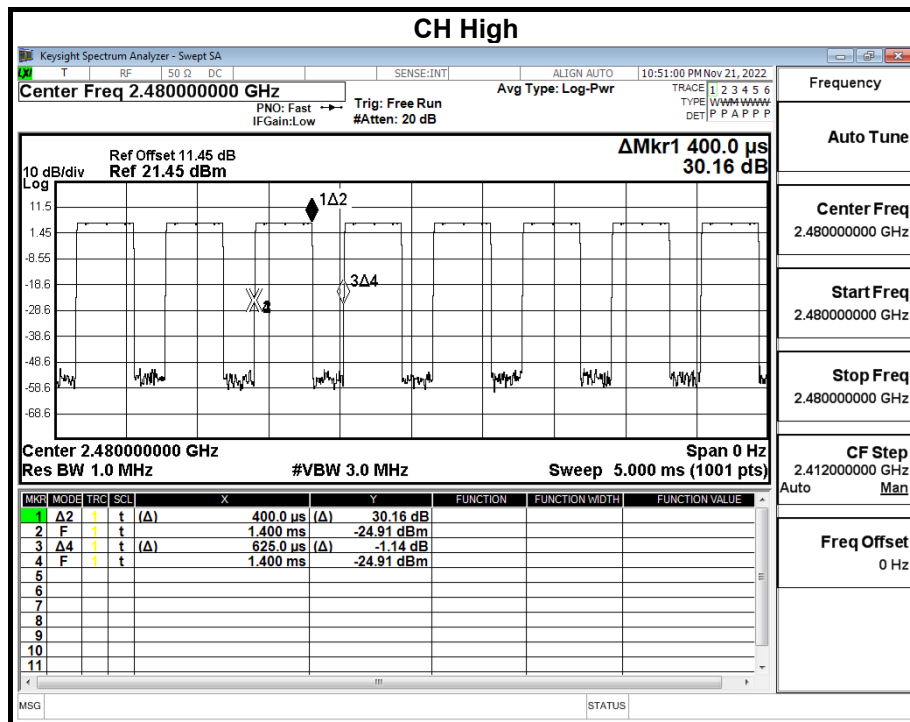


Report No.: TMTN2211001505NR


Bluetooth 5.0

CH Low

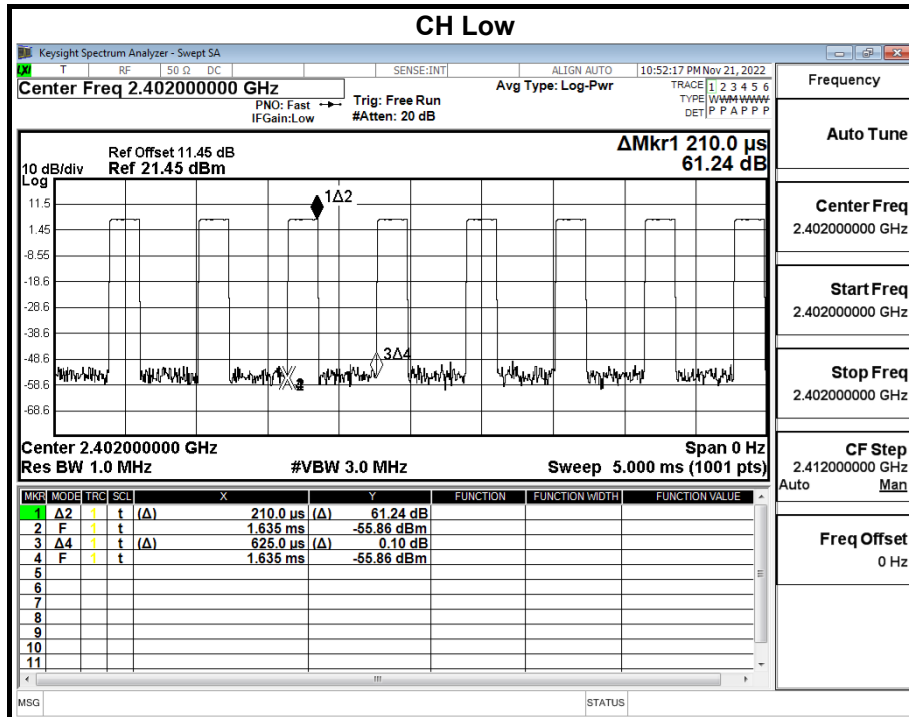

CH Mid

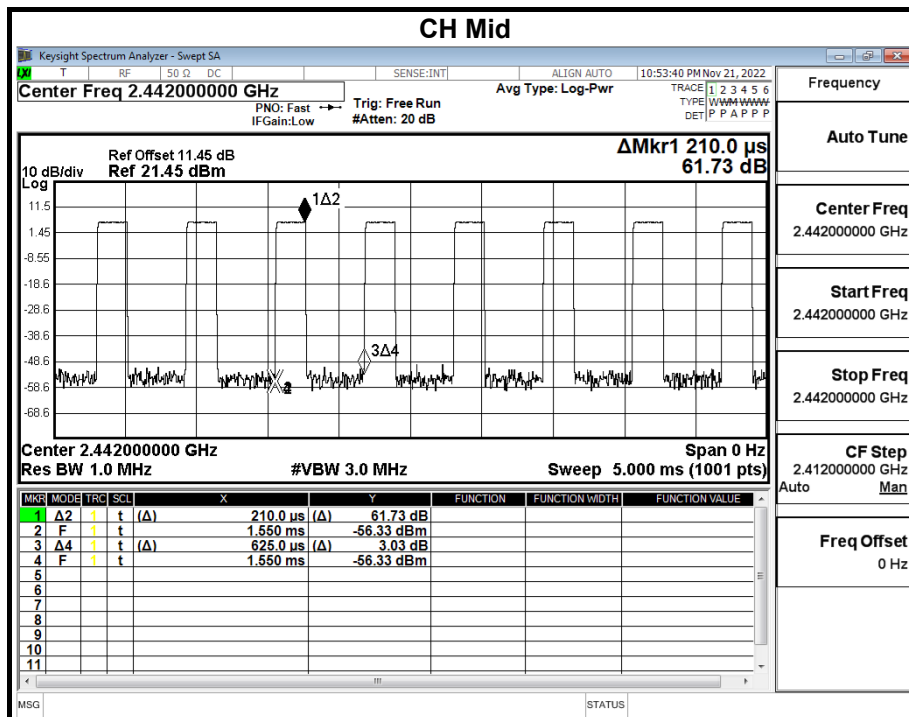

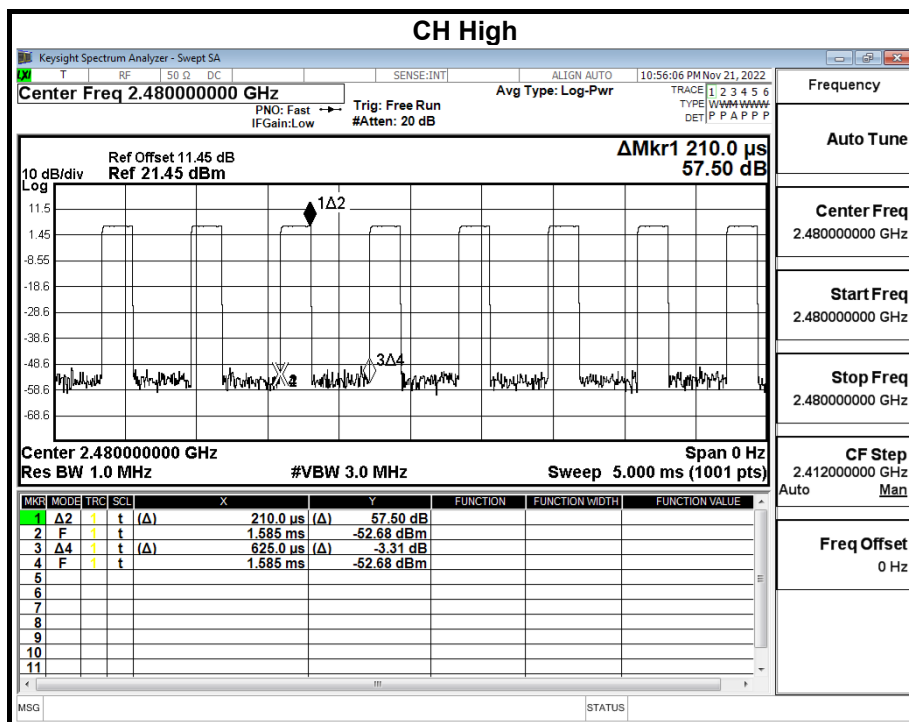

8.4 POWER SPECTRAL DENSITY

LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Chamber Room #1166					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2022
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.3.1.

5.3.1 Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.5°C, 54%	Test Date	2022/11/21

IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-1.42	8.00	-9.42	PASS
Middle	2437	-4.69	8.00	-12.69	PASS
High	2462	-4.22	8.00	-12.22	PASS

NOTE : 1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-10.16	8.00	-18.16	PASS
Middle	2437	-9.66	8.00	-17.66	PASS
High	2462	-9.53	8.00	-17.53	PASS

NOTE : 1. At final test to get the worst-case emission at 6long Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-11.00	8.00	-19.00	PASS
Middle	2437	-9.79	8.00	-17.79	PASS
High	2462	-9.38	8.00	-17.38	PASS

NOTE : 1. At final test to get the worst-case emission at 6.5long Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.

Model Name	ACVA2	Test By	Peter Chu
Temp & Humidity	22.0°C, 51%	Test Date	2022/11/21

Bluetooth 4.0 (GFSK) mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2402	-8.16	8.00	-16.16	PASS
Middle	2442	-8.33	8.00	-16.33	PASS
High	2480	-8.83	8.00	-16.83	PASS


NOTE : 1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.


Bluetooth 5.0 (GFSK) mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2402	-11.02	8.00	-19.02	PASS
Middle	2442	-11.10	8.00	-19.10	PASS
High	2480	-11.62	8.00	-19.62	PASS


NOTE : 1. At final test to get the worst-case emission at 2long Mbps long.
2. The cable assembly insertion loss of 11.45dB was entered as an offset in the spectrum analyzer to allow for direct reading of power, it was not displayed on the plot due to the instrument.


POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

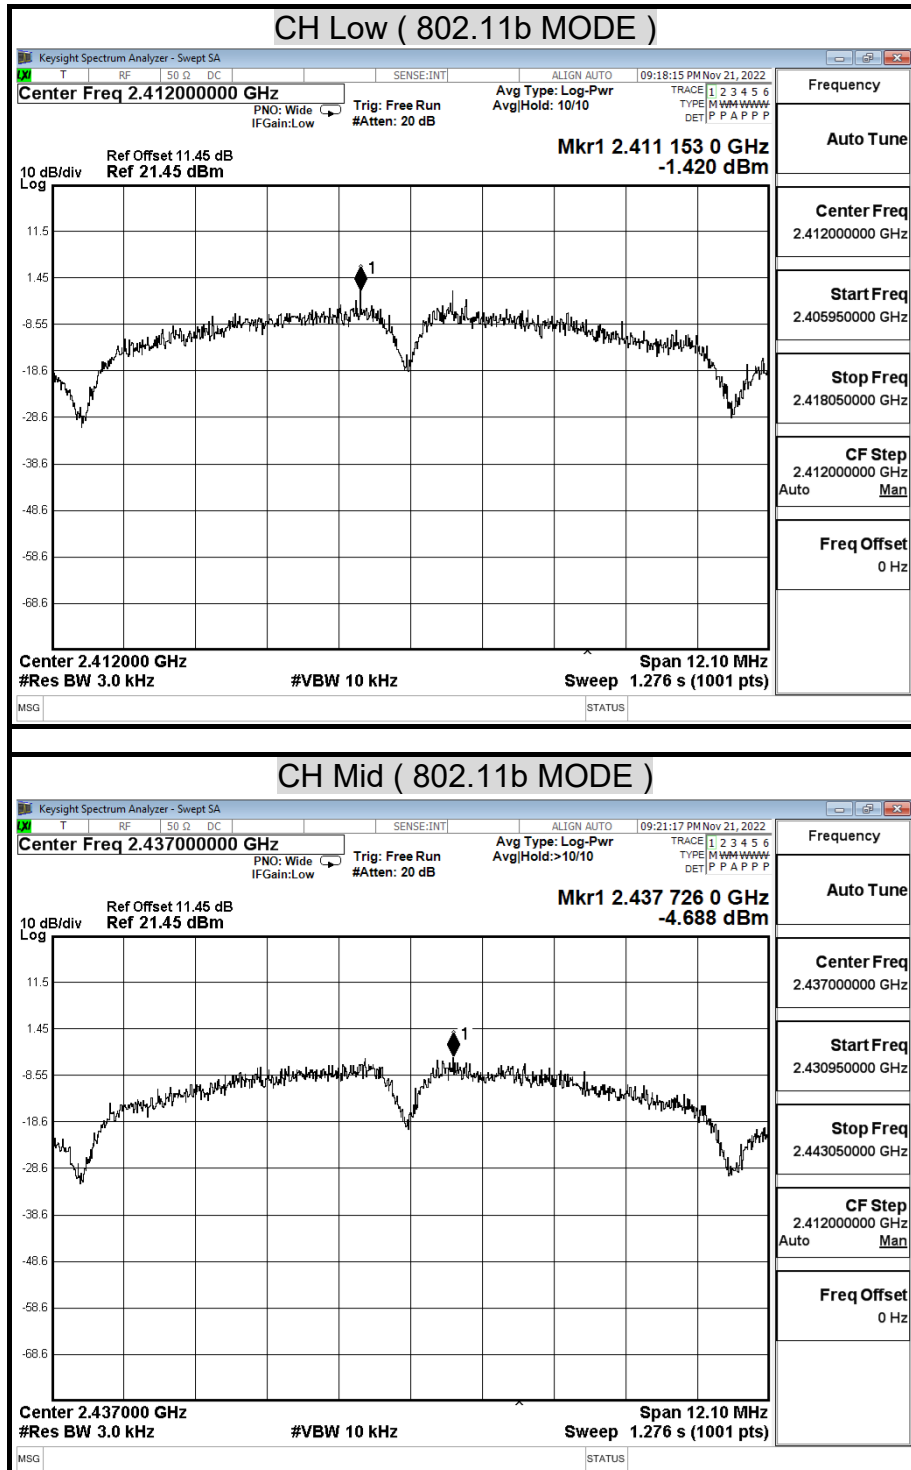

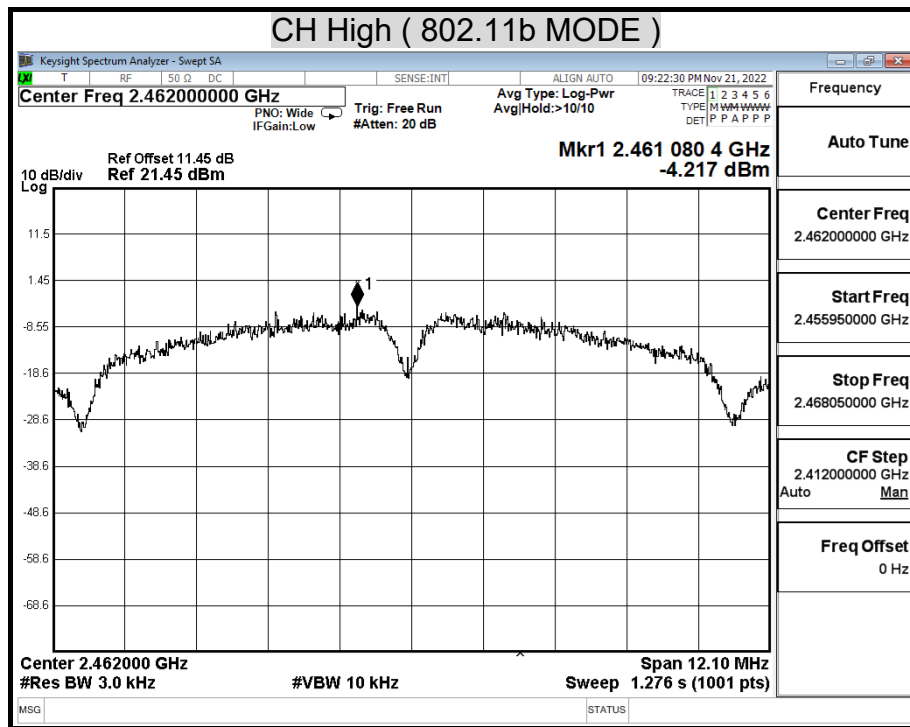



POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

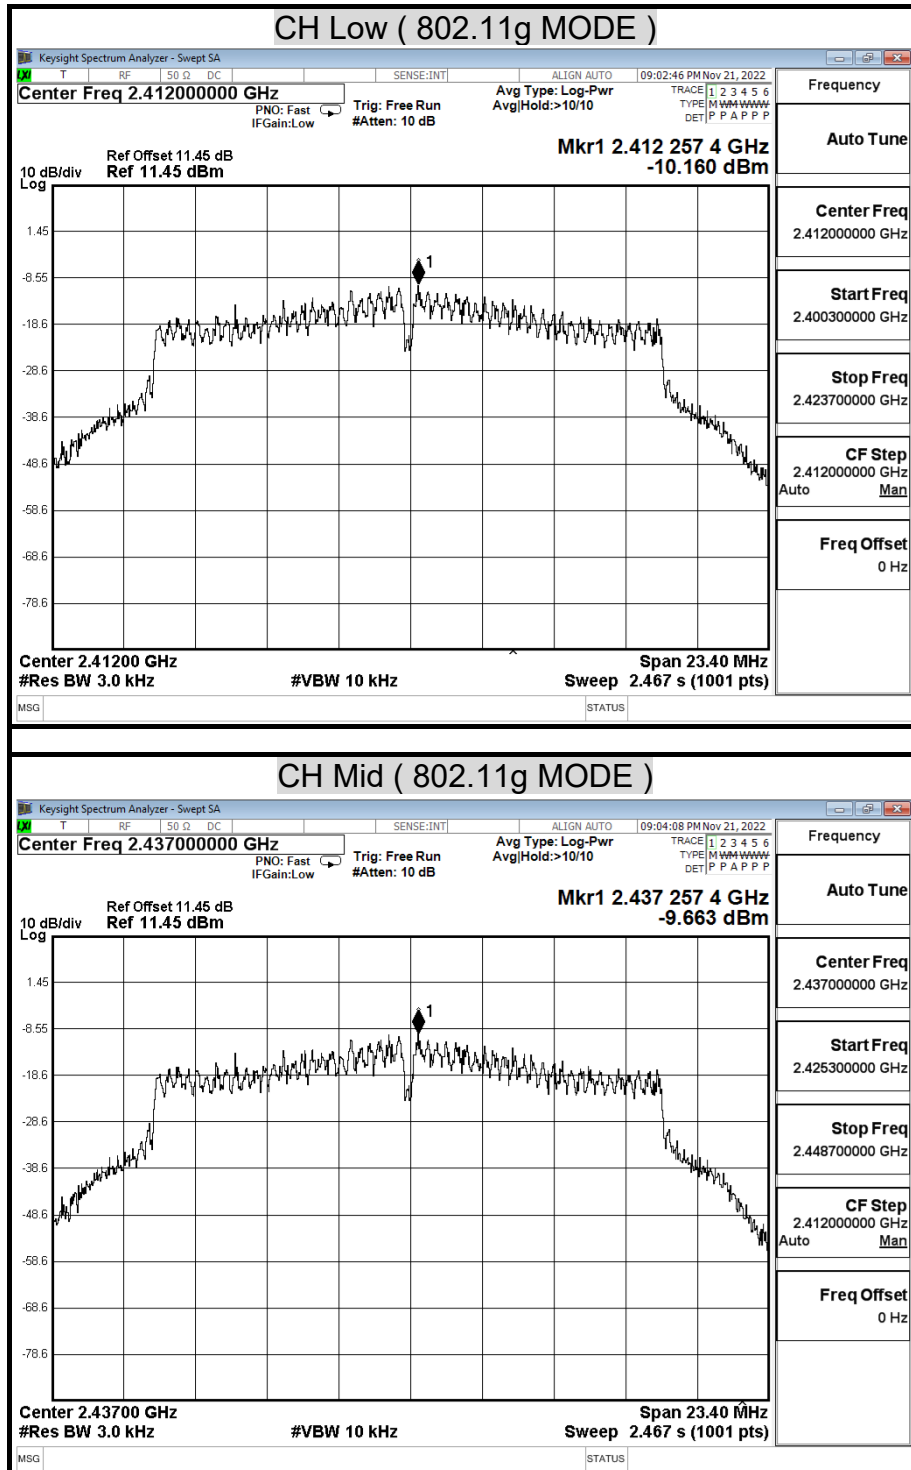

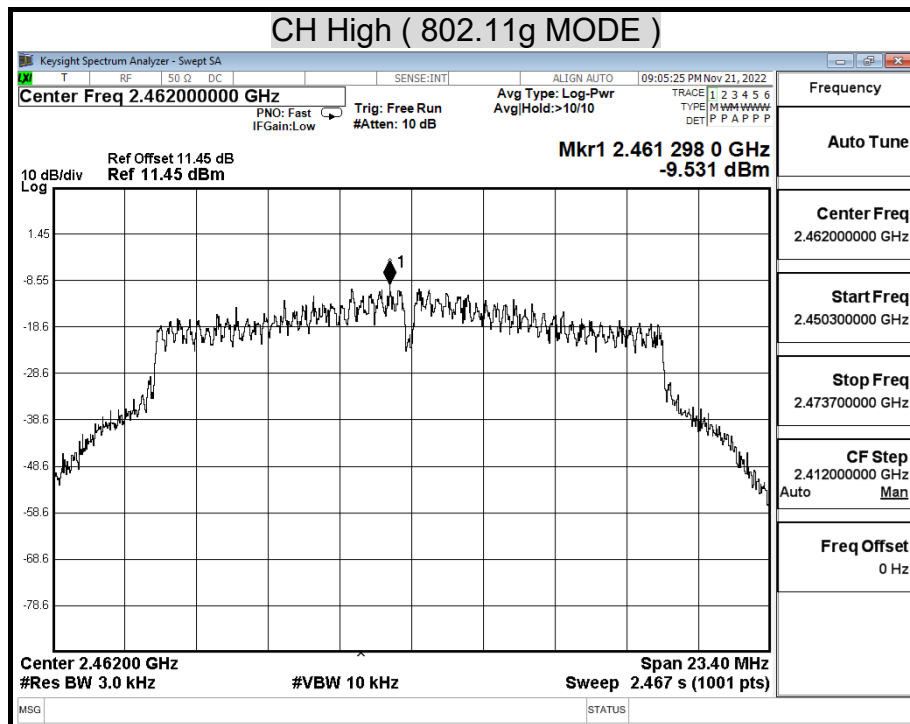

POWER SPECTRAL DENSITY (802.11n HT20 MODE)

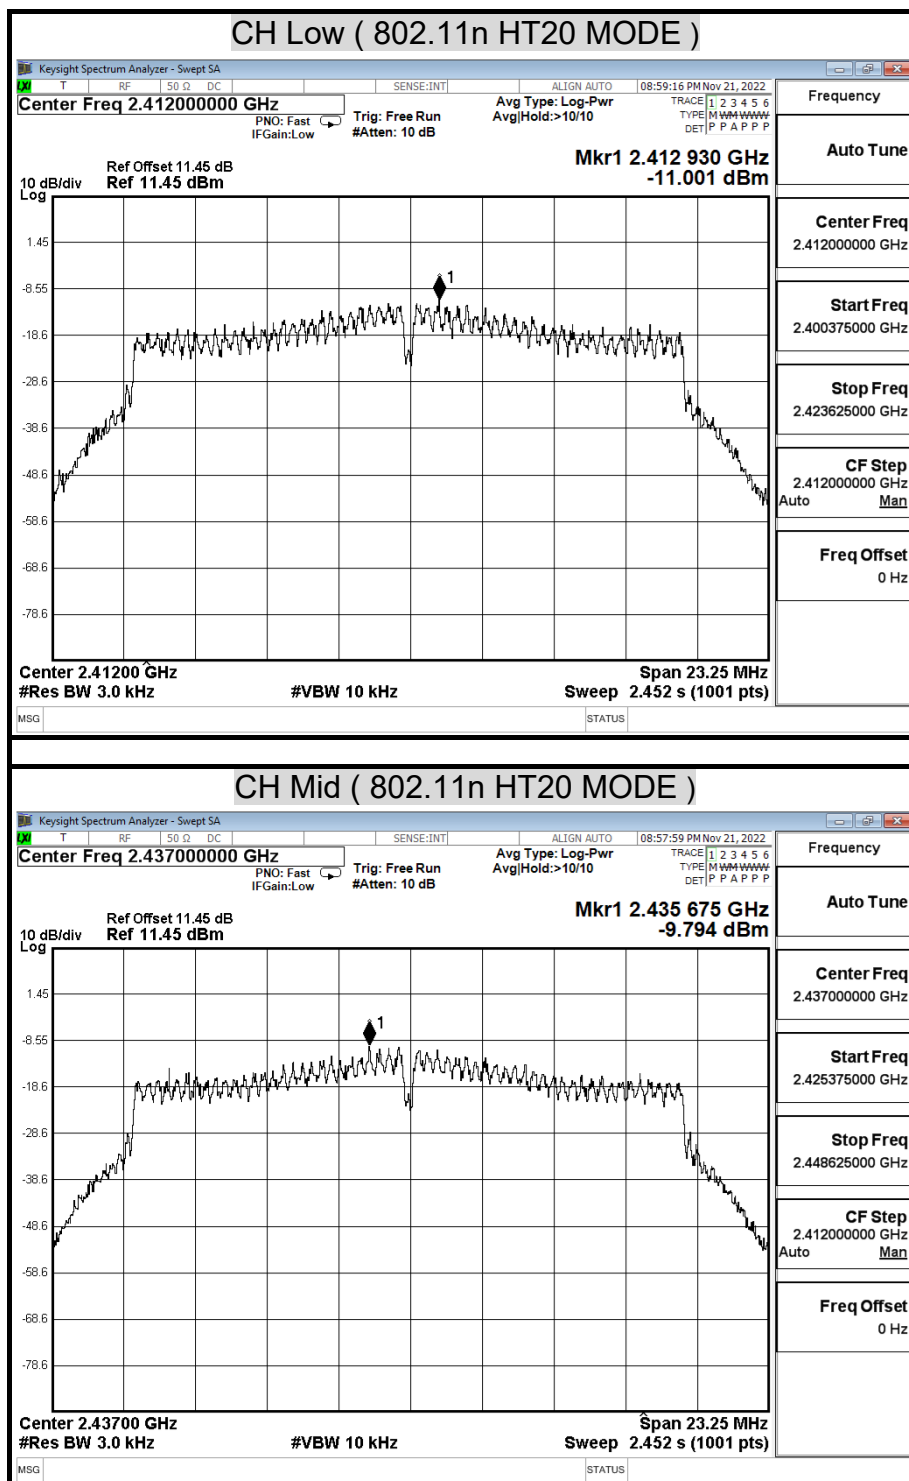

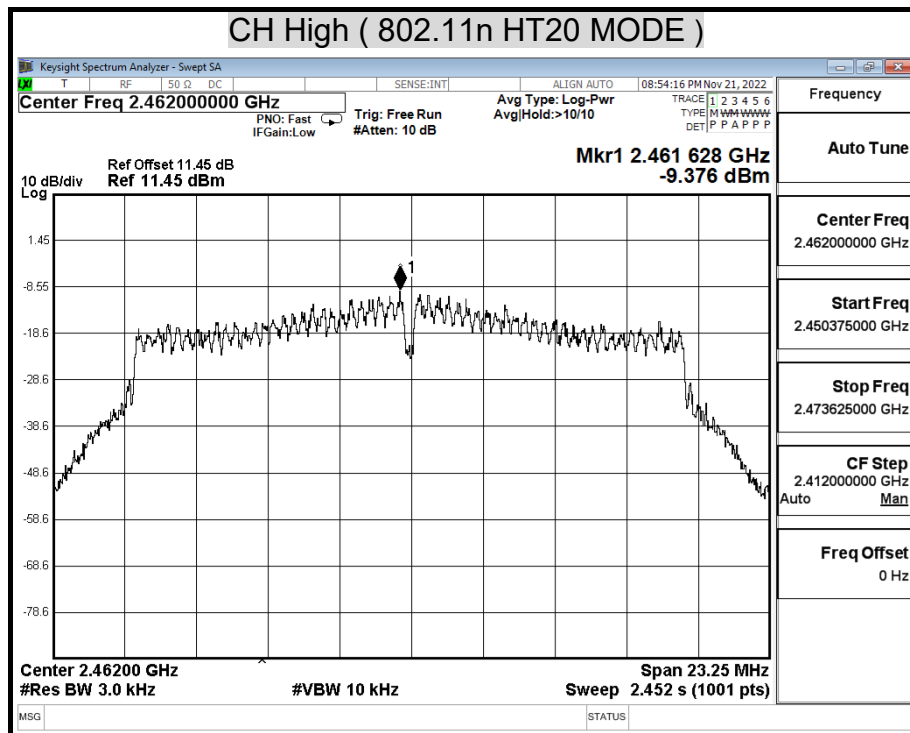

POWER SPECTRAL DENSITY (Bluetooth 4.0 (GFSK) MODE)

