



Test Report

FCC Part15 Subpart C & RSS-247 Issue 2

Product Name : EZ-BT WICED Module
Model No. : CYBT-423054-02,CYBT-423028-02,
CYBT-423060-02
FCC ID : WAP3028
IC : 7922A-3028

Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134
United States

Date of Receipt : July. 11, 2019
Test Date : July. 12, 2019~ Aug. 23, 2019
Issued Date : Aug. 26, 2019
Report No. : 1972072R-RF-US-P06V02
Report Version : V 1.0

This report is based on DEKRA report (report No. 1812166R), add all 2LE items test case which compliance of e-CFR title 47 part 15

Model CYBT-423054-02 is identical to model CYBT-423060-02 expect for marketing purpose. Model CYBT-423054-02 is identical to model CYBT-423028-02 expect for:

1.Model CYBT-423054-02 with main chip CYW20719B2, and model CYBT-423028-02 with CYW20719B1, which two chips are the same expect for firmware upgrading

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory.

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.

This report is not used for social proof in China (or Mainland China) market.

Test Report Certification

Issued Date : Aug.26,2019

Report No. :1972072R-RF-US-P06V02




Product Name : EZ-BT WICED Module
Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134
United States
Manufacturer : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California 95134
United States
Model No. : CYBT-423054-02,CYBT-423028-02, CYBT-423060-02
FCC ID : WAP3028
IC : 7922A-3028
EUT Voltage : DC 1.8~3.6V
Test Voltage : DC 3.3V
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
ANSI C63.10:2013;
KDB 558074 D01v04
RSS-Gen Issue 4 / RSS-247 Issue 2
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199; ISED Lab Code: 4075B

Documented By :




(Adm. Specialist: Kitty Li)

Reviewed By :



(Senior Project Manager: Frank He)

Approved By :



(Engineering Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Working Frequency of Each Channel:	8
1.3. Antenna information	8
1.4. Mode of Operation	9
1.5. Tested System Details	9
1.6. Configuration of Tested System	10
1.7. EUT Exercise Software	11
2. Technical Test	12
2.1. Summary of Test Result	12
2.2. Test Frequency configuration:	14
2.3. Test Environment	15
2.4. Measurement Uncertainty	15
3. AC Power Line Conducted Emission	16
3.1. Test Equipment	16
3.2. Test Setup	16
3.3. Limit	17
3.4. Test Procedure	17
3.5. Test Result	18
4. Emissions in restricted frequency bands	20
4.1. Test Equipment	20
4.2. Test Setup	21
4.3. Limit	22
4.4. Test Procedure	25
4.5. EUT test Axis definition	26
4.6. Test Result	27
5. Emissions in non-restricted frequency bands	35
5.1. Test Equipment	35
5.2. Test Setup	35
5.3. Limit	36
5.4. Test Procedure	37
5.5. EUT test Axis definition	38
5.6. Test Result	39
6. Radiated Emission Band Edge	40
6.1. Test Equipment	40
6.2. Test Setup	41
6.3. Limit	41

6.4.	Test Procedure	42
6.5.	EUT test definition	43
6.6	Test Result	45
7.	Occupied Bandwidth.....	53
7.1.	Test Equipment.....	53
7.2.	Test Setup	53
7.3.	Limit.....	54
7.4.	Test Procedure	54
7.5.	EUT test definition	55
7.6.	Test Result.....	56
8.	Fundamental emission output power	57
8.1.	Test Equipment.....	57
8.2.	Test Setup	57
8.3.	Limit.....	58
8.4.	Test Procedure	59
8.5.	EUT test definition	60
8.6.	Test Result.....	61
9.	Power Spectral Density	62
9.1.	Test Equipment.....	62
9.2.	Test Setup	62
9.3.	Limit.....	62
9.4.	Test Procedure	63
9.5.	EUT test definition	64
9.6.	Test Result.....	65
10.	Antenna Requirement.....	66
10.1.	Limit.....	66
10.2.	Antenna Connector Construction.....	66

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1972072R-RF-US-P06V02	V1.0	Initial Issued Report	Aug. 26, 2019

1. General Information

1.1. EUT Description

Product Name	EZ-BT WICED Module
Model No.	CYBT-423054-02,CYBT-423028-02, CYBT-423060-02
EUT Voltage	DC 1.8~3.6V
Test Voltage	DC 3.3V
Bluetooth Specification	V5.0
Frequency Range	2402- 2480 MHz
Channel Number	V5.0: 40
Channel Separation	V5.0: 2MHz
Type of Modulation	V5.0: GFSK
Data Rate	V5.0: 2Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

1.2. Working Frequency of Each Channel:

Bluetooth Working Frequency of Each Channel: (For V5.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.3. Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Sectorized		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
			☐	Sectorized		
	☒	Internal	☐	PIFA		
			☐	PCB		
			☒	Ceramic Chip Antenna		
			☐	Monopole Antenna		
Antenna Technology	Ant Gain (dBi)					
☒ SISO	-1					

1.4. Mode of Operation

Test Mode
Mode 1: Transmit-2Mbps(GFSK_LE 2M)


1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter
A	USB cable	N/A	N/A	N/A	Shielded,0.5m
B	USB cable	N/A	N/A	N/A	Shielded,10m

1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

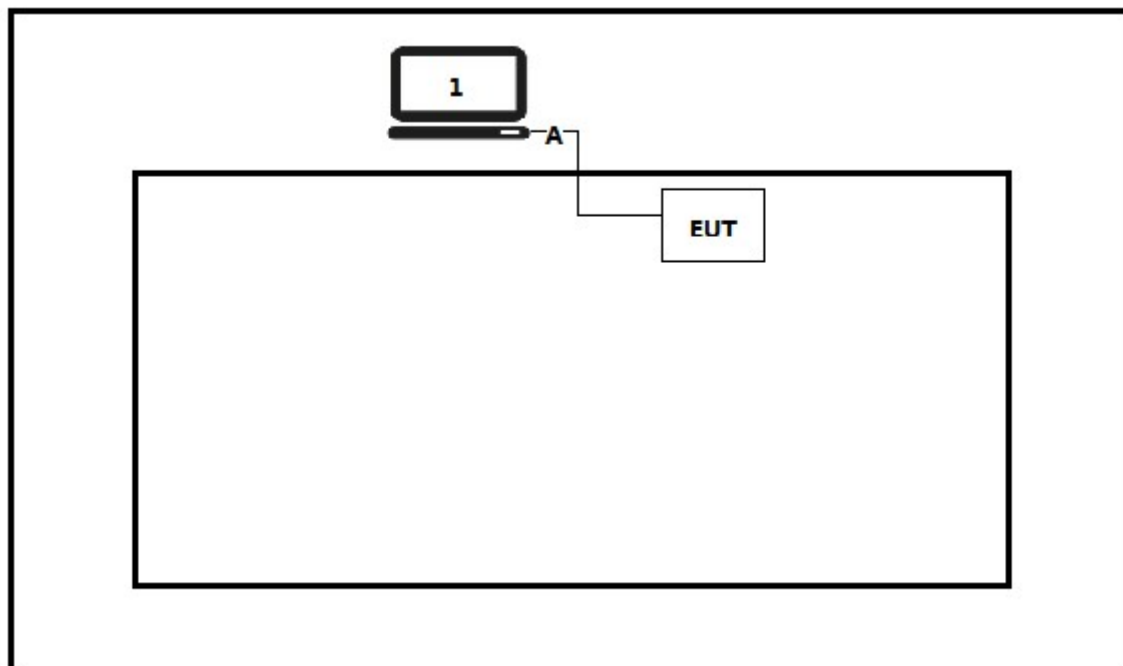

Test setup Diagram- Radiated Emission

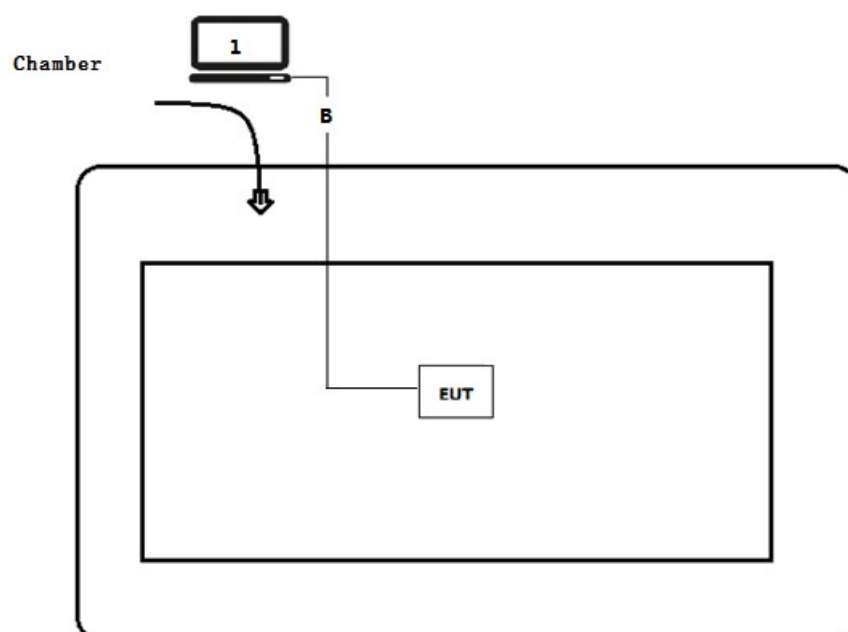

1.7. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run RF software [Bluetool], and set the test mode and channel, then press OK to start to continue transmit.

2. Technical Test

2.1. Summary of Test Result

For FCC

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	FCC 15.209	PASS
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	$\geq 20\text{dBc}$	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	FCC 15.209	PASS
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2)	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	$\leq 30\text{dBm}$	PASS
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	FCC 15.203	PASS

For ISED

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	RSS-Gen Issue 4 Section 8.8	RSS-Gen	PASS
Emissions in restricted frequency bands	RSS-Gen Issue 4 Section 8.9	RSS-Gen	PASS
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section A5.5	$\geq 20\text{dBc}$	PASS
Radiated Emission Band Edge	RSS-247 Issue 2 Section A5.5	RSS-247	PASS
Occupied Bandwidth	RSS-Gen Issue 4 Section 6.6 RSS-247 Issue 2 Section A5.2(1)	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	RSS-247 Issue 2 Section A5.4(4)	$\leq 30\text{dBm}$	PASS
Power Spectral Density	RSS-247 Issue 2 Section A5.2(2)	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	RSS-Gen Issue 4 Section 8.3	RSS-Gen Issue 4	PASS

2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
LE 2M	00	2402 MHz	19	2440 MHz	39	2480MHz

2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.4. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


3. AC Power Line Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2018.03.05	2020.03.04
Two-Line V-Network	R&S	ENV 216	101189	2017.07.16	2020.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.16	2019.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.16	2019.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2018.01.04	2020.01.03
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

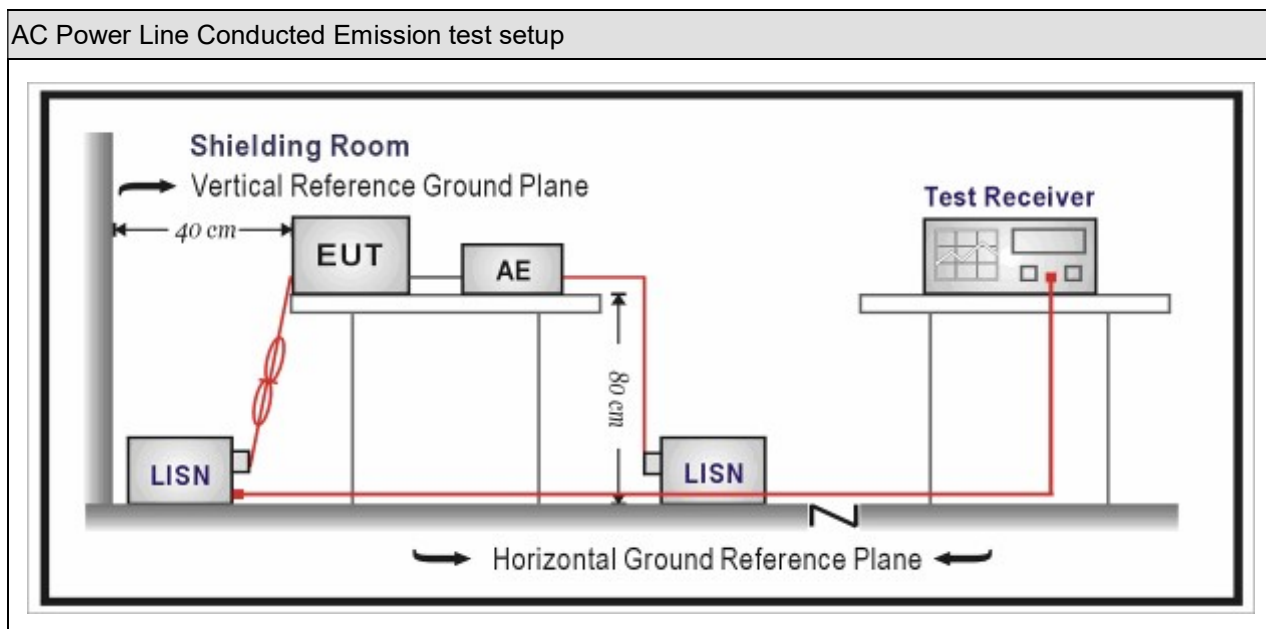

3.3. Limit


Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average(dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

3.5. Test Result

Engineer: Tim	
Site: TR1	Time: 2019/07/27
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: EZ-BT WICED Module CYBT	Power: DC 3.3V
Note: Mode1	

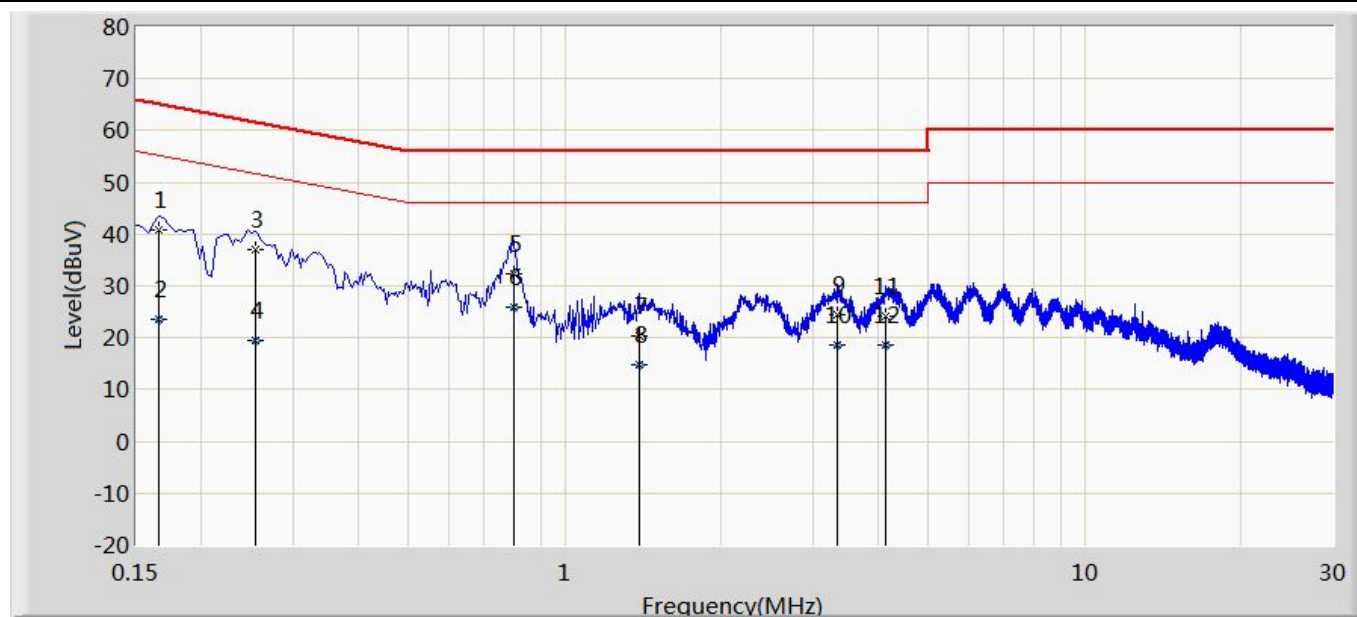


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.153	41.204	31.584	-24.474	65.158	9.593	0.027	0.000	QP
2		0.153	23.649	14.029	-31.649	55.158	9.593	0.027	0.000	AV
3		0.256	37.582	27.952	-24.884	61.625	9.598	0.031	0.000	QP
4		0.256	19.577	9.948	-32.368	51.625	9.598	0.031	0.000	AV
5		0.798	32.608	22.965	-23.872	56.000	9.590	0.053	0.000	QP
6	*	0.798	25.983	16.34	-20.297	46.000	9.590	0.053	0.000	AV
7		1.378	20.464	10.796	-35.656	56.000	9.598	0.070	0.000	QP
8		1.378	14.887	5.219	-31.153	46.000	9.598	0.070	0.000	AV
9		3.341	24.416	14.673	-31.784	56.000	9.628	0.115	0.000	QP
10		3.341	18.596	8.853	-27.524	46.000	9.628	0.115	0.000	AV
11		4.127	24.496	14.728	-32.084	56.000	9.639	0.130	0.000	QP
12		4.127	18.829	9.061	-27.791	46.000	9.639	0.130	0.000	AV

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Tim	
Site: TR1	Time: 2019/07/27
Limit: FCC_Part15.107_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode1	

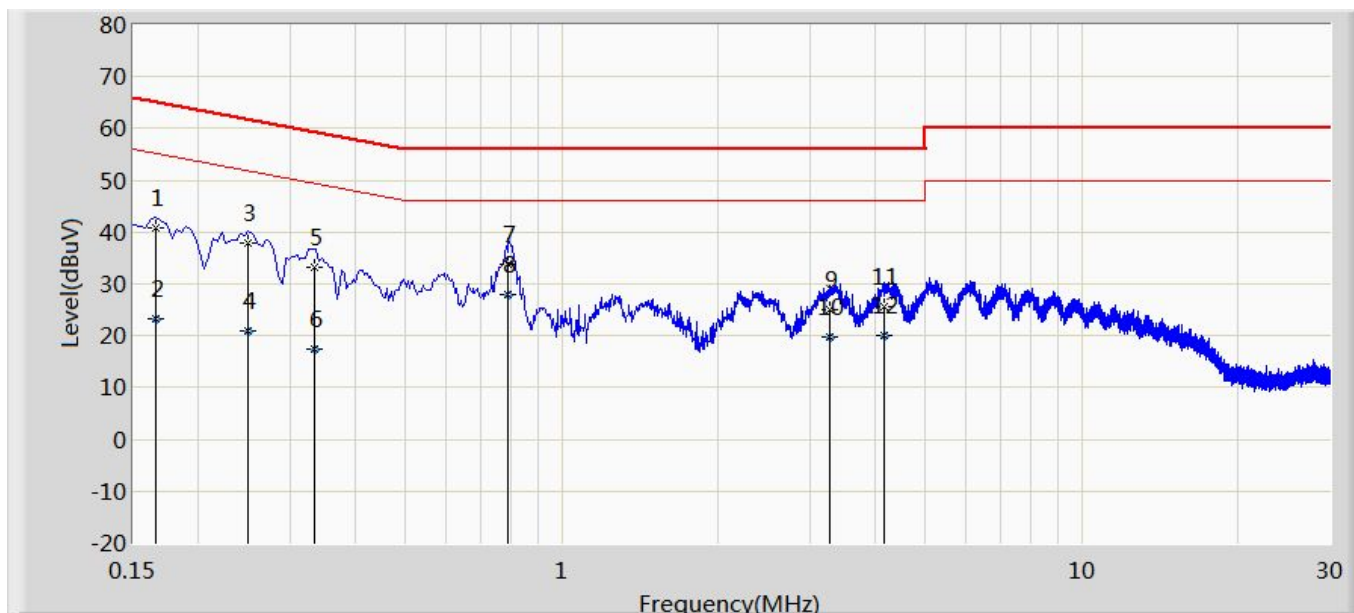

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.169	41.308	31.688	-24.71	65.158	9.593	0.027	0.000	QP
2		0.169	23.433	13.813	-31.765	55.158	9.593	0.027	0.000	AV
3		0.252	38.134	28.505	-24.043	61.757	9.598	0.031	0.000	QP
4		0.252	21.387	11.758	-31.271	51.757	9.598	0.031	0.000	AV
5		0.331	33.345	23.715	-26.066	59.351	9.595	0.035	0.000	QP
6		0.331	17.726	8.095	-32.266	49.351	9.595	0.035	0.000	AV
7		0.790	33.849	24.206	-22.211	56.000	9.590	0.052	0.000	QP
8	*	0.790	27.987	18.344	-18.353	46.000	9.590	0.052	0.000	AV
9		3.269	25.093	15.352	-31.247	56.000	9.627	0.114	0.000	QP
10		3.269	19.995	10.254	-26.665	46.000	9.627	0.114	0.000	AV
11		4.152	25.764	15.996	-30.816	56.000	9.639	0.129	0.000	QP
12		4.152	20.368	10.599	-26.392	46.000	9.639	0.129	0.000	AV

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2019.03.29	2020.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2018.11.16	2019.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2018.10.16	2019.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2019.03.02	2020.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2019.01.03	2020.01.02
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2019.01.04	2020.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2019.05.06	2020.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2019.05.06	2020.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2019.01.22	2020.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2018.11.25	2019.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2019.03.02	2020.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2019.03.02	2020.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2019.03.02	2020.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2019.06.10	2020.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.01.04	2020.01.03
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

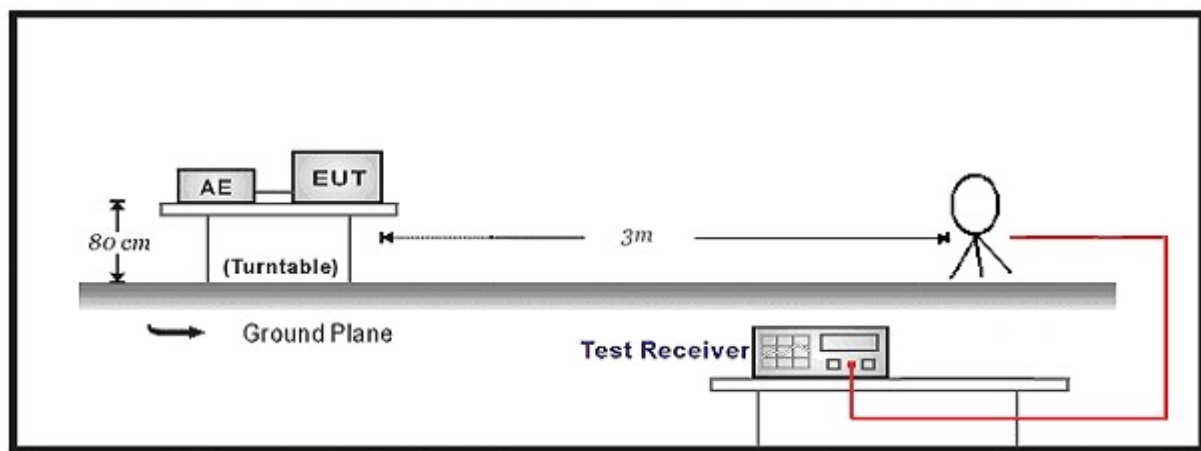

30MHz-1GHz Test Setup:

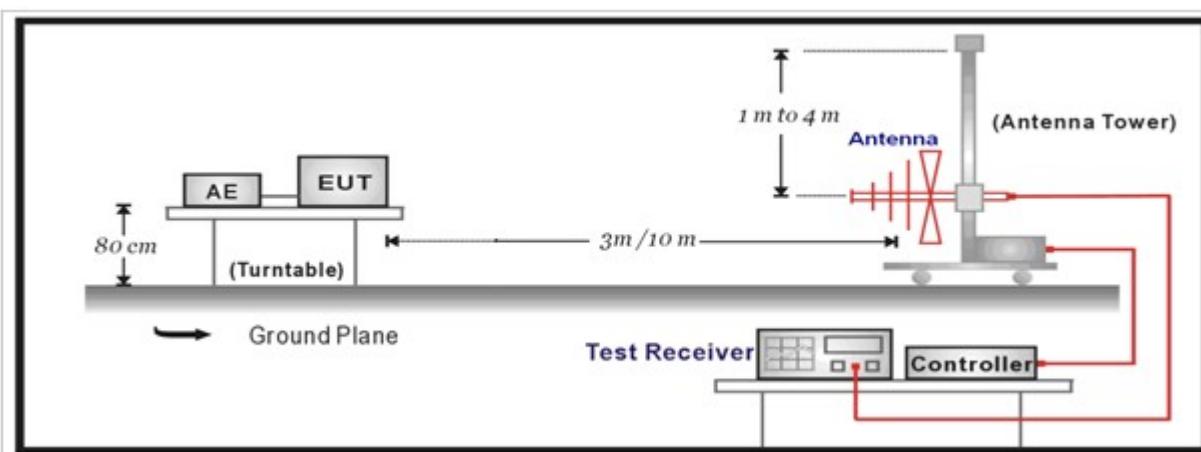

Above 1GHz Test Setup:

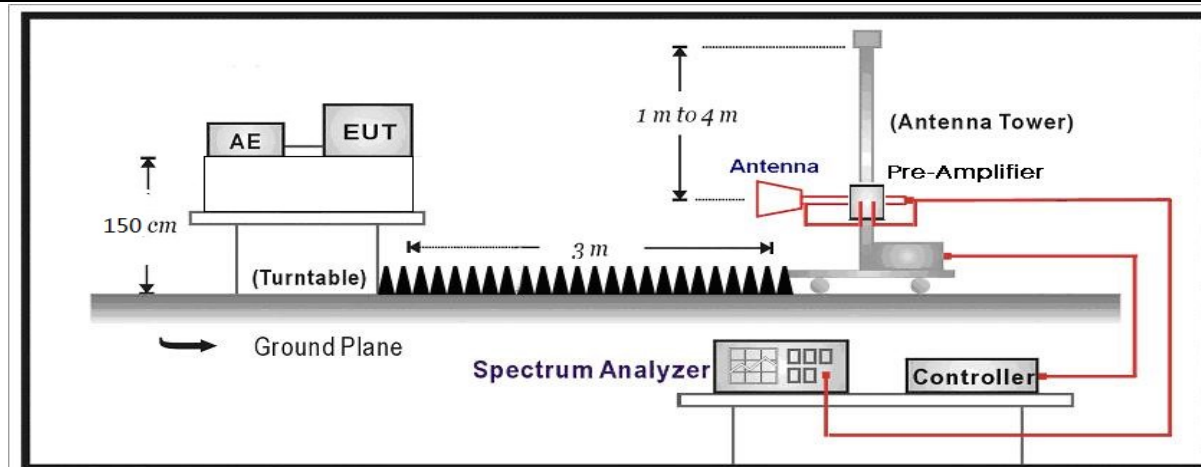

4.3. Limit

For FCC

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

For ISED:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	13.36-13.41	1645.5-1646.5	9.0-9.2
2.1735-2.1905	16.42-16.423	1660-1710	9.3-9.5
3.020-3.026	16.69475-16.69525	1718.8-1722.2	10.6-12.7
4.125-4.128	16.80425-16.80475	2200-2300	13.25-13.4
4.17725-4.17775	25.5-25.67	2310-2390	14.47-14.5
4.20725-4.20775	37.5-38.25	2655-2900	15.35-16.2
5.677-5.683	73-74.6	3260-3267	17.7-21.4
6.215-6.218	74.8-75.2	3332-3339	22.01-23.12
6.26775-6.26825	108-138	3345.8-3358	23.6-24.0
6.31175-6.31225	156.52475-156.52525	3500-4400	31.2-31.8
8.291-8.294	156.7-156.9	4500-5150	36.43-36.5
8.362-8.366	240-285	5350-5460	Above 38.6
8.37625-8.38675	322-335.4	7250-7750	
8.41425-8.41475	399.9-410	8025-8500	
12.29-12.293	608-614		
12.51975-12.52025	960-1427		
12.57675-12.57725	1435-1626.5		

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)







Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☐	ANSI C63.10	11.11.2	Reference level measurement
	☐	ANSI C63.10	11.11.3	Emission level measurement
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		ANSI C63.10	11.12.2.4	Peak power measurement procedure
		ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☒	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☒	Worst Axis ☐
	☐	Conducted		
	☐	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


4.6. Test Result

Engineer: Tongben	
Site: AC5	Time: 2019/08/04 - 13:33
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_2Mbps	

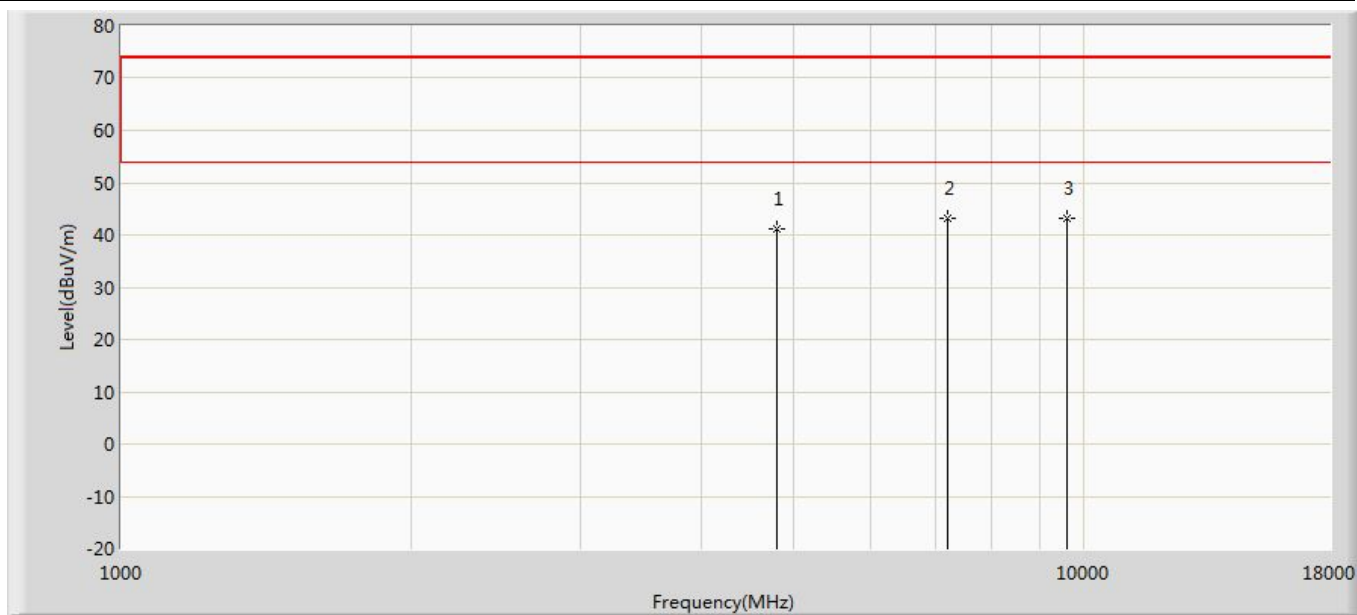


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.050	36.533	-32.950	74.000	4.517	PK
2		7206.000	43.143	35.596	-30.857	74.000	7.547	PK
3	*	9608.000	43.154	33.972	-30.846	74.000	9.182	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/04 - 13:33
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_2Mbps	

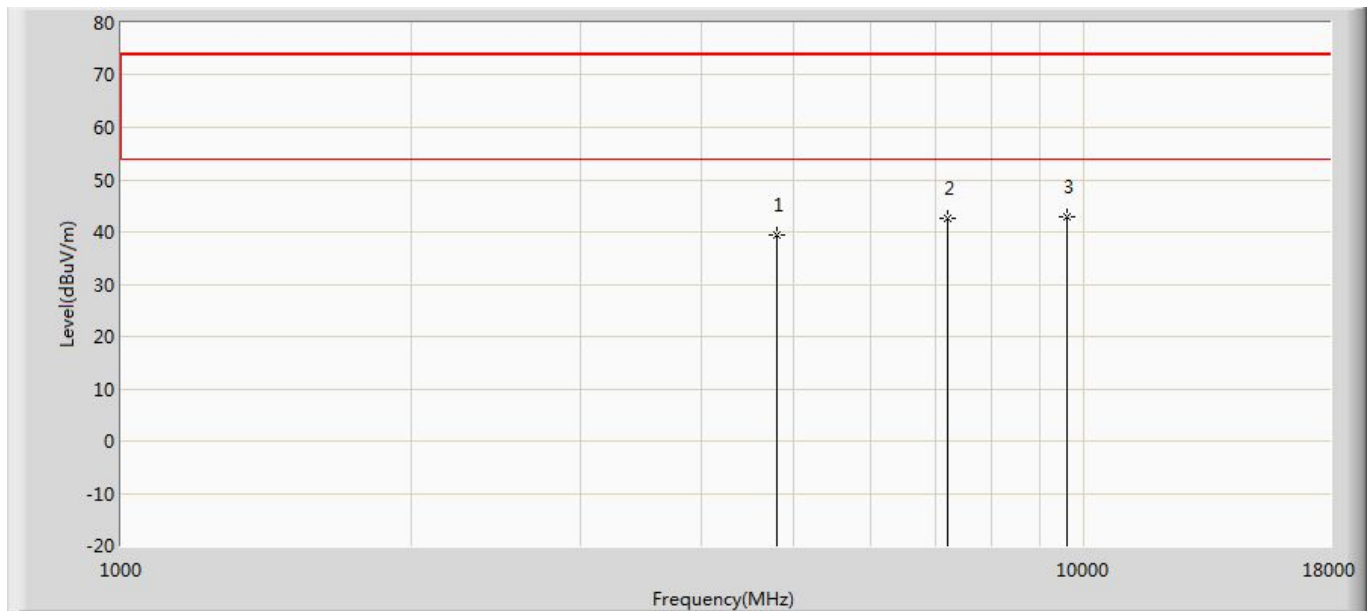


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	39.530	35.013	-34.470	74.000	4.517	PK
2		7206.000	42.614	35.067	-31.386	74.000	7.547	PK
3	*	9608.000	42.830	33.648	-31.170	74.000	9.182	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/04 - 13:33
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2440MHz by LE_2Mbps	

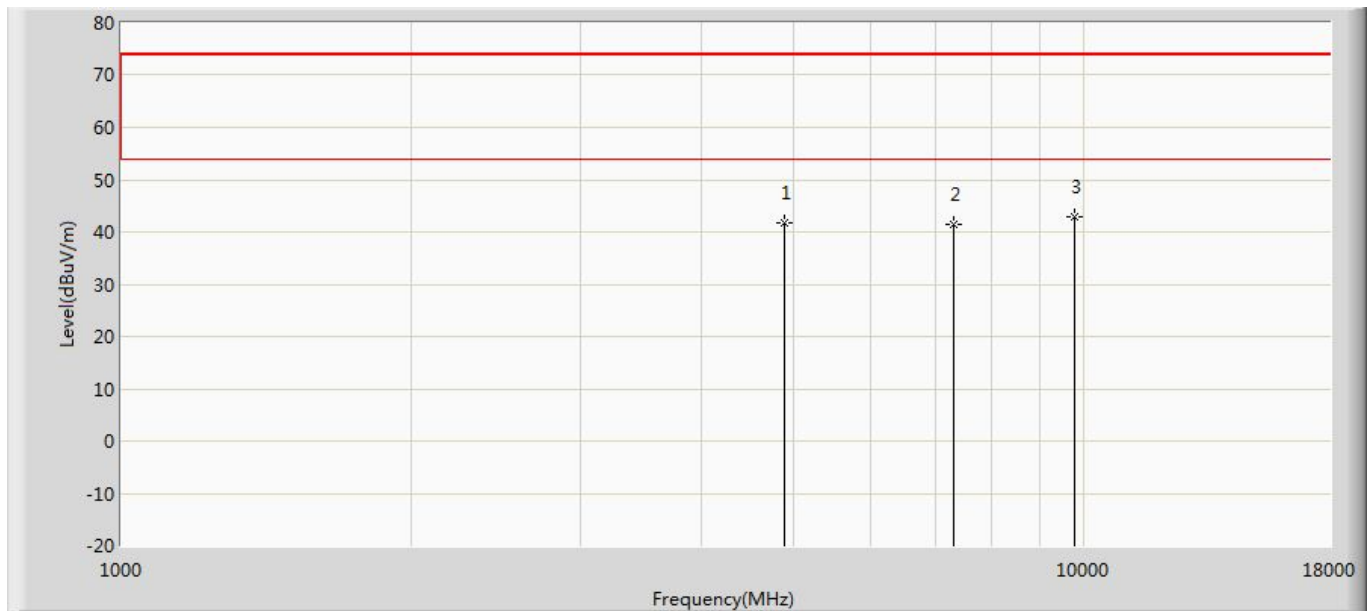


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.602	36.816	-32.398	74.000	4.786	PK
2		7320.000	41.524	33.862	-32.476	74.000	7.663	PK
3	*	9760.000	42.984	33.124	-31.016	74.000	9.860	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/04 - 13:33
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2440MHz by LE_2Mbps	

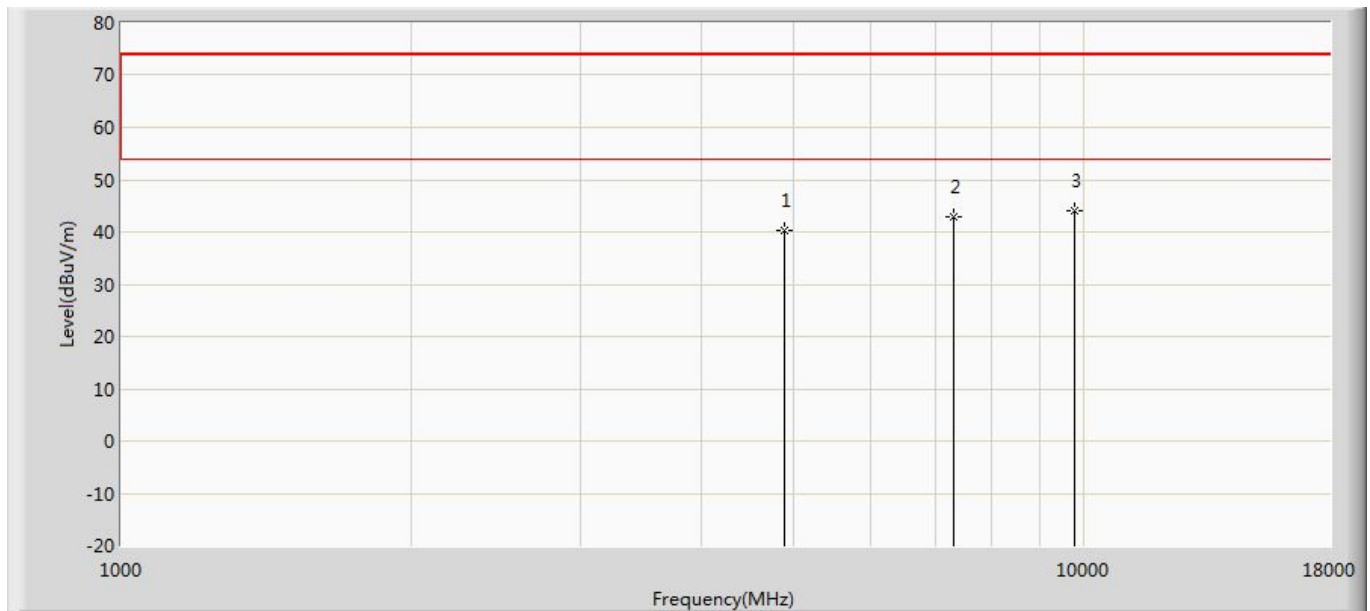


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.430	35.644	-33.570	74.000	4.786	PK
2		7320.000	42.839	35.177	-31.161	74.000	7.663	PK
3	*	9760.000	43.931	34.071	-30.069	74.000	9.860	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/04 - 13:33
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by LE_2Mbps	

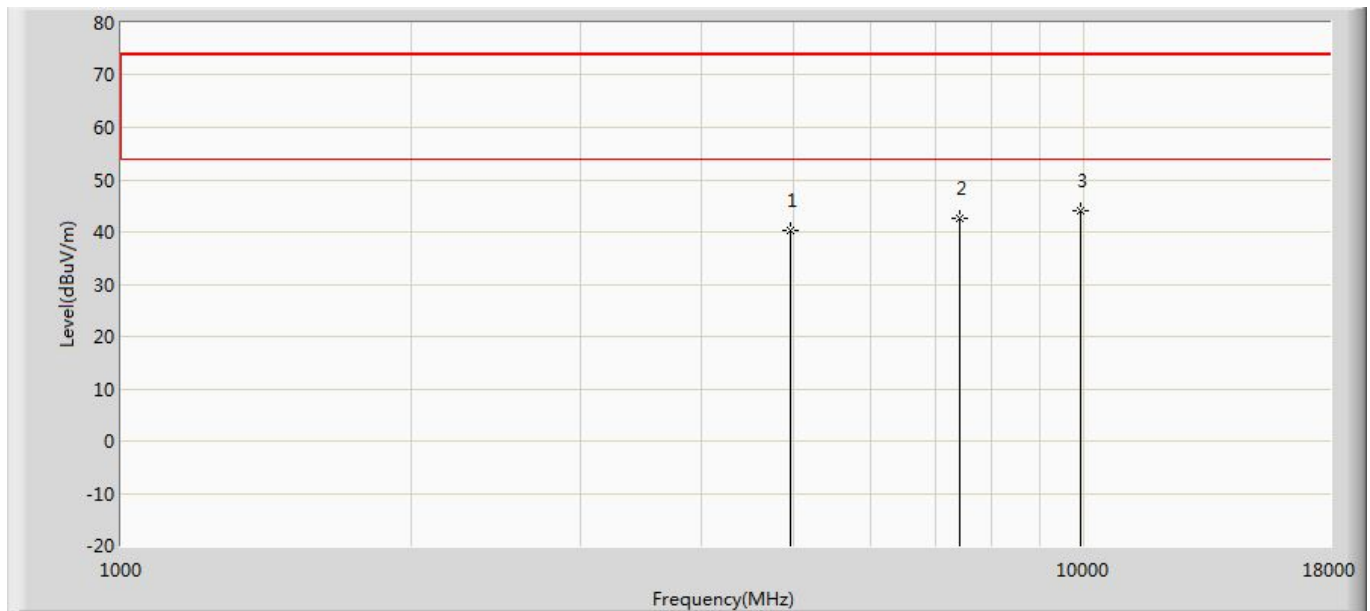

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.369	35.449	-33.631	74.000	4.920	PK
2		7440.000	42.698	34.983	-31.302	74.000	7.715	PK
3	*	9920.000	44.030	34.083	-29.970	74.000	9.946	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/04 - 13:34
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by LE_2Mbps	

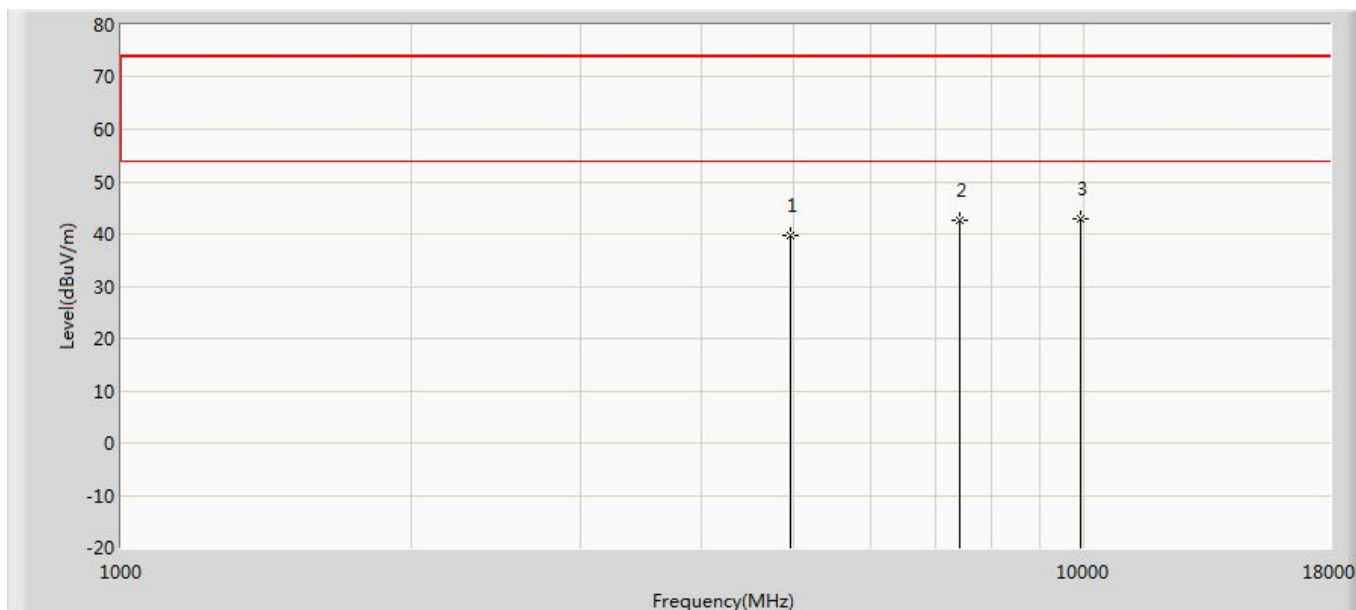


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.698	34.778	-34.302	74.000	4.920	PK
2		7440.000	42.655	34.940	-31.345	74.000	7.715	PK
3	*	9920.000	42.948	33.001	-31.052	74.000	9.946	PK

Note:

1. Measure Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. As the radiated emission was performed, so conducted emission was not tested.

The worst case of Radiated Emission below 1GHz:

Engineer: Tim.Cao	
Site: AC2	Time: 2019/08/05 - 14:16
Limit: FCC_Part15.247_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1	

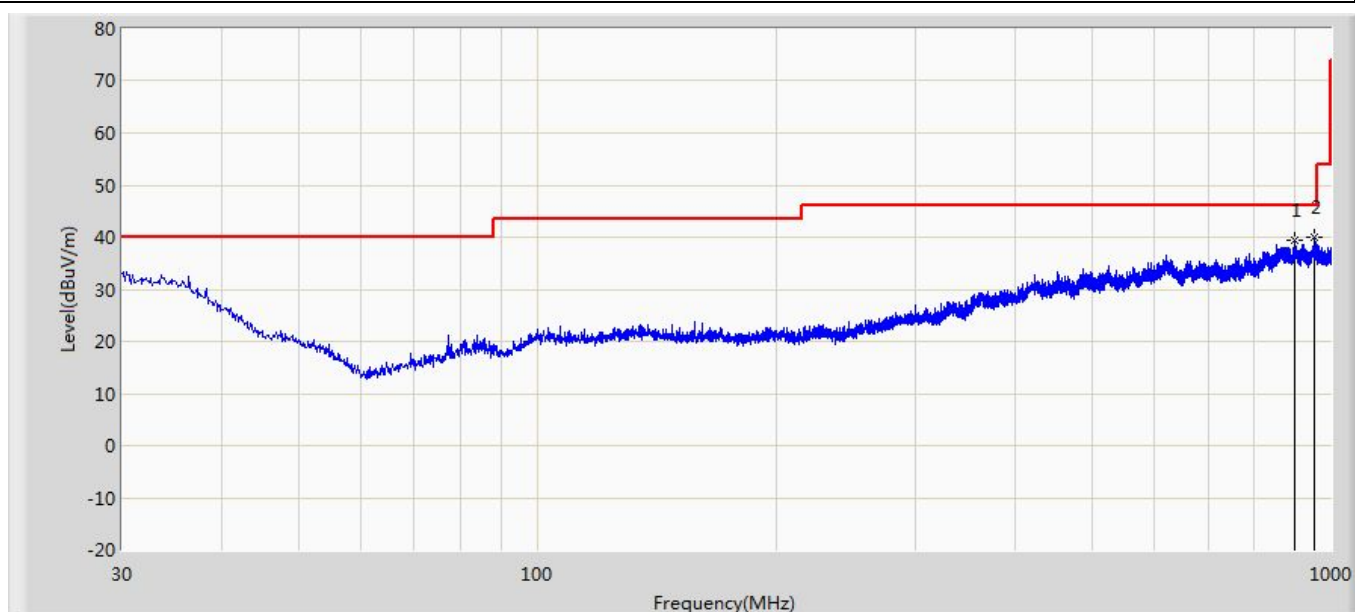


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		900.333	39.490	6.262	-6.510	46.000	23.977	9.251	0.000	0	0	PK
2	*	954.653	39.908	6.659	-6.092	46.000	23.890	9.360	0.000	0	0	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Tim.Cao	
Site: AC2	Time: 2019/08/05 - 14:22
Limit: FCC_Part15.247_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1	

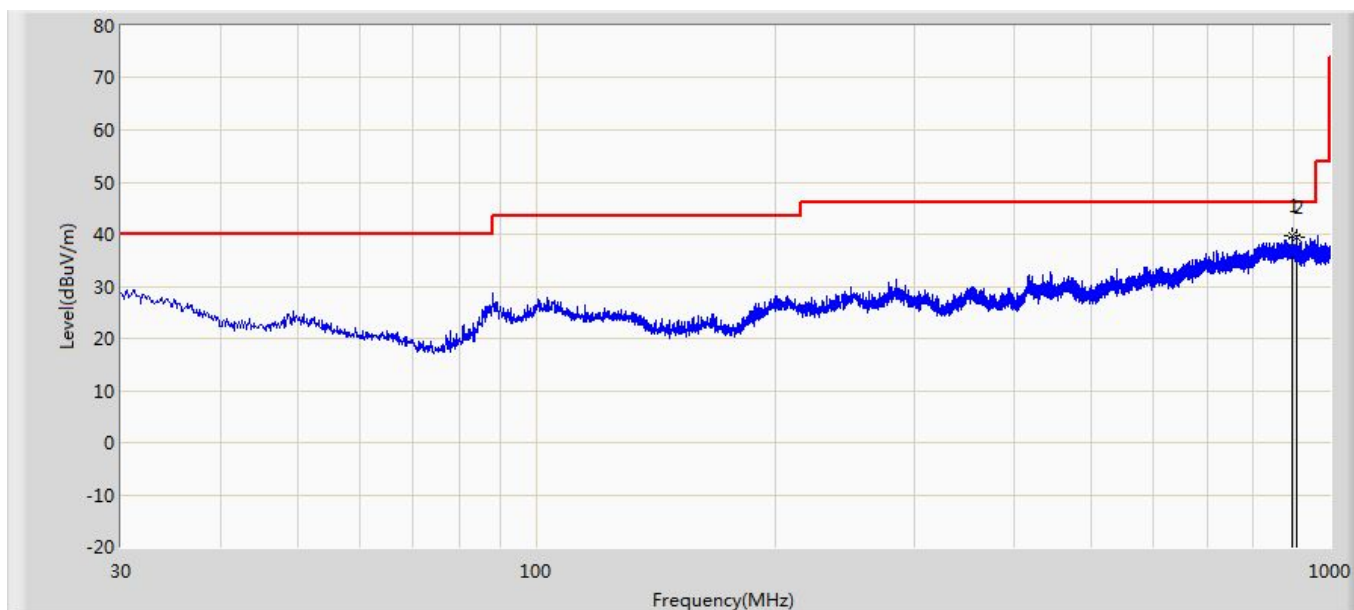

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Prob e (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	895.725	39.636	5.983	-6.364	46.000	24.413	9.239	0.000	0	0	PK
2		909.790	39.548	6.757	-6.452	46.000	23.522	9.269	0.000	0	0	PK

Note:


1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

5. Emissions in non-restricted frequency bands

5.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2. Test Setup

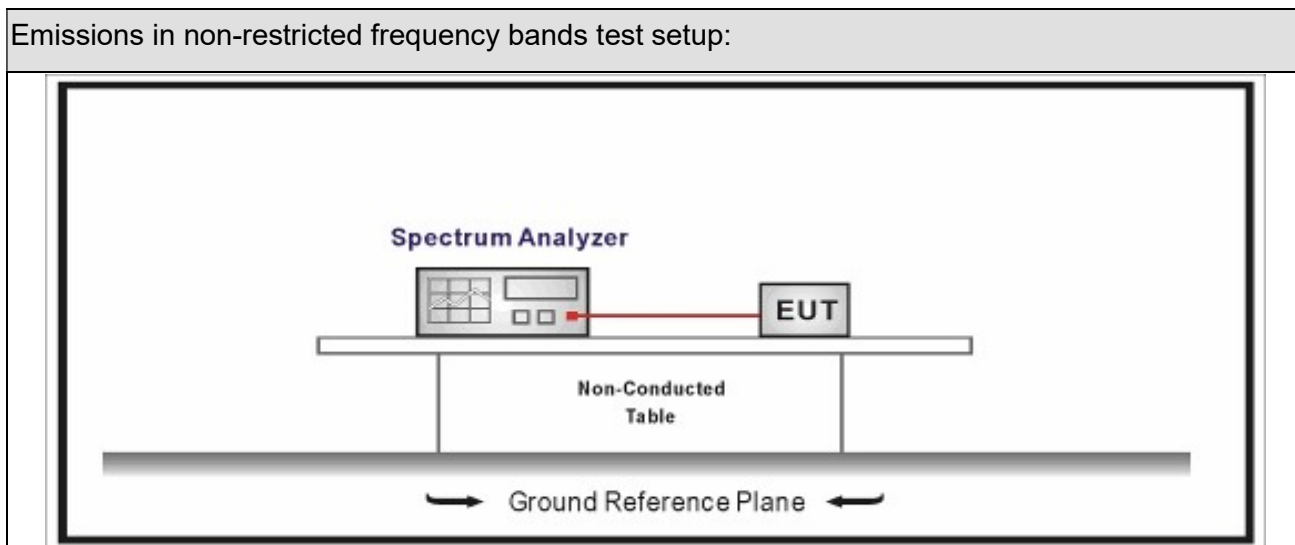





5.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).	

5.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☒	ANSI C63.10	11.11.2	Reference level measurement
	☒	ANSI C63.10	11.11.3	Emission level measurement
☐	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☐	ANSI C63.10	11.12.1	Radiated emission measurements
	☐	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☐	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☒	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☒	ANSI C63.10	Peak power measurement procedure
		☐	ANSI C63.10	Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1 Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2 Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☐	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

5.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


5.6. Test Result

Product Name	: EZ-BT WICED Module	Power	: DC 3.3V
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2019.07.21	Test Engineer	: Tommie

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	1.982	2400.00	-28.537	30.519	>20	Pass
1	39	2480	2.857	2500.00	-59.661	62.518	>20	Pass

Note: The worst case of Emissions in non-restricted frequency bands as below:

Mode 1 CH00 (2402MHz)

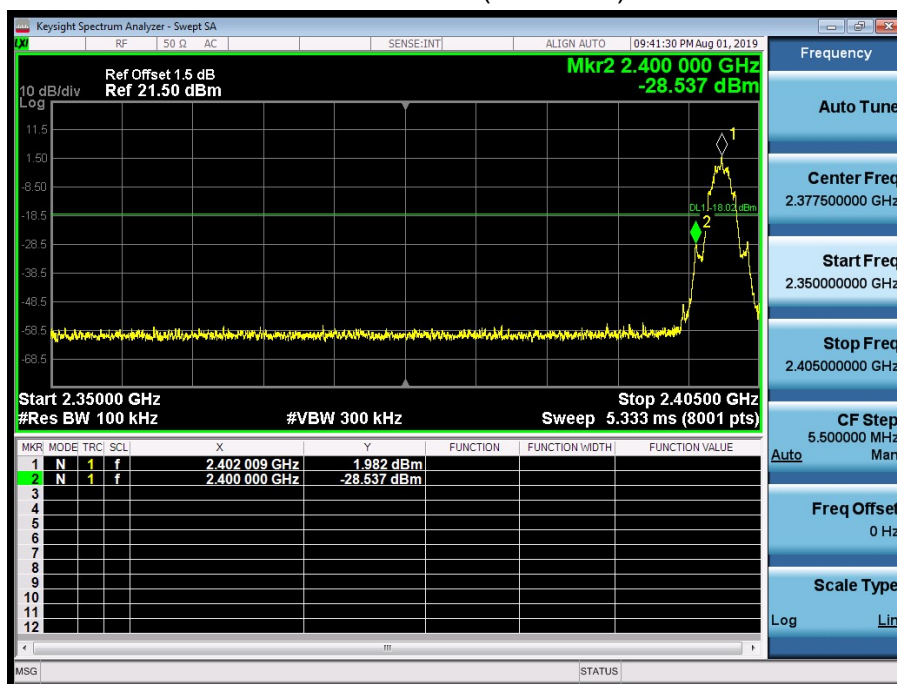


6. Radiated Emission Band Edge

6.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2019.07.16	2020.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2019.05.03	2020.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2019.07.12	2020.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2018.09.18	2019.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2019.02.28	2020.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2019.02.28	2020.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.01.05	2020.01.04

6.2. Test Setup

Above 1GHz Test Setup:

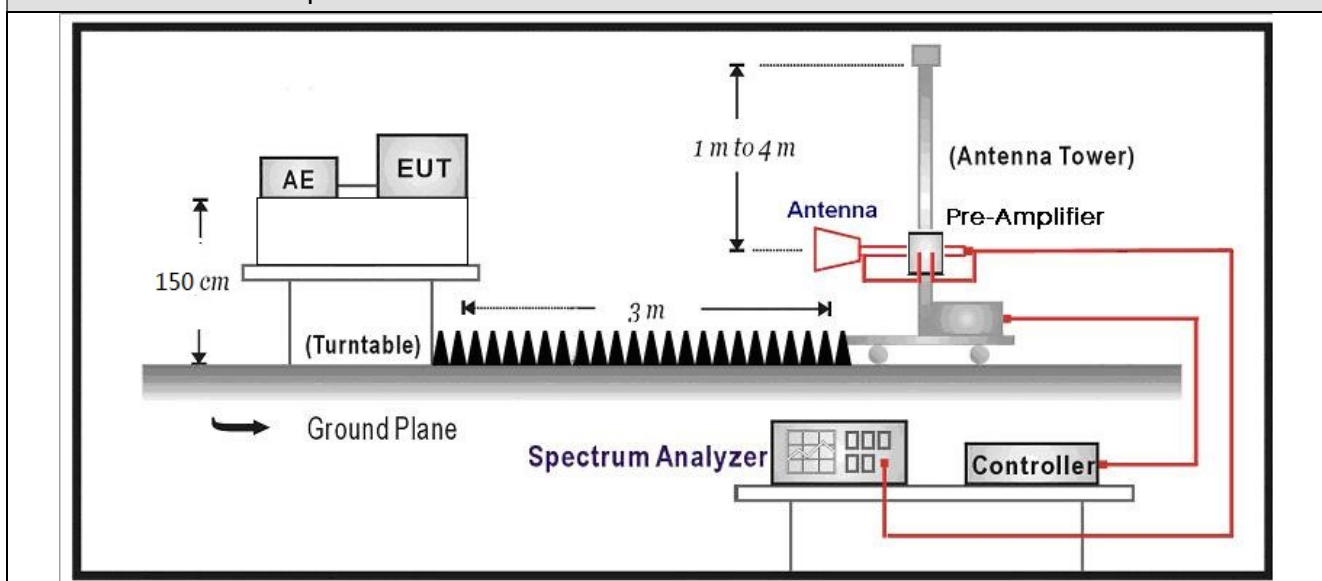

6.3. Limit

Band edge Limit





Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

6.4. Test Procedure

Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			6.10	Band-edge testing	
	☒	ANSI C63.10		6.10.5	Restricted-band band-edge measurements	
	☐	ANSI C63.10		6.10.6	Marker-delta method	
☒	ANSI C63.10			11.12	Emissions in restricted frequency bands	
	☒	ANSI C63.10		11.12.1	Radiated emission measurements	
	☒	ANSI C63.10		11.12.2.7	Radiated spurious emission test	
☐	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
☐	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
☒	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


6.5. EUT test definition

Item	Radiated Emission Band Edge			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☒	Worst Axis ☐
	☐	Conducted		
	☐	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				

6.6. Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (Hz)	Tx On + Tx Off (ms)	Duty Cycle
2LE	0.204	0.42	5.1KHz	0.624	32.69%


BLE

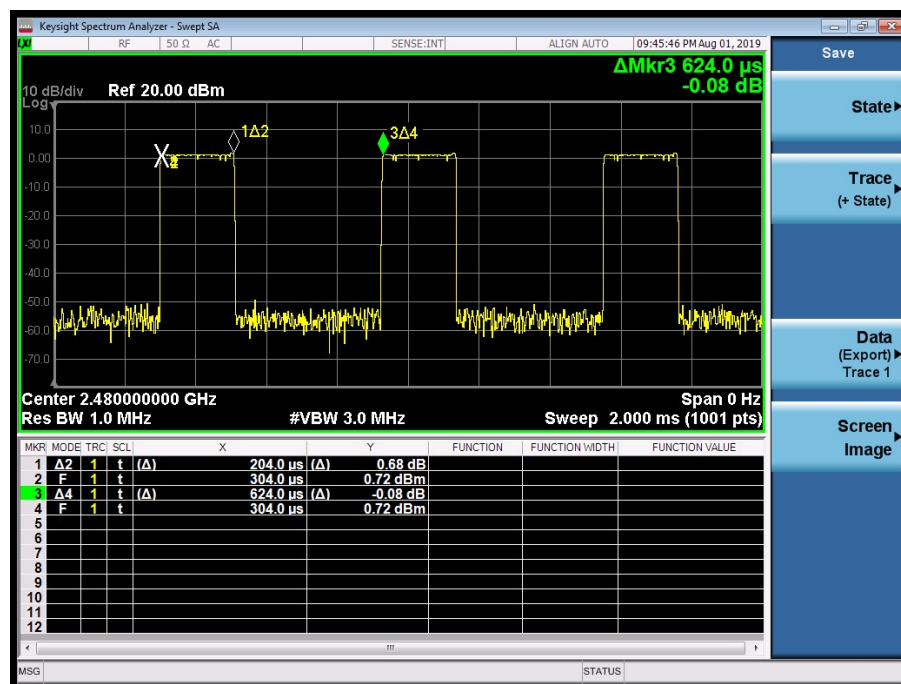

Note: According to the Ton time, 470Hz is used as the VBW setting of Radiated Emission Band Edge average testing.


6.7. Test Result

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 08:58
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_2Mbps	

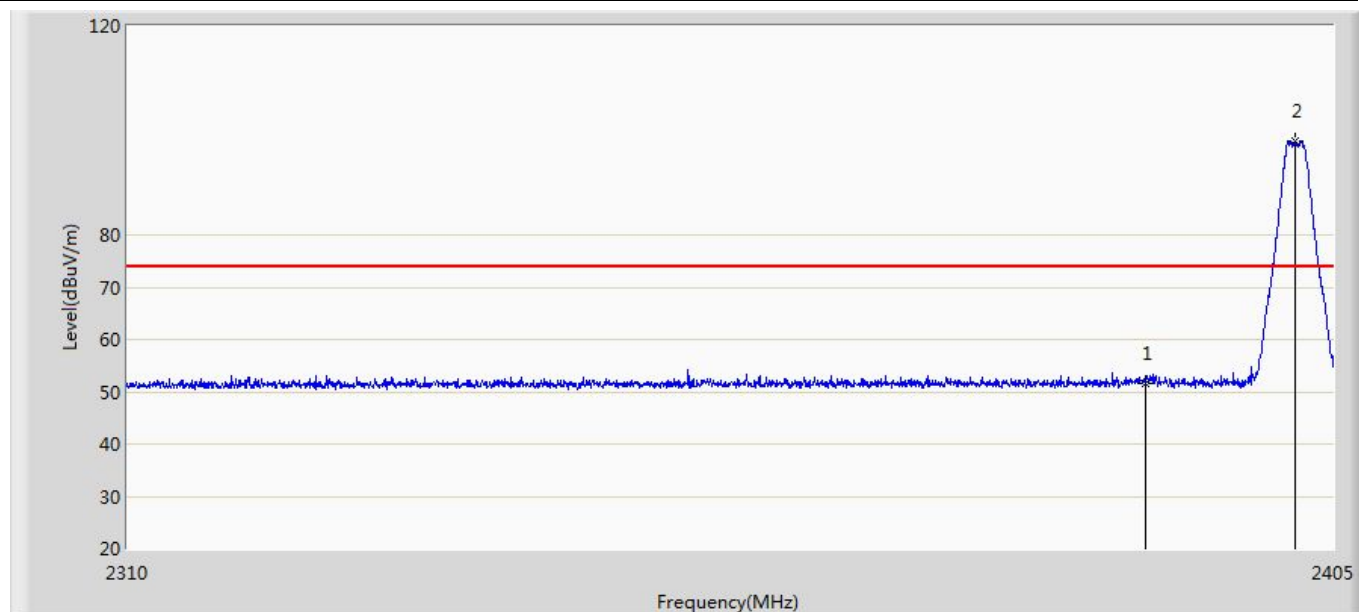


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.529	15.847	-22.471	74.000	35.682	PK
2	*	2402.008	98.060	62.347	24.060	74.000	35.712	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:00
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_2Mbps	

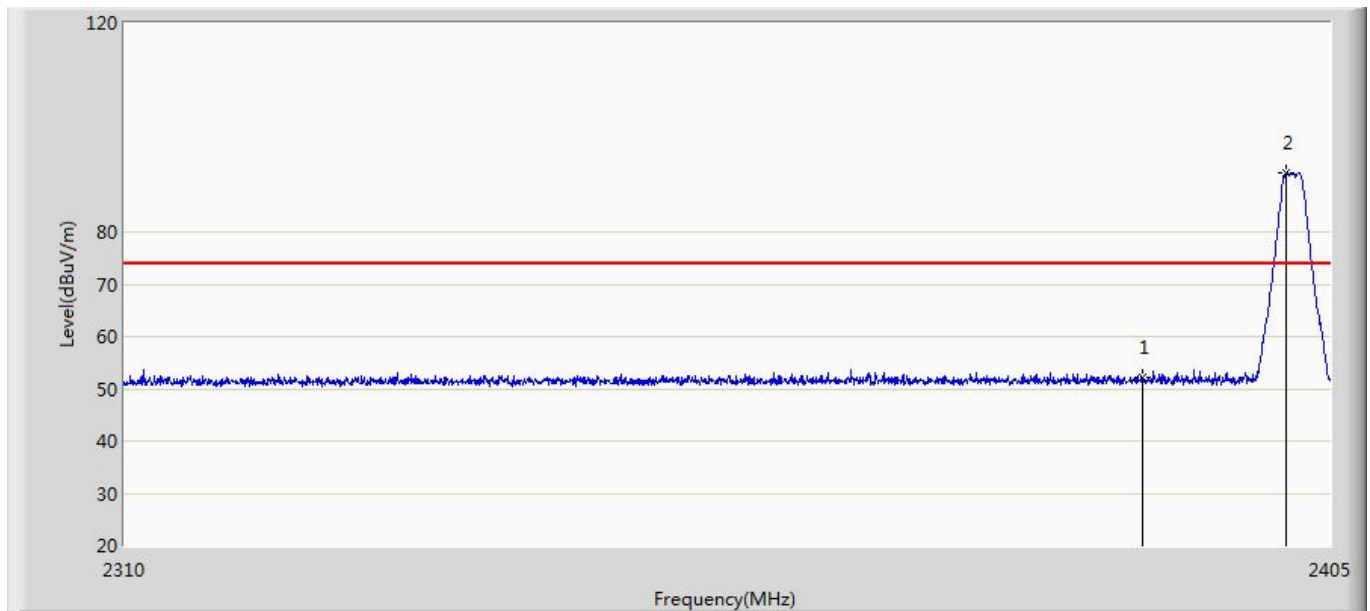


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.080	16.398	-21.920	74.000	35.682	PK
2	*	2401.532	91.401	55.690	17.401	74.000	35.712	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:02
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_2Mbps	

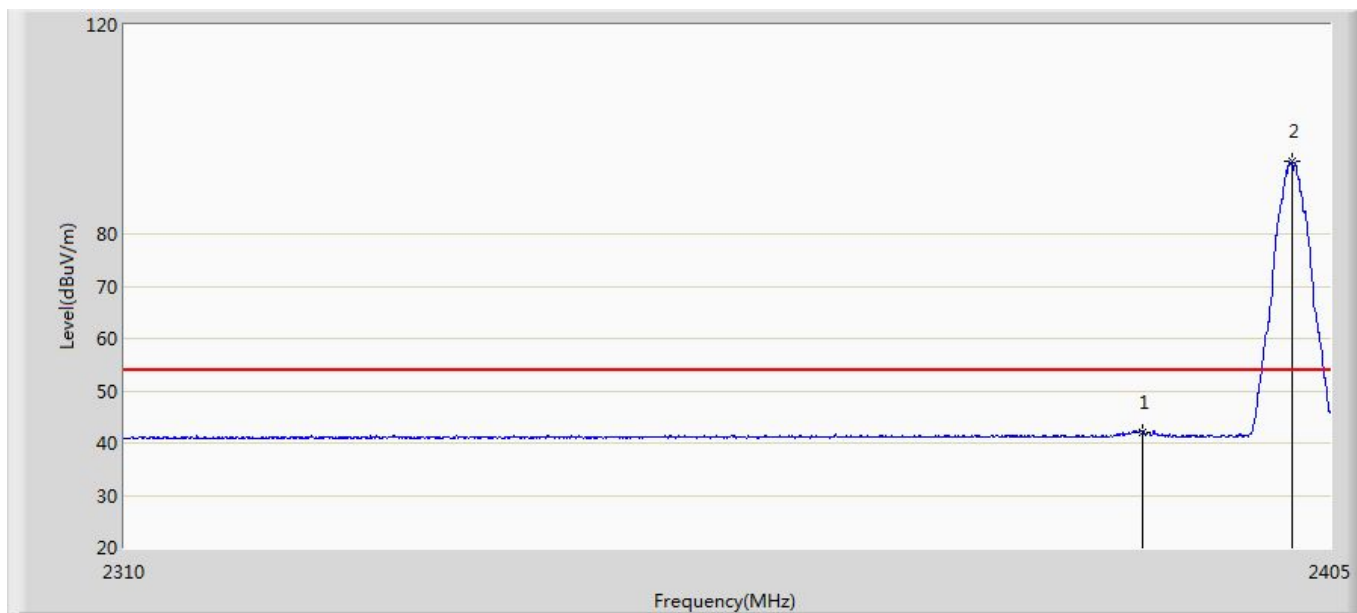


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	42.056	6.374	-11.944	54.000	35.682	AV
2	*	2401.913	93.827	58.115	39.827	54.000	35.712	AV

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:04
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_2Mbps	

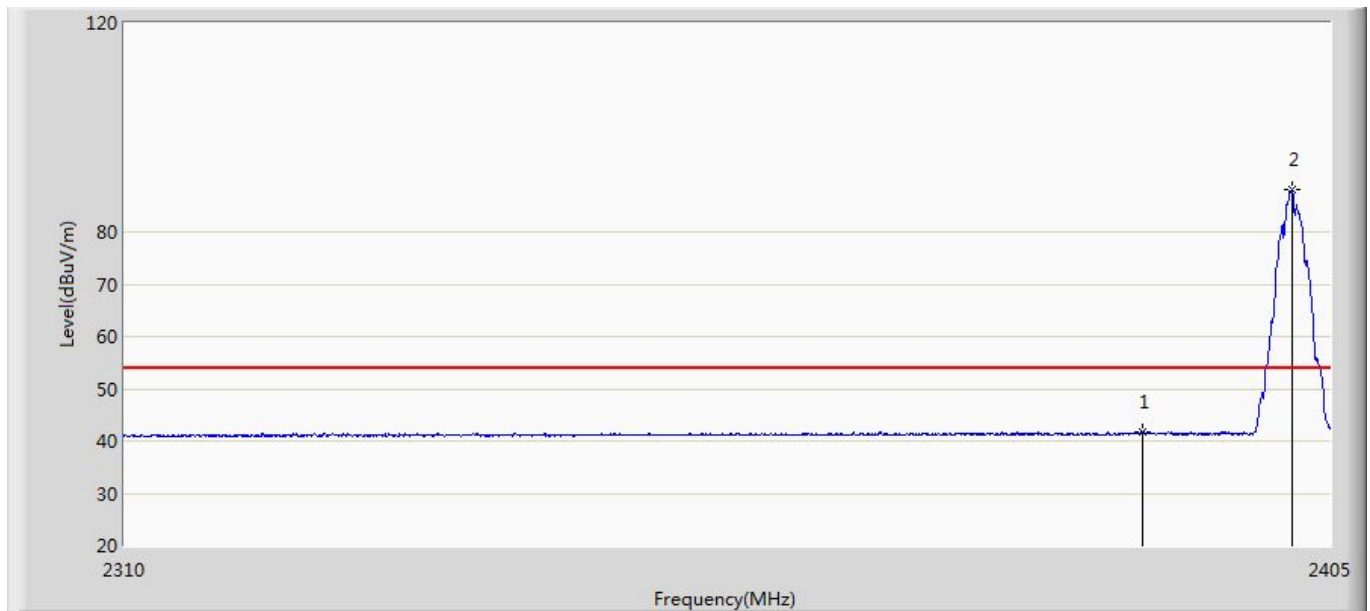


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	41.644	5.962	-12.356	54.000	35.682	AV
2	*	2401.913	87.993	52.281	33.993	54.000	35.712	AV

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:06
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by LE_2Mbps	

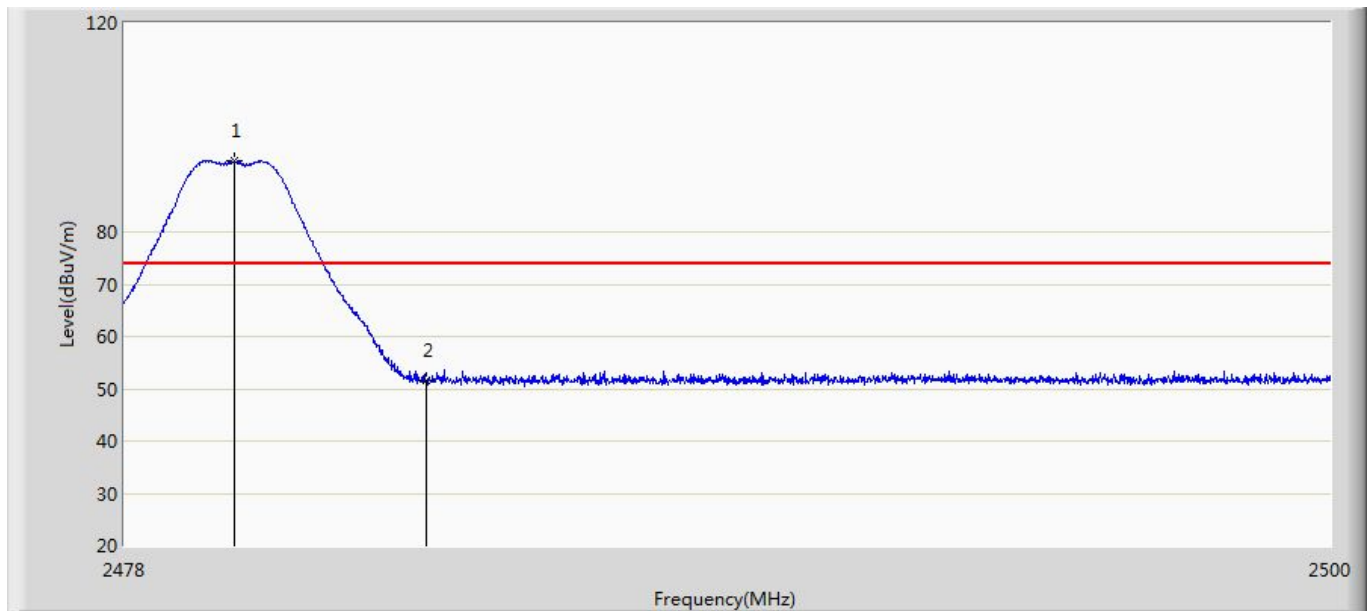


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.013	93.593	57.727	19.593	74.000	35.866	PK
2		2483.500	51.596	15.704	-22.404	74.000	35.891	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:08
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by LE_2Mbps	

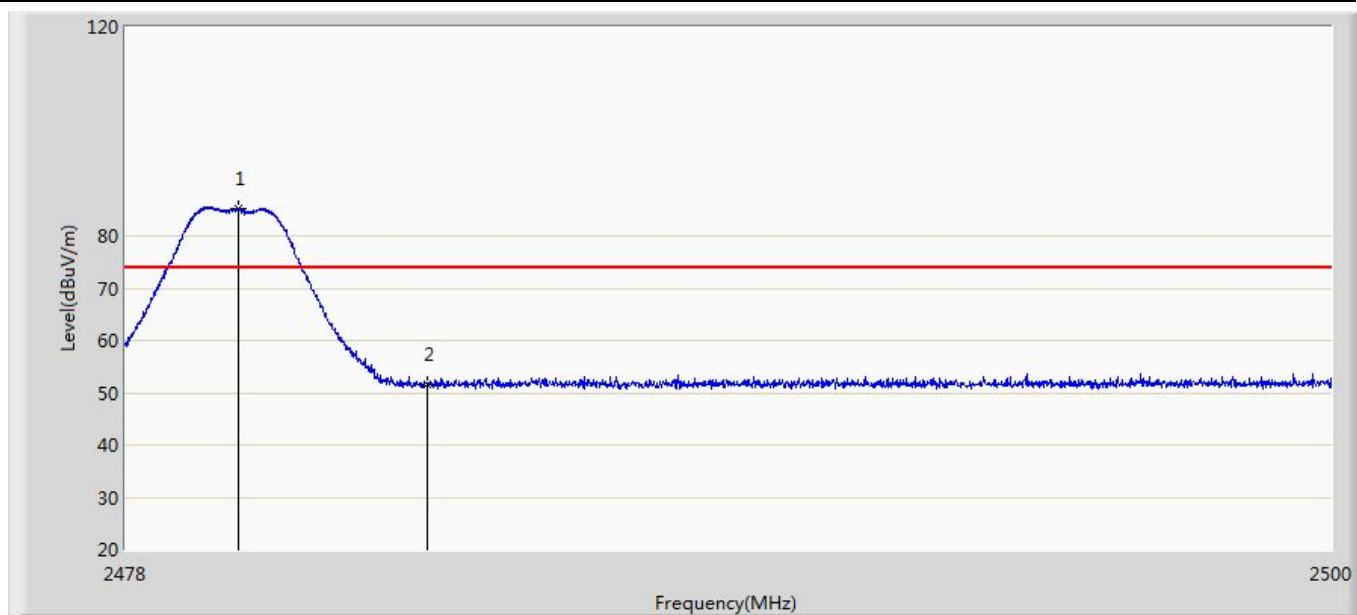


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	85.315	49.448	11.315	74.000	35.866	PK
2		2483.500	51.702	15.810	-22.298	74.000	35.891	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:10
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by LE_2Mbps	

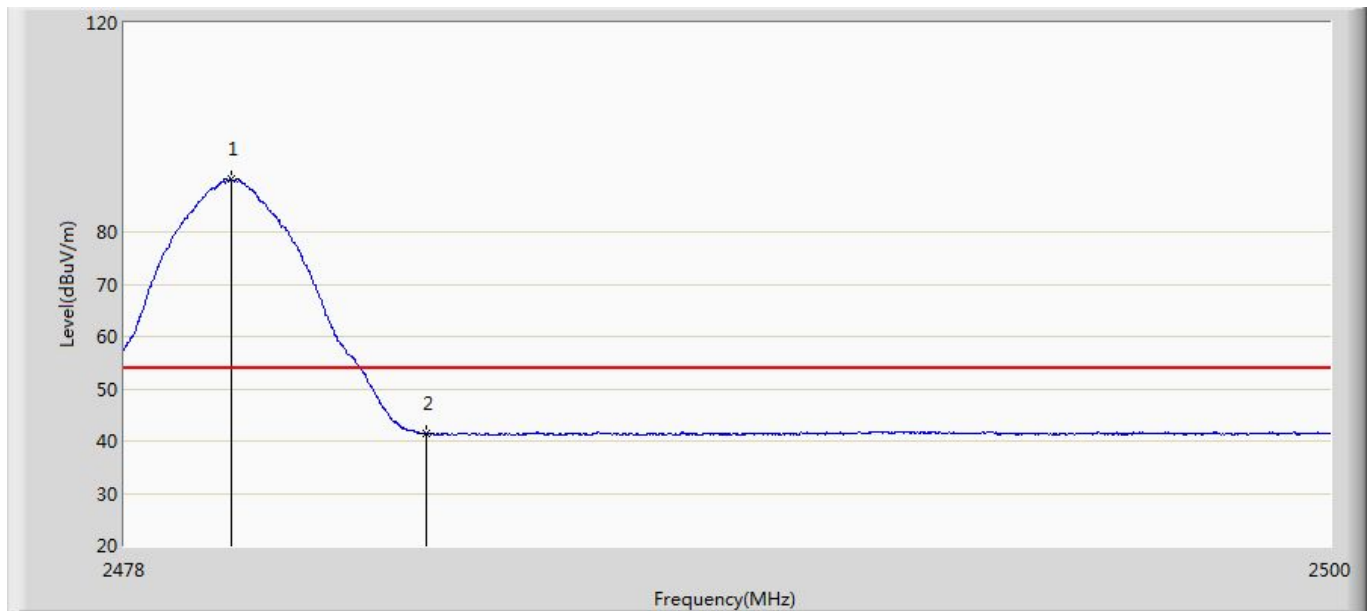

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.947	90.168	54.302	36.168	54.000	35.866	AV
2		2483.500	41.373	5.481	-12.627	54.000	35.891	AV

Engineer: Tongben	
Site: AC5	Time: 2019/08/05 - 09:12
Limit: FCC_Part15.247_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2480MHz by LE_2Mbps	

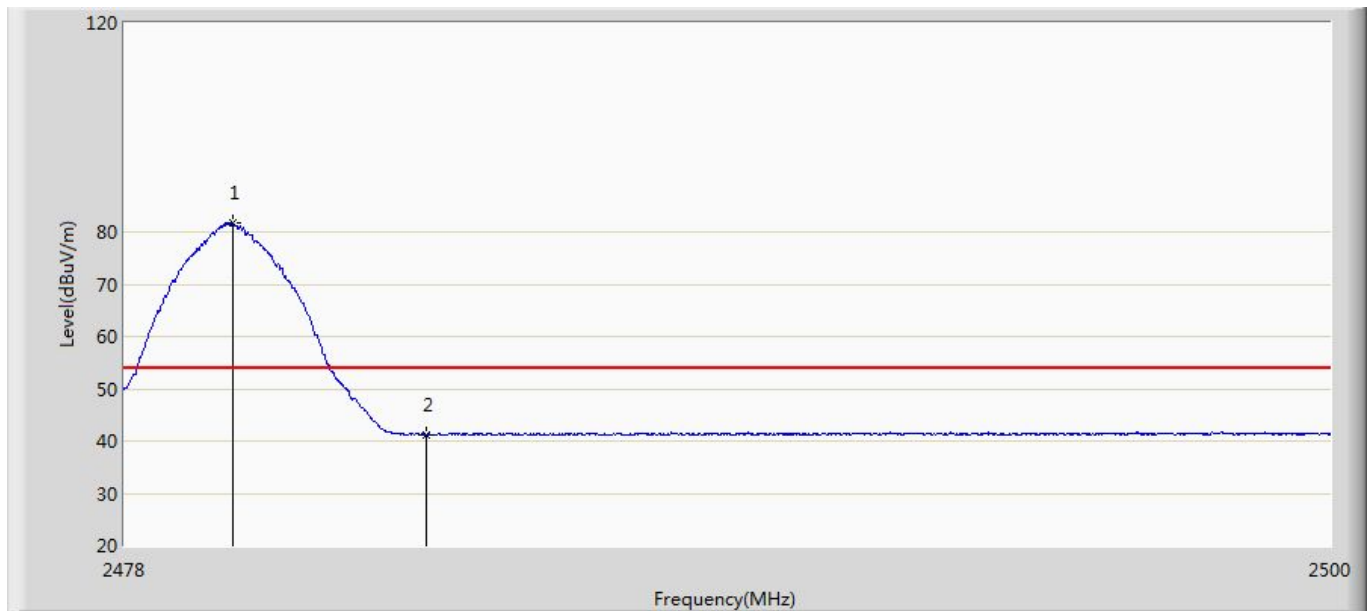


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.980	81.651	45.785	27.651	54.000	35.866	AV
2		2483.500	41.266	5.374	-12.734	54.000	35.891	AV

7. Occupied Bandwidth

7.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

7.2. Test Setup

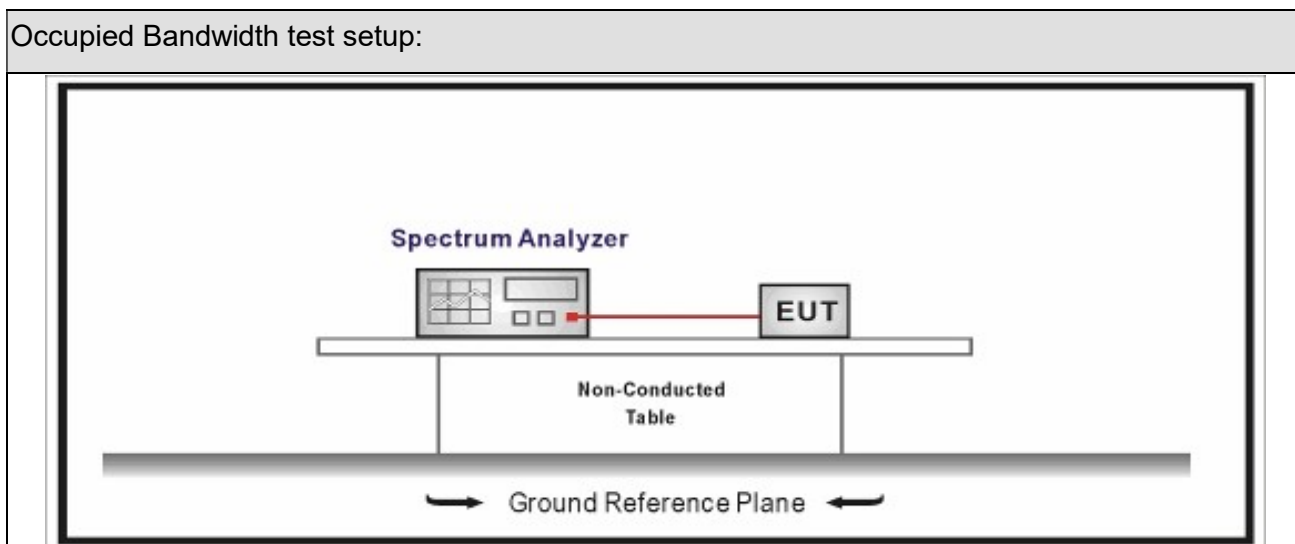

7.3. Limit







Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

7.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☐	ANSI C63.10	11.8.1	Option 1
	☒	ANSI C63.10	11.8.2	Option 2

7.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


7.6. Test Result

Product Name	: EZ-BT WICED Module	Power	: DC 3.3V
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2019.07.21	Test Engineer	: Tommie

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (kHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	2402	2097.9	1098	>500	Pass
1	19	2440	2095.6	1096	>500	Pass
1	39	2480	2101.2	1095	>500	Pass

Note : The worst case of Occupied Bandwidth as below:

Mode 1 CH39 (2480MHz)

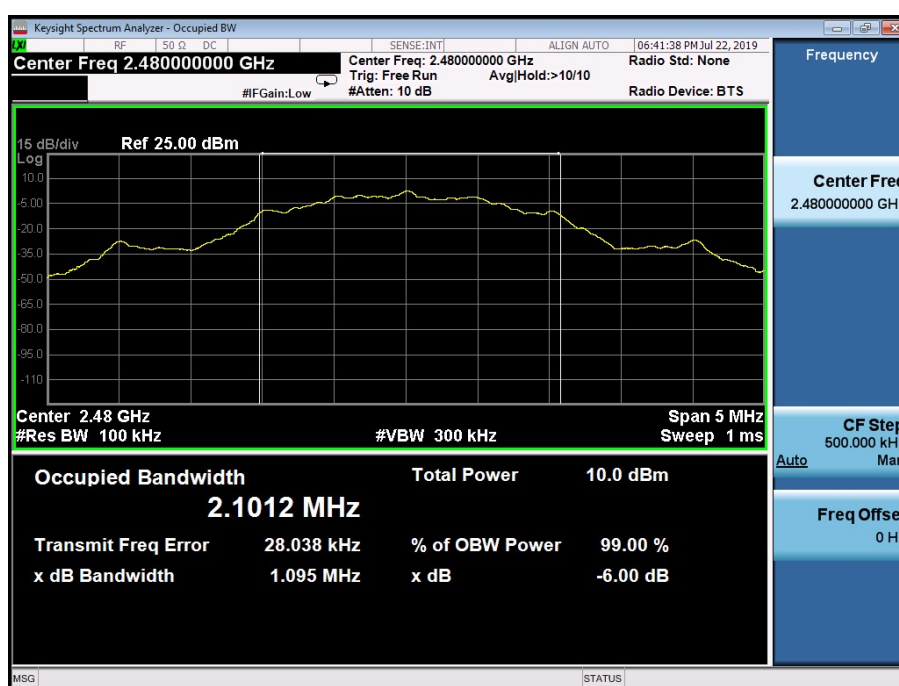


8. Fundamental emission output power

8.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2019.01.04	2020.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.01.04	2020.01.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2018.10.14	2019.10.13
Power Sensor	Anritsu	MA2411B	0846014	2018.10.14	2019.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2019.04.10	2020.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

8.2. Test Setup

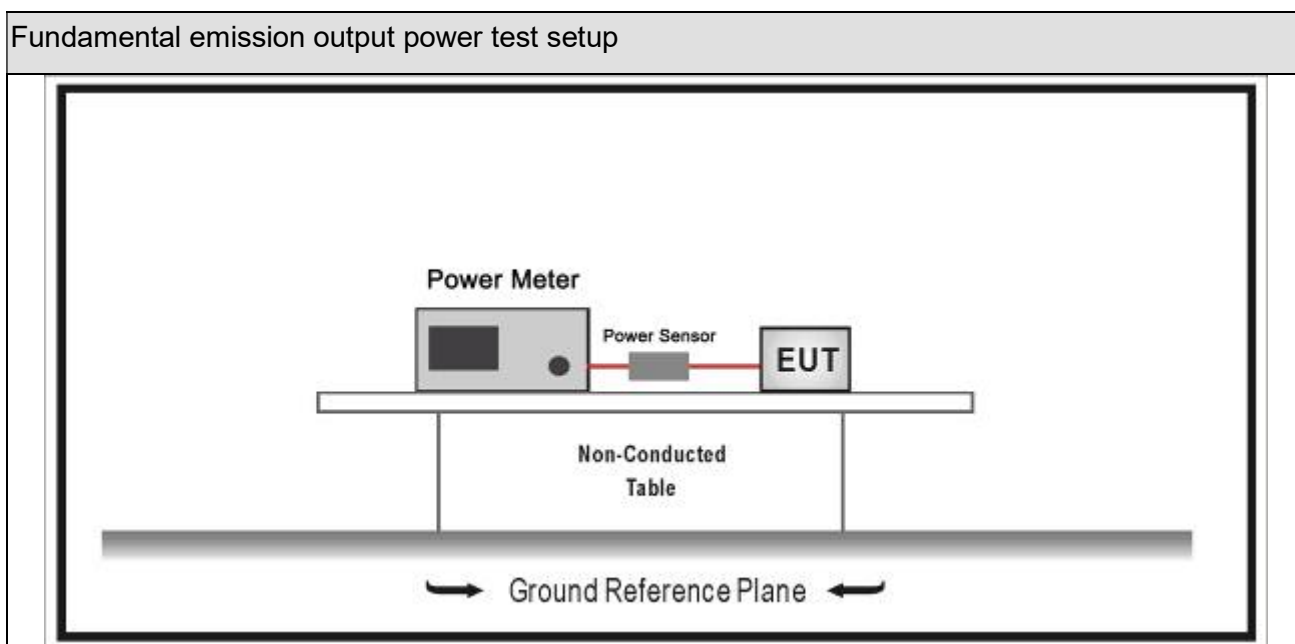






8.3. Limit

Fundamental emission output power Limit		
☒	$G_{TX} < 6\text{dBi}$	$P_{out} \leq 30\text{dBm}$
☐	$G_{TX} > 6\text{dBi}$	
☐	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas. Note 2 : P_{out} is maximum peak conducted output power .		

8.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

8.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				

8.6. Test Result

Product Name	:	EZ-BT WICED Module	Power	:	DC 3.3V
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2019.07.19	Test Engineer	:	Tommie


Mode	Channel	Test Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	00	2402	3.95	30	Pass
1	19	2440	3.91	30	Pass
1	39	2480	4.05	30	Pass

9. Power Spectral Density

9.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

9.2. Test Setup

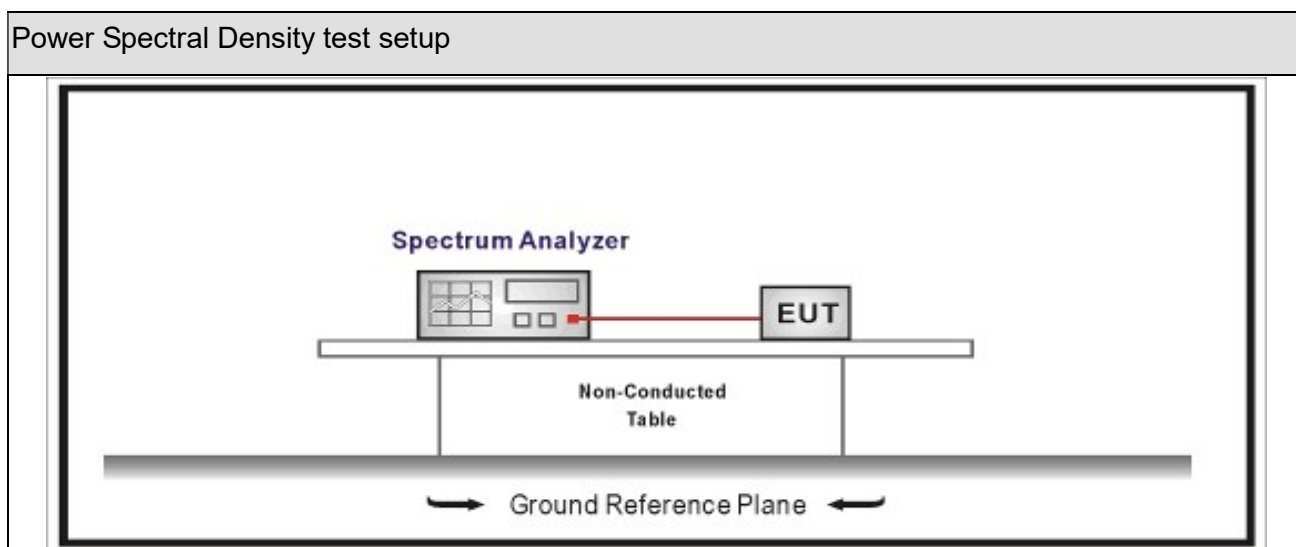






9.3. Limit

Power Spectral Density Limit
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

9.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

9.5. EUT test definition

Item	Power Spectral Density Test Method			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


9.6. Test Result

Product Name	: EZ-BT WICED Module	Power	: DC 3.3V
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2019.07.22	Test Engineer	: Tommie

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	00	2402	-16.571	-16.571	8	Pass
1	19	2440	-16.836	-16.836	8	Pass
1	39	2480	-16.673	-16.673	8	Pass

Note : The worst case of Power Spectral Density as below:

Mode 1 CH00(2402MHz)

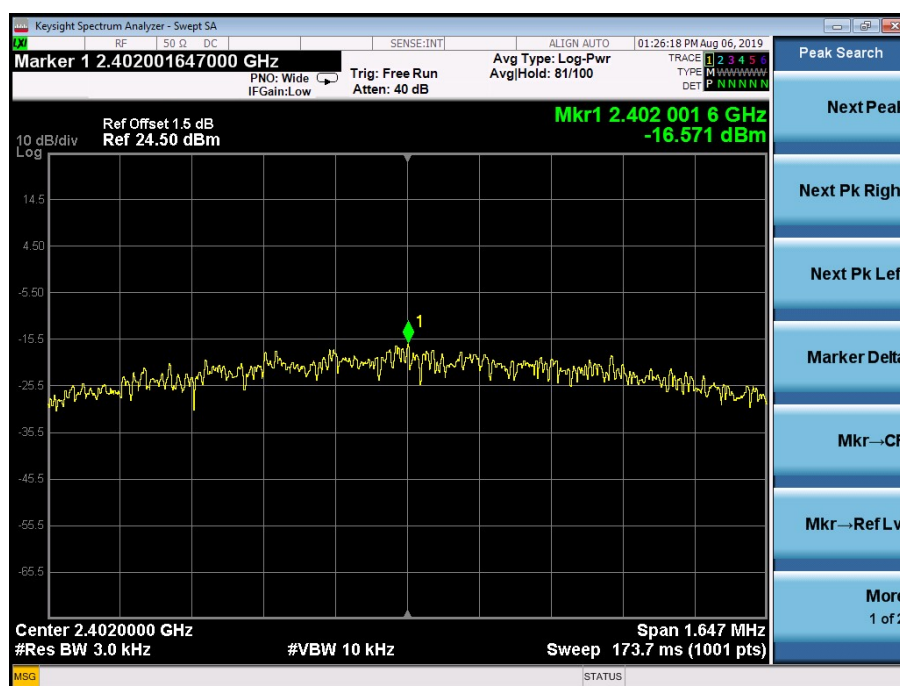

10. Antenna Requirement

10.1. Limit

Antenna Requirement Limit
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

10.2. Antenna Connector Construction

Antenna Connector Construction	
☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____