

## FCC/ISED Test Report


**Prepared for:** Garmin International, Inc.

**Address:** 1200 E. 151<sup>st</sup> Street  
Olathe, Kansas, 66062, USA

**Product:** A04244

**Test Report No:** R20211006-20-E4B

**Approved by:**

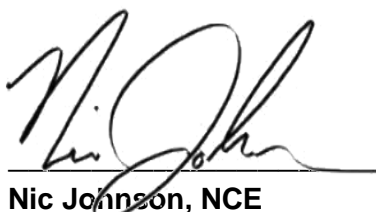

Nic Johnson, NCE  
Technical Manager  
iNARTE Certified EMC Engineer #EMC-041453-E

**DATE:** May 12, 2022

**Total Pages:** 81

*The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.*



Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

## REVISION PAGE

Rev. No.	Date	Description
0	1 March 2022	Original – KVepuri Reviewed by KVepuri/NJohnson Prepared by GLarsen and FLane
A	10 May 2022	Corrected Data Sec. 4.0 Added Comments to Sec. 4.5 Corrected Data Sec 4.5
B	12 May 2022	Increased conducted spurious delta requirement to 30dB -NJ



Report Number: R20211006-20-E4A


Rev

B

Prepared for: Garmin International, Inc.

## CONTENTS

Revision Page .....	2
<b>1.0 Summary of test results.....</b>	<b>4</b>
<b>2.0 EUT Description .....</b>	<b>5</b>
<b>2.1 Equipment under test .....</b>	<b>5</b>
<b>2.2 Description of test modes .....</b>	<b>5</b>
<b>2.3 Description of support units.....</b>	<b>6</b>
<b>3.0 Laboratory and General Test Description .....</b>	<b>7</b>
<b>3.1 Laboratory description.....</b>	<b>7</b>
<b>3.2 Test personnel.....</b>	<b>7</b>
<b>3.3 Test equipment.....</b>	<b>8</b>
<b>3.4 General Test Procedure and Setup for Radio Measuremnts.....</b>	<b>9</b>
<b>4.0 Results .....</b>	<b>10</b>
<b>4.1 Output Power .....</b>	<b>14</b>
<b>4.2 Bandwidth.....</b>	<b>15</b>
<b>4.3 Duty Cycle .....</b>	<b>16</b>
<b>4.4 Radiated emissions.....</b>	<b>17</b>
<b>4.5 Conducted Spurious Emissions .....</b>	<b>25</b>
<b>4.5 Band edges .....</b>	<b>31</b>
<b>4.6 Power Spectral Density .....</b>	<b>33</b>
<b>4.7 Conducted AC Mains Emissions .....</b>	<b>34</b>
<b>Appendix A: Sample Calculation .....</b>	<b>39</b>
<b>Appendix B – Measurement Uncertainty .....</b>	<b>41</b>
<b>Appendix C – Graphs and Tables .....</b>	<b>42</b>
<b>REPORT END.....</b>	<b>81</b>

	Report Number:	R20211006-20-E4A	Rev	B
	Prepared for:	Garmin International, Inc.		

## 1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

### FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISSED RSS-Gen, Issue 5
- (3) ISSED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass

## 2.0 EUT DESCRIPTION

### 2.1 EQUIPMENT UNDER TEST

#### Summary and Operating Condition:

<b>EUT</b>	A04244
<b>EUT Received</b>	5 November 2021
<b>EUT Tested</b>	5 November 2021- 17 February 2022
<b>Serial No.</b>	3388323232 (Radiated Measurements) 3388323409 (Conducted Measurements) 3388323355 (Conducted Measurements)
<b>Operating Band</b>	2400 – 2483.5 MHz
<b>Device Type</b>	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
<b>Power Supply / Voltage</b>	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For Bluetooth Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440/2441 MHz
High	2480 MHz

For 802.11x Transmissions:

Channel	Frequency
Low	2412 MHz
Mid	2437 MHz
High	2462 MHz

Data Rates Used:

Data Rate	Low	High
802.11b	1MHz	11MHz
802.11g	6MHz	54MHz
802.11n	MCS0	MCS7

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

Power Settings used:

Modulation	Low	Mid	High
802.11b	27	35	27
802.11g	22	30	22
802.11n	22	31	22



Report Number:

R20211006-20-E4A

Rev


B

Prepared for:

Garmin International, Inc.

### 2.3 DESCRIPTION OF SUPPORT UNITS

None

	Report Number:	R20211006-20-E4A	Rev	B
	Prepared for:	Garmin International, Inc.		

### 3.0 LABORATORY AND GENERAL TEST DESCRIPTION

#### 3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)  
4740 Discovery Drive  
Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of  $35 \pm 4\%$   
Temperature of  $22 \pm 3^\circ$  Celsius



#### 3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Nic Johnson	Technical Manager	Review/Editing
2	Fox Lane	Test Engineer	Testing and Report
3	Karthik Vepuri	Test Engineer	Review, Testing and Report
4	Blake Winter	Test Engineer	Testing
5	Grace Larsen	Test Technician	Testing and report
6	Samuel Probst	Test Technician	Testing
7	Matthew Emory	Test Technician	Testing

**Notes:** All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number: R20211006-20-E4A

Rev

B

Prepared for: Garmin International, Inc.

### 3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Horn Antenna	3115	6415	March 16, 2020	March 16, 2022
EMCO Horn Antenna	3116	2576	March 9, 2020	March 9, 2022
Com-Power LISN 50 $\mu$ H / 250 $\mu$ H - 50 $\Omega$	LI-220C	20070017	September 22, 2020	September 22, 2022
8447F POT H64 Preamplifier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2023
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	April 14, 2020	April 14, 2022
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber- VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	October 25, 2019	October 25, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preamplifier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)**	PE9128	NCEEBH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)**	PE9128	NCEEBH2	September 24, 2021	September 24, 2023

\*Internal Characterization

**Notes:**

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.



### 3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

#### Conducted ☒

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

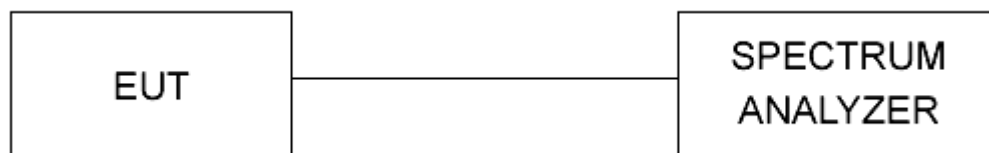


Figure 1 - Bandwidth Measurements Test Setup

#### Radiated ☒

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

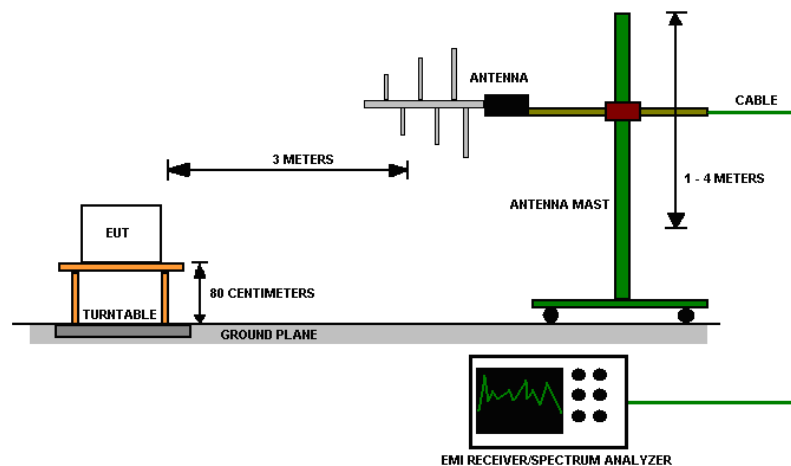



Figure 2 - Radiated Emissions Test Setup

	Report Number:	R20211006-20-E4A	Rev	B
	Prepared for:	Garmin International, Inc.		

#### 4.0 RESULTS

DTS Radio Measurements <b>Low Data Rate</b>							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	Average OUTPUT POWER (dBm)	OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.96	9.56	13.46	22.18	1.13	PASS
Mid	802.11 b	15.19	10.05	16.40	43.65	4.329	PASS
High	802.11 b	14.98	10.05	13.12	20.51	0.813	PASS
Low	802.11 g	16.56	16.56	9.24	8.39	-14.066	PASS
Mid	802.11 g	16.59	16.58	13.49	22.34	-9.999	PASS
High	802.11 g	16.55	16.57	7.54	5.68	-15.553	PASS
Low	802.11 n	17.545	17.65	9.70	9.33	-14.328	PASS
Mid	802.11 n	17.558	17.64	14.50	28.18	-10.064	PASS
High	802.11 n	17.546	17.63	7.98	6.28	-16.377	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz				Output Power Limit = 30 dBm; PSD Limit = 8 dBm			
Unrestricted Band-Edge <b>Low Data Rate</b>							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2400.00	76.53	112.76	36.23	30.00	PASS
Low	802.11 g	2400.00	68.14	104.17	36.04	30.00	PASS
Low	802.11 n	2400.00	67.36	104.45	37.08	30.00	PASS
High	802.11 b	2483.50	54.68	111.37	56.69	30.00	PASS
High	802.11 g	2483.50	58.36	102.15	43.79	30.00	PASS
High	802.11 n	2483.50	58.31	102.61	44.30	30.00	PASS
Radiated Peak Restricted Band-Edge <b>Low Data Rate</b>							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	55.58	Peak	73.98	18.41	PASS
Low	802.11 g	2390.00	59.09	Peak	73.98	10.70	PASS
Low	802.11 n	2390.00	60.12	Peak	73.98	11.22	PASS
High	802.11 b	2483.50	57.16	Peak	73.98	16.82	PASS
High	802.11 g	2483.50	59.75	Peak	73.98	10.86	PASS
High	802.11 n	2483.50	60.21	Peak	73.98	8.57	PASS
*Limit shown is the peak limit taken from FCC Part 15.209							



Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

**Radiated Average Restricted Band-Edge Low Data Rate**

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	44.40	Average	53.98	9.58	PASS
Low	802.11 g	2390.00	46.64	Average	53.98	7.34	PASS
Low	802.11 n	2390.00	47.61	Average	53.98	6.37	PASS
High	802.11 b	2483.50	47.80	Average	53.98	6.18	PASS
High	802.11 g	2483.50	46.01	Average	53.98	7.97	PASS
High	802.11 n	2483.50	46.72	Average	53.98	7.26	PASS

\*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

DTS Radio Measurements High Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	Average OUTPUT POWER (dBm)	OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.76	9.19	14.20	26.30	-7.86	PASS
Mid	802.11 b	14.80	9.53	17.02	50.35	-4.996	PASS
High	802.11 b	14.74	9.49	13.25	21.13	-8.872	PASS
Low	802.11 g	16.42	16.51	10.75	11.89	-12.088	PASS
Mid	802.11 g	16.43	16.51	11.96	15.70	-9.906	PASS
High	802.11 g	16.42	16.51	8.82	7.62	-13.607	PASS
Low	802.11 n	17.50	17.64	10.12	10.28	-13.818	PASS
Mid	802.11 n	17.50	17.66	11.33	13.58	-13.683	PASS
High	802.11 n	17.50	17.67	9.42	8.75	-15.932	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz				Output Power Limit = 30 dBm; PSD Limit = 8 dBm			
Unrestricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2400.00	74.64	112.39	37.75	30.00	PASS
Low	802.11 g	2400.00	69.19	105.79	36.60	30.00	PASS
Low	802.11 n	2400.00	70.91	106.14	35.22	30.00	PASS
High	802.11 b	2483.50	54.55	111.55	57.00	30.00	PASS
High	802.11 g	2483.50	57.24	104.40	47.16	30.00	PASS
High	802.11 n	2483.50	59.85	104.20	44.35	30.00	PASS
Radiated Peak Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	55.58	Peak	73.98	18.41	PASS
Low	802.11 g	2390.00	63.29	Peak	73.98	10.70	PASS
Low	802.11 n	2390.00	62.76	Peak	73.98	11.22	PASS
High	802.11 b	2483.50	57.16	Peak	73.98	16.82	PASS
High	802.11 g	2483.50	63.12	Peak	73.98	10.86	PASS
High	802.11 n	2483.50	65.41	Peak	73.98	8.57	PASS
*Limit shown is the peak limit taken from FCC Part 15.209							




Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

**Radiated Average Restricted Band-Edge High Data Rate**

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	44.60	Average	53.98	9.38	PASS
Low	802.11 g	2390.00	47.72	Average	53.98	6.26	PASS
Low	802.11 n	2390.00	48.77	Average	53.98	5.22	PASS
High	802.11 b	2483.50	46.32	Average	53.98	7.66	PASS
High	802.11 g	2483.50	47.00	Average	53.98	6.99	PASS
High	802.11 n	2483.50	48.64	Average	53.98	5.34	PASS

\*Limit shown is the average limit taken from FCC Part 15.209

	Report Number:	R20211006-20-E4A	Rev	B
	Prepared for:	Garmin International, Inc.		

#### 4.1 OUTPUT POWER

**Test Method:** Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

**Limits of power measurements:**

**For FCC Part 15.247 Device:**

The maximum allowed output power is 30 dBm.

**Test procedures:**

Details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

**Pass**

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

## 4.2 BANDWIDTH

**Test Method:** All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of bandwidth measurements:

#### For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

### Test procedures:

Details can be found in section 3.4 of this report.

### Deviations from test standard:

No deviation.

### Test setup:

Test setup details can be found in section 3.4 of this report.

### EUT operating conditions:

Details can be found in section 2.1 of this report.

### Test results:

## Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:

R20211006-20-E4A

Rev

B

Prepared for:

Garmin International, Inc.

### 4.3 DUTY CYCLE

#### Test Method:

All Modulations/Transmitters in this report had a duty cycle of >98%



#### 4.4 RADIATED EMISSIONS

**Test Method:** ANSI C63.10-2013, Section 6.5, 6.6

**Limits for radiated emissions measurements:**

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ( $\mu\text{V/m}$ )	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) =  $20 * \log * \text{Emission level } (\mu\text{V/m})$ .
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.




Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

**Test procedures:**

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 6 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

### Test setup:

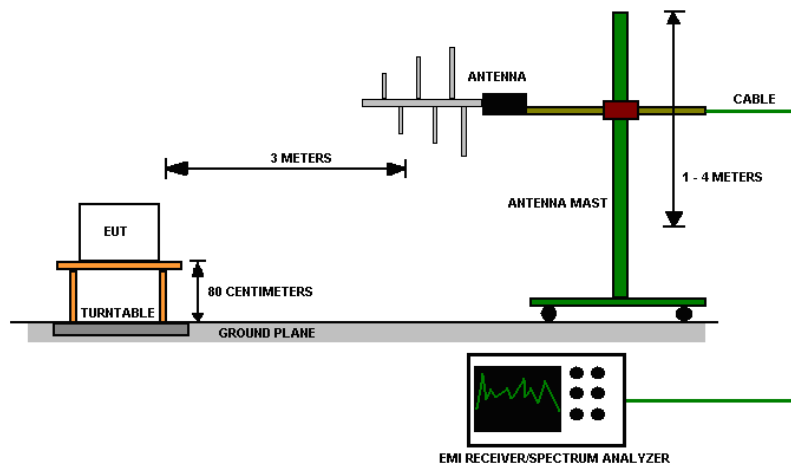

**Figure 3 - Radiated Emissions Test Setup**

### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.


### Deviations from test standard:

No deviation.


### EUT operating conditions

Details can be found in section 2.1 of this report.

**Test results:**

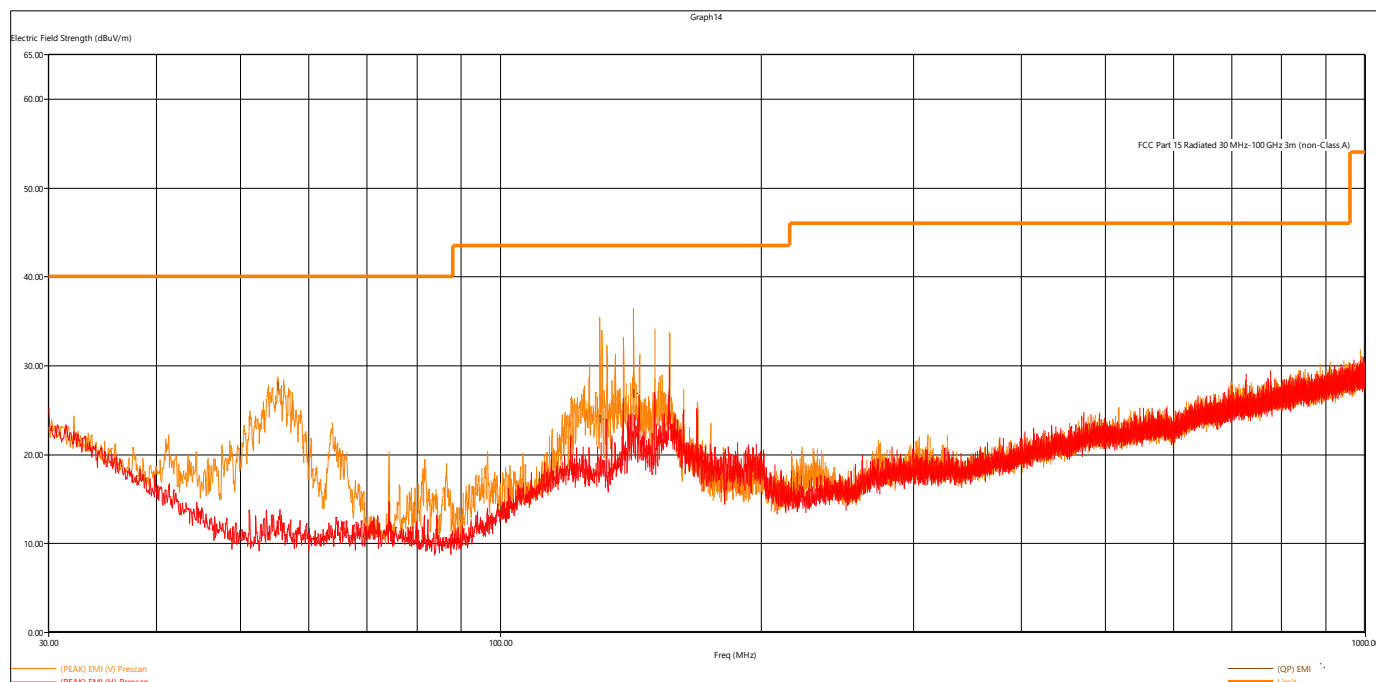

**Figure 4 - Radiated Emissions Plot, Receive**

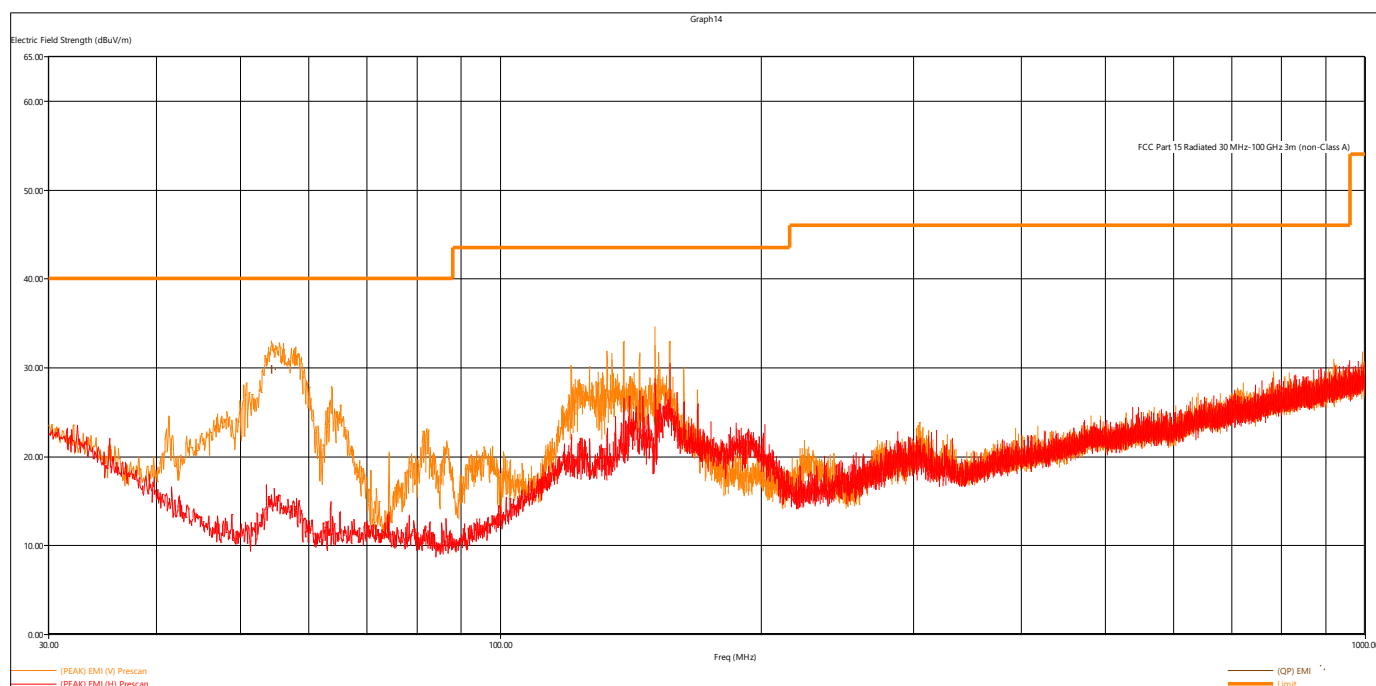

**Figure 5 - Radiated Emissions Plot, 802.11b**

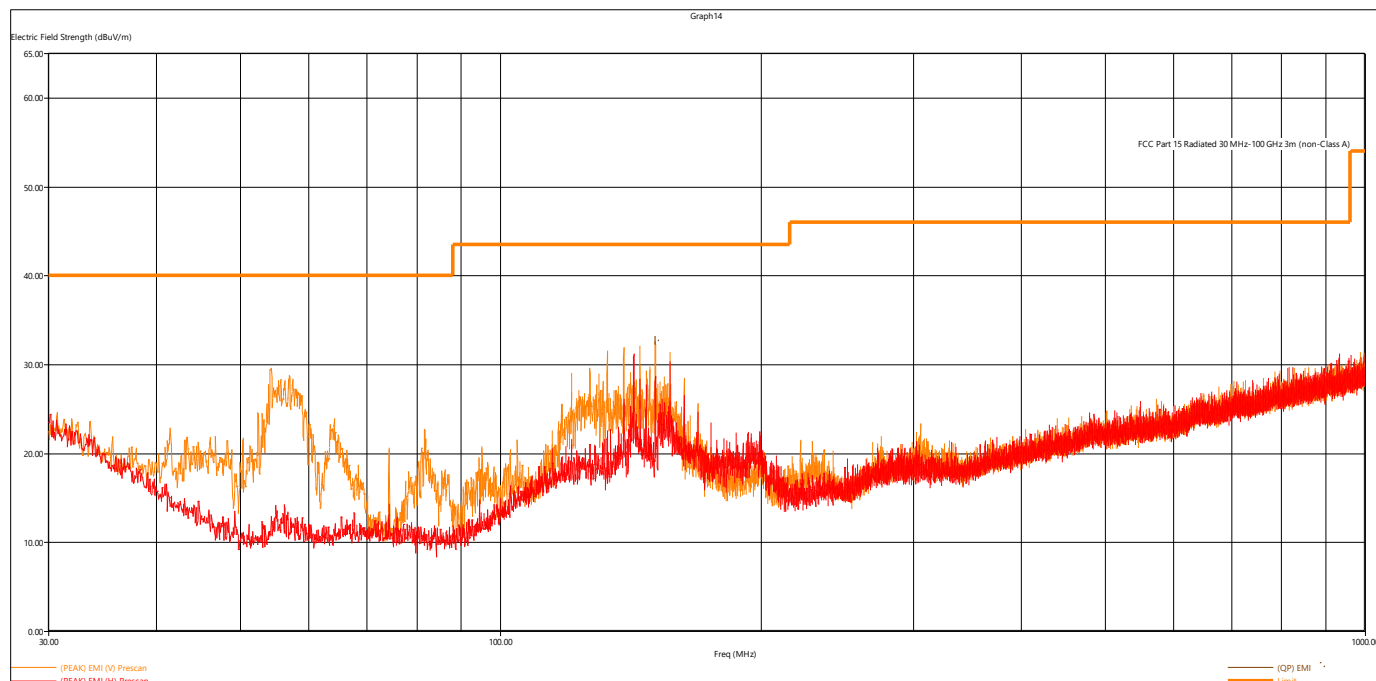


Figure 6 - Radiated Emissions Plot, 802.11g

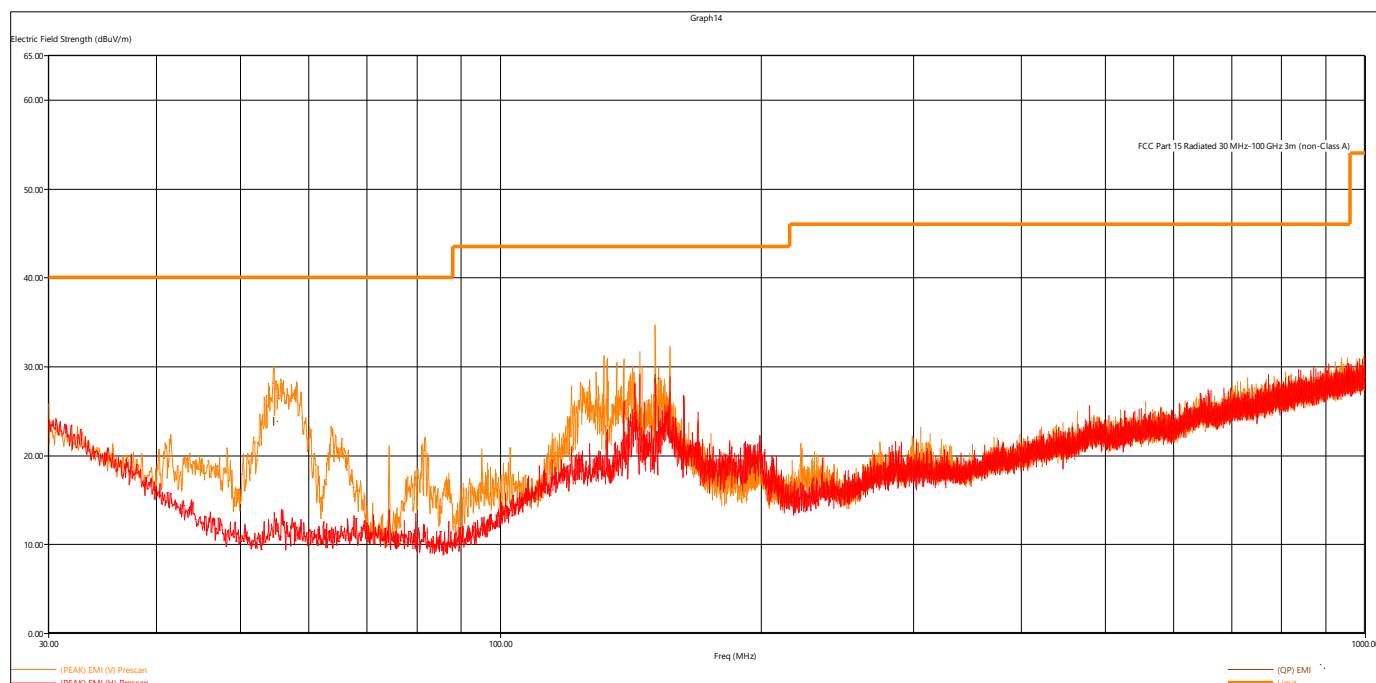


Figure 7 - Radiated Emissions Plot, 802.11n

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm.	deg.			
54.360480	29.72	40.00	10.28	134	245	V	Low	802.11b
150.732480	23.90	43.52	19.62	105	109	V	Low	802.11b
150.86472	32.67	43.52	10.85	115	93	V	Low	802.11g
54.574800	23.78	40.00	16.22	131	220	V	Low	802.11n
150.925200	28.64	43.52	14.88	105	96	V	Low	802.11n
55.399440	27.6	40.00	12.40	117	227	V	Receive	
130.276319	23.95	43.52	19.57	116	100	V	Receive	
142.748880	26.73	43.52	16.79	133	53	V	Receive	

All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.

Peak Measurements, 802.11x, Low Data Rate								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm.	deg.			
2412.8	100.24	N/A	N/A	110	74	H	Low	802.11b
2436.06	104.83	N/A	N/A	108	50	V	Mid	802.11b
2461.074	101.77	N/A	N/A	168	127	H	High	802.11b
2413.204	98.39	N/A	N/A	129	124	V	Low	802.11g
2438.61	105.29	N/A	N/A	187	358	V	Mid	802.11g
2459.49	98.73	N/A	N/A	149	60	V	High	802.11g
2412.736	99.39	N/A	N/A	150	359	V	Low	802.11n
2436.048	106.17	N/A	N/A	211	360	V	Mid	802.11n
2462.822	99.09	N/A	N/A	210	51	V	High	802.11n

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB below the limit.

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

Average Measurements, 802.11x, Low Data Rate								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
2412.8	97.55	N/A	N/A	110	74	H	Low	802.11b
2436.06	101.98	N/A	N/A	108	50	V	Mid	802.11b
2461.074	98.82	N/A	N/A	168	127	H	High	802.11b
2413.204	89.56	N/A	N/A	129	124	V	Low	802.11g
2438.61	96.25	N/A	N/A	187	358	V	Mid	802.11g
2459.49	89.65	N/A	N/A	149	60	V	High	802.11g
2412.736	89.87	N/A	N/A	150	359	V	Low	802.11n
2436.048	95.89	N/A	N/A	211	360	V	Mid	802.11n
2462.822	89.53	N/A	N/A	210	51	V	High	802.11n

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB Below the limit.

Peak Measurements, 802.11x, High Data Rate								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
2412.212	104.18	N/A	N/A	111	73	H	Low	802.11b
2437.446	108.99	N/A	N/A	186	6	V	Mid	802.11b
2462.644	105.9	N/A	N/A	203	130	H	High	802.11b
2409.638	100.48	N/A	N/A	259	360	V	Low	802.11g
2437.532	105.34	N/A	N/A	148	57	V	Mid	802.11g
2459.714	101.06	N/A	N/A	140	3	V	High	802.11g
2413.508	101.24	N/A	N/A	155	3	V	Low	802.11n
2435.584	102.38	N/A	N/A	209	50	V	Mid	802.11n
2463.224	100.72	N/A	N/A	199	57	V	High	802.11n

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

Average Measurements, 802.11x, High Data Rate								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm.	deg.			
2412.212	96.56	N/A	N/A	111	73	H	Low	802.11b
2437.446	101.43	N/A	N/A	186	6	V	Mid	802.11b
2462.644	98.42	N/A	N/A	203	130	H	High	802.11b
2409.638	89.8	N/A	N/A	259	360	V	Low	802.11g
2437.532	94.22	N/A	N/A	148	57	V	Mid	802.11g
2459.714	90.3	N/A	N/A	140	3	V	High	802.11g
2413.508	90.76	N/A	N/A	155	3	V	Low	802.11n
2435.584	92.2	N/A	N/A	209	50	V	Mid	802.11n
2463.224	90.77	N/A	N/A	199	57	V	High	802.11n

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB below the limit.



#### 4.5 CONDUCTED SPURIOUS EMISSIONS

**Test Method:** ANSI C63.10-2013, Section 6.2

**Limits of spurious emissions:**

From FCC Part 15.247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Test procedures:**

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report.

**Deviations from test standard:**

Test was ran using 120kHz RBW.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

Data rates and channels were investigated and worst case was reported, no emissions exceeded the limits.

There was no distinguishable difference between low and high data rate.

Note that the limit shown on the plots does not apply. The spurious emissions were compared to the peak emission at the fundamental frequency within a 120 kHz band.

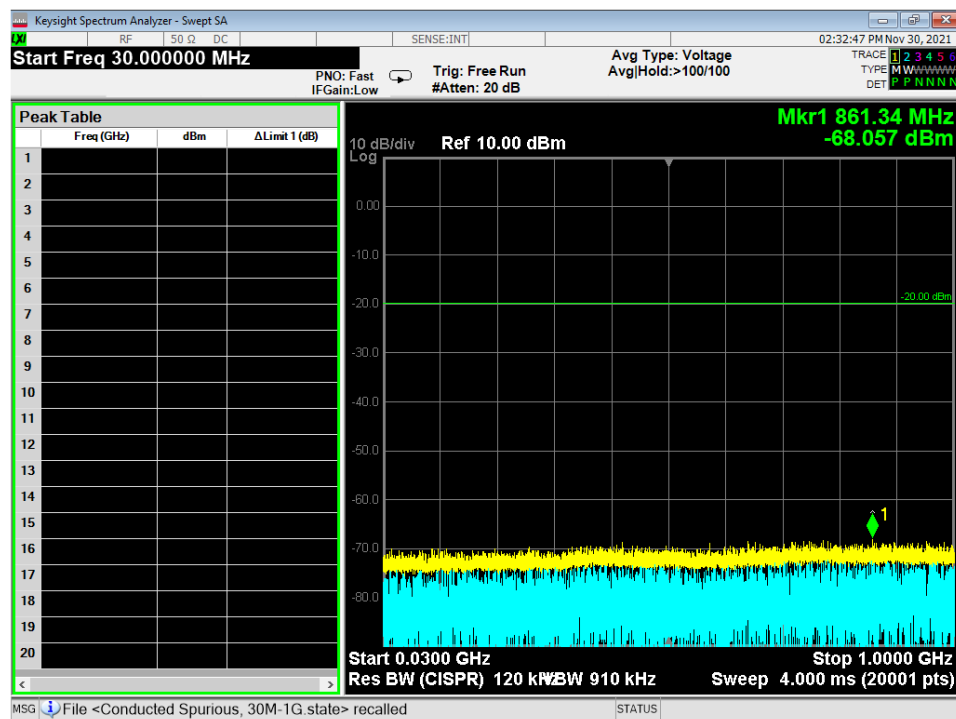


Figure 8 – Conducted Spurious Emissions Plot, WIFI 802.11b, 30M – 1G, Low

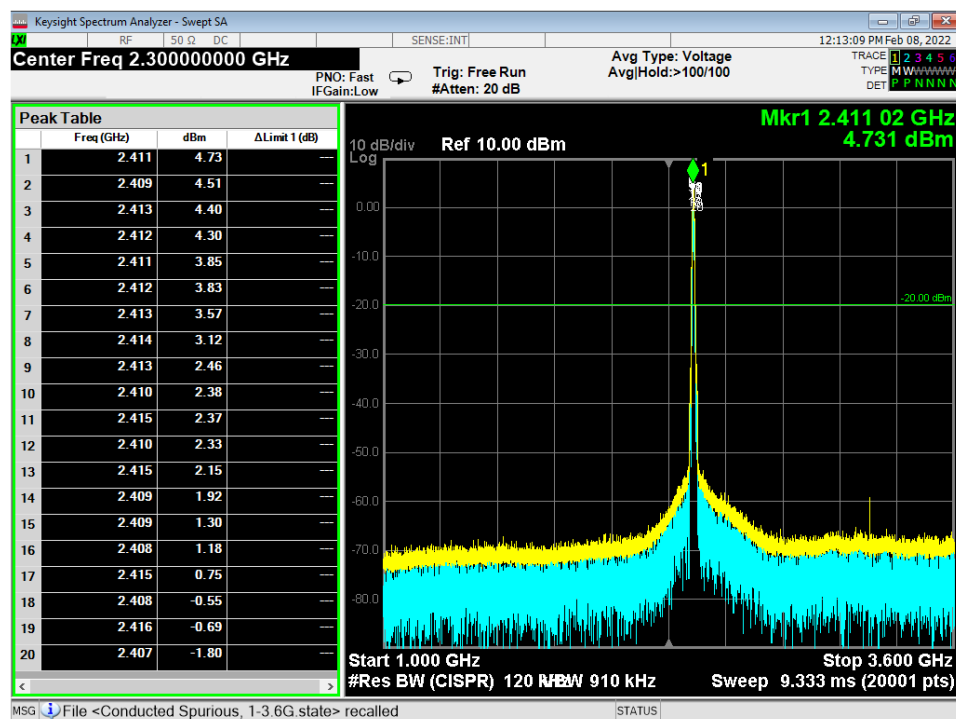


Figure 9 - Conducted Spurious Emissions Plot, WIFI 802.11b, 1G – 3.6G, Low

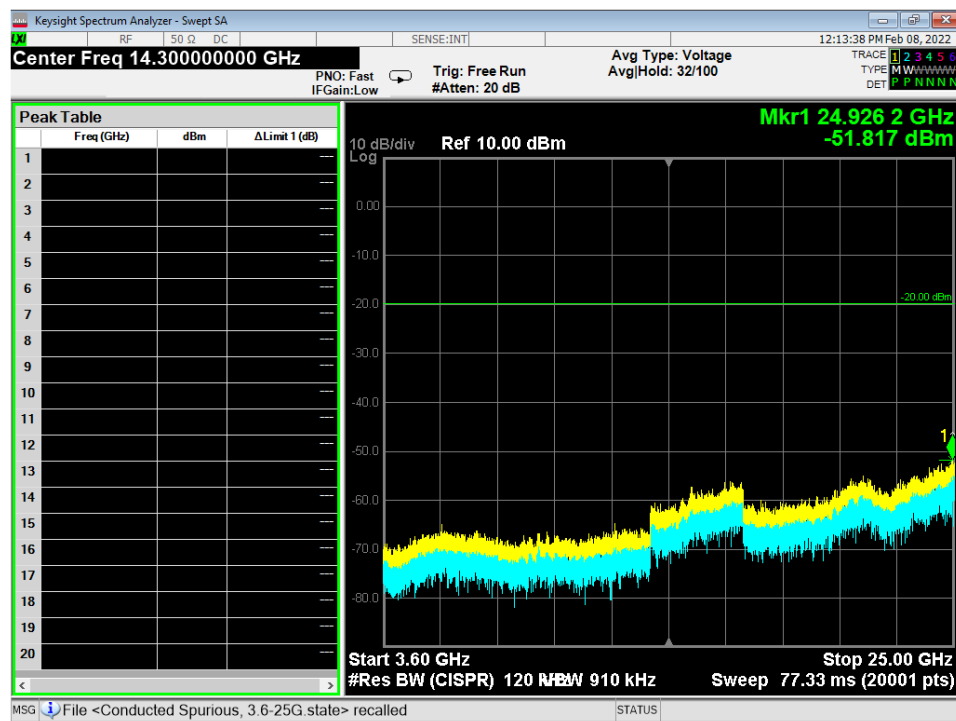


Figure 10 - Conducted Spurious Emissions Plot, WIFI 802.11b, 3.6G – 25G, Low



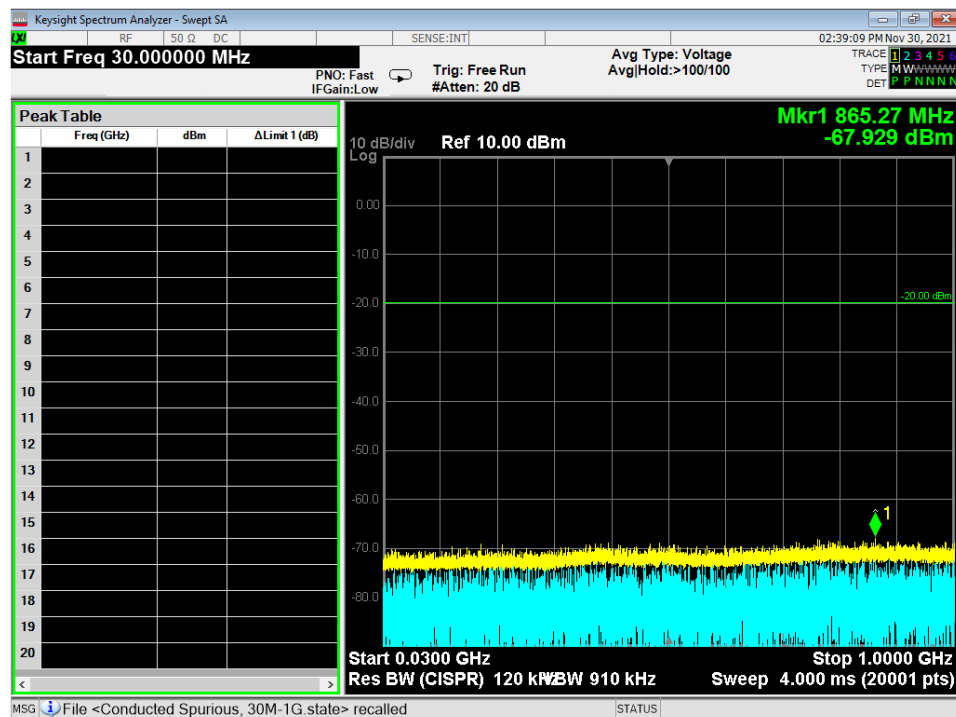


Figure 11 - Conducted Spurious Emissions Plot, WIFI 802.11g, 30M – 1G, Low

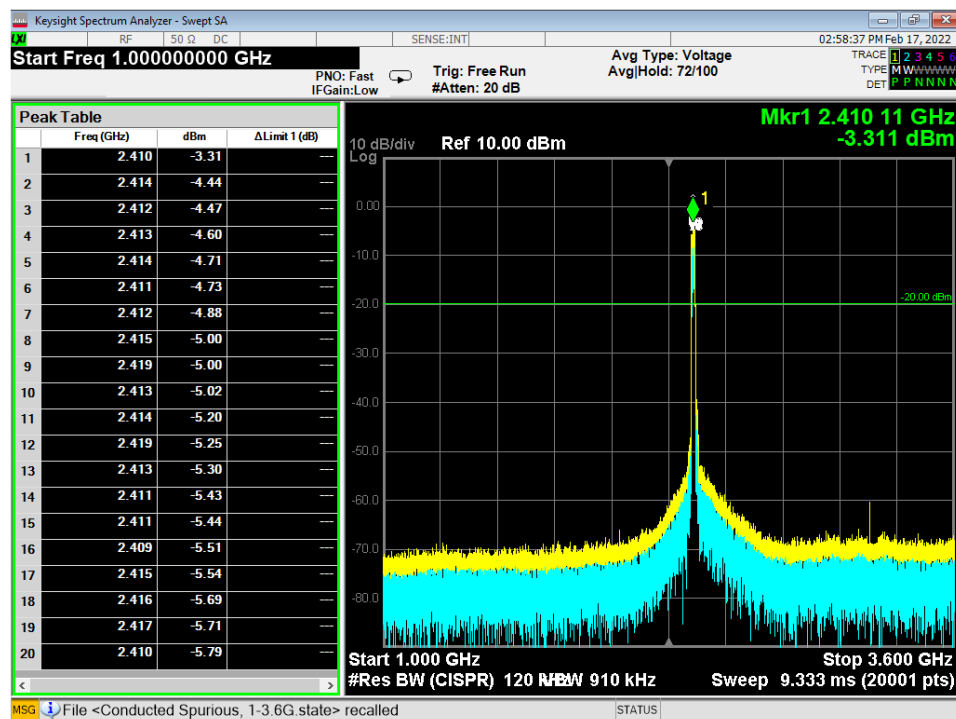

**Figure 12 - Conducted Spurious Emissions Plot, WIFI 802.11g, 1G – 3.6G, Low**

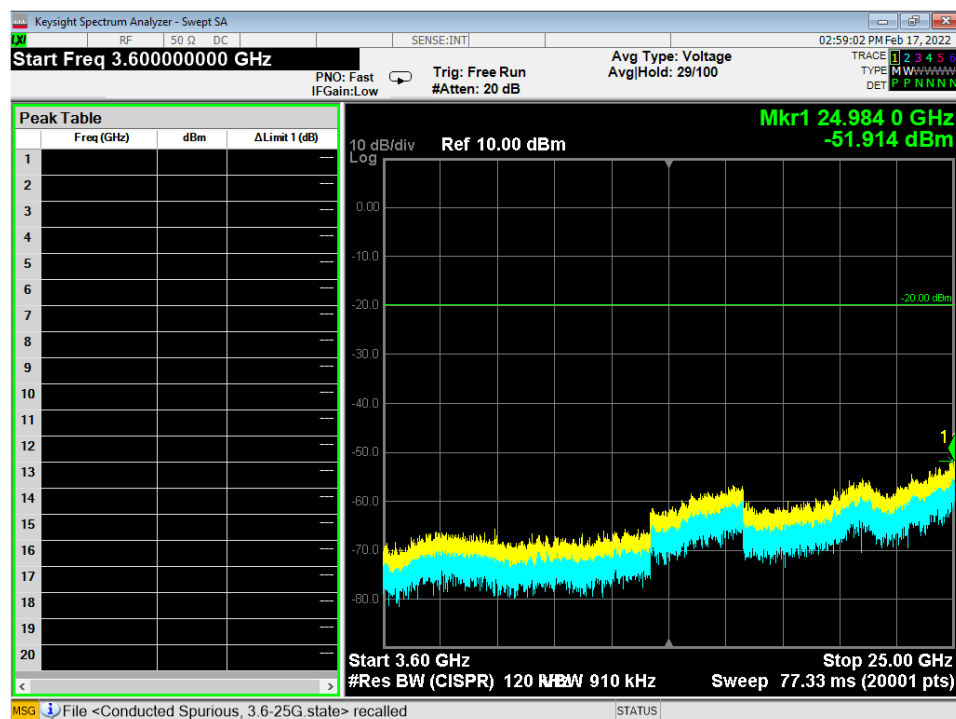

**Figure 13 - Conducted Spurious Emissions Plot, WIFI 802.11g, 3.6G – 25G, Low**

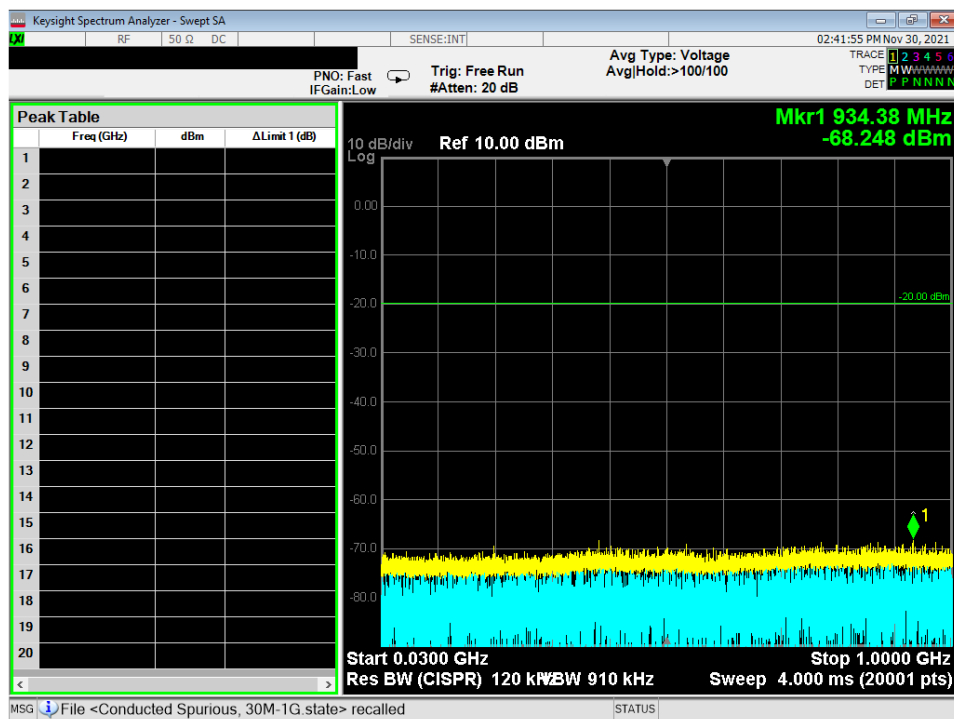


Figure 14 - Conducted Spurious Emissions Plot, WIFI 802.11n, 30M – 1G, Low

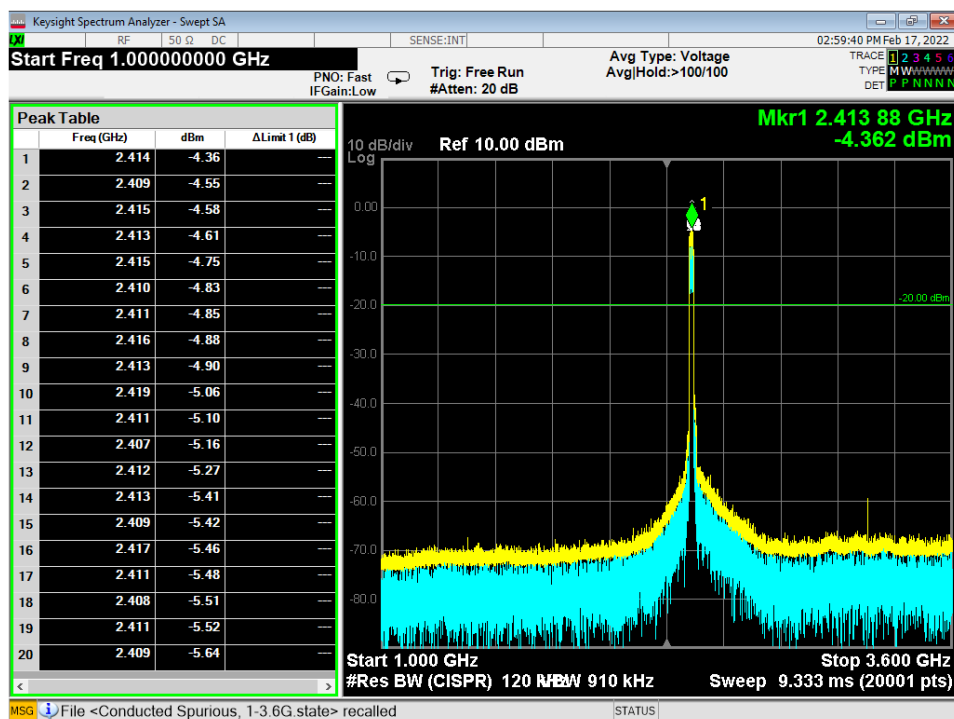


Figure 15 - Conducted Spurious Emissions Plot, WIFI 802.11n, 1G – 3.6G, Low

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

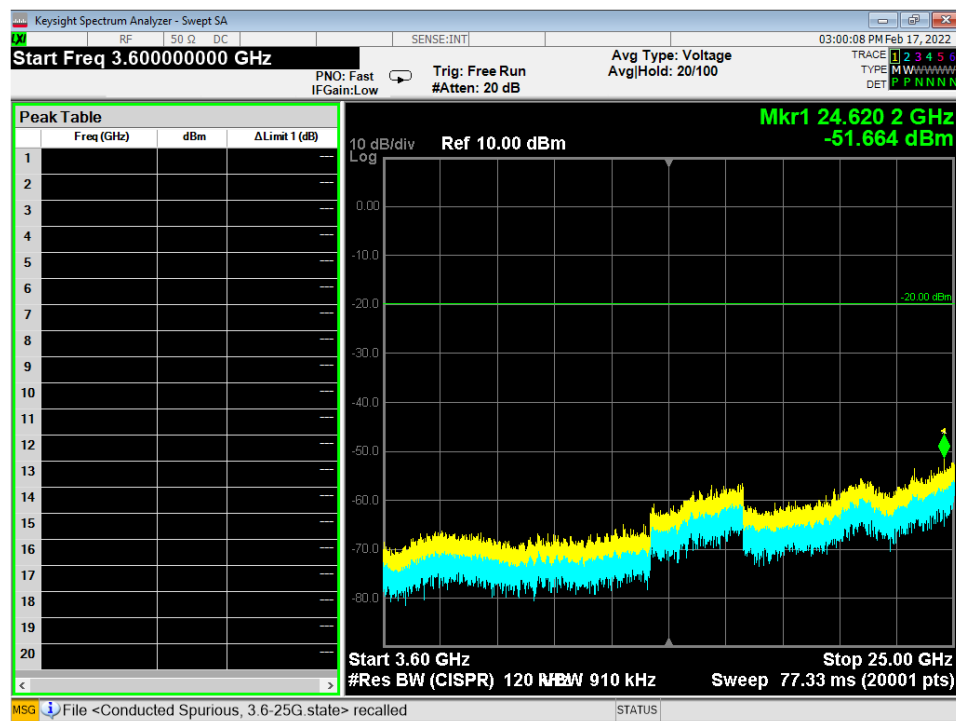



Figure 16 - Conducted Spurious Emissions Plot, WIFI 802.11n, 3.6G – 25G, Low

	Report Number:	R20211006-20-E4A	Rev	B
	Prepared for:	Garmin International, Inc.		

#### 4.5 BAND EDGES

**Test Method:** All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

**Limits of band-edge measurements:**

**For FCC Part 15.247 Device:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

**Test procedures:**

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.



Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

**Test results:**

**Pass**

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.





Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

## 4.6 POWER SPECTRAL DENSITY

**Test Method:** All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

**Limits of power measurements:**

**For FCC Part 15.247 Device:**

The maximum PSD allowed is 8 dBm.

**Test procedures:**

Details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

**Pass**

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are reported on the graph.
4. The measurements are listed in the tables in section 4.0.

## 4.7 CONDUCTED AC MAINS EMISSIONS

**Test Method:** ANSI C63.10-2013, Section(s) 6.2

**Limits for conducted emissions measurements:**

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**Notes:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

**Test Procedures:**

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

**Deviation from the test standard:**

No deviation

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

### Test Results:

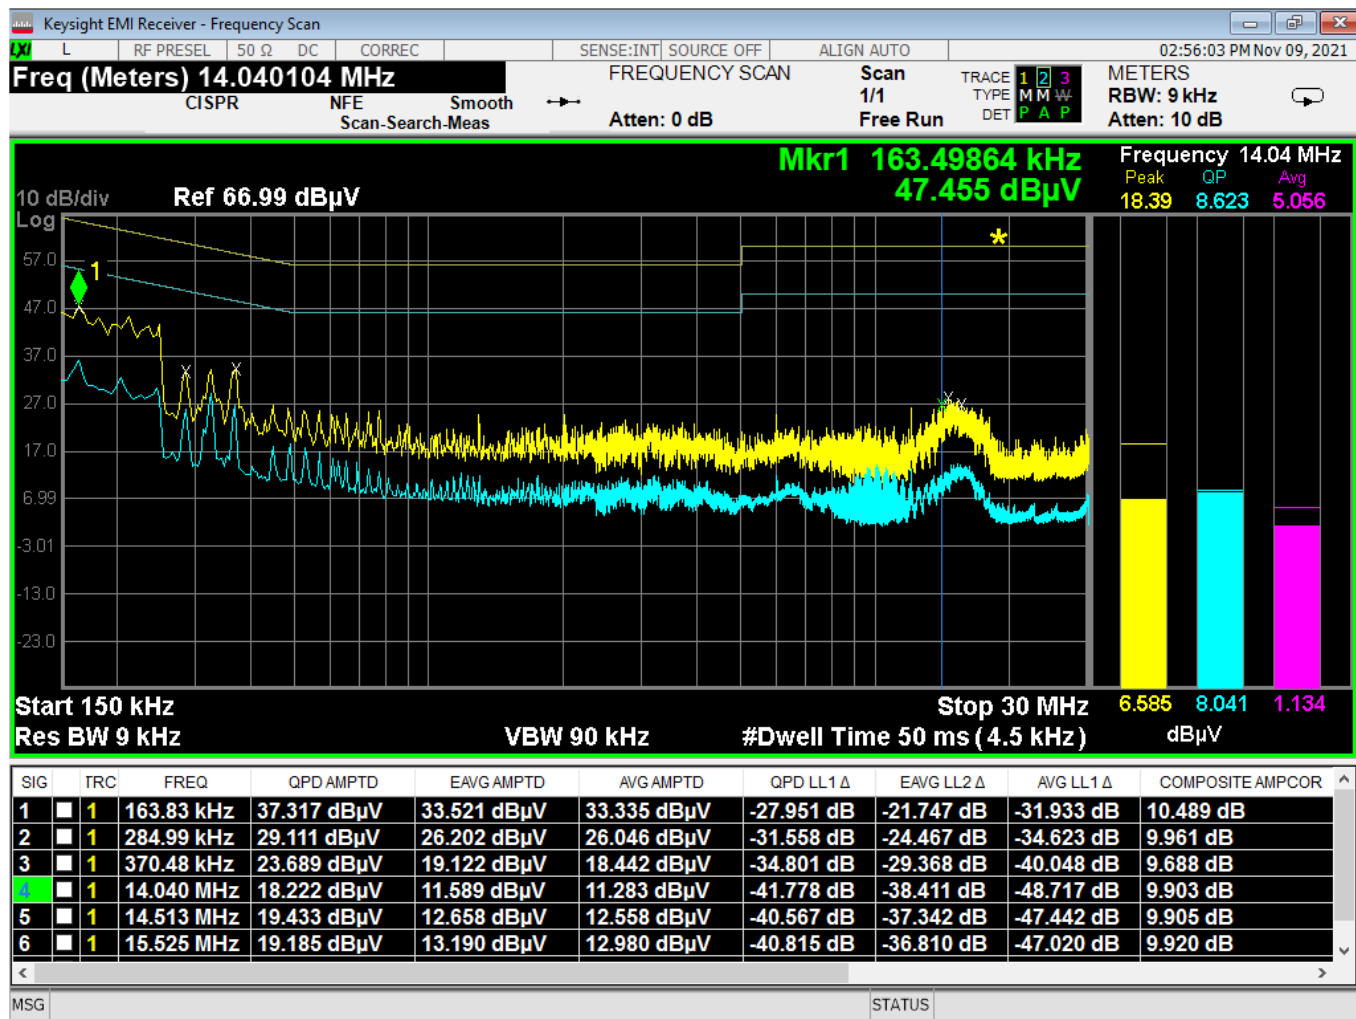


Figure 17 - Conducted Emissions Plot, Line, TX

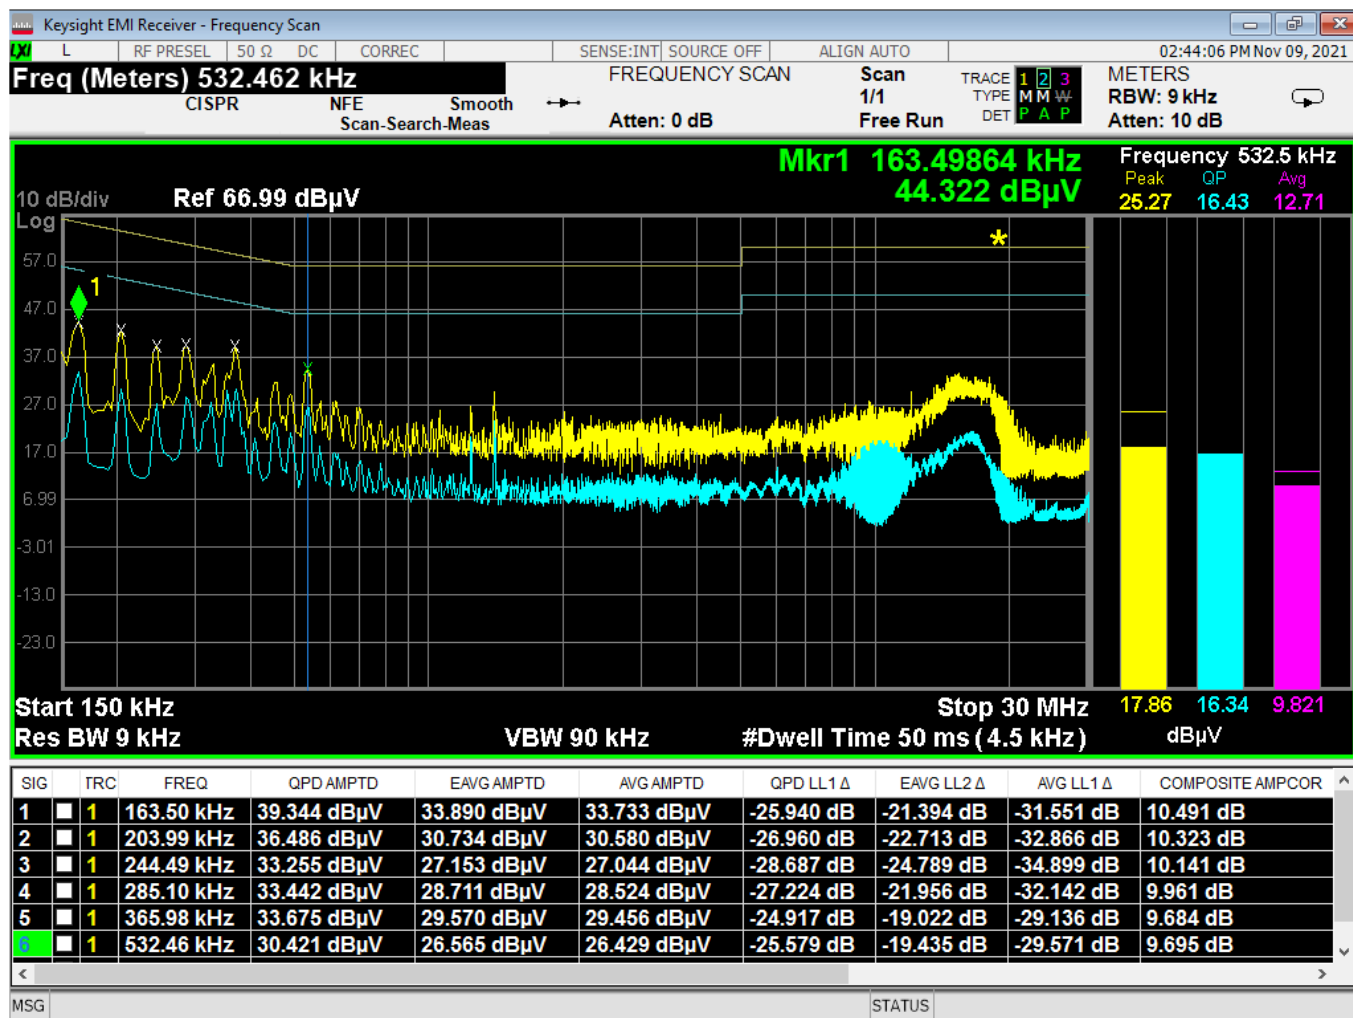



Figure 18 - Conducted Emissions Plot, Neutral, TX

	Report Number:	R20211006-20-E4A	Rev	B
	Prepared for:	Garmin International, Inc.		

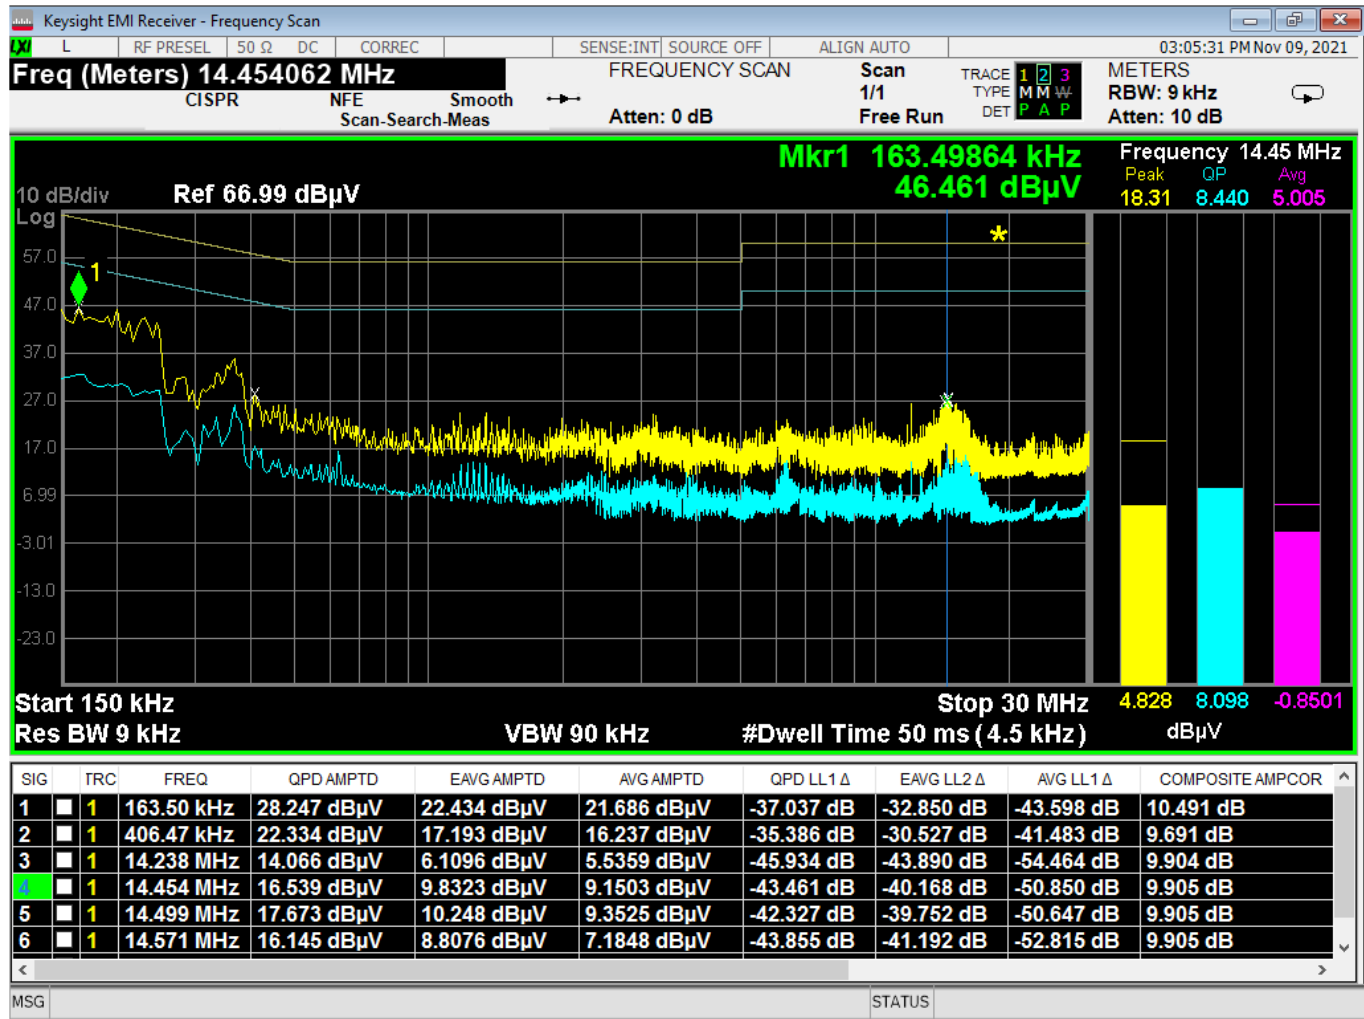


Figure 19 - Conducted Emissions Plot, Line, IDLE

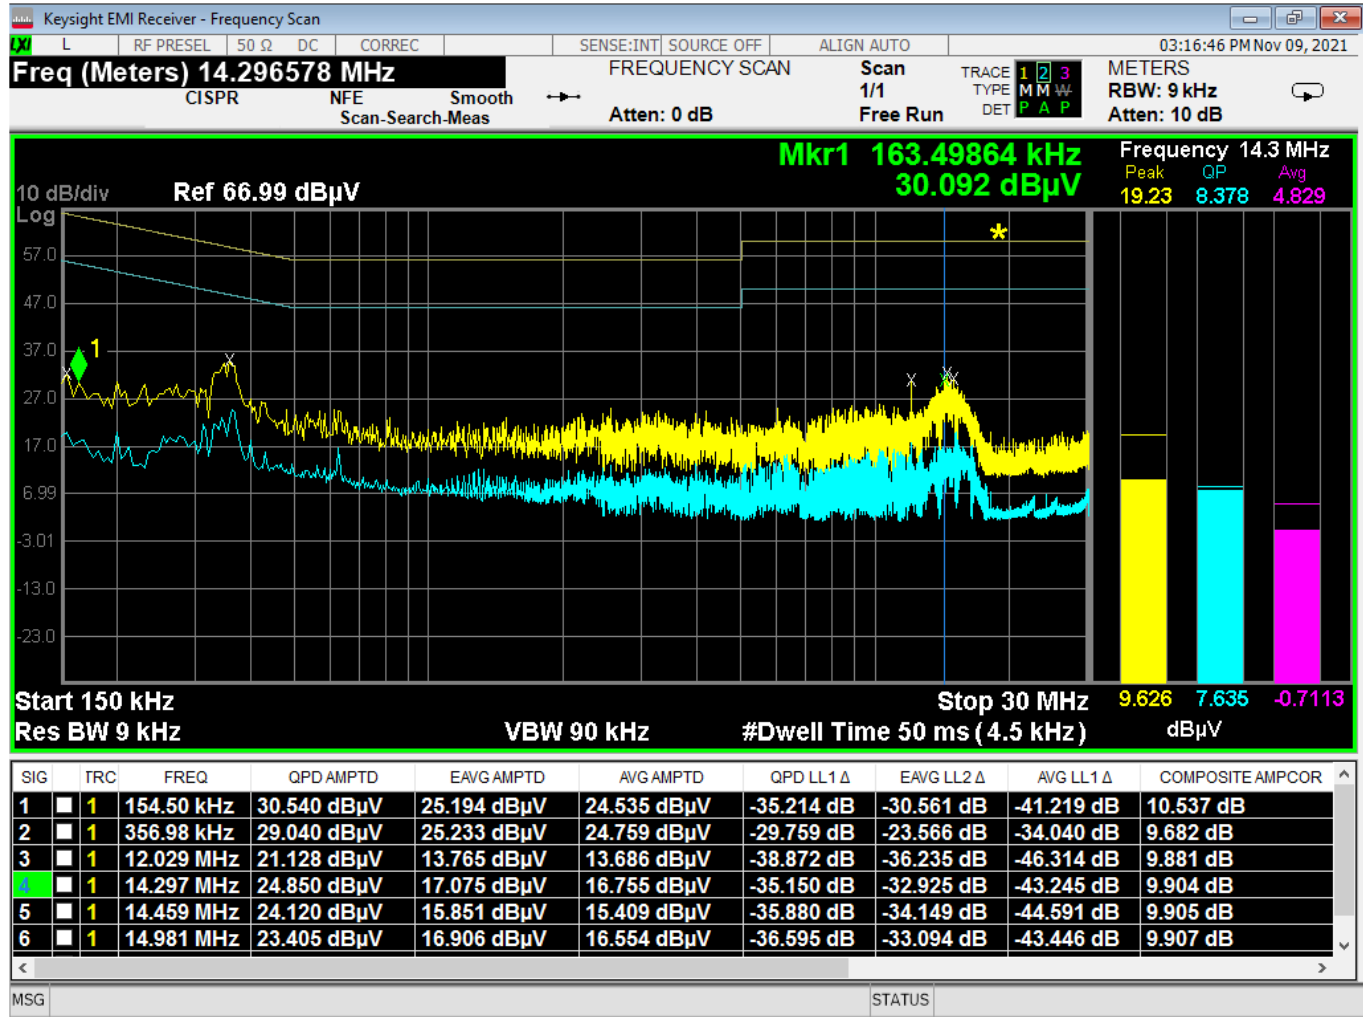


Figure 20 - Conducted Emissions Plot, Neutral, IDLE



Report Number: R20211006-20-E4A

Rev

B

Prepared for: Garmin International, Inc.

## APPENDIX A: SAMPLE CALCULATION

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB $\mu$ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB $\mu$ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the  $20 \cdot \log(T_{on}/100)$  where  $T_{on}$  is the maximum transmission time in any 100ms window.



Report Number: R20211006-20-E4A

Rev

B

Prepared for: Garmin International, Inc.

## EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [Field \text{ Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$Power \text{ (watts)} = 10^{[Power \text{ (dBm)}/10]} / 1000$$

$$Voltage \text{ (dB}\mu\text{V)} = Power \text{ (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field \text{ Strength (V/m)} = 10^{[Field \text{ Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

$10\log(10^9)$  is the conversion from micro to milli





Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		


## APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.

## APPENDIX C – GRAPHS AND TABLES

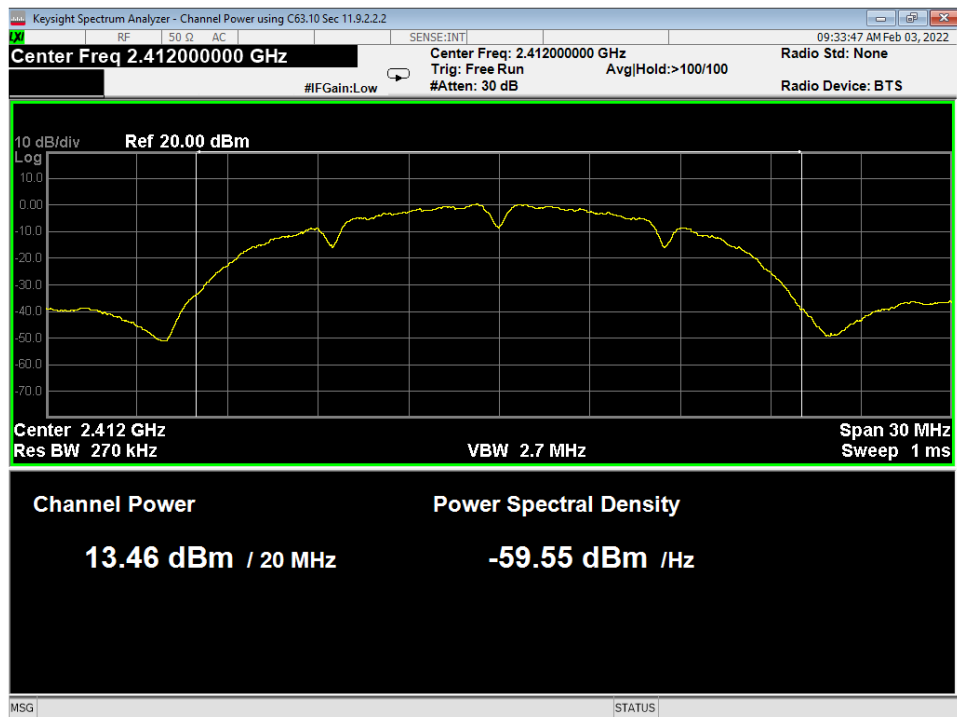


01 Average Power, Low, Wifi B Low Data Rate

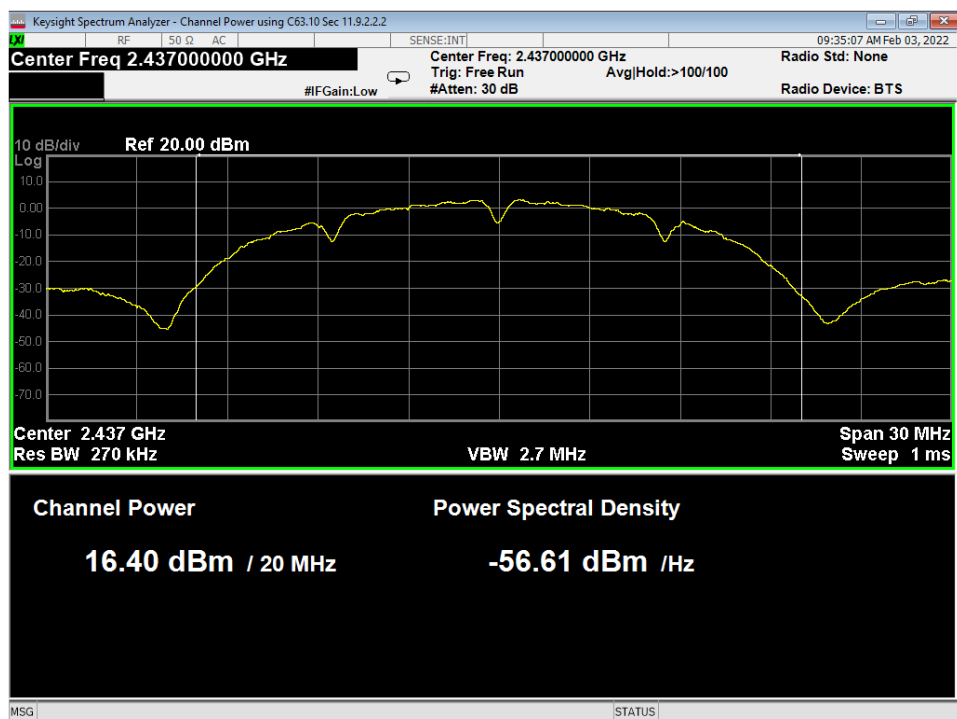


02 Average Power, Mid, Wifi B Low Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

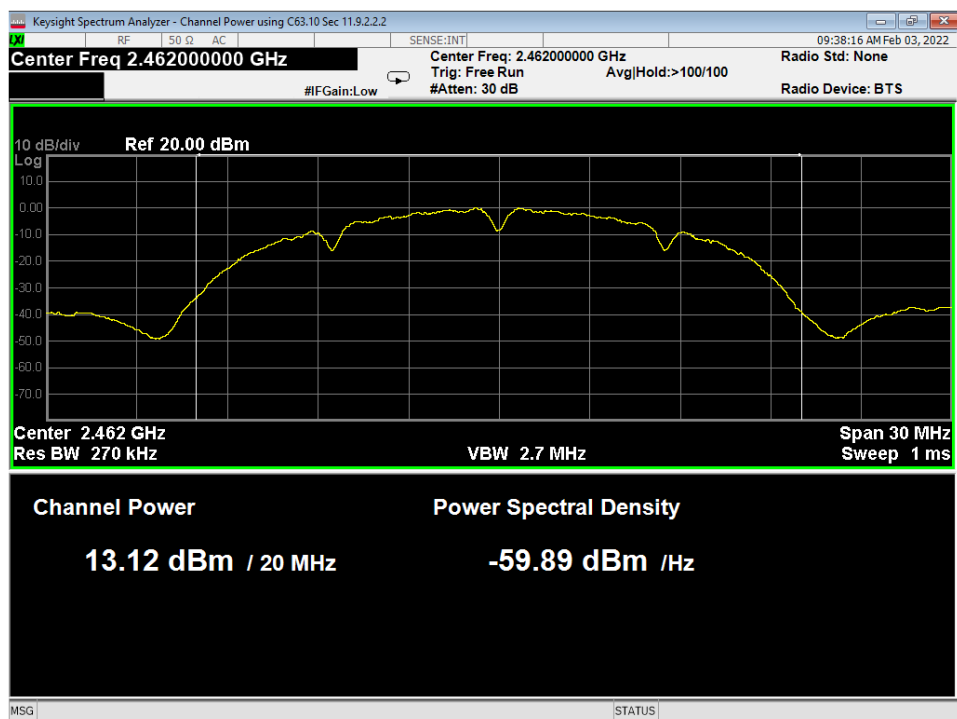


03 Average Power, High, Wifi B Low Data Rate

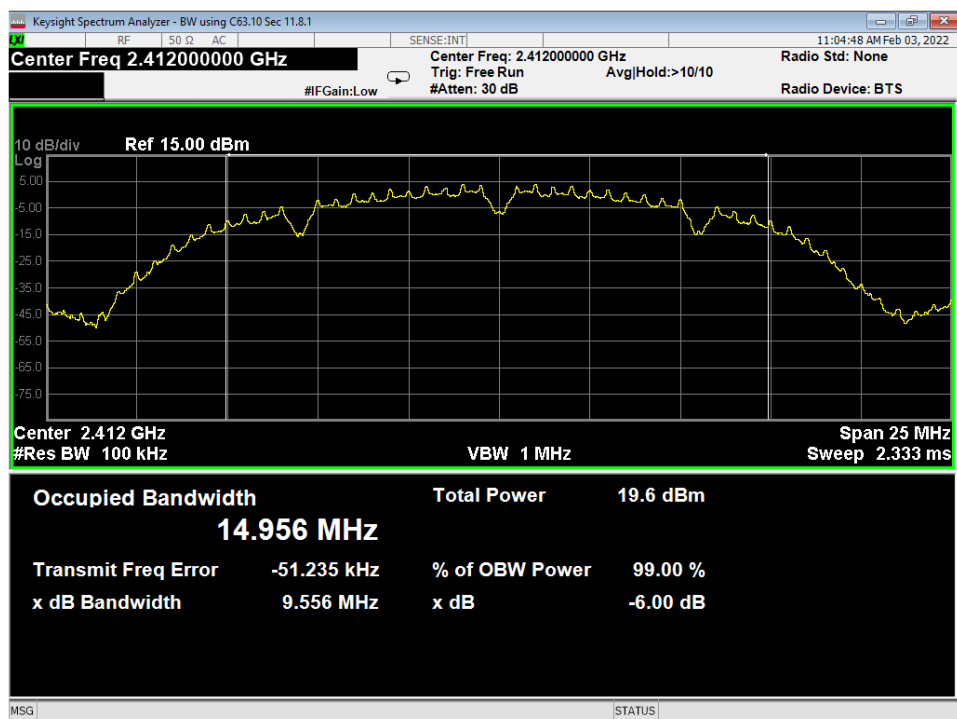


04 OBW-6dB, Low, Wifi B Low Data Rate


Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

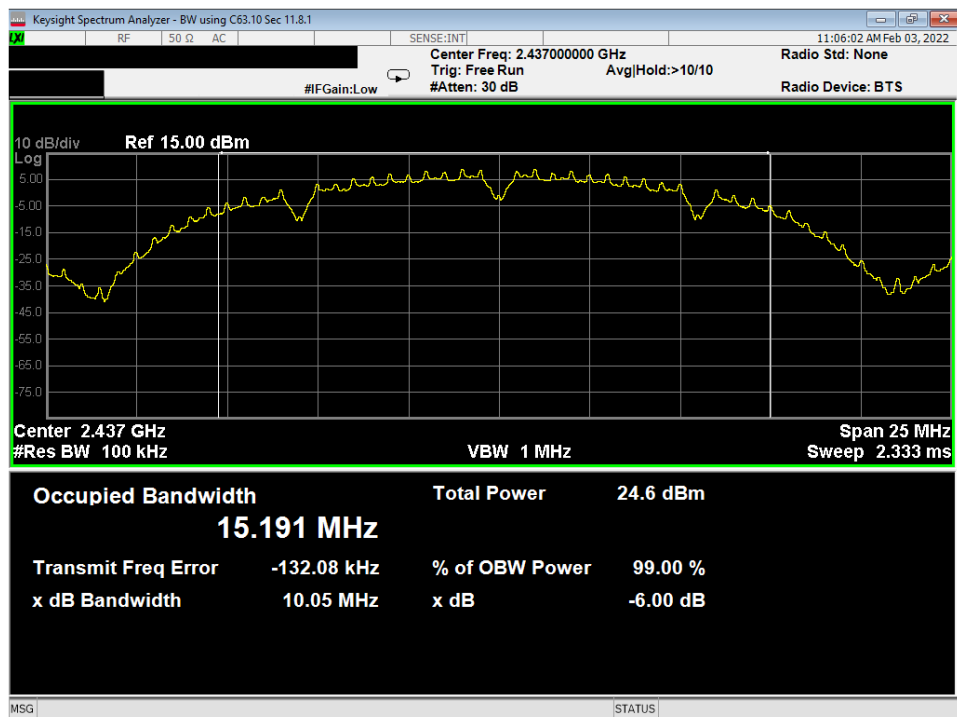


05 OBW-6dB, Mid, Wifi B Low Data Rate

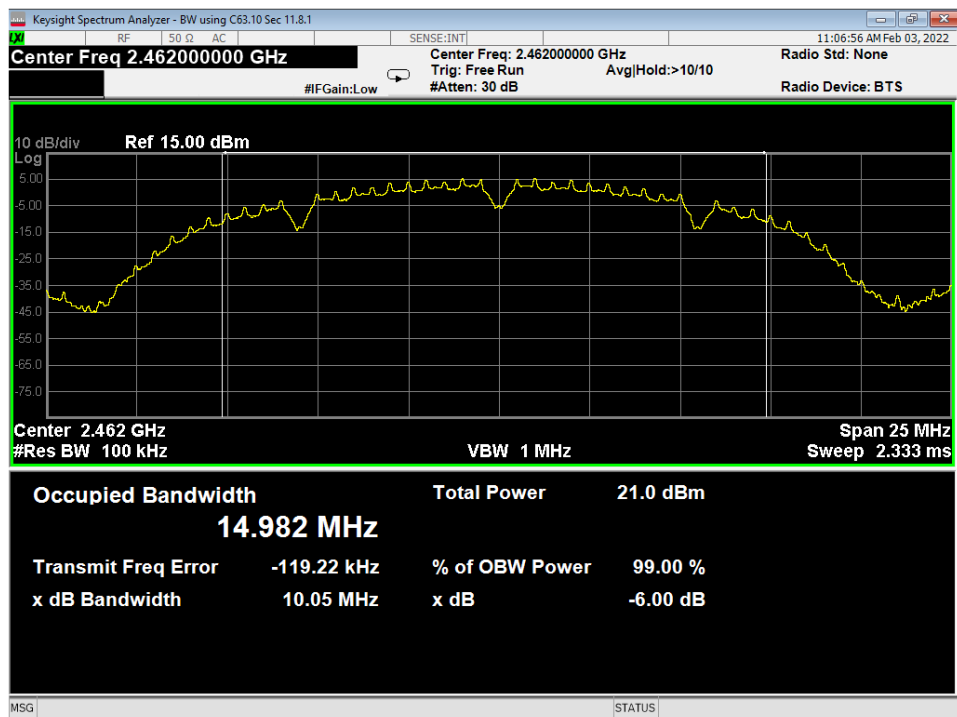


06 OBW-6dB, High, Wifi B Low Data Rate

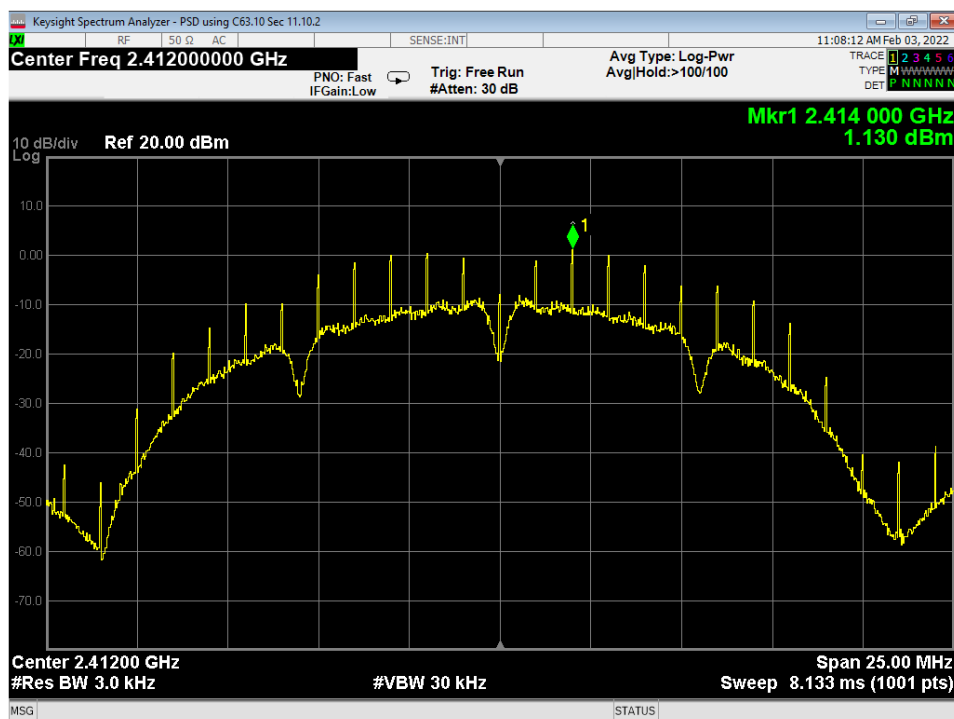

07 PSD, Low, Wifi B Low Data Rate

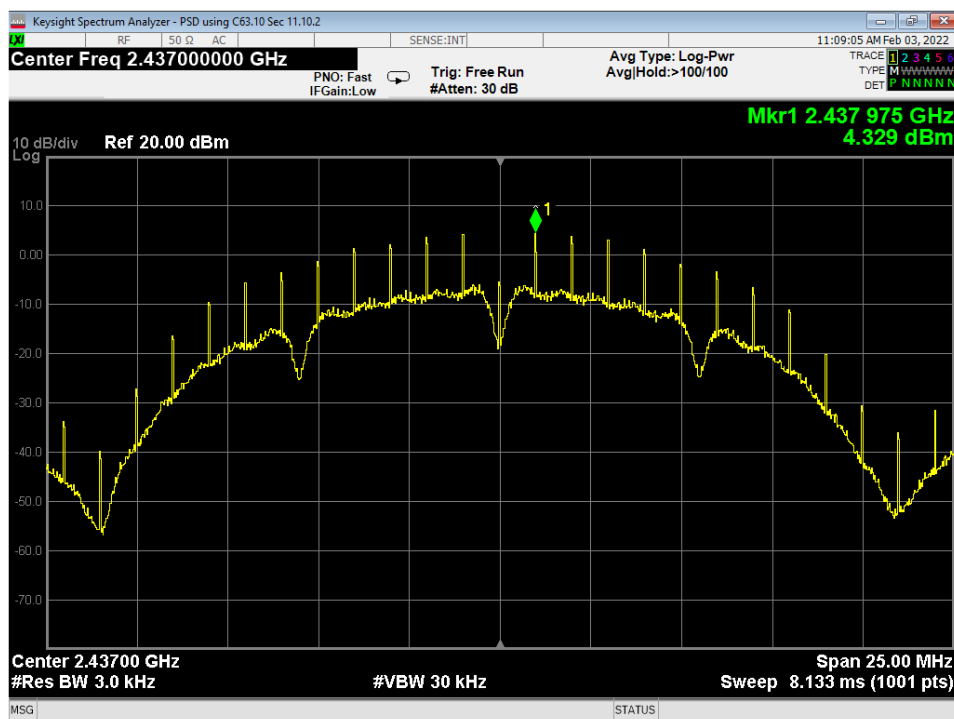


08 PSD, Mid, Wifi B Low Data Rate

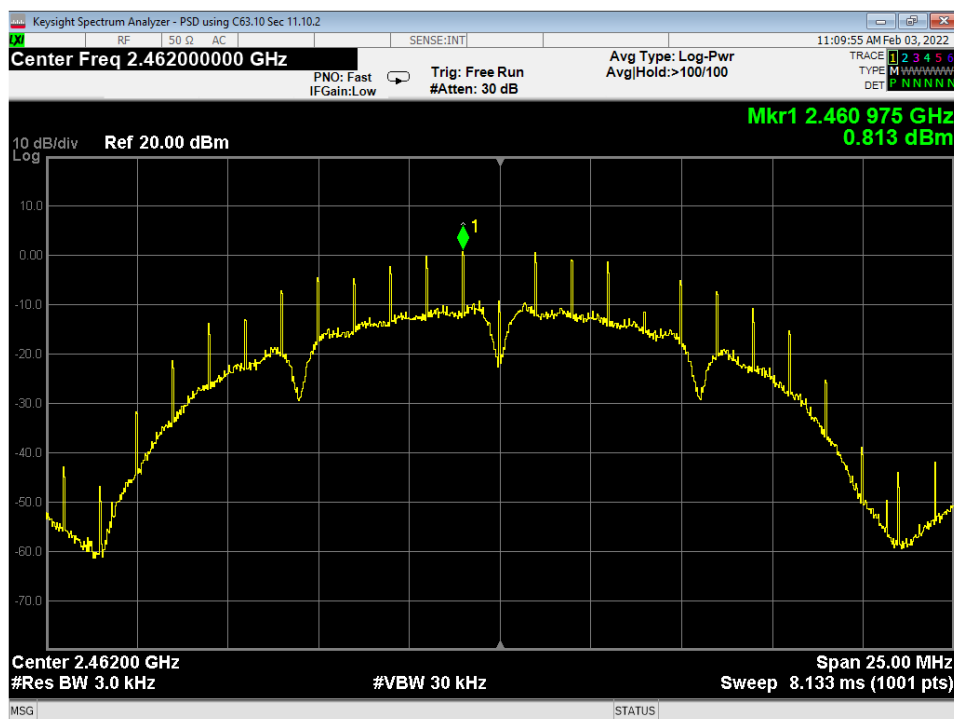


09 PSD, High, Wifi B Low Data Rate




10 Lower Bandedge, Unrestricted, Wifi B Low Data Rate

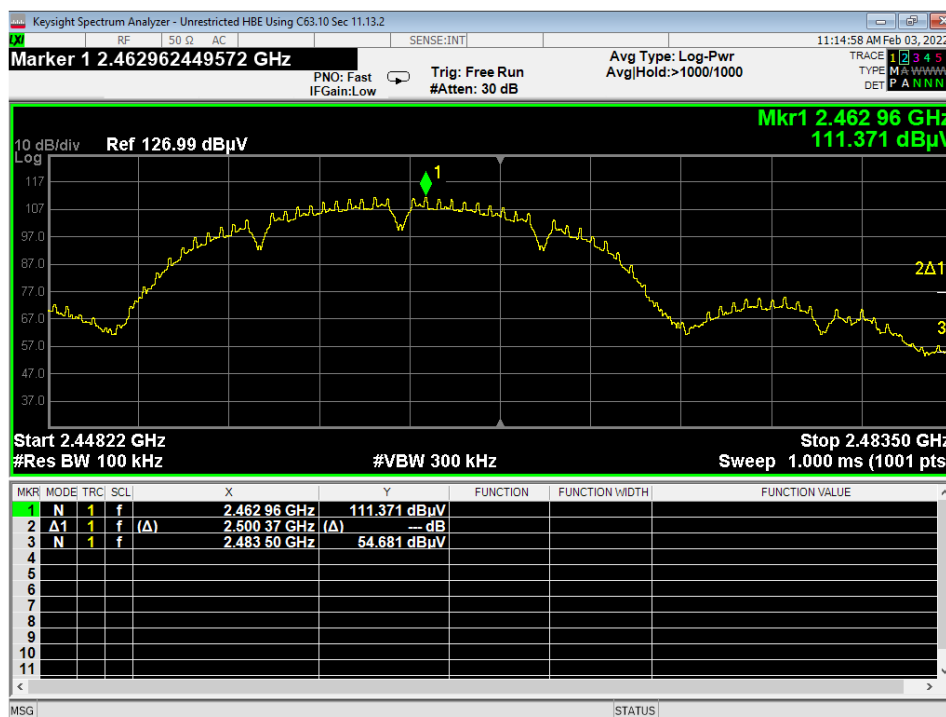


11 Higher Bandedge, Unrestricted, Wifi B Low Data Rate

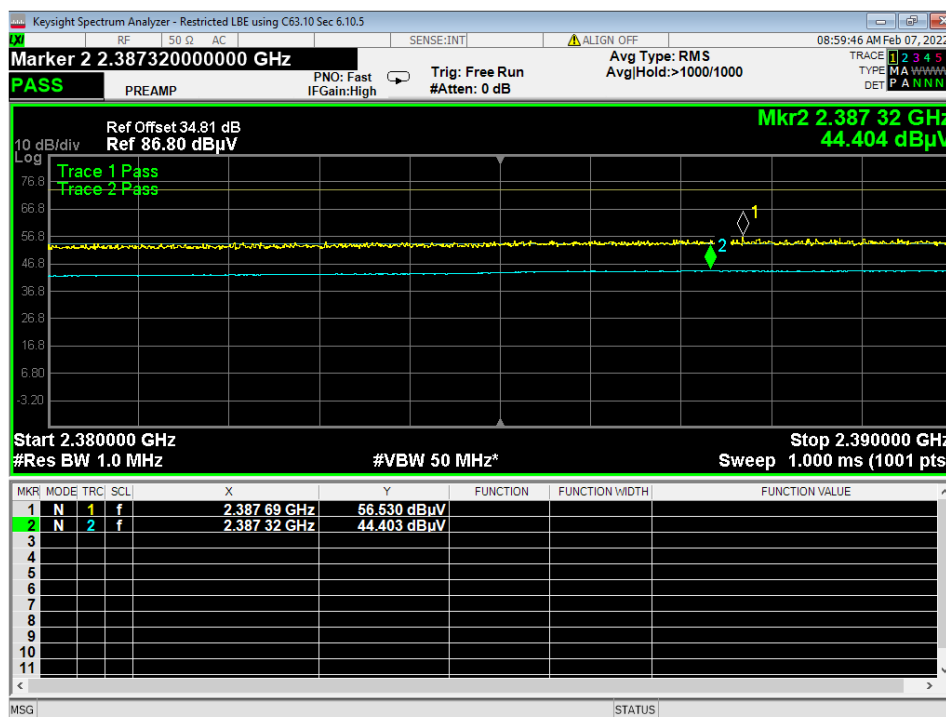

12 Lower Bandedge, Restricted, Wifi B Low Data Rate

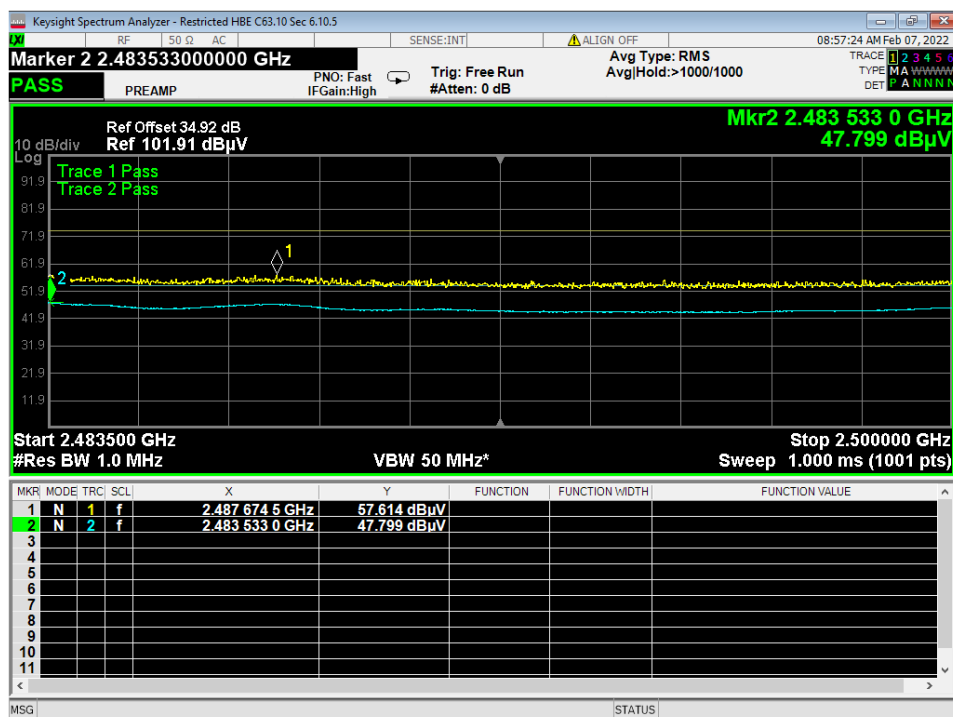


13 Higher Bandedge, Restricted, Wifi B Low Data Rate

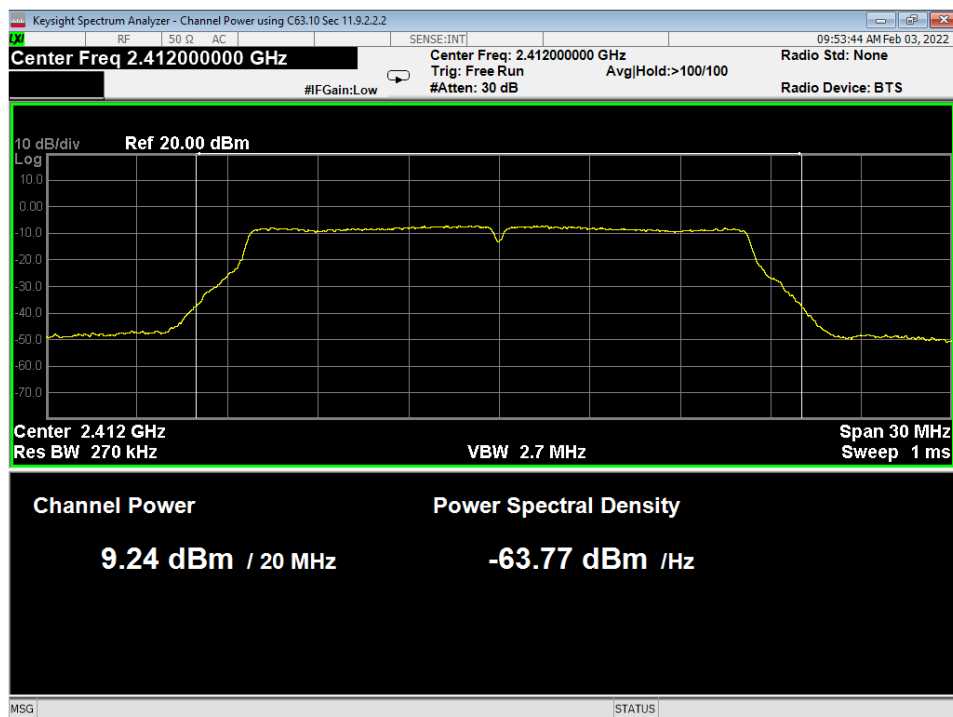


14 Average Power, Low, Wifi G Low Data Rate




Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

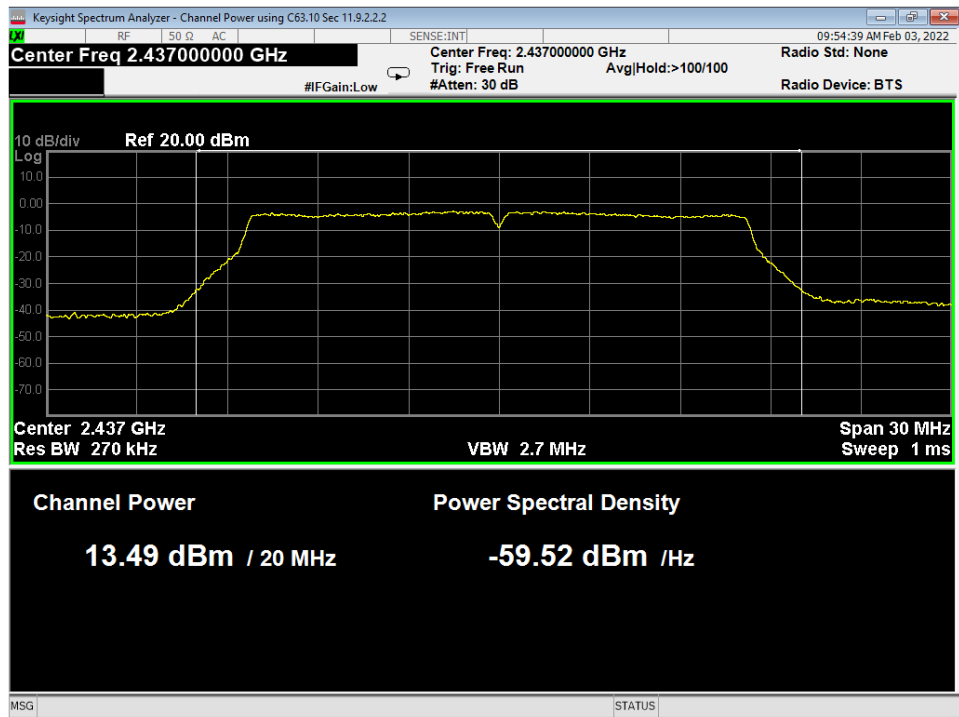


15 Average Power, Mid, Wifi G Low Data Rate

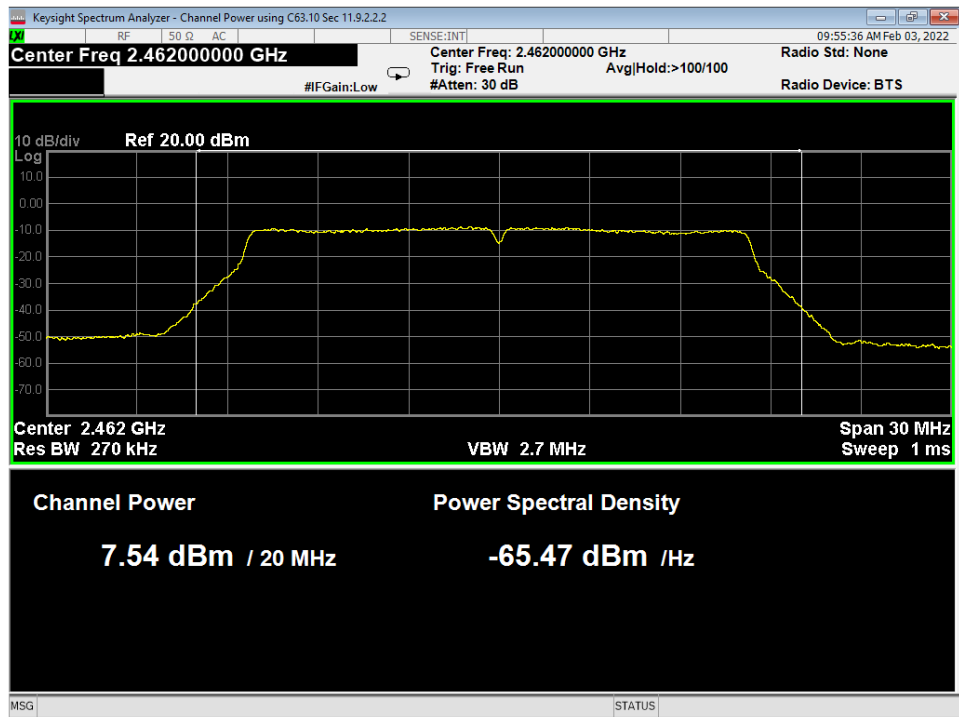

16 Average Power, High, Wifi G Low Data Rate

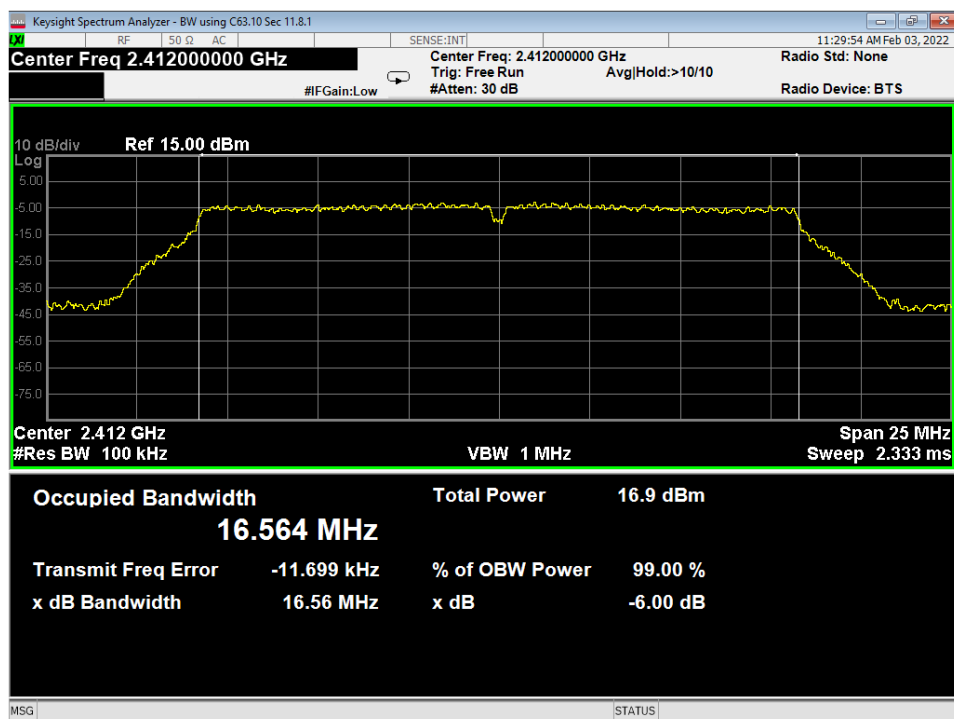


17 OBW-6dB, Low, Wifi G Low Data Rate

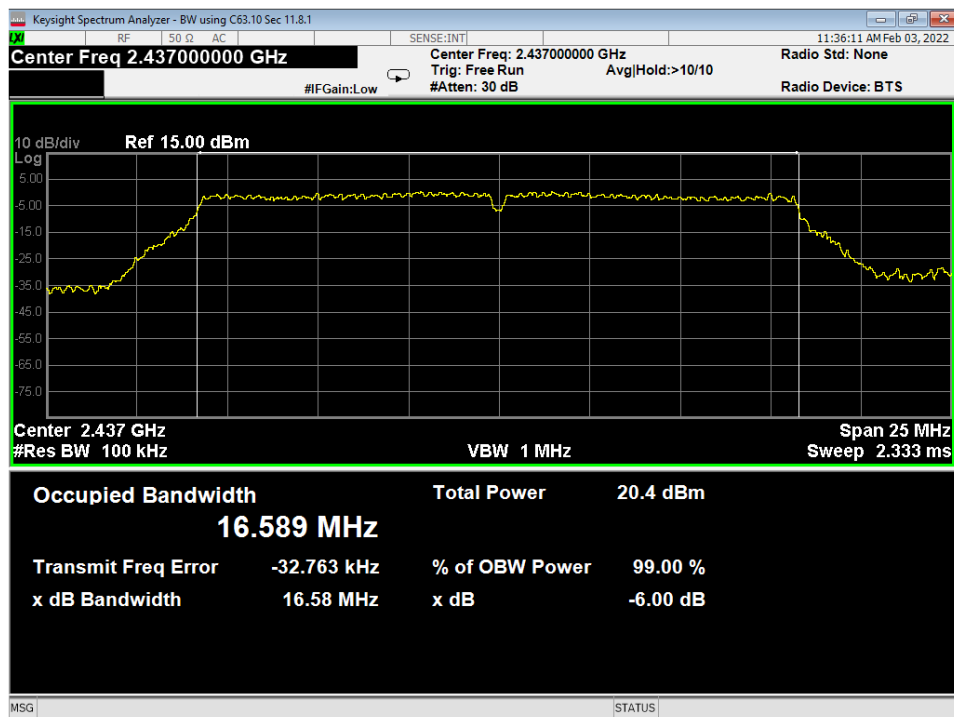


18 OBW-6dB, Mid, Wifi G Low Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

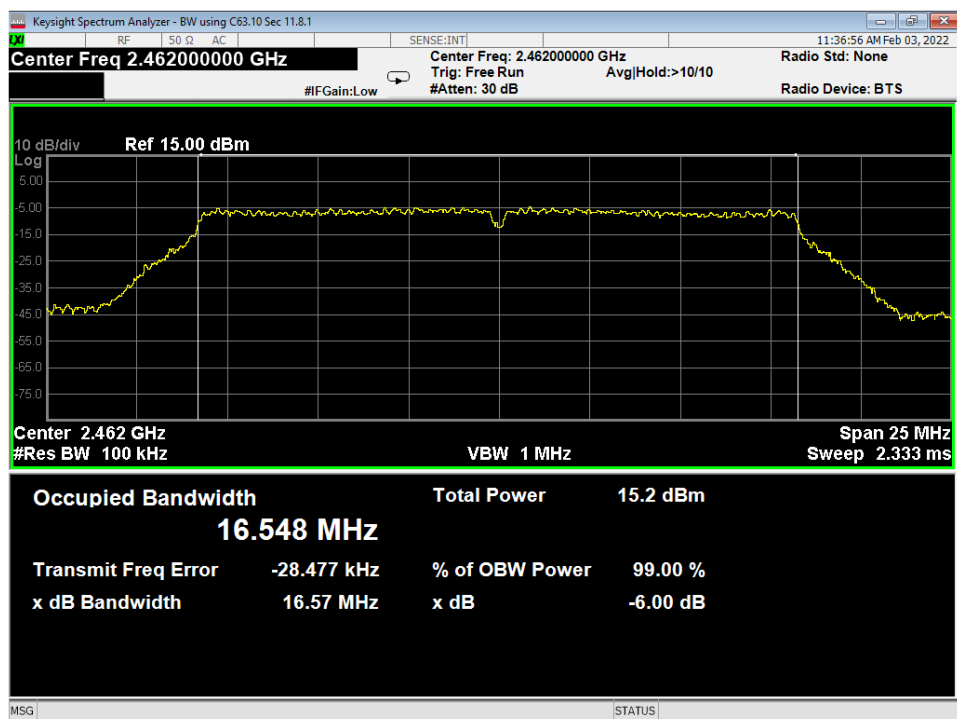


19 OBW-6dB, High, Wifi G Low Data Rate

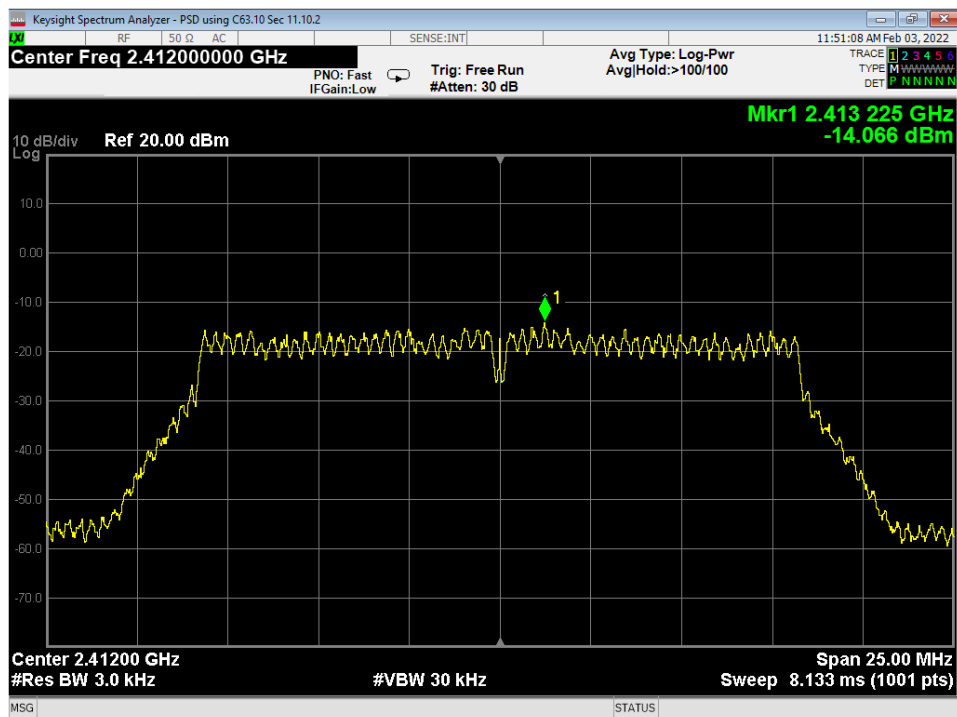


20 PSD, Low, Wifi G Low Data Rate


Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

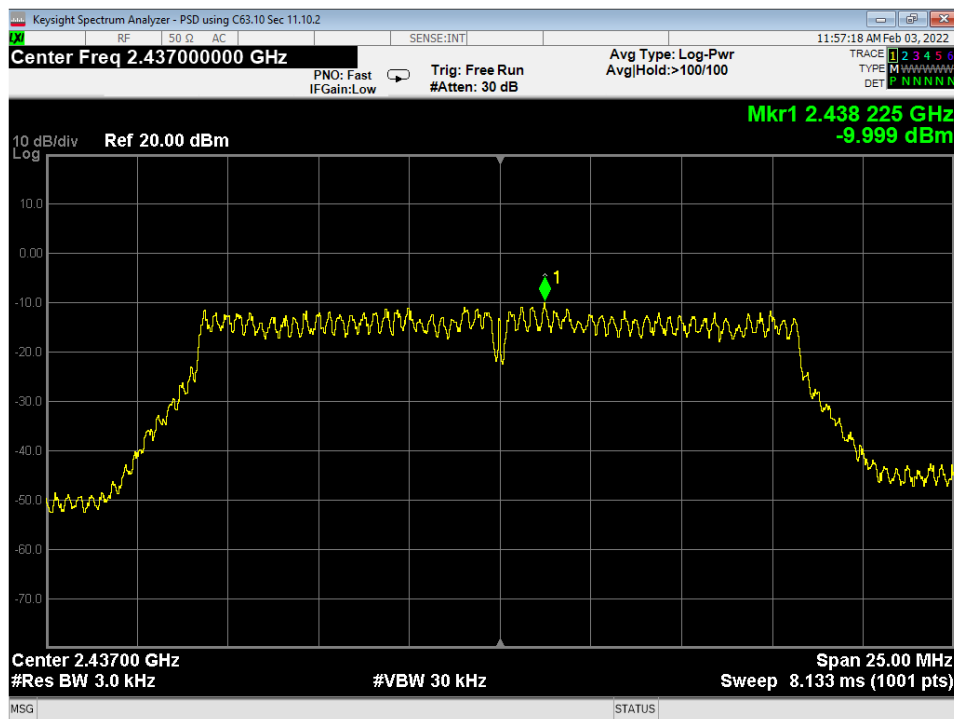


21 PSD, Mid, Wifi G Low Data Rate

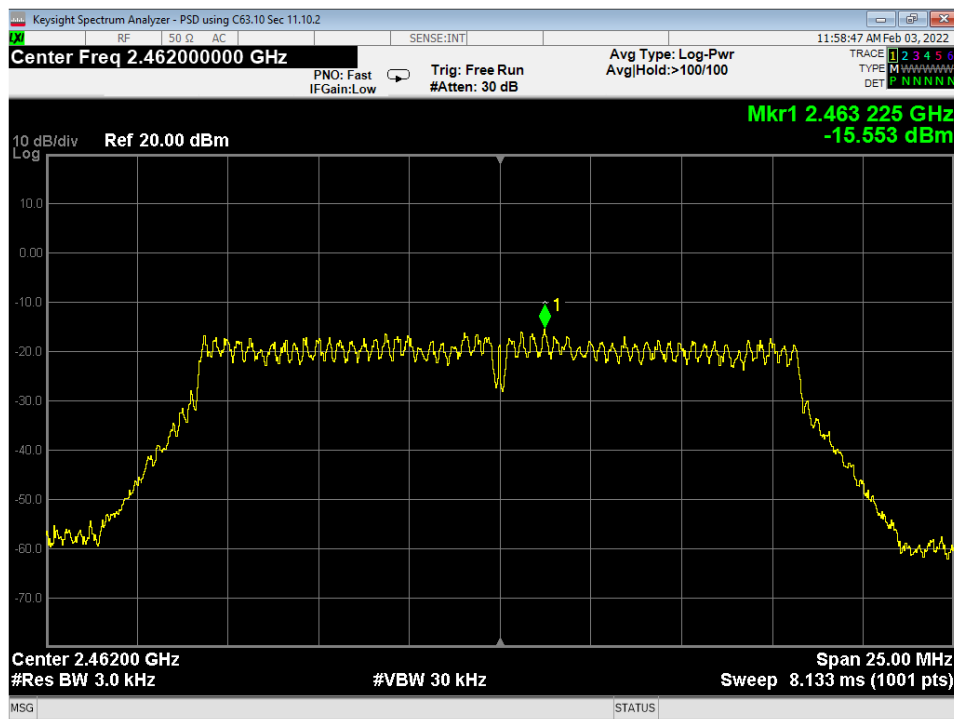


22 PSD, High, Wifi G Low Data Rate

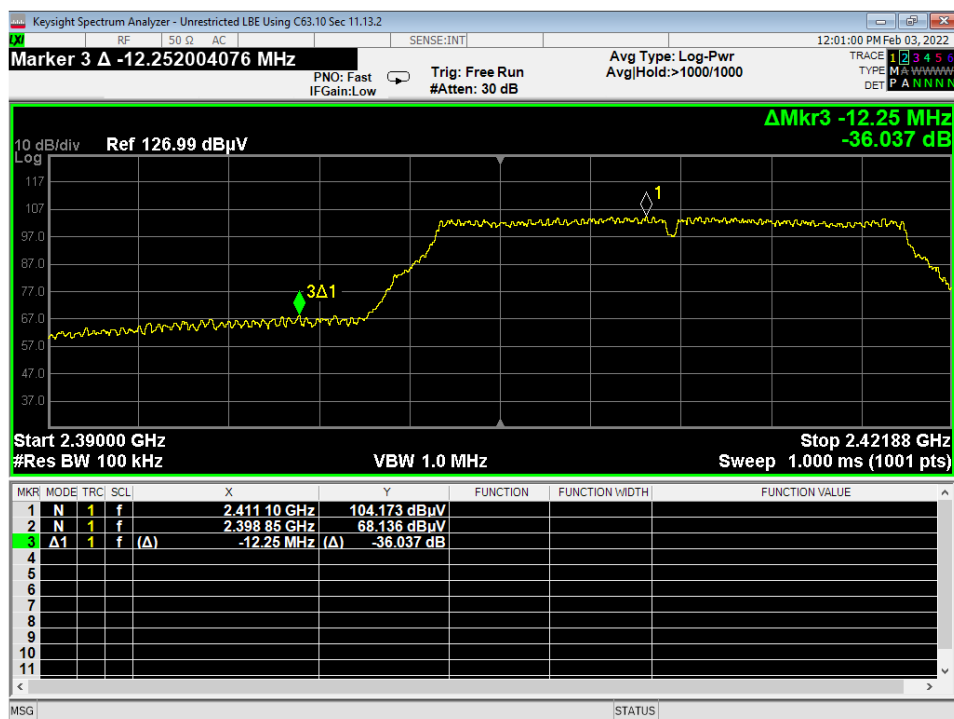


23 Lower Bandedge, Unrestricted, Wifi G Low Data Rate

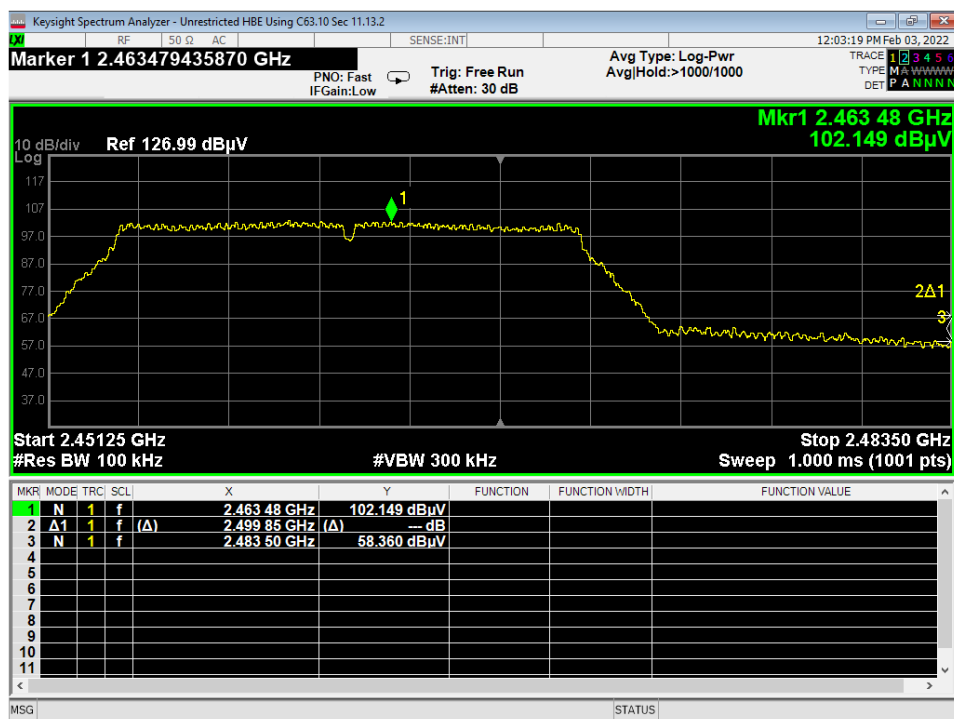

24 Higher Bandedge, Unrestricted, Wifi G Low Data Rate

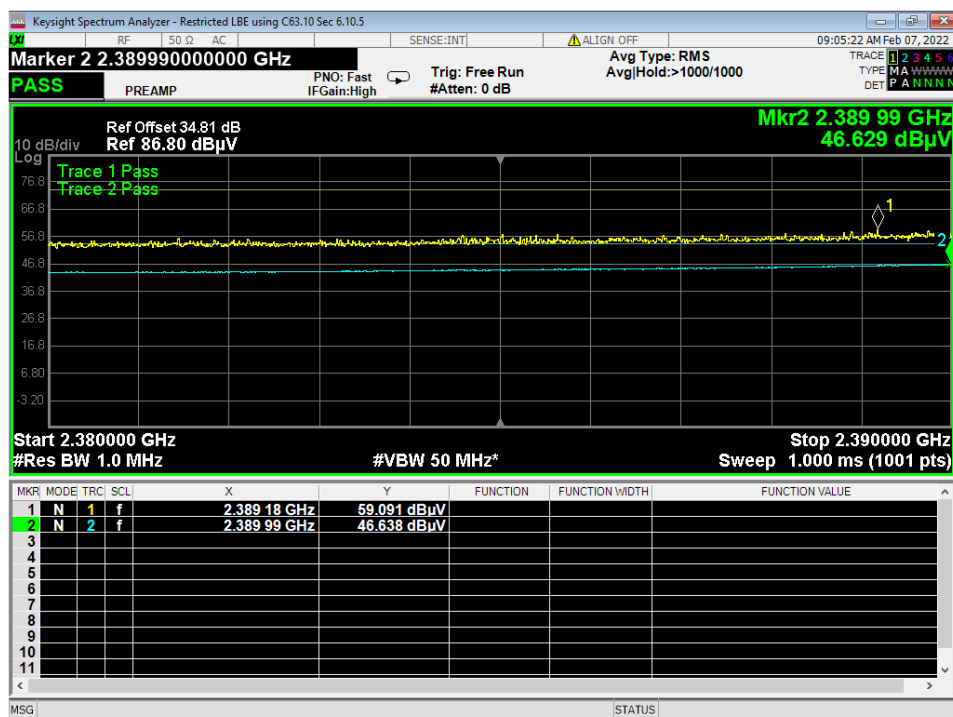


25 Lower Bandedge, Restricted, Wifi G Low Data Rate

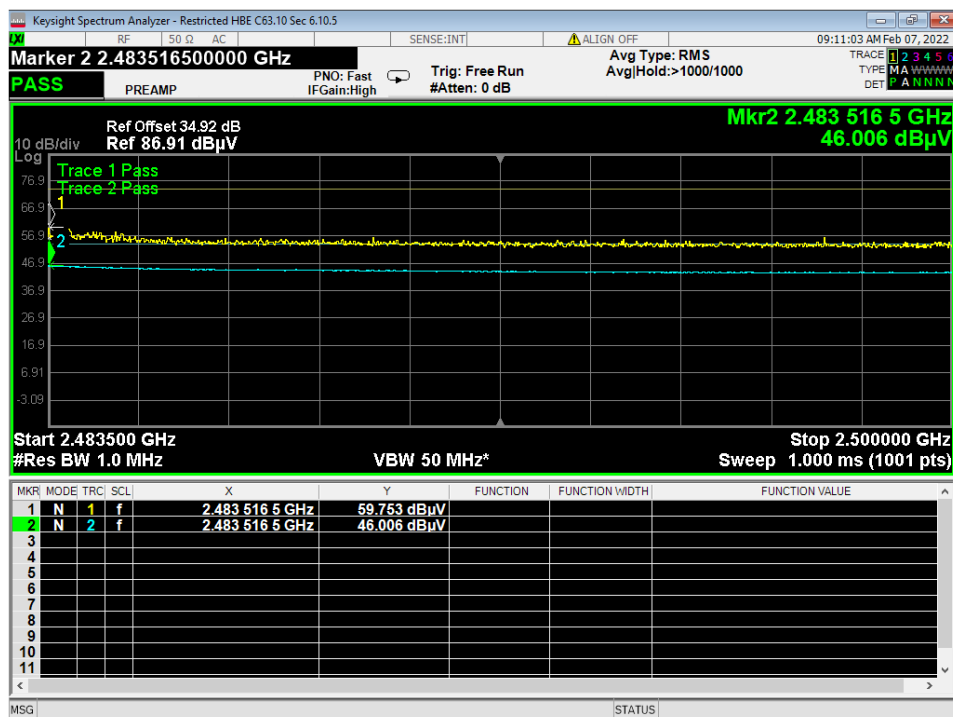


26 Higher Bandedge, Restricted, Wifi G Low Data Rate


Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

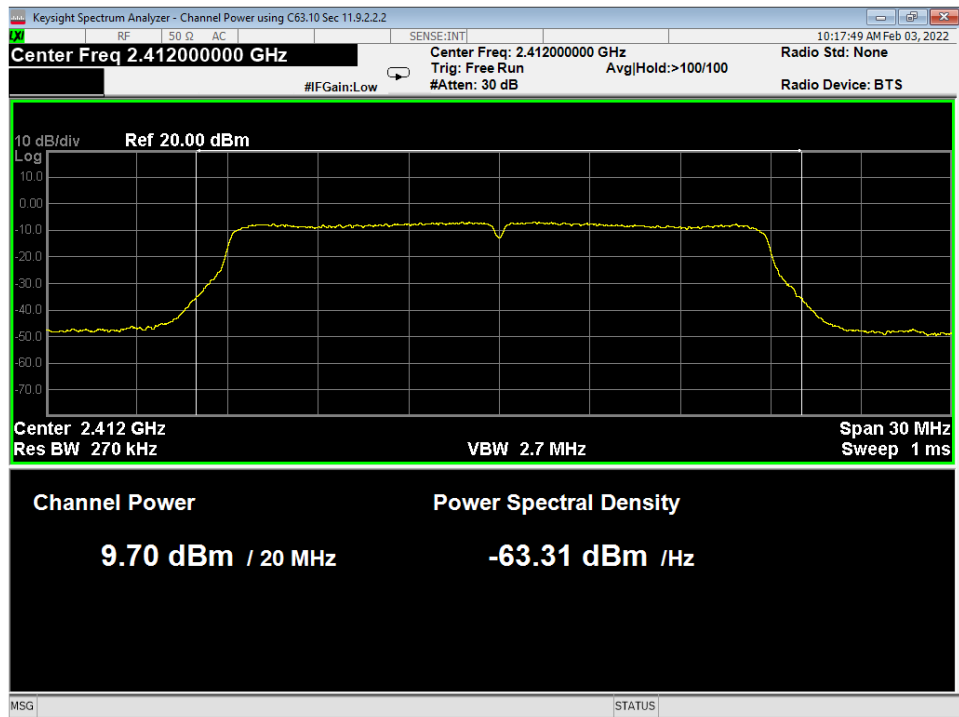


27 Power, Low, Wifi N Low Data Rate

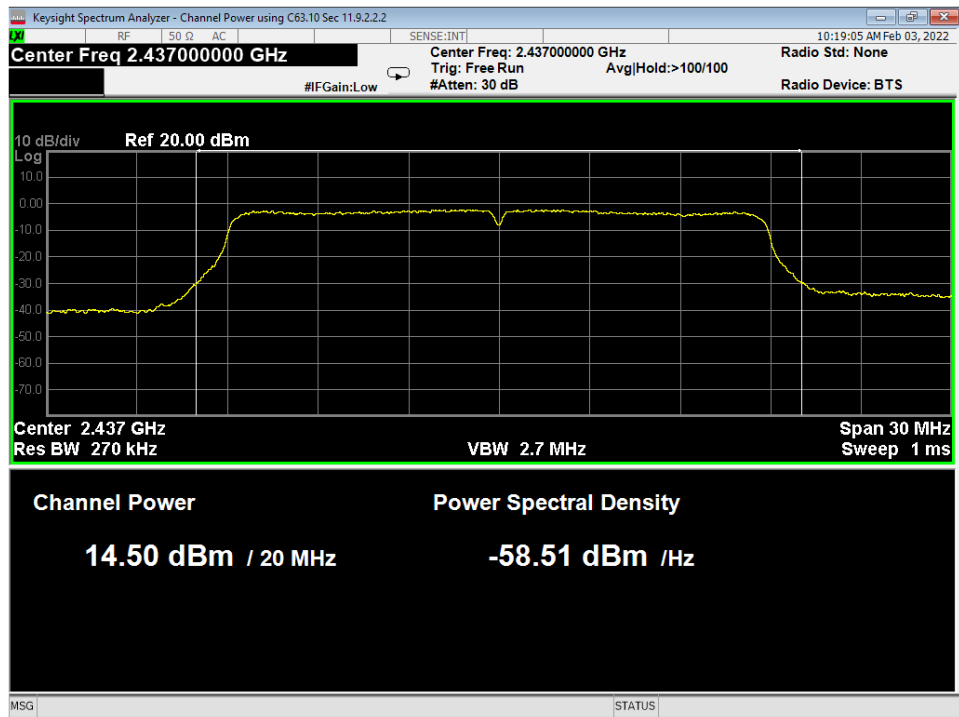

28 Power, Mid, Wifi N Low Data Rate

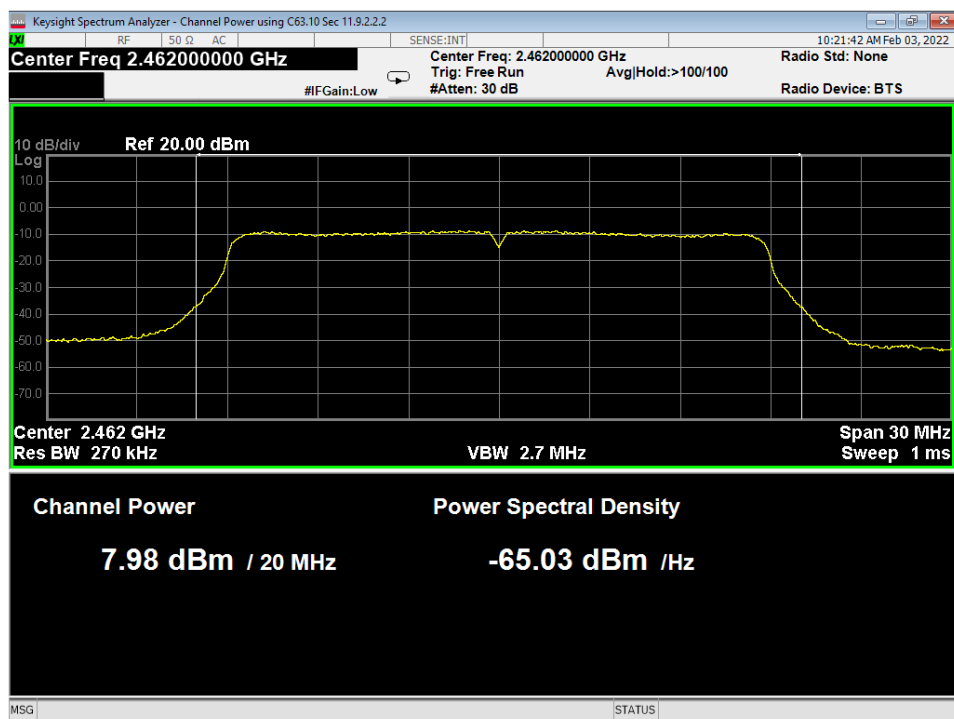


29 Power, High, Wifi N Low Data Rate

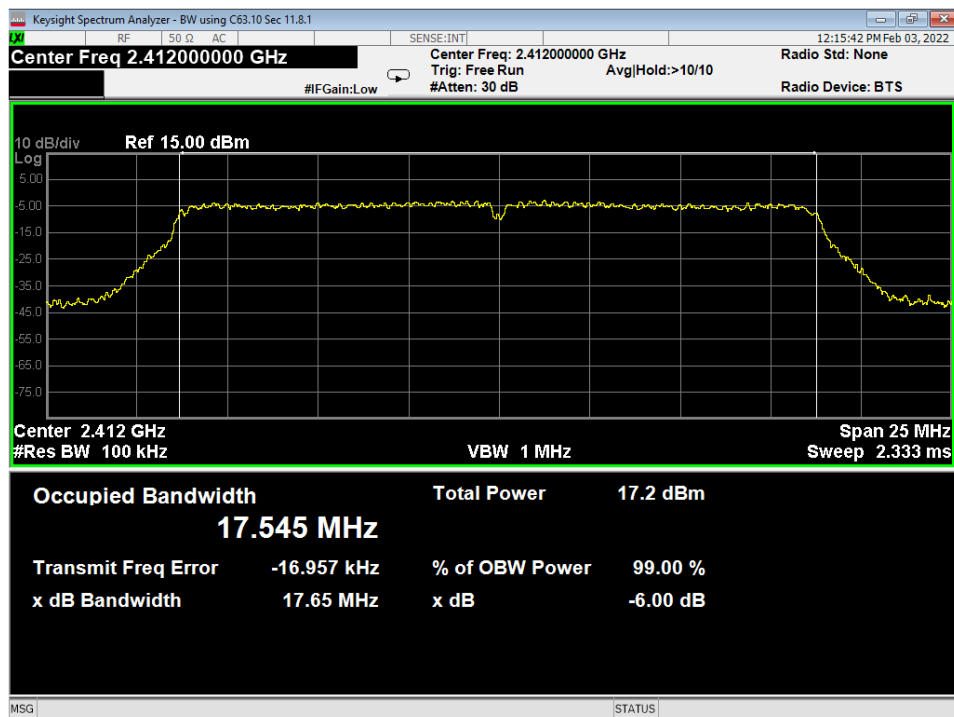


30 OBW-6dB, Low, Wifi N Low Data Rate




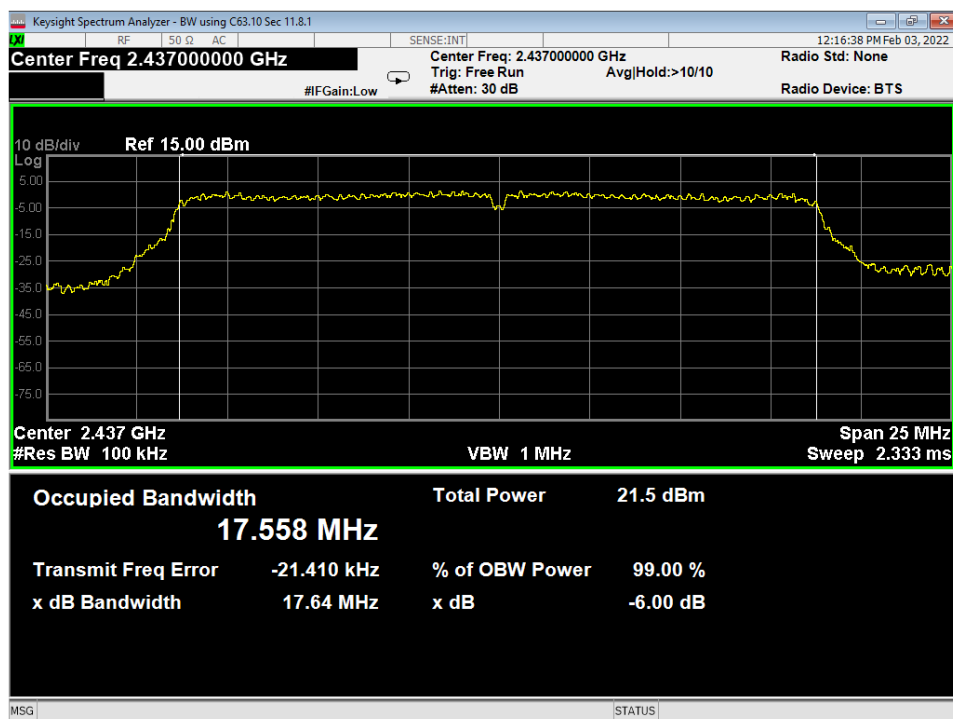


31 OBW-6dB, Mid, Wifi N Low Data Rate

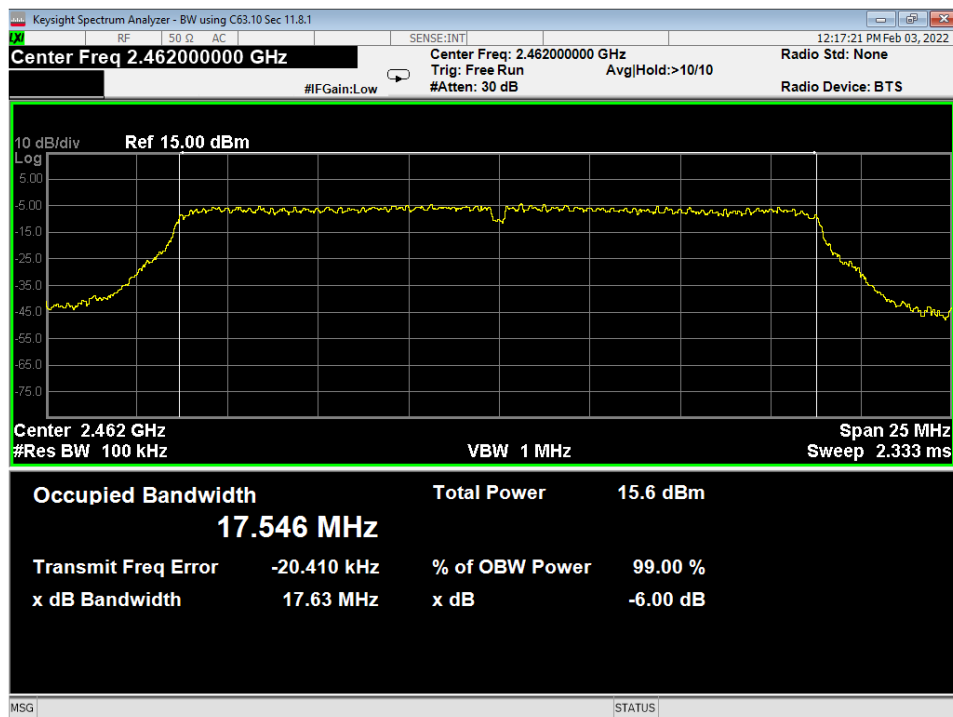


32 OBW-6dB, High, Wifi N Low Data Rate

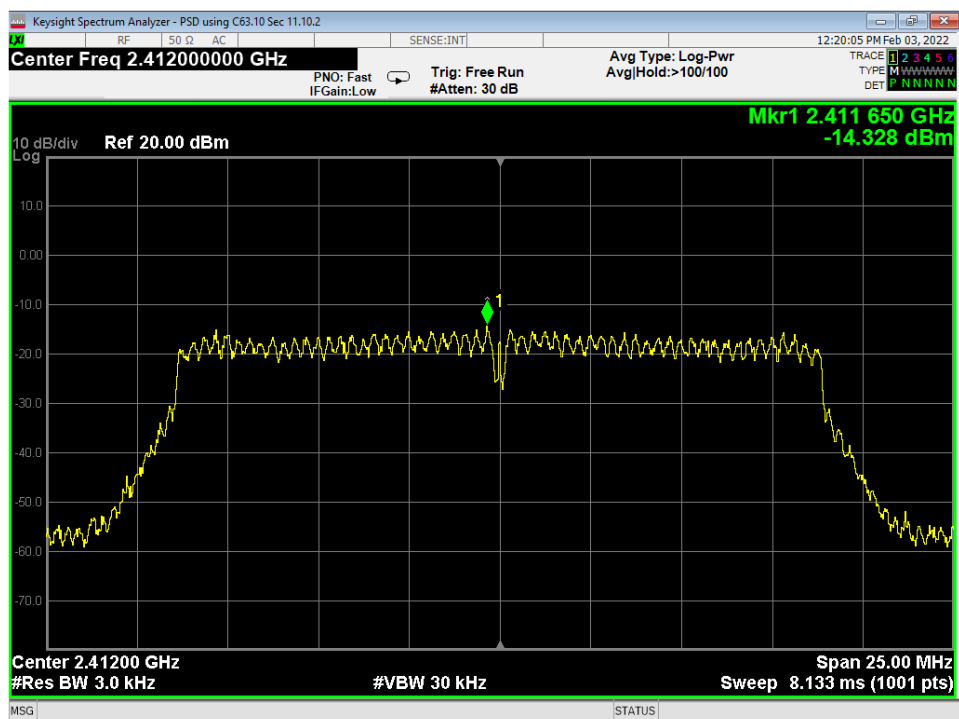


33 PSD, Low, Wifi N Low Data Rate

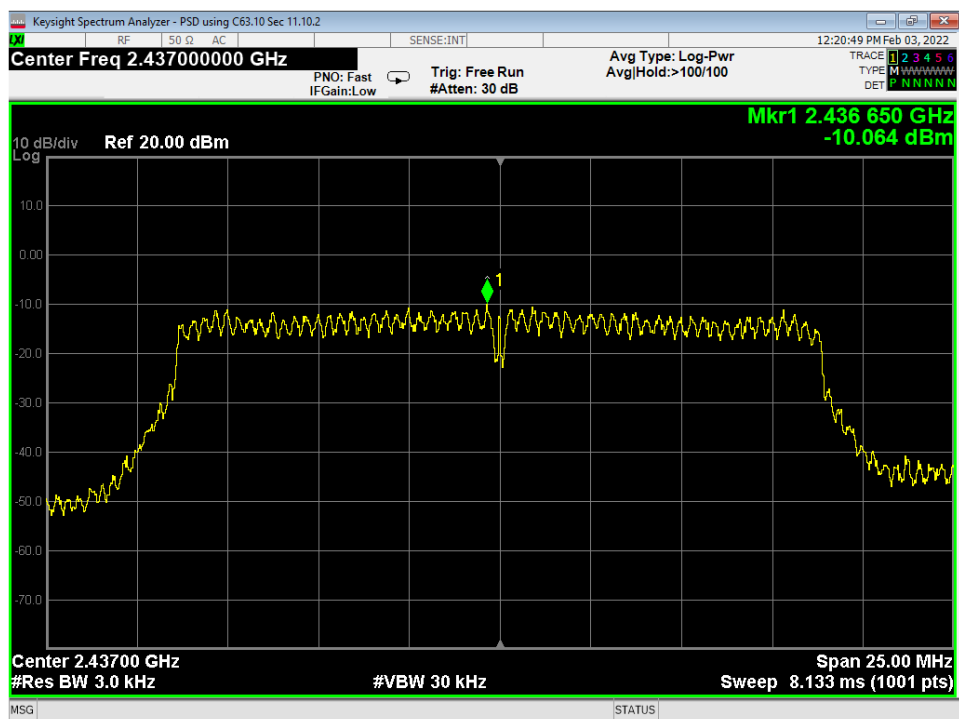


34 PSD, Mid, Wifi N Low Data Rate

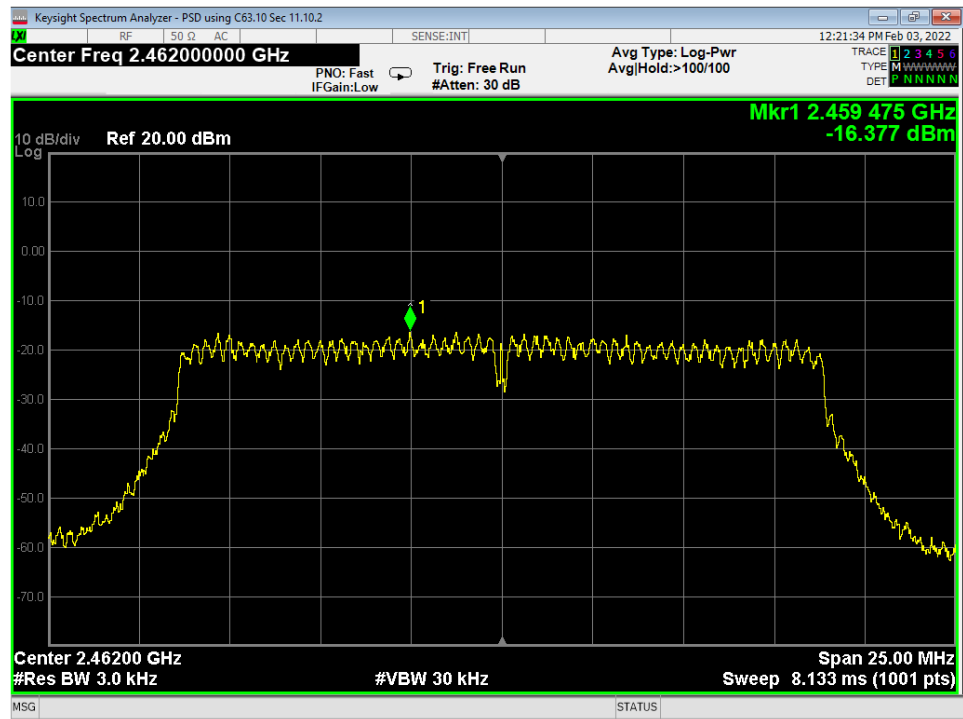


35 PSD, High, Wifi N Low Data Rate

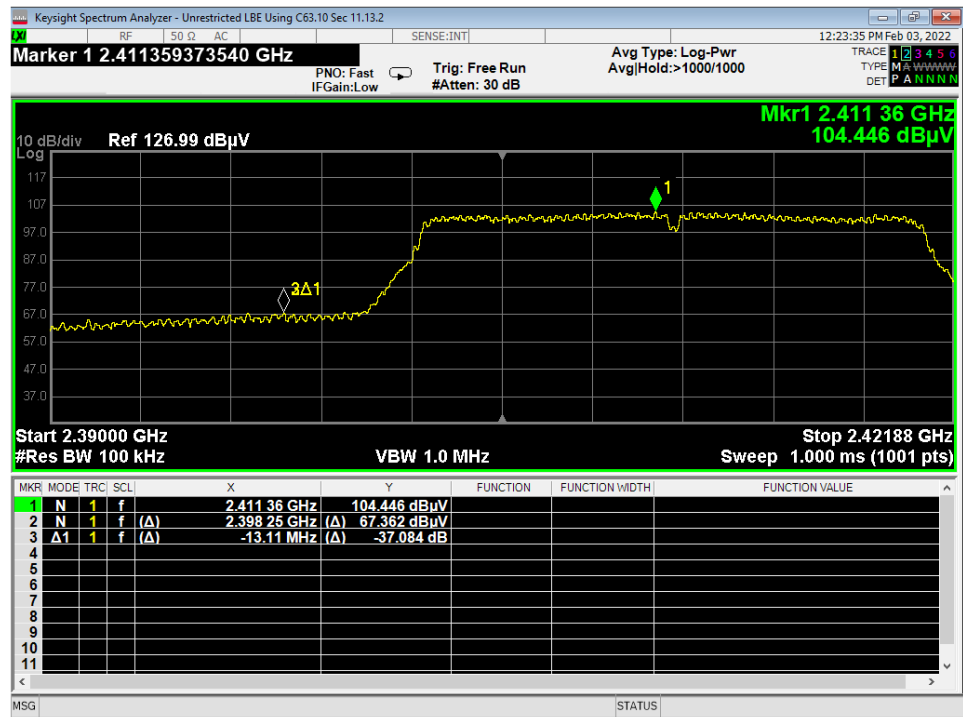


36 Lower Bandedge, Unrestricted, Wifi N Low Data Rate

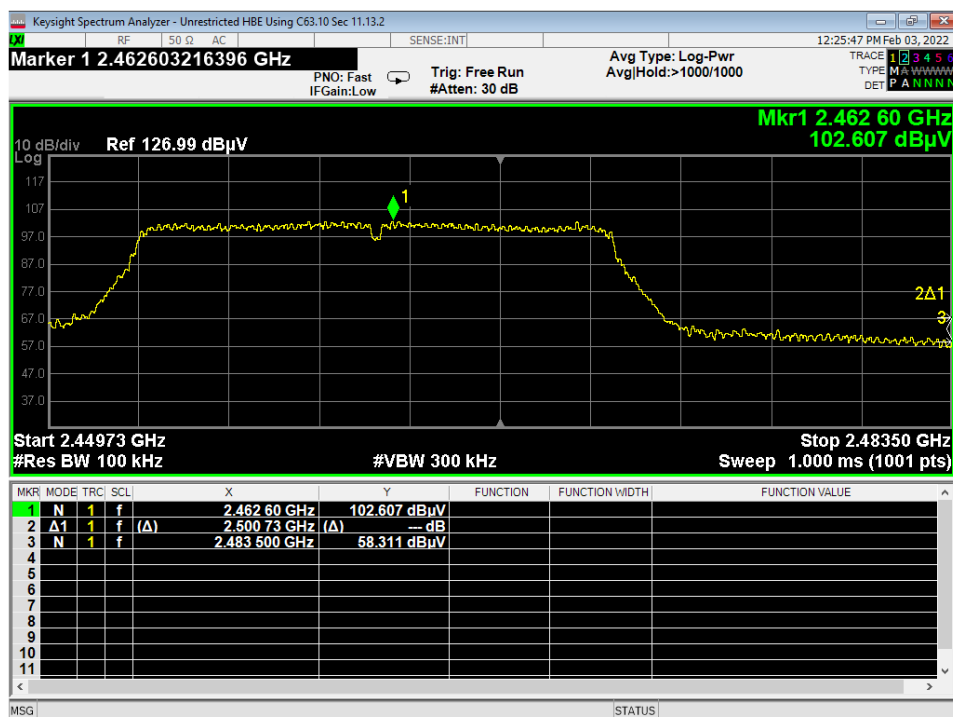


37 Higher Bandedge, Unrestricted, Wifi N Low Data Rate

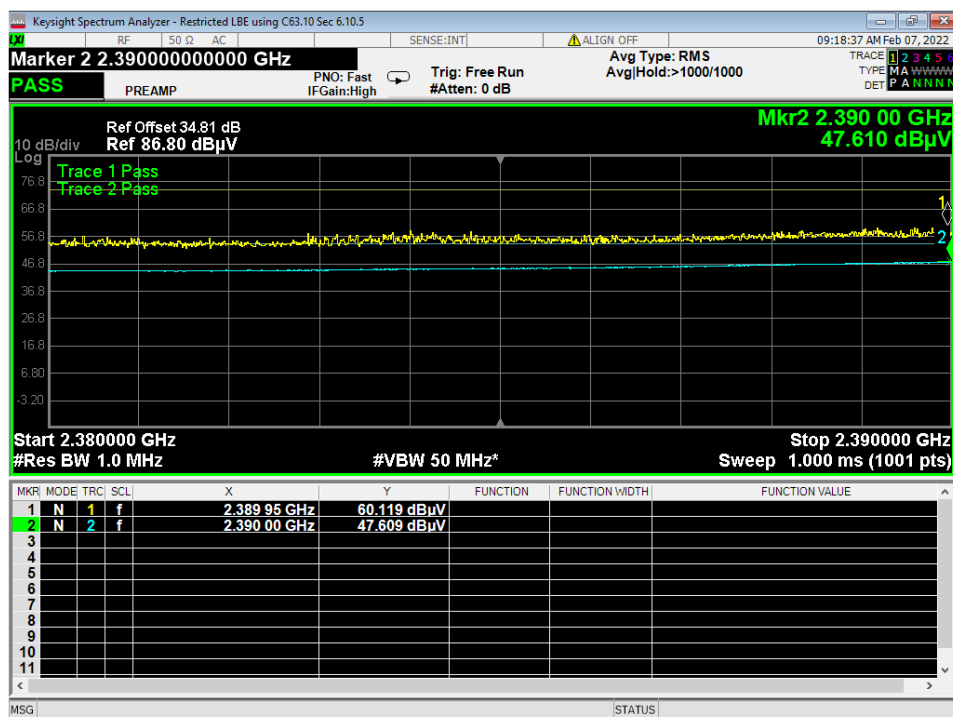

38 Lower Bandedge, Restricted, Wifi N Low Data Rate

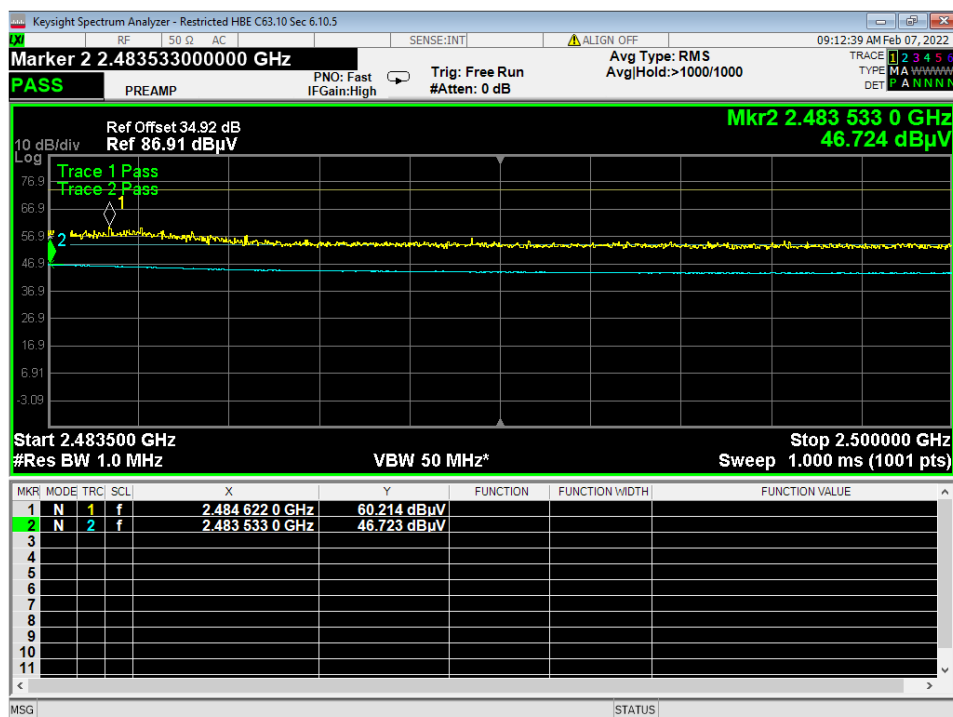


39 Higher Bandedge, Restricted, Wifi N Low Data Rate

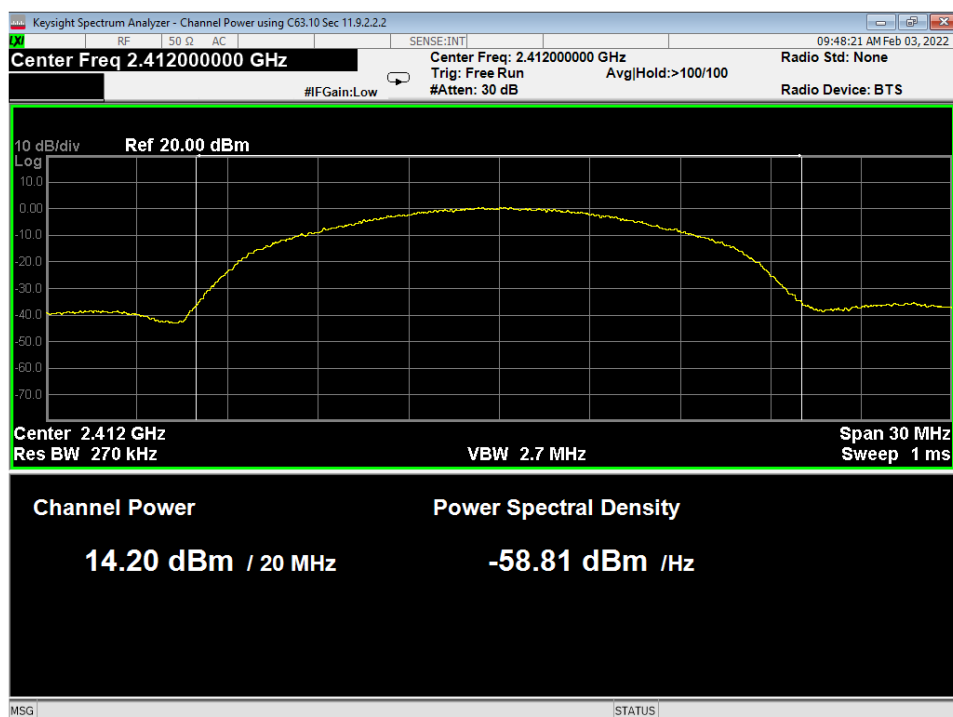


40 Power, Low, Wifi B High Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

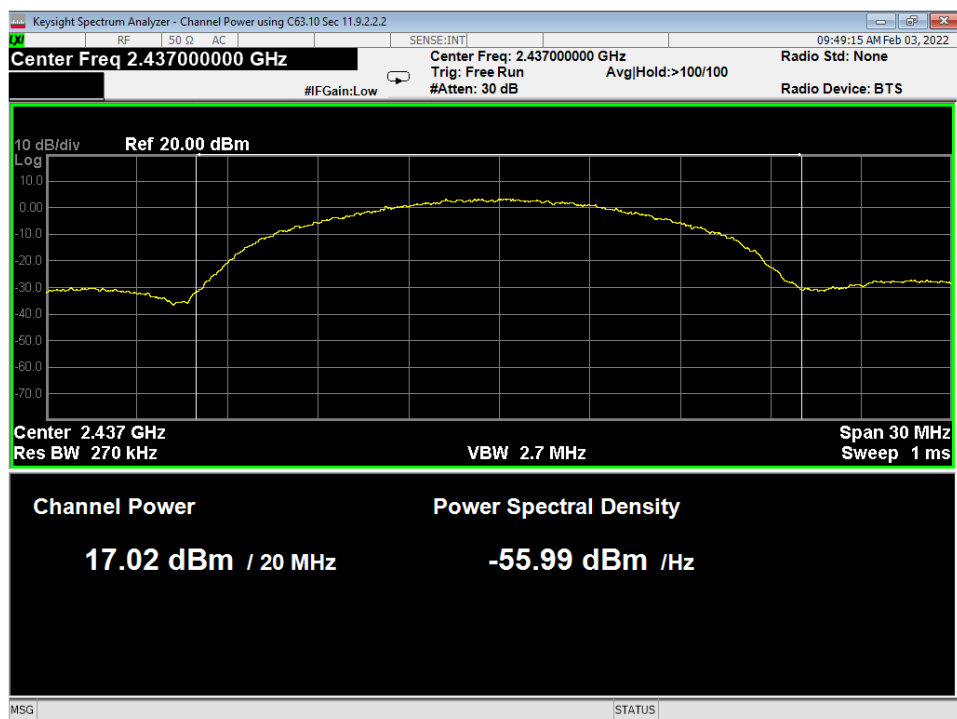


41 Power, Mid, Wifi B High Data Rate

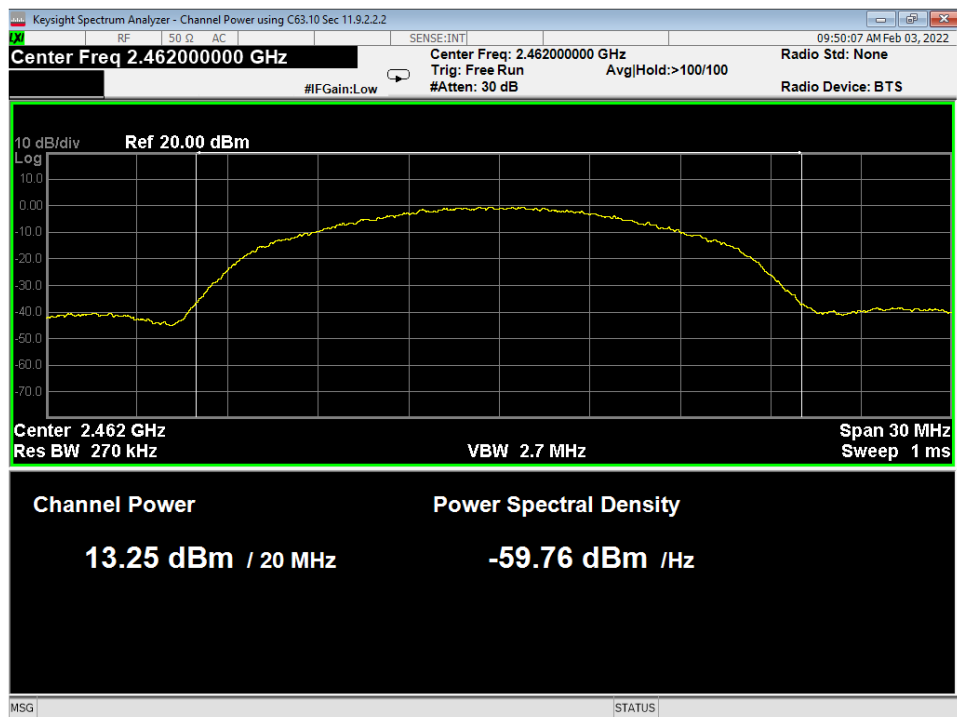


42 Power, High, Wifi B High Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

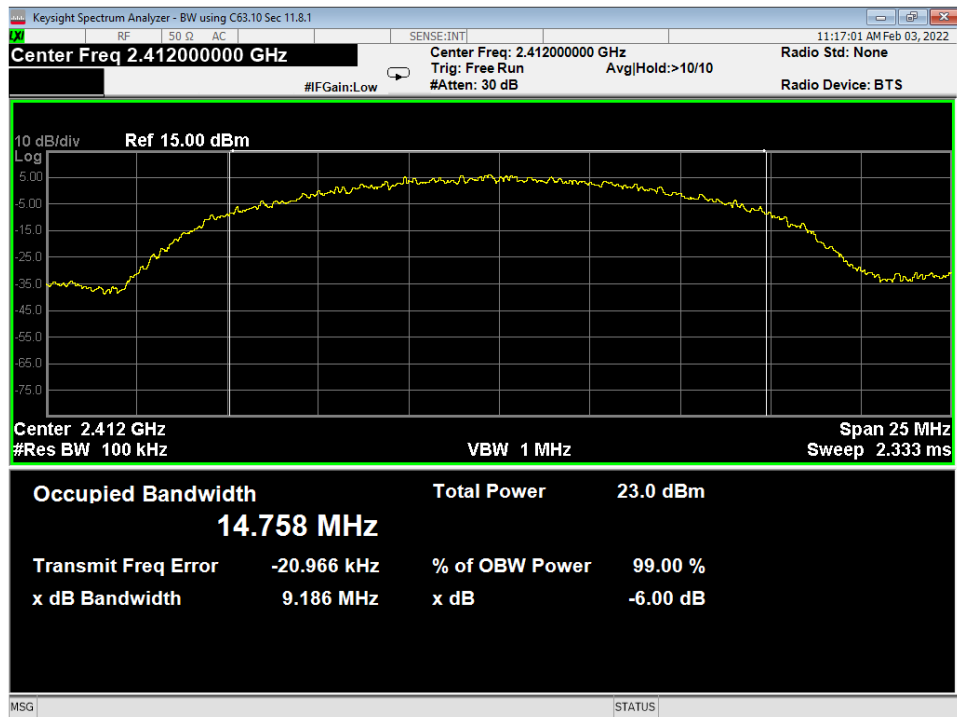


43 OBW-6dB, Low, Wifi B High Data Rate

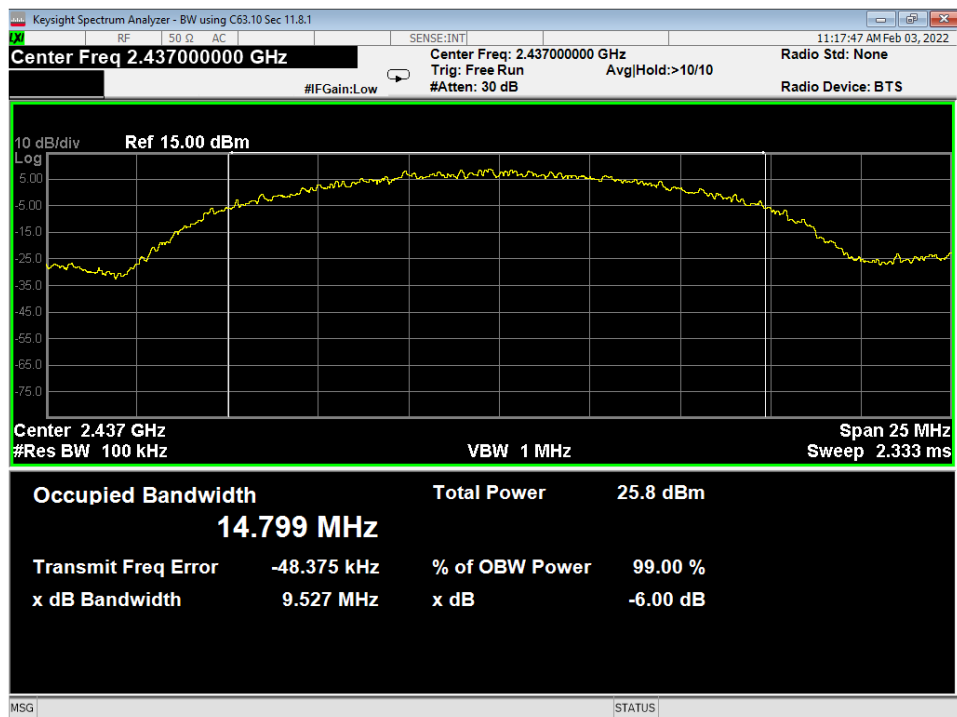


44 OBW-6dB, Mid, Wifi B High Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

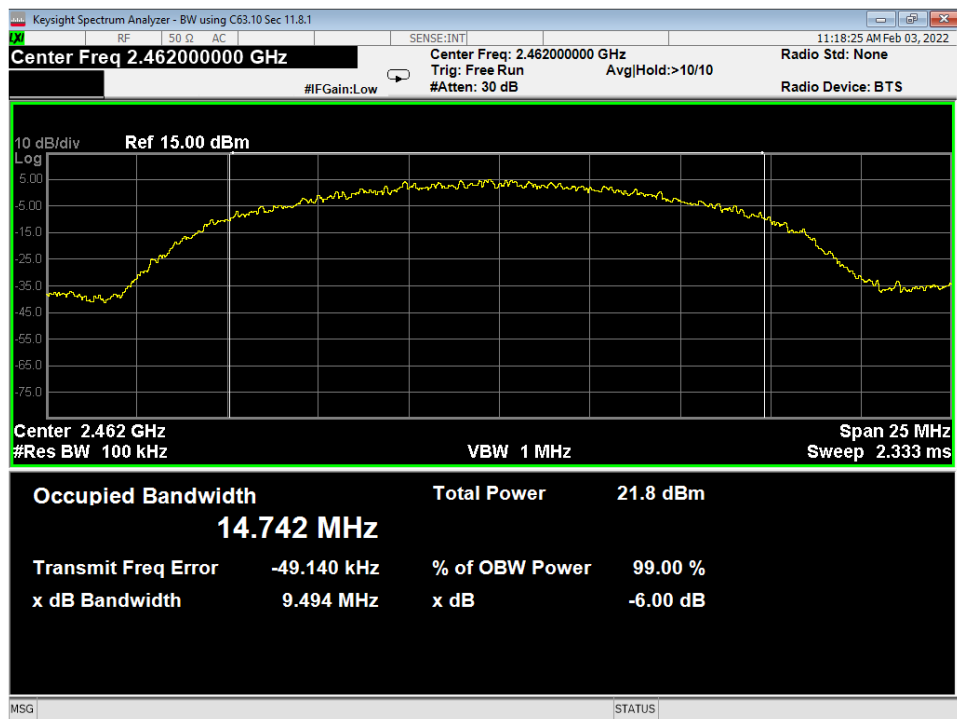


45 OBW-6dB, High, Wifi B High Data Rate

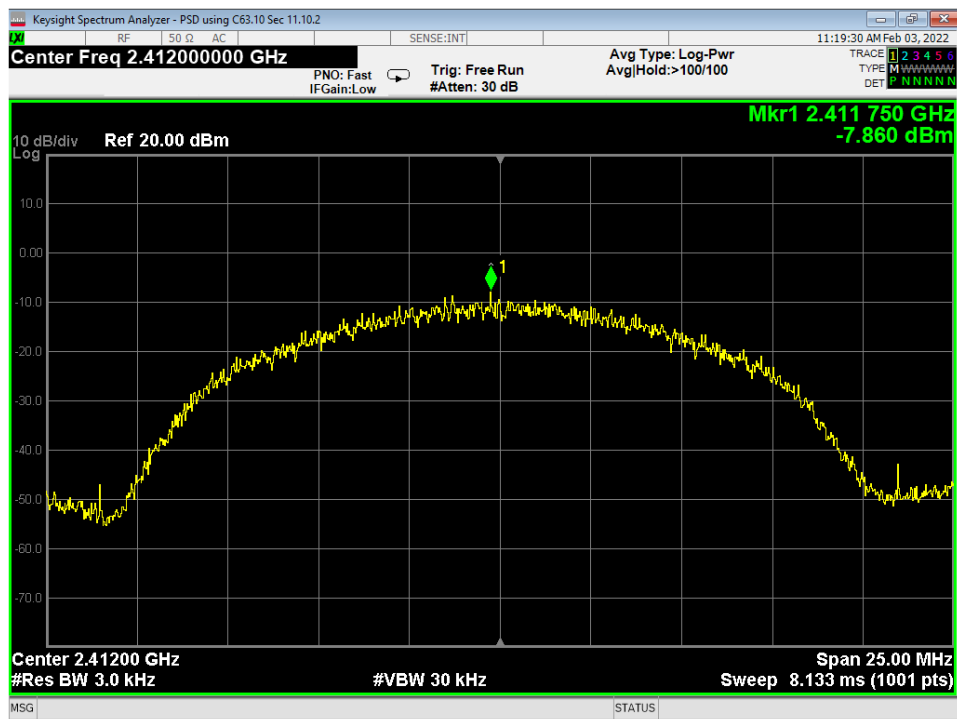


46 PSD, Low, Wifi B High Data Rate




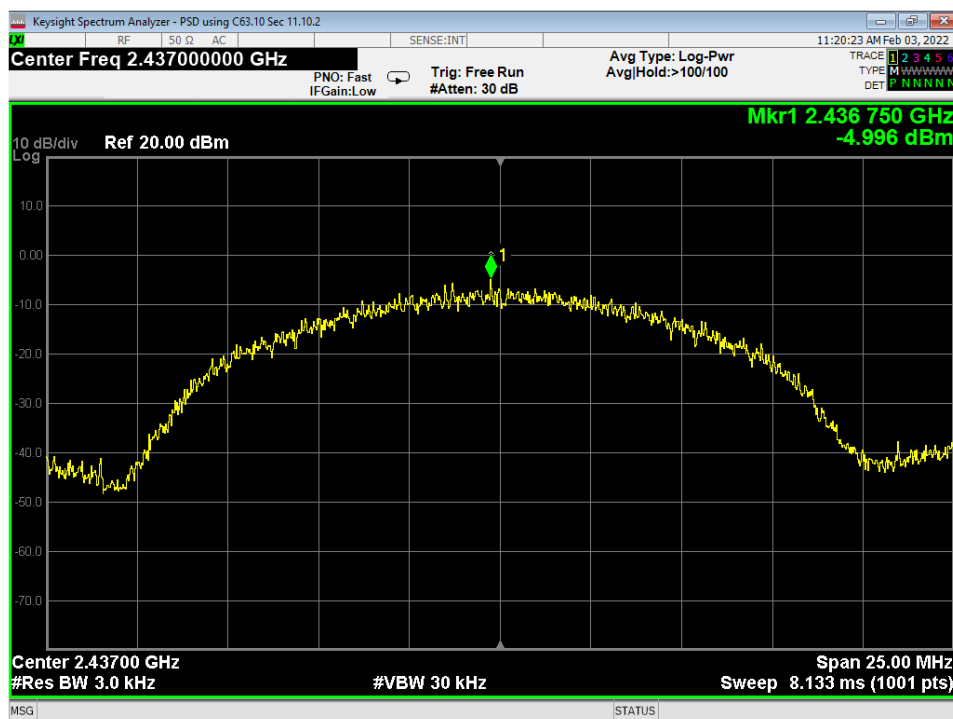


47 PSD, Mid, Wifi B High Data Rate

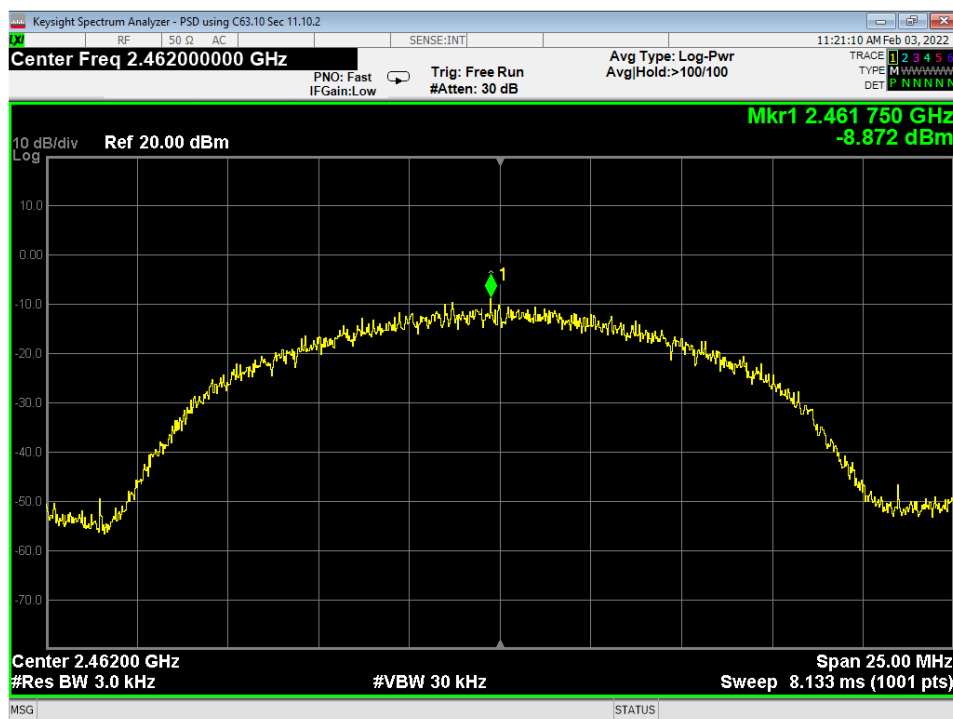


48 PSD, High, Wifi B High Data Rate

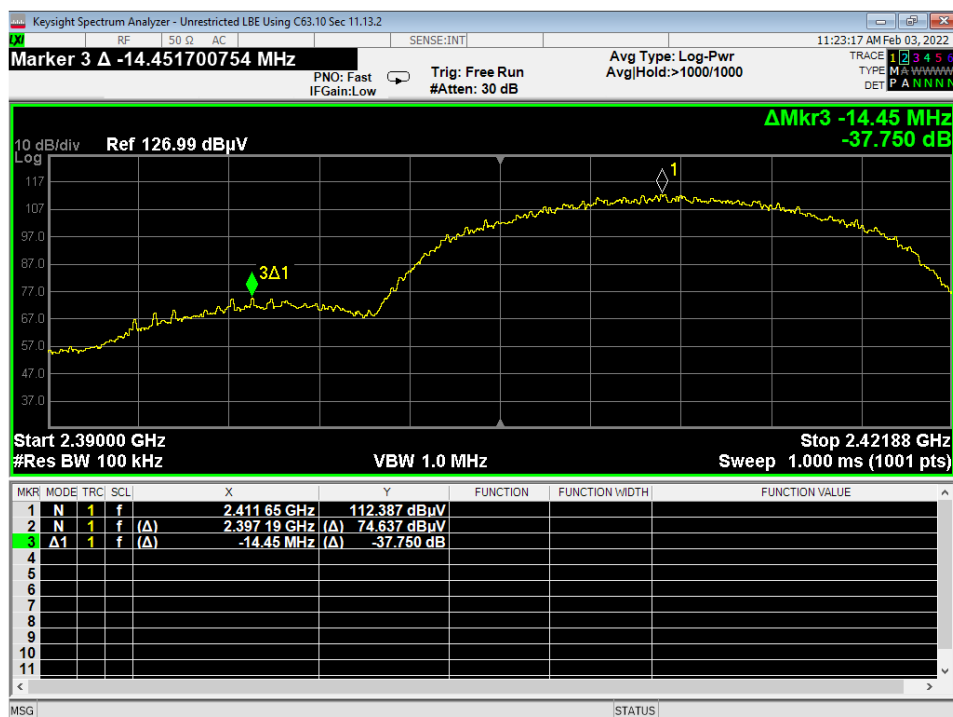


49 Lower Bandedge, Unrestricted, Wifi B High Data Rate

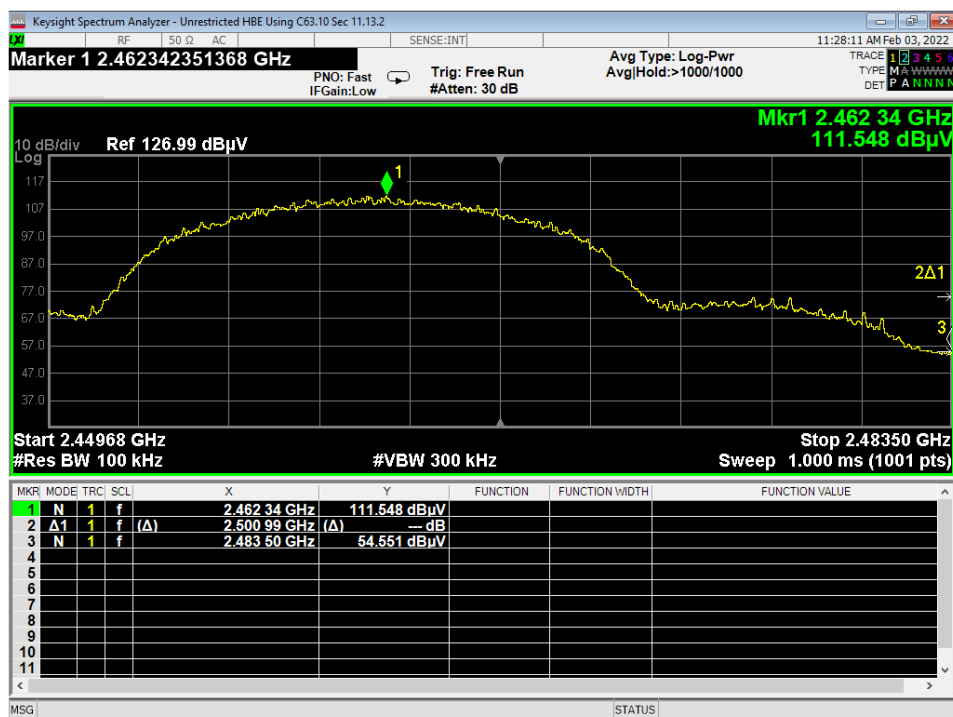

50 Higher Bandedge, Unrestricted, Wifi B High Data Rate

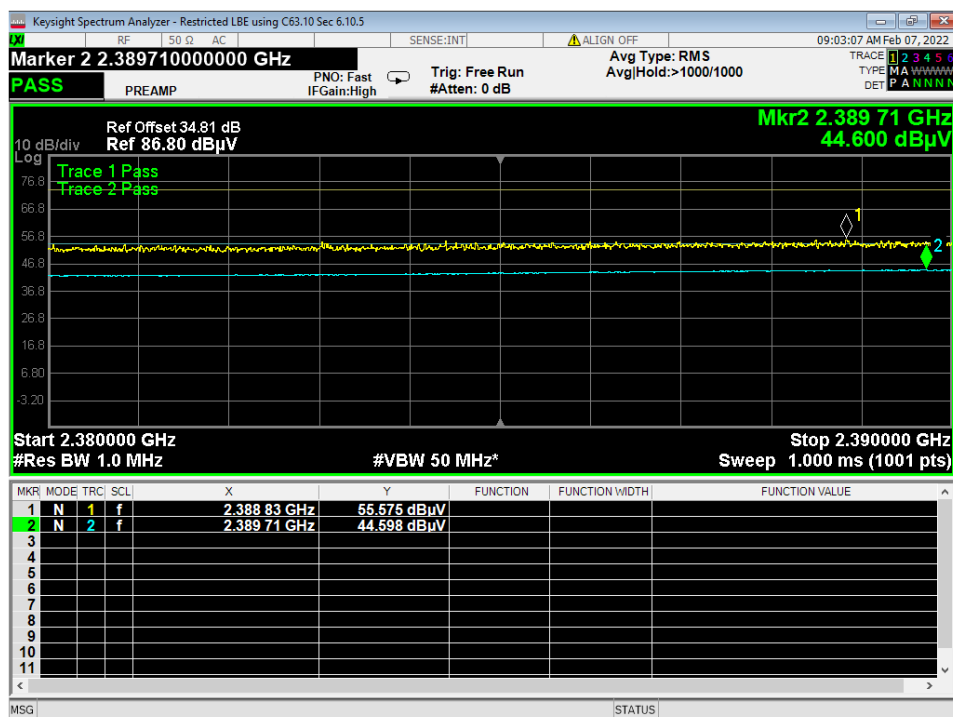


51 Lower Bandedge, Restricted, Wifi B High Data Rate

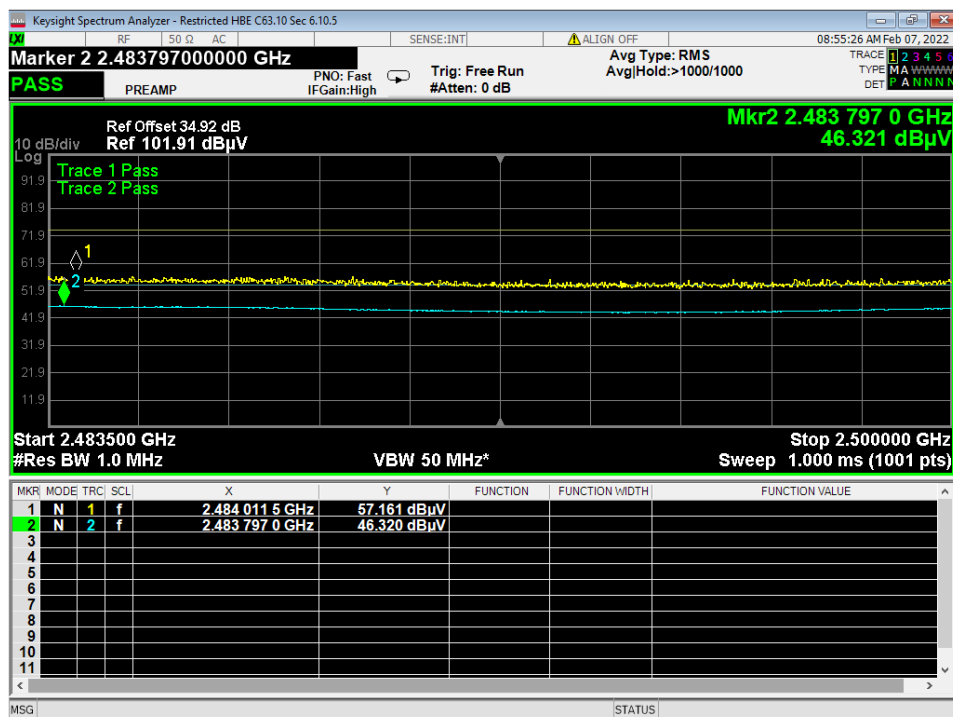


52 Higher Bandedge, Restricted, Wifi B High Data Rate


Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

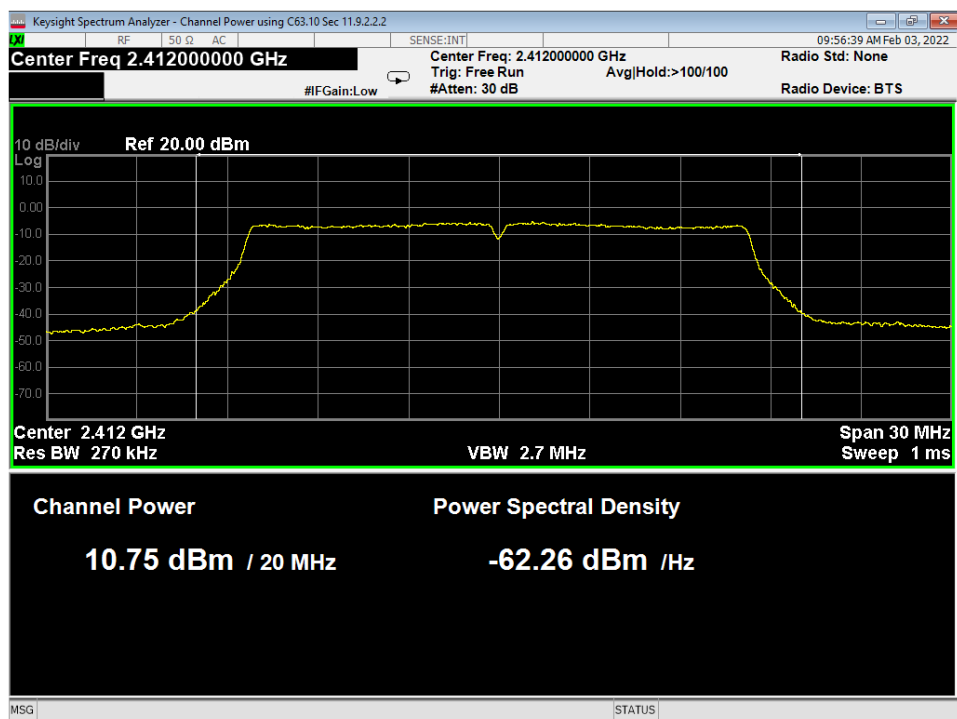


53 Power, Low, Wifi G High Data Rate

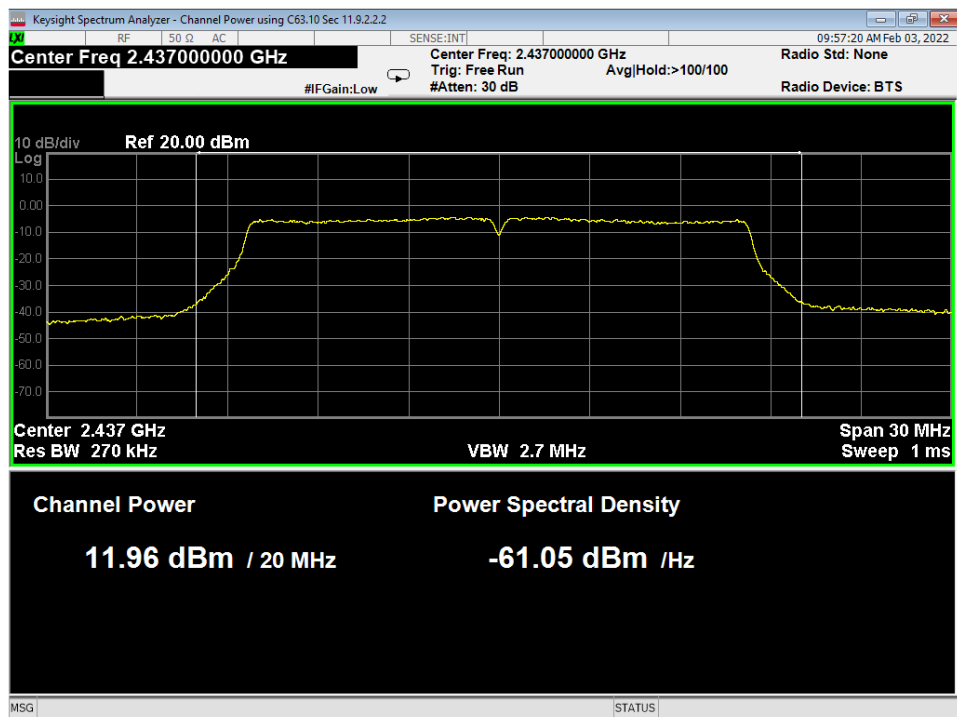

54 Power, Mid, Wifi G High Data Rate

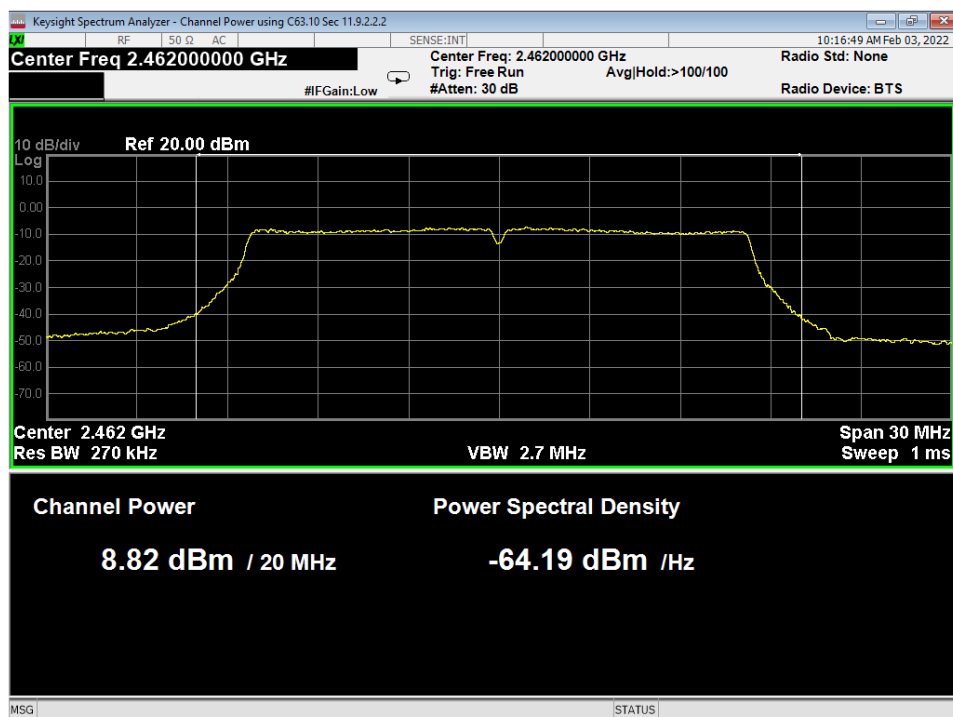


55 Power, High, Wifi G High Data Rate

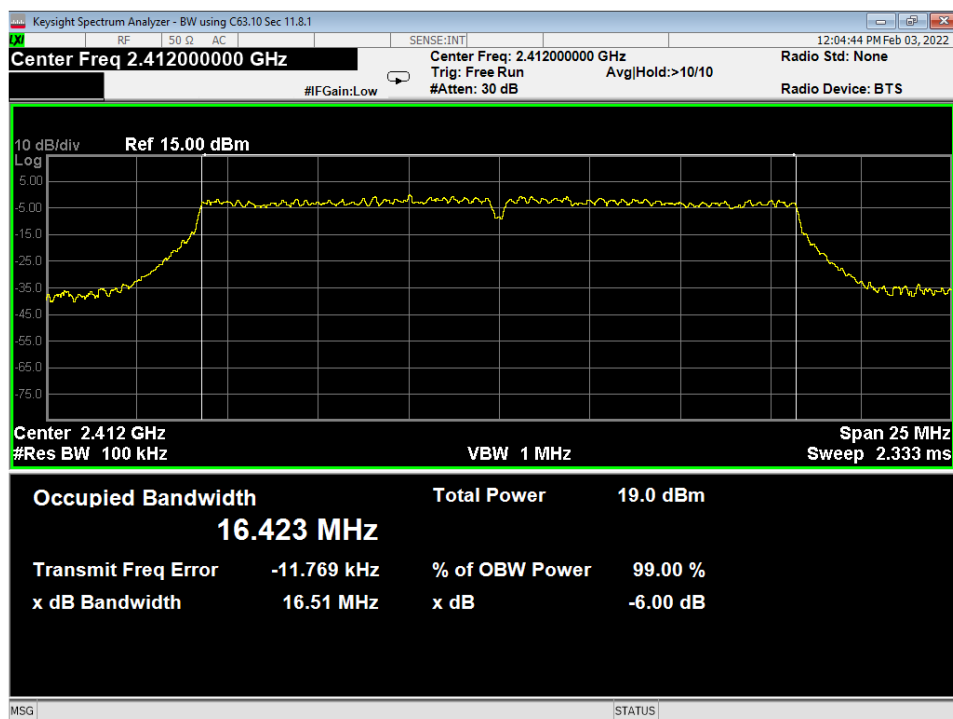


56 OBW-6dB, Low, Wifi G High Data Rate


Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

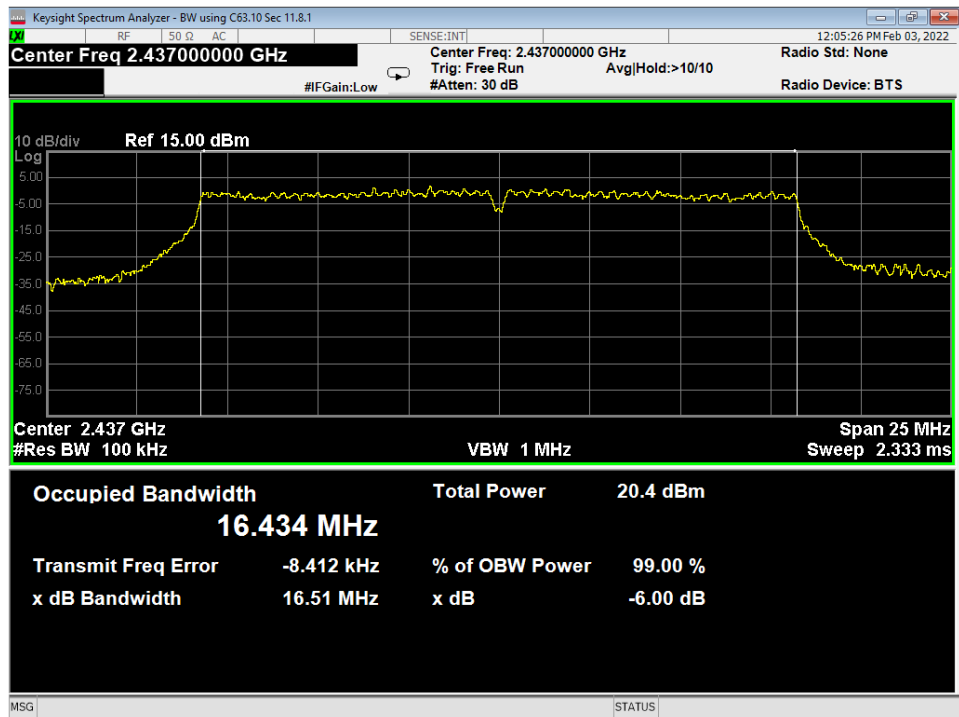


57 OBW-6dB, Mid, Wifi G High Data Rate

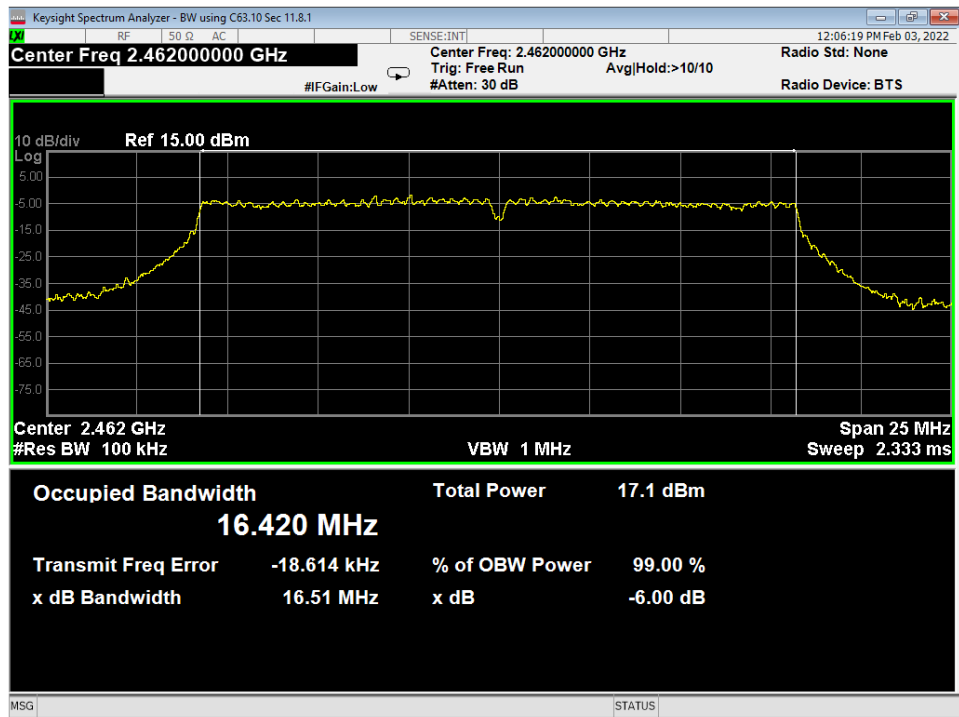


58 OBW-6dB, High, Wifi G High Data Rate

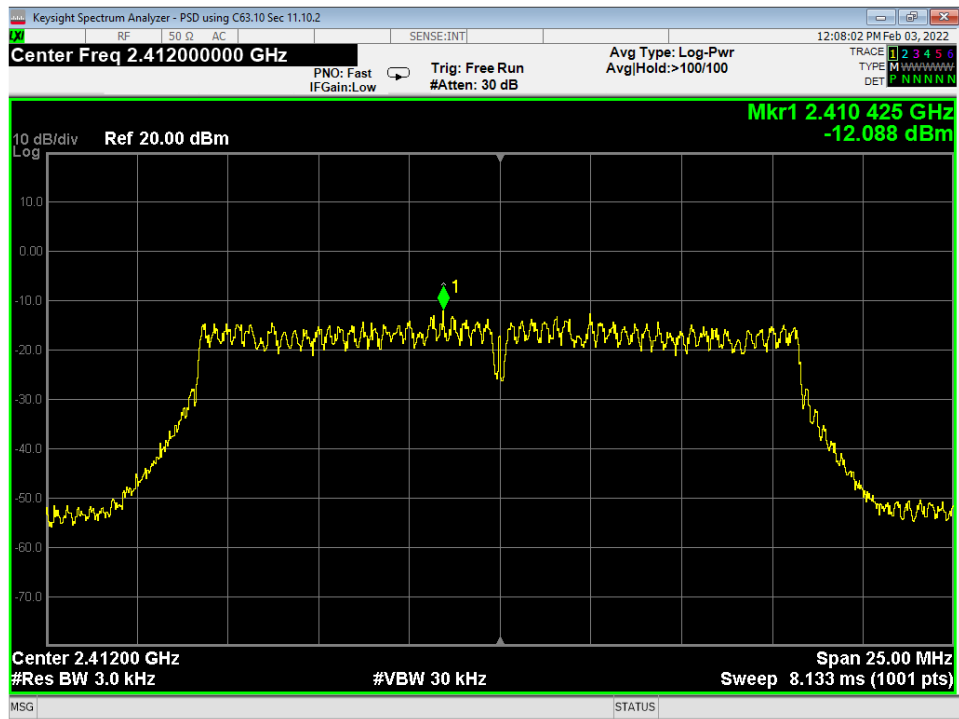


59 PSD, Low, Wifi G High Data Rate

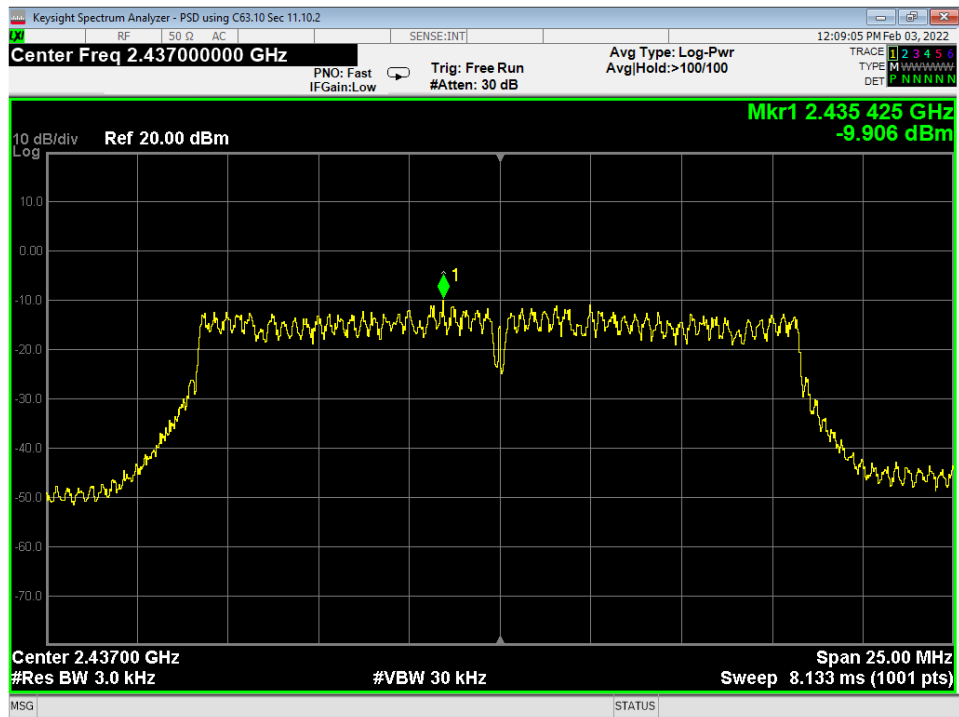

60 PSD, Mid, Wifi G High Data Rate

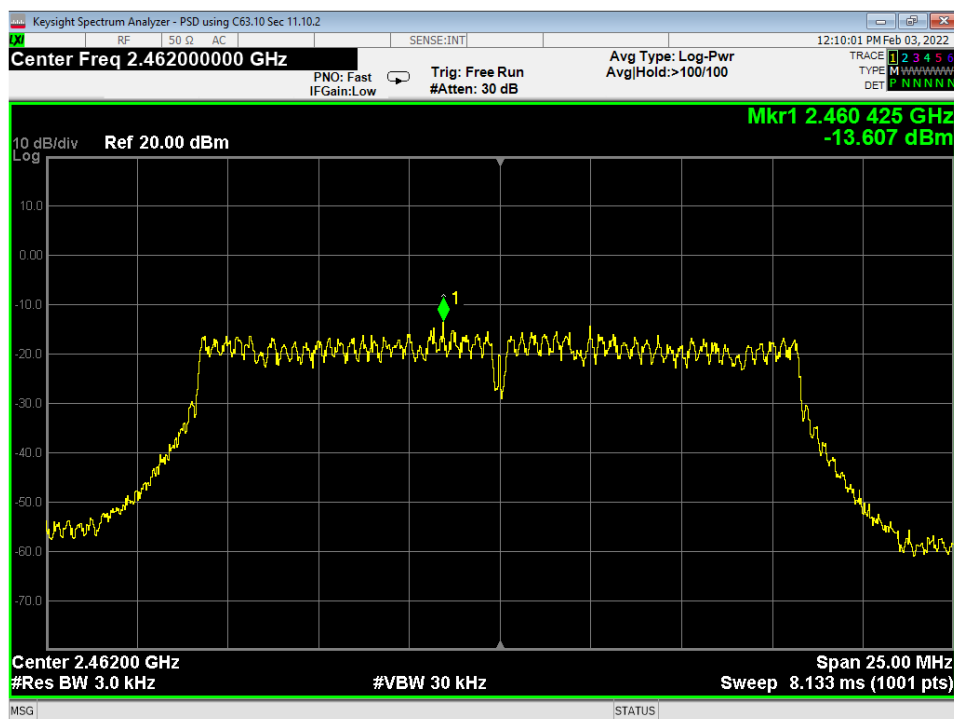


61 PSD, High, Wifi G High Data Rate

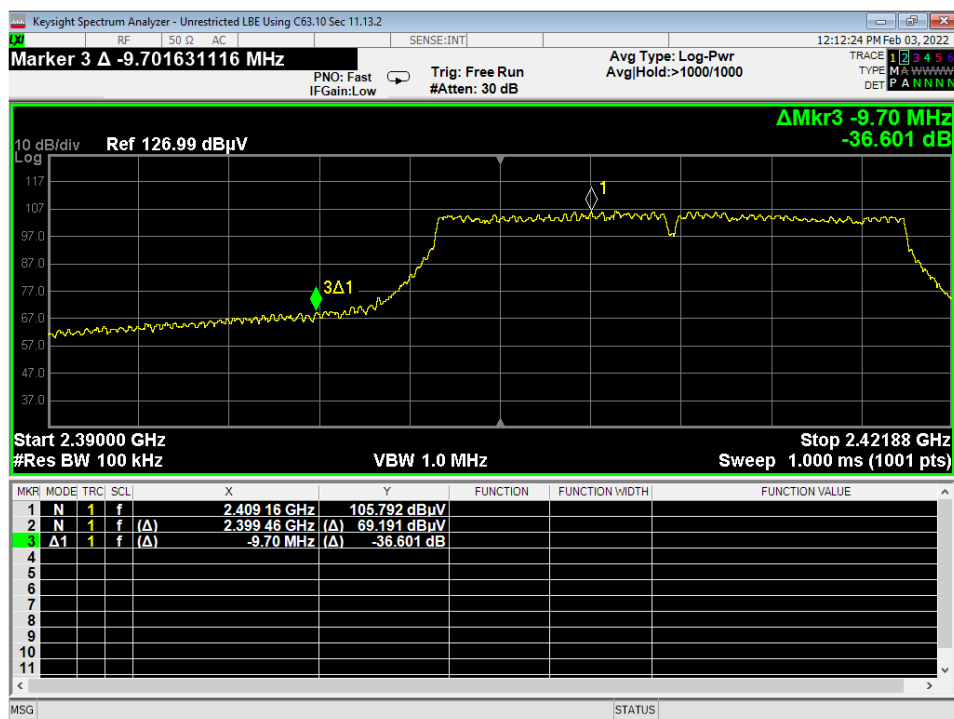


62 Lower Bandedge, Unrestricted, Wifi G High Data Rate




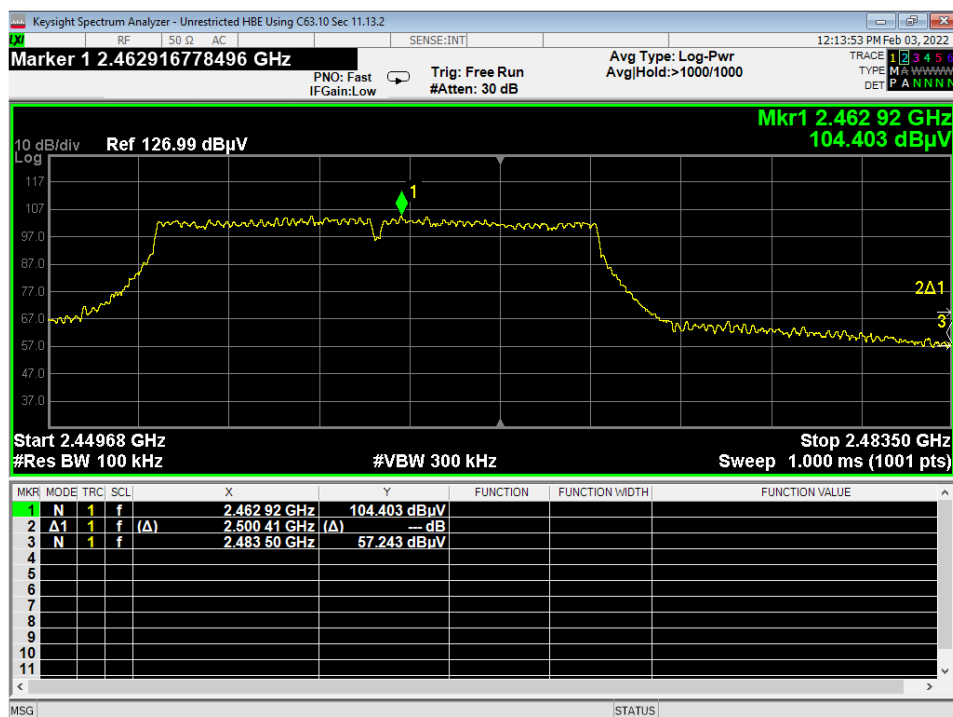


63 Higher Bandedge, Unrestricted, Wifi G High Data Rate

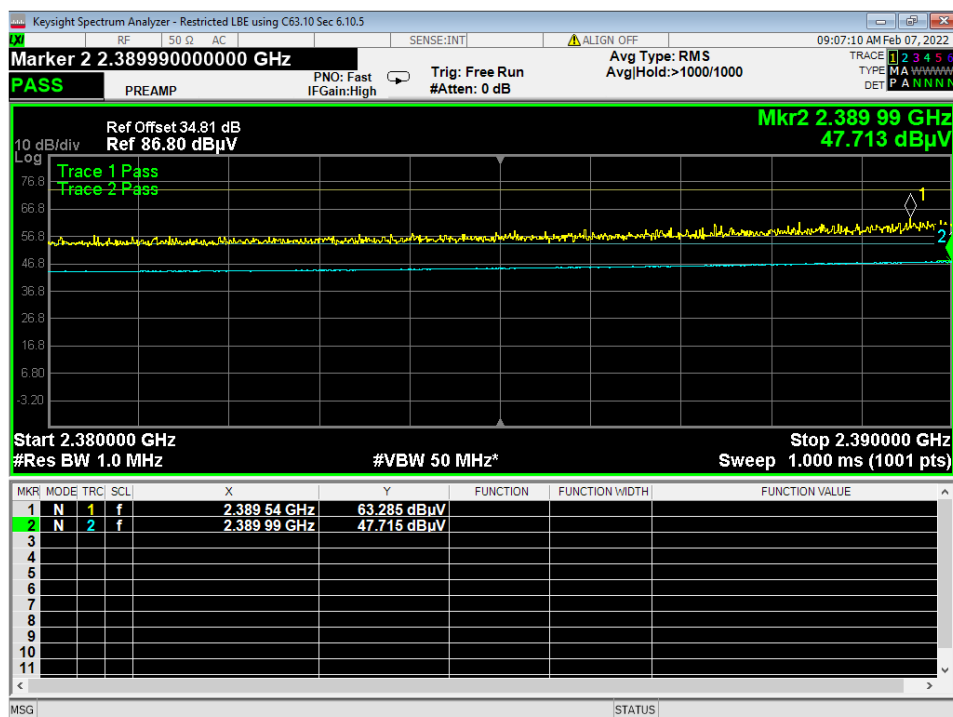

64 Lower Bandedge, Restricted, Wifi G High Data Rate

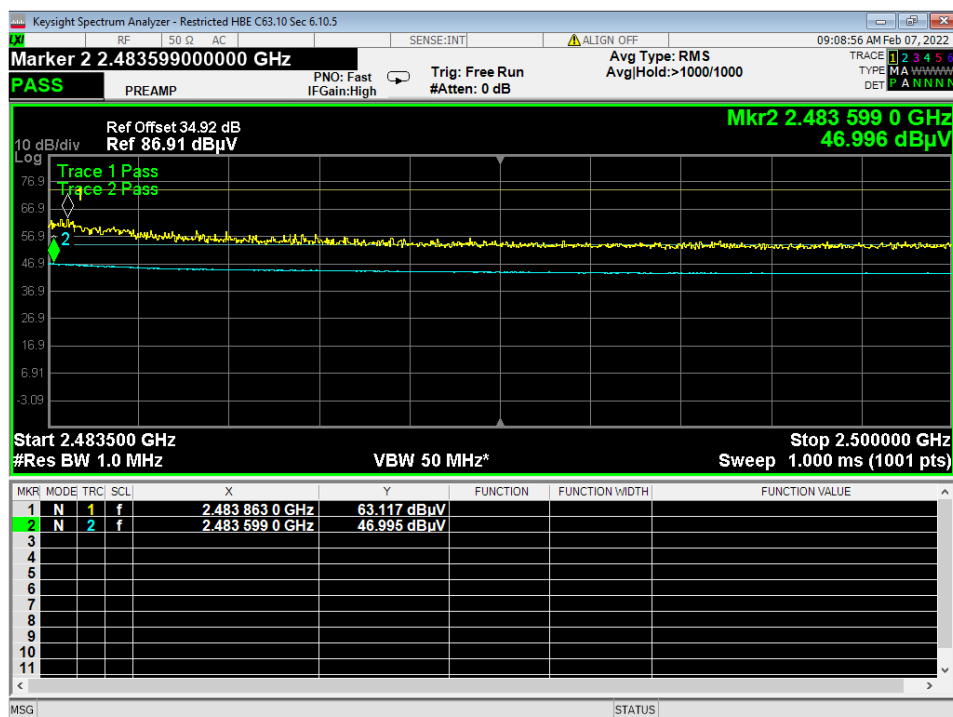


65 Higher Bandedge, Restricted, Wifi G High Data Rate

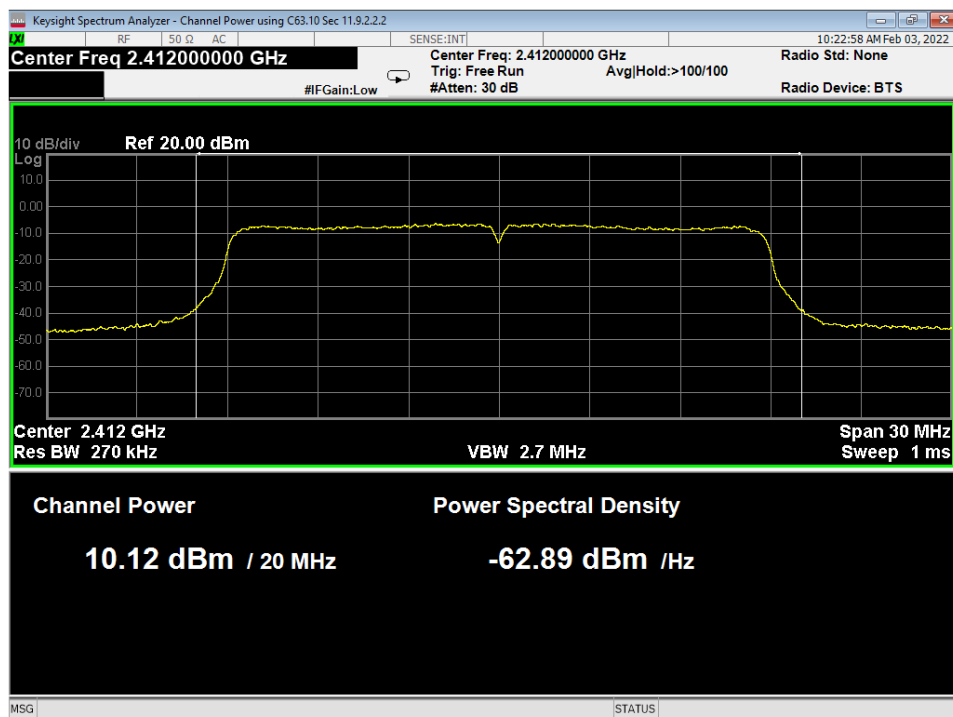


66 Power, Low, Wifi N High Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

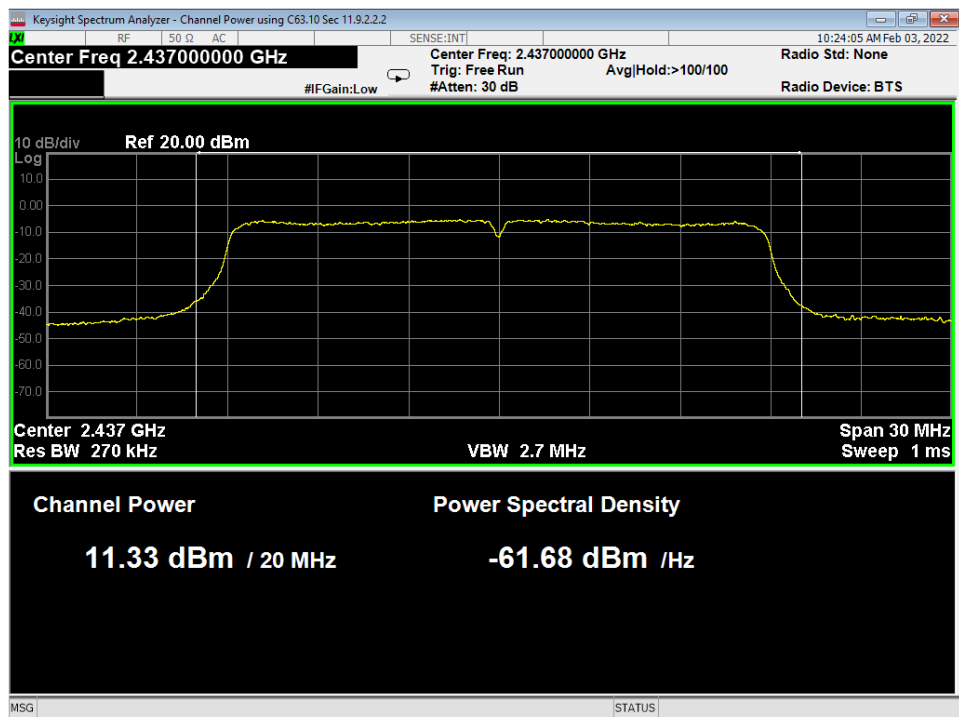


67 Power, Mid, Wifi N High Data Rate

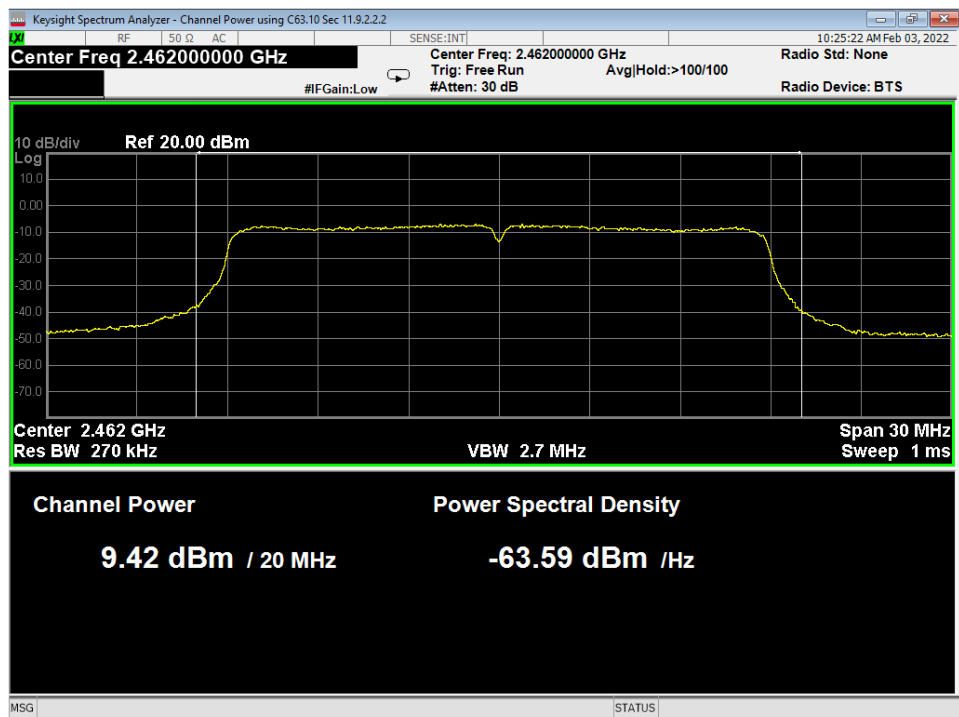


68 Power, High, Wifi N High Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

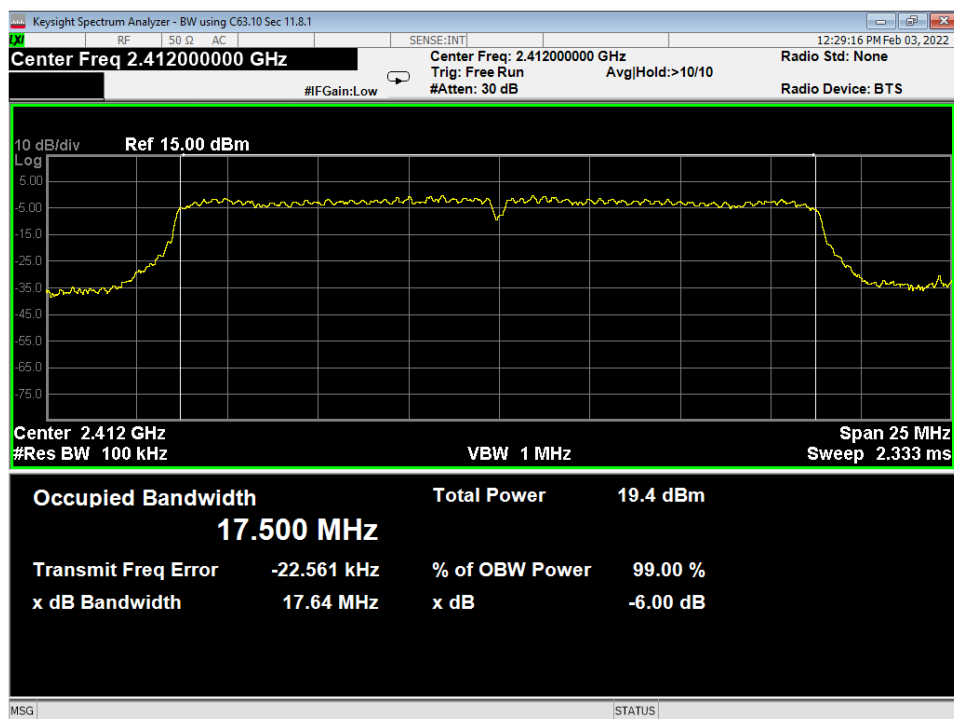


69 OBW-6dB, Low, Wifi N High Data Rate

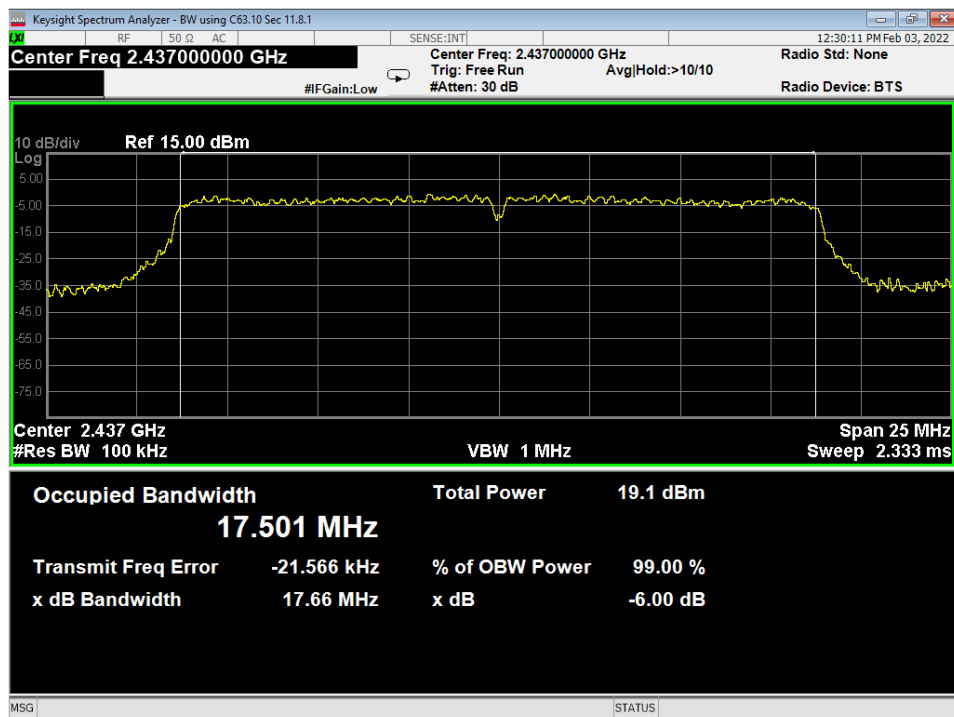


70 OBW-6dB, Mid, Wifi N High Data Rate


Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

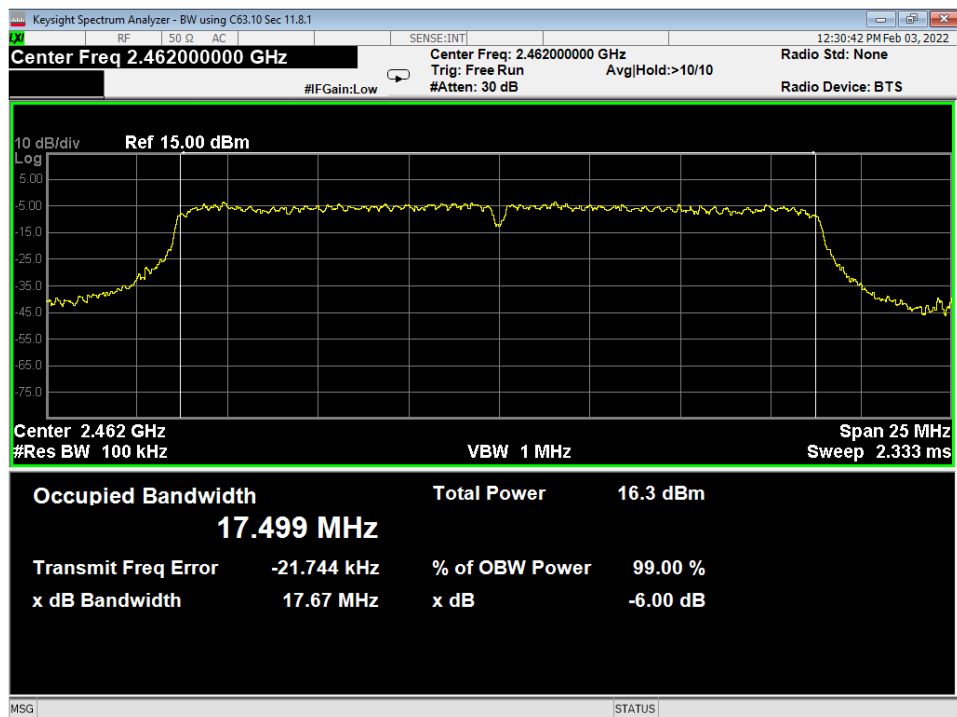


71 OBW-6dB, High, Wifi N High Data Rate

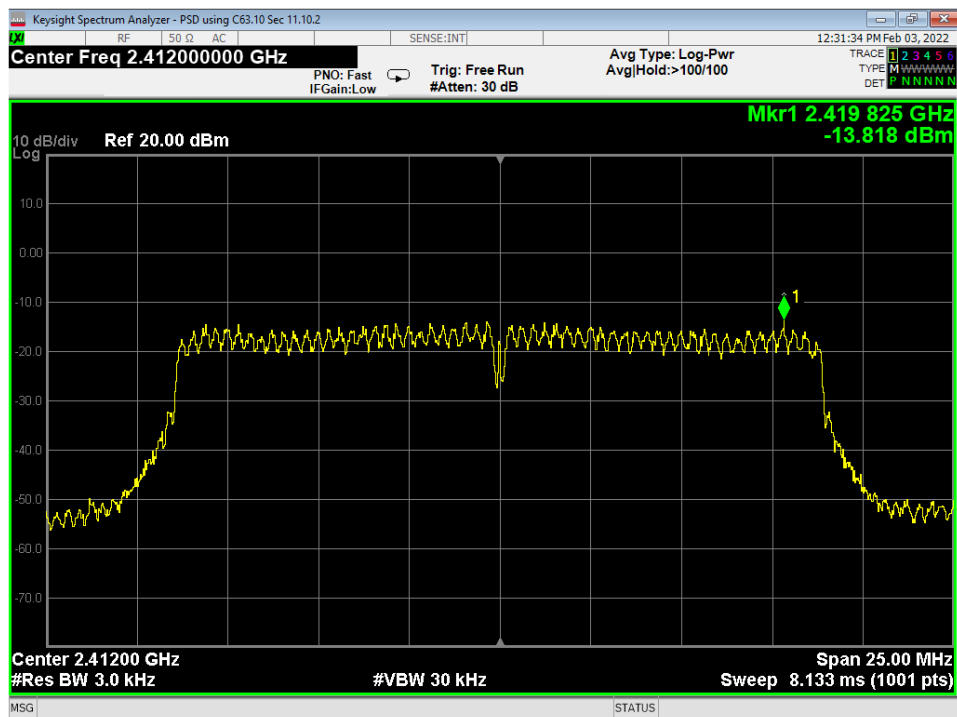


72 PSD, Low, Wifi N High Data Rate

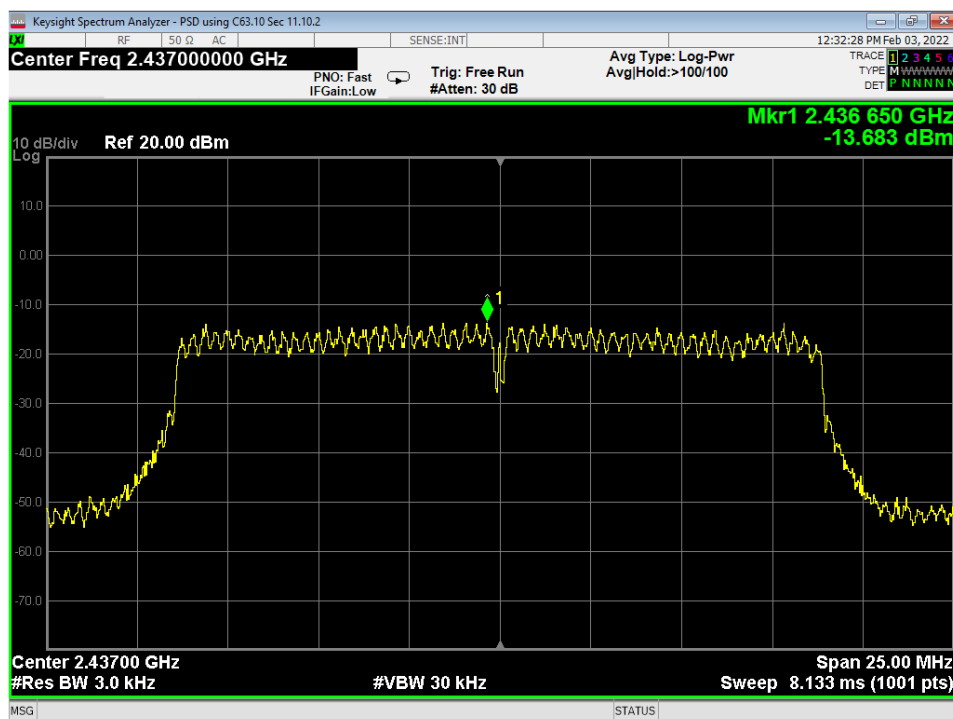


73 PSD, Mid, Wifi N High Data Rate

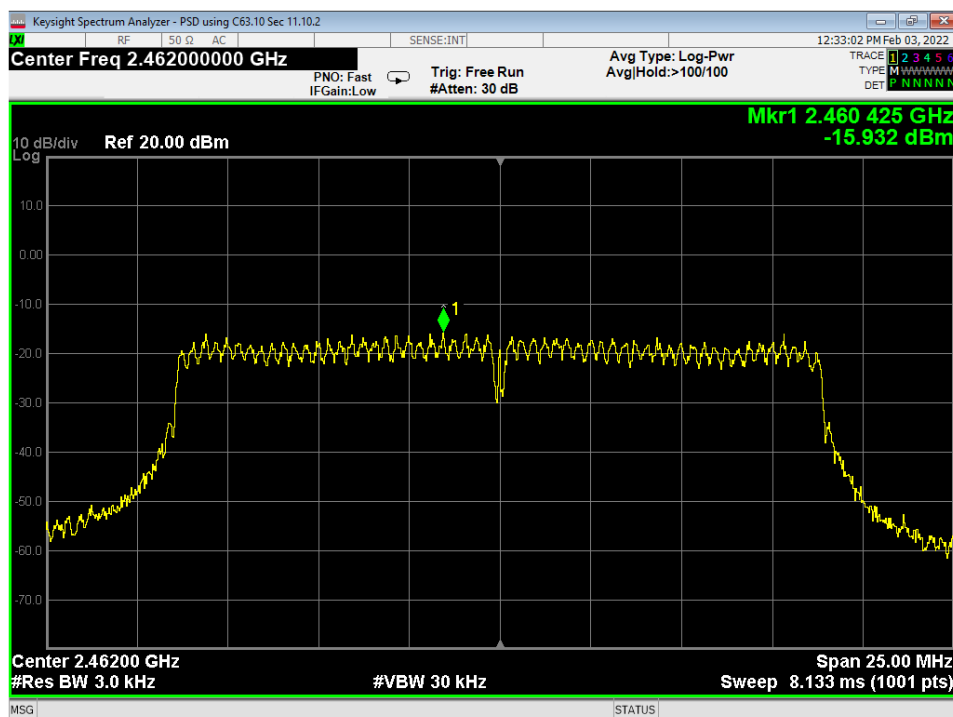

74 PSD, High, Wifi N High Data Rate

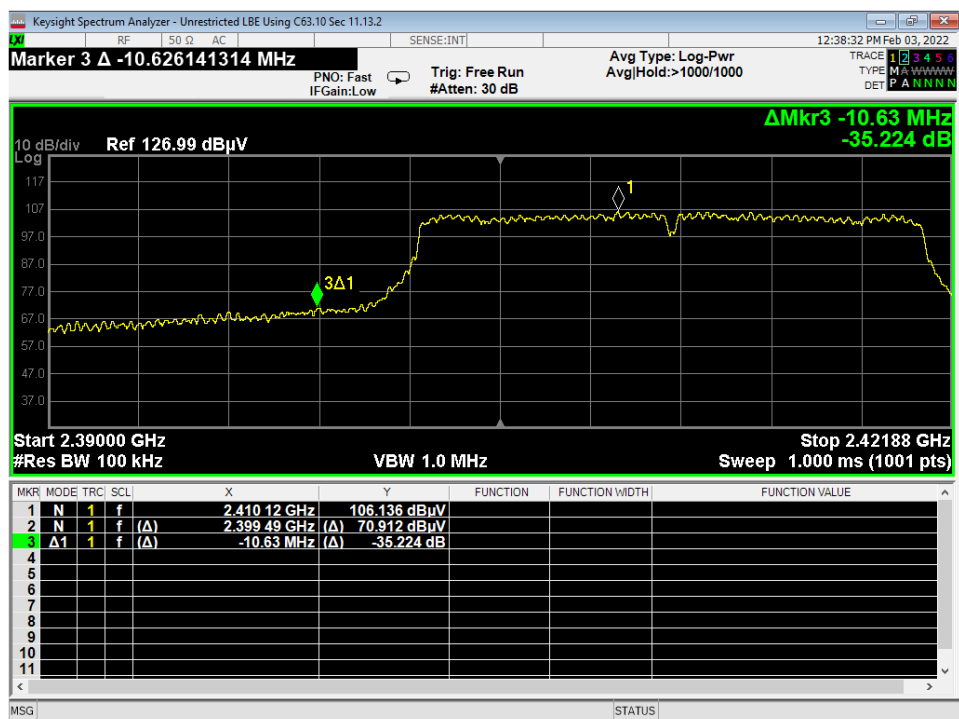


75 Lower Bandedge, Unrestricted, Wifi N High Data Rate

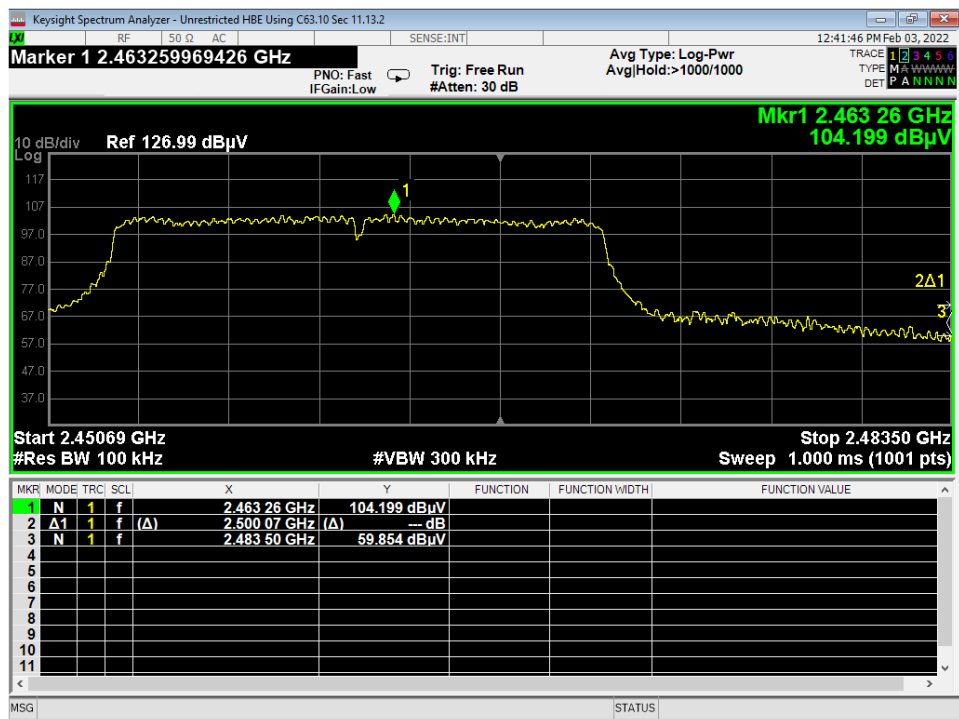


76 Higher Bandedge, Unrestricted, Wifi N High Data Rate

Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

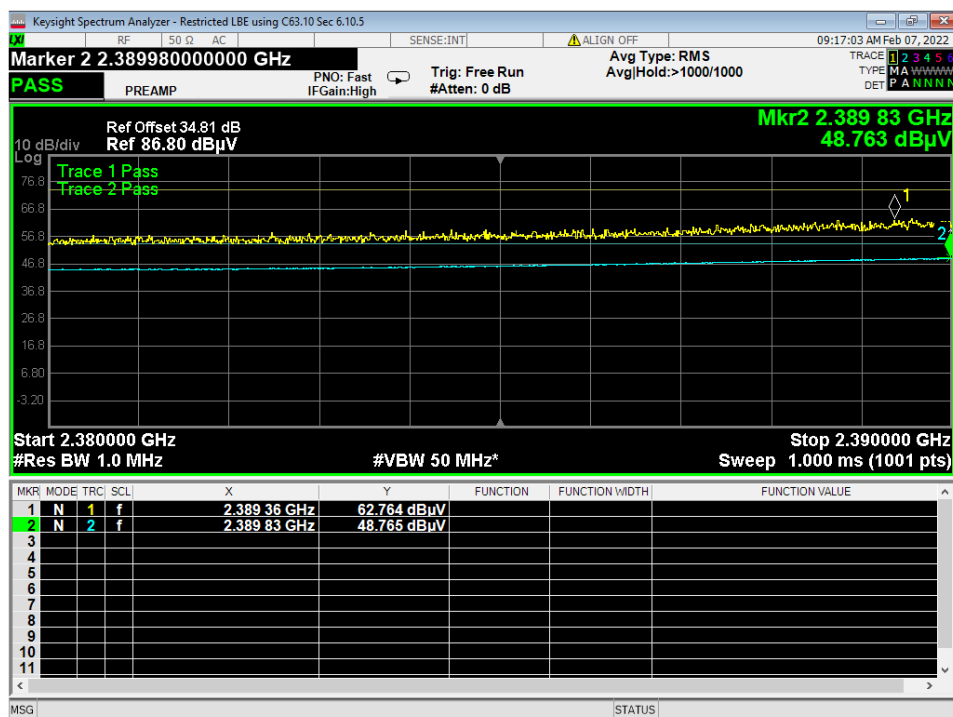

77 Lower Bandedge, Restricted, Wifi N High Data Rate

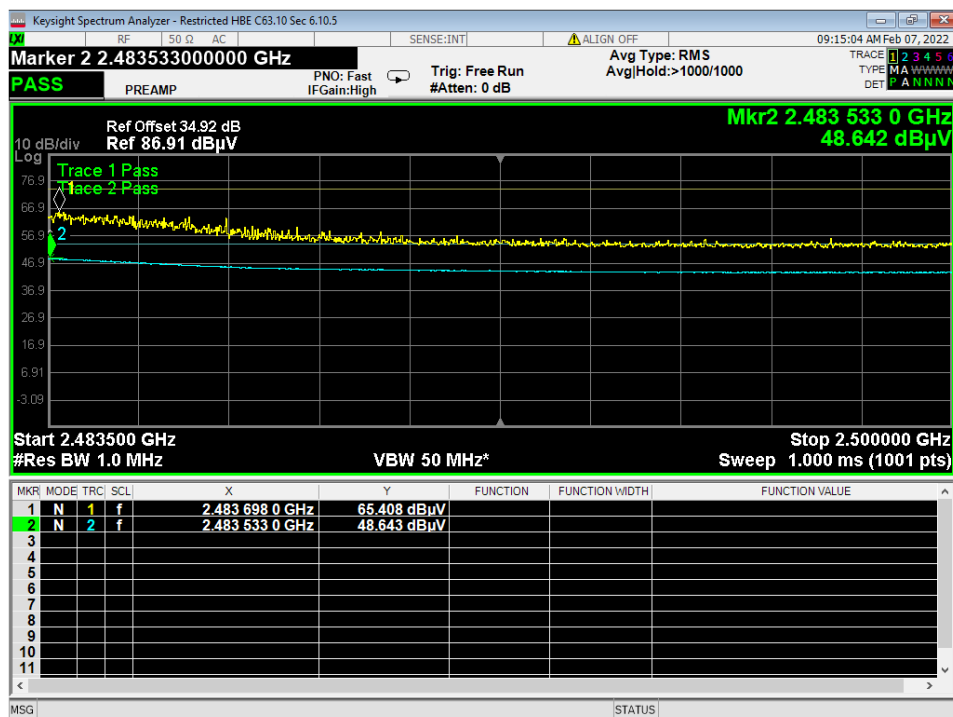

78 Higher Bandedge, Restricted, Wifi N High Data Rate





Report Number:	R20211006-20-E4A	Rev	B
Prepared for:	Garmin International, Inc.		

REPORT END