

FCC RF Test Report

APPLICANT : PAX Technology Limited
EQUIPMENT : Smart Tablet
BRAND NAME : PAX
MODEL NAME : Aries6
FCC ID : V5PAR6
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 11, 2019 and testing was completed on Jun. 14, 2019. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

Eric Shih

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	26
3.6 AC Conducted Emission Measurement.....	30
3.7 Antenna Requirements.....	32
4 LIST OF MEASURING EQUIPMENT	33
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR941109C	Rev. 01	Initial issue of report	Aug. 02, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.64 dB at 30.000 MHz for Quasi-Peak
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.90 dB at 0.640 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

PAX Technology Limited

Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

1.2 Manufacturer

PAX Computer Technology (Shenzhen) Co., Ltd.

4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Tablet
Brand Name	PAX
Model Name	Aries6
FCC ID	V5PAR6
EUT supports Radios application	WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE/GPS/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conducted: 866732039393476 Conduction: 866732039389946 Radiation: 866732039389581
HW Version	N/A
SW Version	N/A
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to antenna	802.11b : 16.10 dBm (0.0407 W) 802.11g : 15.90 dBm (0.0389 W) 802.11n HT20 : 14.60 dBm (0.0288 W)
99% Occupied Bandwidth	802.11b : 11.99MHz 802.11g : 16.98MHz 802.11n HT20 : 18.08MHz
Antenna Type / Gain	Internal Antenna with gain 1.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WCDMA Band II Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable(Charging from Adapter) + Earphone
Remark: For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable.	

2.3 Connection Diagram of Test System

For Radiation

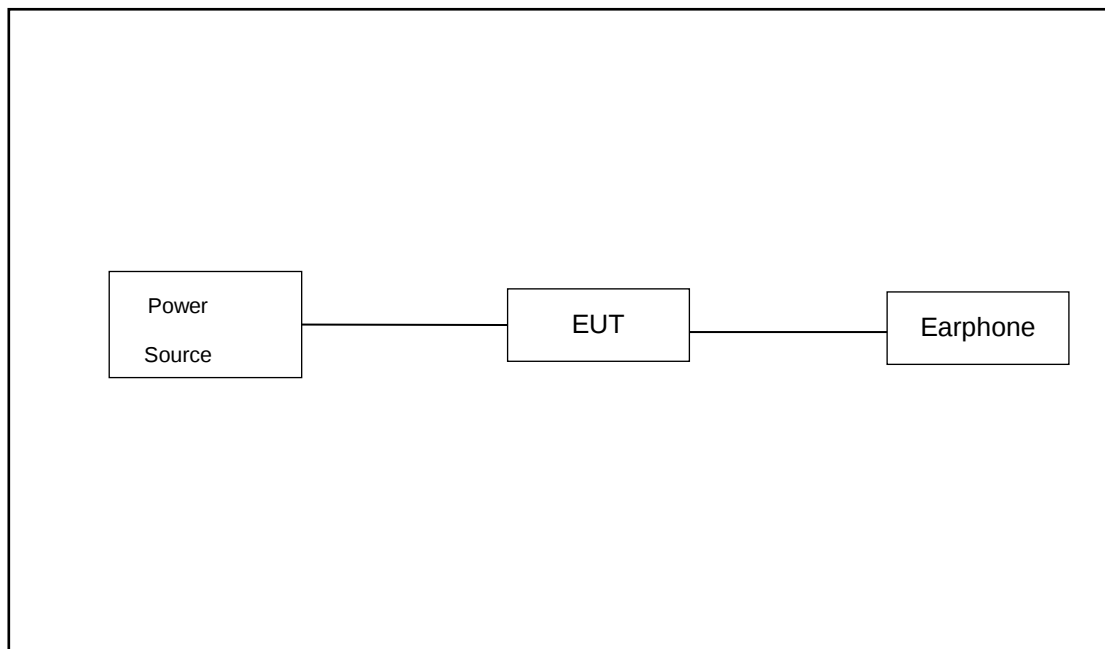

For Conducted Emission

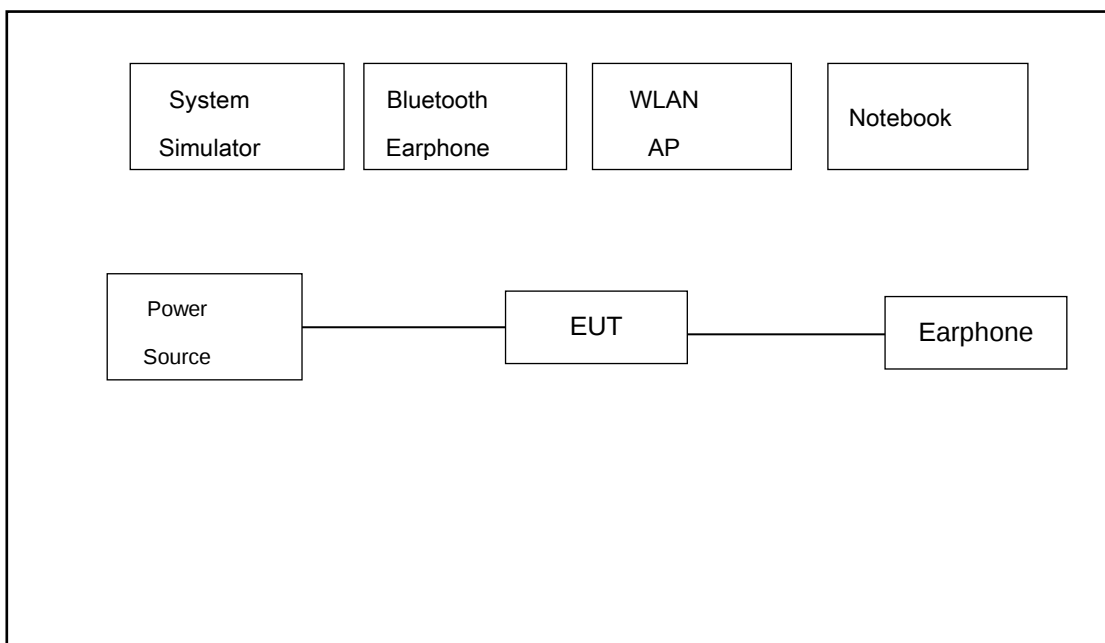

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-820L	KA21R820LA1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A
5.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.0 + 10 = 15.0 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 300 kHz and set the Video bandwidth (VBW) = 1MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

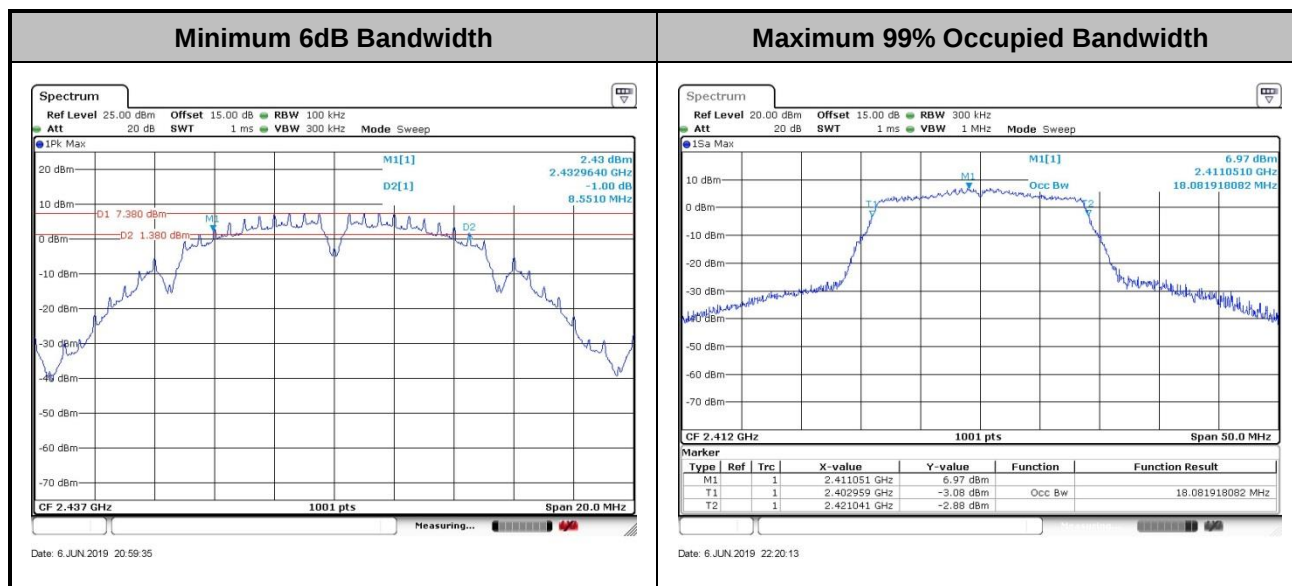

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

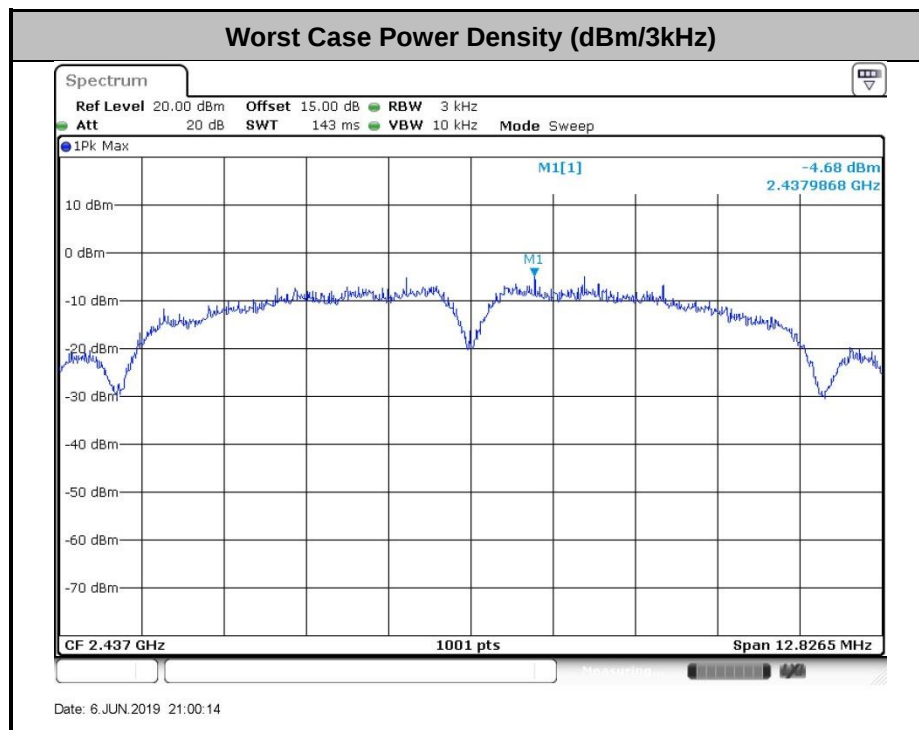

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

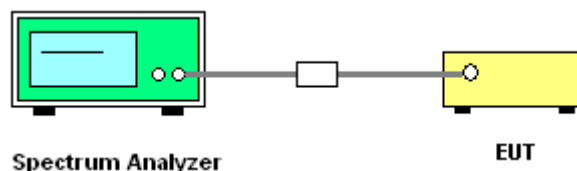




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Zhang Jiang	Temperature :	21~25°C
		Relative Humidity :	51~54%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

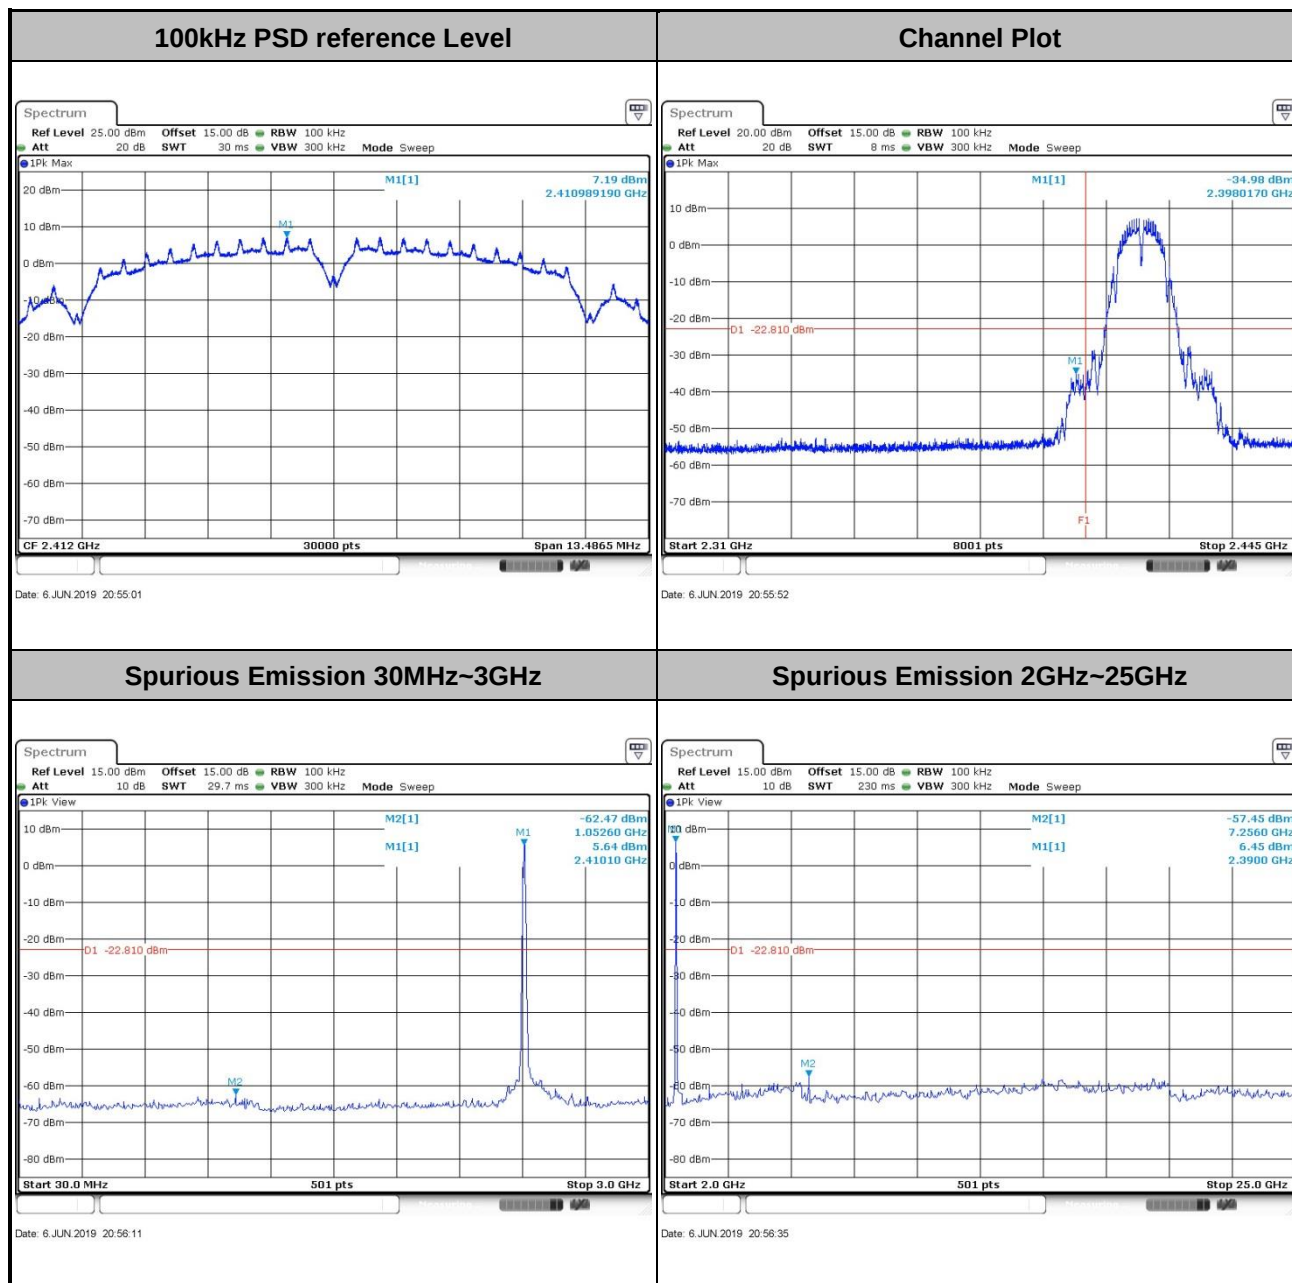




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

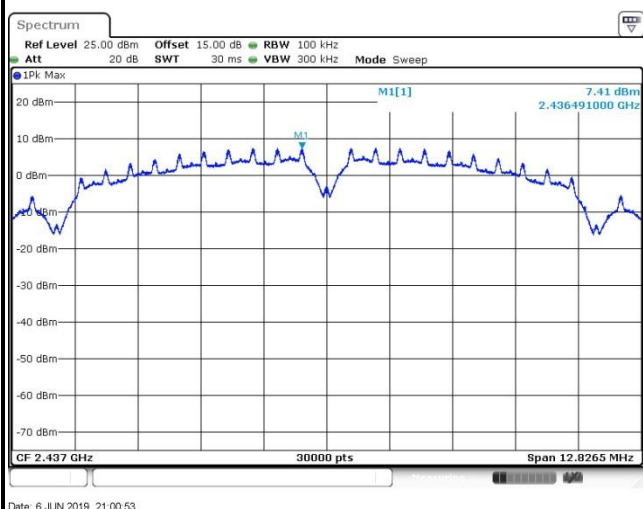


Channel Plot

Spurious Emission 30MHz~3GHz

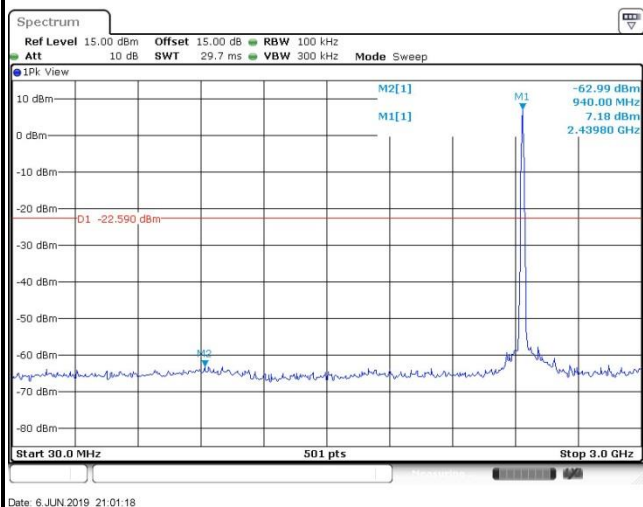

Spurious Emission 2GHz~25GHz

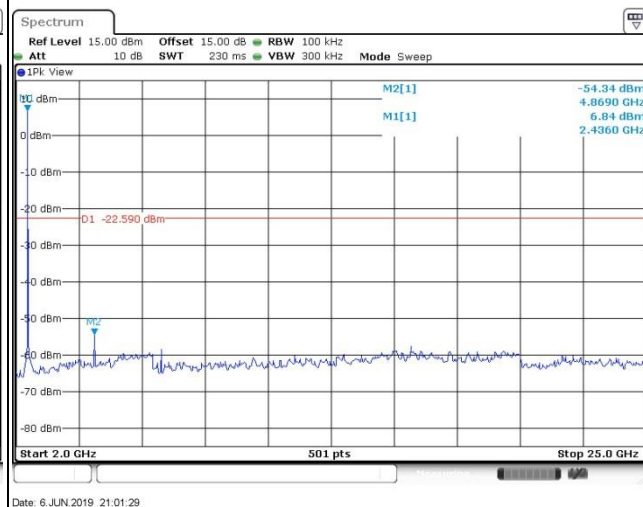





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

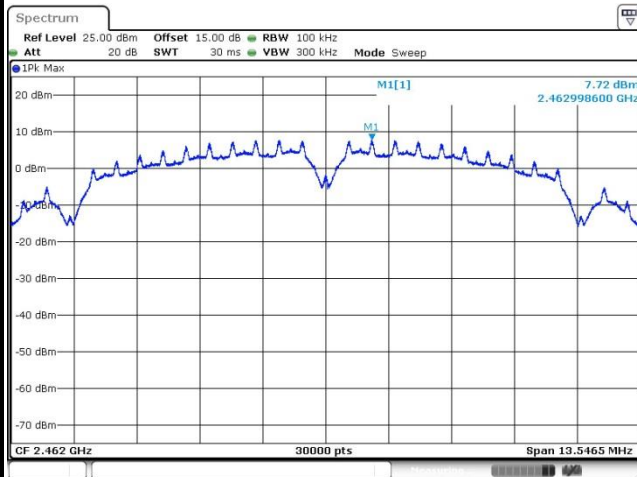


Channel Plot

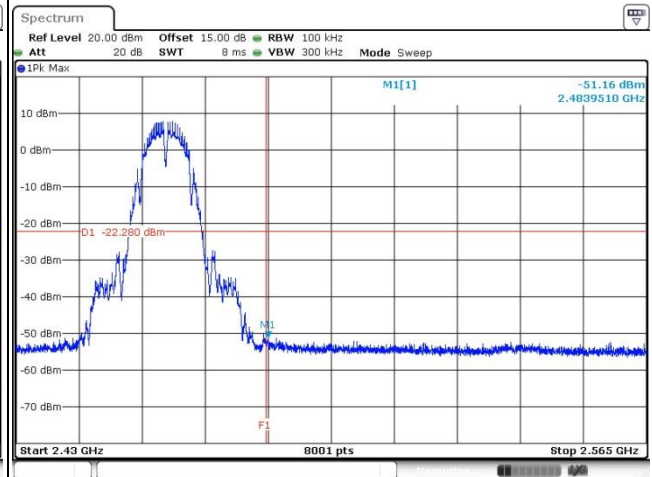

Spurious Emission 30MHz~3GHz

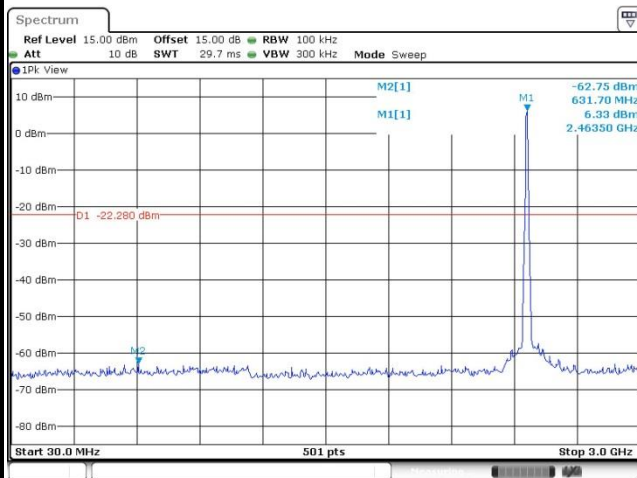


Spurious Emission 2GHz~25GHz

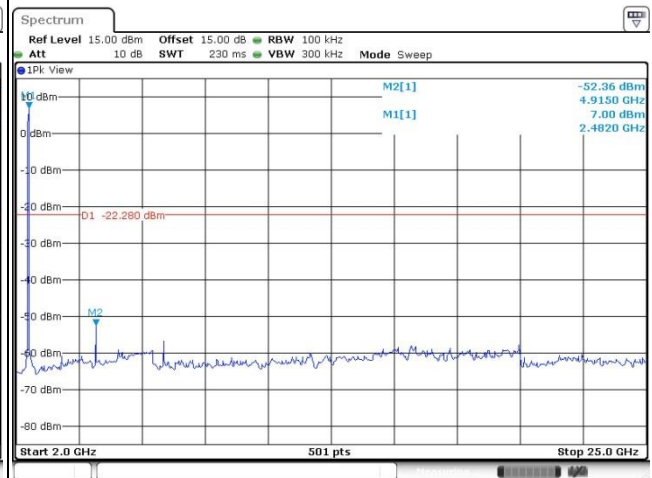




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

100kHz PSD reference Level

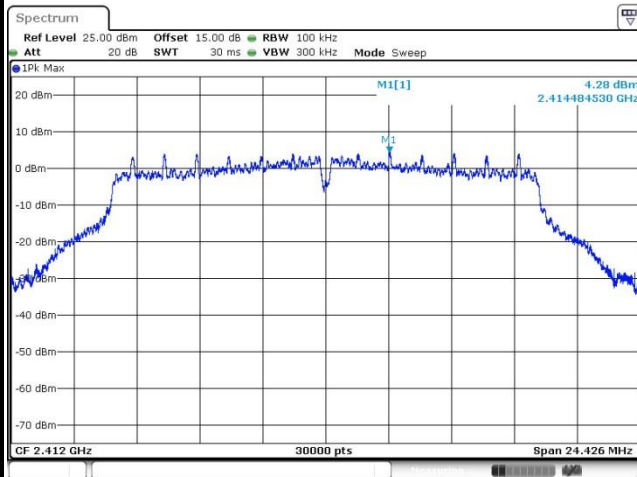


Date: 6 JUN 2019 21:31:34

Channel Plot

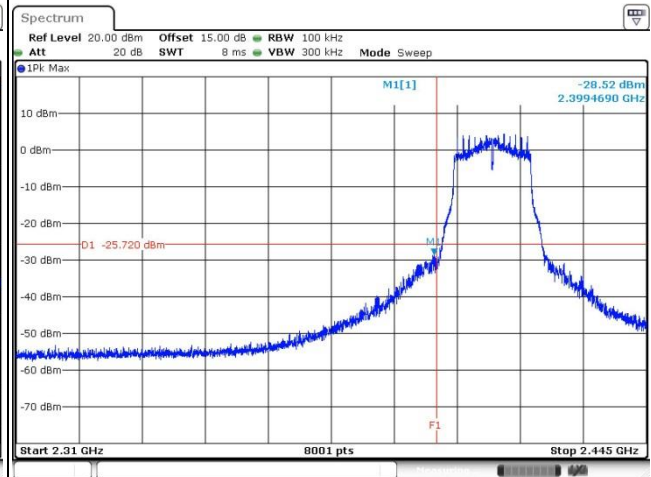


Date: 6 JUN 2019 21:32:08

Spurious Emission 30MHz~3GHz

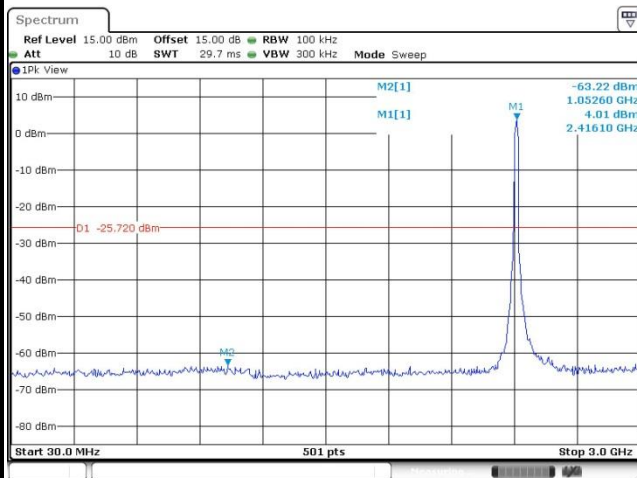

Date: 6 JUN 2019 21:32:32

Spurious Emission 2GHz~25GHz

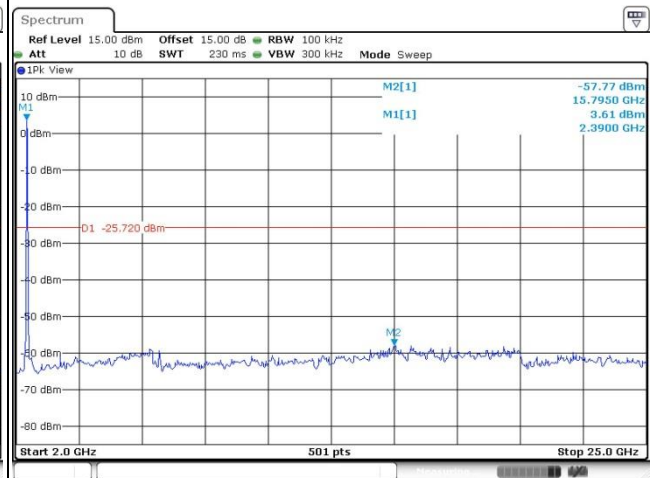


Date: 6 JUN 2019 21:32:53




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

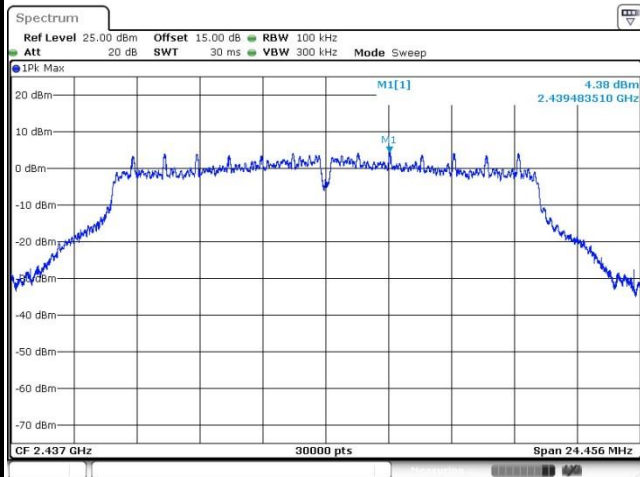


Channel Plot

Spurious Emission 30MHz~3GHz

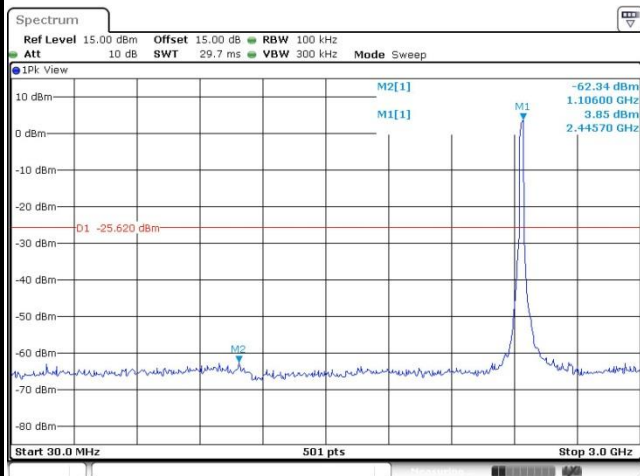


Spurious Emission 2GHz~25GHz

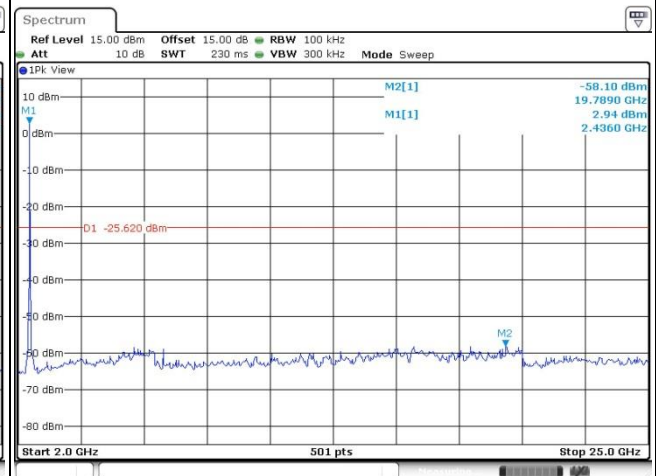




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

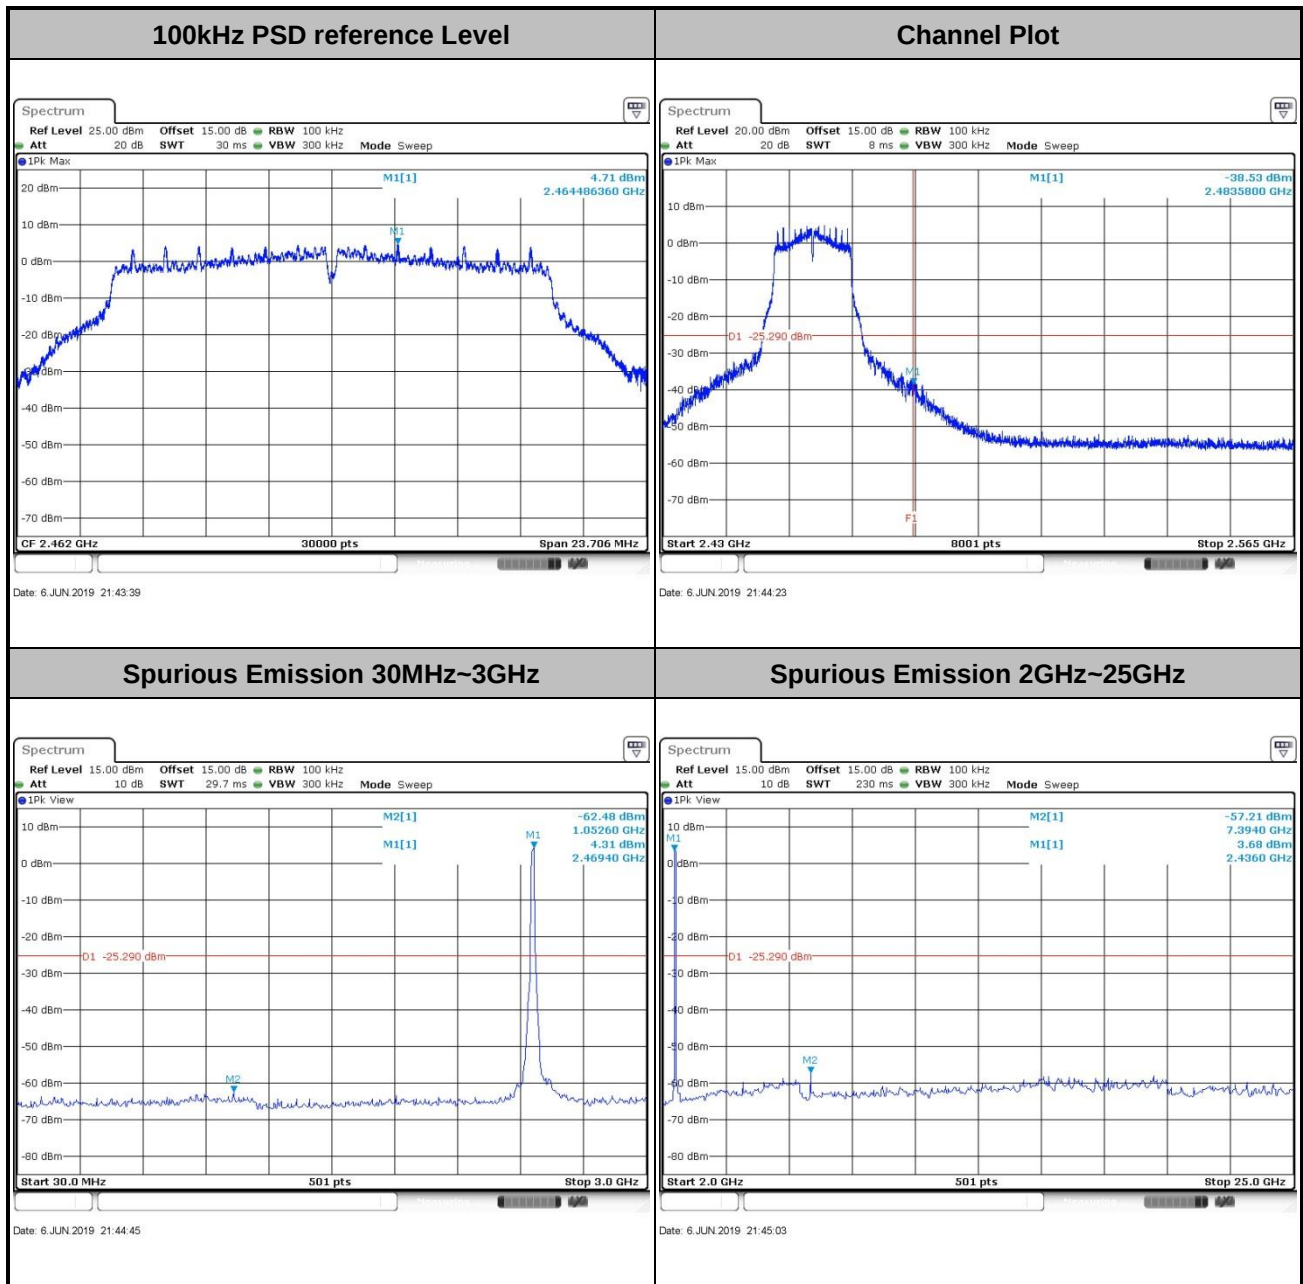




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----


100kHz PSD reference Level

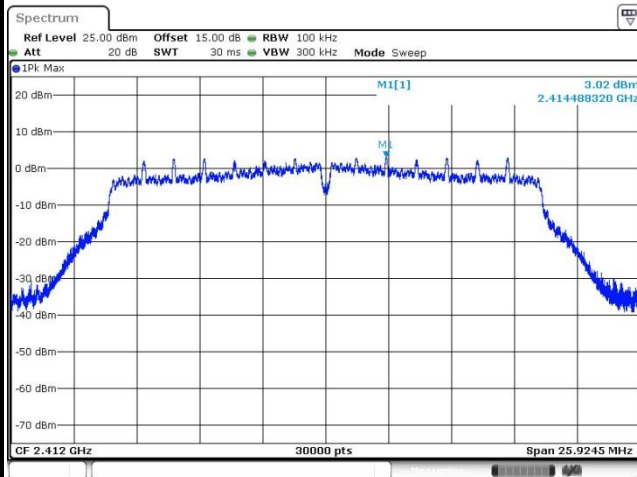


Channel Plot

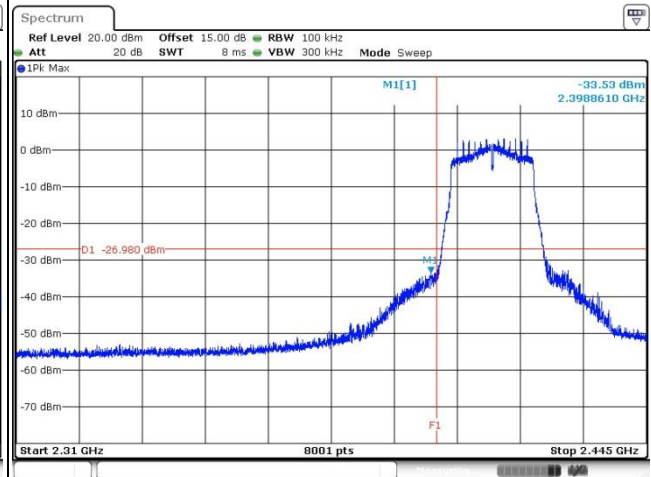

Spurious Emission 30MHz~3GHz

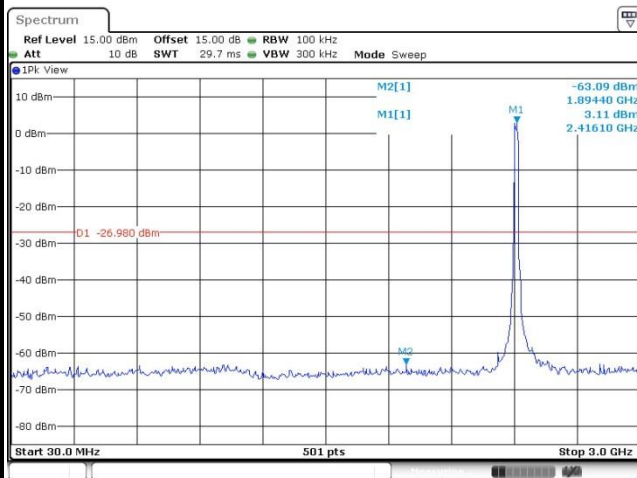


Spurious Emission 2GHz~25GHz

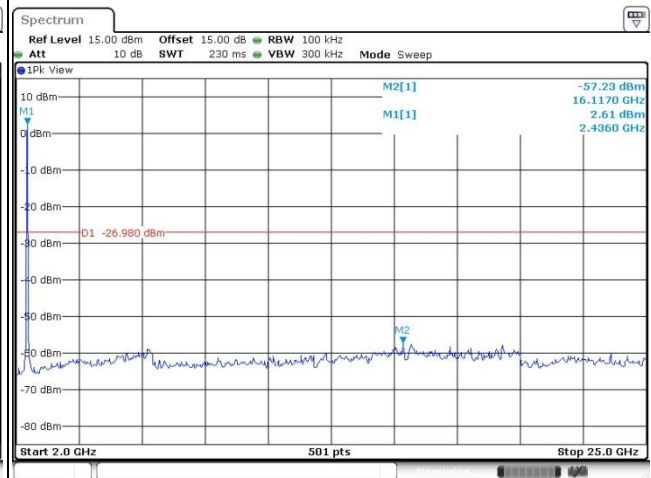




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

100kHz PSD reference Level

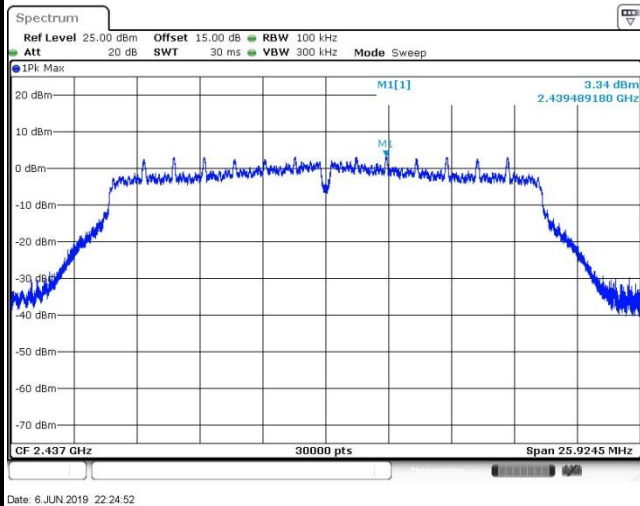


Channel Plot

Spurious Emission 30MHz~3GHz

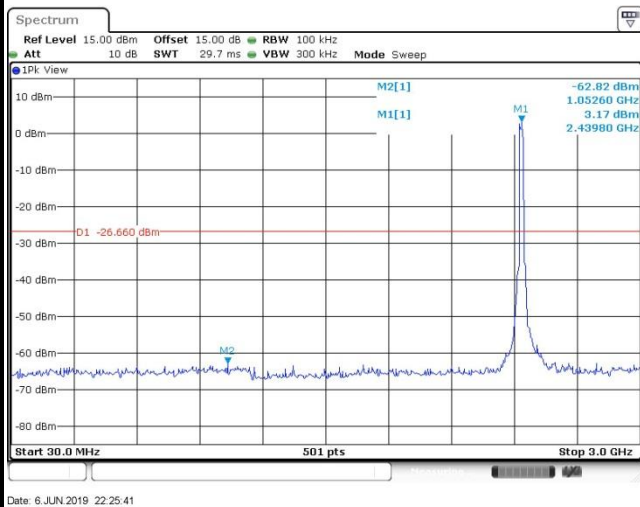


Spurious Emission 2GHz~25GHz

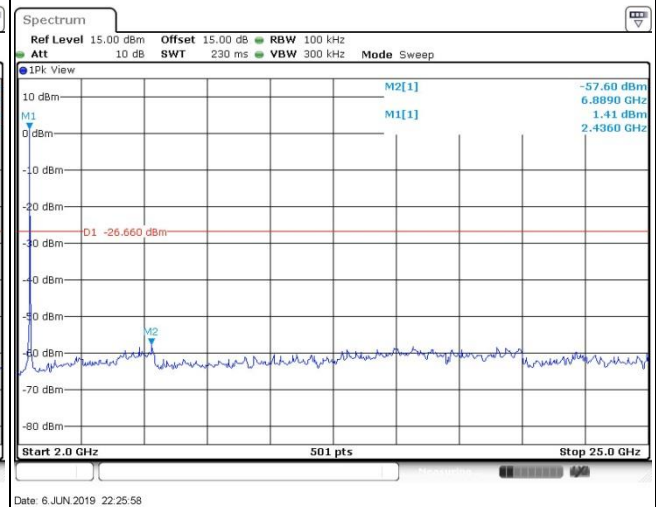



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

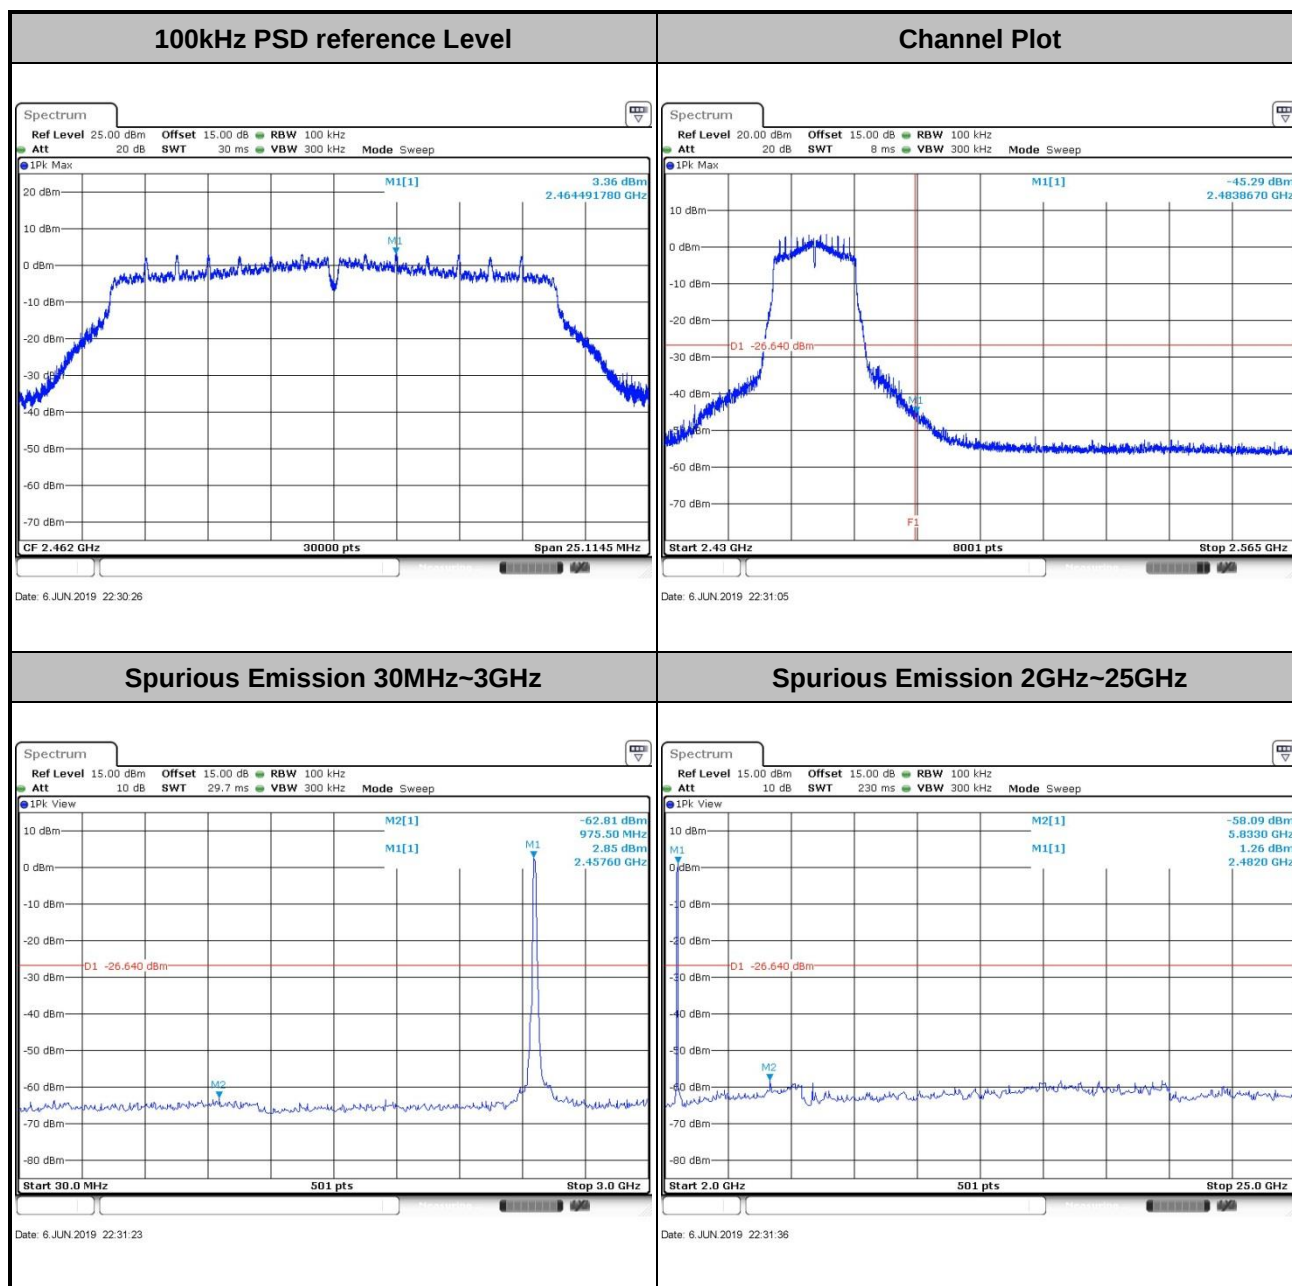

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

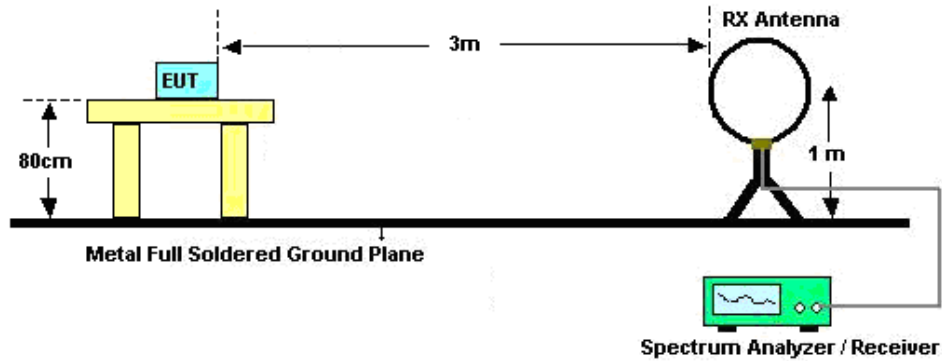

For radiated emissions from 30MHz to 1GHz

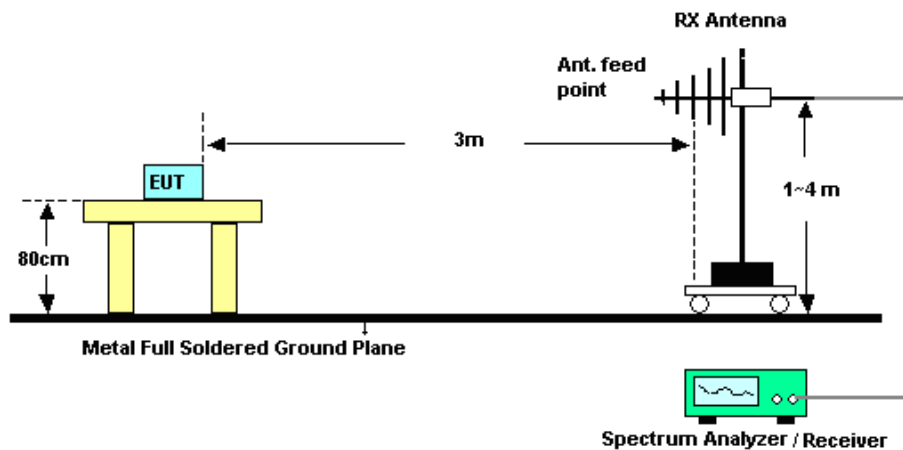

For radiated emissions above 1GHz

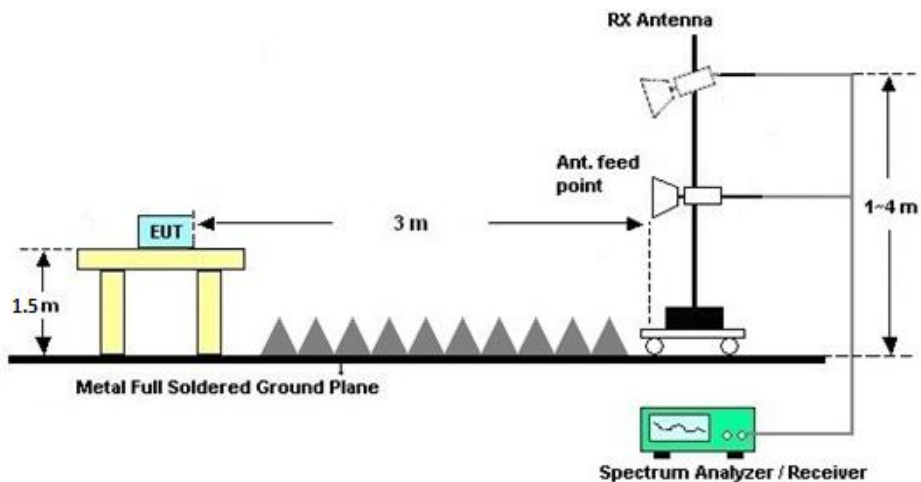



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

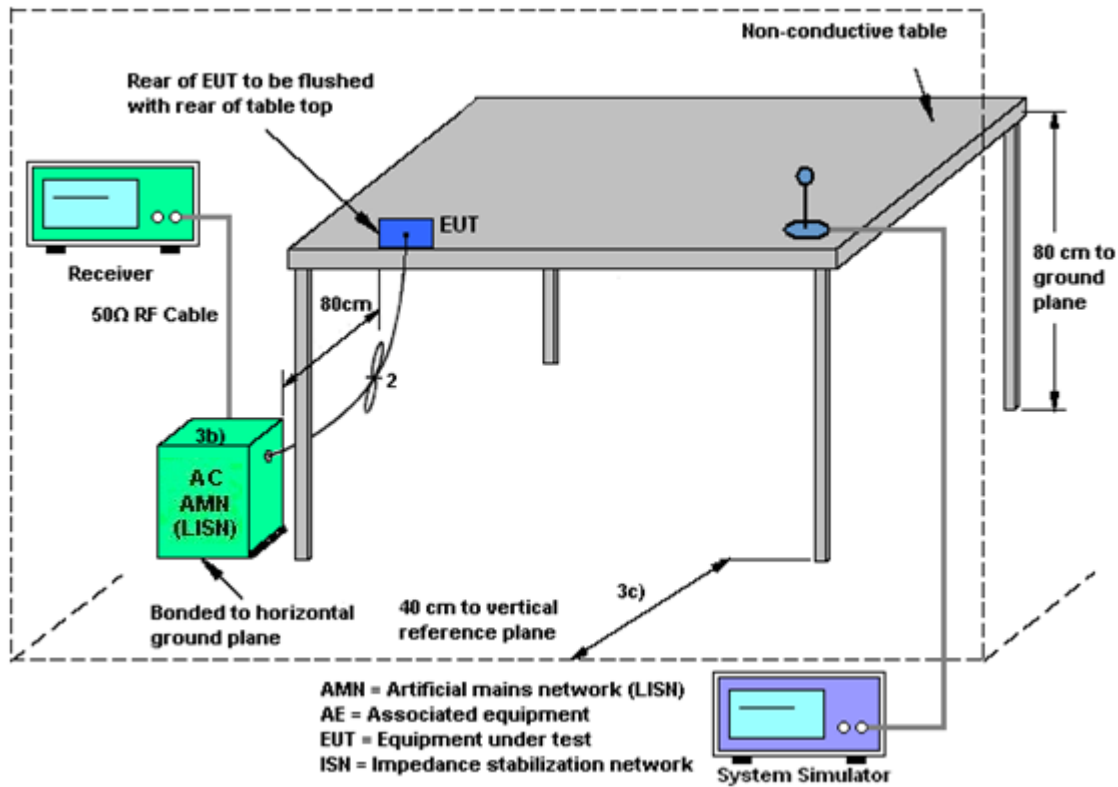

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 18, 2019	Jun. 06, 2019	Apr. 17, 2020	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 22, 2018	Jun. 06, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 22, 2018	Jun. 06, 2019	Dec. 21, 2019	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 18, 2019	Jun. 14, 2019	Apr. 17, 2020	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 18, 2019	Jun. 14, 2019	Apr. 17, 2020	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2019	Jun. 14, 2019	May 28, 2020	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Apr. 19, 2019	Jun. 14, 2019	Apr. 18, 2020	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 01, 2019	Jun. 14, 2019	Mar. 31, 2020	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 18, 2019	Jun. 14, 2019	Apr. 17, 2020	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 18, 2018	Jun. 14, 2019	Oct. 17, 2019	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2018	Jun. 14, 2019	Oct. 17, 2019	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 30, 2018	Jun. 14, 2019	Jul. 29, 2019	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 14, 2019	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 14, 2019	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 14, 2019	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Jun. 03, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	Jun. 03, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Jun. 03, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 18, 2018	Jun. 03, 2019	Jul. 17, 2019	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Jiang	Temperature:	21~25	°C
Test Date:	2019/6/6	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	1	1	2412	11.94	-	8.99	-	0.50	Pass
11b	1Mbps	1	6	2437	11.94	-	8.55	-	0.50	Pass
11b	1Mbps	1	11	2462	11.99	-	9.03	-	0.50	Pass
11g	6Mbps	1	1	2412	16.98	-	16.28	-	0.50	Pass
11g	6Mbps	1	6	2437	16.93	-	16.30	-	0.50	Pass
11g	6Mbps	1	11	2462	16.83	-	15.80	-	0.50	Pass
HT20	MCS0	1	1	2412	18.08	-	17.28	-	0.50	Pass
HT20	MCS0	1	6	2437	18.08	-	17.28	-	0.50	Pass
HT20	MCS0	1	11	2462	17.98	-	16.74	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	15.60	-	-	30.00	-	1.50	-	17.10	-	36.00	-	Pass
11b	1Mbps	1	6	2437	15.80	-		30.00	-	1.50	-	17.30	-	36.00	-	Pass
11b	1Mbps	1	11	2462	16.10	-		30.00	-	1.50	-	17.60	-	36.00	-	Pass
11g	6Mbps	1	1	2412	15.40	-		30.00	-	1.50	-	16.90	-	36.00	-	Pass
11g	6Mbps	1	6	2437	15.60	-		30.00	-	1.50	-	17.10	-	36.00	-	Pass
11g	6Mbps	1	11	2462	15.90	-		30.00	-	1.50	-	17.40	-	36.00	-	Pass
HT20	MCS0	1	1	2412	14.10	-		30.00	-	1.50	-	15.60	-	36.00	-	Pass
HT20	MCS0	1	6	2437	14.30	-		30.00	-	1.50	-	15.80	-	36.00	-	Pass
HT20	MCS0	1	11	2462	14.60	-		30.00	-	1.50	-	16.10	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Power Spectral Density


2.4GHz Band												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-5.04	-	-	1.50	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-4.68	-	-	1.50	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-6.01	-	-	1.50	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-7.23	-	-	1.50	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-7.16	-	-	1.50	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-6.67	-	-	1.50	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-8.79	-	-	1.50	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-8.35	-	-	1.50	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-8.99	-	-	1.50	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

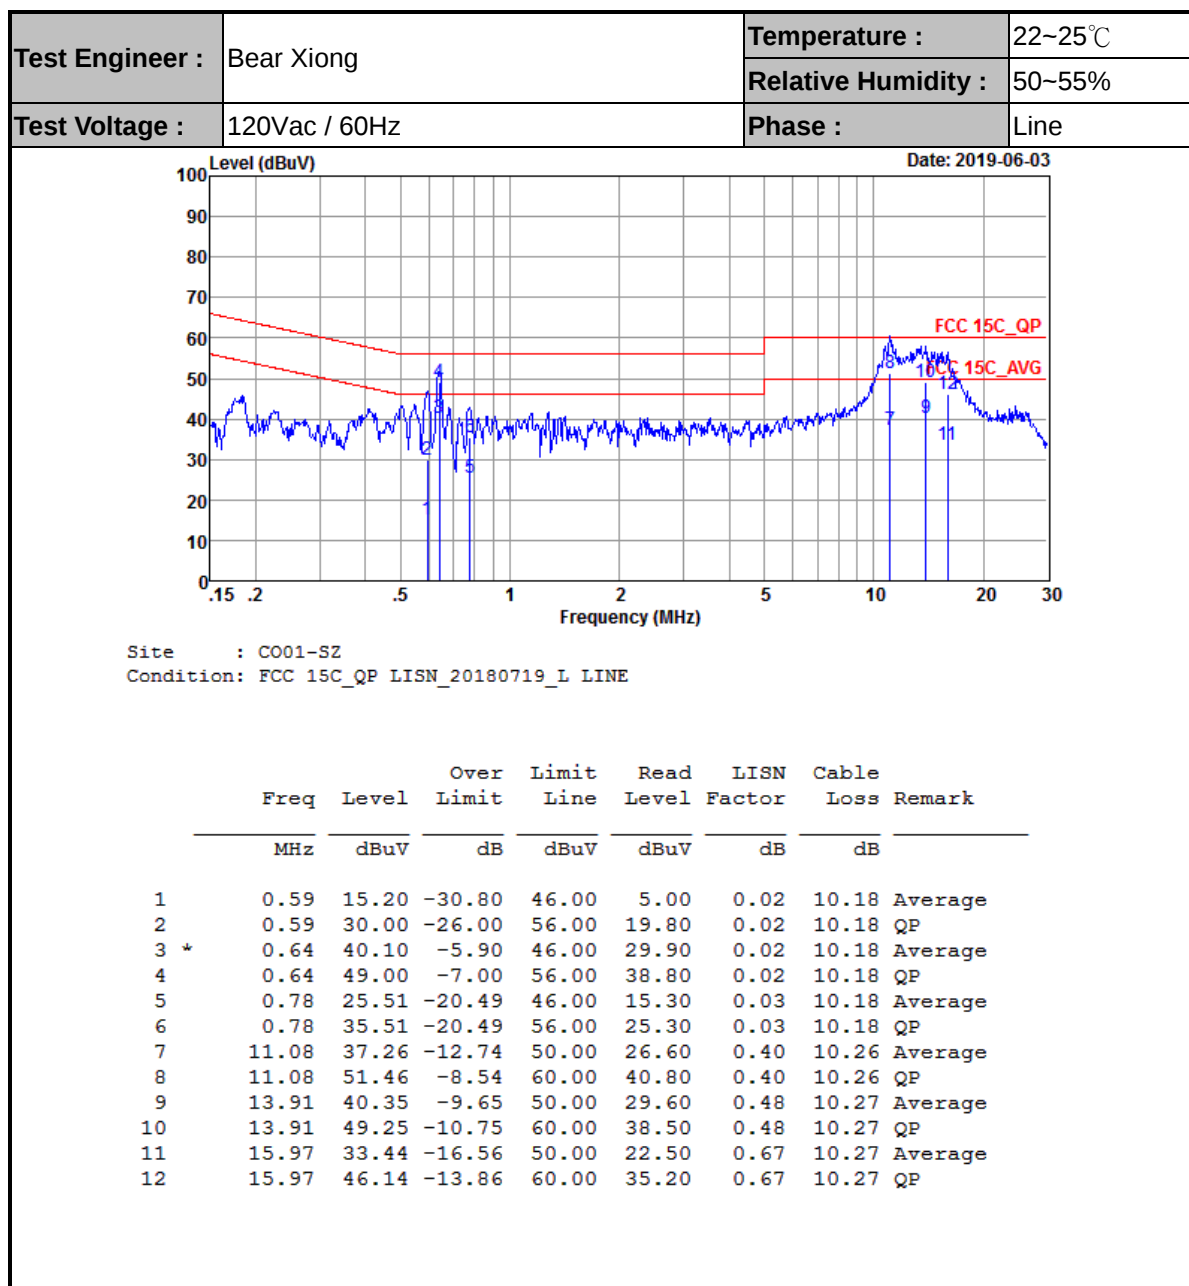

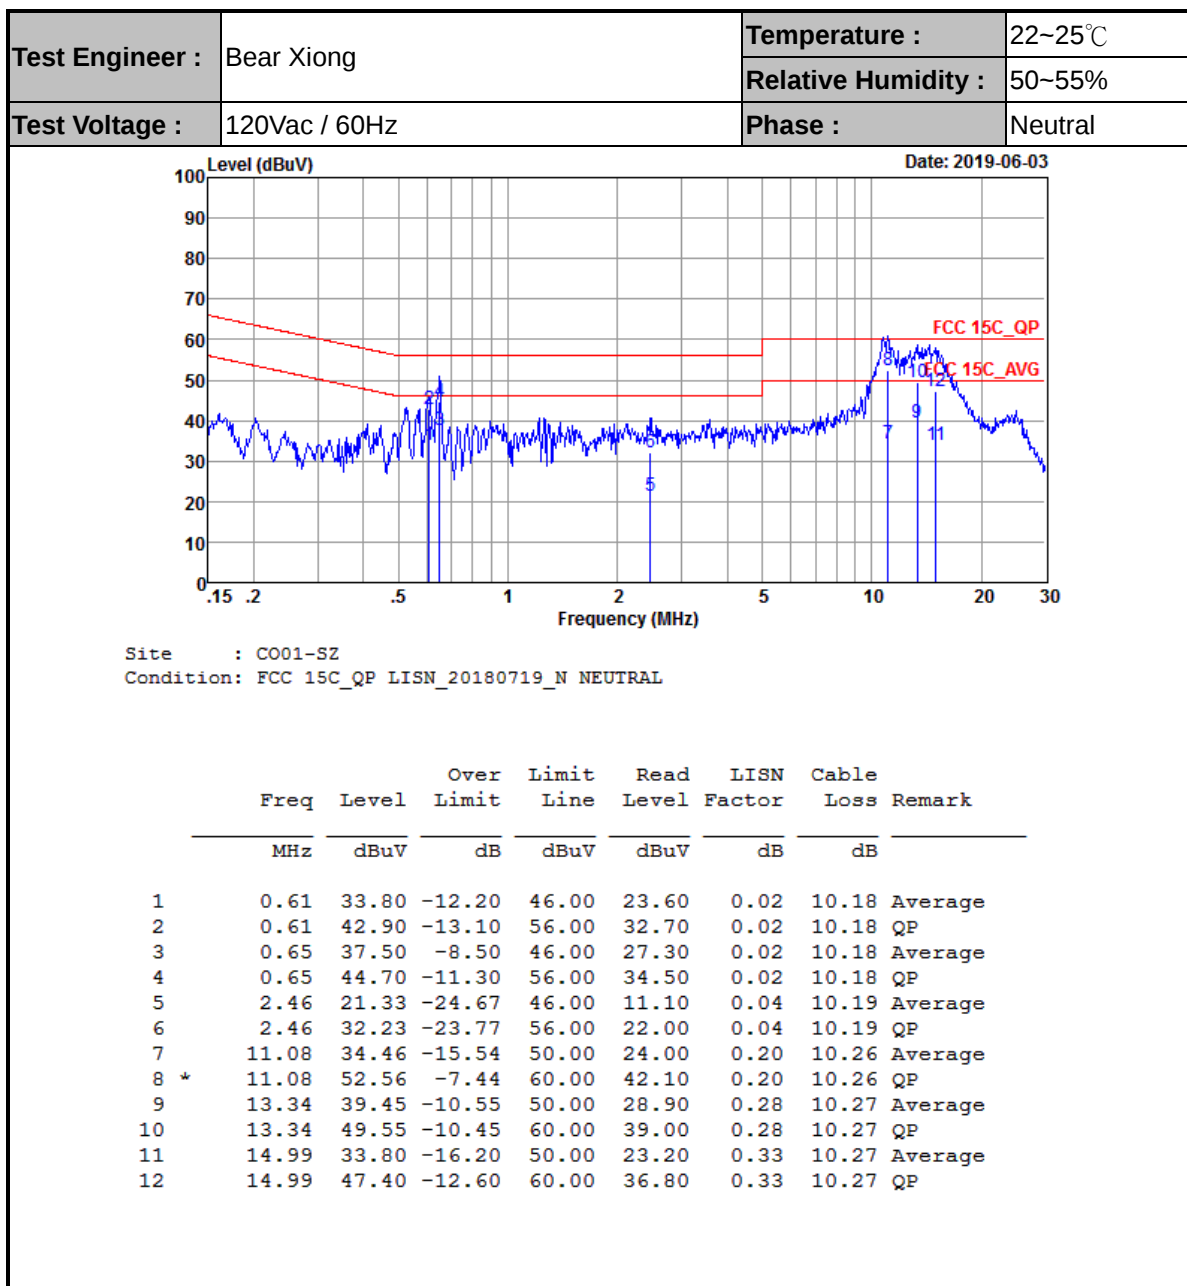



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2358.83	50.15	-23.85	74	51.51	27.85	6.81	36.02	172	205	P	H
		2383.08	38.57	-15.43	54	39.93	27.83	6.81	36	172	205	A	H
	*	2412	95.26	-	-	96.58	27.77	6.89	35.98	172	205	P	H
	*	2412	93.5	-	-	94.82	27.77	6.89	35.98	172	205	A	H
		2388.44	51.16	-22.84	74	52.45	27.8	6.89	35.98	103	342	P	V
		2389.38	39.45	-14.55	54	40.74	27.8	6.89	35.98	103	342	A	V
	*	2412	100.09	-	-	101.41	27.77	6.89	35.98	103	342	P	V
	*	2412	97.19	-	-	98.51	27.77	6.89	35.98	103	342	A	V
802.11b CH 06 2437MHz		2366.84	49.06	-24.94	74	50.4	27.85	6.81	36	188	208	P	H
		2385.04	38.56	-15.44	54	39.84	27.83	6.89	36	188	208	A	H
	*	2437	96.15	-	-	97.43	27.71	6.97	35.96	188	208	P	H
	*	2437	94.66	-	-	95.92	27.71	6.97	35.94	188	208	A	H
		2496.36	49.96	-24.04	74	51.18	27.63	7.05	35.9	188	208	P	H
		2495.94	39.51	-14.49	54	40.73	27.63	7.05	35.9	188	208	A	H
		2387.56	49.77	-24.23	74	51.06	27.8	6.89	35.98	122	340	P	V
		2389.1	38.68	-15.32	54	39.97	27.8	6.89	35.98	122	340	A	V
	*	2437	99.95	-	-	101.23	27.71	6.97	35.96	122	340	P	V
	*	2437	95.55	-	-	96.83	27.71	6.97	35.96	122	340	A	V
		2483.76	49.32	-24.68	74	50.53	27.66	7.05	35.92	122	340	P	V
		2495.87	39.08	-14.92	54	40.3	27.63	7.05	35.9	122	340	A	V



802.11b CH 11 2462MHz	*	2462	96.41	-	-	97.69	27.69	6.97	35.94	185	208	P	H
	*	2462	94.75	-	-	96.03	27.69	6.97	35.94	185	208	A	H
		2488.2	49.84	-24.16	74	51.06	27.63	7.05	35.9	185	208	P	H
		2496	39.75	-14.25	54	40.97	27.63	7.05	35.9	185	208	A	H
	*	2462	100.21	-	-	101.49	27.69	6.97	35.94	118	341	P	V
	*	2462	95.47	-	-	96.75	27.69	6.97	35.94	118	341	A	V
		2484.92	50.2	-23.8	74	51.41	27.66	7.05	35.92	118	341	P	V
		2483.52	39.8	-14.2	54	41.01	27.66	7.05	35.92	118	341	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	40.77	-33.23	74	56.73	31.12	10.4	57.48	145	274	P	H
		4824	40.57	-33.43	74	56.53	31.12	10.4	57.48	191	220	P	V
802.11b CH 06 2437MHz		4874	41.43	-32.57	74	57.33	31.17	10.45	57.52	112	229	P	H
		7311	47.91	-26.09	74	57.82	36.03	12.98	58.92	174	100	P	H
		4874	42.4	-31.6	74	58.3	31.17	10.45	57.52	156	360	P	V
		7311	49.62	-24.38	74	59.53	36.03	12.98	58.92	120	106	P	V
802.11b CH 11 2462MHz		4924	41.05	-32.95	74	56.83	31.22	10.55	57.55	133	180	P	H
		7386	48.79	-25.21	74	58.41	36.29	13.05	58.96	145	274	P	H
		4924	40.62	-33.38	74	56.4	31.22	10.55	57.55	156	360	P	V
		7386	46.77	-27.23	74	56.39	36.29	13.05	58.96	166	210	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.7	57.6	-16.4	74	58.89	27.8	6.89	35.98	136	51	P	H
		2390	45.33	-8.67	54	46.62	27.8	6.89	35.98	136	51	A	H
	*	2412	98.37	-	-	99.69	27.77	6.89	35.98	136	51	P	H
	*	2412	92.5	-	-	93.82	27.77	6.89	35.98	136	51	A	H
		2390	58.89	-15.11	74	60.18	27.8	6.89	35.98	105	344	P	V
		2390	45.48	-8.52	54	46.77	27.8	6.89	35.98	105	344	A	V
	*	2412	100.93	-	-	102.25	27.77	6.89	35.98	105	344	P	V
	*	2412	93.27	-	-	94.59	27.77	6.89	35.98	105	344	A	V
802.11g CH 06 2437MHz		2354.8	49.84	-24.16	74	51.2	27.85	6.81	36.02	135	51	P	H
		2389.24	39.83	-14.17	54	41.12	27.8	6.89	35.98	135	51	A	H
	*	2437	97.06	-	-	98.34	27.71	6.97	35.96	135	51	P	H
	*	2437	90.59	-	-	91.87	27.71	6.97	35.96	135	51	A	H
		2495.45	50.4	-23.6	74	51.62	27.63	7.05	35.9	135	51	P	H
		2495.8	43.12	-10.88	54	44.34	27.63	7.05	35.9	135	51	A	H
		2382.94	50	-24	74	51.36	27.83	6.81	36	103	343	P	V
		2388.68	39.94	-14.06	54	41.23	27.8	6.89	35.98	103	343	A	V
	*	2437	101.28	-	-	102.56	27.71	6.97	35.96	103	343	P	V
	*	2437	94.09	-	-	95.37	27.71	6.97	35.96	103	343	A	V
		2489.43	51.12	-22.88	74	52.34	27.63	7.05	35.9	103	343	P	V
		2483.76	40.27	-13.73	54	41.48	27.66	7.05	35.92	103	343	A	V



802.11g CH 11 2462MHz	*	2462	97.88	-	-	99.16	27.69	6.97	35.94	132	48	P	H
	*	2462	91.04	-	-	92.32	27.69	6.97	35.94	132	48	A	H
		2483.72	59	-15	74	60.21	27.66	7.05	35.92	132	48	P	H
		2483.76	43.36	-10.64	54	44.57	27.66	7.05	35.92	132	48	A	H
	*	2462	101.31	-	-	102.59	27.69	6.97	35.94	121	344	P	V
	*	2462	94.59	-	-	95.87	27.69	6.97	35.94	121	344	A	V
		2483.64	62.21	-11.79	74	63.42	27.66	7.05	35.92	121	344	P	V
		2483.68	45.98	-8.02	54	47.19	27.66	7.05	35.92	121	344	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	40.4	-33.6	74	56.36	31.12	10.4	57.48	145	274	P	H
		4824	40.79	-33.21	74	56.75	31.12	10.4	57.48	191	220	P	V
802.11g CH 06 2437MHz		4874	40.92	-33.08	74	56.82	31.17	10.45	57.52	112	229	P	H
		7311	47.86	-26.14	74	57.77	36.03	12.98	58.92	174	100	P	H
		4874	40.75	-33.25	74	56.65	31.17	10.45	57.52	156	360	P	V
		7311	47.59	-26.41	74	57.5	36.03	12.98	58.92	120	106	P	V
802.11g CH 11 2462MHz		4924	41.91	-32.09	74	57.69	31.22	10.55	57.55	133	180	P	H
		7386	48.09	-25.91	74	57.71	36.29	13.05	58.96	145	274	P	H
		4924	40.33	-33.67	74	56.11	31.22	10.55	57.55	156	360	P	V
		7386	47.95	-26.05	74	57.57	36.29	13.05	58.96	166	210	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2388.86	58.06	-15.94	74	59.35	27.8	6.89	35.98	117	53	P	H
		2390	44.55	-9.45	54	45.84	27.8	6.89	35.98	117	53	A	H
	*	2412	97.11	-	-	98.43	27.77	6.89	35.98	117	53	P	H
	*	2412	90.57	-	-	91.89	27.77	6.89	35.98	117	53	A	H
		2388.23	58.52	-15.48	74	59.81	27.8	6.89	35.98	103	342	P	V
		2390	45.89	-8.11	54	47.18	27.8	6.89	35.98	103	342	A	V
	*	2412	99.47	-	-	100.79	27.77	6.89	35.98	103	342	P	V
	*	2412	92.61	-	-	93.93	27.77	6.89	35.98	103	342	A	V
802.11n HT20 CH 06 2437MHz		2359	48.89	-25.11	74	50.25	27.85	6.81	36.02	114	54	P	H
		2388.4	39.56	-14.44	54	40.85	27.8	6.89	35.98	114	54	A	H
	*	2437	96.08	-	-	97.36	27.71	6.97	35.96	114	54	P	H
	*	2437	89.47	-	-	90.75	27.71	6.97	35.96	114	54	A	H
		2496.08	50.07	-23.93	74	51.29	27.63	7.05	35.9	114	54	P	H
		2495.94	42.65	-11.35	54	43.87	27.63	7.05	35.9	114	54	A	H
		2327.78	49.35	-24.65	74	50.75	27.91	6.73	36.04	103	342	P	V
		2389.52	39.71	-14.29	54	41	27.8	6.89	35.98	103	342	A	V
	*	2437	98.51	-	-	99.79	27.71	6.97	35.96	103	342	P	V
	*	2437	92.39	-	-	93.67	27.71	6.97	35.96	103	342	A	V
		2499.79	49.13	-24.87	74	50.35	27.63	7.05	35.9	103	342	P	V
		2496.08	39.76	-14.24	54	40.98	27.63	7.05	35.9	103	342	A	V



802.11n HT20 CH 11 2462MHz	*	2462	96	-	-	97.28	27.69	6.97	35.94	111	52	P	H
	*	2462	90.26	-	-	91.54	27.69	6.97	35.94	111	52	A	H
		2483.72	54.65	-19.35	74	55.86	27.66	7.05	35.92	111	52	P	H
		2495.92	43.3	-10.7	54	44.52	27.63	7.05	35.9	111	52	A	H
	*	2462	99.5	-	-	100.78	27.69	6.97	35.94	100	341	P	V
	*	2462	92.65	-	-	93.93	27.69	6.97	35.94	100	341	A	V
		2484.6	58.6	-15.4	74	59.81	27.66	7.05	35.92	100	341	P	V
		2483.52	44.39	-9.61	54	45.6	27.66	7.05	35.92	100	341	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	41.9	-32.1	74	57.86	31.12	10.4	57.48	145	274	P	H
		4824	40.32	-33.68	74	56.28	31.12	10.4	57.48	191	220	P	V
802.11n HT20 CH 06 2437MHz		4874	40.88	-33.12	74	56.78	31.17	10.45	57.52	112	229	P	H
		7311	47.57	-26.43	74	57.48	36.03	12.98	58.92	174	100	P	H
		4874	40.46	-33.54	74	56.36	31.17	10.45	57.52	156	360	P	V
		7311	47.11	-26.89	74	57.02	36.03	12.98	58.92	120	106	P	V
802.11n HT20 CH 11 2462MHz		4924	40.15	-33.85	74	55.93	31.22	10.55	57.55	133	180	P	H
		7386	48.83	-25.17	74	58.45	36.29	13.05	58.96	145	274	P	H
		4924	40.46	-33.54	74	56.24	31.22	10.55	57.55	156	360	P	V
		7386	48.14	-25.86	74	57.76	36.29	13.05	58.96	166	210	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		30.97	23.72	-16.28	40	31.94	23.71	0.57	32.5	-	-	P	H
		50.37	23.53	-16.47	40	41.51	13.9	0.72	32.6	-	-	P	H
		94.02	20.76	-22.74	43.5	36.28	15.48	1	32	-	-	P	H
		146.4	27.64	-15.86	43.5	41.35	16.93	1.26	31.9	-	-	P	H
		191.99	31.05	-12.45	43.5	45.99	15.44	1.43	31.81	136	52	P	H
		398.6	24.72	-21.28	46	32.63	21.68	2.12	31.71	-	-	P	H
		30	36.36	-3.64	40	44	24.3	0.56	32.5	152	70	QP	V
		50.37	35.25	-4.75	40	53.23	13.9	0.72	32.6	-	-	P	V
		92.08	23.01	-20.49	43.5	39.03	15.04	0.99	32.05	-	-	P	V
		166.77	23.13	-20.37	43.5	37.93	15.73	1.33	31.86	-	-	P	V
		187.14	24.65	-18.85	43.5	39.73	15.34	1.4	31.82	-	-	P	V
		627.52	27.14	-18.86	46	31.38	24.81	2.73	31.78	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.98	-	-	10Hz
802.11g	92.75	1.3913	0.719	1kHz
802.11n HT20	92.82	1.3116	0.762	1kHz

802.11b

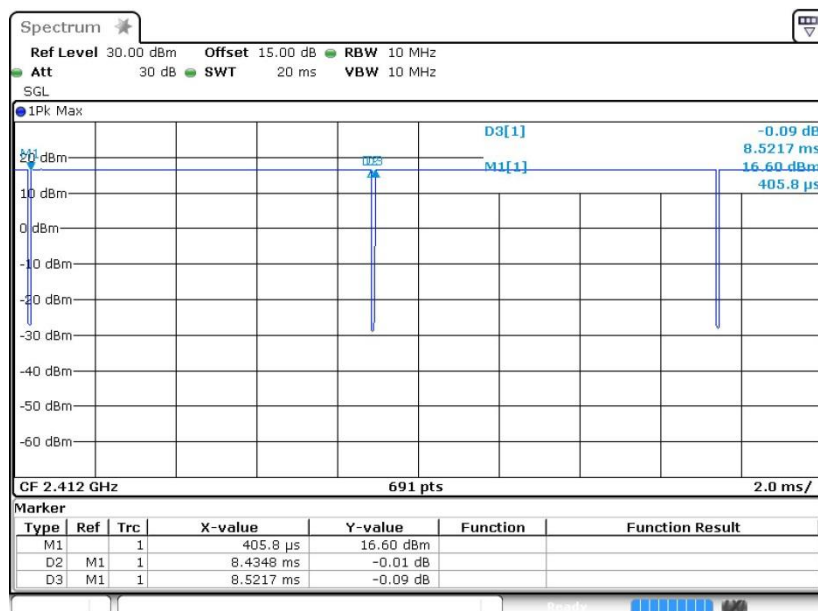

802.11g

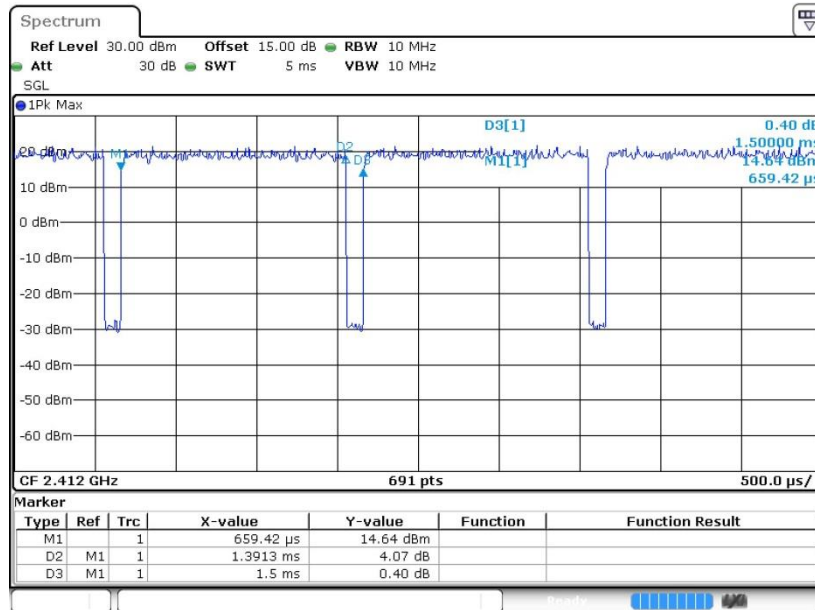

802.11n HT20

