

# **FCC Test Report**

Report No.: AGC03393220502FE08

**FCC ID** : 2AB4FD1000

**PRODUCT DESIGNATION**: DMR Digital Mobile Radio

**BRAND NAME** : HYDX

**MODEL NAME** : D1000, D600

**APPLICANT** : Fujian Juston Electronic Equipment Co.,Ltd.

**DATE OF ISSUE** : Jun. 06, 2022

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION**: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd







Page 2 of 25

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 06, 2022	Valid	Initial Release



Page 3 of 25

#### **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	4
2. PRODUCT INFORMATION	5
3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	6
4. SUPPORT EQUIPMENT LIST	7
5. SYSTEM DESCRIPTION	7
6. MEASUREMENT UNCERTAINTY	8
7. SUMMARY OF TEST RESULTS	8
8. FCC RADIATED EMISSION TEST	9
8.1 PROVISIONS APPLICABLE	9
8.2 TEST SETUP BLOCK DIAGRAM	9
8.3 TEST PROCEDURE	11
8.4 TEST RESULT	12
9. FCC CONDUCTED EMISSION TEST	16
9.1 PROVISIONS APPLICABLE	16
9.2 TEST SETUP BLOCK DIAGRAM	_
9.4 TEST RESULT	18
10. ANTENNA CONDUCTED POWER FOR RECEIVERS	20
10.1 PROVISIONS APPLICABLE	20
10.2 TEST SETUP BLOCK DIAGRAM	20
10.3 TEST PROCEDURE	20
10.4 TEST RESULT	21
11. SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS	3 23
11.1 PROVISIONS APPLICABLE	
11.2 TEST SETUP BLOCK DIAGRAM	23
11.3 TEST PROCEDURE	23
11.4 TEST RESULT	24
APPENDIX I PHOTOGRAPHS OF TEST SETUP	25
APPENDIX II: PHOTOGRAPHS OF TEST EUT	25



Page 4 of 25

#### 1. VERIFICATION OF COMPLIANCE

V = I \ I	. VERII TOATTON OF COMIL ETANCE				
Applicant:	Fujian Juston Electronic Equipment Co.,Ltd.				
Address:	No.886 ,Changfeng Street ,Shudou Industrial Park ,Licheng District ,Quanzhou , China				
Manufacturer:	Fujian Juston Electronic Equipment Co.,Ltd.				
Address:	No.886 ,Changfeng Street ,Shudou Industrial Park ,Licheng District ,Quanzhou , China				
Factory:	Fujian Juston Electronic Equipment Co.,Ltd.				
Address:	No.886 ,Changfeng Street ,Shudou Industrial Park ,Licheng District ,Quanzhou , China				
Product Designation:	DMR Digital Mobile Radio				
Brand Name:	HYDX				
Test Model:	D1000				
Series Model(s)	D600				
Difference Description	Only the model name & case line design are different.				
Measurement Procedure:	ANSI C63.4: 2014				
Deviation:	No any deviation from the test method.				
Date of Test:	May 09, 2022~Jun. 02, 2022				
Condition of Test Sample:	Normal				
Test Result:	Pass				
Report Template;	AGCRT-US-PTT/EMC				
<del>-</del>	atad by Attacketian Of Olabal Oanalianaa (Obanaban) Oa II tal fan aanalianaa with				

The above equipment was tested by Attestation Of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements. The test results of this report relate only to the tested sample identified in this report.

Reviewed By

Bibo Zhang
(Project Engineer)

Calvin Liu
(Reviewer)

Max Zhang
Authorized Officer

Bibo Zhang
Jun. 02, 2022

Jun. 02, 2022

Jun. 06, 2022



Page 5 of 25

#### 2. PRODUCT INFORMATION

The EUT is a **DMR Digital Mobile Radio** designed for voice communication. It is designed by way of utilizing the F3E modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
RX Frequency Range	400-470 MHz (Scanning Receiver)
<b>Emission Type</b>	F3E
Antenna Designation	Detachable Antenna
Antenna Gain	2.15dBi
Hardware Version	V1.3
Software Version	V1.0
Power Supply	DC 7.4V,1600mAh by battery, charging for DC8.4V, 0.4A

I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT					
I/O Port Type	Q'TY	Cable	Tested with		
Antenna Port	1	-	1		
Earphone Port	1	-	1		



Page 6 of 25

#### 3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Test Site	Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
<b>A2LA Cert. No.</b> 5054.02		
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

### **List of Test Equipment:**

#### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
TEST SOFTWARE	FARA	EZ-EMC (Ver.AGC-C ON03A1)	N/A	N/A	N/A

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
POSITIONING CONTROLLER	MF	MF-7802	MF780208285		
HORN ANTENNA	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
RF Communication Test Set	HP	8920B	US35010161	Sep. 03, 2020	Sep. 02, 2021
RF Communication Test Set	HP	8920B	US35010161	Sep. 01, 2021	Aug. 31, 2022
EXA Signal Analyzer	Agilent	N9020A	MY53300860	Jun. 09, 2021	Jun. 08, 2022
Attenuator	Schaffner	58-30-33	ML030	Oct. 24, 2021	Oct. 23, 2022
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 7 of 25

#### 4. SUPPORT EQUIPMENT LIST

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable	
Charger	-	B20	-	-	1.2m Unshielded	
Adapter		B20	-	-	-	
Battery	-	N/A	-	-	-	
Back clip	-	N/A	-	-	-	

## 5. SYSTEM DESCRIPTION

#### **EUT TEST PROCEDURE:**

- 1. Connect EUT and peripheral devices.
- 2. Power on the EUT, the EUT begins to work.
- 3. Make sure the EUT normal working.

#### **EMC TEST MODE:**

No.	No. TEST MODES	
1	Scanning mode	
2	Scanning stopped/Receiving at low channel of 400 MHz to 470 MHz	
3	Scanning stopped/Receiving at middle channel of 400 MHz to 470 MHz	
4	Scanning stopped/Receiving at high channel of 400 MHz to 470 MHz	

**Note:** Only the result of the worst case was recorded in the report.



Page 8 of 25

#### **6. MEASUREMENT UNCERTAINTY**

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 Db

#### 7. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant
§15.111	Antenna Conducted Power for receivers	Compliant
§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	Compliant



Page 9 of 25

#### 8. FCC RADIATED EMISSION TEST

#### **8.1 PROVISIONS APPLICABLE**


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

Frequency	Limit (dBuV/m @3m)	Value			
30MHz-88MHz	40.00	Quasi-peak			
88MHz-216MHz	43.50	Quasi-peak			
216MHz-960MHz	46.00	Quasi-peak			
960MHz-1GHz	54.00	Quasi-peak			
Above 1GHz	54.00	Average			
Above Toriz	74.00	Peak			

Note: The lower limit shall apply at the transition frequency. Because the EUT RX frequency range up to 480 MHz, so the upper the frequency range up to 2 GHz.

#### **8.2 TEST SETUP BLOCK DIAGRAM**


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

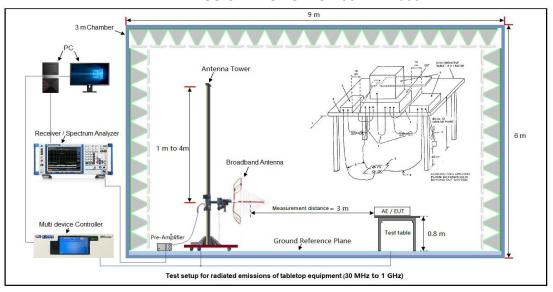



Page 10 of 25

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

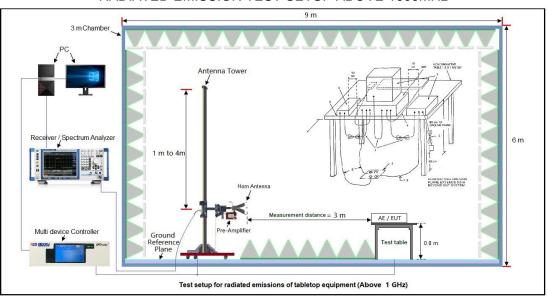

#### **EMI TEST RECEIVER SETUP:**

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurment
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	Ave.



Page 11 of 25


#### **8.3 TEST PROCEDURE**

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The EUT received power by AC 120V/60Hz. 4.
- The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected 5. to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.




Page 12 of 25

#### **8.4 TEST RESULT**

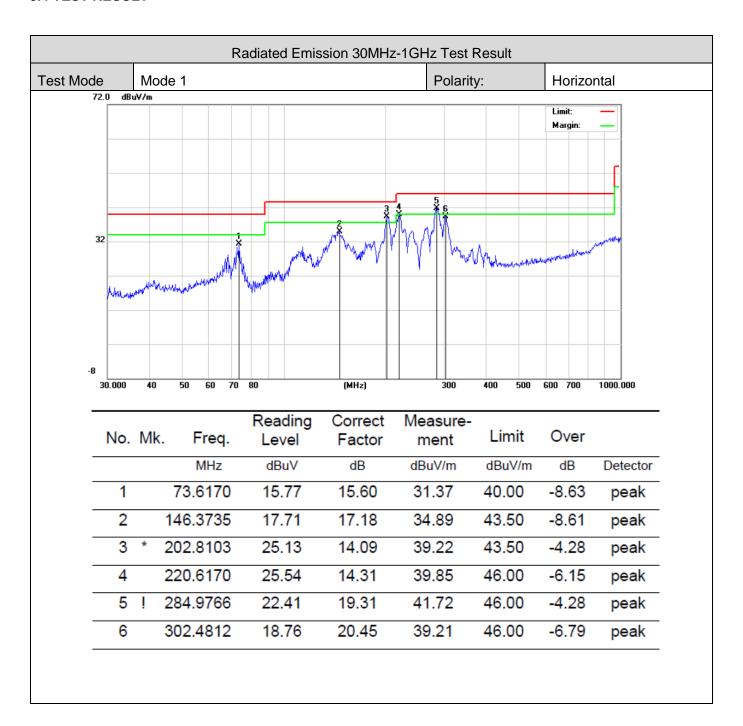


#### **RESULT: PASS**



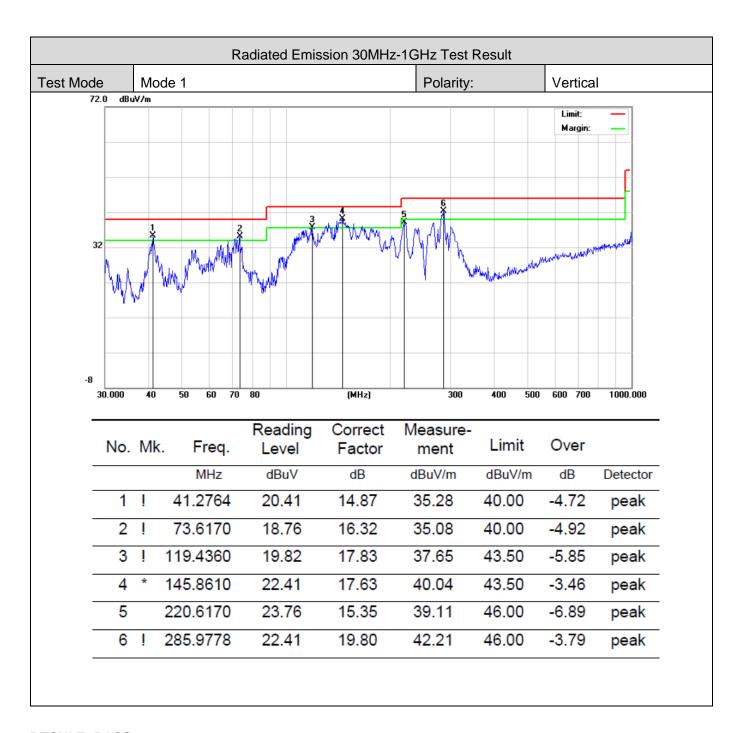

#### **RESULT: PASS**







Radiated Emission Above1GHz Test Result Polarity: Horizontal Test Mode Mode 1 FCC PART 15B 130 120 110 100 90 Level[dBµV/m] 70 60 50 30 20 10 -10 Frequency[Hz] - PK Limit — AV Limit — Horizontal PK # AV Detector

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	[dB]	Height [cm]	Angle [°]	Polarity
1	1227.0227	39.62	-16.86	74.00	34.38	100	340	Horizontal
2	1596.5597	41.74	-16.10	74.00	32.26	100	300	Horizontal
3	2175.1175	44.55	-11.08	74.00	29.45	100	310	Horizontal
4	3179.2179	46.99	-8.71	74.00	27.01	100	330	Horizontal
5	4232.3232	48.69	-5.90	74.00	25.31	100	360	Horizontal
6	5816.4816	47.20	-4.27	74.00	26.80	100	170	Horizontal

#### **RESULT: PASS**





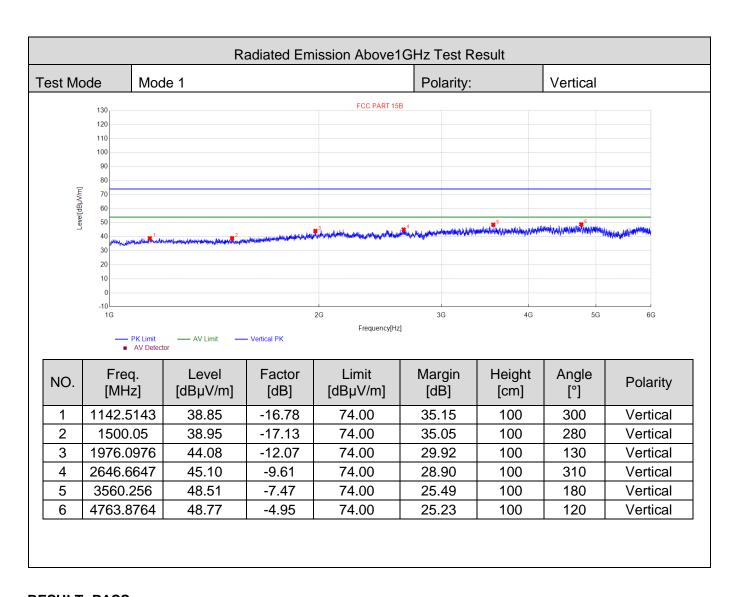

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin= Measurement-Limit

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 16 of 25

#### 9. FCC CONDUCTED EMISSION TEST


#### 9.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)			
requeries of Emission (Min2)	Quasi-Peak	Average		
0.15 – 0.5	66 to 56 *	56 to 46 *		
0.5 – 5	56	46		
5 – 30	60	50		

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### 9.2 TEST SETUP BLOCK DIAGRAM

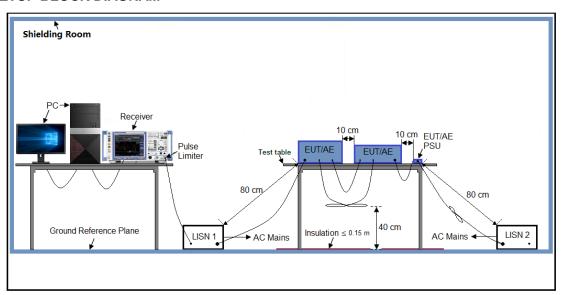




Page 17 of 25

#### 9.3 TEST PROCEDURE

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test data of the worst case condition (mode 1) was reported on the following Data page.



#### 9.4 TEST RESULT

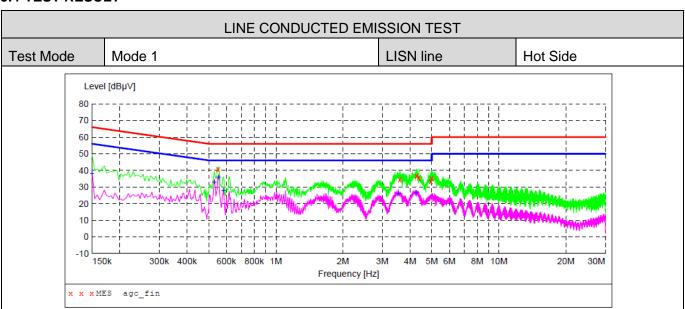

## MEASUREMENT RESULT: "agc fin"

2021/10/27 11:45

2021/10/27 11	:45					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.550000	40.70	5.4	56	15.3	QP	L1
3.594000	34.60	6.5	56	21.4	QP	L1
4.274000	36.70	6.5	56	19.3	QP	L1
4.378000	35.80	6.5	56	20.2	QP	L1
4.950000	33.30	6.6	56	22.7	QP	L1
4.994000	35.30	6.6	56	20.7	QP	L1

## MEASUREMENT RESULT: "agc fin2"


2021/10/27 11:45

021/10/2/ 11	. 10					
Frequency				_	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.150000	38.50	6.9	56	17.5	AV	L1
0.530000	33.00	5.4	46	13.0	AV	L1
0.554000	35.90	5.4	46	10.1	AV	L1
0.582000	28.30	5.4	46	17.7	AV	L1
3.538000	26.40	6.5	46	19.6	AV	L1
4.250000	26.90	6.5	46	19.1	AV	L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



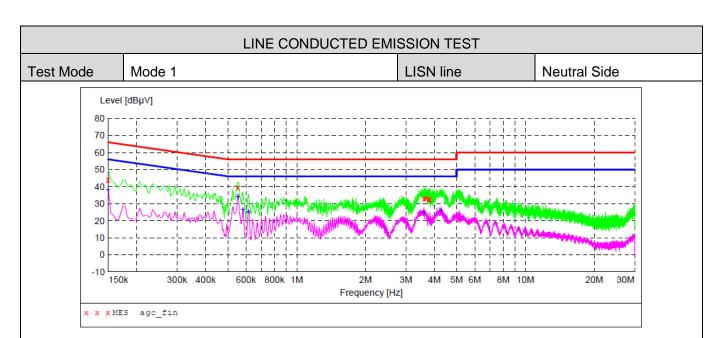

## MEASUREMENT RESULT: "agc fin"

2021/	10/	27	11:41

.02.	1/10/2/ 11	. 41					
Ι	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.150000	44.00	6.9	66	22.0	QP	N
	0.554000	39.60	5.4	56	16.4	QP	N
	3.614000	32.90	6.5	56	23.1	QP	N
	3.682000	33.40	6.5	56	22.6	QP	N
	3.782000	32.80	6.5	56	23.2	QP	N
	3.822000	32.30	6.5	56	23.7	QP	N

## MEASUREMENT RESULT: "agc fin2"

#### 2021/10/27 11:41

Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.150000	38.50	6.9	56	17.5	7/17	N
0.554000	34.20	5.4	46		AV	N
0.582000	26.60	5.4	46	19.4	AV	N
0.614000	25.40	5.4	46	20.6	AV	N
3.594000	24.70	6.5	46	21.3	AV	N
4.282000	26.10	6.5	46	19.9	AV	N



Page 20 of 25


#### 10. ANTENNA CONDUCTED POWER FOR RECEIVERS

#### **10.1 PROVISIONS APPLICABLE**

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

Frequency Range	9 KHz to 2GHz
Limit	2.0 nW (-57 dBm )

#### **10.2 TEST SETUP BLOCK DIAGRAM**

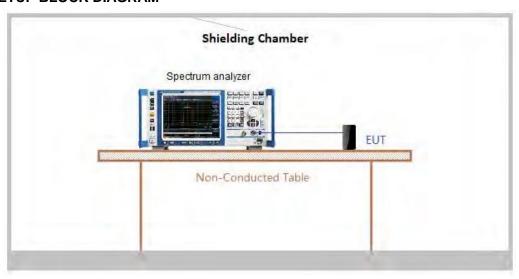

#### **10.3 TEST PROCEDURE**

1. The receiver antenna terminal connected to a spectrum analyzer.

#### 2. Receiver set as follow:

Frequency range	RBW (kHz)	VBW (kHz)
9 kHz ~ 150 kHz	1	3
150 kHz ~ 30 MHz	10	30
30 MHz ~ 1000 MHz	100	300
1000 MHz ~ 3000 MHz	1000	3000

The test data of the worst case condition (mode 1) was reported on the following Data page.




#### **10.4 TEST RESULT**

Conducted Measurement (9 KHz to 150 KHz)




#### Conducted Measurement (150 KHz to 30MHz)

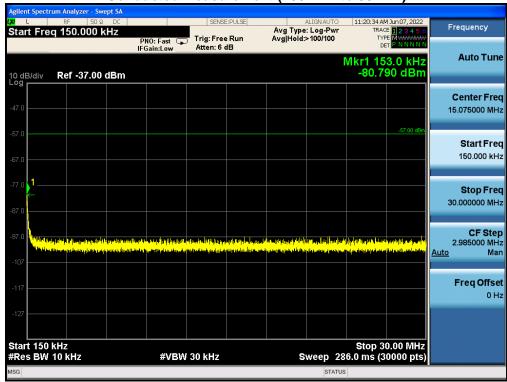


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






Conducted Measurement (30MHz to 1GHz)

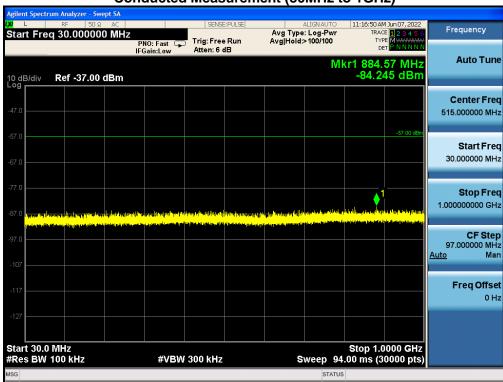

Conducted Measurement (1GHz to 2GHz)

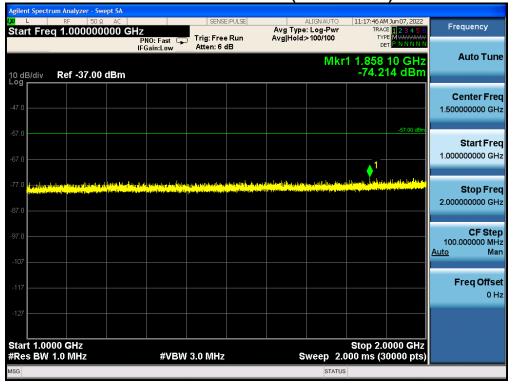

#### **RESULT: PASS**




Page 23 of 25

## 11. SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS

#### 11.1 PROVISIONS APPLICABLE

Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

#### 11.2 TEST SETUP BLOCK DIAGRAM

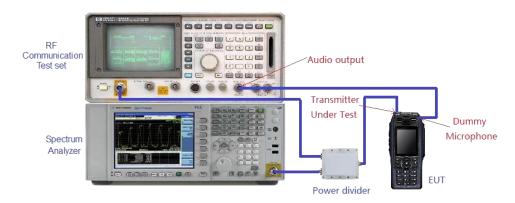

#### 11.3 TEST PROCEDURE

- 1. Connected the EUT as shown in the above block diagram.
- 2. Apply a RF signal to the receiver input port at lowest, middle and highest channel frequencies of receiver operation band.
- 3. Adjust the audio output level of the receiver to it's rated value with the distortion less than 10%.
- 4. Adjust the RF Signal Generator Output Power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB.This output level of the RF SG at each channel frequency is the sensitivity of the receiver.
- 5. Select the lowest or worse-case sensitivity level for all of the bands as the reference sensitivity.
- 6. Adjust the RF Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5) and its frequency to the frequency points in the cellular band.
- 7. Set the Receiver squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level.
- 8. Set the receiver in a scanning mode and allow it to scan through it's complete receiving range.
- 9. If the receiver unsquelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38dB.
- 10. Repeat above procedure at the frequencies 824.5, 836.0, and 848.5 MHz for the mobile band, and 869.1, 881.5, and 893.5MHz for the cellular base band.



Page 24 of 25

#### 11.4 TEST RESULT

Scanning	Test Frequency of	Spurious Value of	Reference	Measurement	
Frequency Band	Cellular Band	Cellular Frequency	Sensitivity	Result	Limit (dB)
(MHz)	(MHz)	(dBm)	(dBm)	(dB)	
400-470	824.5/836.0/848.5	>-46	-107	<-61	<-38
400-470	869.1/881.5/893.5	>-46	-107	<-61	<-38

NOTE:1. Measurement Result = Rejection Ratio

- 2. Reference Sensitivity is the recorded value when the signal-to-noise ratio is 12dB.
- 3. Measurement Result = Reference Sensitivity- Spurious Value.



Page 25 of 25

#### APPENDIX I PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC03393220502AP03

**APPENDIX II: PHOTOGRAPHS OF Test EUT** 

Refer to the Report No.: AGC03393220502AP02

----END OF REPORT-----



## Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.