



## FCC PART 15C


## TEST REPORT

For

### SDI Technologies Inc.

1299 Main St. Rahway, NJ 07065, United States

**FCC ID: EMOHW22A**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Preset Bedside Clock with Single Day Alarm, Fast Qi Wireless Charging, Dual USB Charging
<b>Report Number:</b> SZKA210818-34991E-RF-00	
<b>Report Date:</b> 2021-09-13	
Jimmy Xiao 	
<b>Reviewed By:</b> RF Engineer	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>8</b>
<b>FCC §1.1310, §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
BLOCK DIAGRAM OF TEST SETUP .....	10
TEST DATA .....	10
<b>FCC§15.203 – ANTENNA REQUIREMENT .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTED CONSTRUCTION .....	12
<b>FCC §15.207 – AC LINE CONDUCTED EMISSION .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	14
CORRECTED FACTOR & MARGIN CALCULATION .....	14
TEST DATA .....	14
<b>FCC §15.205 &amp; §15.209 - RADIATED EMISSIONS TEST .....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
EUT SETUP .....	17
EMI TEST RECEIVER SETUP.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST DATA .....	18

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

Product	Preset Bedside Clock with Single Day Alarm, Fast Qi Wireless Charging, Dual USB Charging
Tested Model	HW22
Multiple Models	HW22B, HW22X (X could be single or multiple digits by any alphabets denote different cabinet color)
Models Differences	Refer to the DoS letter
Frequency Range	110.5-205kHz
Antenna Type	Coil
Voltage Range	DC9.0V from adapter or DC 3V from 2*AA batteries
Date of Test	2021-08-24 to 2021-09-08
Sample serial number	SZKA210818-34991E-RF-S1/1 (Assigned by BACL, Shenzhen)
Received date	2021-06-18
Sample/EUT Status	Good condition
Adapter information	Model: GJ30WD-0900300U Input: AC100-240V, 50/60Hz Max, 0.8A Output: DC 9.0V, 3.0A

### Objective

This test report is in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of EUT with FCC rules, section 15.203, 15.205, 15.207 and 15.209.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Line Conducted Emissions		±1.95 dB
Radiated emission	9 kHz~30MHz	±4.52 dB
	30MHz~1 GHz	±5.81 dB
Occupied Bandwidth		±0.5 kHz
Temperature		±3.0 °C
Humidity		±6 %

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3<sup>rd</sup> Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a test mode

### EUT Exercise Software

No software used in test.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Load 1	Unknown	Unknown
Unknown	Load 2	Unknown	Unknown
Unknown	Wireless load	Unknown	Unknown
BULL	Receptacle	GN-415K	5503290068073

### External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shield Un-Detachable DC Power Cable	0.8	Adapter	EUT
Un-shield Detachable USB Cable	0.2	EUT	Load 1
Un-shield Detachable USB Cable	0.3	EUT	Load 2

## Block Diagram of Test Setup

For conducted emission:

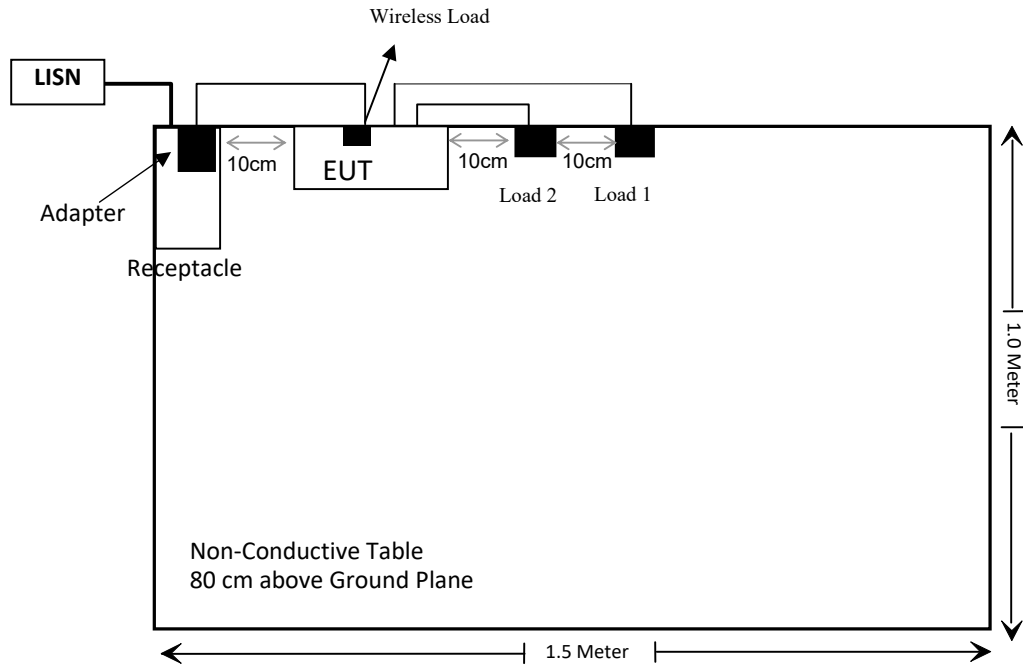

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
FCC§1.1310 & §2.1091	Maximum Permissible Exposure(MPE)	Compliant
FCC§15.203	Antenna Requirement	Compliant
FCC§15.207	AC Line Conducted Emission	Compliant
§15.209 §15.205	Radiated Emission Test	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>MPE</b>					
Narda	Exposure Level Tester	ELT-400	N-0229	2019/11/19	2021/11/18
Narda	B Field Probe	ELT Probe 100cm <sup>2</sup>	M-0666	2019/11/19	2021/11/18
ETS-Lindgreen	Isotropic Field Probe	HI—6005	69461	2018/09/28	2021/09/27
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2021/07/07	2022/07/06
Rohde & Schwarz	LISN	ENV216	101613	2021/07/07	2022/07/06
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
<b>RF Radiated test</b>					
R&S	EMI Test Receiver	ESR3	102455	2021/07/06	2022/07/05
Sonoma instrument	Pre-amplifier	310 N	186238	2021/08/03	2022/08/02
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
EMCO	Active Shielded Loop	6507	9001-1188	2021/07/16	2024/07/15
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2021/08/03	2022/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2021/08/03	2022/08/02
Rohde & Schwarz	Auto test software	EMC 32	V9.10.00	NCR	NCR
CHIGO	Temperature & Humidity Meter	HTC-1S	T-03-EM451	2021/04/07	2022/04/06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).



## **FCC §1.1310, §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

### **Applicable Standard**

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According with KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01 clause 3 c)


- c) For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. Below 100 kHz, applicable reference levels for maximum instantaneous exposure field strengths are defined in clause 3.a).(2).

According to KDB 680106 D01 RF Exposure Wireless Charging App v03r01 clause 5 b)

- b) Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC<sup>2</sup> or a PAG<sup>3</sup> for equipment approved using certification to address RF exposure compliance. However, the responsible party is required to keep a copy of the test report in accordance with KDB 865664 D02. A copy of the test report is to be submitted with the application if the device is approved using certification.

- (1) Power transfer frequency is less than 1 MHz
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

## Block Diagram of Test Setup

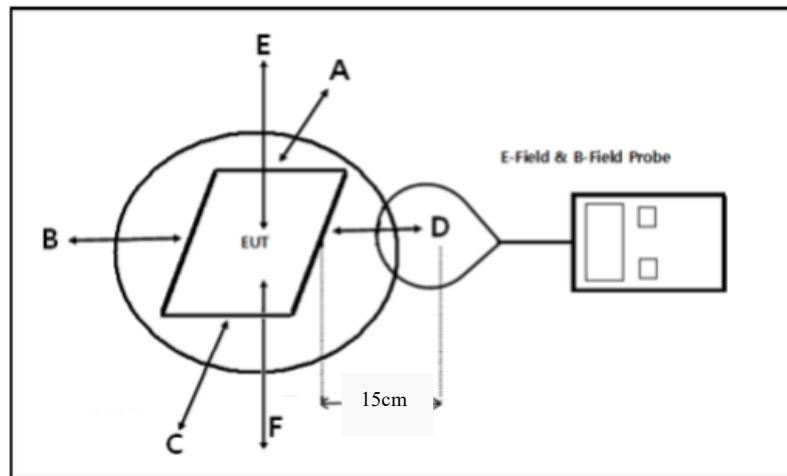

Note: 20 cm for Top test.

## Test Data

### Environmental Conditions

Temperature:	26°C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Chen on 2021-09-08.

Test mode: Working

### H-Field Strength

Frequency Range (kHz)	Position A (uT)	Position B (uT)	Position C (uT)	Position D (uT)	Position E (uT)	/	/
110.5-205	0.149	0.138	0.134	0.164	0.200	/	/
	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	50% Limit (A/m)	Limit Test (A/m)
	0.119	0.110	0.107	0.131	0.160	0.815	1.63

Note: A/m = uT/1.25

**E-Field Strength**

Frequency Range (kHz)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	50% Limit (V/m)	Limit (V/m)
110.5-205	0.463	0.426	0.478	0.416	0.589	307	614

**Result: Pass****Considerations of compliance 680106 D01 RF Exposure Wireless Charging App v03r01 clause 5 b:**

**(1)** Power transfer frequency is less than 1 MHz.

Yes, the operation frequency is 110.5-205kHz.

**(2)** Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of primary coil is 5Watts.

**(3)** The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

The transfer system includes one primary coils to detect and allow coupling only between individual pairs of coils.

**(4)** Client device is placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter

**(5)** Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, mobile exposure conditions only

**(6)** The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

Yes, the test result for H and E-Field strength less than 50% of the MPE limit.

---

## **FCC§15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connected Construction**

The EUT has one coil antennas arrangement which were permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


**Result: Pass**

## FCC §15.207 – AC LINE CONDUCTED EMISSION

### Applicable Standard

FCC§15.207

### EUT Setup

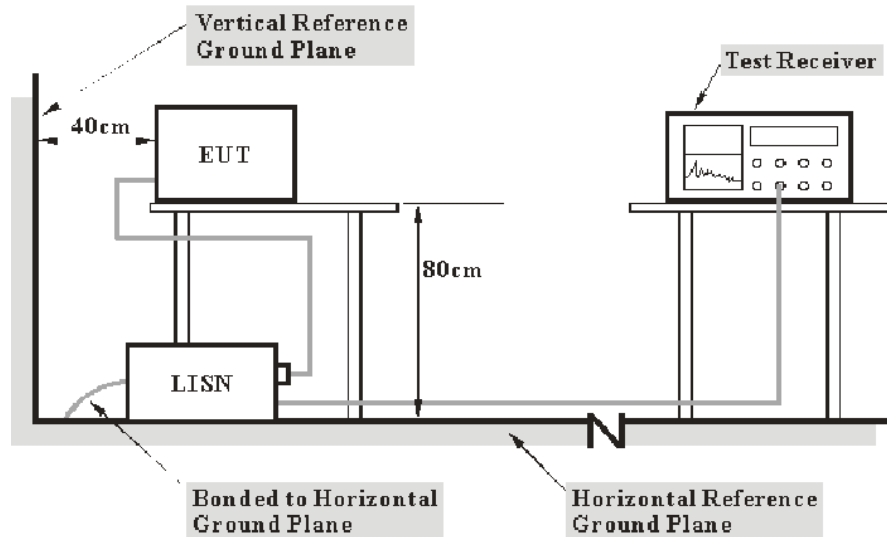

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


### Test Data

#### Environmental Conditions

Temperature:	26°C
Relative Humidity:	70 %
ATM Pressure:	101.0 kPa

*The testing was performed by Haiguo Li on 2021-08-24.*


*Test mode: Wireless Charging with full load*

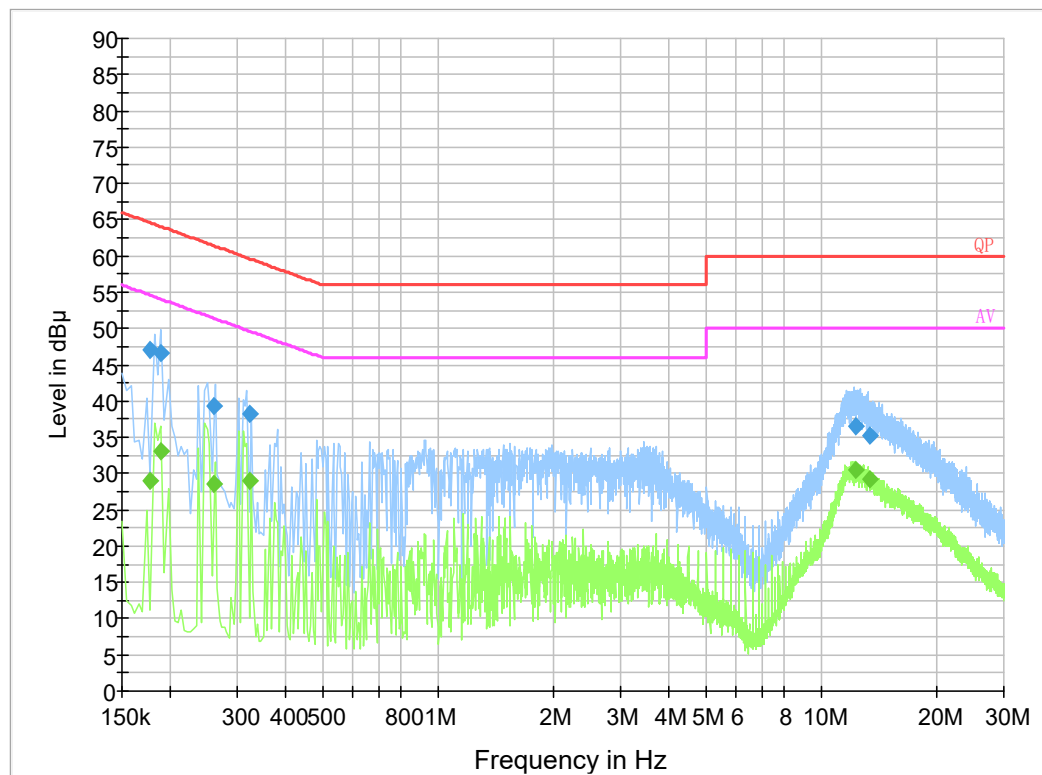**AC 120 V/60 Hz, Line:****Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.177500	47.0	9.000	L1	19.9	17.6	64.6
0.189500	46.7	9.000	L1	19.8	17.4	64.1
0.261500	39.4	9.000	L1	19.8	22.0	61.4
0.322770	38.3	9.000	L1	19.8	21.3	59.6
12.291030	36.6	9.000	L1	20.0	23.4	60.0
13.391010	35.2	9.000	L1	20.0	24.8	60.0

**Final Result 2**

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.177500	29.0	9.000	L1	19.9	25.6	54.6
0.189500	33.2	9.000	L1	19.8	20.9	54.1
0.261500	28.7	9.000	L1	19.8	22.7	51.4
0.322770	28.9	9.000	L1	19.8	20.7	49.6
12.291030	30.4	9.000	L1	20.0	19.6	50.0
13.391010	29.2	9.000	L1	20.0	20.8	50.0

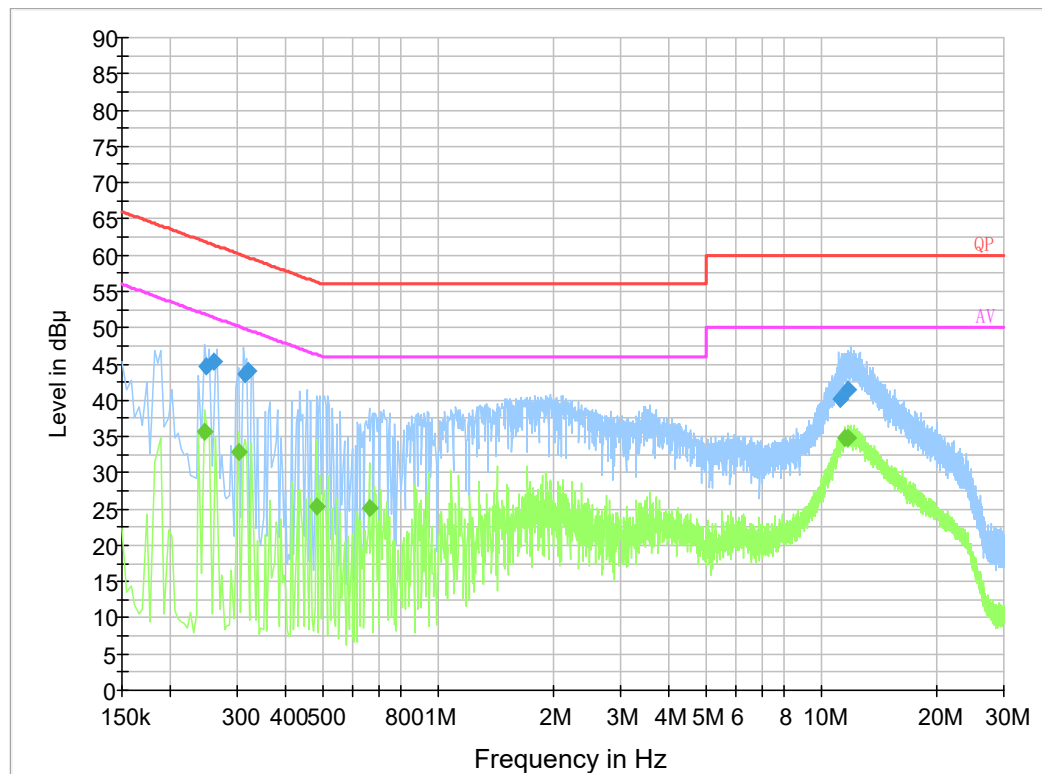**AC 120V/ 60 Hz, Neutral:****Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.249500	44.7	9.000	N	19.8	17.1	61.8
0.261500	45.3	9.000	N	19.8	16.1	61.4
0.314650	43.7	9.000	N	19.7	16.1	59.8
0.321230	43.9	9.000	N	19.8	15.8	59.7
11.194870	40.2	9.000	N	20.0	19.8	60.0
11.806690	41.5	9.000	N	20.0	18.5	60.0

**Final Result 2**

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.246000	35.7	9.000	N	19.8	16.2	51.9
0.302000	32.8	9.000	N	19.7	17.4	50.2
0.482000	25.3	9.000	N	19.8	21.0	46.3
0.662000	25.0	9.000	N	19.8	21.0	46.0
11.530000	34.8	9.000	N	20.0	15.2	50.0
11.798000	34.8	9.000	N	20.0	15.2	50.0



## FCC §15.205 & §15.209 - RADIATED EMISSIONS TEST

### Applicable Standard


As per FCC Part 15.209

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

### EUT Setup

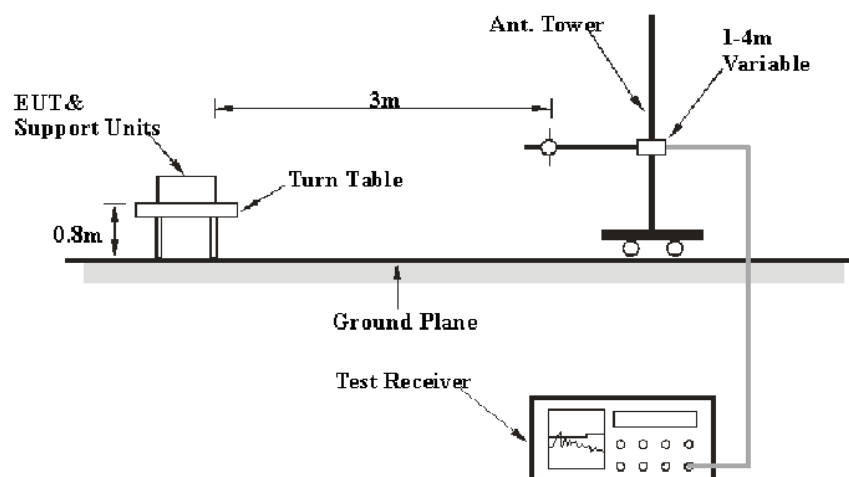

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver Setup

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	PK
150 kHz – 30 MHz	10 kHz	30 kHz	PK
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	28~29°C
<b>Relative Humidity:</b>	56~58 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Willia Wang on 2021-09-06 and 2021-09-08.*


*Test mode: Wireless Charging with full load*

1) 9 kHz~30MHz:


Frequency (MHz)	Corrected Amplitude (dBμV/m)	PK/QP/Ave.	Turntable Degree	RX Antenna Height (m)	FCC Part 15.205&15.209		Remark
					Limit (dBμV/m)	Margin (dB)	
0.11888	70.38	PK	111	1.0	106.11	35.73	Fundamental
0.11705	34.77	PK	96	1.0	106.24	71.47	Spurious Emission
0.00992	39.22	PK	100	1.0	127.67	88.45	
0.215	21.61	PK	240	1.0	100.96	79.35	
11.792	20.69	PK	174	1.0	69.54	48.85	
22.246	20.76	PK	200	1.0	69.54	48.78	

Note: PK detector data Compliant with average and QP detector limit.


9 kHz-150 kHz

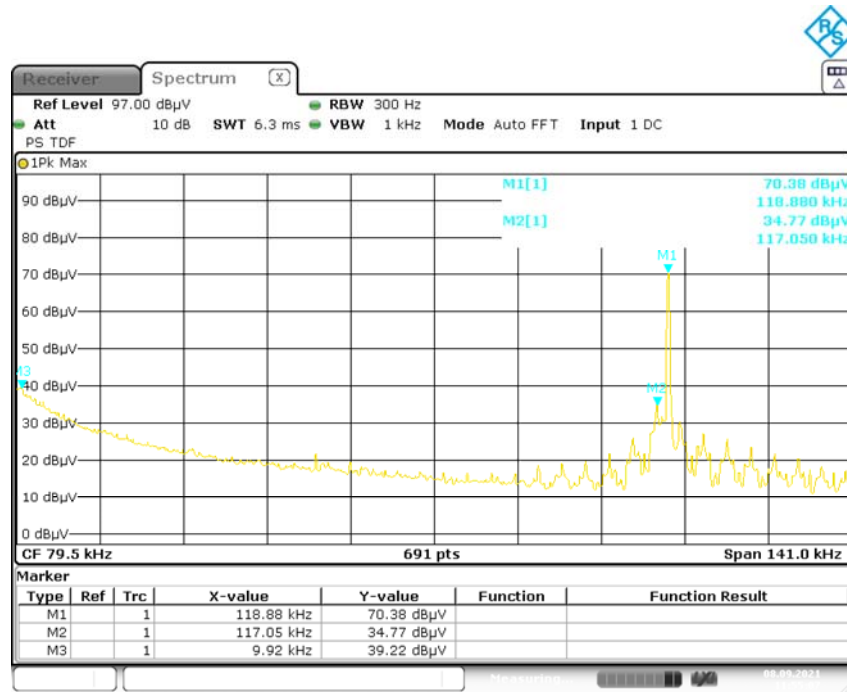

150 kHz-30 MHz

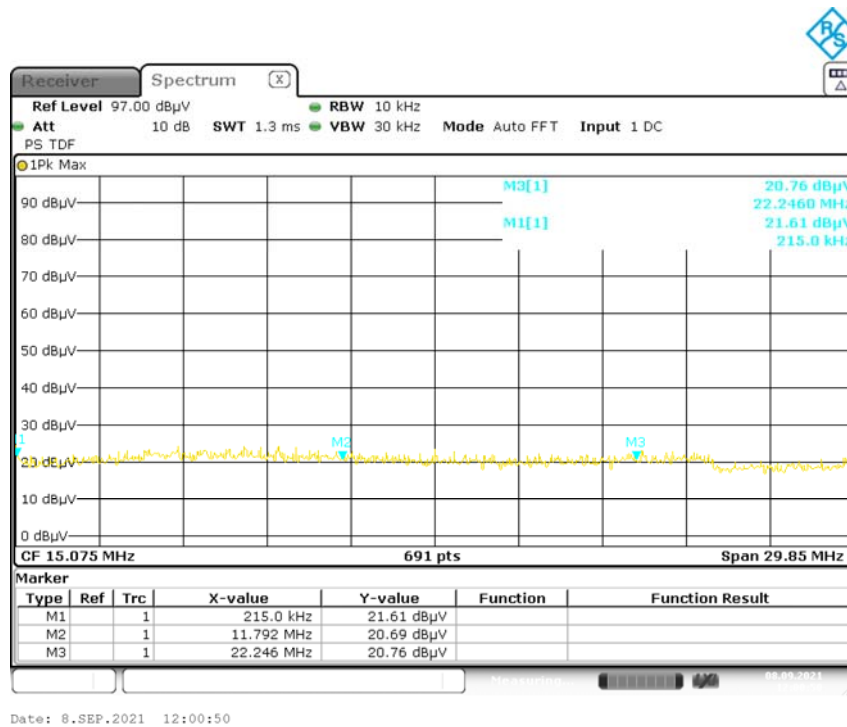

## 2) 30 MHz ~ 1 GHz

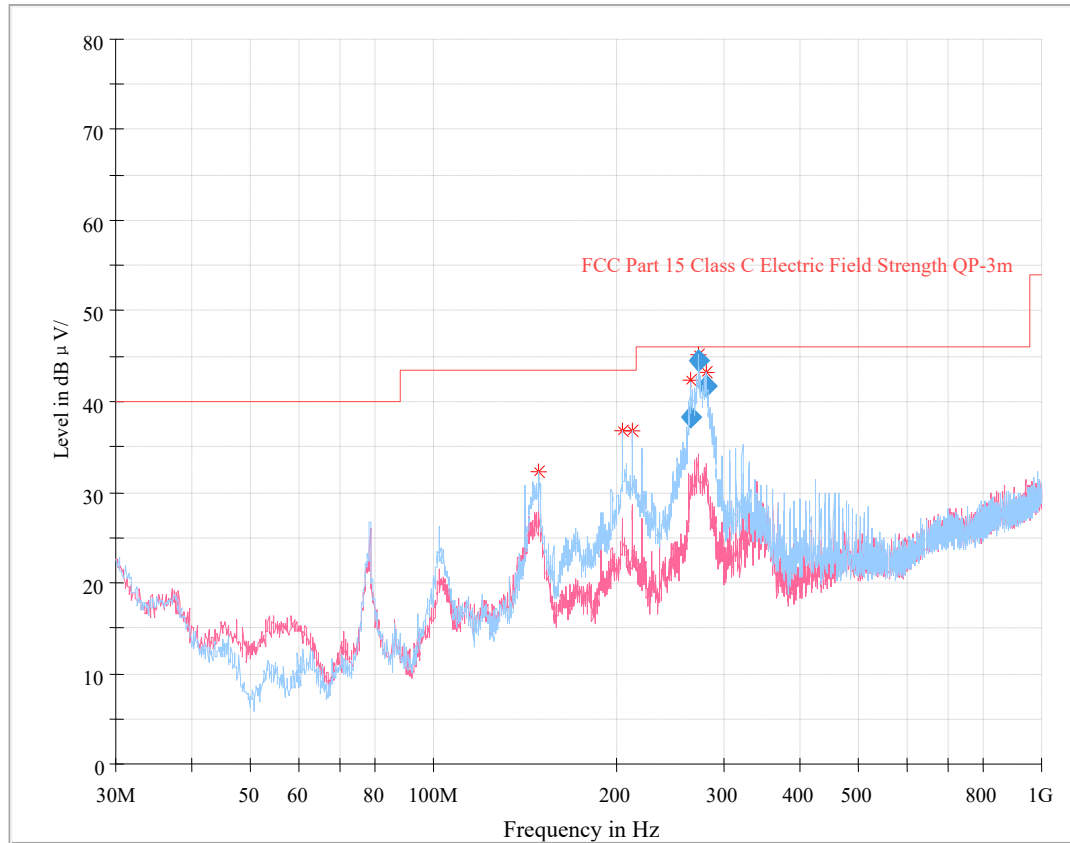**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
264.708000	38.33	46.00	7.67	133.0	H	91.0	-11.3
272.869250	44.44	46.00	1.56	111.0	H	101.0	-11.0
280.892625	41.71	46.00	4.29	199.0	H	100.0	-10.6

**Critical\_Freqs**

Frequency (MHz)	MaxPeak (dB μ	Limit (dB μ	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
149.188750	32.35	43.50	11.15	200.0	H	118.0	-11.3
204.478750	36.80	43.50	6.70	200.0	H	0.0	-11.1
212.117500	36.70	43.50	6.80	200.0	H	353.0	-11.2

\*\*\*\*\* END OF REPORT \*\*\*\*\*