

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 2230 adapter card
Brand Name	Intel® Wi-Fi 6E AX210
Model Name	AX210NGW
FCC/IC ID	FCCID: PD9AX210NG / IC ID: 1000M-AX210NG
Date of Test Start/End	2020-07-22 /2020-08-04
Features	802.11ax, Dual Band, 2x2 Wi-Fi 6 + Bluetooth® 5.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 C RSS-247 issue 2, RSS-Gen issue 5 A1 (see section 1)
---------------------	--

Test Report identification	200611-03.TR05
Revision Control	Rev. 01 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
This report shall not be reproduced, except in full, without the written approval of the laboratory.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Zayd OUACHICHA
(Test Engineer Lead)

Cheiel IN
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	5
6. Remarks and comments	6
7. Test Verdicts summary	6
7.1. BT	6
8. Document Revision History	6
Annex A. Test & System Description	7
A.1 MEASUREMENT SYSTEM.....	7
A.2 TEST EQUIPMENT LIST	9
A.3 MEASUREMENT UNCERTAINTY EVALUATION	10
Annex B. Test Results	11
B.1 20dB BANDWIDTH AND CARRIER FREQUENCY SEPARATION	11
B.1.1 Test limits	11
B.1.2 Results tables.....	11
B.1.3 Results screenshot	12
B.2 NUMBER OF HOPPING CHANNELS	15
B.2.1 Test limits	15
B.2.2 Test procedure	15
B.2.3 Results tables.....	15
B.3 TIME OF OCCUPANCY (DWELL TIME)	19
B.3.1 Test procedure	19
B.3.2 Results tables.....	19
B.3.3 Results Screenshot	20
B.4 MAXIMUM PEAK OUTPUT POWER ANTENNA GAIN	26
B.4.1 Test Limits	26
B.4.2 Test procedure	26
B.4.3 Results tables.....	26
B.4.4 Results Screenshot	27
B.5 OUT-OF-BAND EMISSION (CONDUCTED)	29
B.5.1 Test limits	29
B.5.2 Test procedure	29
B.5.3 Test results	30
B.6 RADIATED SPURIOUS EMISSION	39
B.6.1 Standards references	39
B.6.2 Test procedure	39
B.6.3 Test Results.....	40
Annex C. Photographs	44
C.1 TEST SETUP	44
RADIATED TEST SETUPS	44
C.2 TEST SAMPLE	45

1. Standards, reference documents and applicable test methods

FCC	1. FCC Title 47 CFR part 15 - Subpart C – §15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz. 2019-10-01 Edition 2. FCC Title 47 CFR part 15 - Subpart C – §15.209 Radiated emission limits; general requirements. 2019-10-01 Edition 3. FCC OET KDB 558074 D01 v05r02 - Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules. 4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 5. ANSI C63.10-2013 - American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ISED	1. RSS-247 Issue 2 - Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices. 2. RSS-Gen Issue 5 A1- General Requirements for Compliance of Radio Apparatus. 3. FCC OET KDB 558074 D01 v05r02 - Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules. 4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band. 5. ANSI C63.10-2013 - American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED #1000Y.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22°C ± 3°C
Humidity	58% ± 10%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200611-03.S09	WiFi 6E Module	AX210NGW	WFM:9C297662CA0F	2020-07-15	Used for 1-6.4GHz RSE tests
	170000-01.S01	Laptop	Dell Latitude E5470	DBPLMC2	2017-03-28	
	200611-03.S26	Extender	ADEXELEC	416	2020-07-01	
	200611-03.S20	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S21	Aux Antenna	Skycross	-	2020-07-01	
#02	200611-03.S09	WiFi 6E Module	AX210NGW	WFM:9C297662CA0F	2020-07-15	Used for 6.4-18 GHz RSE tests
	170801-01.S42	Laptop	Dell Latitude E5450	GTXV562	2018-01-18	
	200102-01.S03	Extender	A3030-FLEX	0416	2020-01-02	
	200611-03.S20	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S21	Aux Antenna	Skycross	-	2020-07-01	
#03	200611-03.S01	WiFi 6E Module	AX210NGW	WFM:9C297662CA5F	2020-07-15	Used for 30MHz – 1GHz & 18 – 26.5 GHz RSE tests
	200504-04.S07	Laptop	Latitude 5401	SN:BVHLK13	2020-06-02	
	200504-04.S07	Extender	-	-	2020-06-02	
	200611-03.S11	Main Antenna	Skycross	-	2020-07-15	
	200611-03.S12	Aux Antenna	Skycross	-	2020-07-15	
#04	200611-03.S10	WiFi 6E Module	AX210NGW	WFM:9C297662C6BD	2020-07-15	RF Conducted
	170000-01.S02	Laptop	Latitude E5450	21HTPF2	2017-03-28	
	170524-01.S13	Extender	PCB00495	4955013-032	2017-05-29	

5. EUT Features

The herein information is provided by the customer

Brand Name	Intel® Wi-Fi 6E AX210		
Model Name	AX210NGW		
Software Version	OEM_DRTU_CommonApp_00940_21_350120_0W		
Driver Version	21.110.20263.10859		
Prototype / Production	Production		
Supported Radios	802.11b/g/n/ax 2.4GHz (2400.0 – 2483.5 MHz) 802.11a/n/ac/ax 5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5875.0 MHz) Bluetooth 5.2 2.4GHz (2400.0 – 2483.5 MHz)		
Antenna Information	Transmitter	Chain A (Main)	Chain B (Aux)
	Manufacturer	SkyCross	Skycross
	Antenna type	PIFA antenna	PIFA antenna
	Part number	N/A	N/A
	Max Antenna peak gain (dBi)	+3.24	+3.24
Document			
	Filename		Date of receipt
	Intel_Ref_Antenna data_HMC-M2 Ant_Spec_Universe_SkyCross Antenna		2013-01-28

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. BT

FCC part	RSS part	Test name	Verdict
15.247 (a) (1)	RSS-247 Clause 5.1 (a) and (b)	20dB Bandwidth and Carrier frequency separation	P
15.247 (a) (1) (iii)	RSS-247 Clause 5.1 (d)	Number of hopping channels	P
15.247 (a) (1) (iii)	RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	P
15.247 (b) (1)	RSS-247 Clause 5.4 (b)	Maximum Peak Output Power and antenna gain	P
15.247 (d)	RSS-247 Clause 5.5	Out-of-band Emissions (conducted)	P
15.247 (d) 15.209	RSS-247 Clause 5.5 RSS-GEN A1 Clause 8.9	Out-of-band Emissions (radiated)	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	I.Kharrat	First Issue
Rev.01	Zayd Ouachicha	Modification of EUT features section.

Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes.

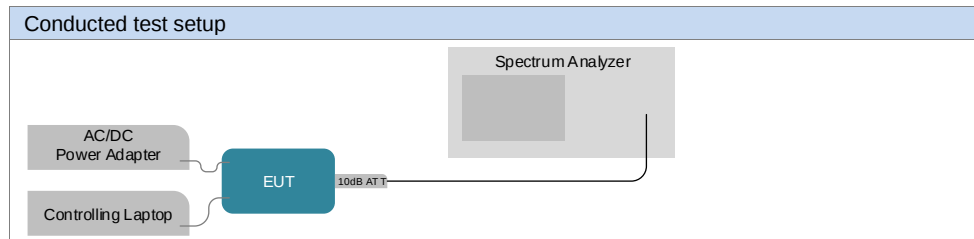


Radiated test setup


Radiated Setup 30 MHz - 1 GHz

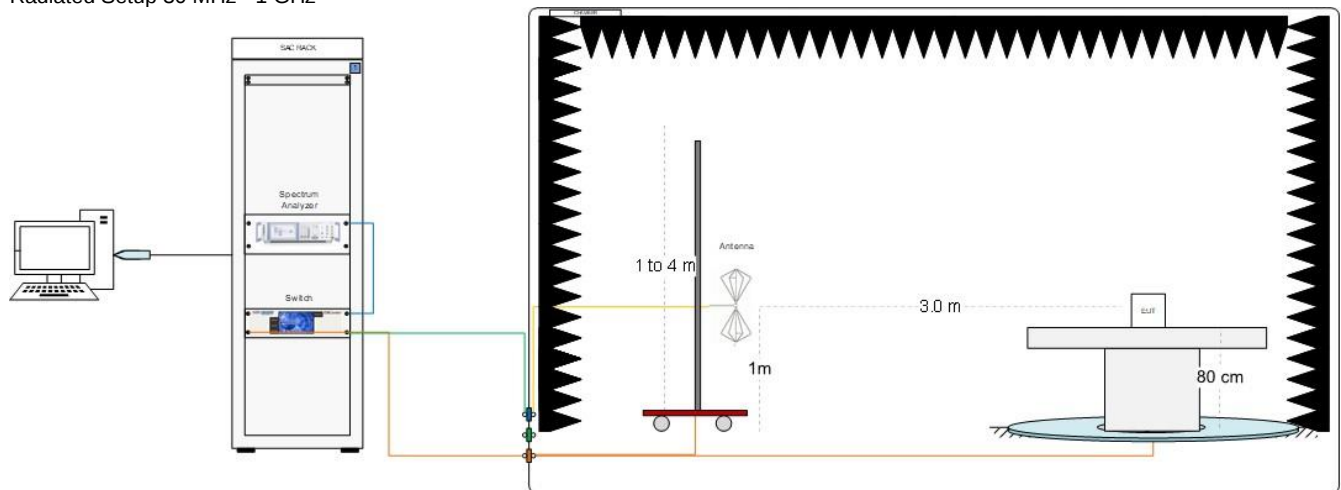


Radiated Setup 1 GHz – 9.5 GHz

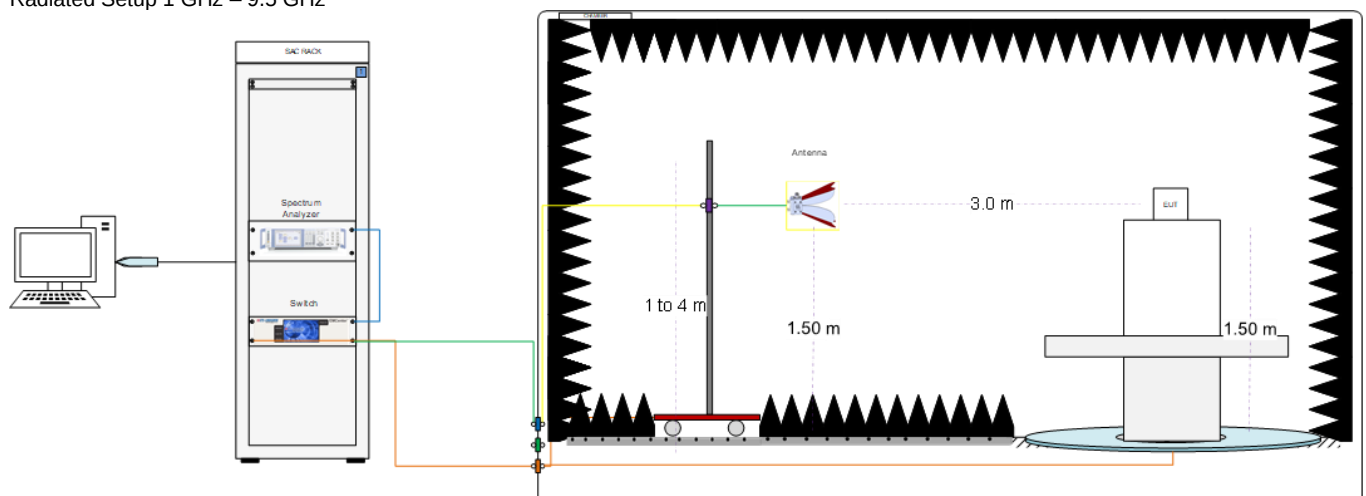

Radiated Setup 9.5 GHz - 18 GHz

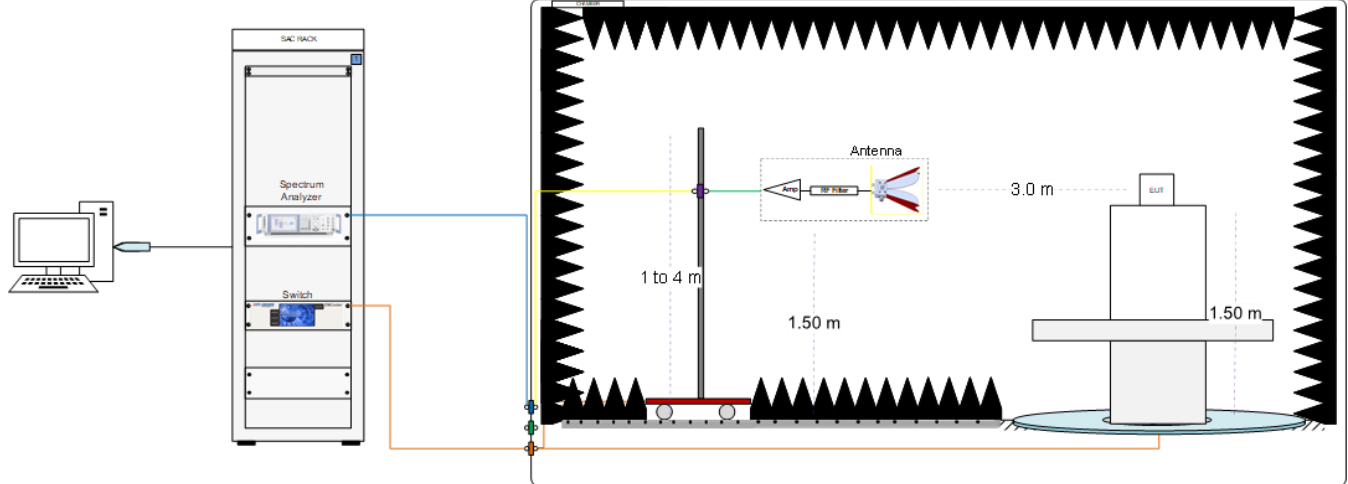

Radiated Setup 18 GHz – 26.5 GHz

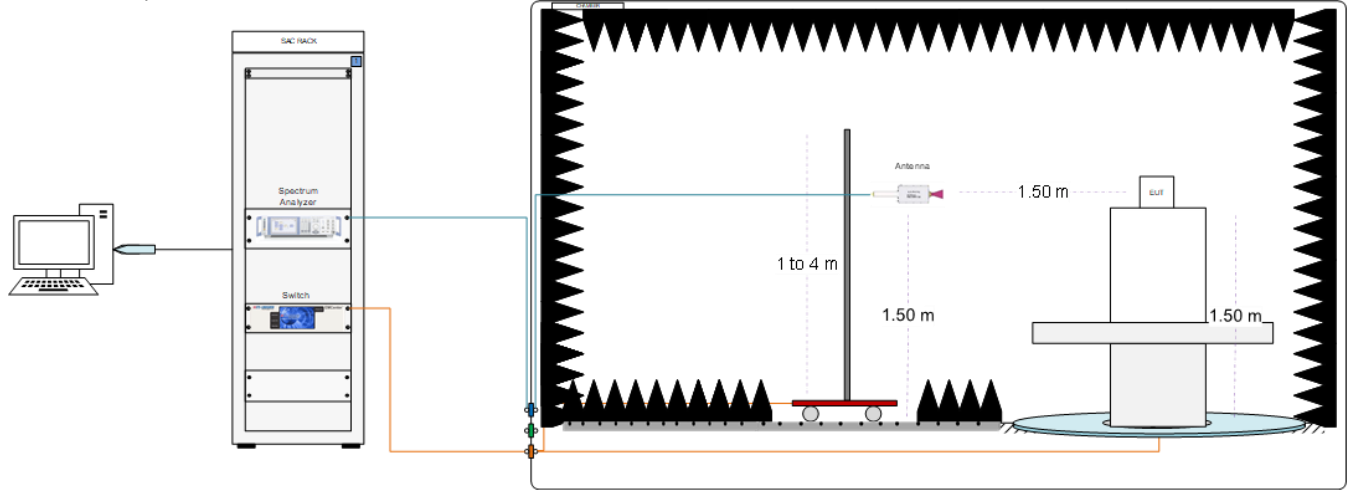

Sample Calculation

The spurious received voltage V(dBuV) in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F \text{ (dB/m)} = \text{Rx Antenna Factor (dB/m)} + \text{Cable losses (dB)} - \text{Amplifiers Gain (dBi)}$$

$$E \text{ (dBuV/m)} = V \text{ (dBuV)} + F \text{ (dB/m)}$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dBuV/m

E_{Meas} is the field strength of the emission at the measurement distance, in dBuV/m

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0316	Spectrum Analyzer	FSV30	103309	Rohde & Schwarz	2019-09-02	2021-09-02
0443	RF cable 100cm	Coax 2.92mm Male to 2.92mm Male	N/A	PASTERNAK	N/A	N/A
1044	10dB Attenuator + MH4	N/A	N/A	N/A	N/A	N/A
0583	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9D6E	AVTECH	2019-09-06	2021-09-06
1002	Measurement SW v1.4.10.8	Octopi	N/A	Step AT	N/A	N/A

N/A: Not Applicable

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0135	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2020-07-06	2022-01-07
0136	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
0147	Switch & Positioning systems	EMC Center	00159757	ETS-Lindgren	N/A	N/A
0420	Spectrum Analyzer	FSV40	101556	Rohde & Schwarz	2020-05-25	2022-05-25
0530	Measurement SW, v10.40.10	EMC32	100623	Rohde & Schwarz	N/A	N/A
1033	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
0993	Biconical antenna 30 MHz – 1 GHz	UBAA9115+ BBVU9135+ DGA9552N	0286 + CH 9044	Schwarzbeck	2019-11-22	2021-11-22
0141	Horn Antenna 3117 + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-01	2022-04-01
0334	Double-Ridged Waveguide Horn with Pre-Amplifier 18 GHz to 40 GHz	3116C+PA	00169308bis + 00196308	ETS-Lindgren	2019-07-24	2021-07-24
0202	Cable 1m - 30MHz to 18 GHz	UFB311A-0-3360-50U300	MFR 64639223229-001	Micro-coax	N/A	N/A
0206	Cable 1.2m – 18 to 40 GHz	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	N/A	N/A
0263	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utilflex	N/A	N/A
0371	Cable 1m – 30 MHz - 18GHz	UFB311A-0-0590-50U50U	MFR 64639 223230-001	Micro-coax	N/A	N/A
0758	Cable 7.5m - 30MHz to 18GHz	0501051057000GX	18.23.181	Radiall	N/A	N/A
0809	Cable 7m - 18GHz to 40GHz	R286304009	-	Radiall	N/A	N/A
0859	Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radiall	N/A	N/A
0797	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	Avtech	2019-07-04	2021-07-04

N/A: Not Applicable

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0337	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2020-07-06	2022-07-06
0238	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
0382	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
0383	Turntable	-	-	ETS Lindgren	N/A	N/A
0329	Measurement SW, v10.50.10	EMC32	100401	Rohde & Schwarz	N/A	N/A
0133	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2020-02-25	2022-02-25
0138	Double Ridge Horn (1- 18GHz)	3117	00152266	ETS Lindgren	2020-03-08	2022-03-08
0860	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	N/A	N/A
0275	RF Cable 1-18GHz - 6.5m	140-8500-11-51	001	Spectrum	N/A	N/A
0684	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	N/A	N/A
0141	Horn Antenna 3117 + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-01	2022-04-01
0871	RF Cable 1-18GHz - 1.5m	0501050991200GX	19.21.710	Radiall	N/A	N/A
0796	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D4F316	Avtech	2019-07-05	2021-07-05

N/A: Not Applicable

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0616	Power Sensor	NRP-Z81	104385	Rohde & Schwarz	2020-04-08	2022-04-08
0617	Power Sensor	NRP-Z81	104386	Rohde & Schwarz	2020-04-08	2022-04-08
0618	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2020-04-08	2022-04-08

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Conducted Spurious Emission <26.5 GHz	± 2.90	dB
Radiated tests <1GHz	± 2.95	dB
Radiated tests 1GHz – 26.5 GHz	± 4.34	dB

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Engineer
20dB Bandwidth and Carrier frequency separation	C.Requin
Number of hopping channels	C.Requin
Time of Occupancy (Dwell Time)	C.Requin
Maximum Peak Output Power and antenna gain	C.Requin
Out-of-band Emissions (conducted)	C.Requin
Spurious Emissions (radiated)	R. Luciani N. Bui A. Lounes I. Kharrat N. Nachabe

B.1 20dB Bandwidth and carrier frequency separation

B.1.1 Test limits

FCC part	RSS part	Limits
15.247 (a) (1)	RSS-247 Clause 5.1 (a) and (b)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

B.1.2 Results tables


Mode	Packet Type	Channel Number	Frequency [MHz]	20dB BW [MHz]	Freq. Separation [kHz]
Basic Rate GFSK	DH5	0	2402	0.965	997.5
		39	2441	0.932	
		78	2480	0.931	
EDR π/4-DQPSK	2DH5	0	2402	1.472	1160
		39	2441	1.483	
		78	2480	1.498	
EDR 8-DPSK	3DH5	0	2402	1.387	1000
		39	2441	1.386	
		78	2480	1.382	

Max Value

B.1.3 Results screenshot


Basic Rate - GFSK

20dB BW – CH0

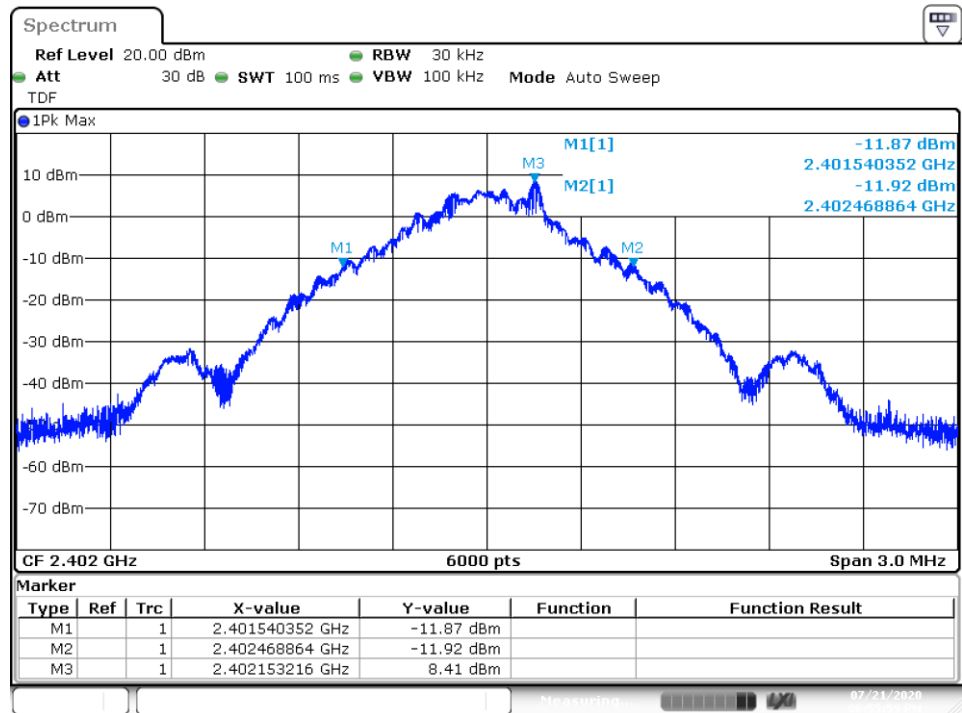


Date: 21.JUL.2020 18:56:59

Freq. Separation

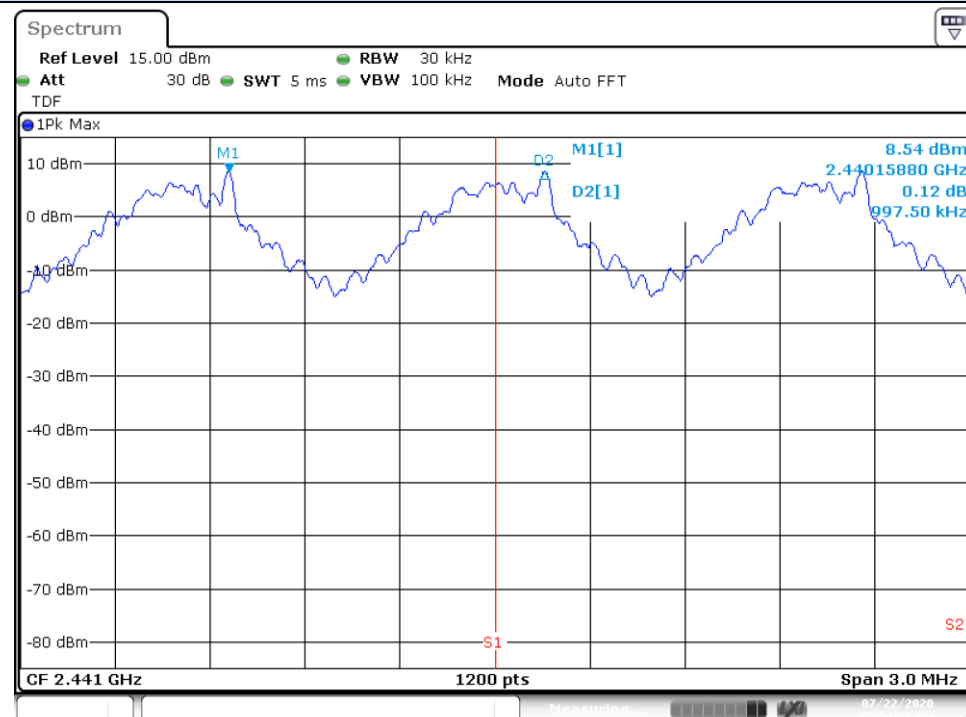


EDR – $\pi/4$ -DQPSK

20dB BW – CH78

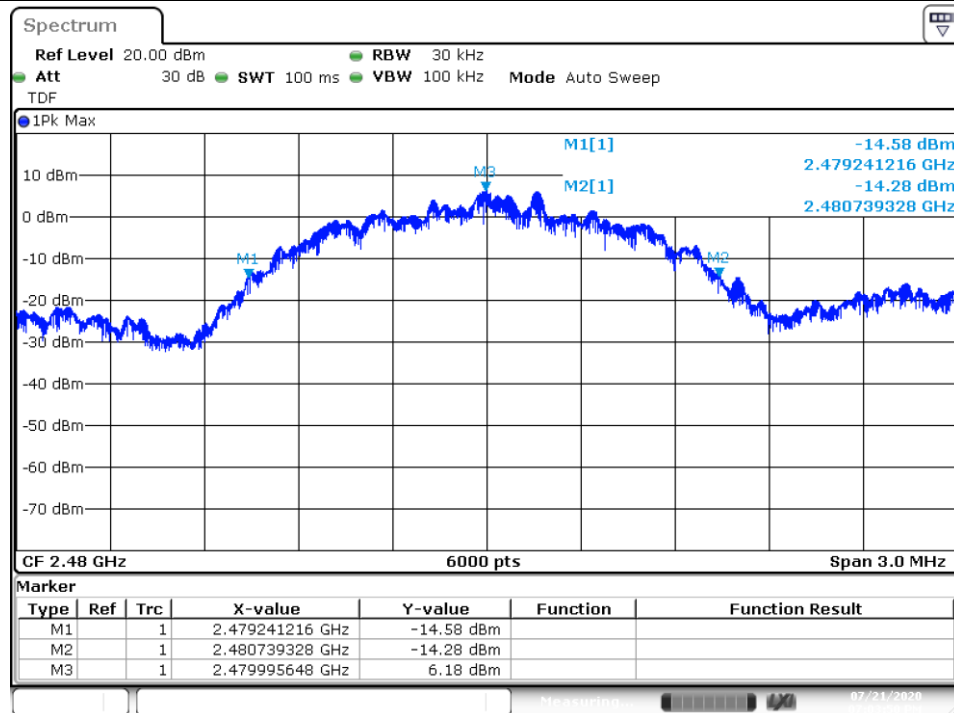


Date: 21.JUL.2020 19:03:50

Freq. Separation

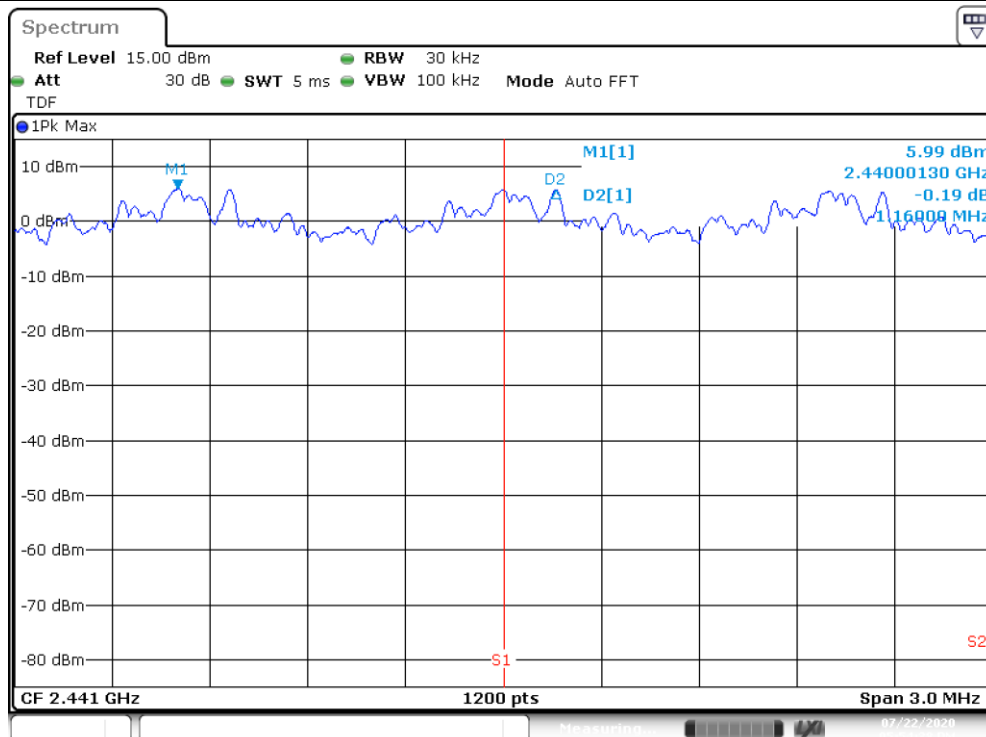


EDR – 8-DPSK

20dB BW – CH0

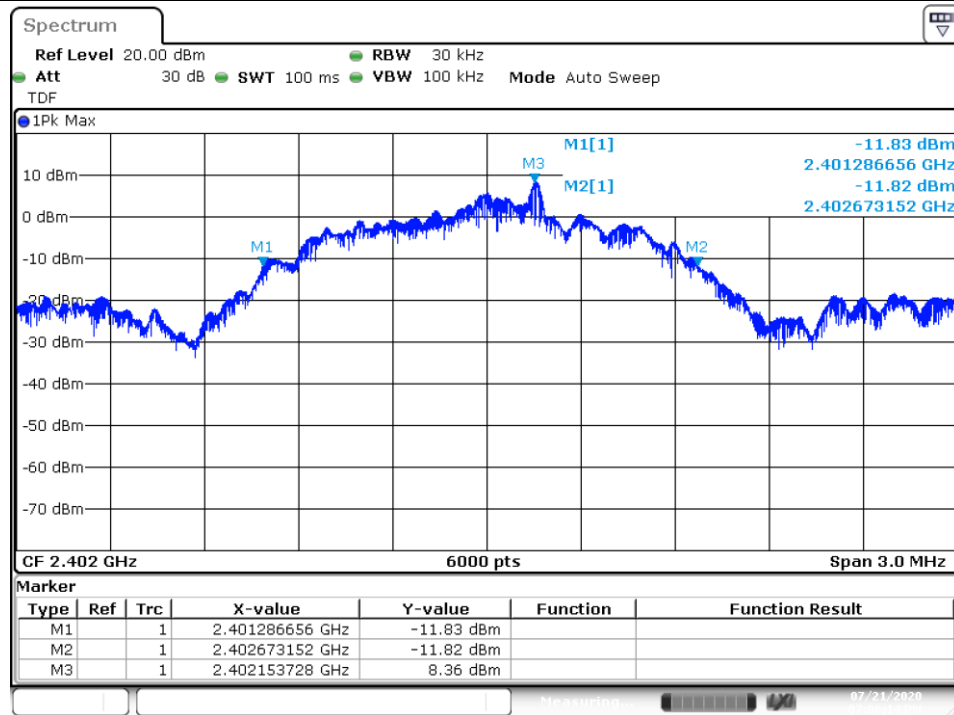

Date: 21.JUL.2020 19:06:15

Freq. Separation

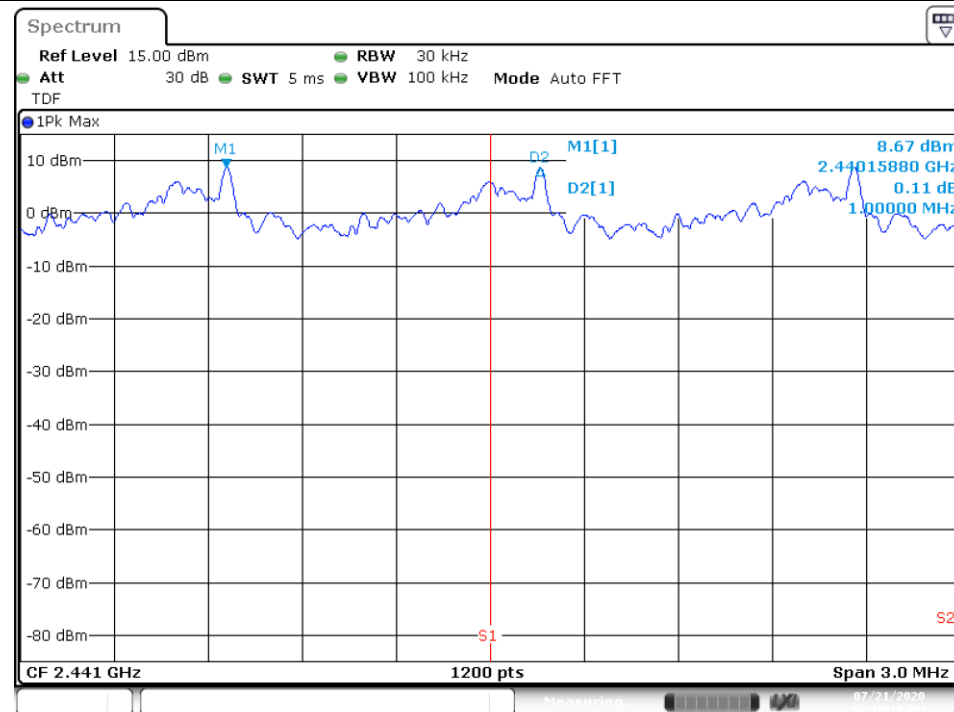

Date: 21.JUL.2020 19:10:20

B.2 Number of hopping channels

B.2.1 Test limits

FCC part	RSS part	Limits
15.247 (a) (1) (iii)	RSS-247 Clause 5.1 (d)	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

B.2.2 Test procedure


The conducted setup shown in section *Test & System Description* was used to measure the number of hopping channels. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

B.2.3 Results tables


Mode	Packet Type	Number of hopping channels
Basic Rate GFSK	DH5	73
EDR $\pi/4$ -DQPSK	2DH5	68
EDR 8-DPSK	3DH5	61

Number of hopping channels


Basic Rate – GFSK

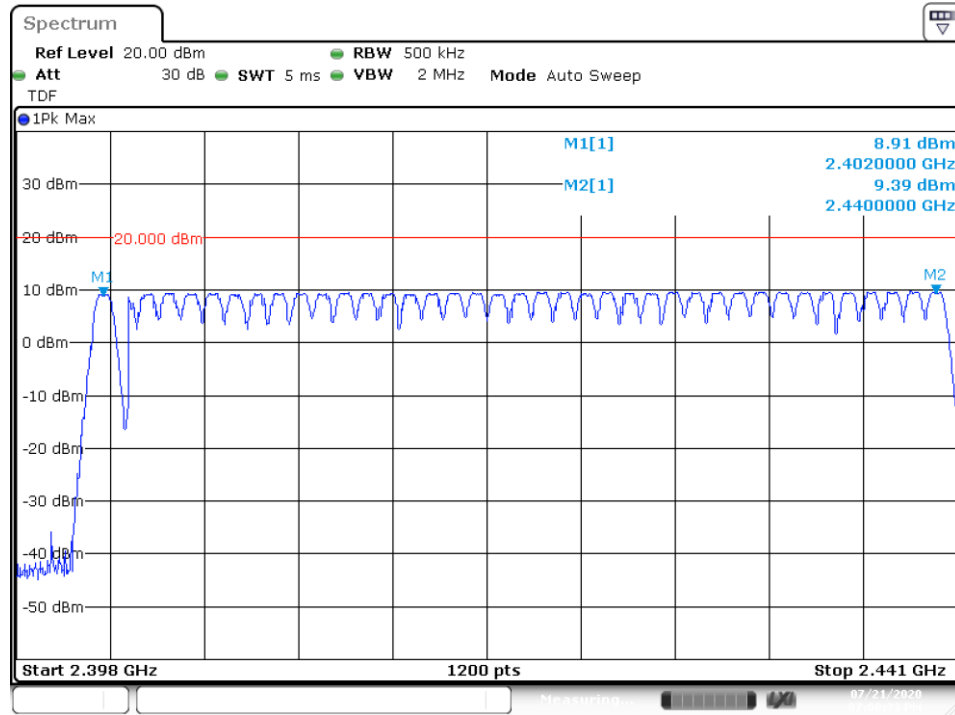


Basic Rate – GFSK

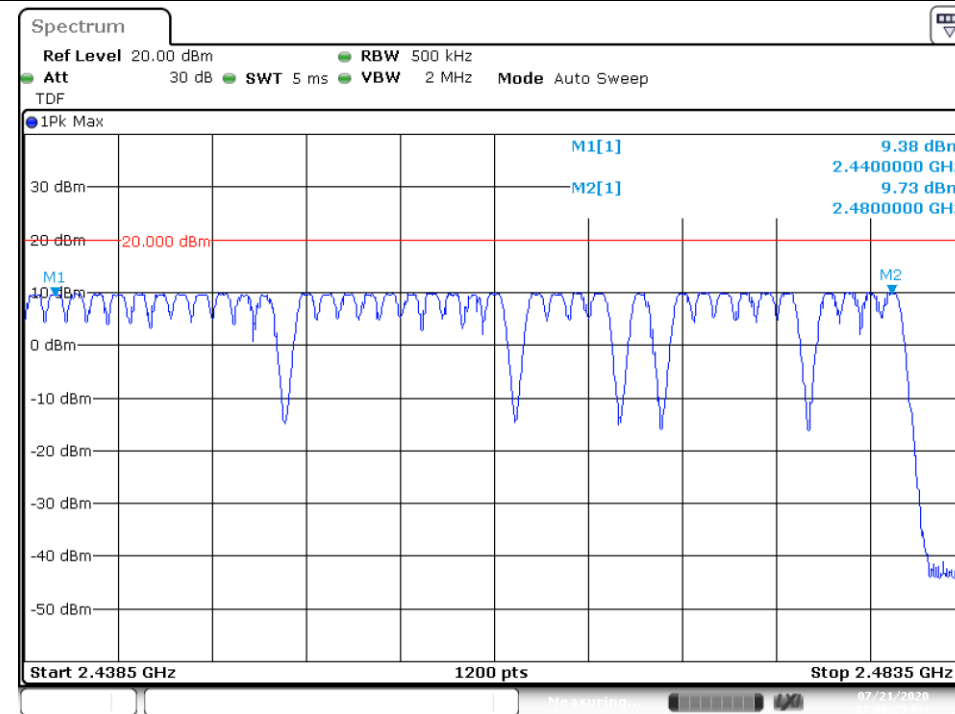


EDR – $\pi/4$ -DPSK

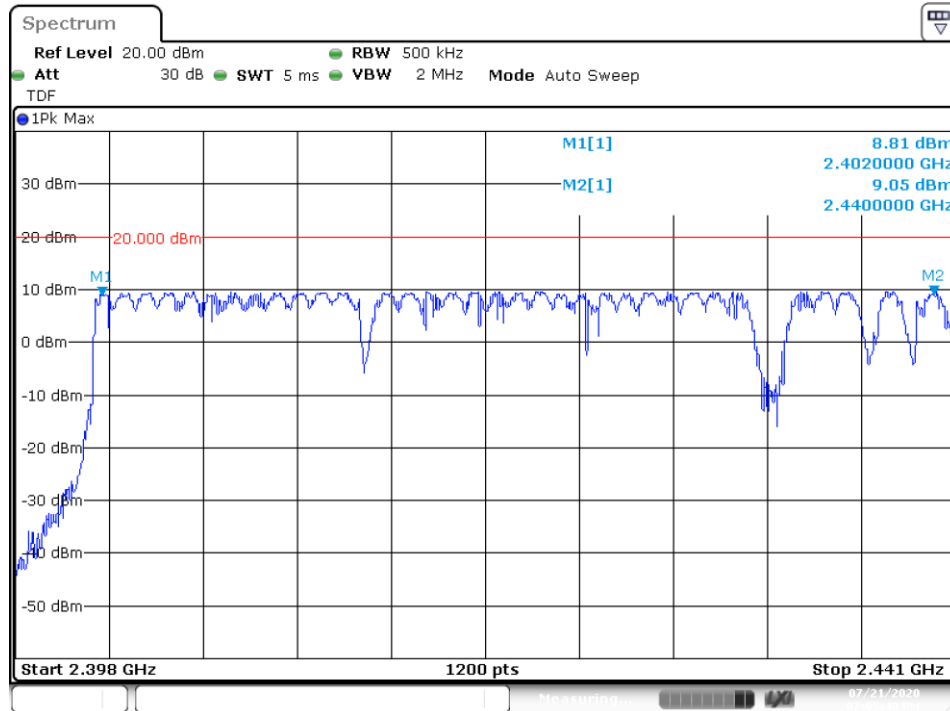


EDR – $\pi/4$ -DPSK

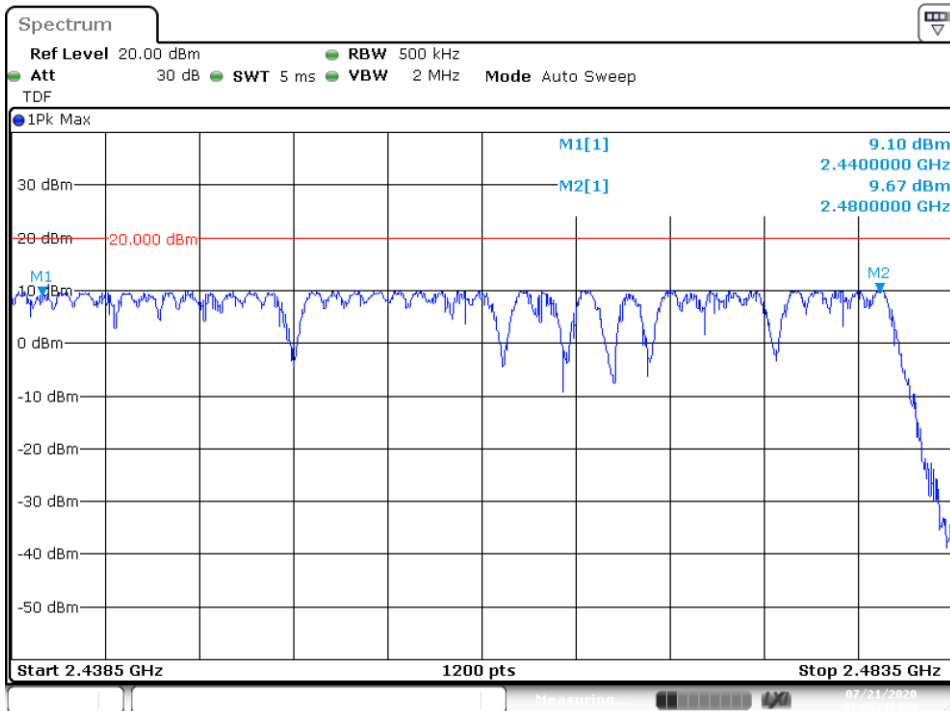

EDR – 8-DPSK

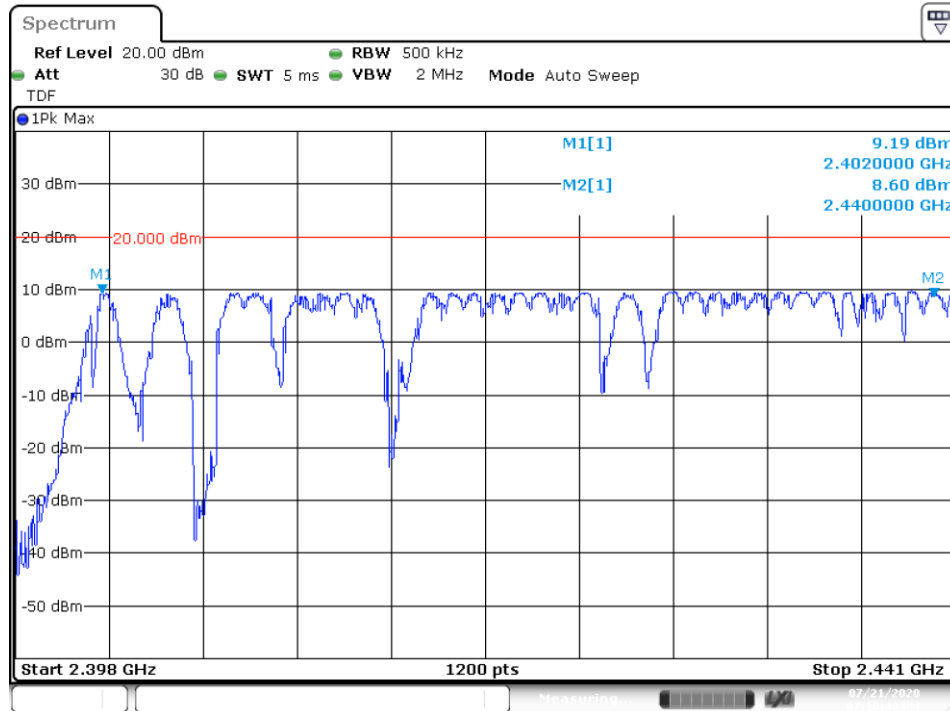

EDR – 8-DPSK

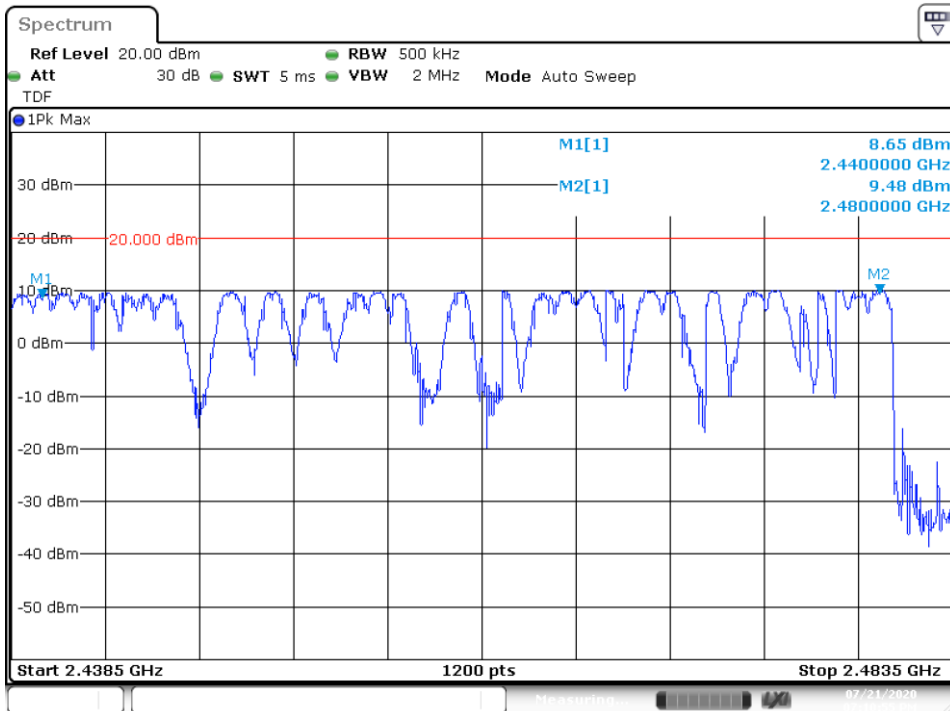

B.3 Time of Occupancy (Dwell Time)

FCC part	RSS part	Limits
15.247 (a) (1) (iii)	RSS-247 Clause 5.1 (d)	The average time of occupancy (Dwell Time) on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

B.3.1 Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the dwell time. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

In the worst case, the system makes 1600 hops per second with 79 channels, providing a 1 timeslot length of 625 μ s.

A DH1 packet, with independence of the modulation, needs 1 time slot for transmitting and 1 time slot for receiving. Then, the system makes in the worst case $1600/2 = 800$ hops per second with 79 channels. So each channel appears $800/79 = 10.13$ times per second and, for a period of $0.4 \times 79 = 31.6$ seconds, each channel appears $10.13 \times 31.6 = 320.11$ times.

A DH3 packet, with independence of the modulation, needs 3 time slots for transmitting and 1 time slot for receiving. Then, the system makes in the worst case $1600/4 = 400$ hops per second with 79 channels. So each channel appears $400/79 = 5.1$ times per second and, for a period of $0.4 \times 79 = 31.6$ seconds, each channel appears $5.1 \times 31.6 = 161.16$ times.


A DH5 packet, with independence of the modulation, needs 5 time slots for transmitting and 1 time slot for receiving. Then, the system makes in the worst case $1600/6 = 266.67$ hops per second with 79 channels. So each channel appears $266.67/79 = 3.37$ times per second and, for a period of $0.4 \times 79 = 31.6$ seconds, each channel appears $3.37 \times 31.6 = 106.49$ times.

Thus, the total time of occupancy is obtained by multiplying the calculated maximum number of appearances per packet type and the measured Tx-time, as shown in the results screenshots.


B.3.2 Results tables

Mode	Packet Type	Times of appearance	Tx-time [ms]	Dwell Time [ms]
Basic Rate GFSK	DH1	320.11	0.368	117.80
	DH3	161.16	1.639	264.14
	DH5	106.49	2.882	306.90
EDR $\pi/4$ -DQPSK	2-DH1	320.11	0.385	123.24
	2-DH3	161.16	1.639	264.14
	2-DH5	106.49	2.885	307.22
EDR 8-DPSK	3-DH1	320.11	0.390	124.84
	3-DH3	161.16	1.637	263.82
	3-DH5	106.49	2.897	308.50


B.3.3 Results Screenshot

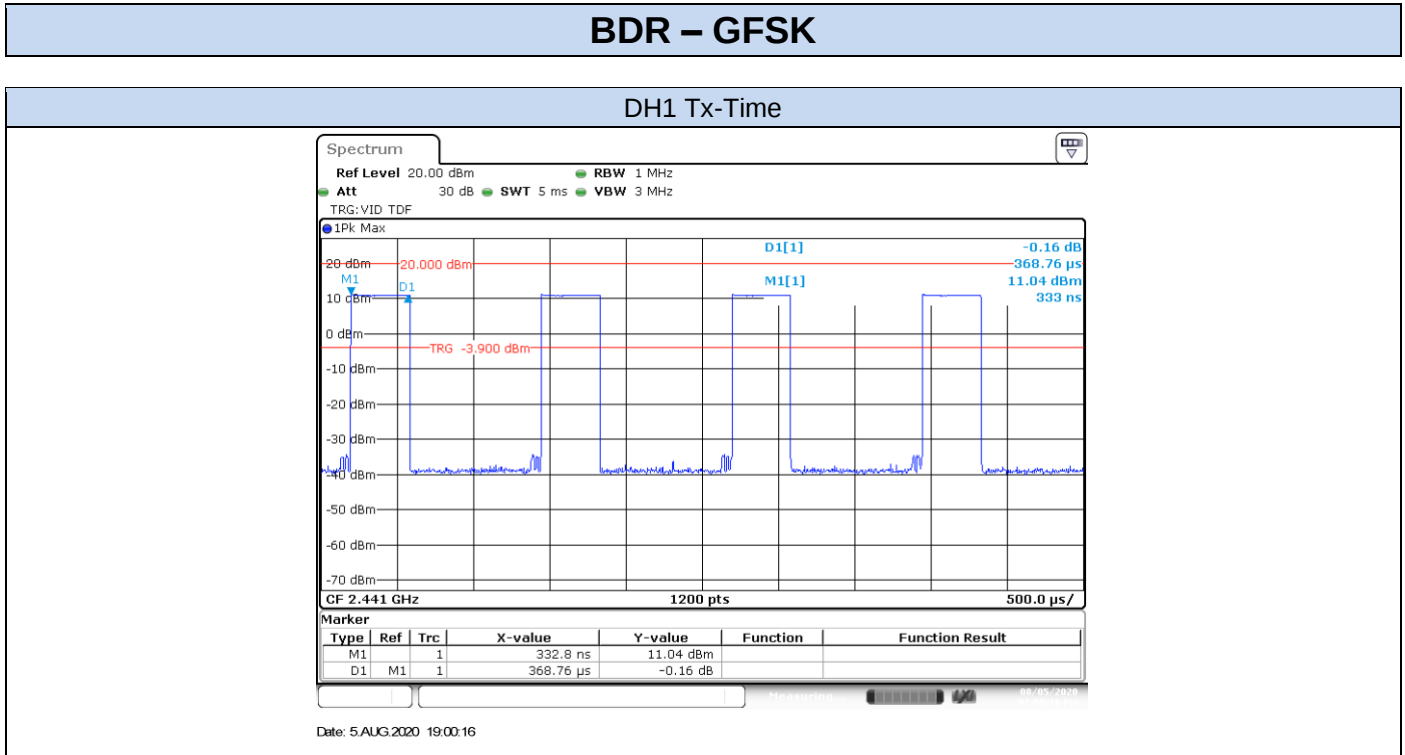

DH3 Tx-Time

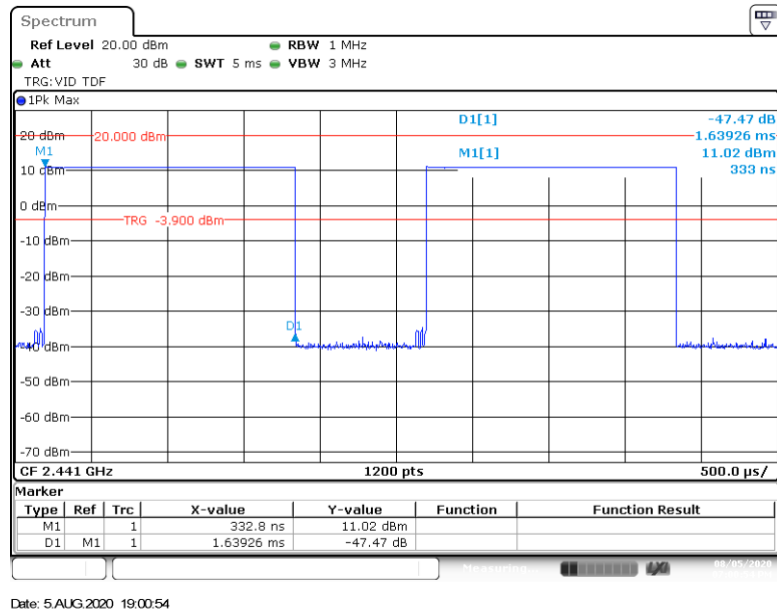


DH5 Tx-Time

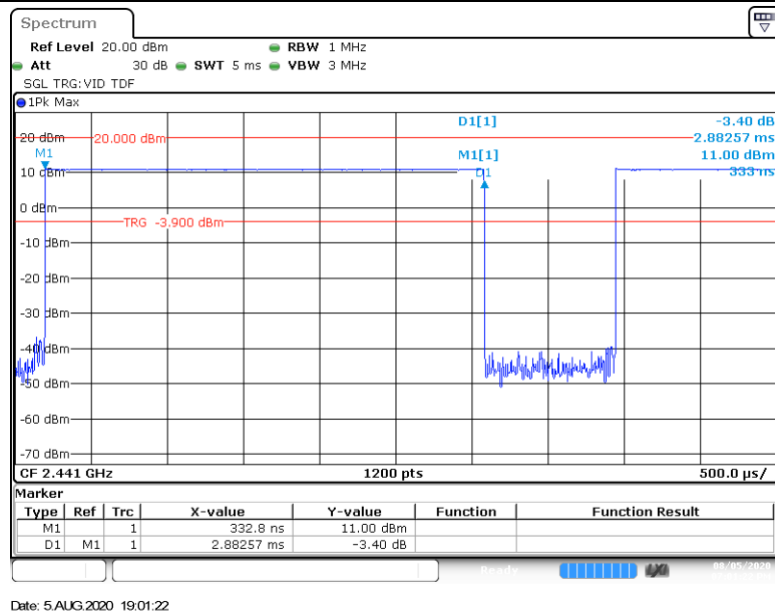


EDR – $\pi/4$ -DQPSK


2-DH1 Tx-Time

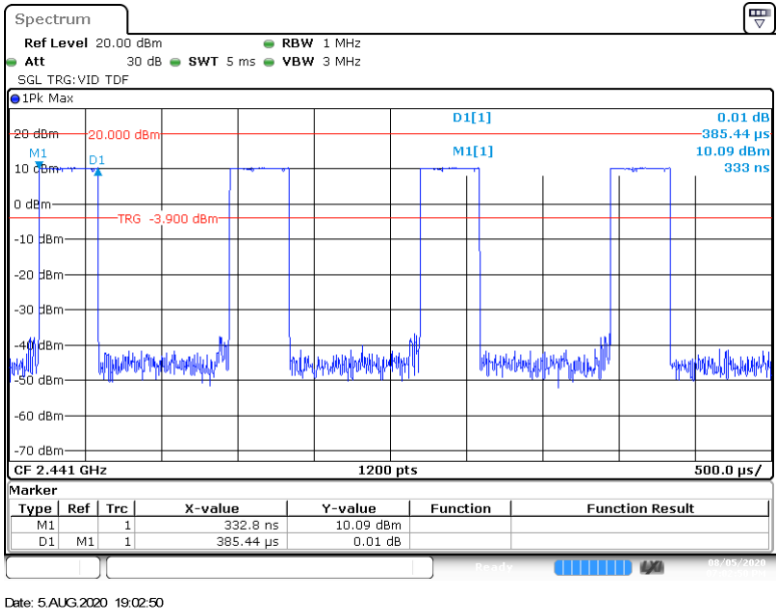

2-DH3 Tx-Time

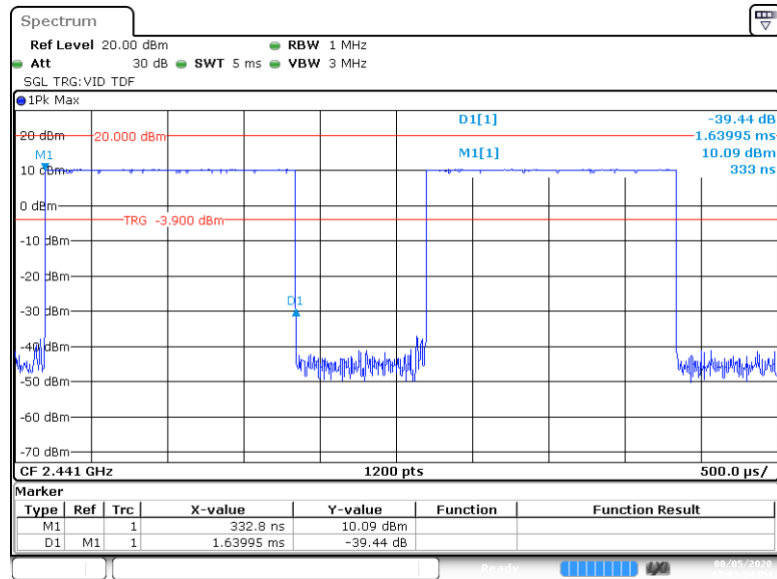


2-DH5 Tx-Time

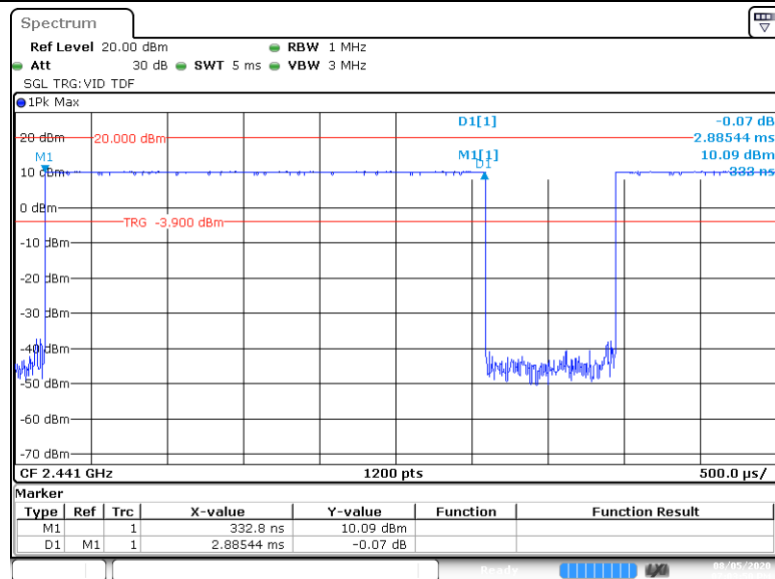


EDR – 8-DPSK


3-DH1 Tx-Time

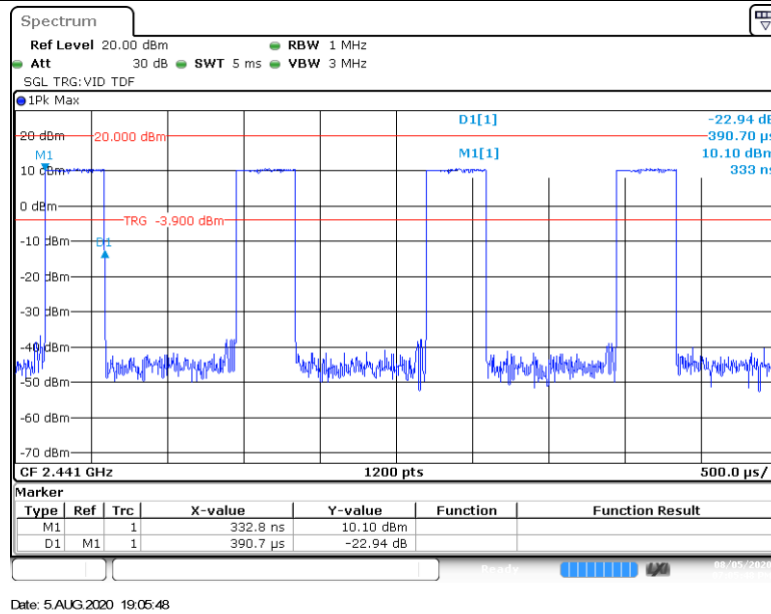

3-DH3 Tx-Time

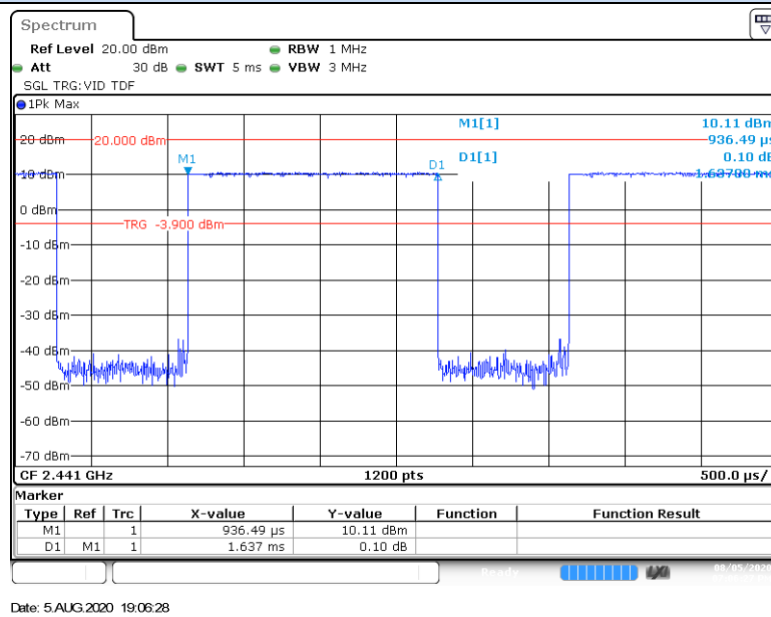

3-DH5 Tx-Time

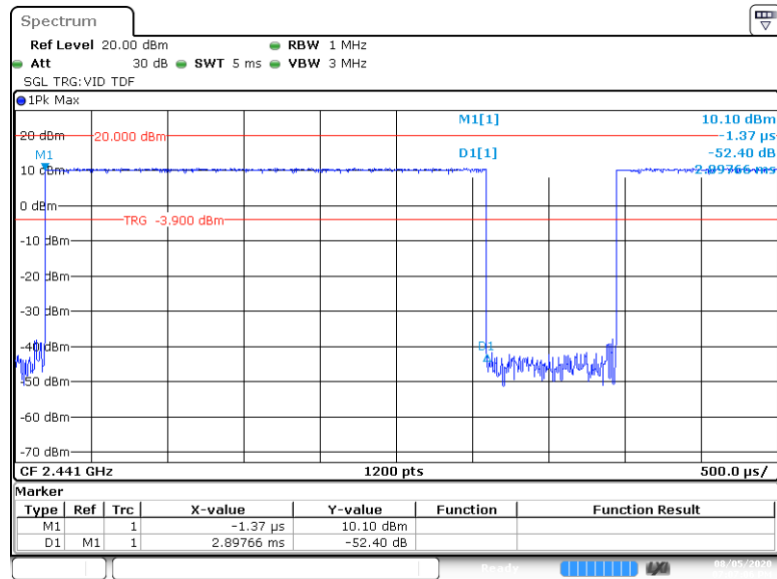

Date: 5.AUG.2020 19:07:06

B.4 Maximum Peak Output Power antenna gain

B.4.1 Test Limits

FCC part	RSS part	Limits
15.247 (b) (1)	RSS-247 Clause 5.4 (b)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. (...) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

B.4.2 Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the maximum peak output power. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

The declared maximum antenna gain is +3.24dBi.


B.4.3 Results tables

Mode	Packet Type	Channel Number	Frequency [MHz]	Peak Power [dBm]	Peak Power [mW]	Peak Power EIRP [dBm]	Peak Power EIRP [mW]
Basic Rate GFSK	DH5	0	2402	10.03	10.07	13.27	21.23
		39	2441	11.12	12.94	14.36	27.29
		78	2480	11.42	13.87	14.66	29.24
EDR $\pi/4$ -DQPSK	2DH5	0	2402	10.59	11.46	13.83	24.15
		39	2441	10.78	11.97	14.02	25.23
		78	2480	10.19	10.45	13.43	22.03
EDR 8-DPSK	3DH5	0	2402	10.61	11.51	13.85	24.27
		39	2441	10.84	12.13	14.08	25.59
		78	2480	10.31	10.74	13.55	22.65

B.4.4 Results Screenshot

Basic Rate - GFSK


Peak Power – CH78

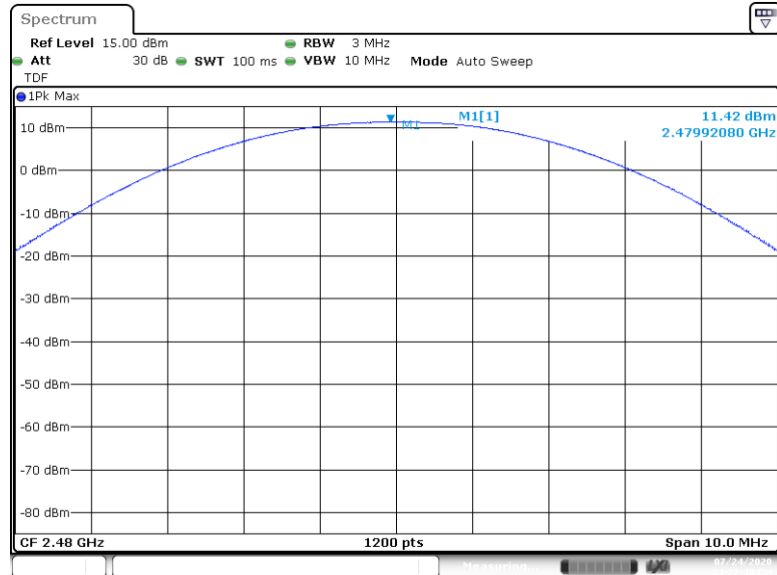


Date: 24.JUL.2020 16:27:40

EDR – $\pi/4$ -DQPSK

Peak Power – CH39

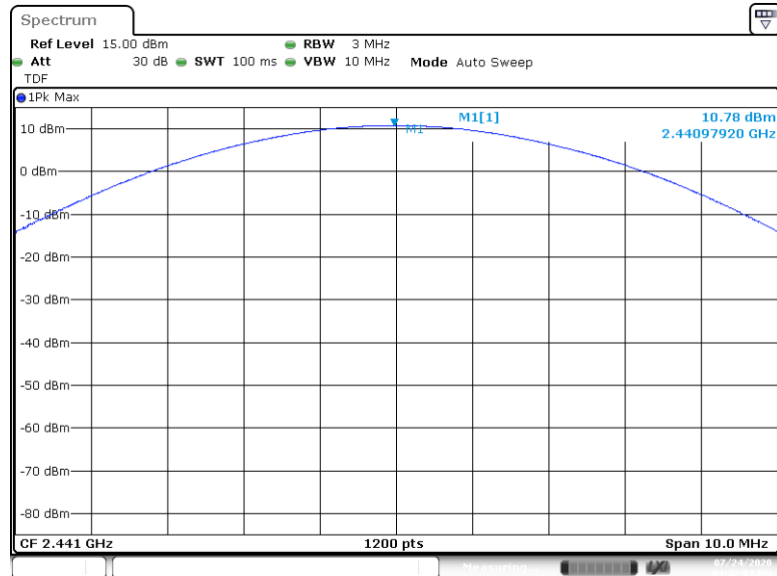

Date: 24.JUL.2020 16:42:01

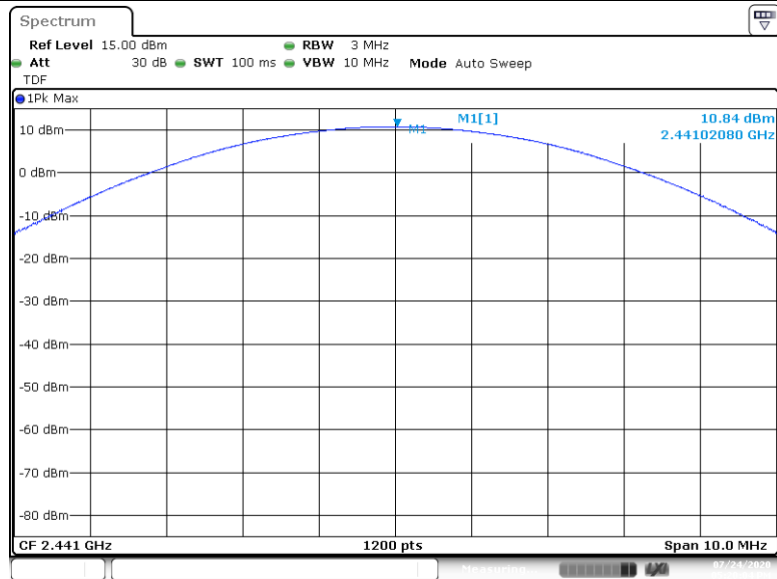EDR – 8-DPSK**Peak Power – CH39**

Date: 24.JUL.2020 17:20:04

B.5 Out-of-band emission (conducted)

B.5.1 Test limits

FCC part	RSS part	Limits
15.247 (d)	RSS-247 Clause 5.5	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

B.5.2 Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the out-of-band emissions (conducted). The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.


Note: these PSD_{Peak} values are shown just as a reference for the compliance of the Out-of-band measurements. Thus the RBW used for these measurements was 100 kHz.

Mode	Packet Type	CH	Frequency [MHz]	PSD Peak [dBm/100kHz]
Basic Rate - GFSK	DH5	0	2402	9.20
		39	2441	9.46
		78	2480	9.75
EDR – $\pi/4$ -DQPSK	2DH5	0	2402	9.02
		39	2441	9.43
		78	2480	9.68
EDR – 8-DPSK	3DH5	0	2402	9.21
		39	2441	9.41
		78	2480	9.73

B.5.3 Test results


Basic Rate - GFSK

BE Low Non Restricted Freq Section – CH0

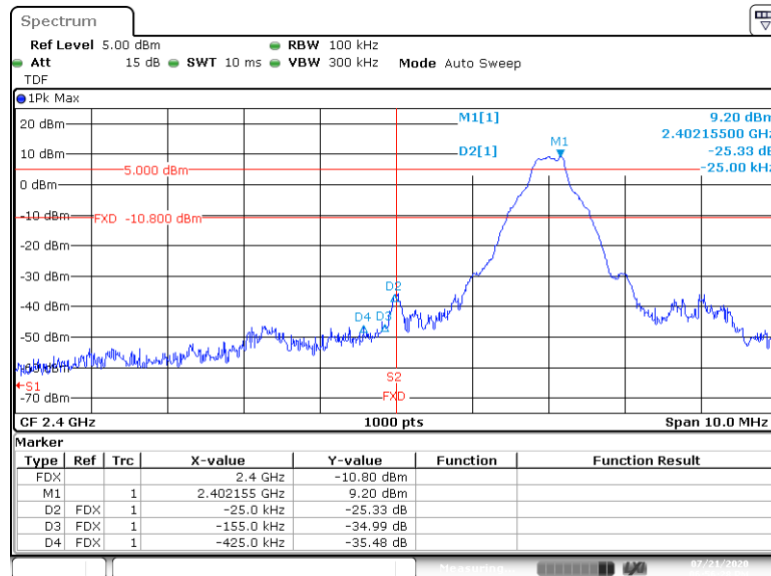


Date: 21.JUL.2020 18:58:29

BE Low Restricted Freq Section – CH0

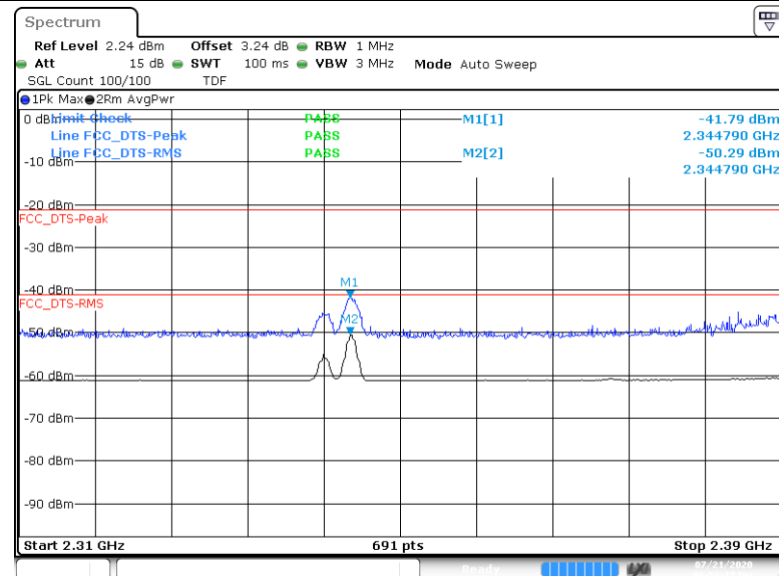


Date: 21.JUL.2020 18:58:17


BE Low Non Restricted Freq Section – Hopping

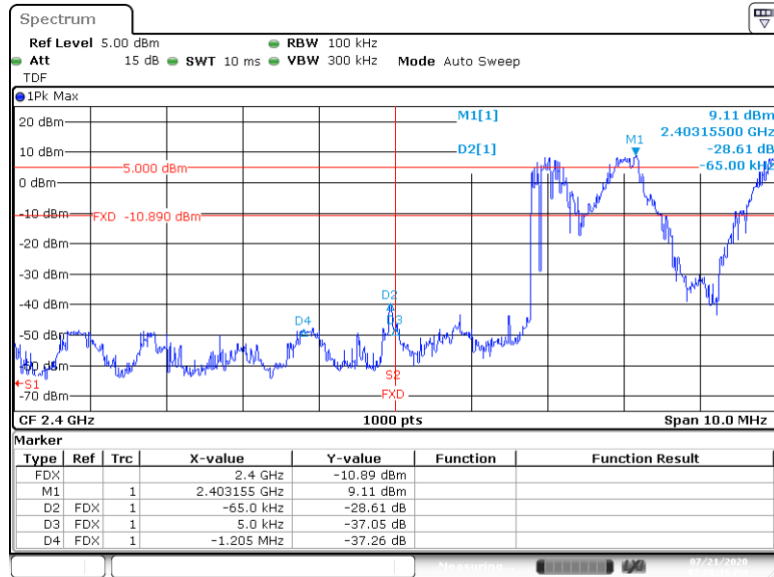

BE High Hopping Restricted Freq Section – Hopping

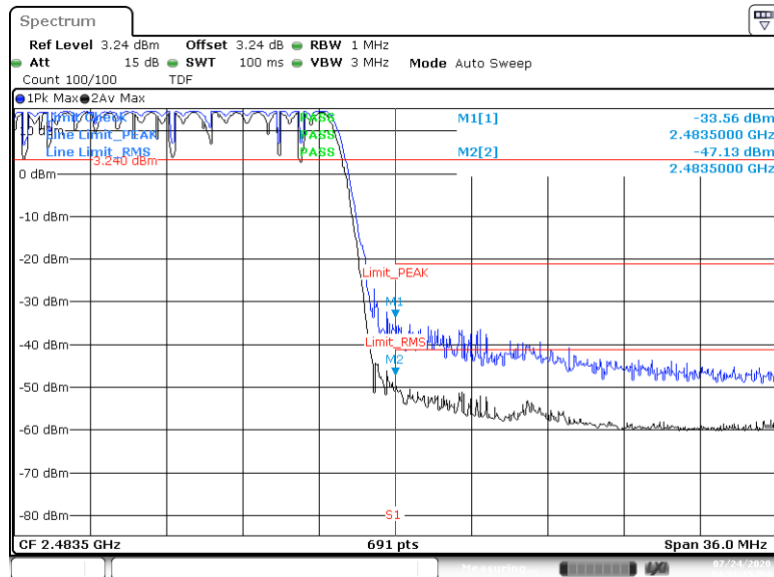


BE High Restricted Freq Section –CH78

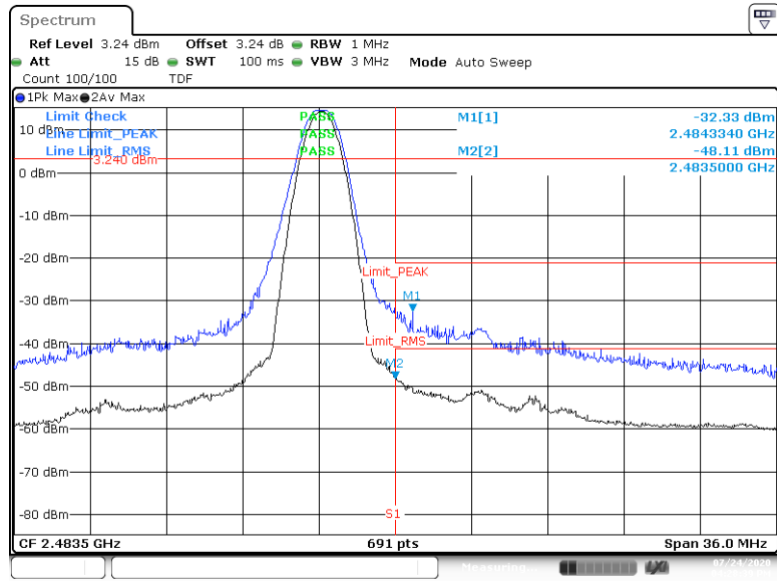


Date: 24.JUL.2020 16:28:39


BE Low Non Restricted Freq Section – Hopping

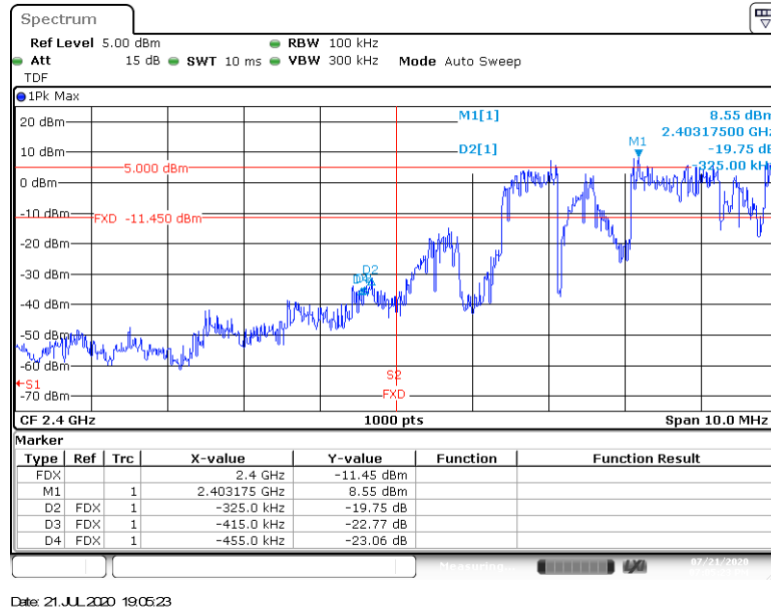

BE High Restricted Freq Section – Hopping

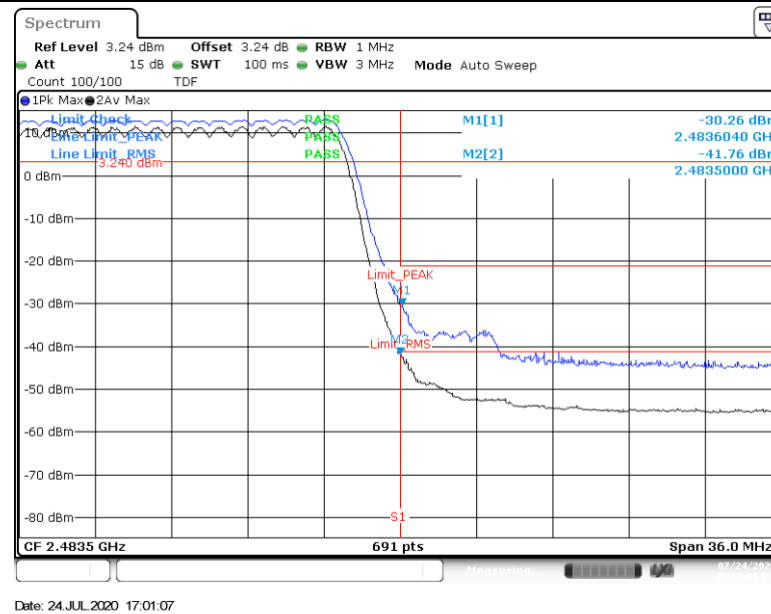


BE High Restricted Freq Section – CH78

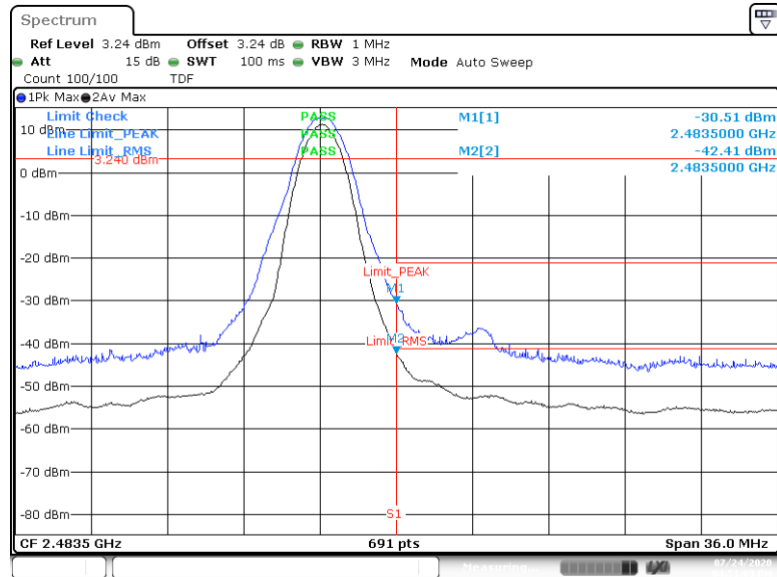


Date: 24.JUL.2020 16:51:09

EDR – 8-DPSK


BE Low Non Restricted Freq Section – CH0

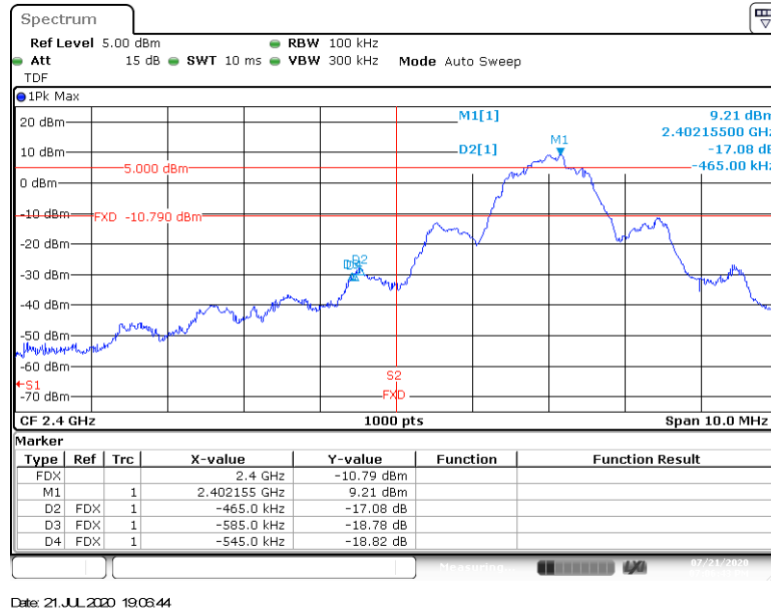


BE Low Restricted Freq Section – CH0

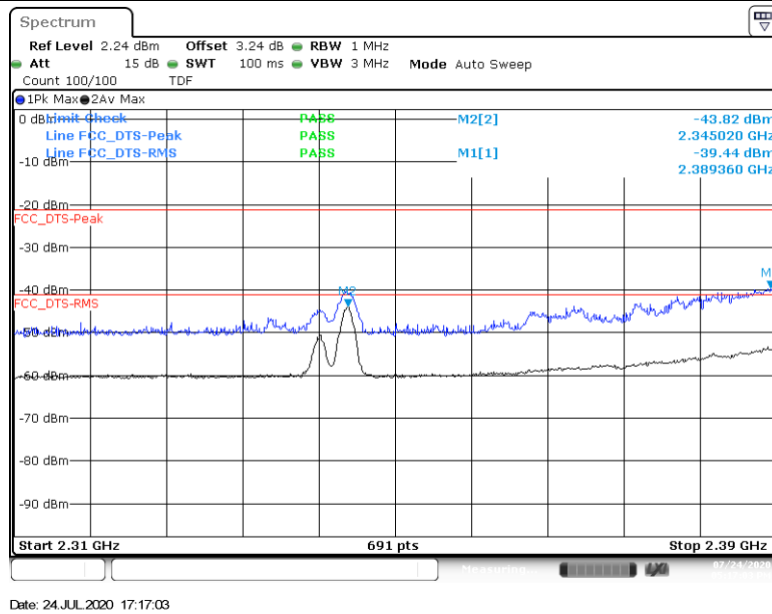


BE Low Non Restricted Freq Section – Hopping

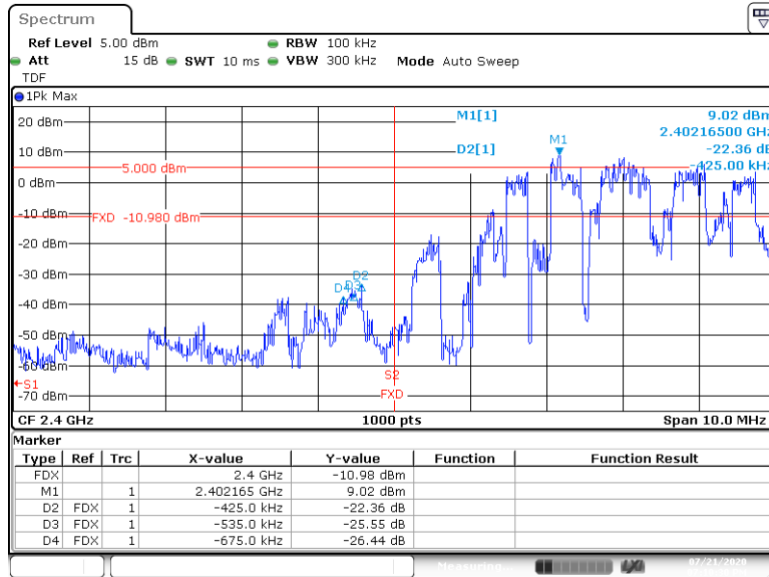

BE High Restricted Freq Section – Hopping

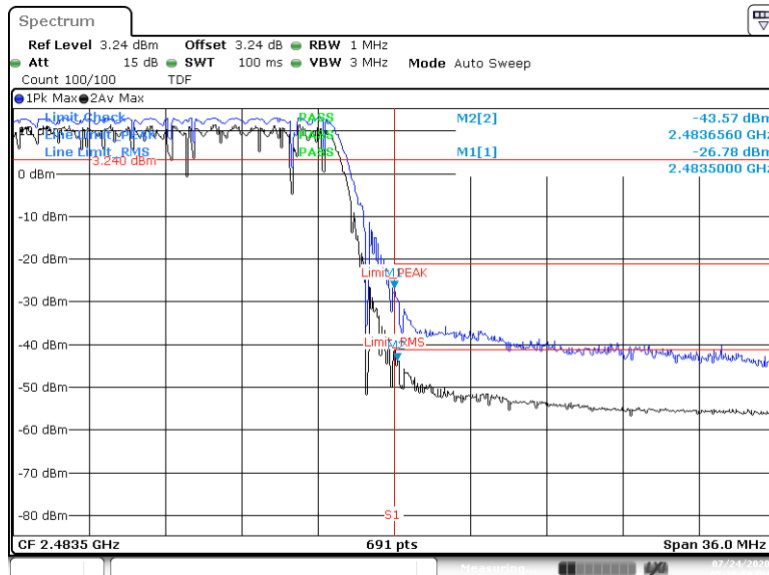

BE High Restricted Freq Section – CH78

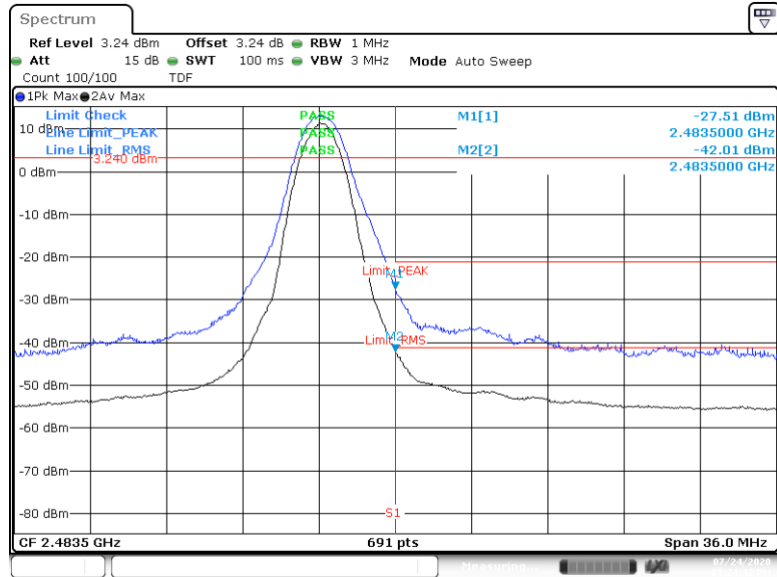

Date: 24.JUL.2020 17:24:43

B.6 Radiated spurious emission

B.6.1 Standards references

FCC part	RSS part	Limits			
15.247 (d) 15.209 (a)	RSS-247 Clause 5.5 RSS GEN A1 Clause 8.9	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):			
		Freq Range (MHz)	Field Streghth (μV/m)	Field Streghth (dBμV/m)	Meas. Distance (m)
		30-88	100	40	3
		88-216	150	43.5	3
		216-960	200	46	3
		Above 960	500	54	3
		The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.			

B.6.2 Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height from 1 m to 4 m, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration found.

B.6.3 Test Results

30 MHz – 1 GHz, Radiated emissions

Radiated Spurious – All modes

Frequency	Quasi-Peak	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dB	
260.2	33.4	46.0	12.6	H
277.6	32.6	46.0	13.4	H

Note 1: The detected spurious signals do not depend on either the operating channel or the modulation mode.

1 GHz – 26.5 GHz, BR – GFSK

Radiated Spurious – CH0 DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3372.5	61.3	---	74.0	12.7	V
3373.0	---	48.0	54.0	6.0	V
16432.5	---	37.9	54.0	16.1	H
16432.5	51.7	---	74.0	22.3	H
25928.5	48.8	---	74.0	25.2	H
25928.5	---	37.2	54.0	16.8	V

Radiated Spurious – CH39 DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3368.5	---	47.7	54.0	6.3	V
3368.5	60.7	---	74.0	13.3	V
17493.5	---	39.1	54.0	14.9	H
17493.5	52.8	---	74.0	21.2	H
25924.6	47.6	---	74.0	26.4	H
25924.6	---	36.7	54.0	17.3	H

Radiated Spurious – CH78 DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3388.5	---	48.0	54.0	6.0	H
3388.5	61.1	---	74.0	12.9	H
17922.0	---	38.9	54.0	15.1	H
17922.0	52.6	---	74.0	21.4	H
25249.0	48.1	---	74.0	25.9	V
25249.0	---	36.5	54.0	17.5	H

1 GHz – 26.5 GHz, EDR – $\pi/4$ -DQPSK

Radiated Spurious – CH0 2DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3384.0	---	47.9	54.0	6.1	H
3384.0	61.1	---	74.0	12.9	H
17829.0	---	39.6	54.0	14.4	V
17829.0	53.0	---	74.0	21.0	V
25931.3	48.1	---	74.0	25.9	H
25931.3	---	36.6	54.0	17.4	V

Radiated Spurious – CH39 2DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3398.0	60.9	---	74.0	13.1	H
3398.0	---	47.9	54.0	6.1	V
17481.0	52.2	---	74.0	21.8	V
17496.5	---	39.6	54.0	14.4	V
25917.8	48.7	---	74.0	25.3	H
25917.8	---	36.8	54.0	17.2	H

Radiated Spurious – CH78 2DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3384.0	60.6	---	74.0	13.4	V
3384.5	---	47.8	54.0	6.2	V
17800.0	52.4	---	74.0	21.6	V
17835.5	---	39.7	54.0	14.3	V
25921.2	49.2	---	74.0	24.8	V
25921.2	---	37.6	54.0	16.4	V

1 GHz – 26.5 GHz, EDR – 8-DPSK

Radiated Spurious – CH0 3DH5

Frequency	MaxPeak	Avg	Limit	Margin	Plarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3396.5	---	47.9	54.0	6.1	V
3396.5	60.4	---	74.0	13.6	V
17908.0	---	39.5	54.0	14.5	H
17908.0	52.2	---	74.0	21.8	V
25246.2	48.8	---	74.0	25.2	H
25246.2	---	36.4	54.0	17.6	H

Radiated Spurious – CH39 3DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3385.5	---	47.8	54.0	6.2	V
3385.5	60.9	---	74.0	13.1	V
17461.0	---	38.8	54.0	15.2	V
17461.0	52.5	---	74.0	21.5	H
25907.7	49.0	---	74.0	25.0	H
25907.7	---	37.6	54.0	16.4	H

Radiated Spurious – CH78 3DH5

Frequency	MaxPeak	Avg	Limit	Margin	Polarization
MHz	dBμV/m	dBμV/m	dBμV/m	dB	
3397.5	---	47.9	54.0	6.1	V
3398.5	60.5	---	74.0	13.5	V
17829.0	---	39.9	54.0	14.1	V
17830.0	53.3	---	74.0	20.7	V
25924.6	48.7	---	74.0	25.3	V
25924.6	---	37.5	54.0	16.5	H