

TEST REPORT

of

FCC CFR 47 part 1, 1.1307(b), 1.1310

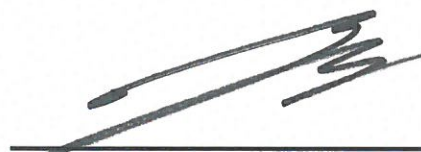
FCC ID: BEJ-TM04ANNABM0

Equipment Under Test : Telematics Module
Model Name : TM04ANNABM0
Variant Model Name(s) : -
FCC Applicant : LG Electronics USA
IC Applicant : LG ELECTRONICS INC.
Manufacturer : LG Electronics Inc.
Date of Receipt : 2020.11.11
Date of Test(s) : 2020.11.11 ~ 2021.04.14
Date of Issue : 2021.04.20


In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.

Tested by:


Murphy Kim

Technical
Manager:


Jinhyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL001962

Page: 2 of 8

INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. RF Exposure Evaluation -----	5

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901
FAX : +82 31 688 0921

1.2. Details of Applicant

FCC Applicant : LG Electronics USA
FCC Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, United States, 07632
IC Applicant : LG ELECTRONICS INC.
IC Address : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, Korea (Republic of), 451-713
Contact Person : Kim, Dae-woong
Phone No. : +1 201 266 2215

1.3. Details of Manufacturer

Company : LG Electronics Inc.
Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Korea, 07796

1.4. Description of EUT

Kind of Product	Telematics Module
Model Name	TM04ANNABM0
Power Supply	DC 12.5 V
Frequency Range	GSM 850: 824 MHz ~ 849 MHz GSM 1 900: 1 850 MHz ~ 1 910 MHz WCDMA II : 1 850 MHz ~ 1 910 MHz WCDMA IV: 1 710 MHz ~ 1 755 MHz WCDMA V : 824 MHz ~ 849 MHz LTE Band 2: 1 850 MHz ~ 1 910 MHz LTE Band 4: 1 710 MHz ~ 1 755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1 850 MHz ~ 1 915 MHz LTE Band 26: 824 MHz ~ 849 MHz LTE Band 66: 1 710 MHz ~ 1 780 MHz LTE Band 71: 663 MHz ~ 698 MHz
H/W Version	Rev.C3
S/W Version	WN22XA28

**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL001962

Page: 4 of 8

1.5. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL001962	2021.04.20	Initial

2. RF Exposure Evaluation

2.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1 500	-	-	f/300	6
1 500-100 000	-	-	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
<u>300-1 500</u>	-	-	<u>f/1500</u>	<u>30</u>
<u>1 500-100 000</u>	-	-	<u>1.0</u>	<u>30</u>

2.1.1. Friis transmission formula: $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

2.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

2.1.3. Output Power into Antenna & RF Exposure Evaluation Distance

GSM 850

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Duty Cycle (%)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
824 ~ 849	35.5	-0.2	25	0.168 551	0.549 333

GSM 1 900

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Duty Cycle (%)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 850 ~ 1 910	30.7	2.3	25	0.099 250	1

WCDMA - Band II

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 850 ~ 1 910	25.7	2.3	0.125 525	1

WCDMA - Band IV

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 710 ~ 1 755	25.7	2.8	0.140 841	1

WCDMA - Band V

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
824 ~ 849	25.7	-0.2	0.070 588	0.549 333

LTE Band 12/17
- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
699 ~ 716	25.7	-3.1	0.036 202	0.549 333

LTE Band 13
- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
777 ~ 787	25.7	-0.4	0.067 411	0.549 333

LTE Band 25/2
- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 850 ~ 1 915	25.7	2.3	0.125 525	1

LTE Band 26/5
- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
814 ~ 849	25.7	0.0	0.073 915	0.542 667

LTE Band 66/4
- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 710 ~ 1 780	25.7	3.0	0.147 479	1

LTE Band 71
- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
663 ~ 698	25.7	-3.4	0.033 785	0.549 333

Note;

- The power density Pd (5th column) at a distance of 20 cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm².
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- This equipment should be installed and operated with minimum 20 cm between the radiator and your body.
- The antenna gain of this transmitter is less than 6 dBi and must not be collocated or operating in conjunction with any other antenna or transmitter unless authorized to do so by the FCC.
- According to KDB 447498 D01 RF Exposure Guidance 4.1.

- End of the Test Report -