

Gantner Electronic GmbH

TEST REPORT

SCOPE OF WORK

RADIO TESTING – ACCESS CONTROL READER [GR7b.2310]

REPORT NUMBER

2240115KAU-028

ISSUE DATE

04-November-2021

PAGES

46

DOCUMENT CONTROL NUMBER

R_FCC 15-225_19-10 (30-October-2019)

© 2017 INTERTEK



TYPE: GR7b.2310
DESCRIPTION: Access control reader
SERIAL NO (EUT 1): 2047000002
SERIAL NO (EUT 2): 2047000003

*The antenna of the RFID module was replaced by a terminating resistor.
All measurement results refer to the equipment which was tested

MANUFACTURER: Gantner Electronic GmbH
CUSTOMER NAME: Gantner Electronic GmbH
ADDRESS (CUSTOMER): Bundesstr. 12
AT-6714 Nüziders
AUSTRIA

REPORT NO: 2240115KAU-028

TEST RESULT: The equipment complies to 47 CFR Part 15, Subpart C, Intentional radiators, section 15.225 / RSS-210, Issue 10 and RSS-GEN, Issue 5 for 13.56 MHz RFID module (Referring to the operating modes specified in this report).

TEST LABORATORY: Intertek Deutschland GmbH
Innovapark 20, 87600 Kaufbeuren
Germany

FCC DESIGNATION NUMBER: DE0014

FCC TEST FIRM REGISTRATION NUMBER: 359260

ISED CAB IDENTIFIER: DE0014
ISED #: 24854

TEST ENGINEER: M. Bensaid
Project Engineer

REVIEWER: R. Dressler
Technical Manager EMC/ Radio







Details about Accreditations/Acceptances


EMC / Radio National

| | |
|--|--|
|  <p>Deutsche Akkreditierungsstelle D-PL-12085-01-01</p> | <p>The Intertek Deutschland EMC-Lab is accredited by the Deutsche Akkreditierungsstelle GmbH (DAkkS)</p> |
| | <p>Registration Number (EMC general): D-PL-12085-01-01</p> |
| | <p>Registration Number (EMC Med): D-PL-12085-01-03</p> |
| | <p>Registration Number (EMC Canada): D-PL-12085-01-04</p> |
| | <p>Registration Number (EMC FCC): D-PL-12085-01-05</p> |

International

| | |
|--|---|
|  | <p>The Intertek Deutschland EMC-Lab is accepted to participate in the IECEE (IEC Conformity assessment for Electrotechnical Equipment and Components) CB-Scheme</p> <p>CB Test Laboratory: TL118</p> |
|  | <p>The Intertek Deutschland EMC-Lab is listed at the Federal Communications Commission (FCC)</p> <p>Designation Number: DE0014</p> <p>Test Firm Registration Number: 359260</p> |
|  <p>Bundesnetzagentur</p> <p>BNetzA-CAB-16/21-10</p> | <p>The <i>Bundesnetzagentur</i> recognizes Intertek Deutschland GmbH as Conformity Assessment Body in the sector electromagnetic compatibility (EMC).</p> |
|  <p>Innovation, Science and Economic Development Canada</p> | <p>The Intertek Deutschland EMC-Lab is accredited for Innovation, Science and Economic Development Canada (ISED)</p> <p>ISED CAB IDENTIFIER: DE0014</p> <p>ISED #: 24854</p> |

Automotive

| | |
|---|--|
|  <p>Anerkennungsstelle</p> <p>Anerkannt unter KBA-P 00046-03</p> | <p>The Intertek Deutschland EMC-Lab is recognized as technical service of the Kraftfahrt-Bundesamt (KBA)</p> <p>Registration Number: KBA-P 00046-03</p> |
|---|--|

SECTION 1 CONTENTS

| | | |
|-----------------------|--|-----------|
| SECTION 2 | MEASUREMENT AND TEST SPECIFICATION | 5 |
| SECTION 3 | GENERAL INFORMATION | 6 |
| SECTION 4 | SUMMARY OF TESTING | 7 |
| 4.1 | General annotation..... | 7 |
| 4.2 | Measurement uncertainty..... | 7 |
| 4.3 | Document History..... | 7 |
| SECTION 5 | TEST RESULTS – OVERVIEW | 8 |
| SECTION 6 | INFORMATION ABOUT THE EUT | 9 |
| 6.1 | Description of the EUT | 9 |
| 6.2 | Power interface | 10 |
| 6.3 | Peripheral devices used for testing | 10 |
| 6.4 | Configuration mode..... | 10 |
| 6.5 | Operation mode..... | 10 |
| 6.6 | Clock frequencies of the EUT | 11 |
| 6.7 | Supply and interconnecting cables used for testing..... | 11 |
| 6.8 | Antenna configuration | 11 |
| 6.9 | Block diagram of the test setup for radiated emissions | 11 |
| 6.10 | Block diagram of the test setup for conducted emissions..... | 12 |
| 6.11 | Block diagram of the test setup for 20 dB bandwidth-, Occupied bandwidth- and Frequency Stability- test | 12 |
| 6.12 | Technical data of the 2.4 GHz transmitter | 13 |
| SECTION 7..... | | 14 |
| 7.1 | Conducted emissions | 14 |
| 7.2 | Field strength 13.110 MHz – 14.010 MHz (Emission Mask) | 19 |
| 7.3 | Radiated emissions < 30 MHz | 23 |
| 7.4 | Radiated emissions 30 MHz to 26 GHz | 29 |
| 7.5 | Frequency stability measurement | 39 |
| 7.6 | 20 dB bandwidth..... | 41 |
| 7.7 | Occupied bandwidth..... | 43 |
| 7.8 | Measurement uncertainty evaluation | 45 |

SECTION 2

MEASUREMENT AND TEST SPECIFICATION

47 CFR Part 15, Subpart C, Intentional radiators, section 15.207 and section 15.225 /
RSS-210, Issue 10 and RSS-GEN, Issue 5

Test methods in:

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

No additions, deviations or exclusions have been made from standards and accreditation.

The test results detailed in this report apply only to the GR7b.2310 with the test setup described. Any modification such as a change, addition to or inclusion of another device into this product will require an additional evaluation.

The support equipment listed as part of the emission tests is required to properly exercise and test the device under test.

SECTION 3

GENERAL INFORMATION

Possible test case verdicts:

Test case does not apply to the test object: N/A (Not Applicable)

Test object does meet the requirement: P (Pass)

Test object does not meet the requirements: F (Fail)

Samples arrived: 2020-11-27 (EUT 1) and 2021-01-20 (EUT 2)

Testing: 2020-12-11 to 2021-10-27

Decimal separator: ☒ Point ☐ Comma

Environmental conditions during testing:

| | |
|-----------------------|----------------------|
| Temperature: | 15 °C - 35 °C |
| Humidity: | 20 % - 60 % |
| Atmospheric pressure: | 900 mbar - 1000 mbar |

If explicitly required by a basic standard the measured climatic conditions are documented in the corresponding test section.

Test sites:

| Measurement Chamber | Type of chamber | IC Site filing # |
|---------------------|----------------------|------------------|
| ANECHOIC CHAMBER 1 | Semi-anechoic 3 m | 24854 |

SECTION 4

SUMMARY OF TESTING

4.1 General annotation

The tests were performed in the order of the right column in the “Test Results – Overview” table.

At least at one emission test the margin to the limit is less than 6 dB. A minimum margin of 3 - 6 dB is recommended for a serial production.

4.2 Measurement uncertainty

For each test method, an uncertainty evaluation was carried out. The results of the evaluation can be provided upon request from Intertek Deutschland GmbH (see section 7.7).

4.3 Document History

| REVISION | DATE | REPORT | CHANGES | AUTHOR |
|-----------------|------------|----------------|---------------|--------|
| Initial release | 2021-11-04 | 2240115KAU-028 | Initial issue | MBE |

SECTION 5

TEST RESULTS – OVERVIEW

| EMISSION | VERDICT | DATE | NO |
|---|---------|--|-------------|
| Conducted emissions (0.15 MHz - 30 MHz) | P | 2021-01-25 2021-05-29 | 9 10 |
| Field strength (13.110 MHz – 14.010 MHz) | P | 2020-12-12 | 3 |
| Radiated emissions (< 30 MHz) | P | 2020-12-12 | 2 |
| Radiated emissions (30 MHz - 1 GHz) | P | 2020-12-11 | 1 |
| Radiated emissions (1 GHz - 26 GHz) | P | 2020-12-12 2020-12-22 2020-12-23 | 4 7 8 |
| Frequency Stability Test | P | 2020-12-17 | 5 |
| 20 dB bandwidth | P | 2021-10-27 | 11 |
| Occupied bandwidth test | P | 2020-12-18 | 6 |

SECTION 6

INFORMATION ABOUT THE EUT

6.1 Description of the EUT

Device tested as:

☒ table-top EUT

☐ floor-standing EUT

Dimensions:

Height:

Width:

Length:

17.3 cm

10 cm

3.8 cm

Firmware version:

Special Version for Testing

Hardware version:

3.1

EUT version:

☒ Production

☐ Prototype

☐ Used

Description: the GR7b.2310 is a Multifunctional Access Control Reader. The multi-technology reader reads and writes all popular RFID technologies (LEGIC and MIFARE) and can read the unique numbers of many other identification technologies and RFID standards. It also has an additional Fingerprint reader.

The EUT has a Bluetooth module and a RFID module.

6.1.1 Technical data of the RFID module

Transmitter frequency range: 13.56 MHz

Frequency agile or hopping:

☐ Yes

☒ No

Antenna:

☒ Internal antenna

☐ External antenna

Antenna connector:

☒ None, internal antenna

☐ Yes, type

Antenna type:

Internal PCB antenna

Antenna gain:

-

Power rating:

5 VDC / 130 mA max.

Channel spacing:

-


Receiving only mode supported:

☐ Yes

☒ No

6.1.2 Photo of the rating plate and of the EUT

GR7b.2310:

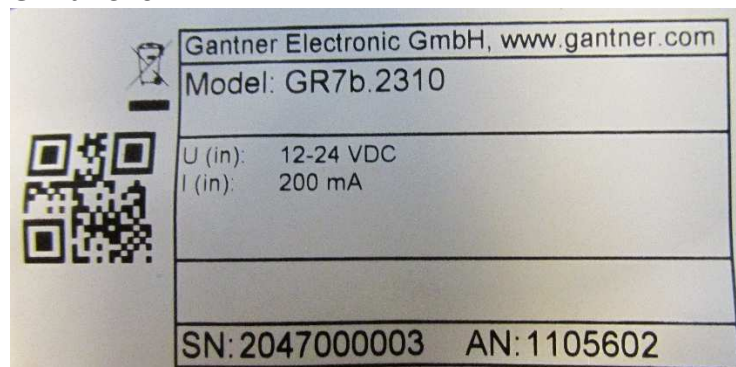

6.2 Power interface

| MODE | VOLTAGE (V) | FREQUENCY (Hz) | COMMENT |
|-------|------------------------|-----------------|-----------------------------|
| Rated | 12 - 24 | DC | - |
| 1 | 120 V (AC) / 24 V (DC) | 60 Hz (AC) / DC | Over the ISK 200 via RS 485 |

6.3 Peripheral devices used for testing

| DEVICE | MANUFACTURER | TYPE | SN | FCC ID |
|--------------|--------------|------------------|------------|---------------|
| Power supply | Gantner | ISK 200 | 06460376 | - |
| Notebook | HP | HP ProBook 6560b | 5CB20246BZ | QDS-BRCM 1043 |

6.4 Configuration mode

| MODE | DESCRIPTION |
|------|--|
| 1 | The EUT was placed on the table and was connected to the ISK 200 (see section 6.9). |
| 2 | The EUT was placed on the table and was connected to the ISK 200 (see section 6.10). |
| 3 | The EUT was placed in the climatic chamber (see section 6.11). |

6.5 Operation mode

| MODE | DESCRIPTION |
|------|--|
| 1 | Normal operation. The RFID module and the Bluetooth module of the EUT were in continuous wave mode. |
| 2 | Normal operation and the antenna of the RFID module was replaced by a terminating resistor. The Bluetooth module was on. |
| 3 | Normal operation and transmission mode. The RFID-tag was placed in front of the EUT. The Bluetooth module was on. |

6.6 Clock frequencies of the EUT

| SOURCE | FREQUENCY |
|------------------|---------------------------------------|
| Microcontroller | f_{CPU} : 32 MHz, 2 Crystals: 8 MHz |
| RFID Reader | 13.56 MHz |
| Bluetooth module | 2402 MHz – 2484 MHz |


6.7 Supply and interconnecting cables used for testing

| LINE | LENGTH (cm) | SHIELDING | FERRITE | TERMINATION |
|------------------|-------------|-----------|---------|-------------|
| RS 485 cable (1) | 300 | Y | N | - |
| RS 485 cable (2) | 100 | Y | N | - |


6.8 Antenna configuration

| DESCRIPTION |
|--|
| <input type="checkbox"/> Equipment with an external antenna connector |
| <input checked="" type="checkbox"/> Equipment without an external antenna connector (integral antenna) |
| <input type="checkbox"/> Equipment with more than one antenna |


6.9 Block diagram of the test setup for radiated emissions

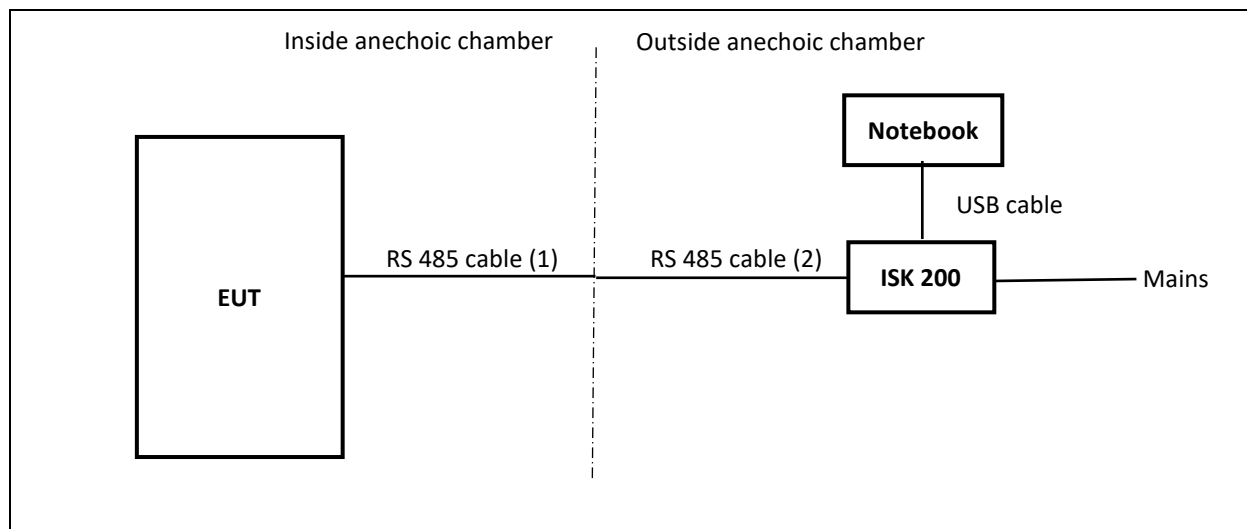

6.10 Block diagram of the test setup for conducted emissions

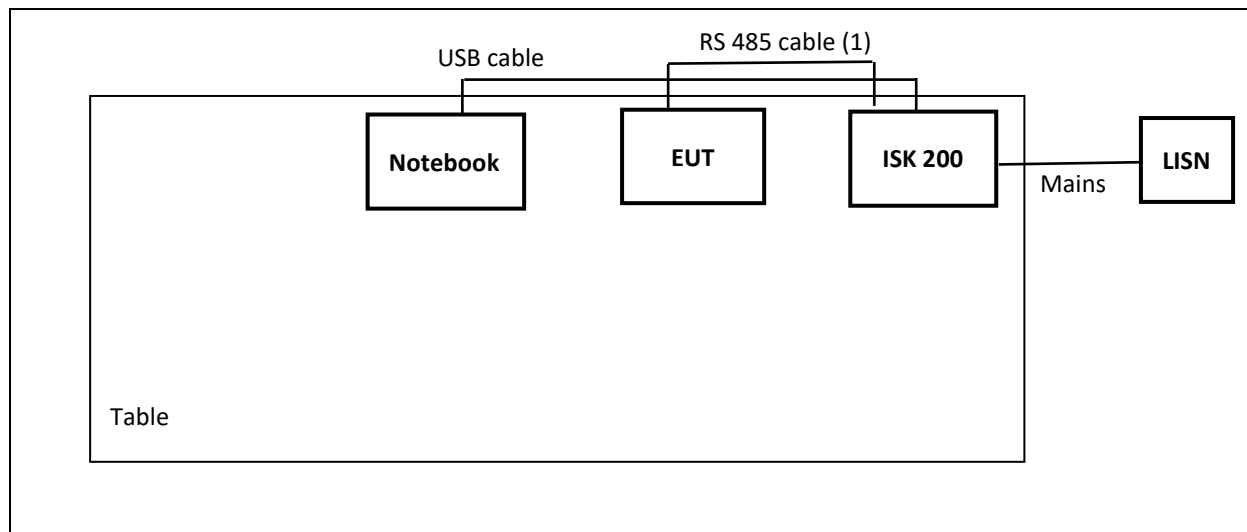

6.11 Block diagram of the test setup for 20 dB bandwidth-, Occupied bandwidth- and Frequency Stability-test

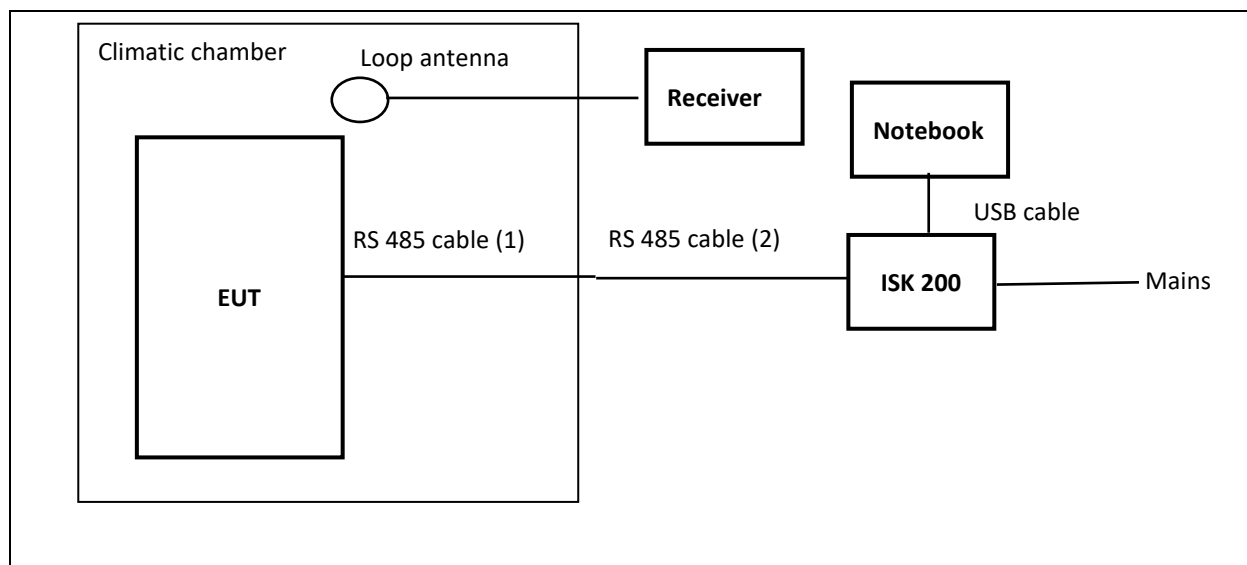

6.12 Technical data of the 2.4 GHz transmitter

| | |
|---------------------------------------|---------------------|
| Transmitter frequencies: | 2402 MHz – 2484 MHz |
| Number of channels: | 40 |
| Bandwidth of each high power channel: | 2 MHz |
| Rating/ Supplying Voltage: | 3.3 V |
| Power limitation of the manufacturer: | 0 dBm |
| Stand by mode supported: | Yes |
| Receive only mode supported: | Yes |

SECTION 7

7.1 Conducted emissions

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|----------------------------------|------------------|--------|
| Limits according to: | FCC §15.207 RSS-210, Issue 10 | | P |
| Methods of measurement according to: | ANSI C63.10 RSS-Gen, Issue 5 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 2 | |
| | Operation mode | 1 and 2 | |
| Test requirements | Frequency range | 150 kHz - 30 MHz | |

Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|--|-----------------|---------------|-------------|--------------|--------------------------------------|
| Shielded cabin | ETS LINDGREN | RFSD 100 | 3598 | PM KF 2955-2 | - |
| Pulse Limiter 10 dB 9 kHz - 200 MHz | Schwarzbeck | VTSD 9561-F N | 9561-F N242 | PM KF 3059 | 2020-12 (1 year) |
| Receiver 9 kHz - 7 GHz | Rohde & Schwarz | ESR7 | 101757 | PM KF 3371 | 2020-04 (1 year) 2021-04 (1 year) |
| V-Artificial mains- network, 2 Line | Rohde & Schwarz | ESH3-Z5 | 863367/018 | PM KF 0142 | 2019-10 (2 years) |
| Test software | Rohde & Schwarz | EMC 32 V.8.54 | - | PM KF 2983 | - |

Comment


In the following diagram, the N and L line are merged.

Measurement results – Conducted emissions:

Common Information

EUT: GR7b.2310
Project No.: 40115
Test description: Conducted Emissions
Test standard: FCC 15 C
Tested port: Mains
Test verdict: Pass
Operating conditions: Normal operation. The RFID module and the Bluetooth module of the EUT were in continuous wave mode.
Operator name: MBE
Date of testing: 29.05.2021

EN-CE-R32-LN01

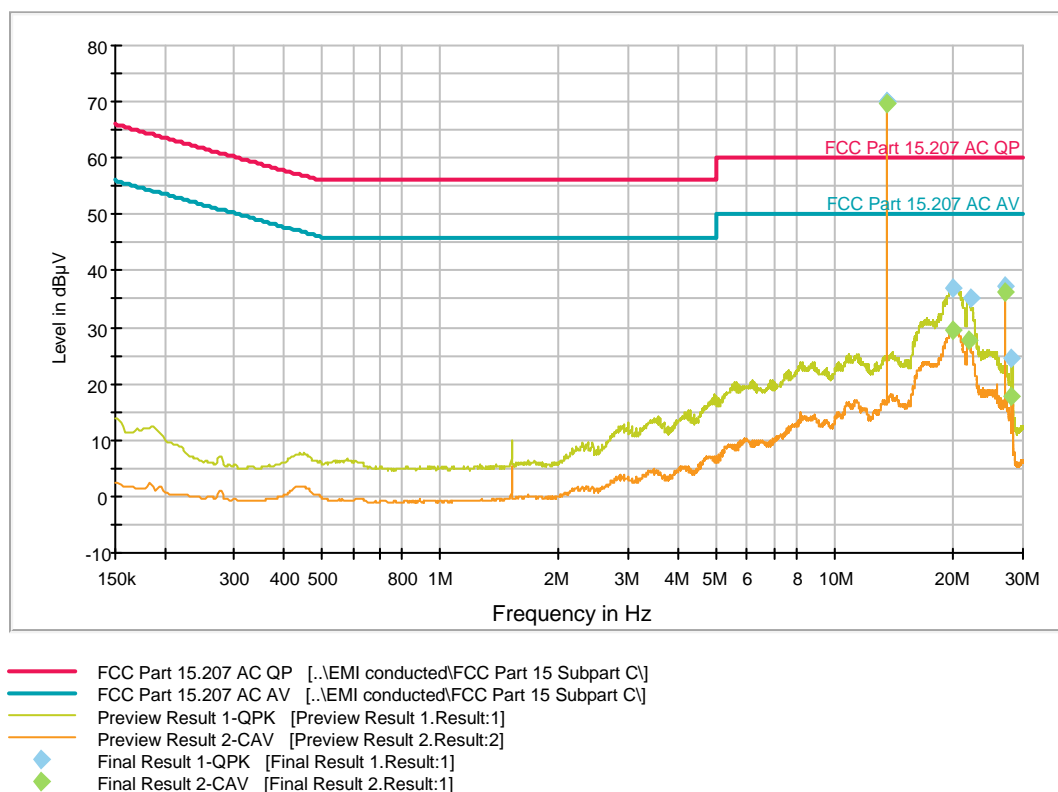

Final Result 1

| Frequency (MHz) | QuasiPeak-ClearWrite (dBµV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|-----------------------------|-----|------|------------|-------------|--------------|---------|
| 13.560000 | 70.1 | GND | N | 10.7 | -10.1 | 60.0 | |
| 13.560000 | 70.1 | GND | N | 10.7 | -10.1 | 60.0 | |
| 19.963500 | 36.9 | GND | N | 11.0 | 23.1 | 60.0 | |
| 22.008750 | 35.1 | GND | N | 11.0 | 24.9 | 60.0 | |
| 27.120750 | 37.3 | GND | N | 11.1 | 22.7 | 60.0 | |
| ... | ... | ... | ... | ... | ... | ... | ... |

Final Result 2

| Frequency (MHz) | CAverage-ClearWrite (dBµV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|----------------------------|-----|------|------------|-------------|--------------|---------|
| 13.560000 | 69.7 | GND | N | 10.7 | -19.7 | 50.0 | |
| 19.824000 | 29.4 | GND | N | 10.9 | 20.6 | 50.0 | |
| 21.984000 | 27.6 | GND | N | 11.0 | 22.4 | 50.0 | |
| 27.120750 | 36.4 | GND | N | 11.1 | 13.6 | 50.0 | |
| 28.113000 | 17.9 | GND | N | 11.1 | 32.1 | 50.0 | |

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
Measurement Type: 2 Line LISN
Frequency Range: 150 kHz - 30 MHz
Graphics Level Range: 0 dBμV - 80 dBμV

Preview Measurements:
Scan Test Template: EN-CE-R32-LN01_PRE

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|------------------|-----------|-----------|--------|------------|--------|
| 9 kHz - 150 kHz | 50 Hz | QPK; CAV | 200 Hz | 1 s | 20 dB |
| 150 kHz - 30 MHz | 2.25 kHz | QPK; CAV | 9 kHz | 1 s | 0 dB |

Receiver: [ESR 7]

Data Reduction:
Limit Line #1: FCC Part 15.207 AC QP
Limit Line #2: FCC Part 15.207 AC AV
Peak Search: 6 dB , Maximum Results: 10
Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
Acceptance Offset: -10 dB
Maximum Number of Results: 20
After Data Reduction: Interactive data reduction


Report Settings:
Report Template: Standard Report_EMC KF_Conducted Emission

Common Information

EUT: GR7b.2310
Project No.: 40115
Test description: Conducted Emissions
Test standard: FCC 15 C
Tested port: Mains
Test verdict: Passed
Operating conditions: Continuous normal operation. The antenna of the RFID module was replaced by a terminating resistor. The Bluetooth module was on

Operator name: MBE
Date of testing: 25.01.2021

EN-CE-R32-LN01

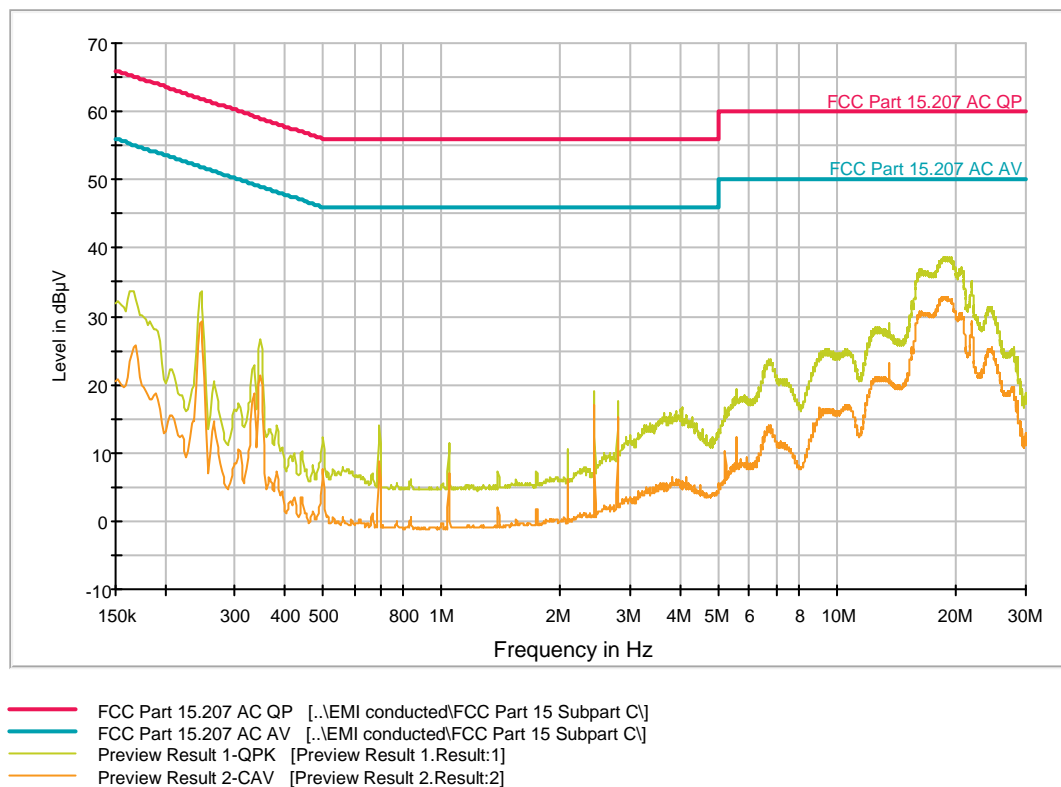

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
Measurement Type: 2 Line LISN
Frequency Range: 150 kHz - 30 MHz
Graphics Level Range: 0 dBμV - 80 dBμV

Preview Measurements:
Scan Test Template: EN-CE-R32-LN01_PRE

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|------------------|-----------|-----------|--------|------------|--------|
| 9 kHz - 150 kHz | 50 Hz | QPK; CAV | 200 Hz | 1 s | 20 dB |
| 150 kHz - 30 MHz | 2.25 kHz | QPK; CAV | 9 kHz | 1 s | 0 dB |

Receiver: [ESR 7]

Data Reduction:
Limit Line #1: FCC Part 15.207 AC QP
Limit Line #2: FCC Part 15.207 AC AV
Peak Search: 6 dB , Maximum Results: 10
Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
Acceptance Offset: -10 dB
Maximum Number of Results: 20
After Data Reduction: Interactive data reduction

Report Settings:
Report Template: Standard Report_EMC KF_Conducted Emission

7.2 Field strength 13.110 MHz – 14.010 MHz (Emission Mask)

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|--|-------------------------|--------|
| Limits according to: | FCC §15.225 (a) – (c) RSS-210, Issue 10, section B4 | | P |
| Methods of measurement according to: | ANSI C63.10, section 6.3, 6.4 RSS-Gen 6.13, 8.9 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 1 | |
| | Operation mode | 1 | |
| Test requirements | Frequency range | 13.110 MHz – 14.010 MHz | |
| | Measurement time | 1 s | |
| | Antenna height | 1 m | |

Limits

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).

| Frequency (MHz) | Field strength (µV/m) | Field strength (dBµV/m) | Measurement distance (m) | Field strength (dBµV/m) | Measurement distance (m) |
|-----------------|-----------------------|-------------------------|--------------------------|-------------------------|--------------------------|
| 13.110 - 13.410 | 106 | 40.5 | 30 | 80.5 | 3 |
| 13.410 - 13.553 | 334 | 50.5 | 30 | 90.5 | 3 |
| 13.553 - 13.567 | 15848 | 84.0 | 30 | 124.0 | 3 |
| 13.567 - 13.710 | 334 | 50.5 | 30 | 90.5 | 3 |
| 13.710 - 14.010 | 106 | 40.5 | 30 | 80.5 | 3 |

Test setup details

Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to 10 kHz or 9 kHz CISPR. The video bandwidth shall be at least three times greater than the resolution bandwidth.

The test was carried out automatically by the test receiver.

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.


Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|---------------------------------------|-----------------|-------------------|-----------|---------------|-------------------|
| Semi-Anechoic chamber (30 – 1000 MHz) | Siepel | REF W460SLB | - | PM KF 1150-01 | 2019-12 (3 years) |
| Turntable | Inn-Co | - | - | PM KF 2949-04 | - |
| Tower | Inn-Co | MA4484-XPET | - | PM KF 2949-03 | - |
| Controller | Inn-Co | CO 3000 | 4970815 | PM KF 2949 | - |
| Receiver 9 kHz - 7 GHz | Rohde & Schwarz | ESR7 | 101757 | PM KF 3371 | 2020-04 (1 year) |
| Loop antenna 9 kHz- 30 MHz | Rohde & Schwarz | HFH2-Z2 | 881058/48 | PM KF 1401 | 2020-08 (1 years) |
| Test software | Rohde & Schwarz | EMC 32 V.10.50.40 | - | PM KF 2983-2 | - |

Measurement results – Field strength 13.110 MHz – 14.010 MHz (Emission Mask):

Common Information

EUT: GR7b.2310
Test Verdict: Passed
Test Description: FCC Part 15 C, field strength
Operating Conditions: The RFID module and the Bluetooth module of the EUT were in continuous wave mode.
Operator Name: MBE
Project Number: 40115
Date: 12.12.2020

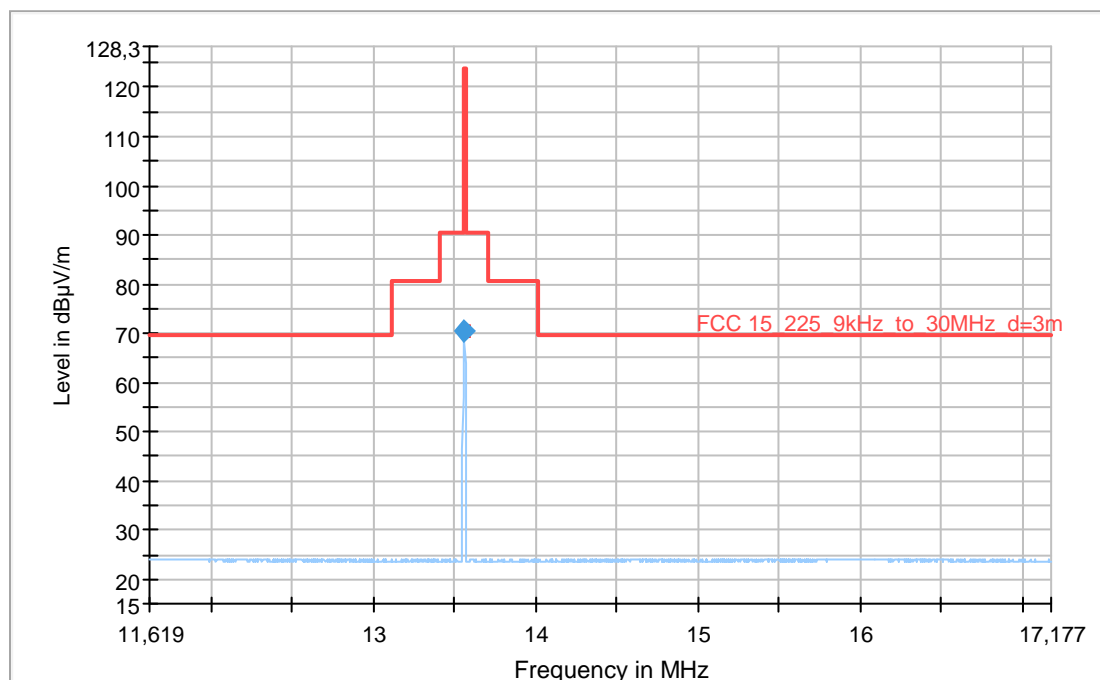

Preview Result 1-QPK [Preview Result 1.Result:1]
Critical_Freqs AVG [Critical_Freqs.Result:5]
Critical_Freqs QPK [Critical_Freqs.Result:4]
FCC 15_225_9kHz_to_30MHz_d=3m [..zF radiated\FCC Part 15C]
Final_Result QPK [Final_Result.Result:4]
Final_Result AVG [Final_Result.Result:5]

Final_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Pol | Azimuth (deg) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|-----------------|-----|---------------|
| 13.560000 | 70.37 | --- | 124.00 | 53.63 | 1000.0 | 9.000 | H | 110.0 |

(continuation of the "Final_Result" table from column 14 ...)

| Frequency (MHz) | Corr. (dB/m) | Comment |
|-----------------|--------------|---------|
| 13.560000 | 20 | - |

Comment

The RFID transmitter was operated in CW mode. Therefore, the bandwidth of the transmitting signal is smaller than the measuring bandwidth of the measuring receiver. Thus, a measurement with a larger measurement bandwidth was not necessary.

EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz - 30 MHz
Graphics Level Range: 0 dBμV/m - 130 dBμV/m

Preview Measurements:
Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: EN-RE-R12-AN23_PRE

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|-------------------|-----------|-----------|--------|------------|--------|
| Receiver: [ESR 7] | | | | | |
| 9 kHz - 150 kHz | 50 Hz | QPK | 200 Hz | 1 s | 0 dB |
| 150 kHz - 30 MHz | 2,25 kHz | QPK | 9 kHz | 1 s | 0 dB |

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 9 kHz – 30 MHz. It includes automatic turntable of radius 2 m. It enables manual and fully automatic measurements.

To find the highest level of radiation

- the height of the antenna is 1m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation.

The calculations are performed automatically by the measurement software EMC 32.

As example consider the following input values and result:

| FREQUENCY (MHZ) | RECEIVER READING U (dBμV) | ANTENNA FACTOR AF (dB/m) | CABLE ATTENUATION A (dB) | CORRECTION ANTENNA + CABLE (dB) | RADIATED FIELD STRENGTH E (dBμV/m) |
|--------------------|------------------------------------|-----------------------------------|-----------------------------------|--|---|
| 30.0 | 20 | 20.6 | 0.8 | 21.4 | 41.4 |

$$E = U + AF + A$$

7.3 Radiated emissions < 30 MHz

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|---|----------------|--------|
| Limits according to: | FCC §15.225 (d), §15.209 RSS-210, Issue 10, section B4 | | P |
| Methods of measurement according to: | ANSI C63.10, section 6.3, 6.4 RSS-Gen 6.13, 8.9 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 1 | |
| | Operation mode | 1 | |
| Test requirements | Frequency range | 9 kHz - 30 MHz | |
| | Antenna height | 1 m | |

Limits

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).

| Frequency (MHz) | Field strength (μV/m) | Field strength (dBμV/m) | Measurement distance (m) |
|---|-----------------------|-------------------------|--------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 67.6 - 20 · log(F(kHz)) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 87.6 - 20 · log(F(kHz)) | 30 |
| 1.705 - 13.110 | 30 | 29.5 | 30 |
| 14.010 - 30.000 | 30 | 29.5 | 30 |
| Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission. | | | |

Test setup details

Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to 10 kHz or 9 kHz CISPR. The video bandwidth shall be at least three times greater than the resolution bandwidth.

The test was carried out automatically by the test receiver.

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|---------------------------------------|-----------------|-------------------|-----------|---------------|-------------------|
| Semi-Anechoic chamber (30 – 1000 MHz) | Siepel | REF W460SLB | - | PM KF 1150-01 | 2019-12 (3 years) |
| Turntable | Inn-Co | - | - | PM KF 2949-04 | - |
| Tower | Inn-Co | MA4484-XPET | - | PM KF 2949-03 | - |
| Controller | Inn-Co | CO 3000 | 4970815 | PM KF 2949 | - |
| Receiver 9 kHz - 7 GHz | Rohde & Schwarz | ESR7 | 101757 | PM KF 3371 | 2020-04 (1 year) |
| Loop antenna 9 kHz- 30 MHz | Rohde & Schwarz | HFH2-Z2 | 881058/48 | PM KF 1401 | 2020-08 (1 years) |
| Test software | Rohde & Schwarz | EMC 32 V.10.50.40 | - | PM KF 2983-2 | - |

Measurement results – Radiated emissions < 30 MHz:

Common Information

EUT: GR7b.2310
Test Verdict: Passed
Test Description: FCC Part 15 C, 9kHz - 30 MHz
Operating Conditions: The RFID module and the Bluetooth module of the EUT were in continuous wave mode.
Operator Name: MBE
Project Number: 40115
Date: 12.12.2020

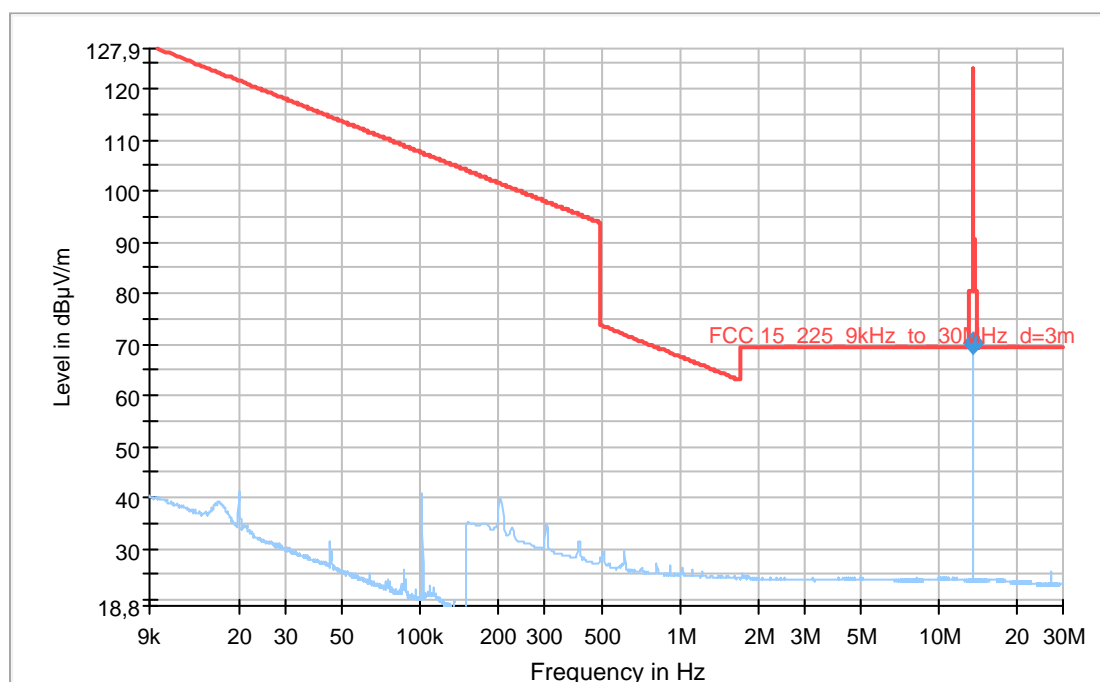

Preview Result 1-QPK [Preview Result 1.Result:1]
Critical_Freqs AVG [Critical_Freqs.Result:5]
Critical_Freqs QPK [Critical_Freqs.Result:4]
FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C]
Final_Result QPK [Final_Result.Result:4]
Final_Result AVG [Final_Result.Result:5]

Final_Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Pol | Azimuth (deg) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|-----------------|-----|---------------|
| 13.560000 | 70.37 | --- | 124.00 | 53.63 | 1000.0 | 9.000 | H | 110.0 |

(continuation of the "Final_Result" table from column 14 ...)

| Frequency (MHz) | Corr. (dB/m) | Comment |
|-----------------|--------------|---------|
| 13.560000 | 20 | - |

Comment

The RFID transmitter was operated in CW mode. Therefore, the bandwidth of the transmitting signal is smaller than the measuring bandwidth of the measuring receiver. Thus, a measurement with a larger measurement bandwidth was not necessary.

EMI Auto Test Template: FCC-RE-R17-AN23


Hardware Setup: EN-RE-R12-AN23
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz - 30 MHz
Graphics Level Range: 0 dBμV/m - 130 dBμV/m

Preview Measurements:
Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: EN-RE-R12-AN23_PRE

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|-------------------|-----------|-----------|--------|------------|--------|
| Receiver: [ESR 7] | | | | | |
| 9 kHz - 150 kHz | 50 Hz | QPK | 200 Hz | 1 s | 0 dB |
| 150 kHz - 30 MHz | 2,25 kHz | QPK | 9 kHz | 1 s | 0 dB |

Common Information

EUT: GR7b.2310
Test Verdict: Passed
Test Description: RSS-Gen, 9 kHz - 30 MHz
Operating Conditions: The RFID module and the Bluetooth module of the EUT were in continuous wave mode.
Operator Name: MBE
Project Number: 40115
Date: 12.12.2020

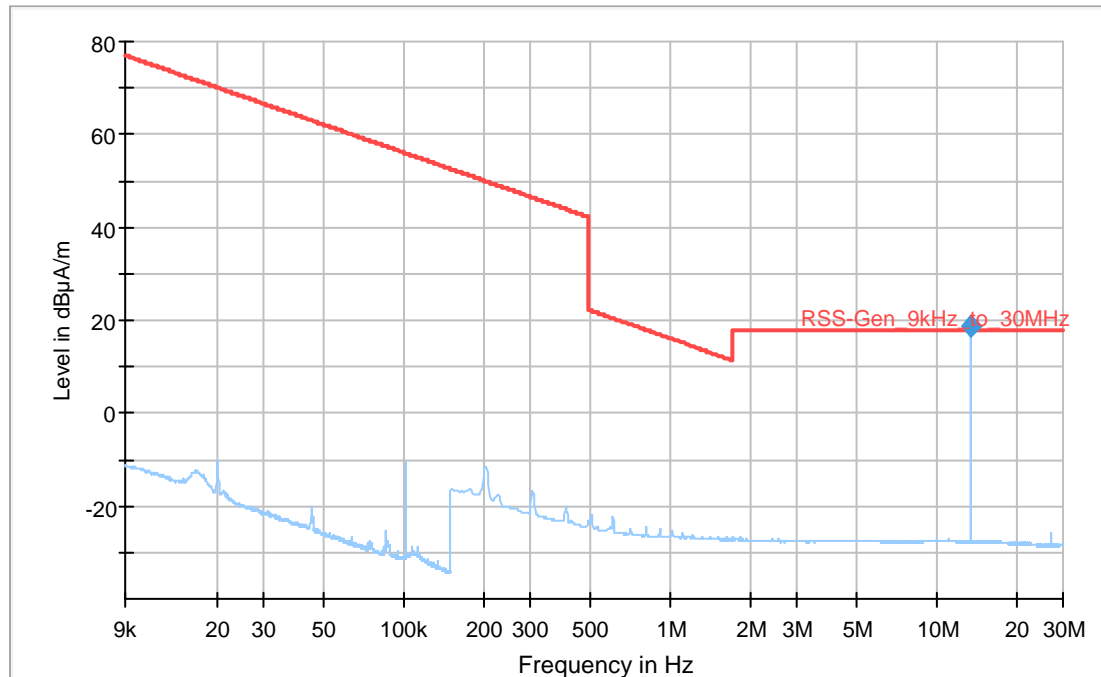

— Preview Result 1-QPK [Preview Result 1.Result:1]
— RSS-Gen_9kHz_to_30MHz [..\zF radiated\RSS-Gen\]
* QPK [Critical_Freqs.Result:4]
* AVG [Critical_Freqs.Result:5]
◆ Final_Result QPK [Final_Result.Result:4]
◆ Final_Result AVG [Final_Result.Result:5]

Final Result

| Frequency (MHz) | QuasiPeak (dBμA/m) | Average (dBμA/m) | Limit (dBμA/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Pol | Azimuth (deg) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|-----------------|-----|---------------|
| 13.560000 | 18.87 | --- | 18.04 | -0.83 | 1000.0 | 9.000 | H | 110.0 |

(continuation of the "Final_Result" table from column 14 ...)

| Frequency (MHz) | Corr. (dB/m) | Comment |
|-----------------|--------------|---|
| 13.560000 | 20.0 | The field strength of the RFID module shall not exceed 124 dBμV/m. The field strength was measured and is 70.37 dBμV/m. |

EMI Auto Test Template: EN-RE-R17-AN24

Hardware Setup: EN-RE-R12-AN24
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz - 30 MHz
Graphics Level Range: -40 dBμA/m - 80 dBμA/m

Preview Measurements:
Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: EN-RE-R12-AN24_PRE

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|-------------------|-----------|-----------|--------|------------|--------|
| Receiver: [ESR 7] | | | | | |
| 9 kHz - 150 kHz | 50 Hz | QPK | 200 Hz | 1 s | 0 dB |
| 150 kHz - 30 MHz | 2,25 kHz | QPK | 9 kHz | 1 s | 0 dB |

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 9 kHz – 30 MHz. It includes automatic turntable of radius 2 m. It enables manual and fully automatic measurements.

To find the highest level of radiation

- the height of the antenna is 1m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation.

The calculations are performed automatically by the measurement software EMC 32.

As example consider the following input values and result:

| FREQUENCY (MHZ) | RECEIVER READING U (dBμV) | ANTENNA FACTOR AF (dB/m) | CABLE ATTENUATION A (dB) | CORRECTION ANTENNA + CABLE (dB) | RADIATED FIELD STRENGTH E (dBμV/m) |
|--------------------|------------------------------------|-----------------------------------|-----------------------------------|--|---|
| 30.0 | 20 | 20.6 | 0.8 | 21.4 | 41.4 |

$$E = U + AF + A$$

7.4 Radiated emissions 30 MHz to 26 GHz

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|---|-----------------|--------|
| Limits according to: | FCC §15.225 (d), §15.209 RSS-210, Issue 10, section B4 | | P |
| Methods of measurement according to: | ANSI C63.10, section 6.3, 6.5 RSS-Gen 6.13, 8.9 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 1 | |
| | Operation mode | 1 | |
| Test requirements | Frequency range | 30 MHz - 26 GHz | |

Limits

| Frequency (MHz) | Field strength (µV/m) | Field strength (dBµV/m) | Measurement distance (m) |
|-----------------|-----------------------|-------------------------|--------------------------|
| 30 – 88 | 100 | 40.0 | 3 |
| 88 – 216 | 150 | 43.5 | 3 |
| 216 – 960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

Test setup details

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

Overview sweeps performed with peak detectors and final measurement with quasi-peak detectors.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.


Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|---------------------------------------|-----------------|-------------------|----------|---------------|-------------------|
| Semi-Anechoic chamber (30 – 1000 MHz) | Siepel | REF W460SLB | - | PM KF 1150-01 | 2019-12 (3 years) |
| Turntable | Inn-Co | - | - | PM KF 2949-04 | - |
| Tower | Inn-Co | MA4484-XPET | - | PM KF 2949-03 | - |
| Controller | Inn-Co | CO 3000 | 4970815 | PM KF 2949 | - |
| Receiver 9 kHz - 7 GHz | Rohde & Schwarz | ESR7 | 101757 | PM KF 3371 | 2020-04 (1 year) |
| Trilog broadband antenna | Schwarzbeck | VULB 9163 | 9163-974 | PM KF 3196 | 2021-01 (1 year) |
| Receiver 10 Hz - 40 GHz | Rohde & Schwarz | FSV40 | 101400 | PM KF 2783 | 2020-08 (1 year) |
| Horn antenna 1 - 18 GHz | Rohde & Schwarz | HF906 | 100188 | PM KF 0947 | 2020-05 (2 years) |
| Horn antenna preamp. 3 - 18 GHz | Bonn | BLMA 0118-BT | 076609 | PM KF 1047 | 2020-01 (2 years) |
| Test software | Rohde & Schwarz | EMC 32 V.10.50.40 | - | PM KF 2983-2 | - |

Measurement results – Radiated emissions:

Common Information (30 MHz – 26 GHz)

EUT: GR7b.2310
Test Verdict: Passed
Test Description: FCC Part 15 C, 30 MHz - 1 GHz
Operating Conditions: The RFID module and the Bluetooth module of the EUT were in continuous wave mode.
Operator Name: MBE
Project Number: 40115
Date: 11.12.2020

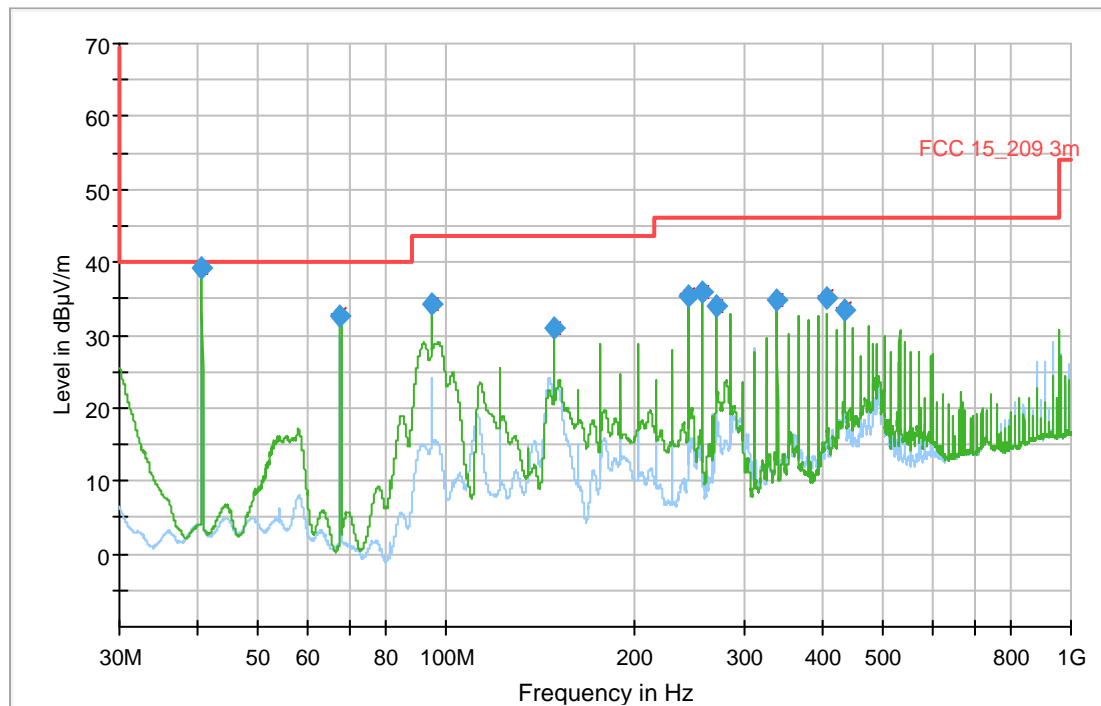

— Preview Result 1H-QPK [Preview Result 1H.Result:2]
— Preview Result 1V-QPK [Preview Result 1V.Result:2]
* Critical_Freqs QPK [Critical_Freqs.Result:4]
— FCC 15_209 3m [.\EMI radiated\FCC Part 15C]
◆ Final_Result QPK [Final_Result.Result:4]

Final_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|
| 40.680000 | 39.28 | 40.00 | 0.72 | 1000.0 | 120.000 | 104.0 | V | 254.0 |
| 67.800000 | 32.66 | 40.00 | 7.34 | 1000.0 | 120.000 | 98.0 | V | 97.0 |
| 94.920000 | 34.18 | 43.52 | 9.34 | 1000.0 | 120.000 | 113.0 | V | 248.0 |
| 149.160000 | 30.93 | 43.52 | 12.59 | 1000.0 | 120.000 | 100.0 | V | 279.0 |
| 244.080000 | 35.30 | 46.02 | 10.72 | 1000.0 | 120.000 | 189.0 | V | 173.0 |
| 257.640000 | 35.92 | 46.02 | 10.10 | 1000.0 | 120.000 | 103.0 | H | 197.0 |
| 271.200000 | 33.96 | 46.02 | 12.06 | 1000.0 | 120.000 | 190.0 | V | 151.0 |
| 339.000000 | 34.74 | 46.02 | 11.28 | 1000.0 | 120.000 | 160.0 | V | 213.0 |
| 406.800000 | 35.21 | 46.02 | 10.81 | 1000.0 | 120.000 | 130.0 | V | 268.0 |
| 433.920000 | 33.32 | 46.02 | 12.70 | 1000.0 | 120.000 | 101.0 | V | 185.0 |

(continuation of the "Final_Result" table from column 15 ...)

| Frequency (MHz) | Corr. (dB) | Comment |
|-----------------|------------|---------|
| 40.680000 | 13.4 | RFID |
| 67.800000 | 10.8 | RFID |
| 94.920000 | 12.0 | RFID |
| 149.160000 | 8.9 | RFID |
| 244.080000 | 14.2 | RFID |
| 257.640000 | 14.6 | RFID |
| 271.200000 | 14.5 | RFID |
| 339.000000 | 16.4 | RFID |
| 406.800000 | 17.8 | RFID |
| 433.920000 | 18.4 | RFID |

EMI Auto Test Template: FCC-RE-R17-AN34_QP

Hardware Setup: EN-RE-R17-AN34
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 30 MHz - 1 GHz
Graphics Level Range: 0 dB μ V/m - 80 dB μ V/m

Preview Measurements:
Antenna height: 100 - 355 cm , Step Size = 85 cm , Positioning Speed = 8
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Graphics Display: Show separate traces for horizontal and vertical polarization
Scan Test Template: EN-RE-R17-AN34_PRE_QP

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|-------------------|-----------|-----------|---------|------------|--------|
| Receiver: [ESR 7] | | | | | |
| 30 MHz - 1 GHz | 30 kHz | QPK | 120 kHz | 1 s | 20 dB |
| 1 GHz - 3 GHz | 250 kHz | QPK | 1 MHz | 1 s | 20 dB |

Frequency Zoom:
Zoom Scan Template: EN-RE-R17-AN34_ZOOM_QP


Adjustment:
Antenna height: Range = 180 cm , Measuring Speed = 1
Turntable position: Range = 60 deg , Measuring Speed = 1
Template for Single Meas.: EN-RE-R17-AN34_FIN

Final Measurements:
Template for Single Meas.: EN-RE-R17-AN34_FIN

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|-------------------|-----------|-----------|---------|------------|--------|
| Receiver: [ESR 7] | | | | | |
| 30 MHz - 200 MHz | 40 kHz | QPK | 120 kHz | 1 s | 20 dB |
| 200 MHz - 1 GHz | 40 kHz | QPK | 120 kHz | 1 s | 20 dB |
| 1 GHz - 3 GHz | 400 kHz | QPK | 1 MHz | 1 s | 20 dB |

Common Information (1 GHz – 7 GHz)

EUT: GR7b.2310
Test Verdict: Passed
Test Description: FCC Part 15 C,1 GHz - 7 GHz
Operating Conditions: The RFID module and the Bluetooth module of the EUT were in continuous wave mode.
Operator Name: MBE
Project Number: 40115
Date: 12.12.2020

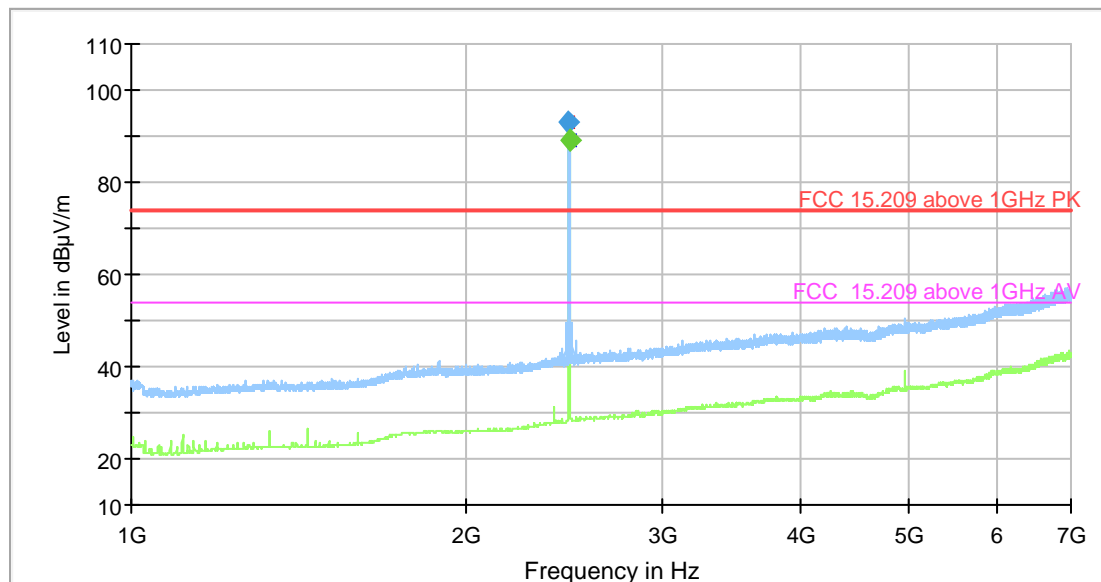

Preview Result 2-AVG [Preview Result 2.Result:2]
Preview Result 1-PK+ [Preview Result 1.Result:1]
FCC 15.209 above 1GHz PK [..\EMI radiated\FCC Part 15C\]
FCC 15.209 above 1GHz AV [..\EMI radiated\FCC Part 15C\
* PK+ [Critical_Freqs.Result:4]
* AVG [Critical_Freqs.Result:5]
* MaxPeak-PK+ (Single) [Result Table_Single.Result:1]
* Average-AVG (Single) [Result Table_Single.Result:3]
* Final_Result PK+ [Final_Result.Result:4]
* Final_Result-AVG [Final_Result.Result:5]

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|
| 2475.750000 | 92.84 | --- | --- | --- | 1000.0 | 1000.000 | 102.0 | V |
| 2476.000000 | --- | 89.05 | --- | --- | 1000.0 | 1000.000 | 102.0 | V |

(continuation of the "Final_Result" table from column 14 ...)

| Frequency (MHz) | Azimuth (deg) | Corr. (dB) | Comment |
|-----------------|---------------|------------|-----------|
| 2475.750000 | 81.0 | 30.5 | Bluetooth |
| 2476.000000 | 80.0 | 30.5 | Bluetooth |

EMI Auto Test Template: xF-RE-R17-AN20

Hardware Setup: xF-RE-R17-AN20
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 1 GHz - 7 GHz
Graphics Level Range: 10 dBμV/m - 110 dBμV/m

Preview Measurements:
Antenna height: 100 - 355 cm , Step Size = 85 cm , Positioning Speed = 8
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: xF-RE-R17-AN20_PRE

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|------------------------------------|-----------|-----------|-------|------------|--------|
| Receiver: [ESR 7] 1 GHz - 7 GHz | 250 kHz | PK+ ; AVG | 1 MHz | 0,01 s | 20 dB |

Frequency Zoom:
Zoom Scan Template: xF-RE-R17-AN20_MAX


Adjustment:
Antenna height: Range = 180 cm , Measuring Speed = 2
Turntable position: Range = 60 deg , Measuring Speed = 2
Template for Single Meas.: xF-RE-R17-AN20_MAX

Final Measurements:
Template for Single Meas.: xF-RE-R17-AN20_FIN

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|------------------------------------|-----------|-----------|-------|------------|--------|
| Receiver: [ESR 7] 1 GHz - 7 GHz | 400 kHz | PK+ ; AVG | 1 MHz | 1 s | 20 dB |

Common Information (7 GHz -18 GHz)

| | |
|-----------------------|---|
| EUT: | GR7b.2310 |
| Test Verdict: | Passed |
| Test Description: | FCC Part 15 C,7 GHz - 18 GHz |
| Operating Conditions: | The RFID module and the Bluetooth module of the EUT were in continuous wave mode. |
| Operator Name: | MBE |
| Project Number: | 40115 |
| Date | 22.12.2020 |

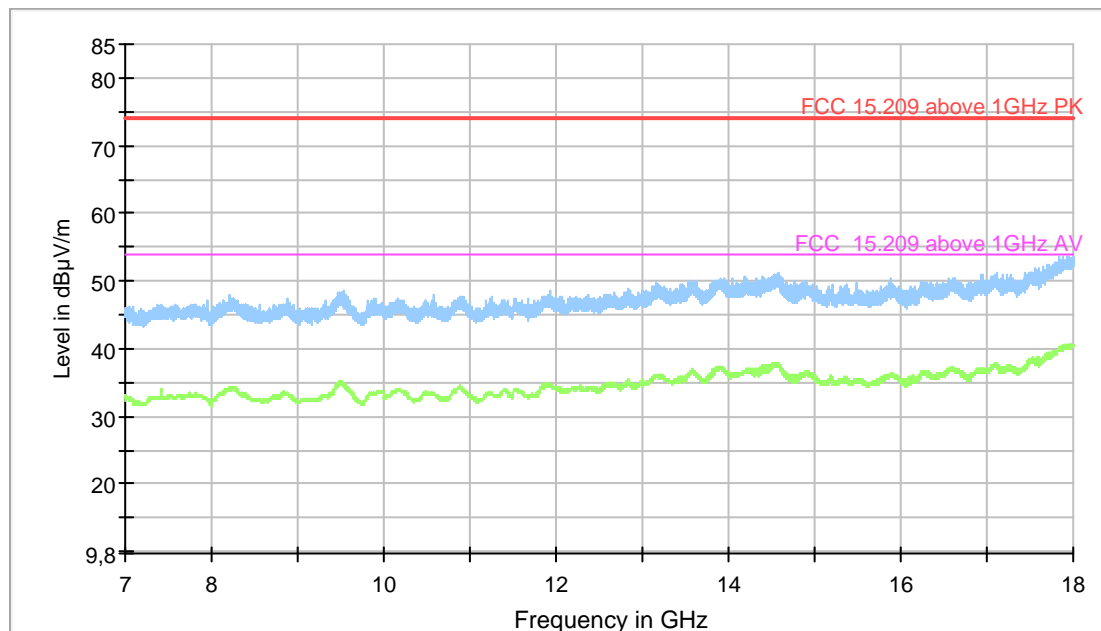

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- FCC 15.209 above 1GHz PK [.\EMI radiated\FCC Part 15C\]
- FCC 15.209 above 1GHz AV [.\EMI radiated\FCC Part 15C\]
- PK+ [Critical_Freqs.Result:4]
- AVG [Critical_Freqs.Result:5]
- Final_Result PK+ [Final_Result.Result:4]
- Final_Result AVG [Final_Result.Result:5]

EMI Auto Test Template: xF-RE-R15-PAM03-AN20

Hardware Setup: xF-RE-R15-PAM03-AN20
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 7 GHz - 18 GHz
Graphics Level Range: 10 dBμV/m - 90 dBμV/m

Preview Measurements:
Antenna height: 100 - 355 cm , Step Size = 85 cm , Positioning Speed = 8
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Sweep Test Template: xF-RE-R15-PAM03_AN20_PRE

| Subrange | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--------------------------------------|------------|-----------|-----------|------------|--------|
| Receiver: [FSV 40] 1 GHz - 18 GHz | 531,25 kHz | PK+ ; AVG | 1 MHz | 50 s | 0 dB |

Frequency Zoom:
Zoom Sweep Template: xF-RE-R15-PAM03_AN20_MAX

Adjustment:
Antenna height: Range = 180 cm , Measuring Speed = 2
Turntable position: Range = 60 deg , Measuring Speed = 2
Template for Single Meas.: xF-RE-R15-PAM03-AN20_ADJ


Final Measurements:
Template for Single Meas.: xF-RE-R15-PAM03-AN20_FIN

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|--------------------------------------|-----------|-----------|-------|------------|--------|
| Receiver: [FSV 40] 1 GHz - 18 GHz | 100 kHz | PK+ ; AVG | 1 MHz | 1 s | 0 dB |

Common Information (18 GHz – 26 GHz)

EUT: GR7b.2310
Test Verdict: Passed
Test Description: FCC Part 15 C, 18 GHz - 26 GHz
Operating Conditions: The RFID module and the Bluetooth module of the EUT were in continuous wave mode.

Operator Name: MBE
Project Number: 40115
Date: 23.12.2020

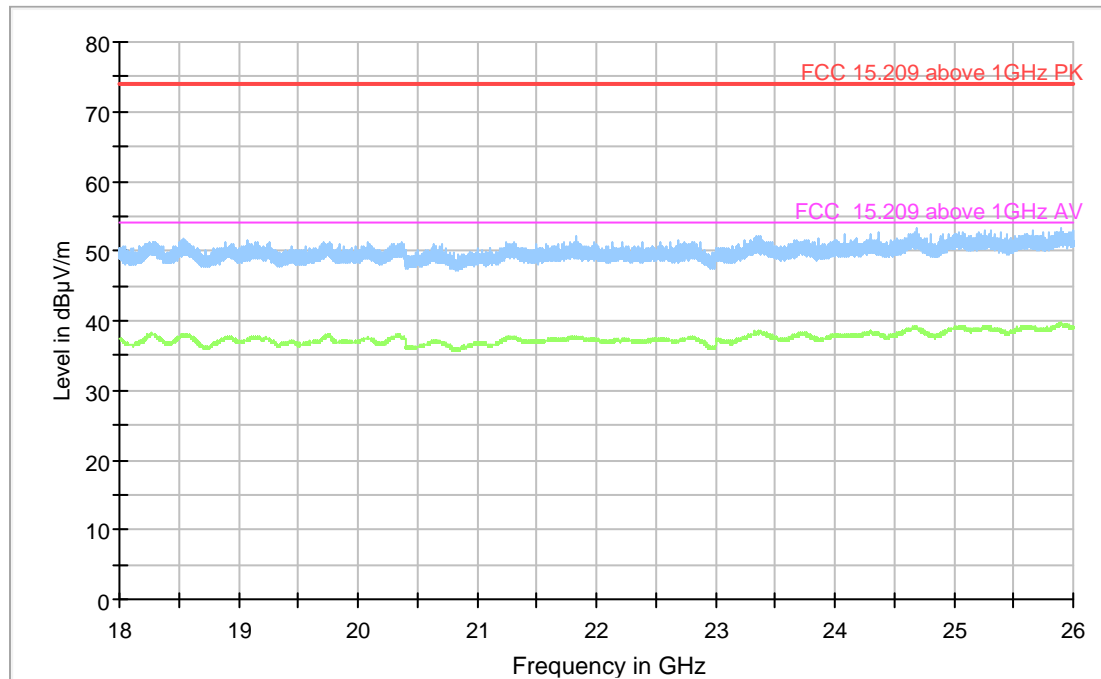

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-PK+ [Preview Result 1.Result:1]
- FCC 15.209 above 1GHz PK [..\EMI radiated\FCC Part 15C\]
- FCC 15.209 above 1GHz AV [..\EMI radiated\FCC Part 15C\]
- Final_Result PK+ [Final_Result.Result:4]
- Final_Result AVG [Final_Result.Result:5]

EMI Auto Test Template: xF-RE-R15-AN06

Hardware Setup: xF-RE-R15-AN06
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 18 GHz - 26 GHz
Graphics Level Range: 0 dBμV/m - 80 dBμV/m

Preview Measurements:
Antenna height: 100 - 355 cm , Step Size = 85 cm , Positioning Speed = 8
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Sweep Test Template: xF-RE-R15-AN06_PRE

| Subrange | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|---------------------------------------|-----------|-----------|-----------|------------|--------|
| Receiver: [FSV 40] 18 GHz - 40 GHz | 687,5 kHz | PK+ ; AVG | 1 MHz | 30 s | 0 dB |

Frequency Zoom:
Zoom Sweep Template: xF-RE-R15-AN06_MAX

Adjustment:
Antenna height: Range = 180 cm , Measuring Speed = 2
Turntable position: Range = 60 deg , Measuring Speed = 2
Template for Single Meas.: xF-RE-R15-AN06_ADJ

Final Measurements:
Template for Single Meas.: xF-RE-R15-AN06_FIN

| Subrange | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|---------------------------------------|-----------|-----------|-------|------------|--------|
| Receiver: [FSV 40] 18 GHz - 40 GHz | 100 kHz | PK+ ; AVG | 1 MHz | 1 s | 0 dB |

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 30 MHz – 18 GHz (40 GHz). It includes automatic antenna mast of height 4 m and turntable of radius 2 m. It enables both manual and fully automatic measurements. To find the highest level of radiation

- the height of the antenna is scanned in range 1m to 4 m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation. The calculations are performed automatically by the measurement software EMC 32. As example consider the following input values and result:

| FREQUENCY (MHZ) | RECEIVER READING U (dBμV) | ANTENNA FACTOR AF (dB/m) | CABLE ATTENUATION A (dB) | CORRECTION ANTENNA + CABLE (dB) | RADIATED FIELD STRENGTH E (dBμV/m) |
|--------------------|------------------------------------|-----------------------------------|-----------------------------------|--|---|
| 30.0 | 20 | 20.6 | 0.8 | 21.4 | 41.4 |

$$E = U + AF + A$$

7.5 Frequency stability measurement

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|---|---|--------|
| Limits according to: | FCC §15.225 (e) RSS-210, Issue 10, section B4 RSS-Gen Issue 5, section 6.11 | | P |
| Methods of measurement according to: | ANSI C63.10, section 9.14 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 3 | |
| | Operation mode | 3 | |

Limits

| | |
|--|---|
| Limit: | The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions. |
| Temperature range for the RFID module: | -20 degree to + 50 degree |
| Voltage range: | 0.85 x 120 V and 1.15*120 V |

Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|-------------------------|-----------------|----------------|--------|------------|------------------|
| Temperature Chamber | HT4010 | Heraeus-Vötsch | 45021 | PM KF 1402 | 2020-03 (1 year) |
| Receiver 10 Hz - 40 GHz | Rohde & Schwarz | FSV40 | 101400 | PM KF 2783 | 2020-08 (1 year) |
| Loop antenna | Rohde & Schwarz | HZ-10 | 100055 | PM KF 0965 | 2020-05 (3 year) |

Measurement results – Frequency stability measurement:

| Temperature °C | Carrier at 20°C MHz | Upper limit: 13.561356 MHz |
|-------------------|------------------------|---|
| | | Lower limit: 13.558644 MHz |
| | | Measured frequency under temperature influence: |
| | | |
| +50 | 13.559899 | 13.559892 |
| +40 | | 13.559870 |
| +30 | | 13.559877 |
| +20 | | 13.559899 |
| +10 | | 13.559934 |
| 0 | | 13.559971 |
| -10 | | 13.560007 |
| -20 | | 13.560022 |

Comment

The EUT was supplied with the ISK 200 power supply unit, serial number 06460376. The AC supply voltage was varied from 102 to 138 V.

The DC voltage was varied from 12 to 24 V.

The voltage variations had no influence on the transmission frequency and the transmission level.

| Voltage V | Temperature 20°C | Upper limit: 13.561356 MHz |
|--------------|---------------------|---|
| | | Lower limit: 13.558644 MHz |
| | | Measured frequency under AC supply voltage variation: |
| | | |
| 102 | 20°C | 13.559898 |
| 138 | | 13.559898 |

| Voltage V | Temperature 20°C | Upper limit: 13.561356 MHz |
|--------------|---------------------|--|
| | | Lower limit: 13.558644 MHz |
| | | Measured frequency under DC voltage variation: |
| | | |
| 12 | 20°C | 13.559898 |
| 24 | | 13.559898 |

7.6 20 dB bandwidth

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|------------------------|---|--------|
| Limits according to: | FCC §15.215 (c) | | P |
| Methods of measurement according to: | RSS-Gen, Issue 5, 6.7 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 3 | |
| | Operation mode | 3 | |

Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|----------------------------|-----------------|-------|--------|------------|------------------|
| Receiver 10 Hz - 40 GHz | Rohde & Schwarz | FSV40 | 101400 | PM KF 2783 | 2021-08 (1 year) |
| Loop antenna | Rohde & Schwarz | HZ-10 | 100055 | PM KF 0965 | 2020-05 (3 year) |

Comment

The 20-bandwidth is 43.01 kHz.

Measurement results – 20 dB bandwidth:

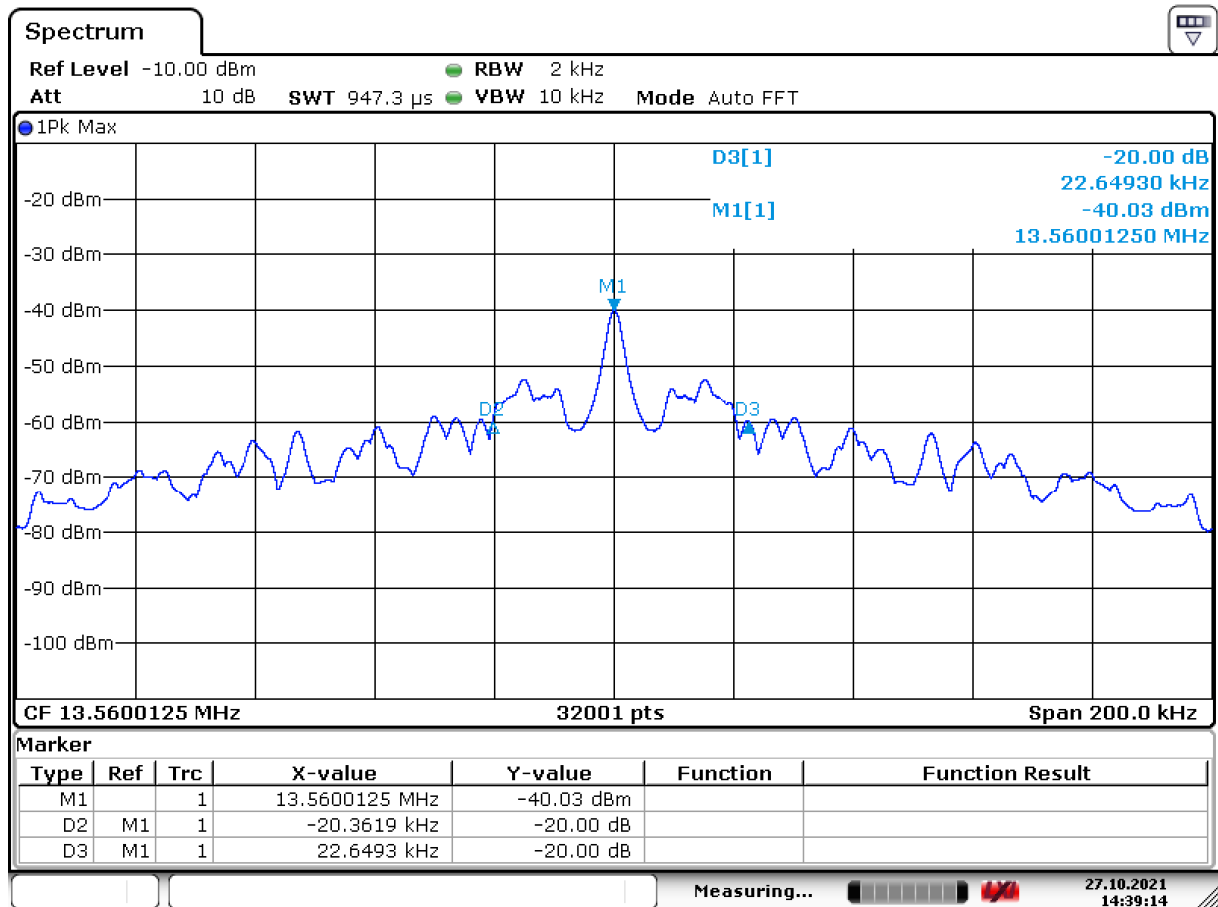

Date: 27.OCT.2021 14:39:14

7.7 Occupied bandwidth

| NORMATIVE REFERENCES | | | RESULT |
|--------------------------------------|------------------------|---|--------|
| Limits according to: | RSS-Gen, Issue 5, 6.7 | | P |
| Methods of measurement according to: | RSS-Gen, Issue 5, 6.7 | | |
| Equipment mode | Power interface | 1 | |
| | EUT configuration mode | 3 | |
| | Operation mode | 3 | |


Test equipment

| DESCRIPTION | MANUFACTURER | TYPE | SN | ASSET NO. | CALIBRATION |
|----------------------------|-----------------|-------|--------|------------|------------------|
| Receiver 10 Hz - 40 GHz | Rohde & Schwarz | FSV40 | 101400 | PM KF 2783 | 2020-08 (1 year) |
| Loop antenna | Rohde & Schwarz | HZ-10 | 100055 | PM KF 0965 | 2020-05 (3 year) |

Comment

The 99% occupied bandwidth is 1.2 MHz.

Measurement results – 99% occupied bandwidth:

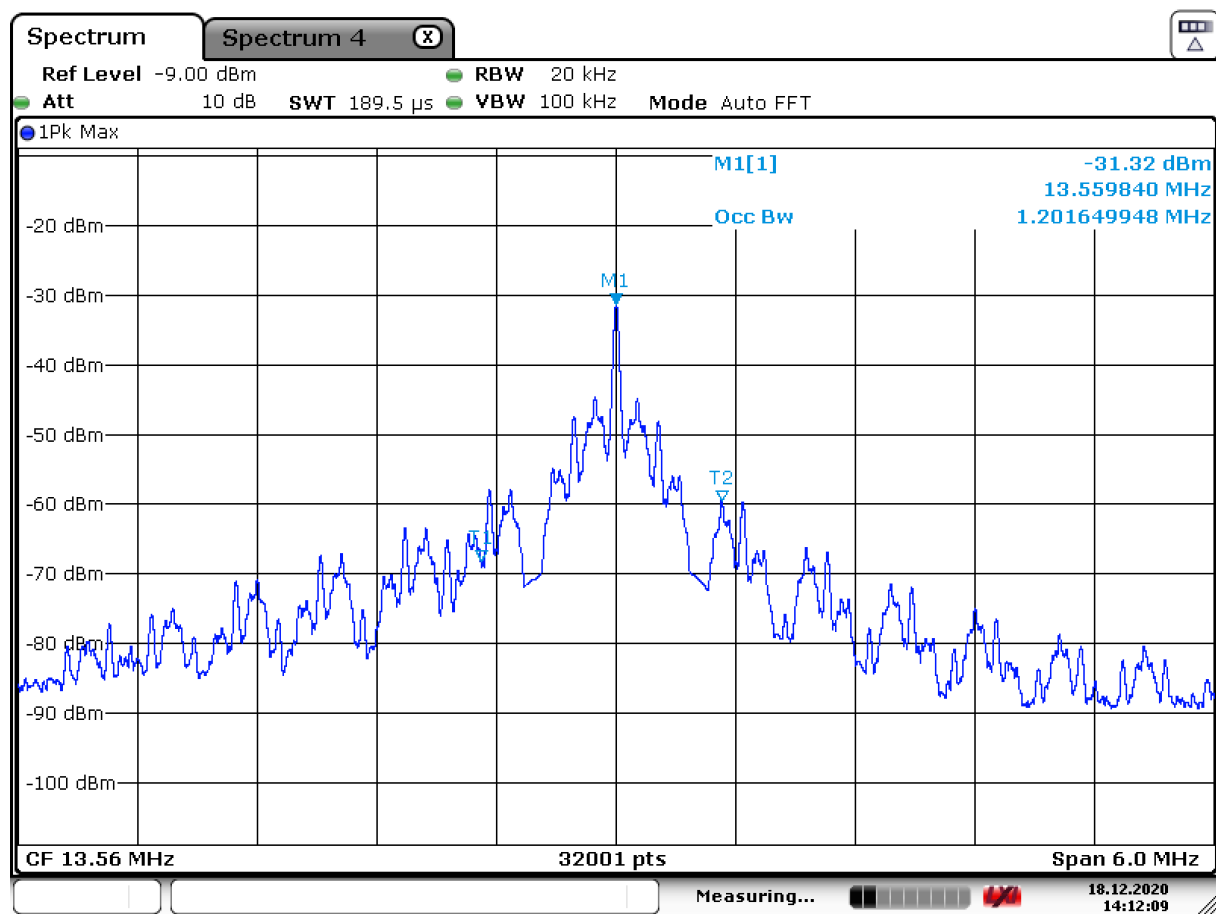

Date: 18.DEC.2020 14:12:09

7.8 Measurement uncertainty evaluation

| | |
|--|------------------------|
| Measurement uncertainty for conducted emissions, LISN, 150 kHz -30 MHz | ± 2.3 dB |
| Measurement uncertainty for radiated magnetic field, 9 kHz – 30 MHz | ± 4.9 dB |
| Measurement uncertainty for radiated emission, 30 MHz - 1000 MHz | ± 5.9 dB |
| Measurement uncertainty for OBW | ± 4.3 % |
| 601 points resolution (Spectrum analyzer) | ± 0.83 % |
| 30000 points resolution (Spectrum analyzer) | ± 0.016 % |
| Measurement uncertainty for Frequency error | ± 1 x 10 ⁻⁸ |

End of test report