

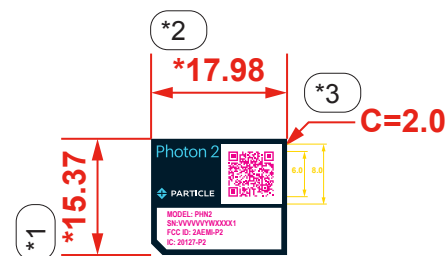
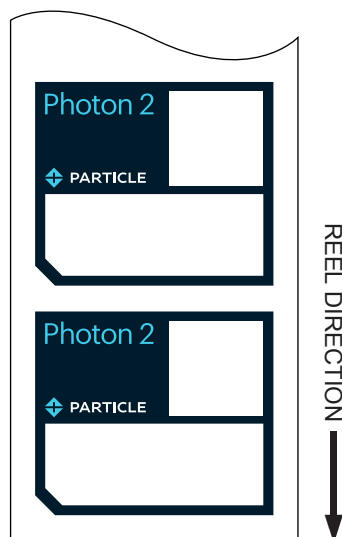


REVISIONS

REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	11/09/22	SANDY CHEN



ON LINE PRINT
DIE CUT




NOTES:

- MATERIAL: WHITE PI (#25德品耐高溫條碼標籤DP-1025W), t=0.043
- ADHESIVE: 壓克力背膠, t=0.023
- TEMPERATURE RESISTANT= 280°C x 10min/ 320°C x 10s
- COLOR:
 - BACKGROUND= PANTONE 296 C
 - PARTICLE LOGO & P2= PANTONE 305 C
- 被貼物: SHIELDING COVER
- 捲狀出貨, 無虛刀
- 離型紙左右間距各3±0.5mm, 上下間距各3±0.5mm
- 印刷公差: 尺寸30mm以下為±0.3mm, 120~315mm為±0.5mm, 315以上±0.8mm
- TEST REQUIREMENTS:

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:
INTEGRAL DIMENSIONS ± 0.2
1 PLACE DECIMAL ± 0.2
ANGULAR DIMENSIONS ± 2°
HOLES UNDER Ø5.00 ± 0.2

THIRD ANGLE PROJECTION



WNC
Wistron NeWeb Corp.

啟碁科技股份有限公司

20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,
Taiwan, R.O.C.
Tel: 886-3-6667799 Fax: 886-3-5788726

DWG TITLE

LABEL, PHOTON 2, SHIELDING COVER LBL, HIGH TEMP, DHSK-PC2

DRAWN	YOLANDA CHENG	11/09/22	SIZE	DWG NO.	4L.DHSP.003	REV	A
ENGR	YOLANDA CHENG	11/09/22	A4				
APVD	SANDY CHEN	11/09/22	SCALE	1/1	SHEET	1 OF 1	